


FCC Co-Location Test Report

FCC ID : 2AAS9-MI12
Equipment : Wi-Fi 6 AX6000 Dual-Radio Indoor Router
Model No. : MI12
Brand Name : PRISM
Applicant : BROWAN COMMUNICATIONS
INCORPORATION
Address : No.15-1, Zhonghua Rd., Hsinchu Industrial
Park, Hukou Hsinchu Hsien Taiwan 303
Standard : 47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
Received Date : Mar. 17, 2023
Tested Date : Mar. 30 ~ Apr. 21, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

| | | |
|----------|---|-----------|
| 1 | GENERAL DESCRIPTION | 5 |
| 1.1 | Information..... | 5 |
| 1.2 | The Equipment List | 6 |
| 1.3 | Test Standards | 7 |
| 1.4 | Reference Guidance | 7 |
| 1.5 | Deviation from Test Standard and Measurement Procedure..... | 7 |
| 1.6 | Measurement Uncertainty | 7 |
| 2 | TEST CONFIGURATION..... | 8 |
| 2.1 | Testing Facility | 8 |
| 2.2 | The Worst Test Modes and Channel Details | 8 |
| 3 | TRANSMITTER TEST RESULTS | 9 |
| 3.1 | Unwanted Emissions into Restricted Frequency Bands | 9 |
| 4 | TEST LABORATORY INFORMATION | 13 |

Appendix A. Unwanted Emissions Into Restricted Frequency Bands

Release Record

| Report No. | Version | Description | Issued Date |
|------------|---------|---------------|--------------|
| FR331702CO | Rev. 01 | Initial issue | May 17, 2023 |

Summary of Test Results

| FCC Rules | Test Items | Measured | Result |
|----------------------------------|--------------------|---|--------|
| 15.247(d) 15.407(b) 15.209 | Radiated Emissions | [dBuV/m at 3m]: 32.91MHz 36.68 (Margin -3.32dB) - QP | Pass |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

| | |
|----------------------------|---|
| Operating Frequency | 802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5745 ~ 5825 MHz |
| Modulation Type | 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) |

1.1.2 Antenna Details

| Ant. No. | Brand | Model | Type | Connector | Operating Frequencies (MHz) / Antenna Gain (dBi) | | |
|----------|---------|------------------|------|-----------|--|-----------|-----------|
| | | | | | 2400~2483.5 | 5150~5250 | 5725~5850 |
| Ant 1 | LYNwave | AEX22M-222AA1-00 | PIFA | UFL | 2.71 | 2.13 | 2.9 |
| Ant 2 | LYNwave | AEX22M-222AA2-00 | PIFA | UFL | 2.71 | 2.13 | 2.9 |
| Ant 3 | LYNwave | AEX22M-222AA4-00 | PIFA | UFL | 2.71 | 2.13 | 2.9 |
| Ant 4 | LYNwave | AEX22M-222AA3-00 | PIFA | UFL | 2.71 | 2.13 | 2.9 |

1.1.3 Power Supply Type of Equipment under Test (EUT)

| | |
|--------------------------|----------------|
| Power Supply Type | 56Vdc from POE |
|--------------------------|----------------|

Note: The above power supply is not bundled in market.

1.1.4 Accessories

| Accessories | | |
|-------------|------------------|-------------|
| No. | Equipment | Description |
| 1 | MOUNTING-BRACKET | -- |

1.2 The Equipment List

| Test Item | Radiated Emission | | | | |
|-------------------------|----------------------------|---------------------------|------------------|------------------|-------------------|
| Test Site | 966 chamber1 / (03CH01-WS) | | | | |
| Tested Date | Mar. 30 ~ Apr. 21, 2023 | | | | |
| Instrument | Brand | Model No. | Serial No. | Calibration Date | Calibration Until |
| Receiver | R&S | ESR3 | 101657 | Mar. 03, 2023 | Mar. 02, 2024 |
| Spectrum Analyzer | R&S | FSV40 | 101498 | Nov. 21, 2022 | Nov. 20, 2023 |
| Loop Antenna | R&S | HFH2-Z2 | 100330 | Nov. 01, 2022 | Oct. 31, 2023 |
| Bilog Antenna | SCHWARZBECK | VULB9168 | VULB9168-522 | Aug. 03, 2022 | Aug. 02, 2023 |
| Horn Antenna 1G-18G | SCHWARZBECK | BBHA 9120 D | BBHA 9120 D 1096 | Nov. 25, 2022 | Nov. 24, 2023 |
| Horn Antenna 18G-40G | SCHWARZBECK | BBHA 9170 | BBHA 9170517 | Oct. 27, 2022 | Oct. 26, 2023 |
| Preamplifier | EMC | EMC02325 | 980225 | Jun. 28, 2022 | Jun. 27, 2023 |
| Preamplifier | EMC | EMC118A45SE | 980898 | Jul. 16, 2022 | Jul. 15, 2023 |
| Preamplifier | EMC | EMC184045SE | 980903 | Jul. 16, 2022 | Jul. 15, 2023 |
| Loop Antenna Cable | KOAX KABEL | 101354-BW | 101354-BW | Oct. 04, 2022 | Oct. 03, 2023 |
| LF cable 3M | Woken | CFD400NL-LW | CFD400NL-001 | Oct. 04, 2022 | Oct. 03, 2023 |
| LF cable 11M | EMC | EMCCFD400-NW-N W-11000 | 200801 | Oct. 04, 2022 | Oct. 03, 2023 |
| LF cable 1M | EMC | EMCCFD400-NM-N M-1000 | 160502 | Oct. 04, 2022 | Oct. 03, 2023 |
| RF Cable | EMC | EMC104-35M-35M- 8000 | 210920 | Oct. 04, 2022 | Oct. 03, 2023 |
| RF Cable | EMC | EMC104-35M-35M- 3000 | 210922 | Oct. 04, 2022 | Oct. 03, 2023 |
| Measurement Software | AUDIX | e3 | 6.120210g | NA | NA |

Note: Calibration Interval of instruments listed above is one year.

| Test Item | RF Conducted | | | | |
|-------------------------|-------------------------|-----------------|------------|------------------|-------------------|
| Test Site | (TH01-WS) | | | | |
| Tested Date | Mar. 30 ~ Apr. 21, 2023 | | | | |
| Instrument | Brand | Model No. | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer | R&S | FSV40 | 101498 | Nov. 21, 2022 | Nov. 20, 2023 |
| Power Meter | Anritsu | ML2495A | 1241002 | Nov. 23, 2022 | Nov. 22, 2023 |
| Power Sensor | Anritsu | MA2411B | 1207366 | Nov. 23, 2022 | Nov. 22, 2023 |
| Measurement Software | Sporton | SENSE-15247_DTS | V5.11 | NA | NA |

Note: Calibration Interval of instruments listed above is one year.

1.3 Test Standards

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
ANSI C63.10-2013

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

| Measurement Uncertainty | |
|-------------------------------|---------------|
| Parameters | Uncertainty |
| Unwanted Emission \leq 1GHz | ± 3.41 dB |
| Unwanted Emission $>$ 1GHz | ± 4.59 dB |

2 Test Configuration

2.1 Testing Facility

| | |
|-----------------------------|--|
| Test Laboratory | International Certification Corporation |
| Test Site | 03CH01-WS, TH01-WS |
| Address of Test Site | No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) |

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

| Test item | Modulation Mode |
|---|---------------------------------------|
| Unwanted Emissions | 2.4G ax HE20 2437MHz + 5G 11a 5785MHz |
| Conducted Emissions | |
| NOTE: The selected channel is the maximum power channel of Wi-Fi mode. | |

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

| Restricted Band Emissions Limit | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

| Un-restricted band emissions above 1GHz Limit | |
|---|---|
| Operating Band | Limit |
| 5.15 - 5.25 GHz | e.i.r.p. -27 dBm [68.2 dBuV/m@3m] |
| 5.725 - 5.850 GHz | All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. |

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup


Radiated Emissions below 1 GHz

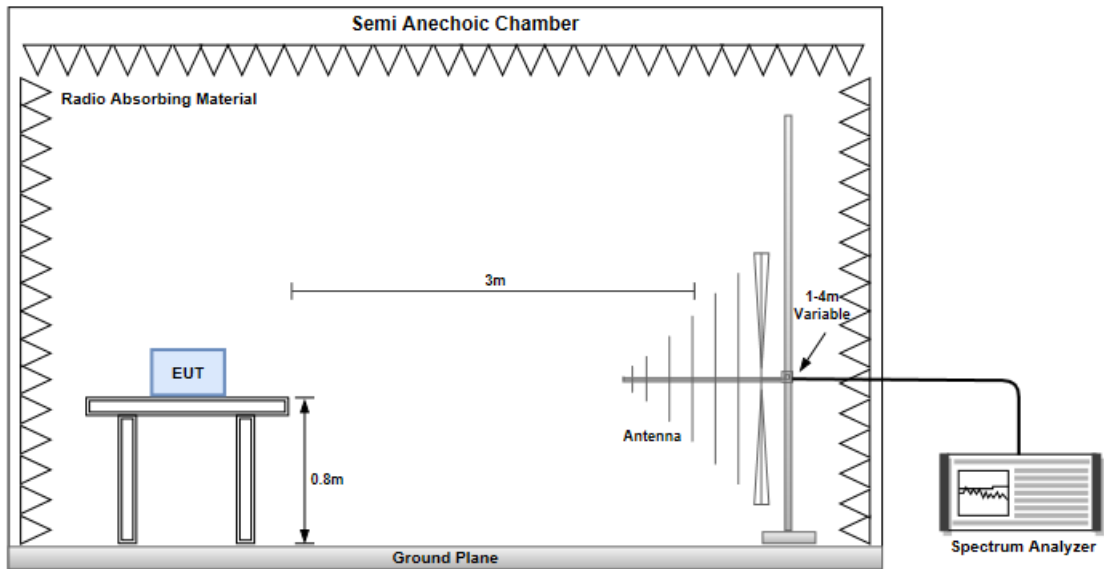

Radiated Emissions above 1 GHz

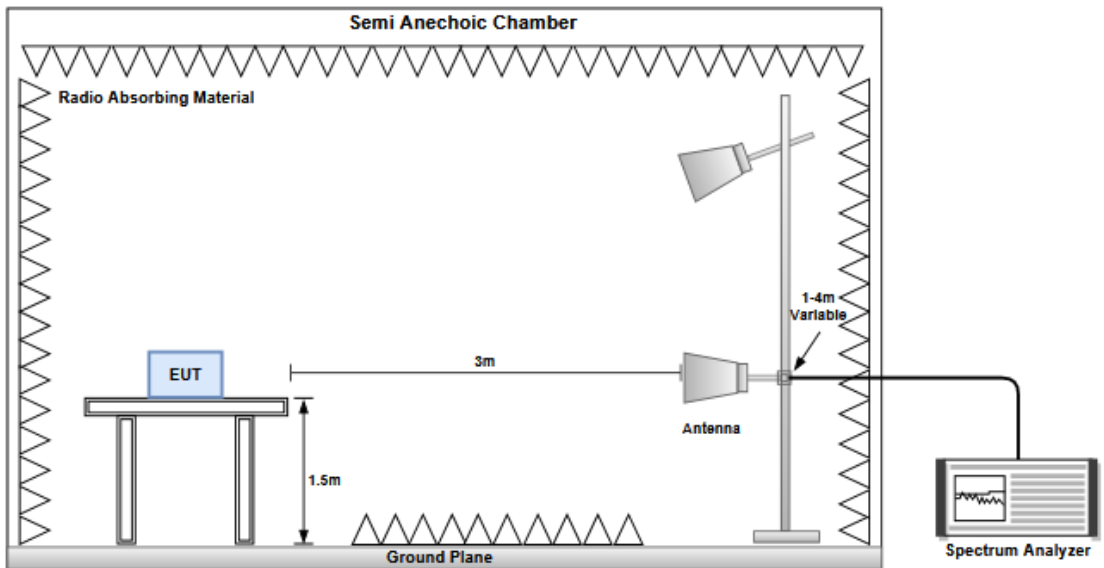

Transmitter Conducted Unwanted Emissions (30MHz~40GHz)



3.1.4 Test Results

Refer to Appendix A.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==



Unwanted Emissions (Below 1GHz)

| | | | | | | | | | | |
|---|---------------------------------------|----------------|--------------------|--------|------------|----------------|--------|----------|------------|--|
| Modulation mode | 2.4G ax HE20 2437MHz + 5G 11a 5785MHz | | | | | | | | | |
| Polarization | Horizontal | | | | | | | | | |
| Test By :Paul Lin | | | Temperature(°C):26 | | | Humidity(%):64 | | | | |
| <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 45 dBuV/m at 100 MHz, and then to 55 dBuV/m at 950 MHz. Six blue vertical lines indicate emission peaks at 124.97 MHz (labeled 1), 249.84 MHz (labeled 2), 458.91 MHz (labeled 3), 500.54 MHz (labeled 4), 625.40 MHz (labeled 5), and 750.27 MHz (labeled 6). All peaks are below the CLASS-B limit.</p> | | | | | | | | | | |
| | Freq. | Emission level | Limit | Margin | SA reading | Factor | Remark | ANT High | Turn Table | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | cm | deg | |
| 1 | 124.97 | 30.53 | 43.50 | -12.97 | 41.35 | -10.82 | Peak | --- | --- | |
| 2 | 249.84 | 34.09 | 46.00 | -11.91 | 44.16 | -10.07 | Peak | --- | --- | |
| 3 | 458.91 | 32.83 | 46.00 | -13.17 | 36.83 | -4.00 | Peak | --- | --- | |
| 4 | 500.54 | 32.83 | 46.00 | -13.17 | 36.03 | -3.20 | Peak | --- | --- | |
| 5 | 625.40 | 31.60 | 46.00 | -14.40 | 31.94 | -0.34 | Peak | --- | --- | |
| 6 | 750.27 | 35.35 | 46.00 | -10.65 | 33.74 | 1.61 | Peak | --- | --- | |
| <p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p> | | | | | | | | | | |



| | | | | | | | | | | |
|--|---------------------------------------|----------|---------------------|--------|---------|-----------------|--------|------|-------|--|
| Modulation | 2.4G ax HE20 2437MHz + 5G 11a 5785MHz | | | | | | | | | |
| Polarization | Vertical | | | | | | | | | |
| Test By : Paul Lin | | | Temperature(°C): 26 | | | Humidity(%): 64 | | | | |
| <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step-like line represents the CLASS-B emission limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 43 dBuV/m at 100 MHz, 45 dBuV/m at 200 MHz, and 46 dBuV/m from 200 MHz to 1000 MHz. Six blue vertical lines indicate peak emissions at 32.91 MHz, 57.16 MHz, 192.96 MHz, 248.25 MHz, 467.47 MHz, and 499.48 MHz.</p> | | | | | | | | | | |
| | Freq. | Emission | Limit | Margin | SA | Factor | Remark | ANT | Turn | |
| | MHz | level | dBuV/m | dB | reading | dB/m | | High | Table | |
| | | | | | | | | cm | deg | |
| 1 | 32.91 | 36.68 | 40.00 | -3.32 | 46.40 | -9.72 | QP | 100 | 245 | |
| 2 | 57.16 | 33.64 | 40.00 | -6.36 | 42.23 | -8.59 | Peak | --- | --- | |
| 3 | 192.96 | 28.98 | 43.50 | -14.52 | 40.57 | -11.59 | Peak | --- | --- | |
| 4 | 248.25 | 29.18 | 46.00 | -16.82 | 39.28 | -10.10 | Peak | --- | --- | |
| 5 | 467.47 | 32.21 | 46.00 | -13.79 | 36.06 | -3.85 | Peak | --- | --- | |
| 6 | 499.48 | 33.46 | 46.00 | -12.54 | 36.68 | -3.22 | Peak | --- | --- | |

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz)



| | | | | | | | | | | |
|---|---------------------------------------|----------|--------------------|--------|---------|----------------|---------|------|-------|--|
| Modulation | 2.4G ax HE20 2437MHz + 5G 11a 5785MHz | | | | | | | | | |
| Polarization | Horizontal | | | | | | | | | |
| Test By :Paul Lin | | | Temperature(°C):25 | | | Humidity(%):64 | | | | |
| <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent limits: CLASS-B at approximately 74 dBuV/m and CLASS-B (AVG) at approximately 54 dBuV/m. Four vertical blue lines with arrows point to specific emission levels: 2 at 3348 MHz (~40.8 dBuV/m), 3 at 8222 MHz (~38.73 dBuV/m), and 4 at 8222 MHz (~50.62 dBuV/m). A fourth point is marked at 3348 MHz (~27.5 dBuV/m).</p> | | | | | | | | | | |
| | Freq. | Emission | Limit | Margin | SA | Factor | Remark | ANT | Turn | |
| | MHz | level | dBuV/m | dB | reading | dB/m | | High | Table | |
| | | dBuV/m | | | dBuV | | | cm | deg | |
| 1 | 3348.00 | 27.50 | 54.00 | -26.50 | 30.89 | -3.39 | Average | 100 | 202 | |
| 2 | 3348.00 | 40.80 | 74.00 | -33.20 | 44.19 | -3.39 | Peak | 100 | 202 | |
| 3 | 8222.00 | 38.73 | 54.00 | -15.27 | 33.47 | 5.26 | Average | 100 | 182 | |
| 4 | 8222.00 | 50.62 | 74.00 | -23.38 | 45.36 | 5.26 | Peak | 100 | 182 | |
| <p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p> | | | | | | | | | | |



| | | | | | | | | | | |
|---|---------------------------------------|----------|---------------------|--------|---------|-----------------|---------|------|-------|--|
| Modulation | 2.4G ax HE20 2437MHz + 5G 11a 5785MHz | | | | | | | | | |
| Polarization | Vertical | | | | | | | | | |
| Test By : Paul Lin | | | Temperature(°C): 25 | | | Humidity(%): 64 | | | | |
| <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent limits: CLASS-B at approximately 75 dBuV/m and CLASS-B (AVG) at approximately 55 dBuV/m. Two vertical blue lines with arrows point to peaks at 3348 MHz (labeled '2') and 8222 MHz (labeled '4').</p> | | | | | | | | | | |
| | Freq. | Emission | Limit | Margin | SA | Factor | Remark | ANT | Turn | |
| | MHz | level | dBuV/m | dB | reading | dB/m | | High | Table | |
| | | | | | | | | cm | deg | |
| 1 | 3348.00 | 26.76 | 54.00 | -27.24 | 30.15 | -3.39 | Average | 100 | 147 | |
| 2 | 3348.00 | 39.99 | 74.00 | -34.01 | 43.38 | -3.39 | Peak | 100 | 147 | |
| 3 | 8222.00 | 39.01 | 54.00 | -14.99 | 33.75 | 5.26 | Average | 100 | 106 | |
| 4 | 8222.00 | 51.16 | 74.00 | -22.84 | 45.90 | 5.26 | Peak | 100 | 106 | |
| <p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p> | | | | | | | | | | |




| | | | |
|-------------------|------------|-----------|------------|
| Ambient Condition | 23°C / 63% | Tested By | Akun Chung |
|-------------------|------------|-----------|------------|

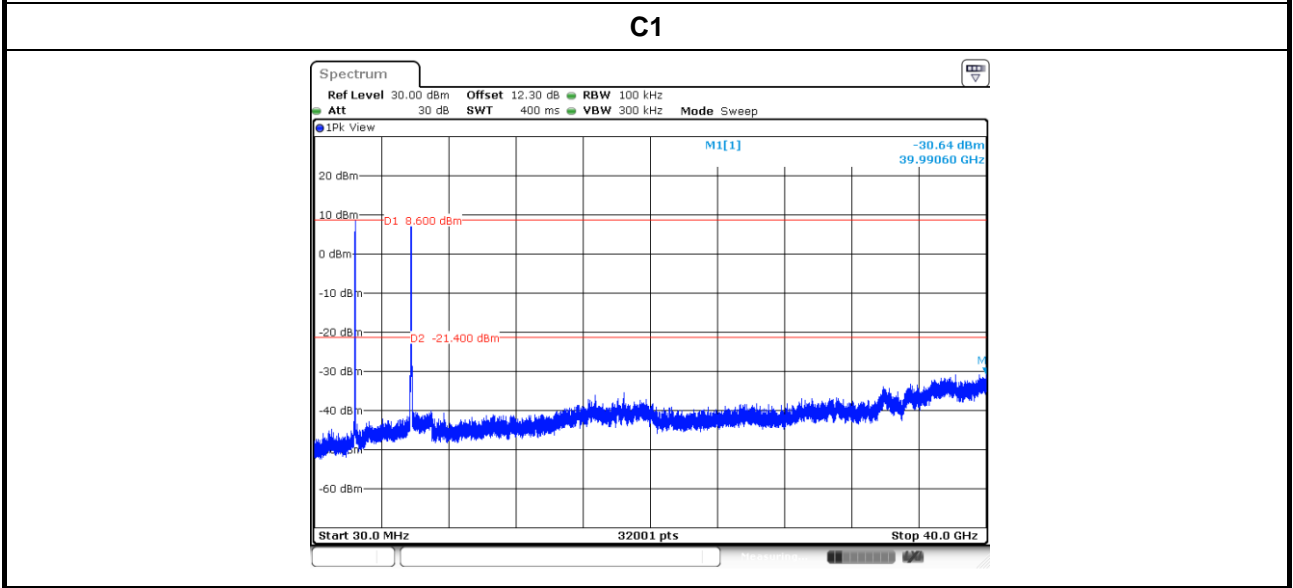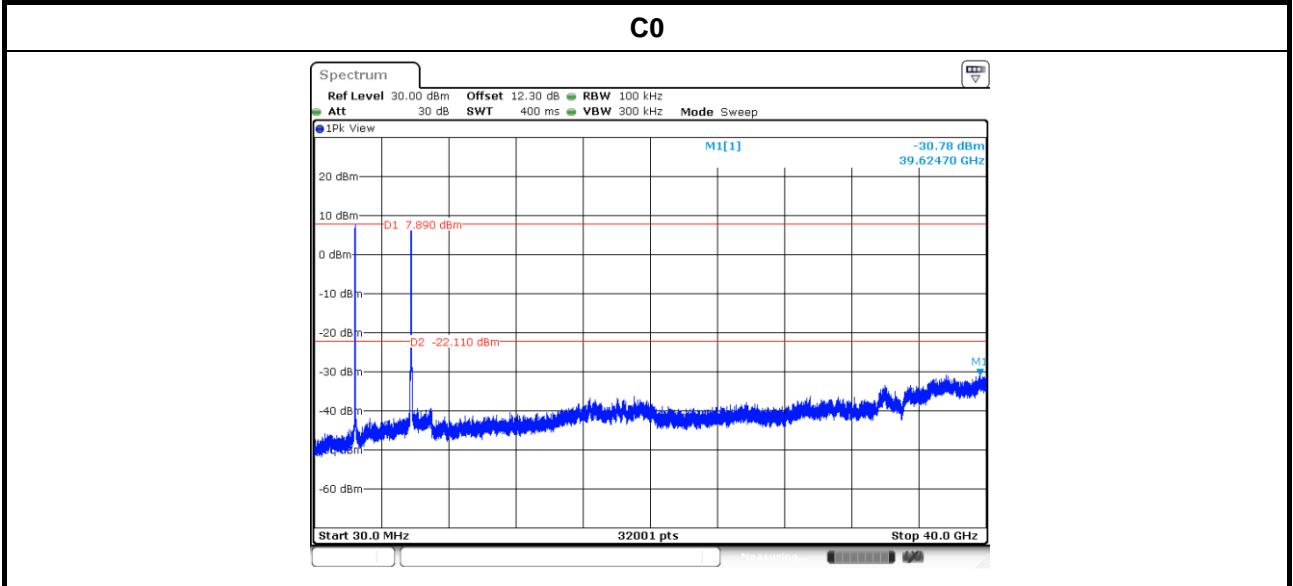



C2

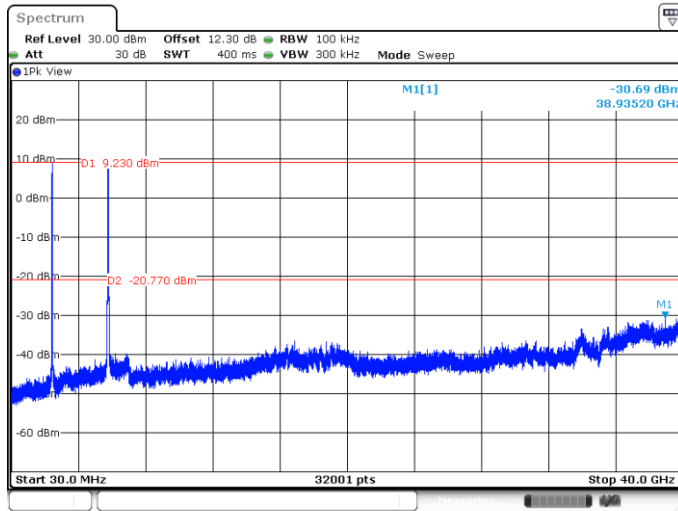

C3

