


# FCC C2PC Test Report

**FCC ID** : 2AAS9-MO10  
**Equipment** : Wi-Fi 6 AX6600 Tri-Radio Outdoor Mesh Router  
**Model No.** : MO10  
**Brand Name** : PRISM  
**Applicant** : Browan Communications Incorporation  
**Address** : No.15-1, Zhonghua Rd., Hsinchu Industrial Park, Hukou Hsinchu Hsien Taiwan 303  
**Standard** : 47 CFR FCC Part 15.407  
**Received Date** : Oct. 12, 2021  
**Tested Date** : Oct. 18 ~ Nov. 23, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Testing Laboratory  
2732

---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	9
1.3	Test Setup Chart .....	9
1.4	The Equipment List .....	10
1.5	Test Standards .....	11
1.6	Reference Guidance .....	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty .....	12
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>13</b>
2.1	Testing Facility .....	13
2.2	The Worst Test Modes and Channel Details .....	14
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>15</b>
3.1	Conducted Emissions.....	15
3.2	Emission Bandwidth .....	18
3.3	RF Output Power.....	29
3.4	Peak Power Spectral Density.....	35
3.5	Transmitter Radiated and Band Edge Emissions .....	46
3.6	Frequency Stability.....	95
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>97</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR1O1201-01AN	Rev. 01	Initial issue	Dec. 21, 2021

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.466MHz 35.09 (Margin -11.49dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5470.00MHz 67.04 (Margin -1.16dB) - PK	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5250~5350MHz: 17.15 5470~5725MHz: 23.51	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

This is a Class II Permissive Change report (C2PC). The modification is concerned with following items:

- Adding 5250~5350MHz and 5470~5725 MHz band by software setting.

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information (5250~5350MHz)					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5250-5350	a	5260-5320	52-64 [4]	2	6-54 Mbps
5250-5350	n (HT20)	5260-5320	52-64 [4]	2	MCS 0-15
5250-5350	n (HT40)	5270-5310	54-62 [2]	2	MCS 0-15
5250-5350	ac (VHT20)	5260-5320	52-64 [4]	2	MCS 0-9
5250-5350	ac (VHT40)	5270-5310	54-62 [2]	2	MCS 0-9
5250-5350	ac (VHT80)	5290	58 [1]	2	MCS 0-9
5250-5350	ax (HE20)	5260-5320	52-64 [4]	2	MCS 0-11
5250-5350	ax (HE40)	5270-5310	54-62 [2]	2	MCS 0-11
5250-5350	ax (HE80)	5290	58 [1]	2	MCS 0-11
RF General Information (5470~5725MHz)					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5470-5725	a	5500-5700	100-140 [11]	4	6-54 Mbps
5470-5725	n (HT20)	5500-5700	100-140 [11]	4	MCS 0-31
5470-5725	n (HT40)	5510-5670	102-134 [5]	4	MCS 0-31
5470-5725	ac (VHT20)	5500-5700	100-140 [11]	4	MCS 0-9
5470-5725	ac (VHT40)	5510-5670	102-134 [5]	4	MCS 0-9
5470-5725	ac (VHT80)	5530-5610	106-122 [2]	4	MCS 0-9
5470-5725	ac (VHT160)	5570	114[1]	4	MCS 0-9
5470-5725	ax (HE20)	5500-5700	100-140 [11]	4	MCS 0-11
5470-5725	ax (HE40)	5510-5670	102-134 [5]	4	MCS 0-11
5470-5725	ax (HE80)	5530-5610	106-122 [2]	4	MCS 0-11
5470-5725	ax (HE160)	5570	114[1]	4	MCS 0-11

Note: OFDM/OFDMA- BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)	
				5250~5350	5470~5725
1	ANT3	Dipole	N type	5.2	--
2	ANT1	Dipole	N type	5.6	--
3	ANT6	Dipole	N type	--	5.3
4	ANT2	Dipole	N type	--	5.1
5	ANT5	Dipole	N type	--	5.4
6	ANT4	Dipole	N type	--	5.7

### 1.1.3 Radio Details

Radio	Function
1	5.15 GHz ~ 5.35 GHz, 2T2R
2	5.47 GHz ~ 5.85 GHz, 4T4R
3	2.4 GHz, 2T2R

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	56Vdc from POE I/P: 100-240V~ 1.5A, 50-60Hz O/P: 56V= 0.805A
--------------------------	--

Note: The above power supply is not bundled in market.

### 1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Core	Brand: King core Model: KCF-130-B
2	Toolkit	--

### 1.1.6 Channel List

802.11a / n HT20 / ac VHT20 / ax HE20		802.11n HT40 / ac VHT40 / ax HE40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
52	5260	54	5270
56	5280	62	5310
60	5300	102	5510
64	5320	110	5550
100	5500	118	5590
104	5520	126	5630
108	5540	134	5670
112	5560	<b>802.11ac VHT80 / ax HE80</b>	
116	5580	58	5290
120	5600	106	5530
124	5620	122	5610
128	5640	<b>802.11ac VHT160 / ax HE160</b>	
132	5660	114	5570
136	5680	--	--
140	5700	--	--

### 1.1.7 Test Tool and Duty Cycle

Test Tool	QPSR, V5.0-00199		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11a	93.01%	0.31
	ax (HE20)-OFDMA	97.41%	0.11
	ax (HE40)-OFDMA	97.41%	0.11
	ax (HE80)-OFDMA	73.28%	1.35
	ax (HE160)-OFDMA	38.84%	4.11

### 1.1.8 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
11a	5260	15
11a	5300	15
11a	5320	15
11a	5500	12.5
11a	5580	12
11a	5700	13.5
ax (HE20)-OFDMA	5260	15
ax (HE20)-OFDMA	5300	15
ax (HE20)-OFDMA	5320	15
ax (HE20)-OFDMA	5500	13
ax (HE20)-OFDMA	5580	12.5
ax (HE20)-OFDMA	5700	14
ax (HE40)-OFDMA	5270	15
ax (HE40)-OFDMA	5310	15
ax (HE40)-OFDMA	5510	15.5
ax (HE40)-OFDMA	5590	15.5
ax (HE40)-OFDMA	5670	16.5
ax (HE80)-OFDMA	5290	15
ax (HE80)-OFDMA	5530	15.5
ax (HE80)-OFDMA	5610	17.5
ax (HE160)-OFDMA	5570	12



## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	POE	DELTA	ADH-45AR B	---	Provided by applicant.

## 1.3 Test Setup Chart

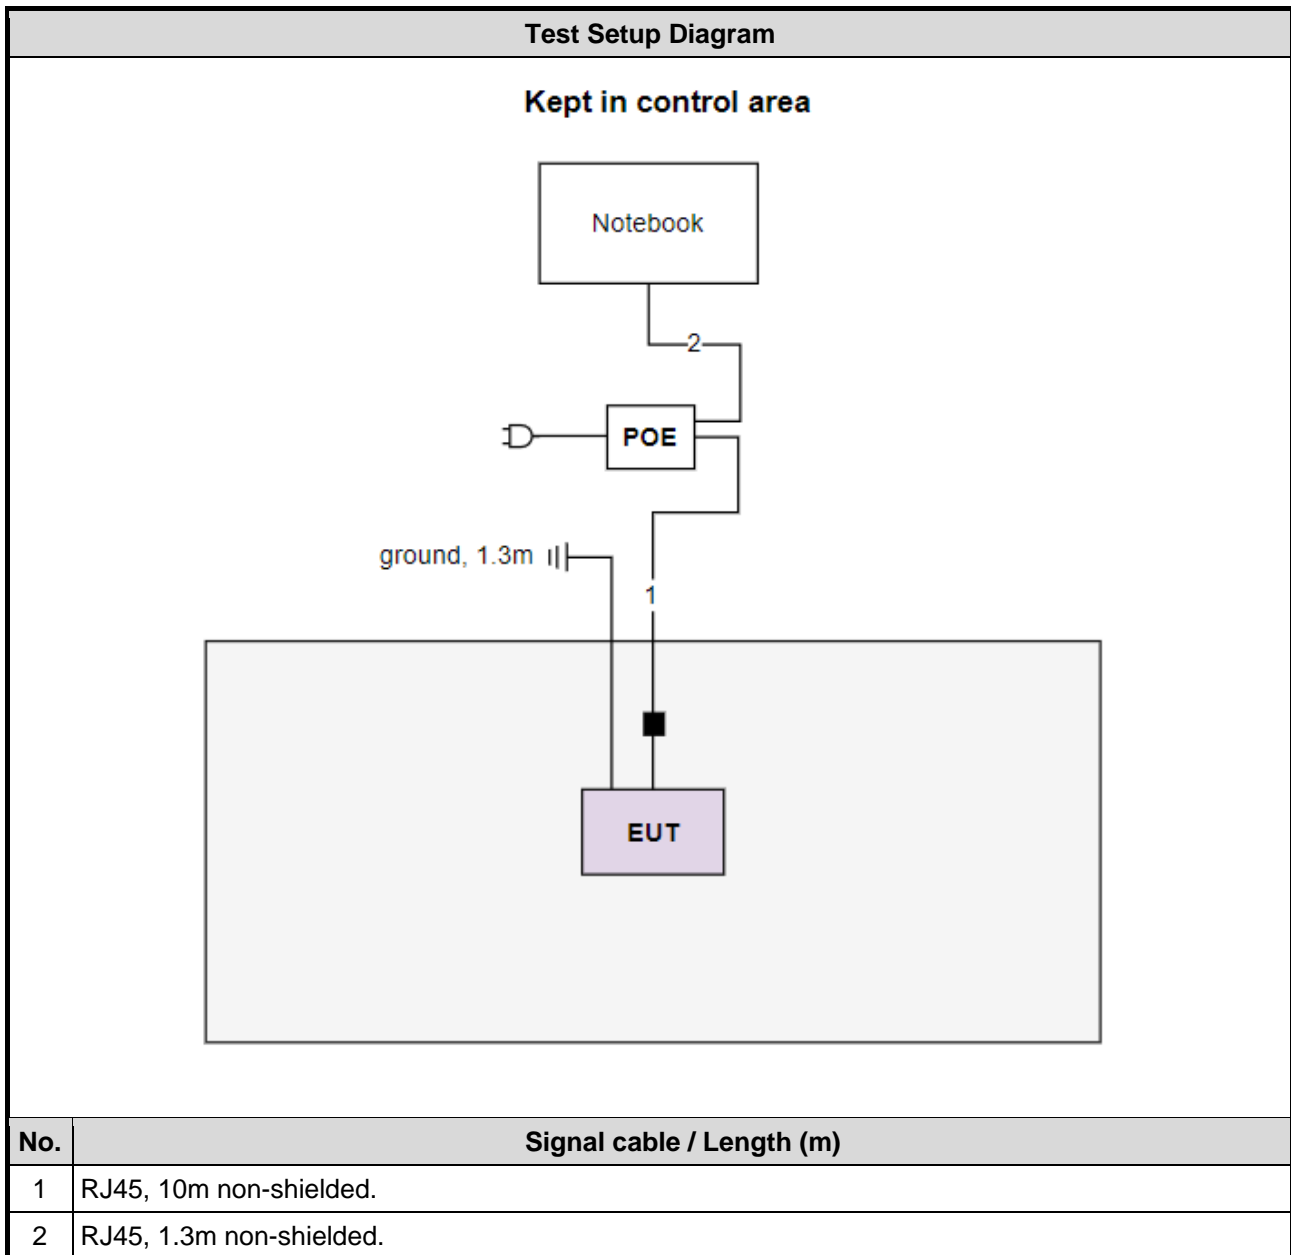

## 1.4 The Equipment List

Test Item	Radiated Emission Below 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Nov. 23, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission Above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Oct. 18 ~ Oct. 22, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Dec. 31, 2020	Dec. 30, 2021
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Nov. 23, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 29, 2020	Dec. 28, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Nov. 12 ~ Nov. 15, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Power Meter	Anritsu	ML2495A	1218007	Jan. 26, 2021	Jan. 25, 2022
Power Sensor	Anritsu	MA2411B	1207367	Jan. 26, 2021	Jan. 25, 2022
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 04, 2020	Dec. 03, 2021
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	May 25, 2021	May 24, 2022
Measurement Software	Sporton	SENSE-15407_NII	V5.10	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.407  
ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 412172 D01 Determining ERP and EIRP v01r01  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Frequency error	±1×10 <sup>-9</sup>
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB
Time	±0.1%
Temperature	±0.4 °C

---

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	CO01-WS, 03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

## 2.2 The Worst Test Modes and Channel Details

Frequency band 5250~5350MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
<b>Non-beamforming mode</b>				
Conducted Emissions Radiated Emissions ≤1GHz	11a	5300	6 Mbps	---
RF Output Power Radiated Emissions >1GHz Emission Bandwidth Peak Power Spectral Density	11a ax HE20-OFDMA ax HE40-OFDMA ax HE80-OFDMA	5260 / 5300 / 5320 5260 / 5300 / 5320 5270 / 5310 5290	6 Mbps MCS 0 MCS 0 MCS 0	---
Frequency Stability	Un-modulation	5300	---	---
<b>Beamforming mode</b>				
RF Output Power	11a ax HE20-OFDMA ax HE40-OFDMA ax HE80-OFDMA	5260 / 5300 / 5320 5260 / 5300 / 5320 5270 / 5310 5290	6 Mbps MCS 0 MCS 0 MCS 0	---

Frequency band 5470~5725MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
<b>Non-beamforming mode</b>				
Conducted Emissions Radiated Emissions ≤1GHz	ax HE80-OFDMA	5610	MCS 0	---
RF Output Power Radiated Emissions >1GHz Emission Bandwidth Peak Power Spectral Density	11a ax HE20-OFDMA ax HE40-OFDMA ax HE80-OFDMA ax HE160-OFDMA	5500 / 5580 / 5700 5500 / 5580 / 5700 5510 / 5590 / 5670 5530 / 5610 5570	6 Mbps MCS 0 MCS 0 MCS 0 MCS 0	---
Frequency Stability	Un-modulation	5580	---	---
<b>Beamforming mode</b>				
RF Output Power	11a ax HE20-OFDMA ax HE40-OFDMA ax HE80-OFDMA ax HE160-OFDMA	5500 / 5580 / 5700 5500 / 5580 / 5700 5510 / 5590 / 5670 5530 / 5610 5570	6 Mbps MCS 0 MCS 0 MCS 0 MCS 0	---

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

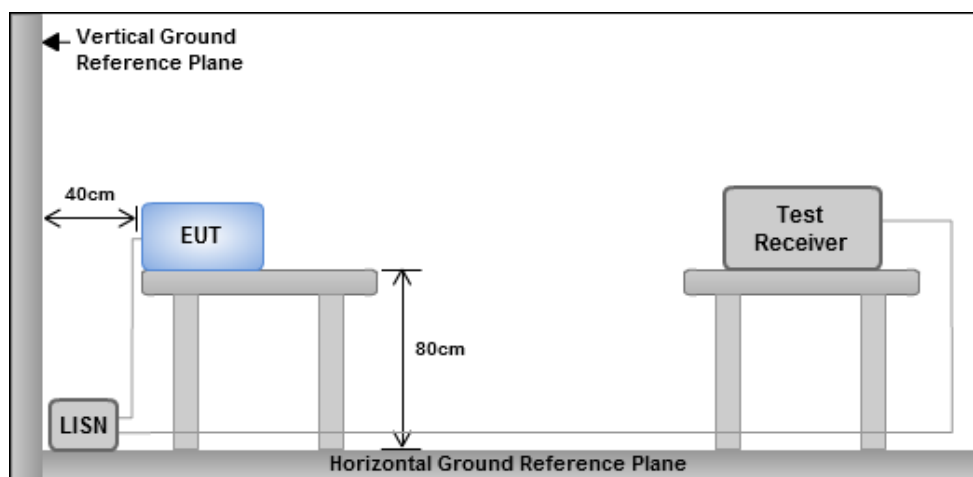

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


### 3.1.4 Test Result of Conducted Emissions

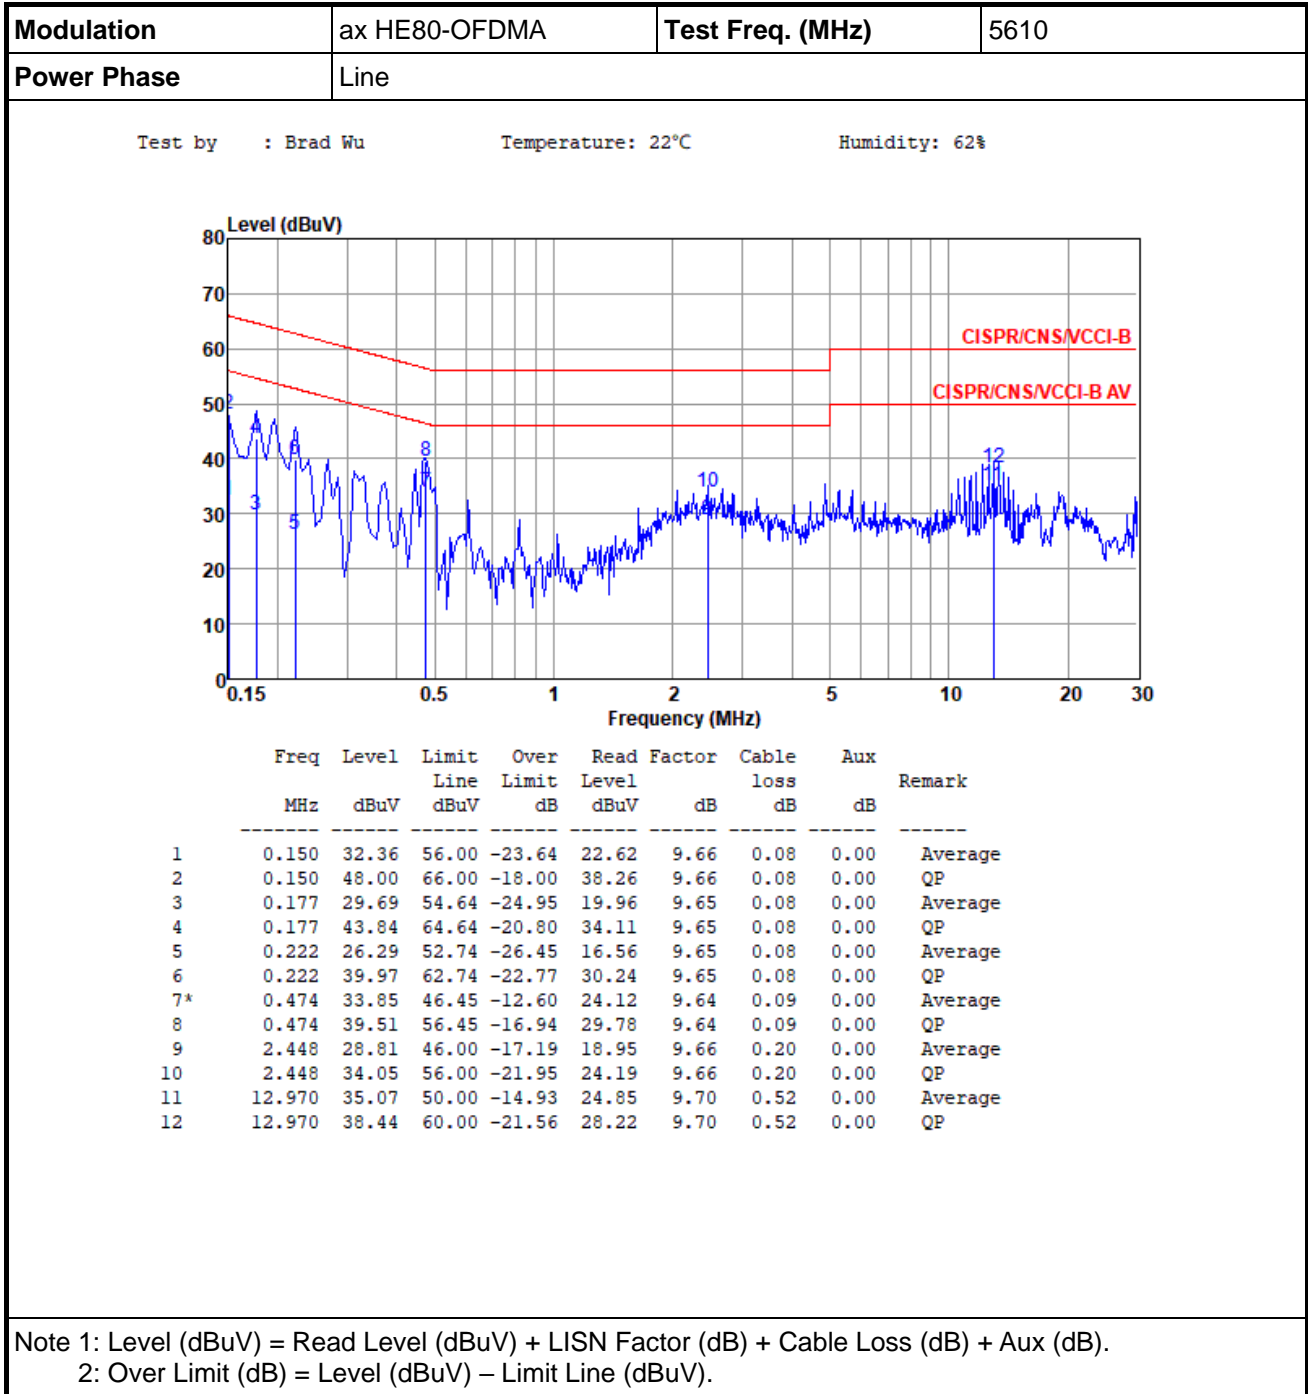



<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5610
<b>Power Phase</b>	Neutral		

Test by : Brad Wu      Temperature: 22°C      Humidity: 62%

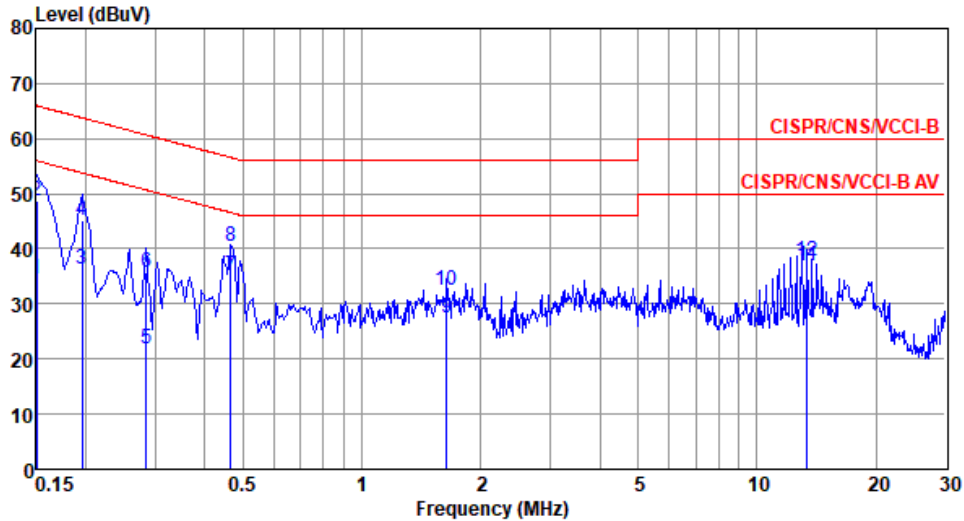

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	34.42	56.00	-21.58	24.65	9.69	0.08	0.00	Average
2	0.150	48.83	66.00	-17.17	39.06	9.69	0.08	0.00	QP
3	0.195	36.23	53.80	-17.57	26.47	9.68	0.08	0.00	Average
4	0.195	45.04	63.80	-18.76	35.28	9.68	0.08	0.00	QP
5	0.285	21.70	50.68	-28.98	11.95	9.67	0.08	0.00	Average
6	0.285	35.78	60.68	-24.90	26.03	9.67	0.08	0.00	QP
7*	0.466	35.09	46.58	-11.49	25.33	9.67	0.09	0.00	Average
8	0.466	40.48	56.58	-16.10	30.72	9.67	0.09	0.00	QP
9	1.636	27.45	46.00	-18.55	17.57	9.69	0.19	0.00	Average
10	1.636	32.44	56.00	-23.56	22.56	9.69	0.19	0.00	QP
11	13.380	36.77	50.00	-13.23	26.45	9.79	0.53	0.00	Average
12	13.380	37.70	60.00	-22.30	27.38	9.79	0.53	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Emission Bandwidth

### 3.2.1 Test Procedures


#### 26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

#### Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW  $\geq$  3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

### 3.2.2 Test Setup

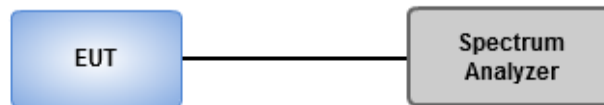

### 3.2.3 Test Result of Emission Bandwidth

<b>Ambient Condition</b>	21-23°C / 63-65%	<b>Tested By</b>	Brad Wu
--------------------------	------------------	------------------	---------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.797M	16.425M	16M4D1D	19.928M	16.353M
802.11ax HEW20_Nss1,(MCS0)_2TX -OFDMA	20.87M	18.813M	18M8D1D	20.435M	18.741M
802.11ax HEW40_Nss1,(MCS0)_2TX -OFDMA	40.58M	37.627M	37M6D1D	39.71M	37.482M
802.11ax HEW80_Nss1,(MCS0)_2TX -OFDMA	82.319M	77.279M	77M3D1D	81.739M	76.99M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	20.145M	16.57M	16M6D1D	19.275M	16.498M
802.11ax HEW20_Nss1,(MCS0)_4TX -OFDMA	22.029M	18.886M	18M9D1D	21.304M	18.813M
802.11ax HEW40_Nss1,(MCS0)_4TX -OFDMA	43.043M	37.916M	37M9D1D	42.029M	37.627M
802.11ax HEW80_Nss1,(MCS0)_4TX -OFDMA	82.319M	77.569M	77M6D1D	81.159M	76.99M
802.11ax HEW160_Nss1,(MCS0)_4TX -OFDMA	176.232M	157.453M	157MD1D	171.014M	157.453M

**Max-N dB** = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Min-OBW** = Minimum 99% occupied bandwidth;

## Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	20.507M	16.353M	20.507M	16.353M	-	-	-	-
5300MHz	Pass	Inf	20.725M	16.353M	20.797M	16.353M	-	-	-	-
5320MHz	Pass	Inf	19.928M	16.353M	20.29M	16.425M	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	20.145M	16.57M	19.71M	16.57M	19.71M	16.57M	19.493M	16.57M
5580MHz	Pass	Inf	20M	16.498M	20M	16.57M	19.783M	16.57M	20M	16.498M
5700MHz	Pass	Inf	19.855M	16.498M	19.855M	16.57M	20M	16.57M	19.275M	16.498M
802.11ax HEW20_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	20.435M	18.741M	20.87M	18.741M	-	-	-	-
5300MHz	Pass	Inf	20.435M	18.741M	20.797M	18.813M	-	-	-	-
5320MHz	Pass	Inf	20.58M	18.741M	20.507M	18.741M	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.594M	18.813M	21.957M	18.813M	21.667M	18.813M	22.029M	18.813M
5580MHz	Pass	Inf	21.884M	18.813M	21.667M	18.886M	21.304M	18.813M	21.667M	18.813M
5700MHz	Pass	Inf	21.522M	18.886M	21.957M	18.813M	21.449M	18.886M	21.304M	18.813M
802.11ax HEW40_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	Inf	39.855M	37.482M	39.71M	37.482M	-	-	-	-
5310MHz	Pass	Inf	39.71M	37.627M	40.58M	37.627M	-	-	-	-
802.11ax HEW40_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	Inf	42.899M	37.771M	42.754M	37.771M	42.609M	37.771M	42.609M	37.771M
5590MHz	Pass	Inf	42.609M	37.771M	42.029M	37.627M	42.319M	37.771M	42.609M	37.627M
5670MHz	Pass	Inf	43.043M	37.771M	43.043M	37.916M	42.464M	37.771M	42.174M	37.627M
802.11ax HEW80_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	Inf	82.319M	77.279M	81.739M	76.99M	-	-	-	-
802.11ax HEW80_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	Inf	82.319M	76.99M	81.739M	76.99M	81.159M	76.99M	82.029M	76.99M
5610MHz	Pass	Inf	82.319M	77.569M	82.029M	76.99M	81.449M	76.99M	82.029M	76.99M
802.11ax	-	-	-	-	-	-	-	-	-	-

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
HEW160_Nss1,(MCS0)_4TX -OFDMA										
5570MHz	Pass	Inf	176.232M	157.453M	171.594M	157.453M	176.232M	157.453M	171.014M	157.453M


**Port X-N dB** = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

**Port X-OBW** = Port X 99% occupied bandwidth;

### 802.11a\_Nss1,(6Mbps)\_2TX

EBW


#### 5260MHz

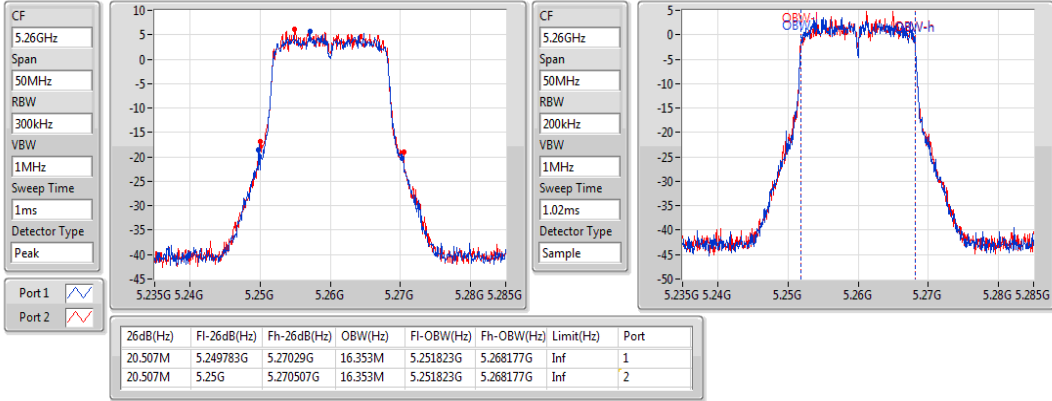

### 802.11a\_Nss1,(6Mbps)\_2TX

EBW


#### 5300MHz

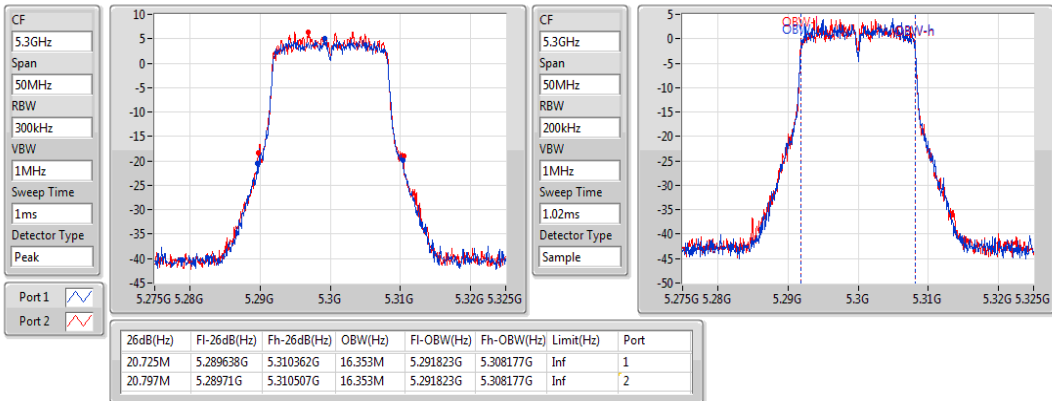

### 802.11a\_Nss1,(6Mbps)\_2TX

EBW


#### 5320MHz

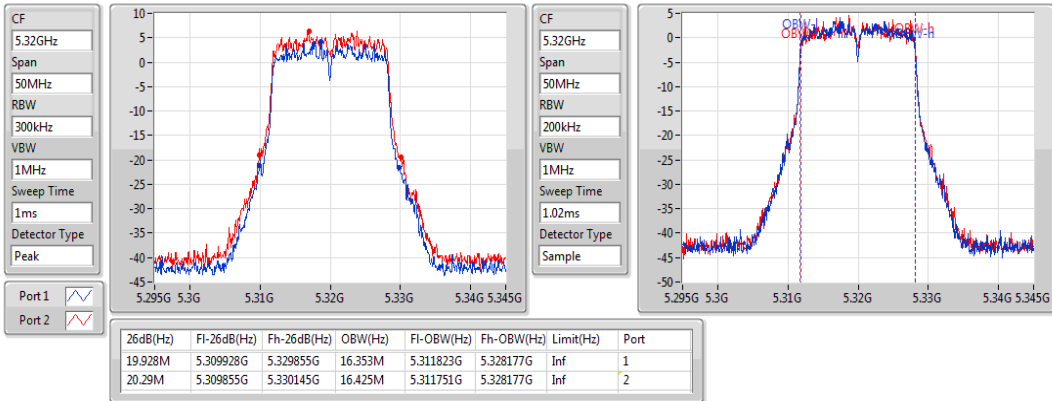

### 802.11a\_Nss1,(6Mbps)\_4TX

EBW


5500MHz

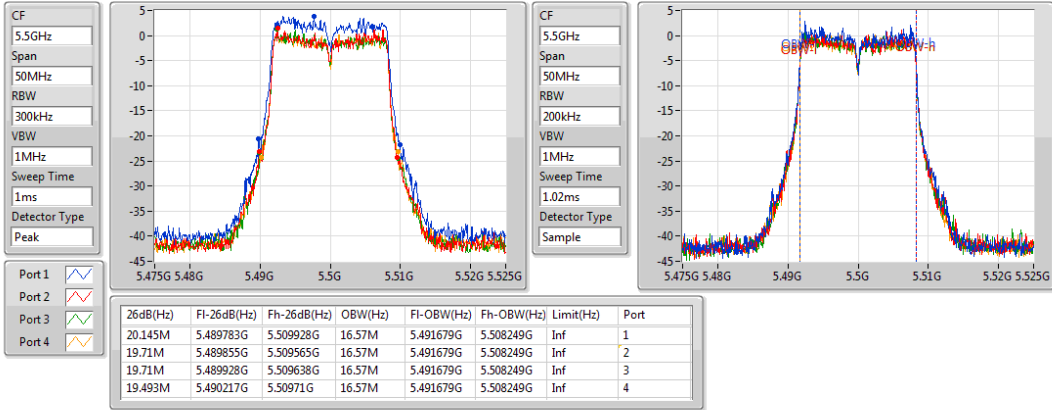

### 802.11a\_Nss1,(6Mbps)\_4TX

EBW


5580MHz

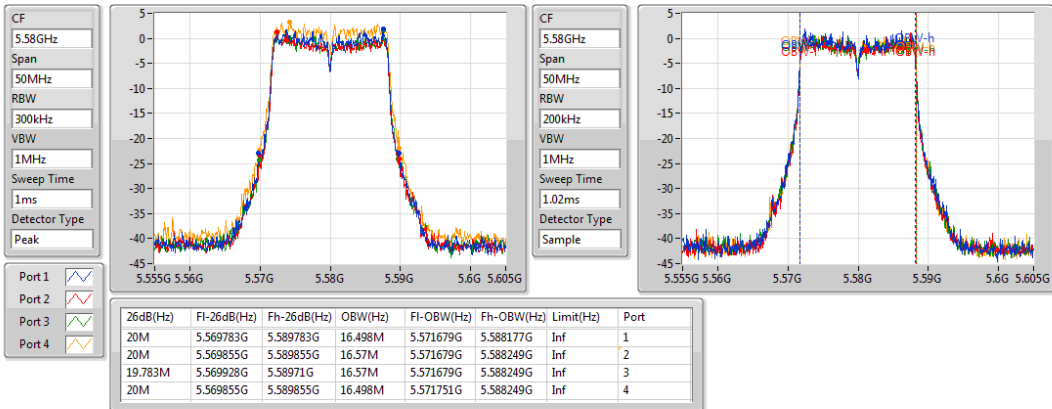

### 802.11a\_Nss1,(6Mbps)\_4TX

EBW


5700MHz

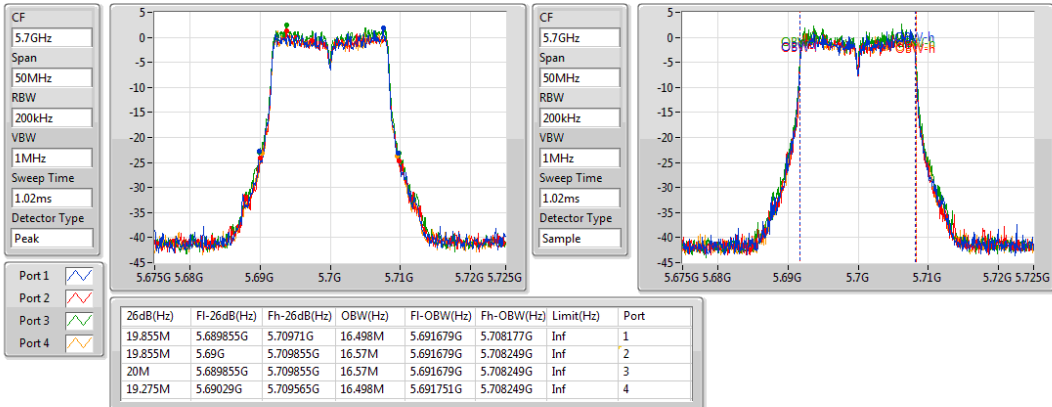

### 802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW


#### 5260MHz

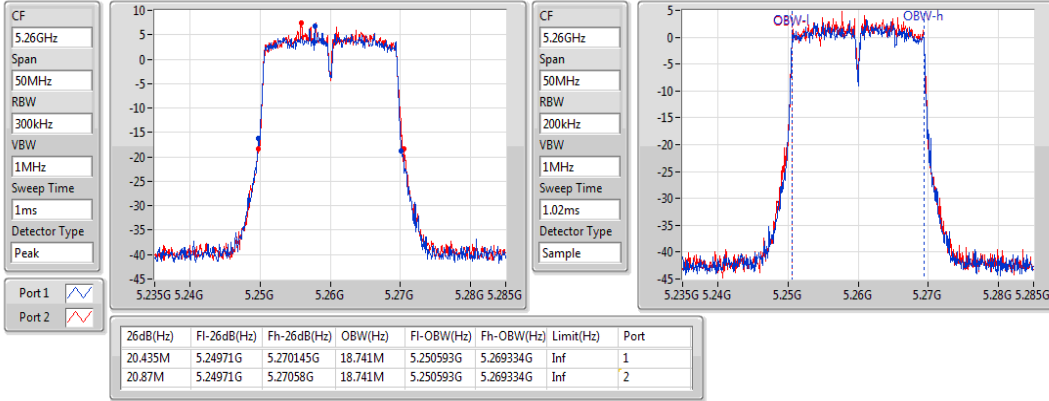

### 802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

#### 5300MHz

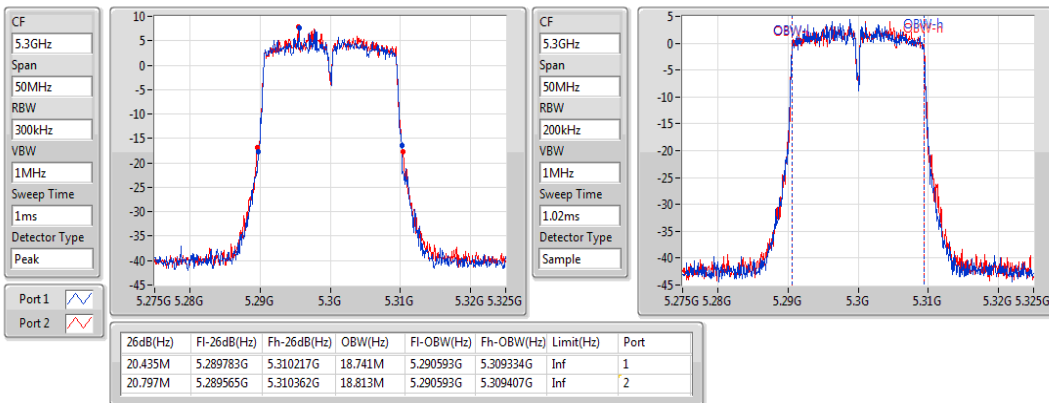

### 802.11ax HEW20\_Nss1,(MCS0)\_2TX

EBW

#### 5320MHz






### 802.11ax HEW20\_Nss1,(MCS0)\_4TX

EBW


5500MHz

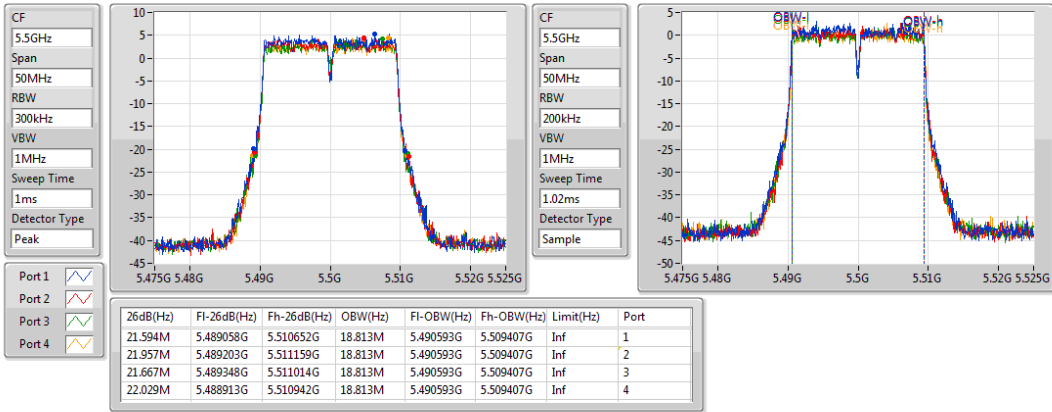

### 802.11ax HEW20\_Nss1,(MCS0)\_4TX

EBW


5580MHz

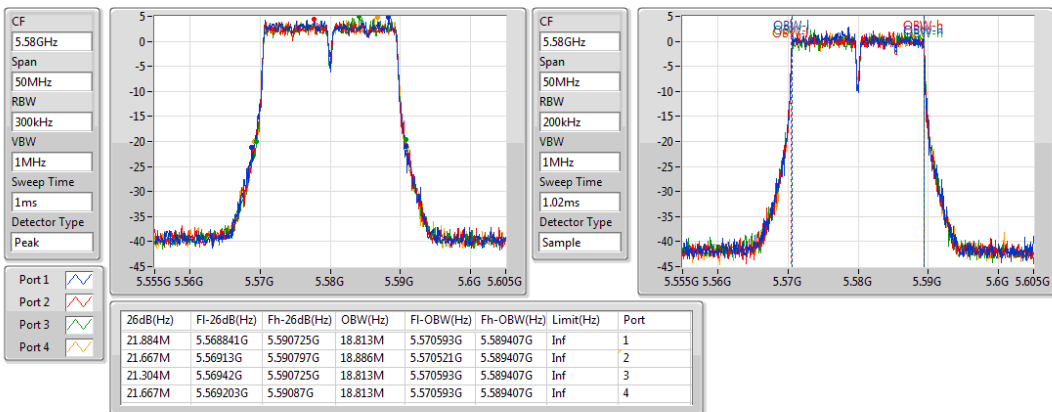

### 802.11ax HEW20\_Nss1,(MCS0)\_4TX

EBW


5700MHz

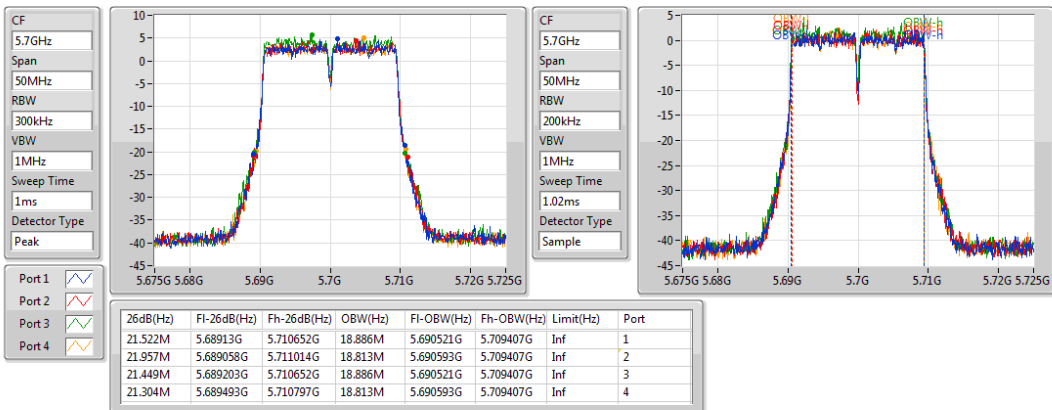

### 802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW


5270MHz

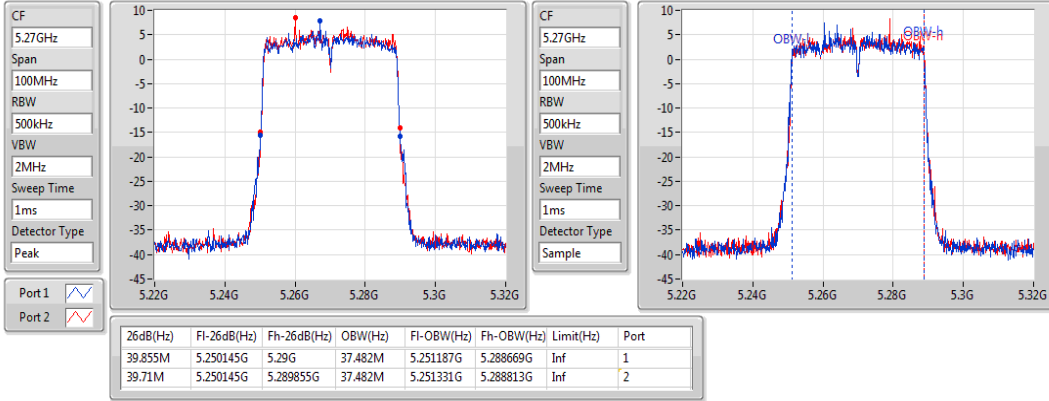

### 802.11ax HEW40\_Nss1,(MCS0)\_2TX

EBW


5310MHz

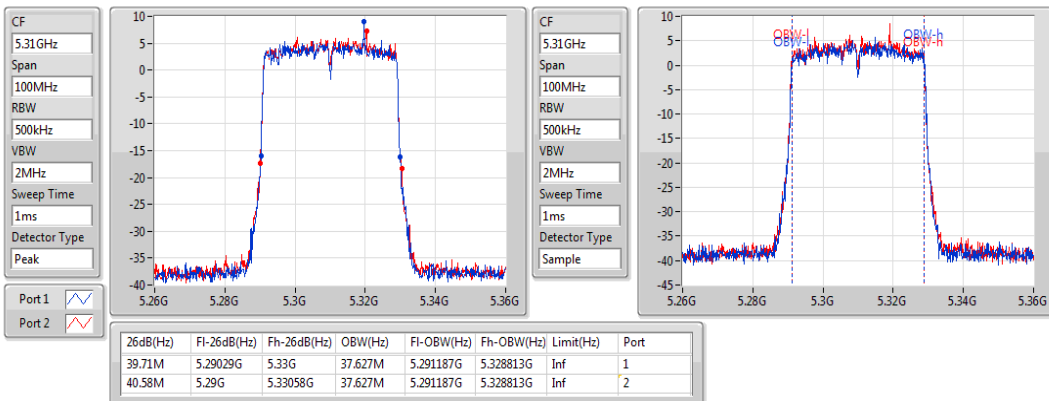

### 802.11ax HEW40\_Nss1,(MCS0)\_4TX

EBW


5510MHz

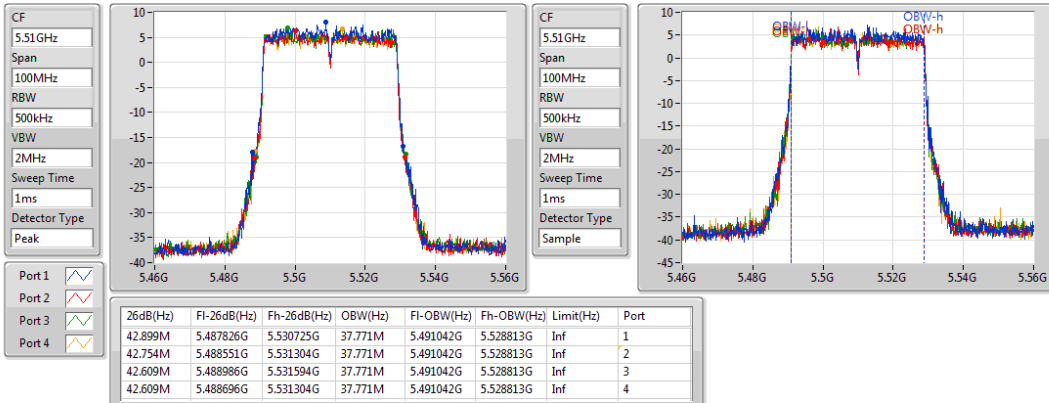

### 802.11ax HEW40\_Nss1,(MCS0)\_4TX

EBW


5590MHz

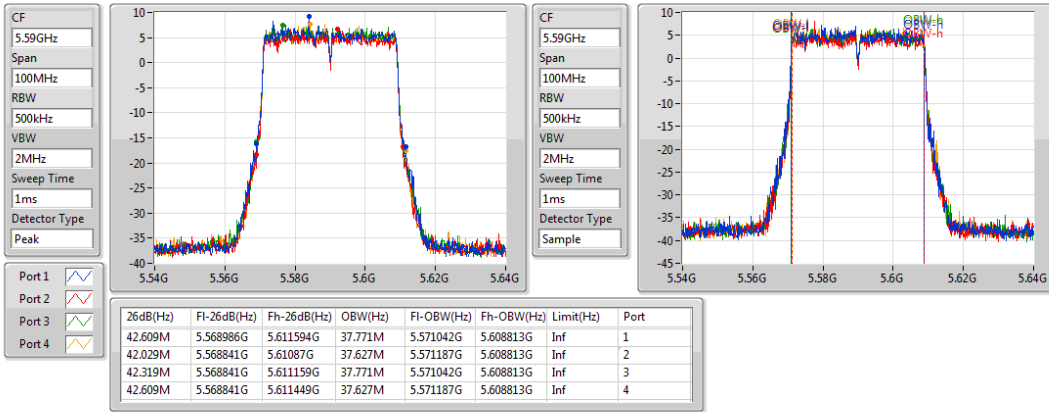

### 802.11ax HEW40\_Nss1,(MCS0)\_4TX

EBW


5670MHz

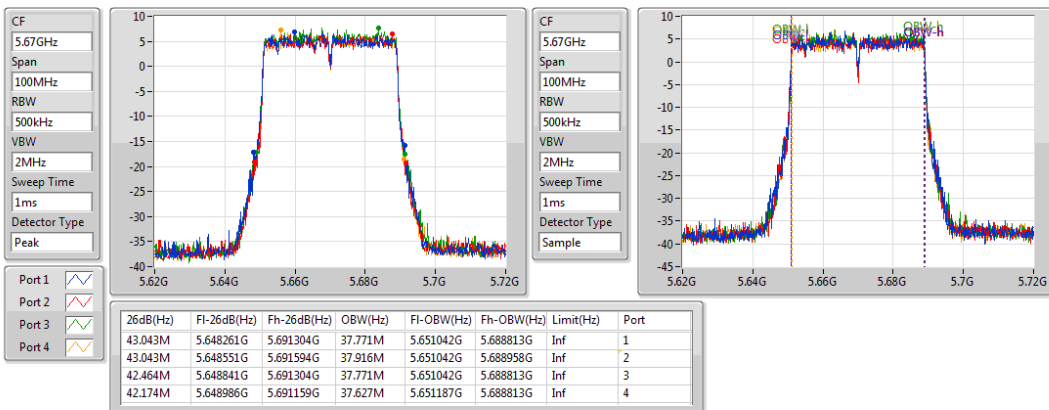

### 802.11ax HEW80\_Nss1,(MCS0)\_2TX

EBW


5290MHz

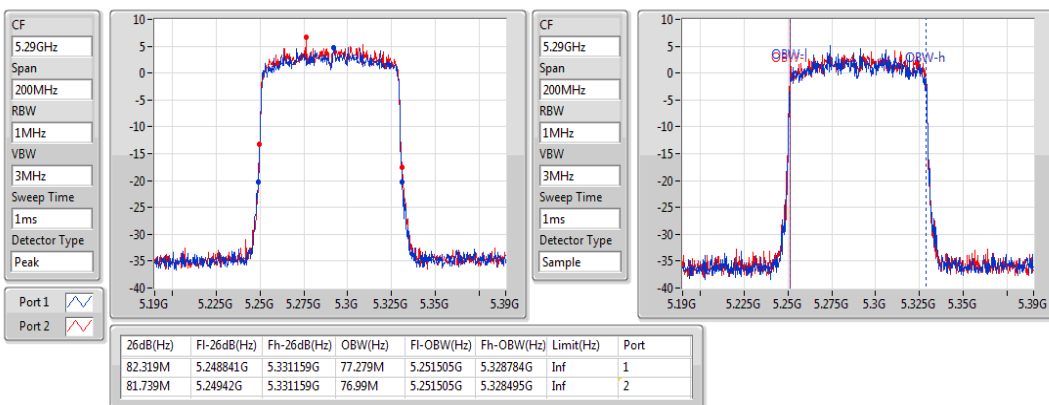

### 802.11ax HEW80\_Nss1,(MCS0)\_4TX

EBW


5530MHz

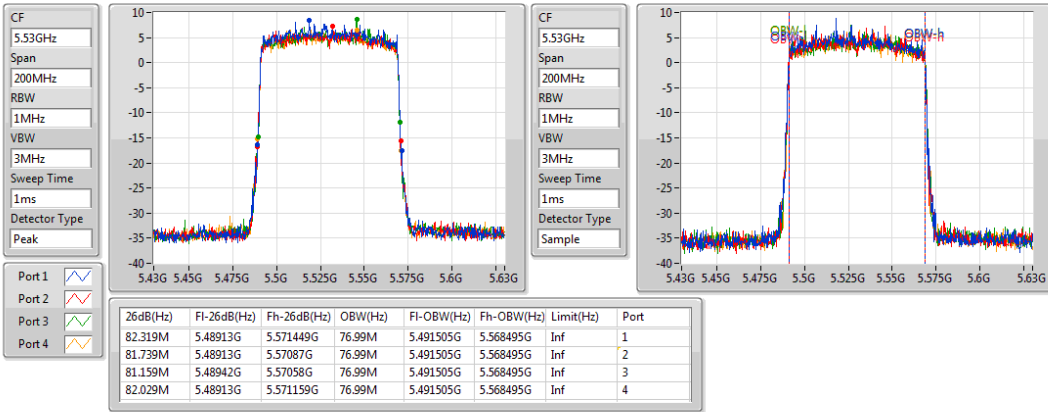

### 802.11ax HEW80\_Nss1,(MCS0)\_4TX

EBW


5610MHz

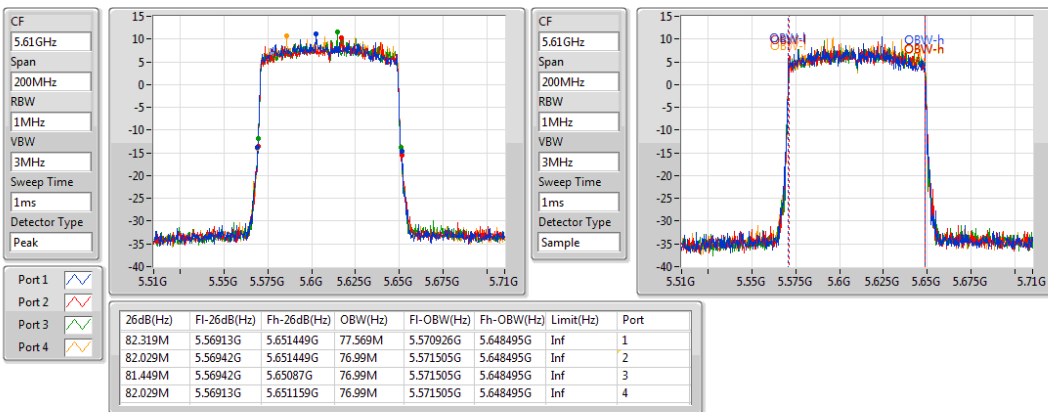

### 802.11ax HEW160\_Nss1,(MCS0)\_4TX

EBW

5570MHz

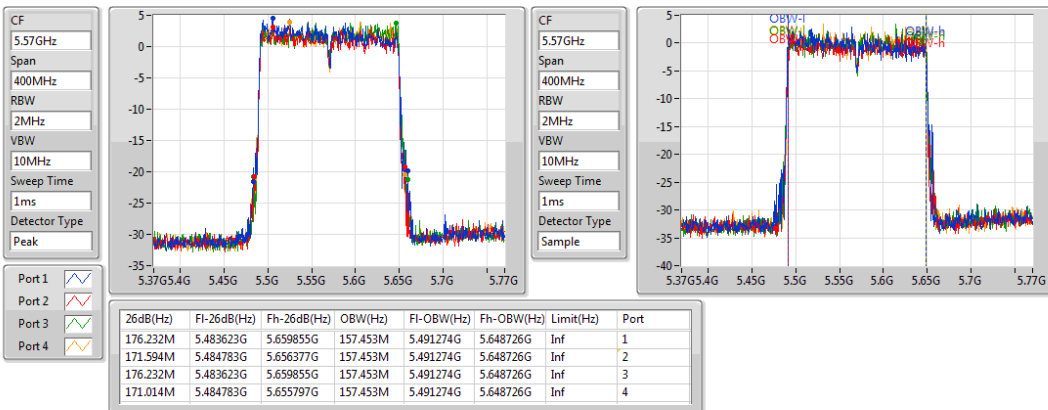

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Frequency Band (MHz)		Limit
<input checked="" type="checkbox"/>	5250 ~ 5350	Conducted Power: 250mW or 11dBm+10 log B
<input checked="" type="checkbox"/>	5470 ~ 5725	Conducted Power: 250mW or 11dBm+10 log B
Note: "B" is the 26dB emission bandwidth in MHz.		

#### 3.3.2 Test Procedures

##### Method PM-G (Measurement using a gated RF average power meter)

Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### 3.3.3 Test Setup

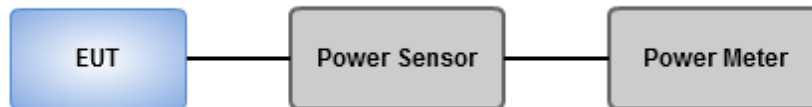

### 3.3.4 Test Result of Maximum Conducted Output Power

<b>Ambient Condition</b>	21-23°C / 63-65%	<b>Tested By</b>	Brad Wu
--------------------------	------------------	------------------	---------

#### *Non-beamforming mode*

##### Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	<b>17.15</b>	0.05188	22.75	0.18836
802.11ax HEW20_Nss1,(MCS0)_2TX -OFDMA	16.94	0.04943	22.54	0.17947
802.11ax HEW40_Nss1,(MCS0)_2TX -OFDMA	17.12	0.05152	22.72	0.18707
802.11ax HEW80_Nss1,(MCS0)_2TX -OFDMA	16.95	0.04955	22.55	0.17989
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	18.42	0.06950	24.12	0.25823
802.11ax HEW20_Nss1,(MCS0)_4TX -OFDMA	18.90	0.07762	24.60	0.28840
802.11ax HEW40_Nss1,(MCS0)_4TX -OFDMA	21.57	0.14355	27.27	0.53333
802.11ax HEW80_Nss1,(MCS0)_4TX -OFDMA	<b>23.51</b>	0.22439	29.21	0.83368
802.11ax HEW160_Nss1,(MCS0)_4TX -OFDMA	17.30	0.05370	23.00	0.19953

## Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	5.60	14.03	13.82	-	-	16.94	24.00	22.54	30.00
5300MHz	Pass	5.60	14.17	14.11	-	-	<b>17.15</b>	24.00	22.75	30.00
5320MHz	Pass	5.60	14.12	13.95	-	-	17.05	23.99	22.65	29.99
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	5.70	12.71	12.03	11.81	11.65	18.09	23.90	23.79	29.90
5580MHz	Pass	5.70	12.35	12.02	12.06	12.21	18.18	23.96	23.88	29.96
5700MHz	Pass	5.70	12.02	12.11	13.41	11.89	18.42	23.85	24.12	29.85
802.11ax HEW20_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	5.60	14.02	13.77	-	-	16.91	24.00	22.51	30.00
5300MHz	Pass	5.60	14.03	13.82	-	-	16.94	24.00	22.54	30.00
5320MHz	Pass	5.60	14.01	13.81	-	-	16.92	24.00	22.52	30.00
802.11ax HEW20_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	5.70	13.15	12.72	12.32	12.26	18.65	24.00	24.35	30.00
5580MHz	Pass	5.70	12.68	12.51	12.73	12.75	18.69	24.00	24.39	30.00
5700MHz	Pass	5.70	12.55	12.45	13.91	12.43	18.90	24.00	24.60	30.00
802.11ax HEW40_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	5.60	14.08	13.85	-	-	16.98	24.00	22.58	30.00
5310MHz	Pass	5.60	14.25	13.96	-	-	17.12	24.00	22.72	30.00
802.11ax HEW40_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	5.70	15.58	14.82	15.02	14.76	21.08	24.00	26.78	30.00
5590MHz	Pass	5.70	15.74	15.15	15.67	15.62	21.57	24.00	27.27	30.00
5670MHz	Pass	5.70	15.08	15.05	16.08	15.16	21.38	24.00	27.08	30.00
802.11ax HEW80_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	5.60	14.06	13.82	-	-	16.95	24.00	22.55	30.00
802.11ax HEW80_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	5.70	15.37	14.8	15.01	14.72	21.00	24.00	26.70	30.00
5610MHz	Pass	5.70	17.45	17.41	17.48	17.61	<b>23.51</b>	24.00	29.21	30.00
802.11ax	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
HEW160_Nss1,(MCS0)_4TX -OFDMA										
5570MHz	Pass	5.70	11.43	10.85	11.47	11.32	17.30	24.00	23.00	30.00

**DG** = Directional Gain; **Port X** = Port X output power



### Beamforming mode

#### Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.25-5.35GHz	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX -OFDMA	13.93	0.02472	22.34	0.17140
802.11ax HEW40-BF_Nss1,(MCS0)_2TX -OFDMA	<b>14.11</b>	0.02576	22.52	0.17865
802.11ax HEW80-BF_Nss1,(MCS0)_2TX -OFDMA	13.94	0.02477	22.35	0.17179
5.47-5.725GHz	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_4TX -OFDMA	12.88	0.01941	24.28	0.26792
802.11ax HEW40-BF_Nss1,(MCS0)_4TX -OFDMA	15.55	0.03589	26.95	0.49545
802.11ax HEW80-BF_Nss1,(MCS0)_4TX -OFDMA	<b>17.49</b>	0.05610	28.89	0.77446
802.11ax HEW160-BF_Nss1,(MCS0)_4TX -OFDMA	11.28	0.01343	22.68	0.18535

## Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20-BF_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	8.41	11.01	10.76	-	-	13.90	21.59	22.31	30.00
5300MHz	Pass	8.41	11.02	10.81	-	-	13.93	21.59	22.34	30.00
5320MHz	Pass	8.41	11	10.8	-	-	13.91	21.59	22.32	30.00
802.11ax HEW20-BF_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	11.40	7.13	6.7	6.3	6.24	12.63	18.60	24.03	30.00
5580MHz	Pass	11.40	6.66	6.49	6.71	6.73	12.67	18.60	24.07	30.00
5700MHz	Pass	11.40	6.53	6.43	7.89	6.41	12.88	18.60	24.28	30.00
802.11ax HEW40-BF_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	8.41	11.07	10.84	-	-	13.97	21.59	22.38	30.00
5310MHz	Pass	8.41	11.24	10.95	-	-	<b>14.11</b>	21.59	22.52	30.00
802.11ax HEW40-BF_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	11.40	9.56	8.8	9	8.74	15.06	18.60	26.46	30.00
5590MHz	Pass	11.40	9.72	9.13	9.65	9.6	15.55	18.60	26.95	30.00
5670MHz	Pass	11.40	9.06	9.03	10.06	9.14	15.36	18.60	26.76	30.00
802.11ax HEW80-BF_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	8.41	11.05	10.81	-	-	13.94	21.59	22.35	30.00
802.11ax HEW80-BF_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	11.40	9.35	8.78	8.99	8.7	14.98	18.60	26.38	30.00
5610MHz	Pass	11.40	11.43	11.39	11.46	11.59	<b>17.49</b>	18.60	28.89	30.00
802.11ax HEW160-BF_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5570MHz	Pass	11.40	5.41	4.83	5.45	5.3	11.28	18.60	22.68	30.00

**Port X** = Port X output power

**DG** = Directional Gain

For 5250~5350MHz:

Directional gain =  $10 \times \log((10^{5.2/20} + 10^{5.6/20})^2 / 2) = 8.41 \text{ dBi} > 6 \text{ dBi}$ , Limit shall be reduced to 24 dBm – (8.41 dBi – 6 dBi) = 21.59 dBm

For 5470~5725MHz:

Directional gain =  $10 \times \log((10^{5.3/20} + 10^{5.1/20} + 10^{5.4/20} + 10^{5.7/20})^2 / 4) = 11.40 \text{ dBi}$ , Limit shall be reduced to 24 dBm – (11.4 dBi – 6 dBi) = 18.6 dBm

### 3.4 Peak Power Spectral Density

#### 3.4.1 Limit of Peak Power Spectral Density

Frequency Band (MHz)		Limit
<input checked="" type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input checked="" type="checkbox"/>	5470 ~ 5725	11 dBm / MHz

#### 3.4.2 Test Procedures


Duty cycle  $\geq$  98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle < 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time  $\geq$  10 \* (number of points in sweep) \* (total on/off period of the transmitted signal).
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add 10 log(1/x), where x is the duty cycle.

#### 3.4.3 Test Setup

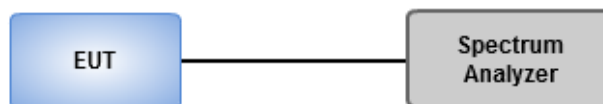

### 3.4.4 Test Result of Peak Power Spectral Density

<b>Ambient Condition</b>	21-23°C / 63-65%	<b>Tested By</b>	Brad Wu
--------------------------	------------------	------------------	---------

#### Summary

	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	4.65	13.06
802.11ax HEW20_Nss1,(MCS0)_2TX -OFDMA	3.30	11.71
802.11ax HEW40_Nss1,(MCS0)_2TX -OFDMA	1.05	9.46
802.11ax HEW80_Nss1,(MCS0)_2TX -OFDMA	-2.77	5.64
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	5.44	16.84
802.11ax HEW20_Nss1,(MCS0)_4TX -OFDMA	5.45	16.85
802.11ax HEW40_Nss1,(MCS0)_4TX -OFDMA	5.41	16.81
802.11ax HEW80_Nss1,(MCS0)_4TX -OFDMA	4.85	16.25
802.11ax HEW160_Nss1,(MCS0)_4TX -OFDMA	-3.97	7.43

RBW = 1MHz

## Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	8.41	1.30	1.41	-	-	4.25	8.59	12.66	17.00
5300MHz	Pass	8.41	1.52	1.83	-	-	4.65	8.59	13.06	17.00
5320MHz	Pass	8.41	1.34	1.58	-	-	4.42	8.59	12.83	17.00
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	11.40	-0.17	-0.55	-1.05	-1.12	5.17	5.60	16.57	17.00
5580MHz	Pass	11.40	-0.58	-0.71	-0.64	-0.71	5.22	5.60	16.62	17.00
5700MHz	Pass	11.40	-0.99	-0.60	0.50	-0.86	5.44	5.60	16.84	17.00
802.11ax HEW20_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	8.41	0.22	0.49	-	-	3.30	8.59	11.71	17.00
5300MHz	Pass	8.41	-0.17	0.18	-	-	2.91	8.59	11.32	17.00
5320MHz	Pass	8.41	-0.22	0.04	-	-	2.87	8.59	11.28	17.00
802.11ax HEW20_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	11.40	0.12	-0.74	-0.92	-1.18	5.18	5.60	16.58	17.00
5580MHz	Pass	11.40	-0.44	-0.89	-0.54	-0.63	5.15	5.60	16.55	17.00
5700MHz	Pass	11.40	-0.78	-0.75	0.54	-0.94	5.45	5.60	16.85	17.00
802.11ax HEW40_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	8.41	-3.13	-2.58	-	-	0.06	8.59	8.47	17.00
5310MHz	Pass	8.41	-2.21	-1.73	-	-	1.05	8.59	9.46	17.00
802.11ax HEW40_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	11.40	0.04	-1.09	-0.56	-1.08	5.21	5.60	16.61	17.00
5590MHz	Pass	11.40	-0.49	-1.28	-0.45	-0.67	5.07	5.60	16.47	17.00
5670MHz	Pass	11.40	-0.52	-0.72	0.25	-0.71	5.41	5.60	16.81	17.00
802.11ax HEW80_Nss1,(MCS0)_2TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	8.41	-5.89	-5.45	-	-	-2.77	8.59	5.64	17.00
802.11ax HEW80_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	11.40	-3.01	-3.74	-3.39	-3.98	2.24	5.60	13.64	17.00
5610MHz	Pass	11.40	-1.05	-1.14	-0.94	-0.98	4.85	5.60	16.25	17.00

802.11ax HEW160_Nss1,(MCS0)_4TX -OFDMA	-	-	-	-	-	-	-	-	-	-
5570MHz	Pass	11.40	-9.11	-9.97	-9.66	-9.81	-3.97	5.60	7.43	17.00

**RBW** = 1MHz

**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

**DG** = Directional Gain

For 5250~5350MHz:

Directional gain =  $10 \times \log((10^{5.2/20} + 10^{5.6/20})^2 / 2) = 8.41 \text{ dBi} > 6 \text{ dBi}$ , Limit shall be reduced to 11 dBm – (8.41 dBi – 6 dBi) = 8.59 dBm


For 5470~5725MHz:

Directional gain =  $10 \times \log((10^{5.3/20} + 10^{5.1/20} + 10^{5.4/20} + 10^{5.7/20})^2 / 4) = 11.40 \text{ dBi}$ ., Limit shall be reduced to 11 dBm – (11.4 dBi – 6 dBi) = 5.6 dBm

### 802.11a\_Nss1,(6Mbps)\_2TX

PSD

5260MHz

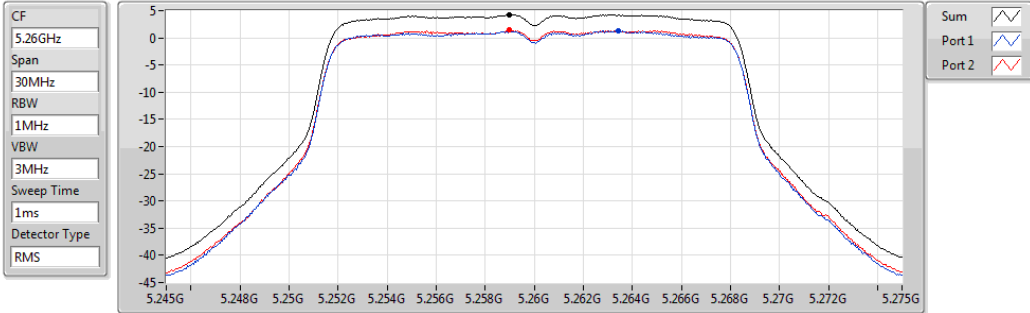


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.25	4.25	1.30	1.41

### 802.11a\_Nss1,(6Mbps)\_2TX

PSD

5300MHz

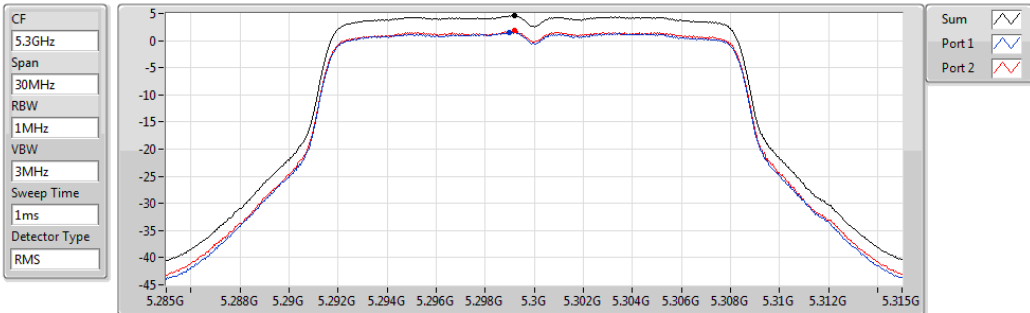


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.65	4.65	1.52	1.83

### 802.11a\_Nss1,(6Mbps)\_2TX

PSD

5320MHz

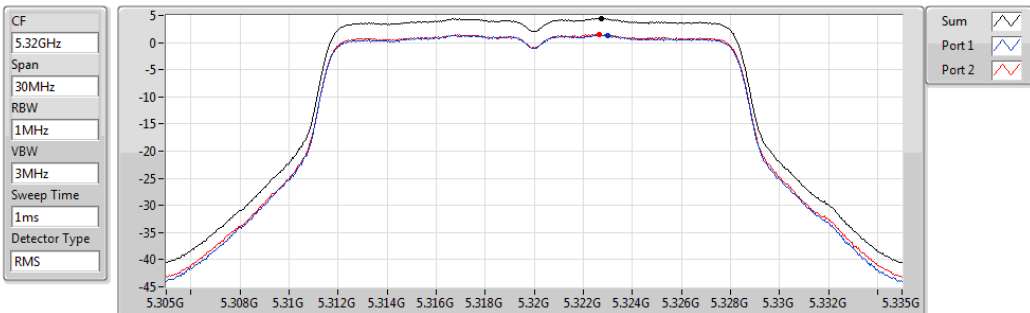


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.42	4.42	1.34	1.58

### 802.11a\_Nss1,(6Mbps)\_4TX

PSD

5500MHz

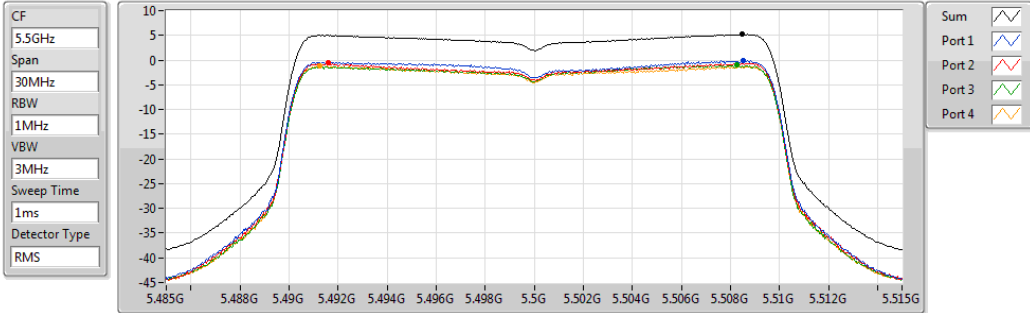


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.17	5.17	-0.17	-0.55	-1.05	-1.12

### 802.11a\_Nss1,(6Mbps)\_4TX

PSD

5580MHz

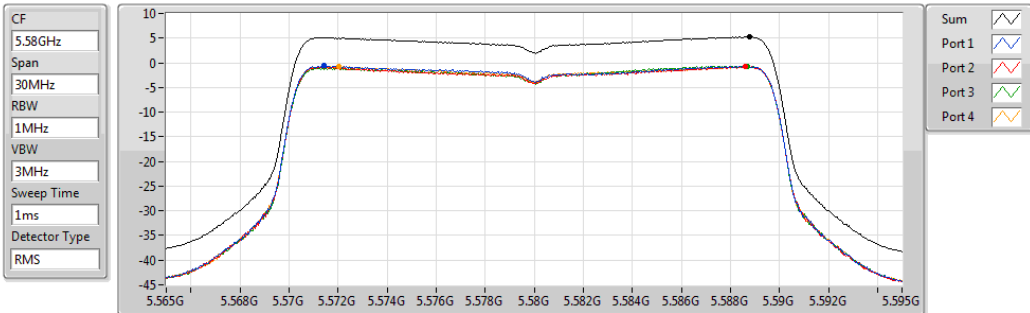


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.22	5.22	-0.58	-0.71	-0.64	-0.71

### 802.11a\_Nss1,(6Mbps)\_4TX

PSD

5700MHz

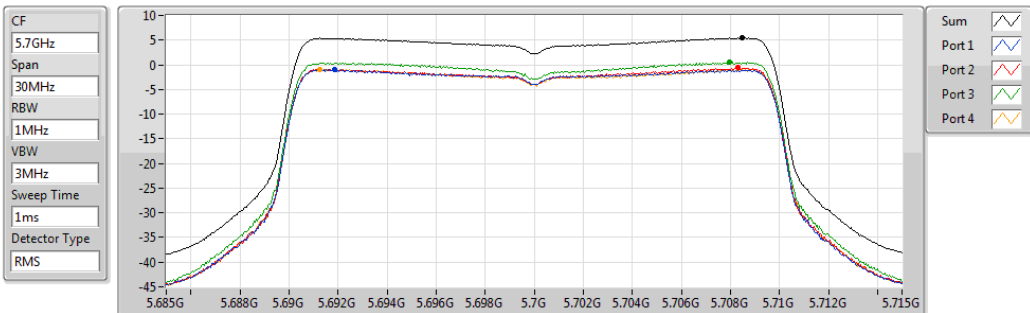


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.44	5.44	-0.99	-0.60	0.50	-0.86



### 802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5260MHz

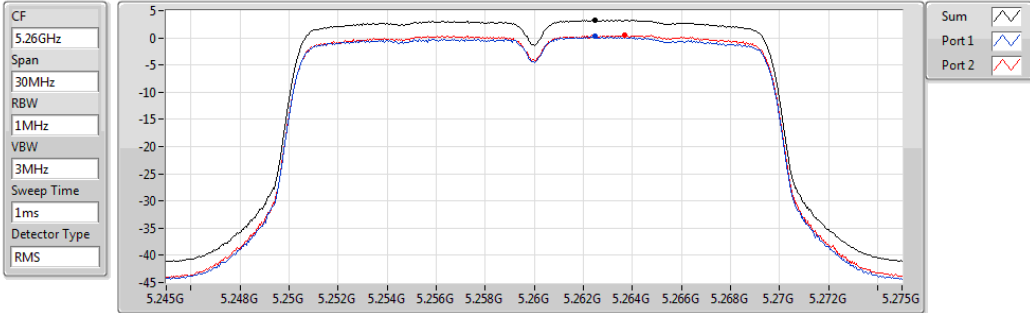


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.30	3.30	0.22	0.49

### 802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5300MHz

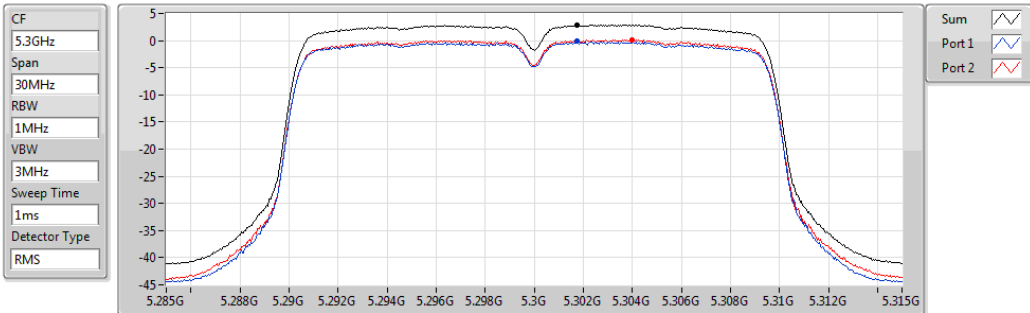


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.91	2.91	-0.17	0.18

### 802.11ax HEW20\_Nss1,(MCS0)\_2TX

PSD

5320MHz

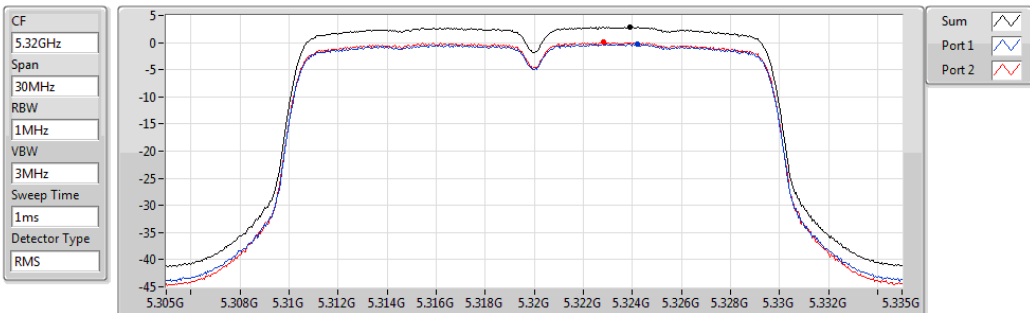


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.87	2.87	-0.22	0.04

### 802.11ax HEW20\_Nss1,(MCS0)\_4TX

PSD

5500MHz

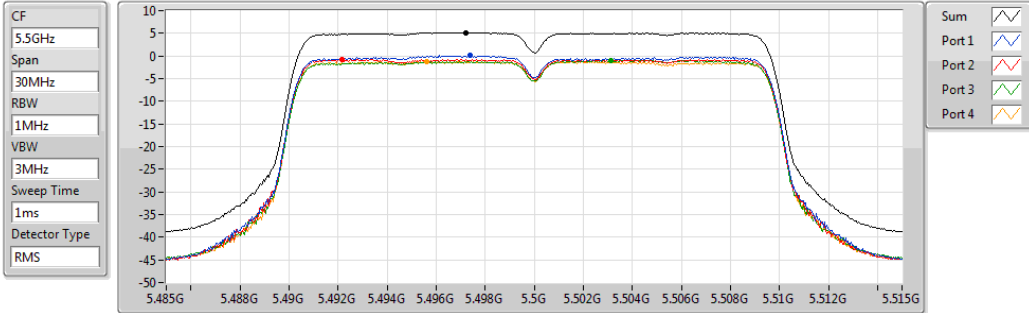


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.18	5.18	0.12	-0.74	-0.92	-1.18

### 802.11ax HEW20\_Nss1,(MCS0)\_4TX

PSD

5580MHz

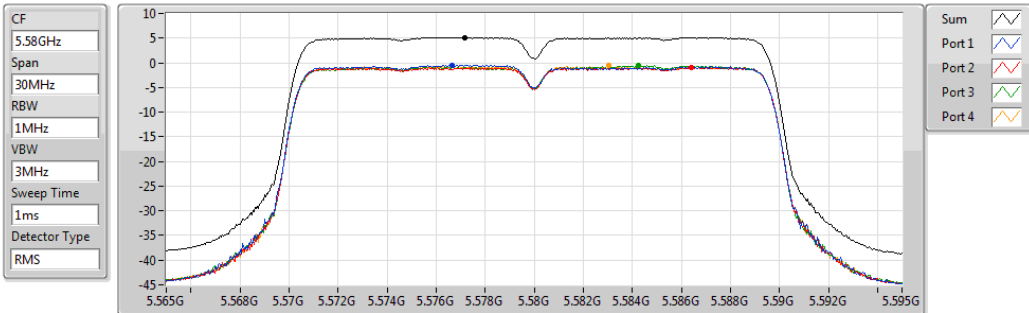


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.15	5.15	-0.44	-0.89	-0.54	-0.63

### 802.11ax HEW20\_Nss1,(MCS0)\_4TX

PSD

5700MHz

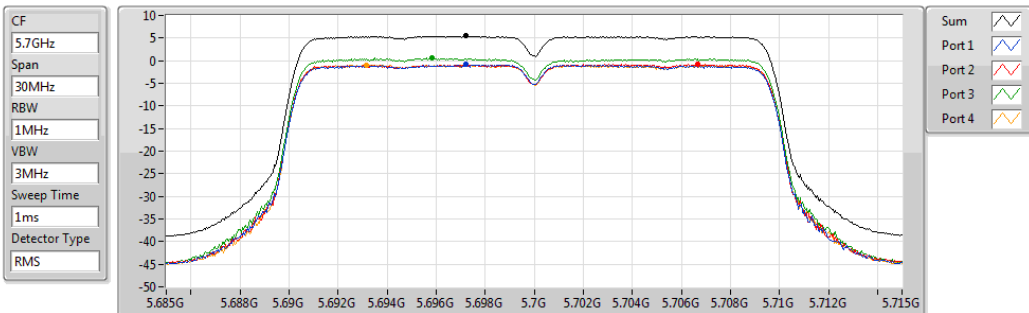


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.45	5.45	-0.78	-0.75	0.54	-0.94

### 802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5270MHz

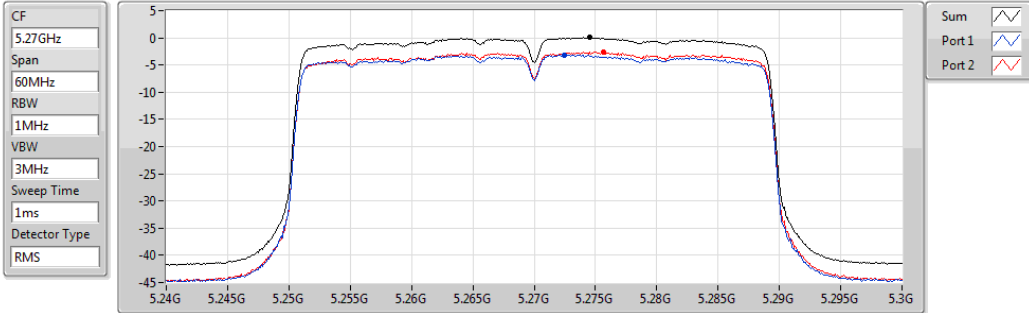


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.06	0.06	-3.13	-2.58

### 802.11ax HEW40\_Nss1,(MCS0)\_2TX

PSD

5310MHz

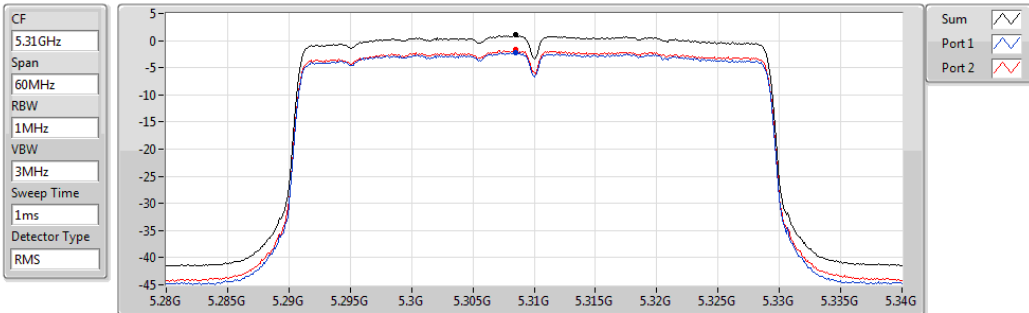


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.05	1.05	-2.21	-1.73

### 802.11ax HEW40\_Nss1,(MCS0)\_4TX

PSD

5510MHz

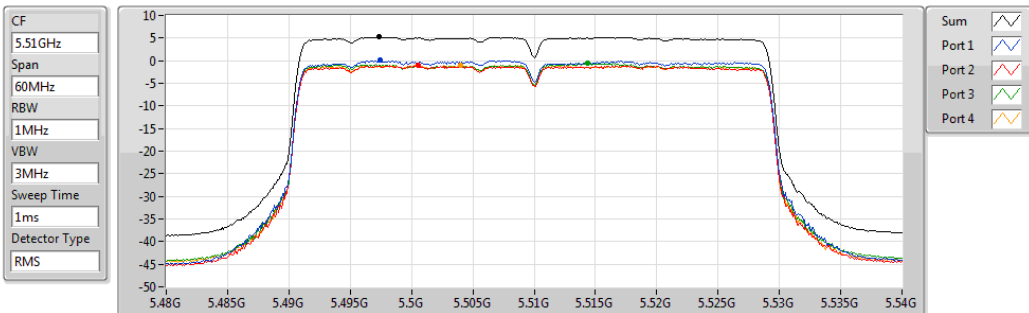


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.21	5.21	0.04	-1.09	-0.56	-1.08

### 802.11ax HEW40\_Nss1,(MCS0)\_4TX

PSD

5590MHz

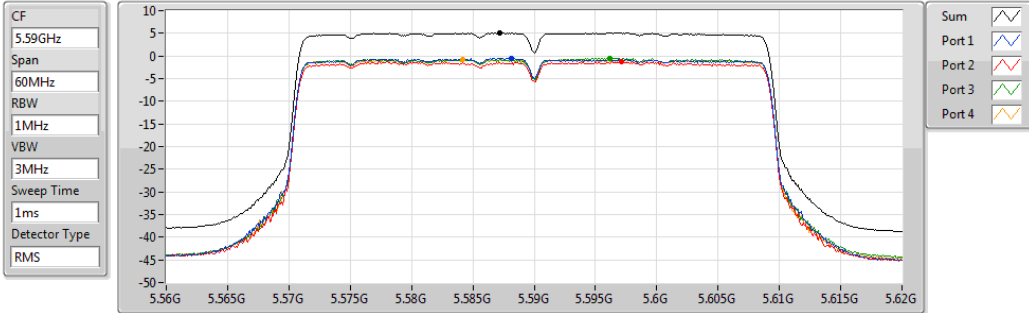


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.07	5.07	-0.49	-1.28	-0.45	-0.67

### 802.11ax HEW40\_Nss1,(MCS0)\_4TX

PSD

5670MHz

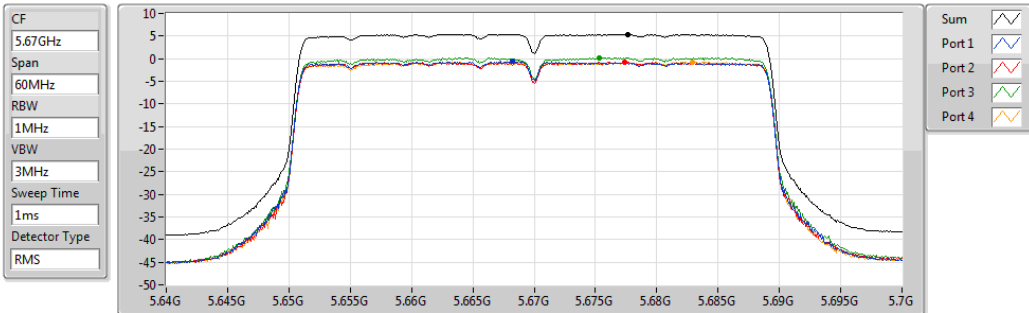


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.41	5.41	-0.52	-0.72	0.25	-0.71

### 802.11ax HEW80\_Nss1,(MCS0)\_2TX

PSD

5290MHz

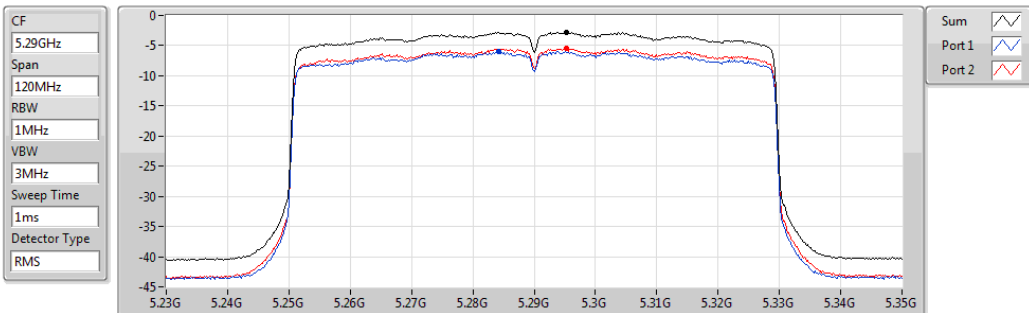


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.77	-2.77	-5.89	-5.45

### 802.11ax HEW80\_Nss1,(MCS0)\_4TX

PSD

5530MHz

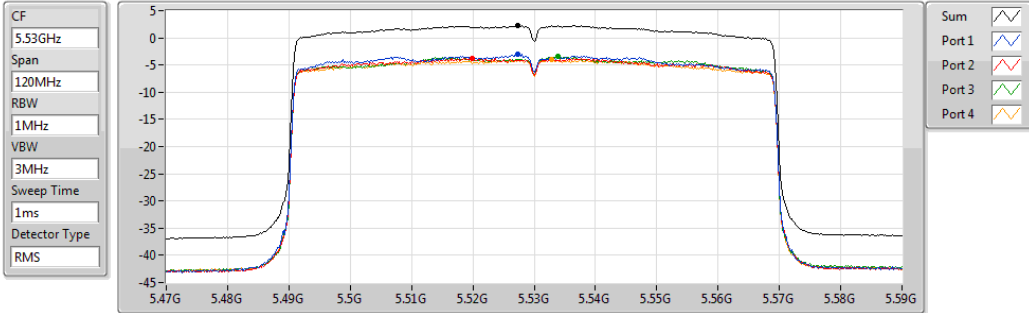


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.24	2.24	-3.01	-3.74	-3.39	-3.98

### 802.11ax HEW80\_Nss1,(MCS0)\_4TX

PSD

5610MHz

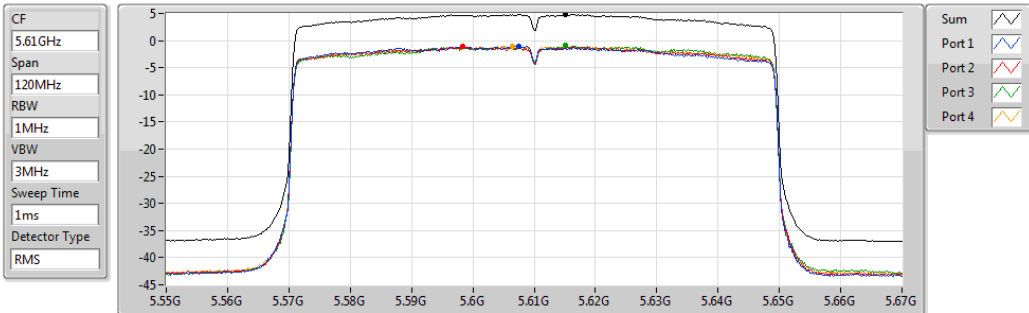


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.85	4.85	-1.05	-1.14	-0.94	-0.98

### 802.11ax HEW160\_Nss1,(MCS0)\_4TX

PSD

5570MHz

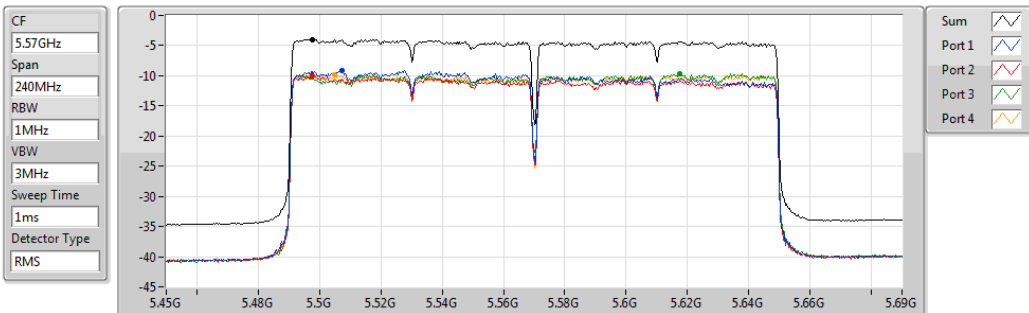

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.97	-3.97	-9.11	-9.97	-9.66	-9.81

### 3.5 Transmitter Radiated and Band Edge Emissions

#### 3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

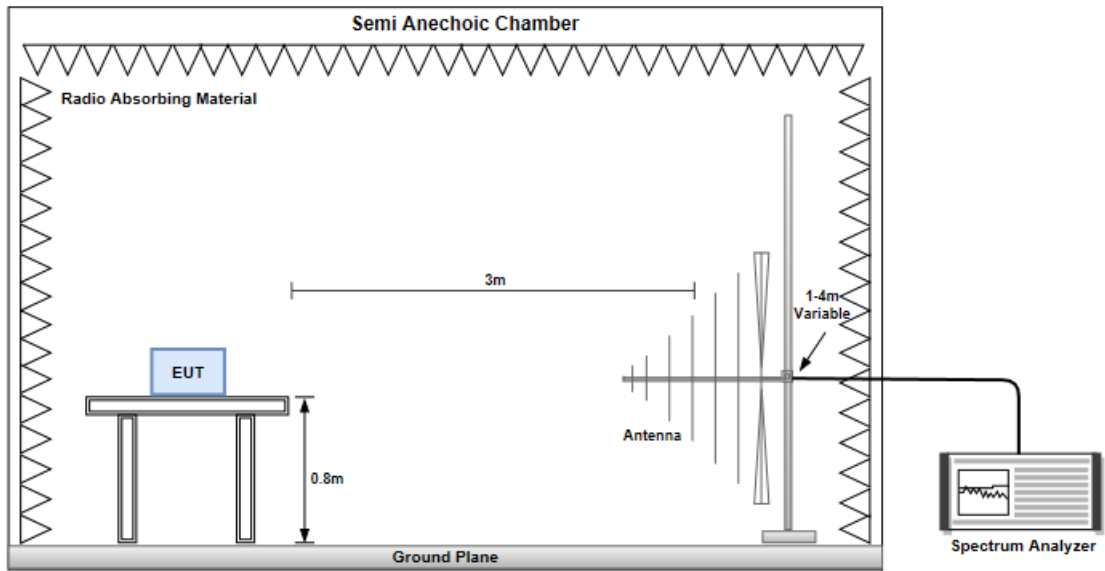


#### Radiated Emissions above 1 GHz

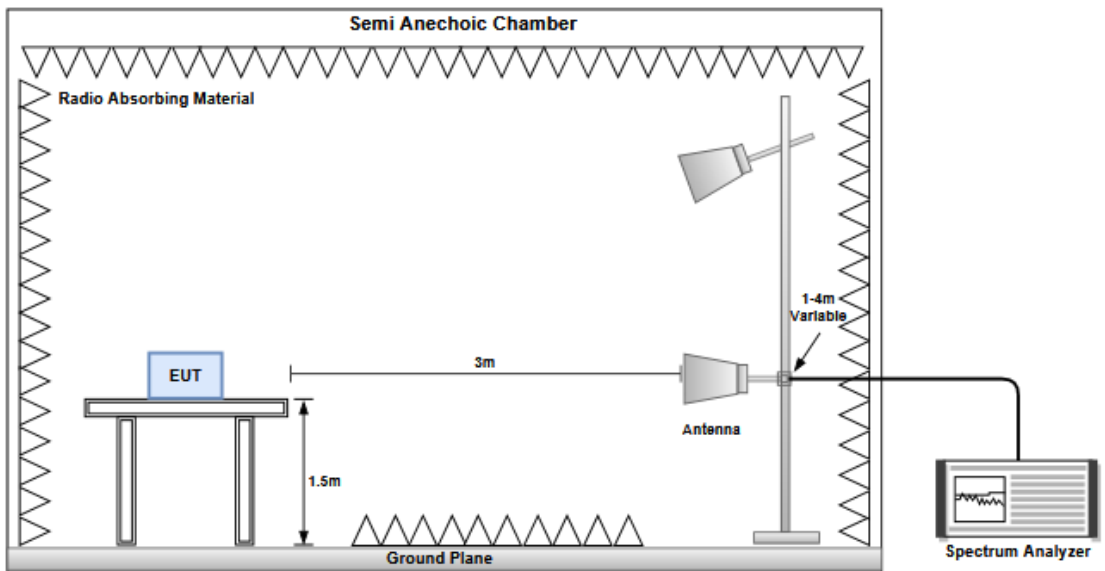




### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

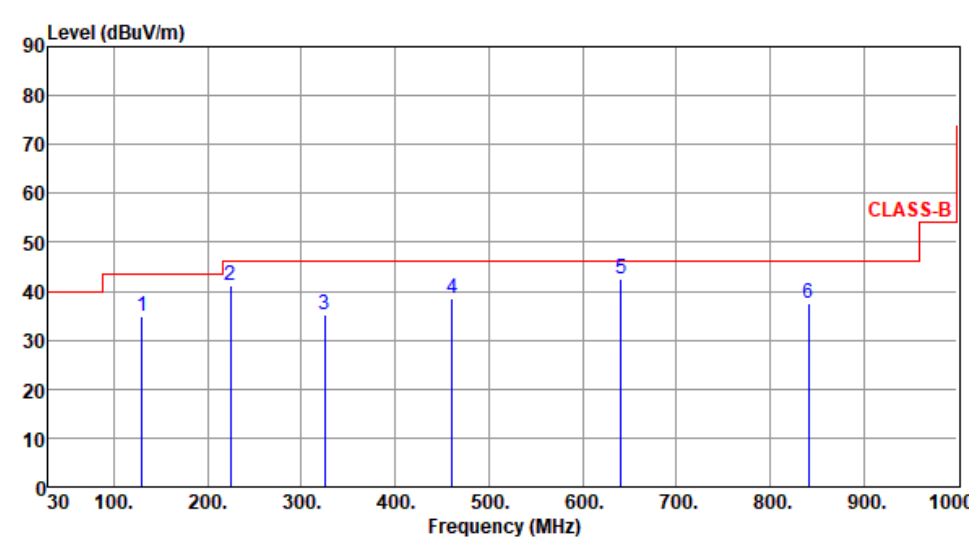Modulation	11a	Test Freq. (MHz)	5300						
Polarization	Horizontal								
Test By : Roger Lu      Temperature(°C):23      Humidity(%):65									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	129.55	34.76	43.50	-8.74	44.58	-9.82	Peak	---	---
2	224.11	41.26	46.00	-4.74	53.27	-12.01	Peak	---	---
3	325.15	35.31	46.00	-10.69	42.76	-7.45	Peak	---	---
4	461.28	38.49	46.00	-7.51	42.57	-4.08	Peak	---	---
5	641.33	42.64	46.00	-3.36	43.06	-0.42	QP	166	117
6	841.26	37.49	46.00	-8.51	34.97	2.52	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):23      Humidity(%):65

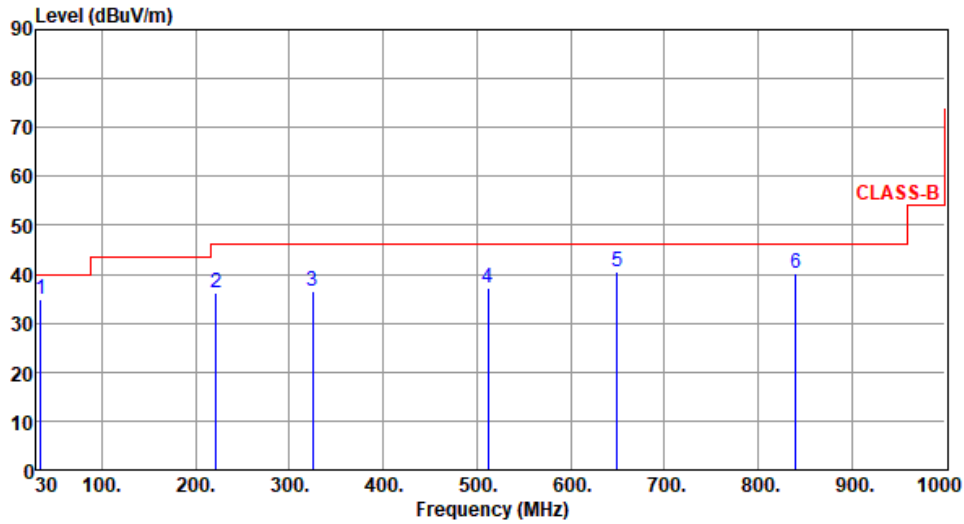

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	34.31	34.95	40.00	-5.05	44.35	-9.40	Peak	---	---
2	221.36	36.15	46.00	-9.85	48.11	-11.96	Peak	---	---
3	325.15	36.48	46.00	-9.52	43.93	-7.45	Peak	---	---
4	512.39	37.22	46.00	-8.78	40.23	-3.01	Peak	---	---
5	650.13	40.61	46.00	-5.39	41.01	-0.40	QP	100	250
6	840.34	40.11	46.00	-5.89	37.61	2.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):23      Humidity(%):65

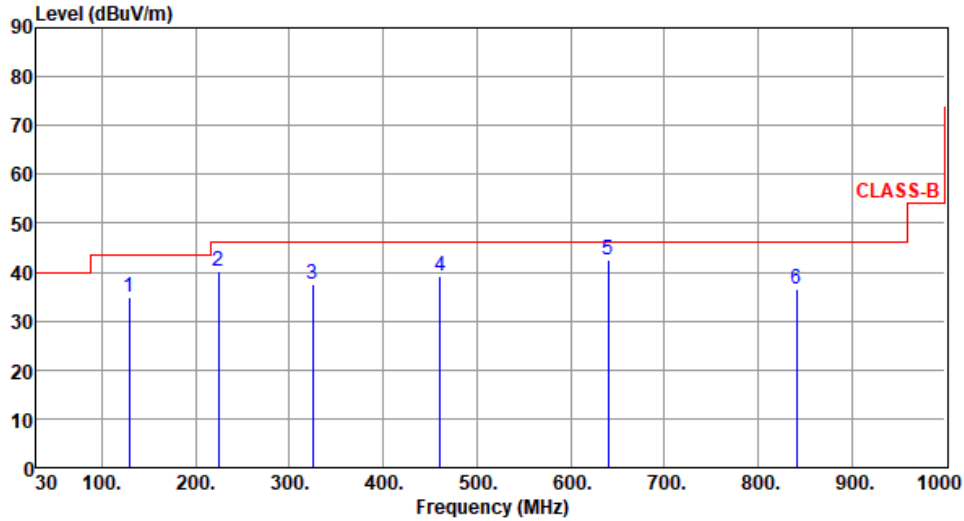

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	129.32	34.76	43.50	-8.74	44.60	-9.84	Peak	---	---
2	224.15	40.16	46.00	-5.84	52.17	-12.01	Peak	---	---
3	325.26	37.49	46.00	-8.51	44.94	-7.45	Peak	---	---
4	461.26	39.25	46.00	-6.75	43.33	-4.08	Peak	---	---
5	640.58	42.61	46.00	-3.39	43.03	-0.42	QP	166	119
6	841.26	36.49	46.00	-9.51	33.97	2.52	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):23      Humidity(%):65

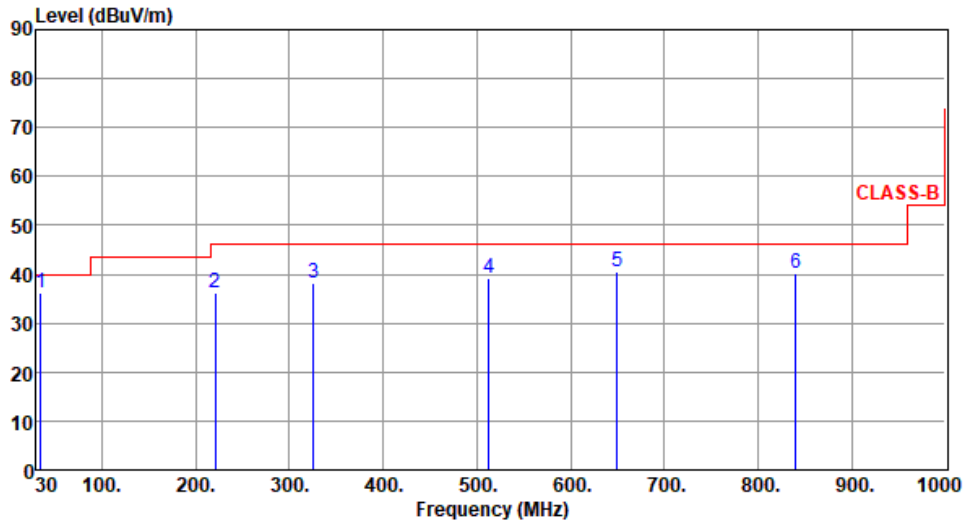

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	34.31	36.33	40.00	-3.67	45.73	-9.40	Peak	---	---
2	221.31	36.12	46.00	-9.88	48.08	-11.96	Peak	---	---
3	325.31	38.25	46.00	-7.75	45.70	-7.45	Peak	---	---
4	513.15	39.22	46.00	-6.78	42.21	-2.99	Peak	---	---
5	650.13	40.64	46.00	-5.36	41.04	-0.40	QP	100	254
6	840.39	40.32	46.00	-5.68	37.82	2.50	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

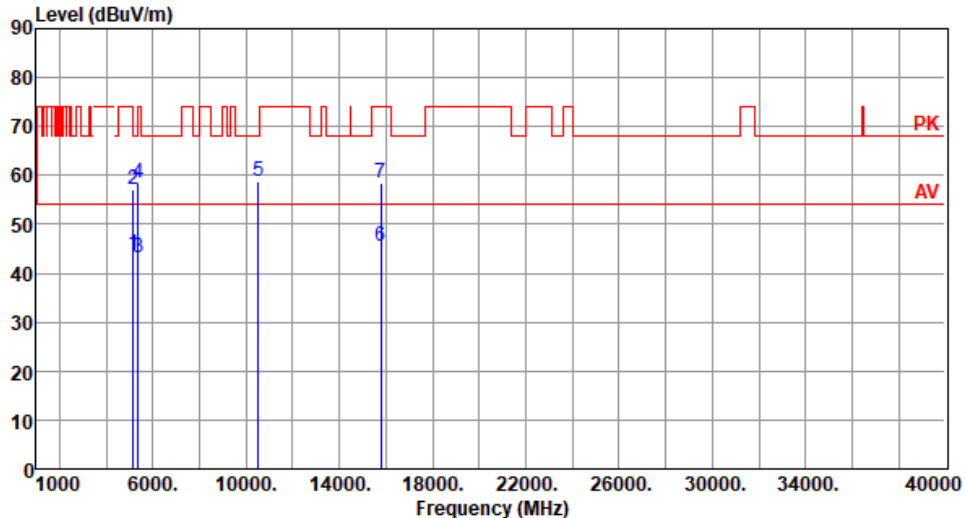Modulation	11a	Test Freq. (MHz)	5260						
Polarization	Horizontal								
Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69									
 <p>The graph displays the radiated unwanted emission levels in dBuV/m across a frequency range from 1000 MHz to 40000 MHz. The y-axis ranges from 0 to 90 dBuV/m. A red line represents the average level (AV) at approximately 55 dBuV/m, and a higher red line represents the peak level (PK) at approximately 70 dBuV/m. Seven specific peaks are labeled with blue numbers 1 through 7, corresponding to the data in the table below.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5150.00	43.86	54.00	-10.14	39.65	4.21	Average	122	229
2	5150.00	57.11	74.00	-16.89	52.90	4.21	Peak	122	229
3	5350.00	43.14	54.00	-10.86	39.26	3.88	Average	122	229
4	5350.00	58.42	74.00	-15.58	54.54	3.88	Peak	122	229
5	10520.00	58.75	68.20	-9.45	44.65	14.10	Peak	100	62
6	15780.00	45.45	54.00	-8.55	31.61	13.84	Average	100	51
7	15780.00	58.52	74.00	-15.48	44.68	13.84	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5260
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

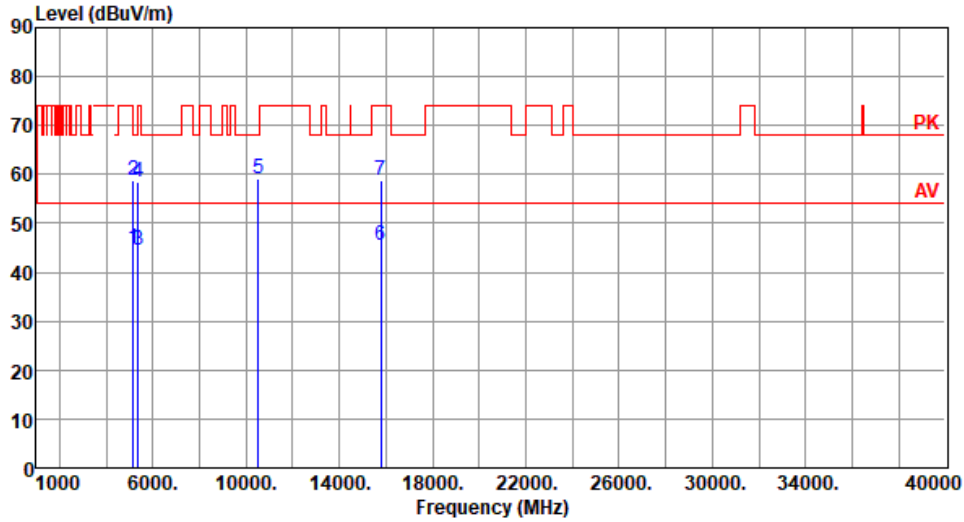

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.76	54.00	-9.24	40.55	4.21	Average	370	185
2	5150.00	58.79	74.00	-15.21	54.58	4.21	Peak	370	185
3	5350.00	44.36	54.00	-9.64	40.48	3.88	Average	370	185
4	5350.00	58.54	74.00	-15.46	54.66	3.88	Peak	370	185
5	10520.00	58.99	68.20	-9.21	44.89	14.10	Peak	100	102
6	15780.00	45.60	54.00	-8.40	31.76	13.84	Average	100	109
7	15780.00	58.71	74.00	-15.29	44.87	13.84	Peak	100	109


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

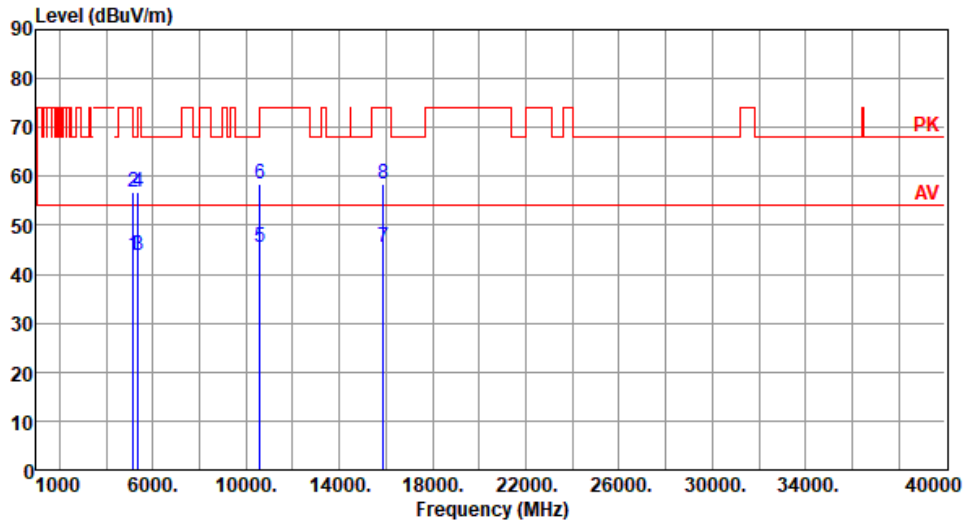

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.76	54.00	-10.24	39.55	4.21	Average	121	226
2	5150.00	56.90	74.00	-17.10	52.69	4.21	Peak	121	226
3	5350.00	43.79	54.00	-10.21	39.91	3.88	Average	121	226
4	5350.00	56.81	74.00	-17.19	52.93	3.88	Peak	121	226
5	10600.00	45.53	54.00	-8.47	31.47	14.06	Average	100	55
6	10600.00	58.61	74.00	-15.39	44.55	14.06	Peak	100	55
7	15900.00	45.56	54.00	-8.44	31.63	13.93	Average	100	59
8	15900.00	58.61	74.00	-15.39	44.68	13.93	Peak	100	59


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

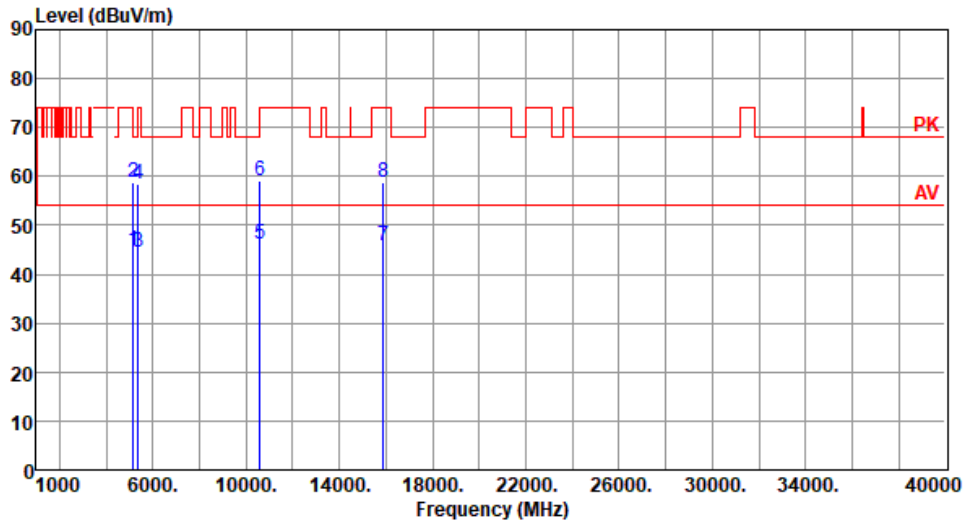

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.79	54.00	-9.21	40.58	4.21	Average	360	192
2	5150.00	58.80	74.00	-15.20	54.59	4.21	Peak	360	192
3	5350.00	44.42	54.00	-9.58	40.54	3.88	Average	360	192
4	5350.00	58.47	74.00	-15.53	54.59	3.88	Peak	360	192
5	10600.00	46.01	54.00	-7.99	31.95	14.06	Average	100	111
6	10600.00	59.03	74.00	-14.97	44.97	14.06	Peak	100	111
7	15900.00	45.80	54.00	-8.20	31.87	13.93	Average	100	105
8	15900.00	58.71	74.00	-15.29	44.78	13.93	Peak	100	105

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

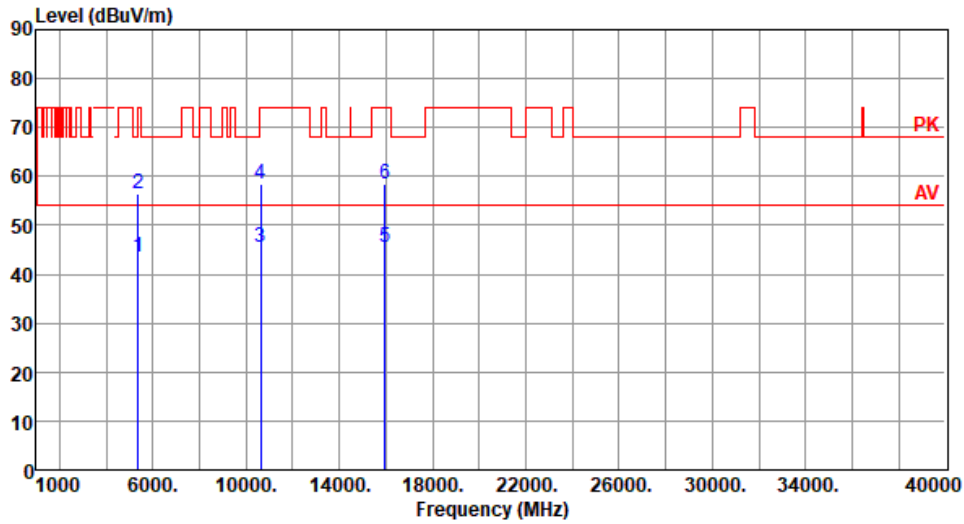

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	43.64	54.00	-10.36	39.76	3.88	Average	122	224
2	5350.00	56.62	74.00	-17.38	52.74	3.88	Peak	122	224
3	10640.00	45.39	54.00	-8.61	31.35	14.04	Average	100	61
4	10640.00	58.46	74.00	-15.54	44.42	14.04	Peak	100	61
5	15960.00	45.66	54.00	-8.34	31.64	14.02	Average	100	85
6	15960.00	58.45	74.00	-15.55	44.43	14.02	Peak	100	85


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

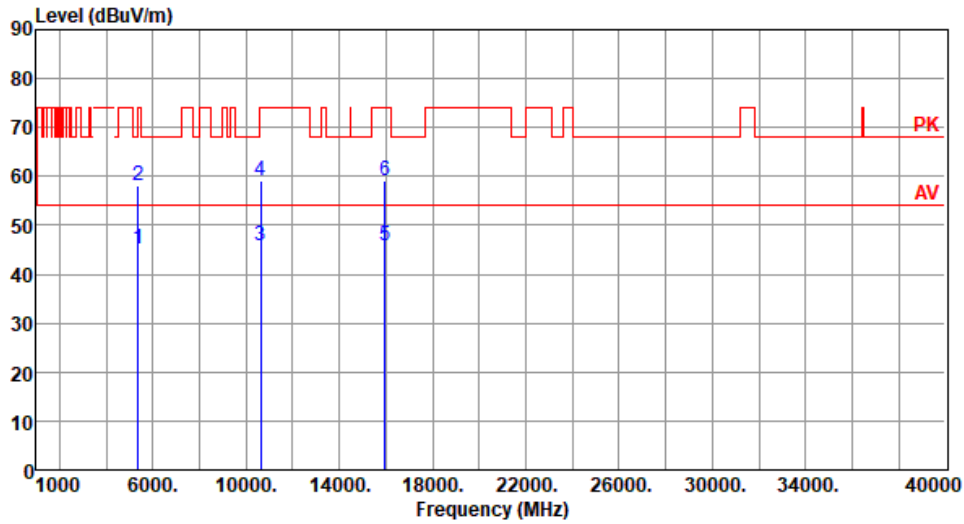

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	45.13	54.00	-8.87	41.25	3.88	Average	357	187
2	5350.00	58.10	74.00	-15.90	54.22	3.88	Peak	357	187
3	10640.00	45.93	54.00	-8.07	31.89	14.04	Average	100	102
4	10640.00	58.99	74.00	-15.01	44.95	14.04	Peak	100	102
5	15960.00	45.95	54.00	-8.05	31.93	14.02	Average	100	119
6	15960.00	59.00	74.00	-15.00	44.98	14.02	Peak	100	119


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

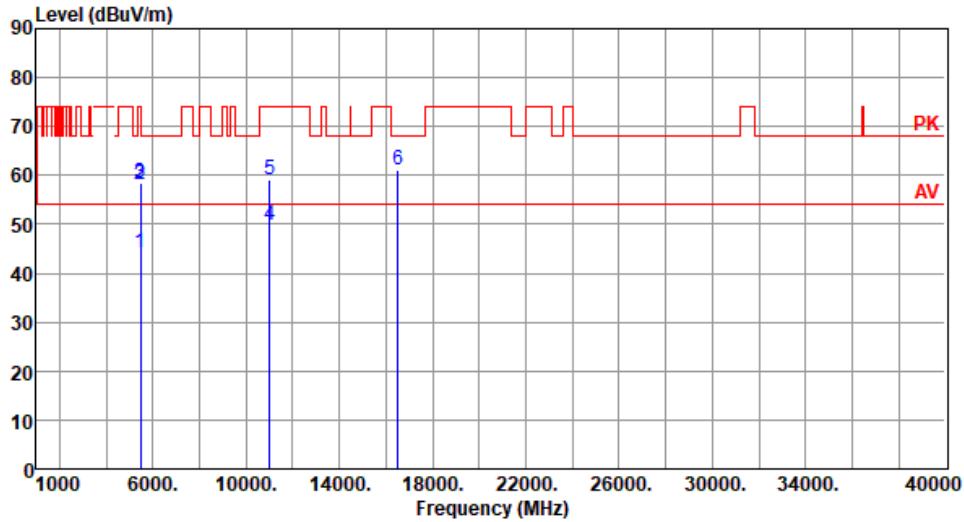


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.19	54.00	-9.81	39.90	4.29	Average	111	291
2	5460.00	57.96	74.00	-16.04	53.67	4.29	Peak	111	291
3	5470.00	58.44	68.20	-9.76	54.12	4.32	Peak	111	291
4	11000.00	49.77	54.00	-4.23	35.35	14.42	Average	259	52
5	11000.00	59.27	74.00	-14.73	44.85	14.42	Peak	259	52
6	16500.00	61.20	68.20	-7.00	44.95	16.25	Peak	100	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

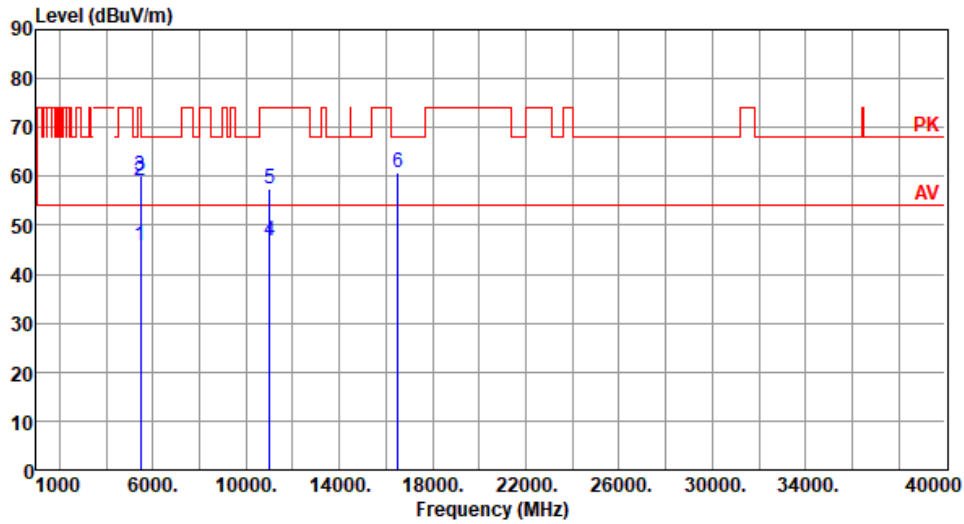


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.00	54.00	-8.00	41.71	4.29	Average	146	186
2	5460.00	59.05	74.00	-14.95	54.76	4.29	Peak	146	186
3	5470.00	60.20	68.20	-8.00	55.88	4.32	Peak	146	186
4	11000.00	46.67	54.00	-7.33	32.25	14.42	Average	156	22
5	11000.00	57.57	74.00	-16.43	43.15	14.42	Peak	156	22
6	16500.00	60.81	68.20	-7.39	44.56	16.25	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

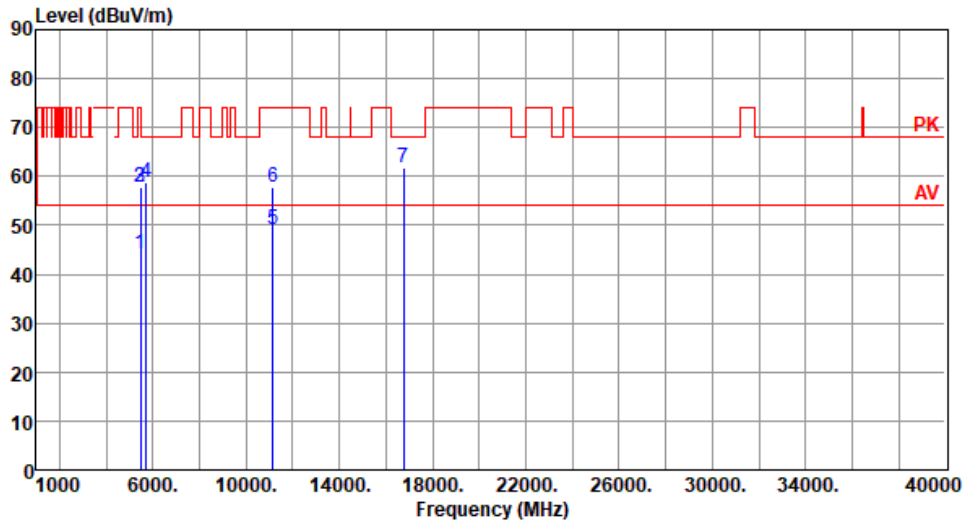

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.15	54.00	-9.85	39.86	4.29	Average	102	294
2	5460.00	57.89	74.00	-16.11	53.60	4.29	Peak	102	294
3	5470.00	57.92	68.20	-10.28	53.60	4.32	Peak	102	294
4	5725.00	58.69	68.20	-9.51	53.89	4.80	Peak	102	294
5	11160.00	49.26	54.00	-4.74	35.41	13.85	Average	261	50
6	11160.00	57.79	74.00	-16.21	43.94	13.85	Peak	261	50
7	16740.00	61.73	68.20	-6.47	44.88	16.85	Peak	100	55


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

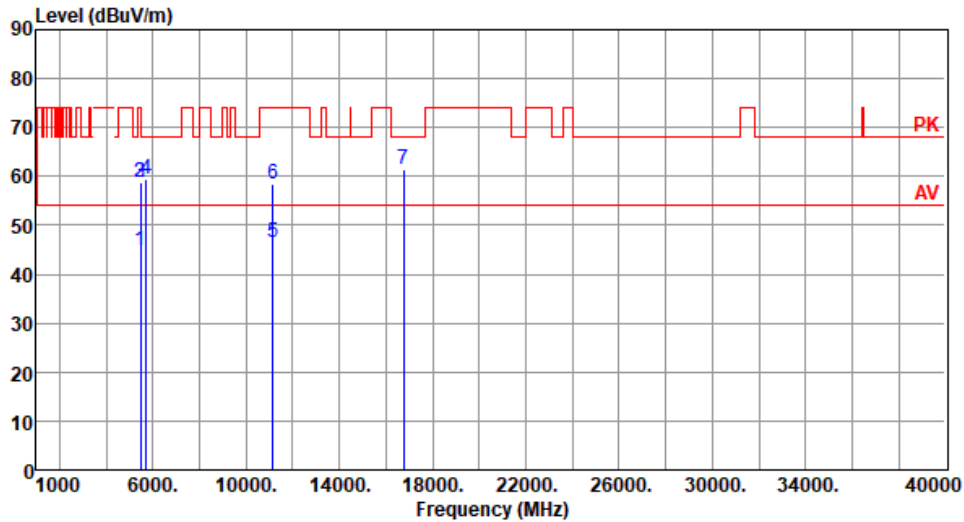

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.96	54.00	-9.04	40.67	4.29	Average	180	196
2	5460.00	58.90	74.00	-15.10	54.61	4.29	Peak	180	196
3	5470.00	58.94	68.20	-9.26	54.62	4.32	Peak	180	196
4	5725.00	59.36	68.20	-8.84	54.56	4.80	Peak	180	196
5	11160.00	46.62	54.00	-7.38	32.77	13.85	Average	155	27
6	11160.00	58.29	74.00	-15.71	44.44	13.85	Peak	155	27
7	16740.00	61.51	68.20	-6.69	44.66	16.85	Peak	100	115


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

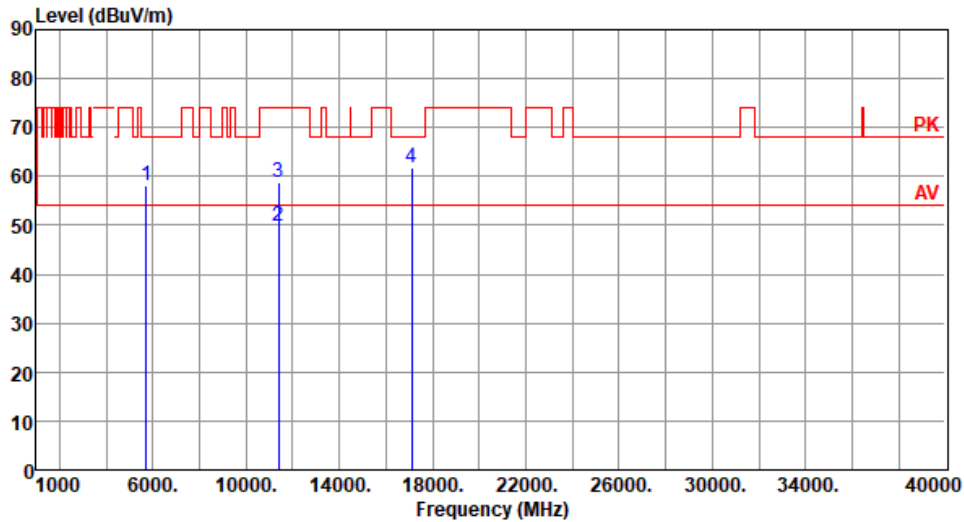

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	58.26	68.20	-9.94	53.46	4.80	Peak	110	294
2	11400.00	49.66	54.00	-4.34	35.62	14.04	Average	262	57
3	11400.00	58.86	74.00	-15.14	44.82	14.04	Peak	262	57
4	17100.00	61.92	68.20	-6.28	44.85	17.07	Peak	100	52


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

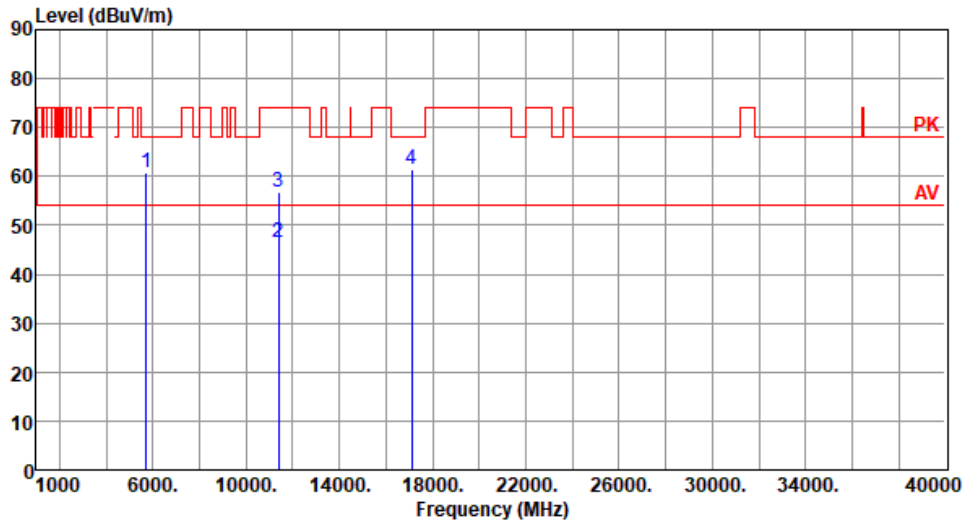

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	60.78	68.20	-7.42	55.98	4.80	Peak	175	192
2	11400.00	46.50	54.00	-7.50	32.46	14.04	Average	158	23
3	11400.00	56.71	74.00	-17.29	42.67	14.04	Peak	158	23
4	17100.00	61.41	68.20	-6.79	44.34	17.07	Peak	100	48


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for ax HE20-OFDMA

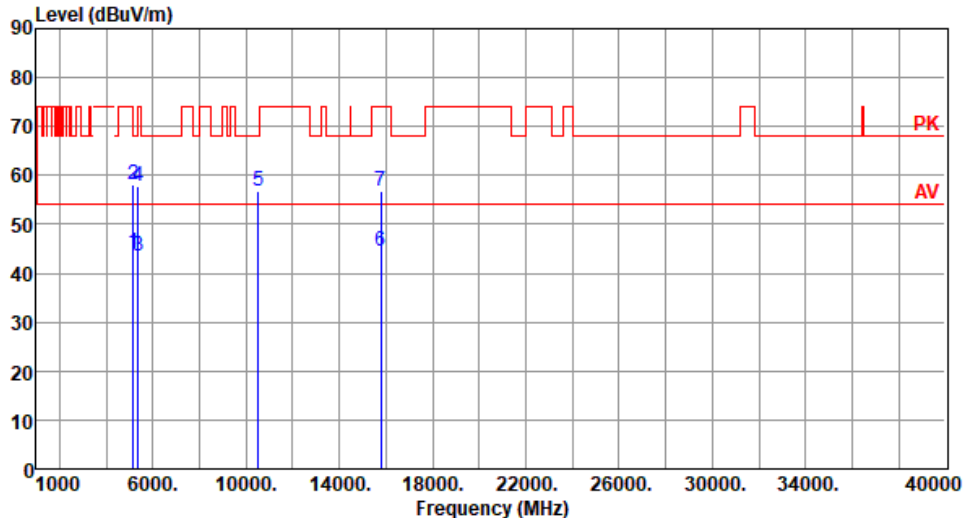Modulation	ax HE20-OFDMA	Test Freq. (MHz)	5260																																																																									
Polarization	Horizontal																																																																											
Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69																																																																												
																																																																												
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>44.10</td> <td>54.00</td> <td>-9.90</td> <td>39.89</td> <td>4.21</td> <td>Average</td> <td>102 294</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>58.08</td> <td>74.00</td> <td>-15.92</td> <td>53.87</td> <td>4.21</td> <td>Peak</td> <td>102 294</td> </tr> <tr> <td>3</td> <td>5350.00</td> <td>43.52</td> <td>54.00</td> <td>-10.48</td> <td>39.64</td> <td>3.88</td> <td>Average</td> <td>102 294</td> </tr> <tr> <td>4</td> <td>5350.00</td> <td>57.83</td> <td>74.00</td> <td>-16.17</td> <td>53.95</td> <td>3.88</td> <td>Peak</td> <td>102 294</td> </tr> <tr> <td>5</td> <td>10520.00</td> <td>56.75</td> <td>68.20</td> <td>-11.45</td> <td>42.65</td> <td>14.10</td> <td>Peak</td> <td>100 40</td> </tr> <tr> <td>6</td> <td>15780.00</td> <td>44.50</td> <td>54.00</td> <td>-9.50</td> <td>30.66</td> <td>13.84</td> <td>Average</td> <td>100 30</td> </tr> <tr> <td>7</td> <td>15780.00</td> <td>56.62</td> <td>74.00</td> <td>-17.38</td> <td>42.78</td> <td>13.84</td> <td>Peak</td> <td>100 30</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.10	54.00	-9.90	39.89	4.21	Average	102 294	2	5150.00	58.08	74.00	-15.92	53.87	4.21	Peak	102 294	3	5350.00	43.52	54.00	-10.48	39.64	3.88	Average	102 294	4	5350.00	57.83	74.00	-16.17	53.95	3.88	Peak	102 294	5	10520.00	56.75	68.20	-11.45	42.65	14.10	Peak	100 40	6	15780.00	44.50	54.00	-9.50	30.66	13.84	Average	100 30	7	15780.00	56.62	74.00	-17.38	42.78	13.84	Peak	100 30			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																				
1	5150.00	44.10	54.00	-9.90	39.89	4.21	Average	102 294																																																																				
2	5150.00	58.08	74.00	-15.92	53.87	4.21	Peak	102 294																																																																				
3	5350.00	43.52	54.00	-10.48	39.64	3.88	Average	102 294																																																																				
4	5350.00	57.83	74.00	-16.17	53.95	3.88	Peak	102 294																																																																				
5	10520.00	56.75	68.20	-11.45	42.65	14.10	Peak	100 40																																																																				
6	15780.00	44.50	54.00	-9.50	30.66	13.84	Average	100 30																																																																				
7	15780.00	56.62	74.00	-17.38	42.78	13.84	Peak	100 30																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																												

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5260
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

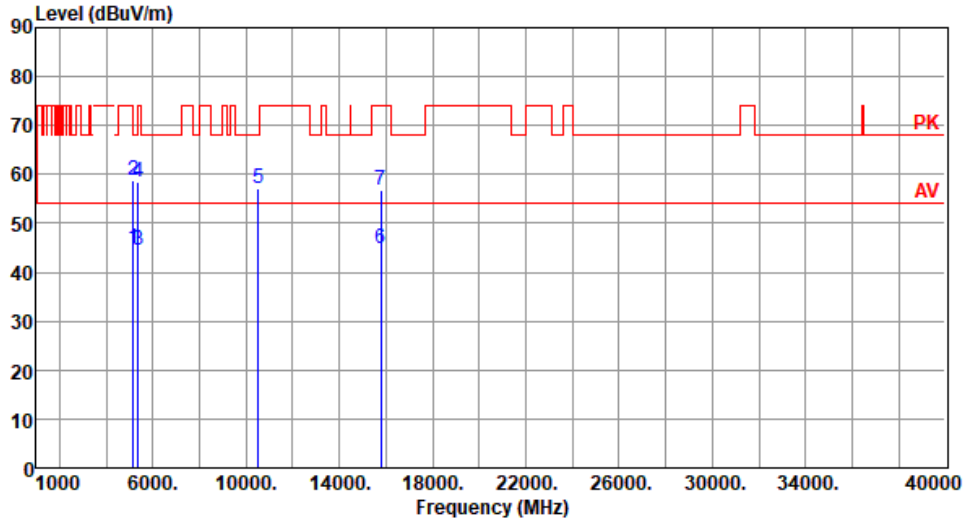

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.88	54.00	-9.12	40.67	4.21	Average	366	181
2	5150.00	58.86	74.00	-15.14	54.65	4.21	Peak	366	181
3	5350.00	44.46	54.00	-9.54	40.58	3.88	Average	366	181
4	5350.00	58.58	74.00	-15.42	54.70	3.88	Peak	366	181
5	10520.00	56.96	68.20	-11.24	42.86	14.10	Peak	100	107
6	15780.00	44.78	54.00	-9.22	30.94	13.84	Average	100	102
7	15780.00	56.78	74.00	-17.22	42.94	13.84	Peak	100	102


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

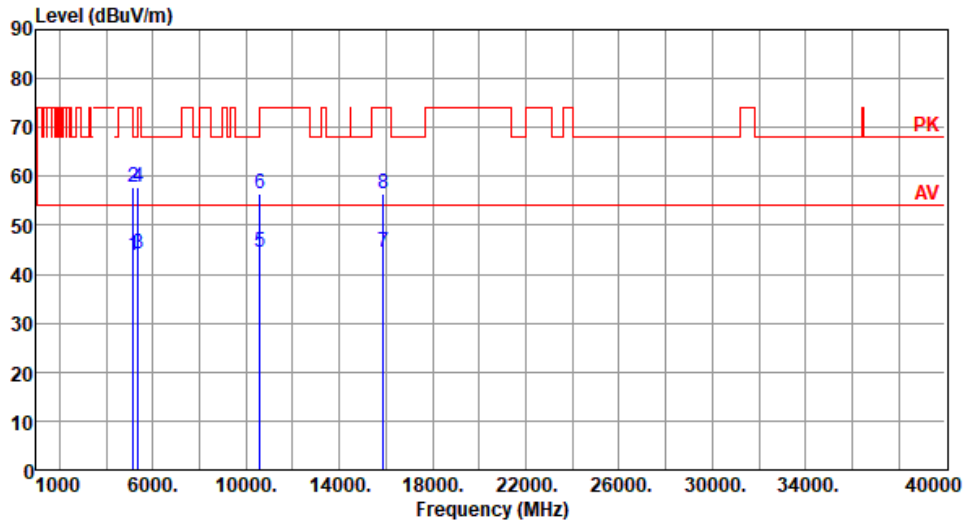

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.86	54.00	-10.14	39.65	4.21	Average	100	291
2	5150.00	57.70	74.00	-16.30	53.49	4.21	Peak	100	291
3	5350.00	44.03	54.00	-9.97	40.15	3.88	Average	100	291
4	5350.00	57.77	74.00	-16.23	53.89	3.88	Peak	100	291
5	10600.00	44.53	54.00	-9.47	30.47	14.06	Average	100	57
6	10600.00	56.51	74.00	-17.49	42.45	14.06	Peak	100	57
7	15900.00	44.44	54.00	-9.56	30.51	13.93	Average	100	60
8	15900.00	56.43	74.00	-17.57	42.50	13.93	Peak	100	60


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

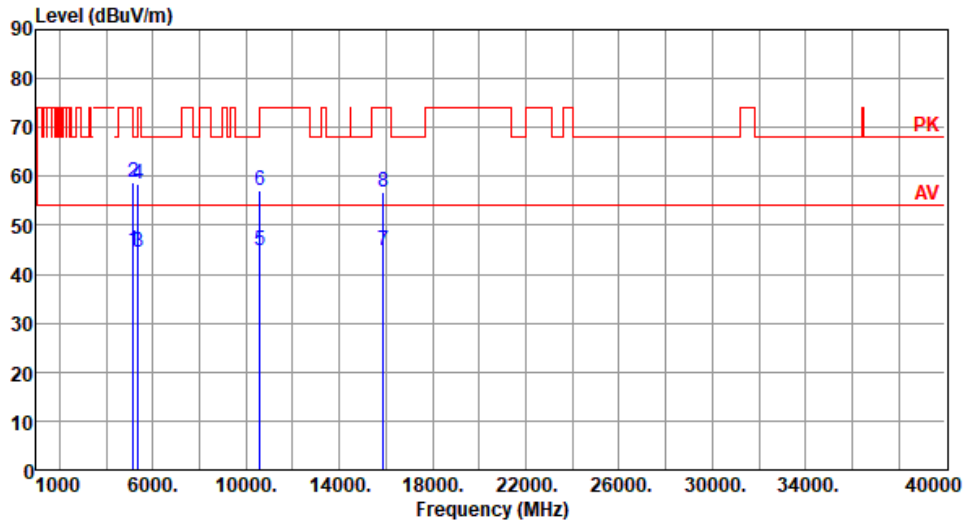

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.81	54.00	-9.19	40.60	4.21	Average	347	185
2	5150.00	58.86	74.00	-15.14	54.65	4.21	Peak	347	185
3	5350.00	44.47	54.00	-9.53	40.59	3.88	Average	347	185
4	5350.00	58.51	74.00	-15.49	54.63	3.88	Peak	347	185
5	10600.00	44.93	54.00	-9.07	30.87	14.06	Average	100	104
6	10600.00	57.01	74.00	-16.99	42.95	14.06	Peak	100	104
7	15900.00	44.90	54.00	-9.10	30.97	13.93	Average	100	101
8	15900.00	56.84	74.00	-17.16	42.91	13.93	Peak	100	101


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

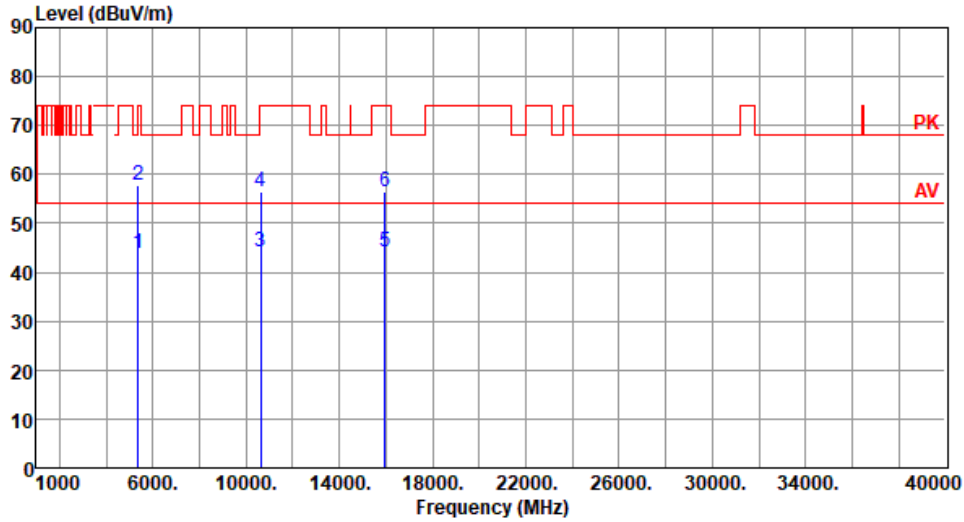

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	43.86	54.00	-10.14	39.98	3.88	Average	102	290
2	5350.00	57.67	74.00	-16.33	53.79	3.88	Peak	102	290
3	10640.00	44.29	54.00	-9.71	30.25	14.04	Average	100	50
4	10640.00	56.50	74.00	-17.50	42.46	14.04	Peak	100	50
5	15960.00	44.13	54.00	-9.87	30.11	14.02	Average	100	48
6	15960.00	56.48	74.00	-17.52	42.46	14.02	Peak	100	48


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Vertical		

Test By :Akun Chung      Temperature(°C):23      Humidity(%):69

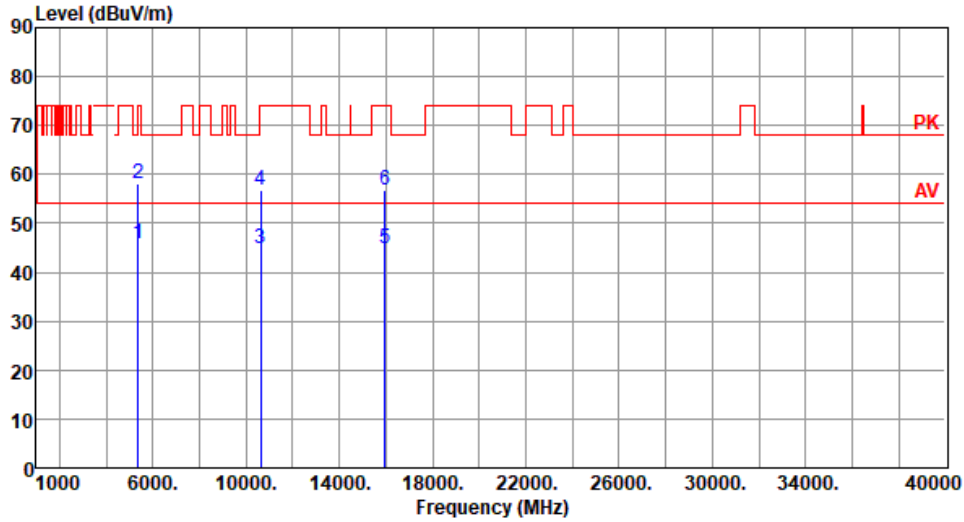

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	45.74	54.00	-8.26	41.86	3.88	Average	361	183
2	5350.00	58.27	74.00	-15.73	54.39	3.88	Peak	361	183
3	10640.00	44.81	54.00	-9.19	30.77	14.04	Average	100	106
4	10640.00	56.82	74.00	-17.18	42.78	14.04	Peak	100	106
5	15960.00	44.74	54.00	-9.26	30.72	14.02	Average	100	101
6	15960.00	56.82	74.00	-17.18	42.80	14.02	Peak	100	101


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Horizontal		

Test By : Roger Lu      Temperature(°C): 24      Humidity(%): 65

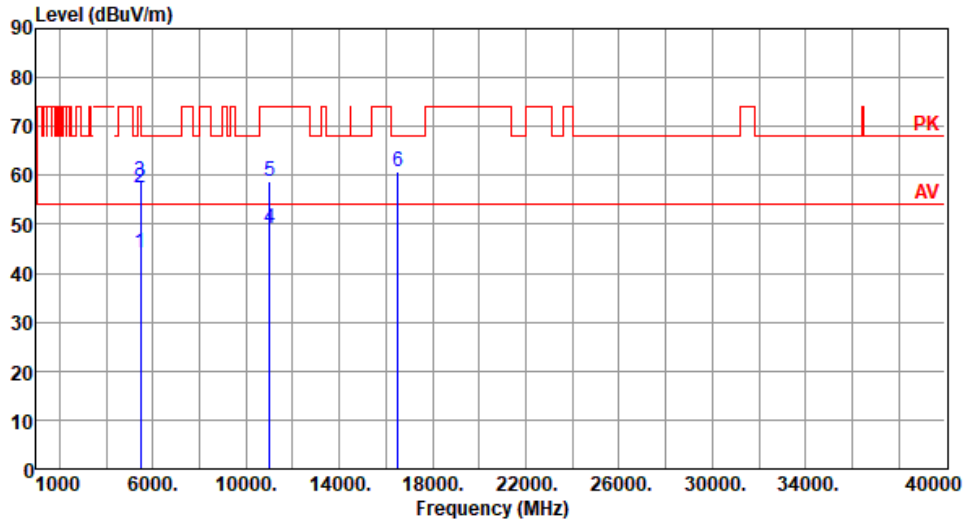


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.29	54.00	-9.71	40.00	4.29	Average	102	294
2	5460.00	57.55	74.00	-16.45	53.26	4.29	Peak	102	294
3	5470.00	58.62	68.20	-9.58	54.30	4.32	Peak	102	294
4	11000.00	49.07	54.00	-4.93	34.65	14.42	Average	241	35
5	11000.00	58.77	74.00	-15.23	44.35	14.42	Peak	241	35
6	16500.00	60.84	68.20	-7.36	44.59	16.25	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

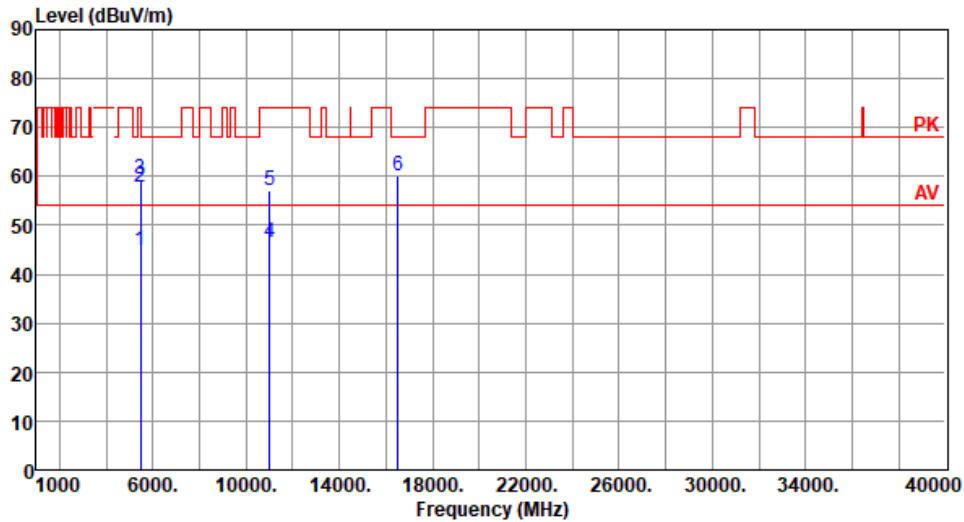

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.88	54.00	-9.12	40.59	4.29	Average	146	188
2	5460.00	57.95	74.00	-16.05	53.66	4.29	Peak	146	188
3	5470.00	59.36	68.20	-8.84	55.04	4.32	Peak	146	188
4	11000.00	46.54	54.00	-7.46	32.12	14.42	Average	145	25
5	11000.00	57.01	74.00	-16.99	42.59	14.42	Peak	145	25
6	16500.00	60.14	68.20	-8.06	43.89	16.25	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%) :65

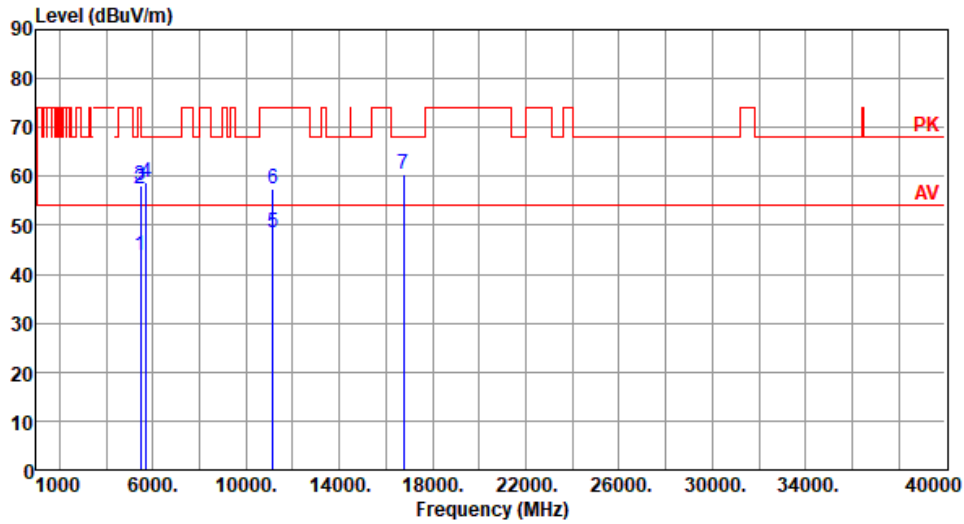

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.89	54.00	-10.11	39.60	4.29	Average	100	291
2	5460.00	57.45	74.00	-16.55	53.16	4.29	Peak	100	291
3	5470.00	57.97	68.20	-10.23	53.65	4.32	Peak	100	291
4	5725.00	58.64	68.20	-9.56	53.84	4.80	Peak	100	291
5	11160.00	48.41	54.00	-5.59	34.56	13.85	Average	238	38
6	11160.00	57.41	74.00	-16.59	43.56	13.85	Peak	238	38
7	16740.00	60.53	68.20	-7.67	43.68	16.85	Peak	100	60


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%) :65

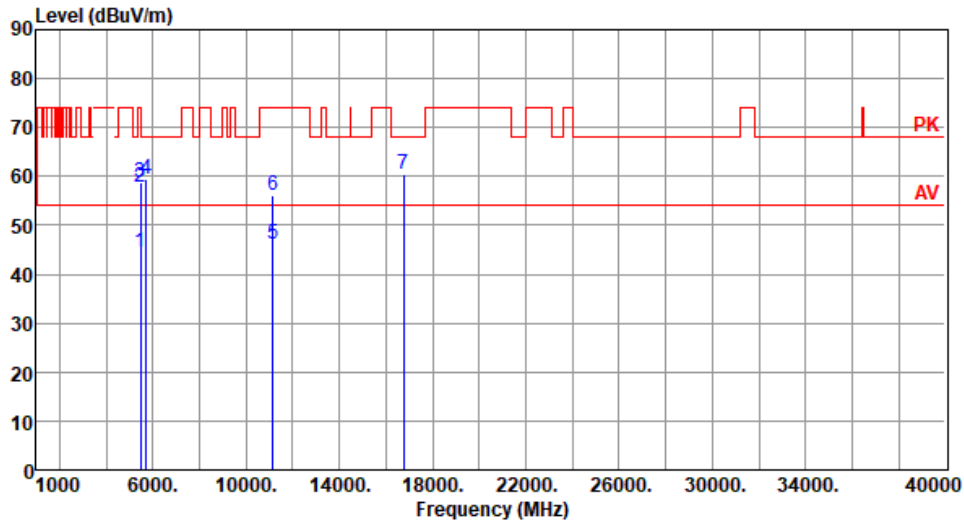

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.45	54.00	-9.55	40.16	4.29	Average	151	189
2	5460.00	57.89	74.00	-16.11	53.60	4.29	Peak	151	189
3	5470.00	58.90	68.20	-9.30	54.58	4.32	Peak	151	189
4	5725.00	59.42	68.20	-8.78	54.62	4.80	Peak	151	189
5	11160.00	46.10	54.00	-7.90	32.25	13.85	Average	154	39
6	11160.00	56.14	74.00	-17.86	42.29	13.85	Peak	154	39
7	16740.00	60.44	68.20	-7.76	43.59	16.85	Peak	100	30


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%) :65

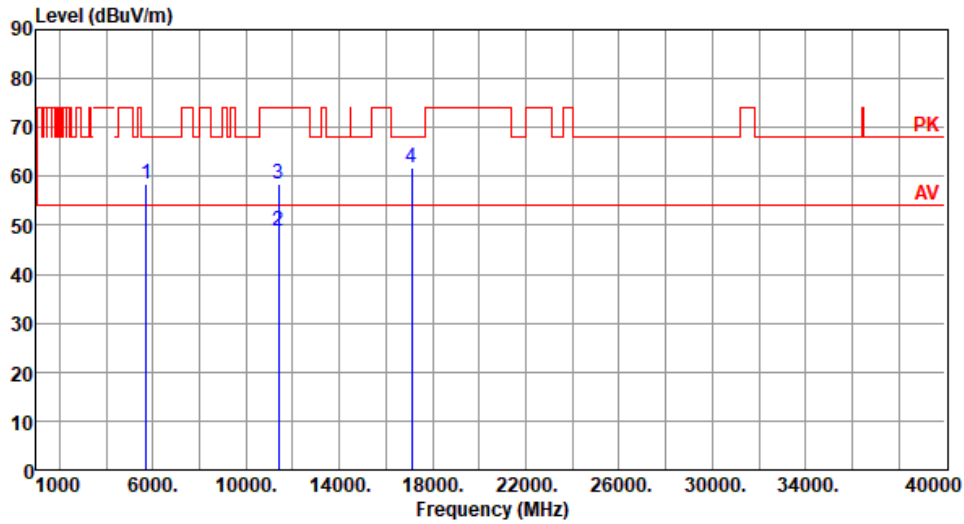

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	58.39	68.20	-9.81	53.59	4.80	Peak	112	290
2	11400.00	48.71	54.00	-5.29	34.67	14.04	Average	245	42
3	11400.00	58.42	74.00	-15.58	44.38	14.04	Peak	245	42
4	17100.00	61.69	68.20	-6.51	44.62	17.07	Peak	100	48


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE20-OFDMA	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

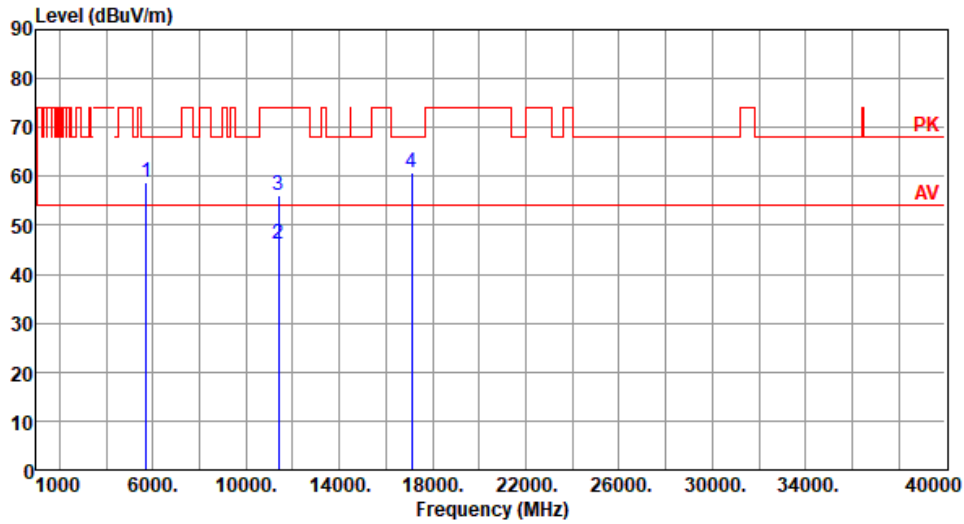


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	58.95	68.20	-9.25	54.15	4.80	Peak	163	209
2	11400.00	46.30	54.00	-7.70	32.26	14.04	Average	115	30
3	11400.00	56.20	74.00	-17.80	42.16	14.04	Peak	115	30
4	17100.00	60.71	68.20	-7.49	43.64	17.07	Peak	146	31

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for ax HE40-OFDMA
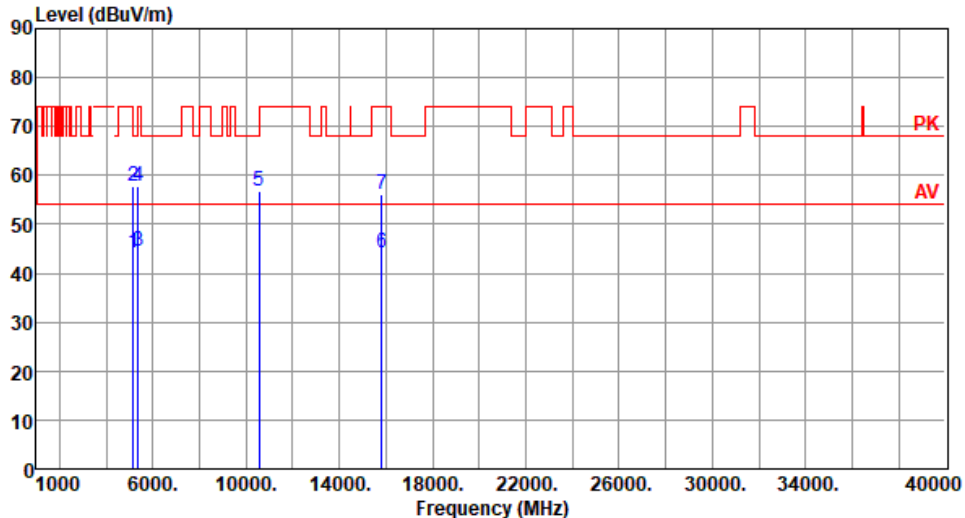
<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5270						
<b>Polarization</b>	Horizontal								
Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5150.00	44.09	54.00	-9.91	39.88	4.21	Average	106	299
2	5150.00	57.85	74.00	-16.15	53.64	4.21	Peak	106	299
3	5350.00	44.42	54.00	-9.58	40.54	3.88	Average	106	299
4	5350.00	57.84	74.00	-16.16	53.96	3.88	Peak	106	299
5	10540.00	56.66	68.20	-11.54	42.56	14.10	Peak	100	90
6	15810.00	44.14	54.00	-9.86	30.34	13.80	Average	100	30
7	15810.00	56.26	74.00	-17.74	42.46	13.80	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5270
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

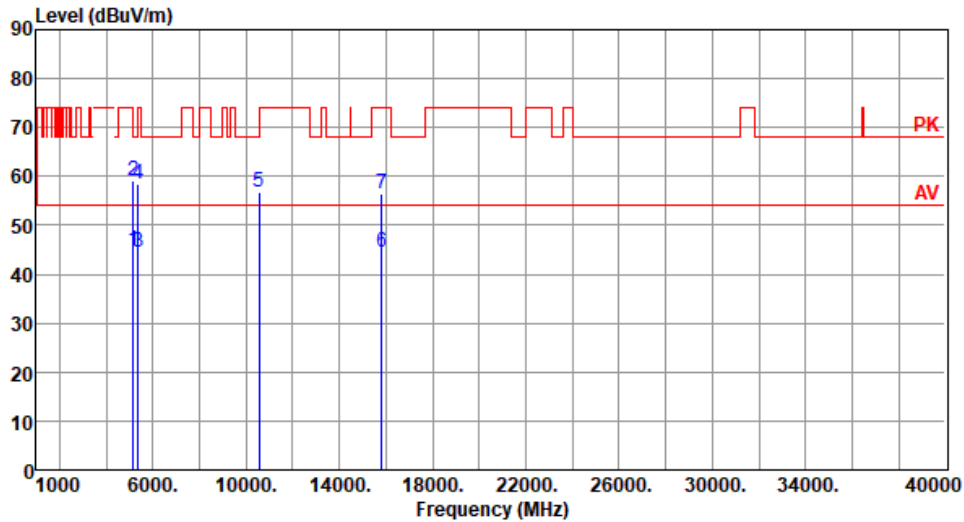

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.92	54.00	-9.08	40.71	4.21	Average	340	190
2	5150.00	58.96	74.00	-15.04	54.75	4.21	Peak	340	190
3	5350.00	44.61	54.00	-9.39	40.73	3.88	Average	340	190
4	5350.00	58.60	74.00	-15.40	54.72	3.88	Peak	340	190
5	10540.00	56.85	68.20	-11.35	42.75	14.10	Peak	100	117
6	15810.00	44.45	54.00	-9.55	30.65	13.80	Average	100	112
7	15810.00	56.45	74.00	-17.55	42.65	13.80	Peak	100	112


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5310
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

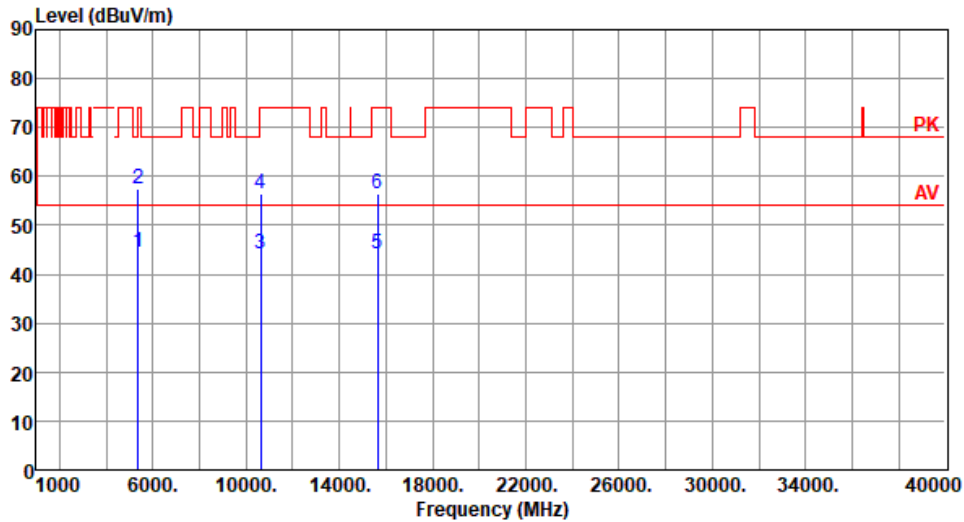

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	44.43	54.00	-9.57	40.55	3.88	Average	100	298
2	5350.00	57.57	74.00	-16.43	53.69	3.88	Peak	100	298
3	10620.00	44.30	54.00	-9.70	30.26	14.04	Average	100	80
4	10620.00	56.31	74.00	-17.69	42.27	14.04	Peak	100	80
5	15630.00	44.32	54.00	-9.68	30.25	14.07	Average	100	100
6	15630.00	56.40	74.00	-17.60	42.33	14.07	Peak	100	100


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5310
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

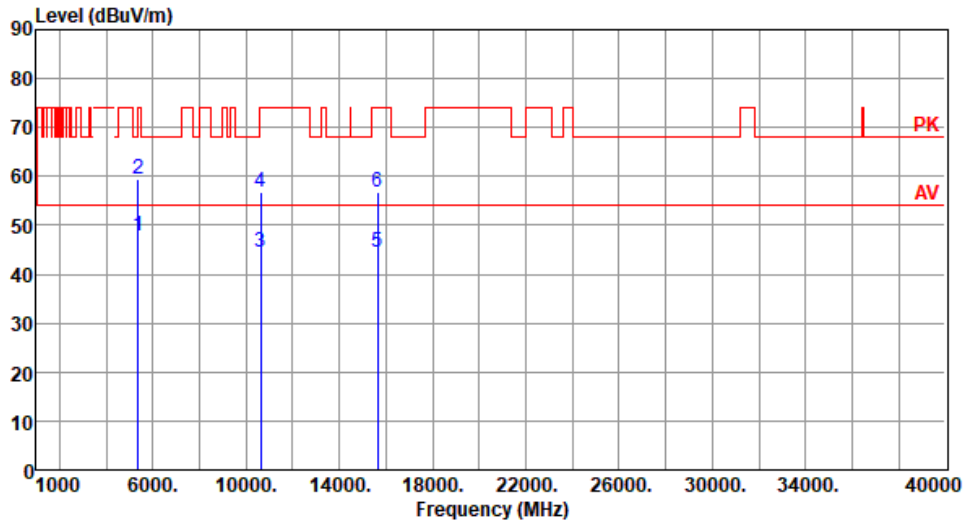

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	47.84	54.00	-6.16	43.96	3.88	Average	338	193
2	5350.00	59.61	74.00	-14.39	55.73	3.88	Peak	338	193
3	10620.00	44.59	54.00	-9.41	30.55	14.04	Average	100	110
4	10620.00	56.64	74.00	-17.36	42.60	14.04	Peak	100	110
5	15630.00	44.65	54.00	-9.35	30.58	14.07	Average	100	108
6	15630.00	56.67	74.00	-17.33	42.60	14.07	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5510
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

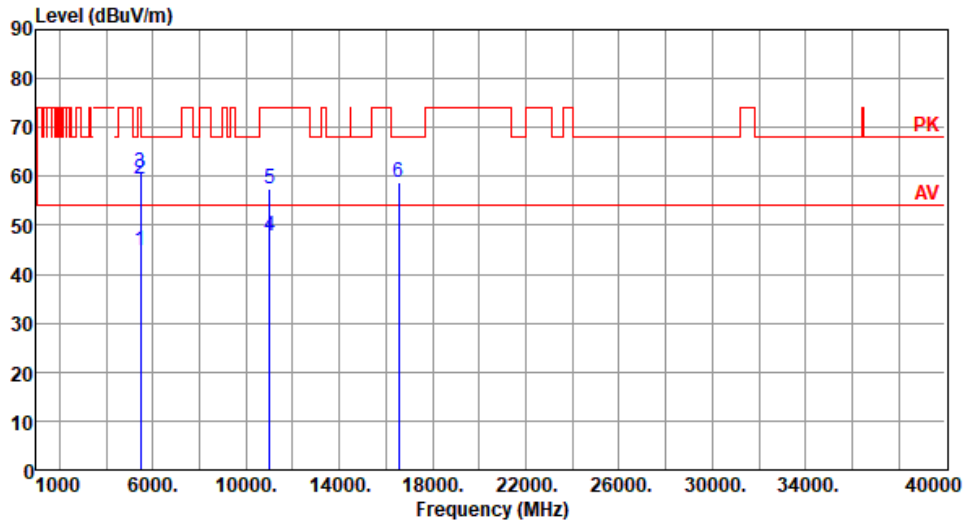

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.89	54.00	-9.11	40.60	4.29	Average	109	292
2	5460.00	59.56	74.00	-14.44	55.27	4.29	Peak	109	292
3	5470.00	60.62	68.20	-7.58	56.30	4.32	Peak	109	292
4	11020.00	47.81	54.00	-6.19	33.46	14.35	Average	233	44
5	11020.00	57.51	74.00	-16.49	43.16	14.35	Peak	233	44
6	16530.00	58.79	68.20	-9.41	42.60	16.19	Peak	100	60


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5510
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%) :65

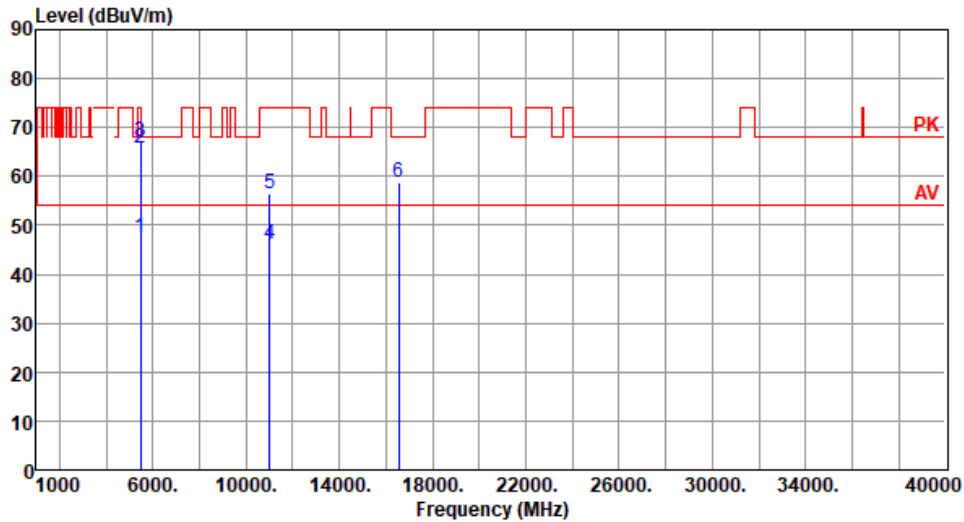

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.42	54.00	-6.58	43.13	4.29	Average	181	144
2	5460.00	65.81	74.00	-8.19	61.52	4.29	Peak	181	144
3	5470.00	66.99	68.20	-1.21	62.67	4.32	Peak	181	169
4	11020.00	46.25	54.00	-7.75	31.90	14.35	Average	143	22
5	11020.00	56.62	74.00	-17.38	42.27	14.35	Peak	143	22
6	16530.00	58.66	68.20	-9.54	42.47	16.19	Peak	100	40


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5590
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

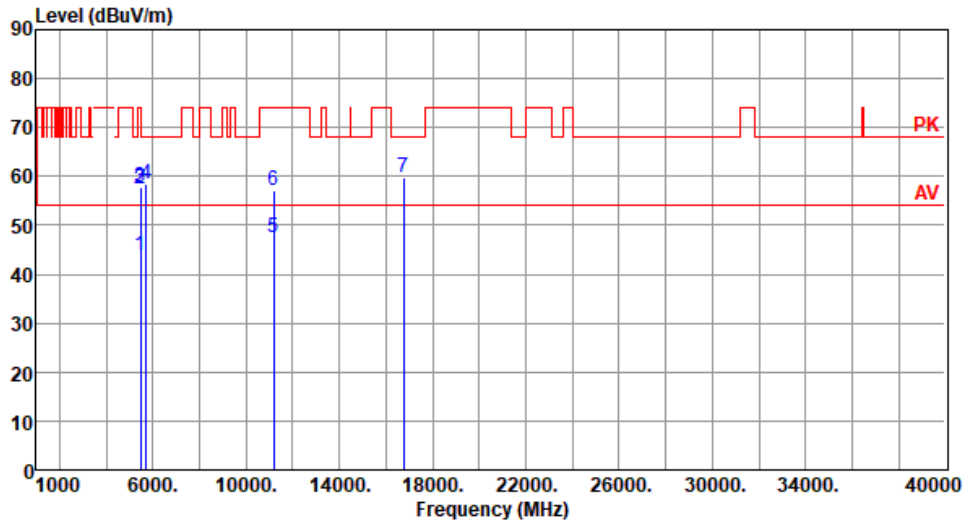

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.88	54.00	-10.12	39.59	4.29	Average	104	295
2	5460.00	57.45	74.00	-16.55	53.16	4.29	Peak	104	295
3	5470.00	57.88	68.20	-10.32	53.56	4.32	Peak	104	295
4	5725.00	58.49	68.20	-9.71	53.69	4.80	Peak	104	295
5	11180.00	47.44	54.00	-6.56	33.67	13.77	Average	235	45
6	11180.00	57.04	74.00	-16.96	43.27	13.77	Peak	235	45
7	16770.00	59.87	68.20	-8.33	42.89	16.98	Peak	100	55


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5590
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%) :65

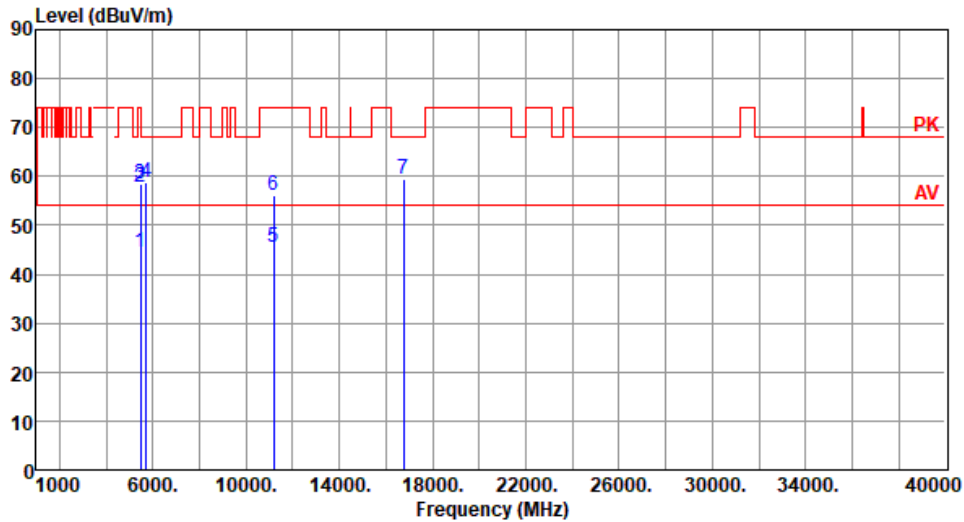

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.56	54.00	-9.44	40.27	4.29	Average	152	160
2	5460.00	57.86	74.00	-16.14	53.57	4.29	Peak	152	160
3	5470.00	58.30	68.20	-9.90	53.98	4.32	Peak	152	160
4	5725.00	58.82	68.20	-9.38	54.02	4.80	Peak	152	160
5	11180.00	45.44	54.00	-8.56	31.67	13.77	Average	152	28
6	11180.00	56.10	74.00	-17.90	42.33	13.77	Peak	152	28
7	16770.00	59.57	68.20	-8.63	42.59	16.98	Peak	100	90


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

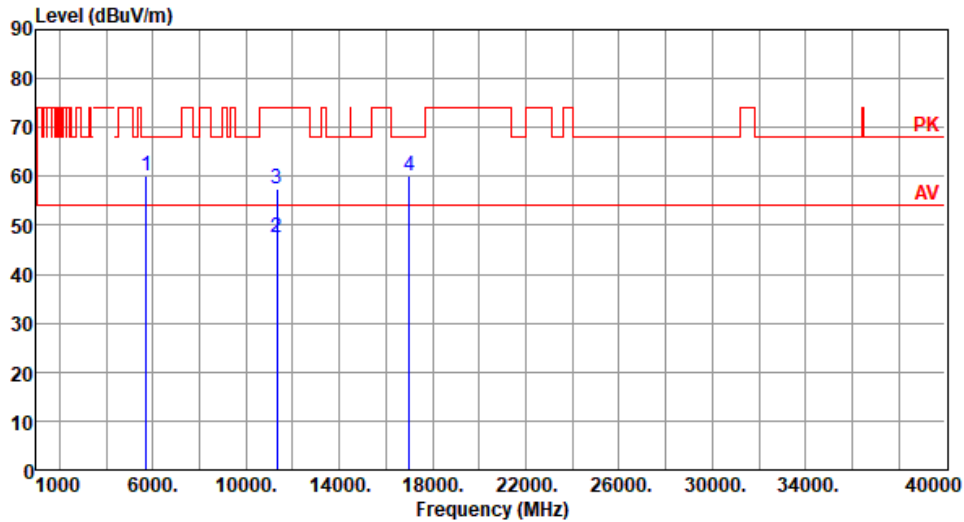

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	60.05	68.20	-8.15	55.25	4.80	Peak	103	297
2	11340.00	47.46	54.00	-6.54	33.59	13.87	Average	236	42
3	11340.00	57.46	74.00	-16.54	43.59	13.87	Peak	236	42
4	17010.00	60.07	68.20	-8.13	43.11	16.96	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE40-OFDMA	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

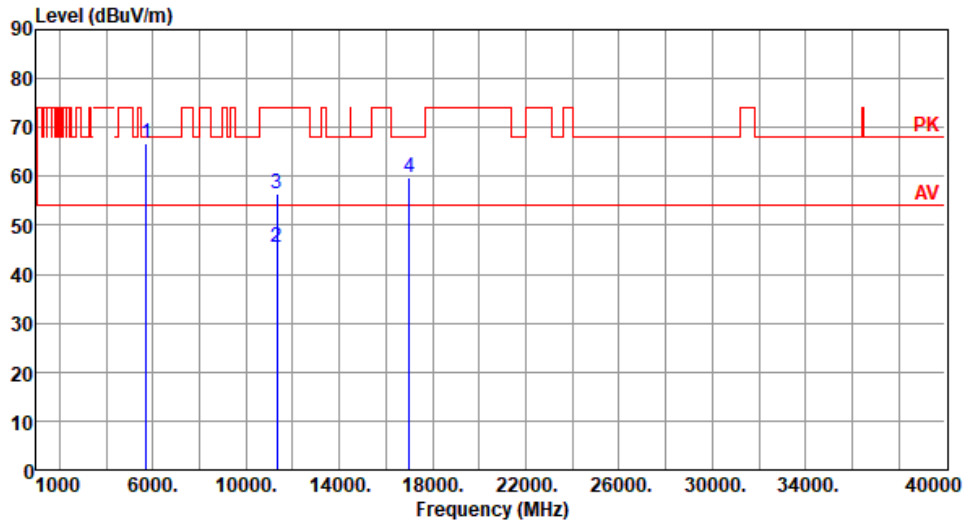


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	66.77	68.20	-1.43	61.97	4.80	Peak	152	181
2	11340.00	45.54	54.00	-8.46	31.67	13.87	Average	150	23
3	11340.00	56.33	74.00	-17.67	42.46	13.87	Peak	150	23
4	17010.00	59.64	68.20	-8.56	42.68	16.96	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for ax HE80-OFDMA

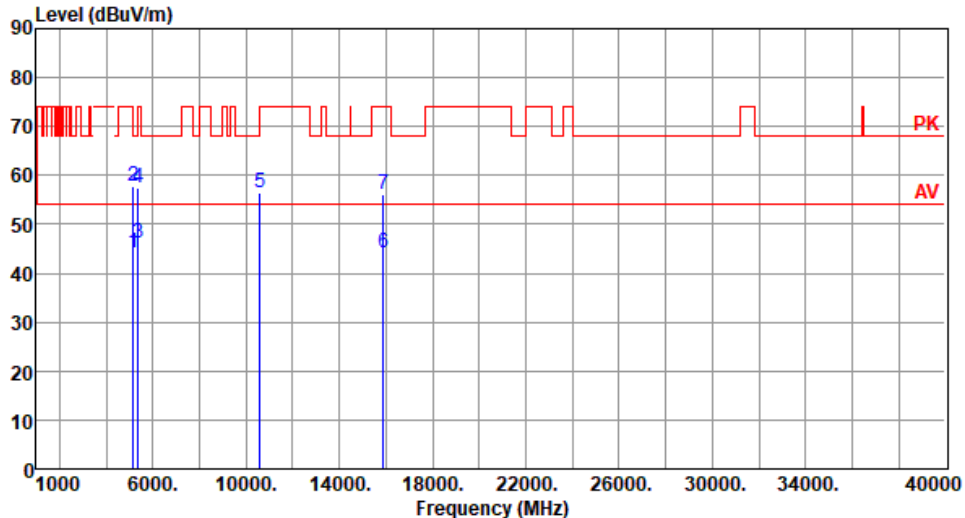Modulation	ax HE80-OFDMA	Test Freq. (MHz)	5290						
Polarization	Horizontal								
Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69									
 <p>The graph displays the radiated unwanted emission levels in dBuV/m across a frequency range from 1000 MHz to 40000 MHz. The y-axis ranges from 0 to 90 dBuV/m. A horizontal red line at approximately 55 dBuV/m is labeled 'AV' (Average Value). A horizontal red line at approximately 70 dBuV/m is labeled 'PK' (Peak Value). Several peaks are identified with blue vertical lines and labels: 2 at 5150 MHz, 3 at 5350 MHz, 4 at 5350 MHz, 5 at 10580 MHz, 6 at 15870 MHz, and 7 at 15870 MHz. The emission levels for these peaks are detailed in the table below.</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.19	54.00	-9.81	39.98	4.21	Average	100	291
2	5150.00	57.85	74.00	-16.15	53.64	4.21	Peak	100	291
3	5350.00	46.14	54.00	-7.86	42.26	3.88	Average	100	291
4	5350.00	57.54	74.00	-16.46	53.66	3.88	Peak	100	291
5	10580.00	56.33	68.20	-11.87	42.25	14.08	Peak	100	30
6	15870.00	44.14	54.00	-9.86	30.25	13.89	Average	100	60
7	15870.00	56.15	74.00	-17.85	42.26	13.89	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor, cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5290
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

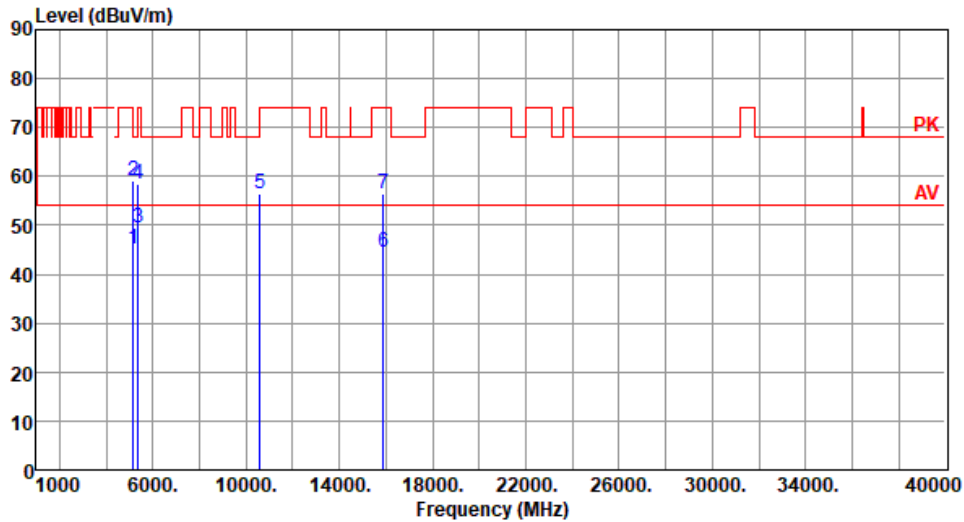

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.09	54.00	-8.91	40.88	4.21	Average	342	185
2	5150.00	58.99	74.00	-15.01	54.78	4.21	Peak	342	185
3	5350.00	49.52	54.00	-4.48	45.64	3.88	Average	342	185
4	5350.00	58.57	74.00	-15.43	54.69	3.88	Peak	342	185
5	10580.00	56.49	68.20	-11.71	42.41	14.08	Peak	100	104
6	15870.00	44.37	54.00	-9.63	30.48	13.89	Average	100	106
7	15870.00	56.37	74.00	-17.63	42.48	13.89	Peak	100	106

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5530
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 25      Humidity(%): 63

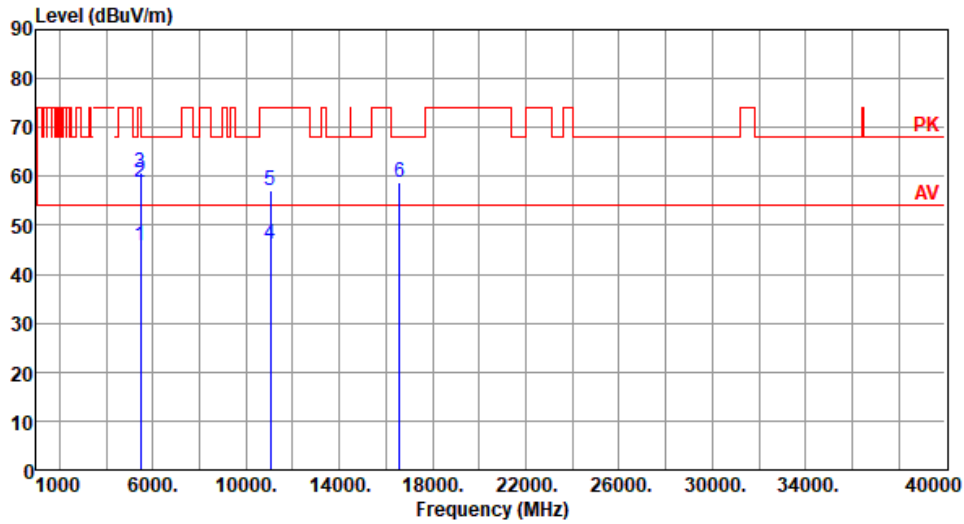

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.86	54.00	-8.14	41.57	4.29	Average	106	294
2	5460.00	58.86	74.00	-15.14	54.57	4.29	Peak	106	294
3	5470.00	60.91	68.20	-7.29	56.59	4.32	Peak	106	294
4	11060.00	46.08	54.00	-7.92	31.85	14.23	Average	226	57
5	11060.00	56.98	74.00	-17.02	42.75	14.23	Peak	226	57
6	16590.00	58.65	68.20	-9.55	42.56	16.09	Peak	100	52


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5530
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 25      Humidity(%): 63

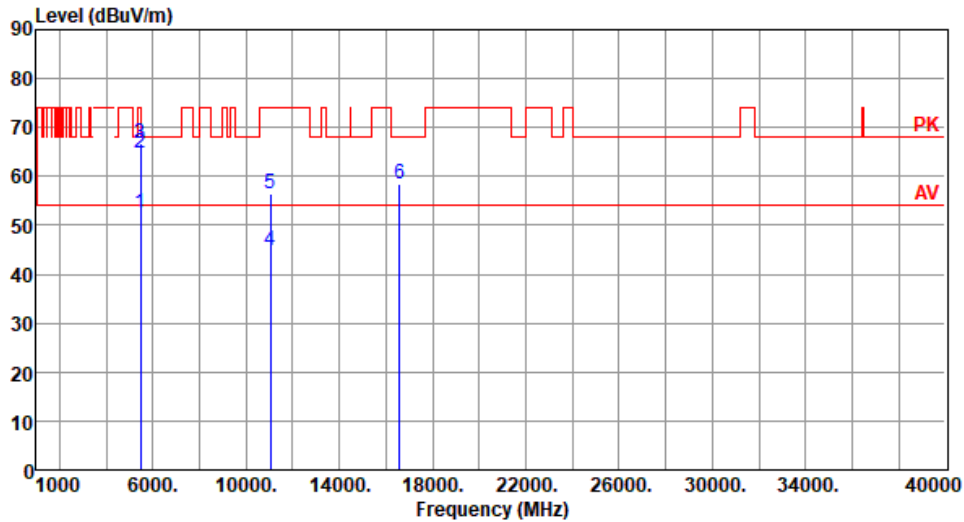

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	52.52	54.00	-1.48	48.23	4.29	Average	173	152
2	5460.00	64.66	74.00	-9.34	60.37	4.29	Peak	173	152
3	5470.00	66.69	68.20	-1.51	62.37	4.32	Peak	213	37
4	11060.00	44.79	54.00	-9.21	30.56	14.23	Average	100	40
5	11060.00	56.48	74.00	-17.52	42.25	14.23	Peak	100	40
6	16590.00	58.55	68.20	-9.65	42.46	16.09	Peak	100	90


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

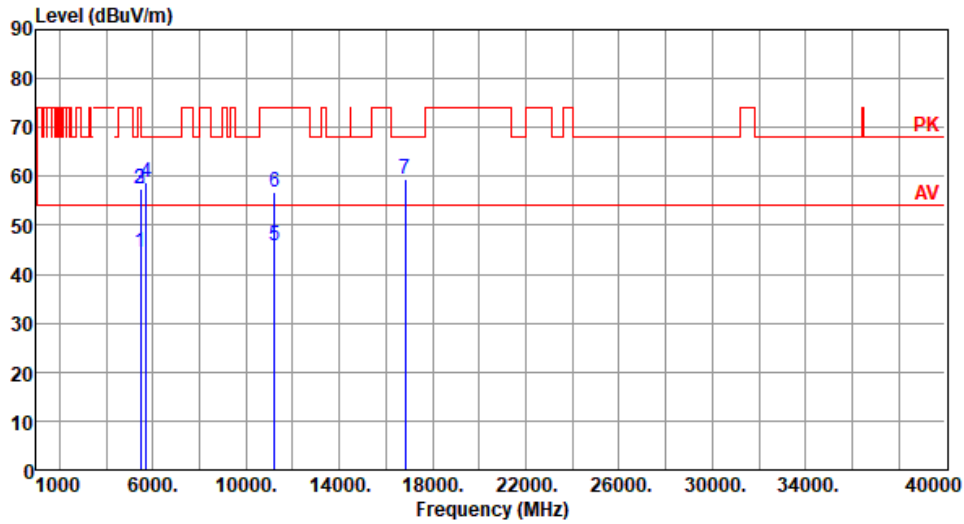

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.45	54.00	-9.55	40.16	4.29	Average	102	300
2	5460.00	57.46	74.00	-16.54	53.17	4.29	Peak	102	300
3	5470.00	57.57	68.20	-10.63	53.25	4.32	Peak	102	300
4	5725.00	58.92	68.20	-9.28	54.12	4.80	Peak	102	300
5	11220.00	45.95	54.00	-8.05	32.25	13.70	Average	237	42
6	11220.00	56.85	74.00	-17.15	43.15	13.70	Peak	237	42
7	16830.00	59.53	68.20	-8.67	42.48	17.05	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE80-OFDMA	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):24      Humidity(%):65

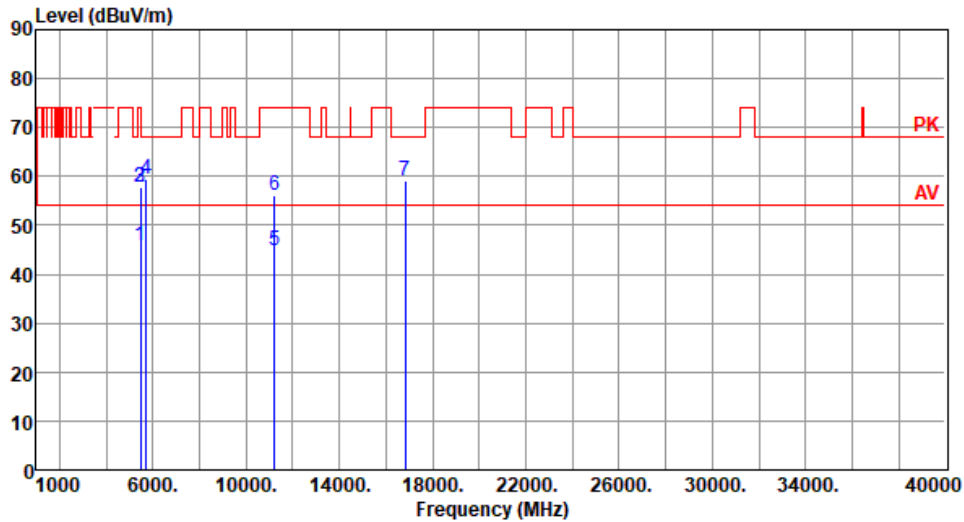

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.83	54.00	-8.17	41.54	4.29	Average	141	181
2	5460.00	57.78	74.00	-16.22	53.49	4.29	Peak	141	181
3	5470.00	57.91	68.20	-10.29	53.59	4.32	Peak	141	181
4	5725.00	59.36	68.20	-8.84	54.56	4.80	Peak	141	181
5	11220.00	44.94	54.00	-9.06	31.24	13.70	Average	100	30
6	11220.00	56.07	74.00	-17.93	42.37	13.70	Peak	100	30
7	16830.00	59.21	68.20	-8.99	42.16	17.05	Peak	100	90


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE160-OFDMA	<b>Test Freq. (MHz)</b>	5570
<b>Polarization</b>	Horizontal		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

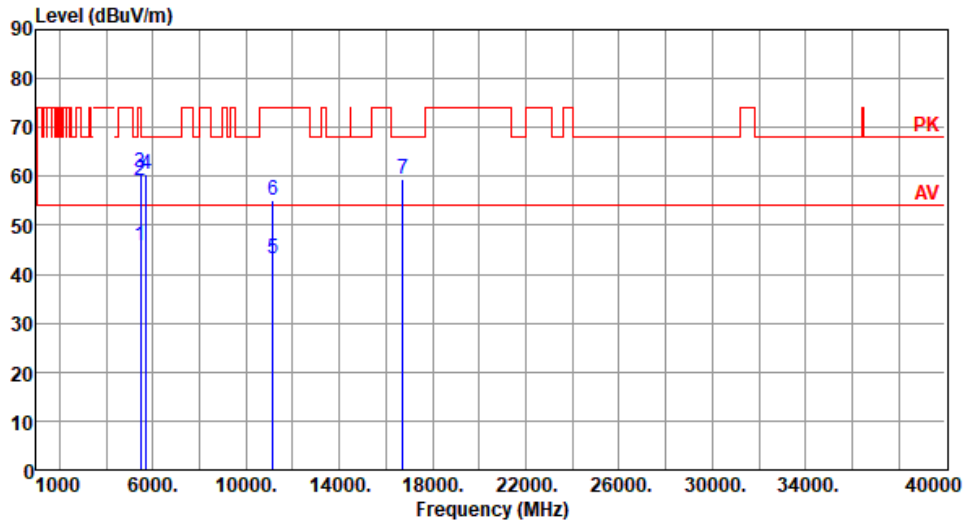

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.96	54.00	-8.04	41.67	4.29	Average	182	225
2	5460.00	59.15	74.00	-14.85	54.86	4.29	Peak	182	225
3	5470.00	60.92	68.20	-7.28	56.60	4.32	Peak	182	225
4	5725.00	60.38	68.20	-7.82	55.58	4.80	Peak	182	225
5	11140.00	43.18	54.00	-10.82	29.25	13.93	Average	100	40
6	11140.00	55.19	74.00	-18.81	41.26	13.93	Peak	100	40
7	16710.00	59.29	68.20	-8.91	42.56	16.73	Peak	100	60


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	ax HE160-OFDMA	<b>Test Freq. (MHz)</b>	5570
<b>Polarization</b>	Vertical		

Test By : Akun Chung      Temperature(°C): 23      Humidity(%): 69

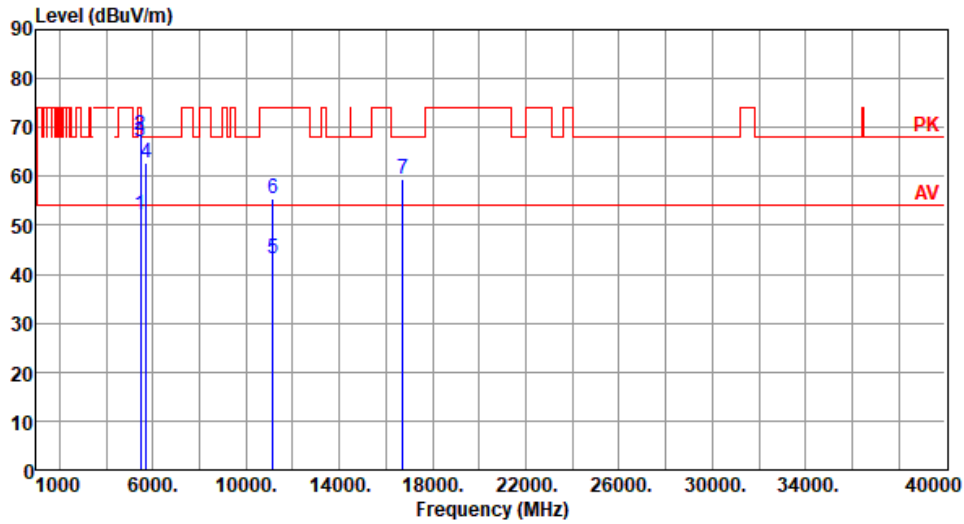

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	52.04	54.00	-1.96	47.75	4.29	Average	156	158
2	5460.00	68.50	74.00	-5.50	64.21	4.29	Peak	156	158
3	5470.00	67.04	68.20	-1.16	62.72	4.32	Peak	158	186
4	5725.00	62.65	68.20	-5.55	57.85	4.80	Peak	107	50
5	11140.00	43.24	54.00	-10.76	29.31	13.93	Average	100	100
6	11140.00	55.61	74.00	-18.39	41.68	13.93	Peak	100	100
7	16710.00	59.39	68.20	-8.81	42.66	16.73	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Frequency Stability


### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

### 3.6.3 Test Setup

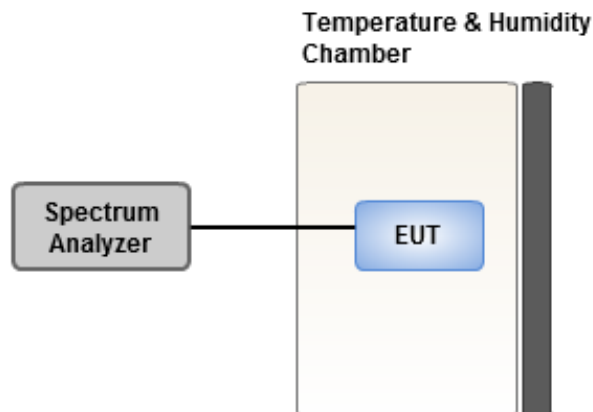

### 3.6.4 Test Result of Frequency Stability

<b>Ambient Condition</b>	21-23°C / 63-65%	<b>Tested By</b>	Brad Wu
--------------------------	------------------	------------------	---------

Frequency: 5300 MHz	Frequency Drift (ppm)				
	Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax		-2.78	-2.55	-3.43	-3.06
T20°C Vmin		-3.53	-2.49	-2.85	-2.91
T60°C Vnom		-3.25	-3.92	-2.96	-3.87
T50°C Vnom		-3.28	-3.75	-4.14	-4.55
T40°C Vnom		-3.37	-3.52	-3.08	-2.32
T30°C Vnom		-3.28	-3.23	-3.94	-3.02
T20°C Vnom		-3.69	-3.16	-3.87	-3.44
T10°C Vnom		-4.41	-4.39	-3.16	-3.40
T0°C Vnom		-2.95	-2.75	-2.97	-2.71
T-10°C Vnom		-2.16	-1.88	-2.48	-2.21
T-20°C Vnom		-2.67	-1.77	-2.10	-1.94
T-30°C Vnom		-3.96	-3.76	-3.66	-3.76
Vnom [V]: 120		Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20		Tmax [°C]: 60		Tmin [°C]: -30	

Frequency: 5580 MHz	Frequency Drift (ppm)				
	Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax		-4.27	-3.06	-3.57	-3.59
T20°C Vmin		-3.15	-3.52	-3.34	-2.78
T60°C Vnom		-3.75	-3.61	-3.72	-3.67
T50°C Vnom		-3.95	-4.29	-3.84	-3.72
T40°C Vnom		-2.72	-2.54	-3.51	-3.02
T30°C Vnom		-3.66	-3.84	-4.02	-4.15
T20°C Vnom		-2.72	-3.18	-3.41	-2.67
T10°C Vnom		-3.54	-4.35	-3.72	-3.48
T0°C Vnom		-3.07	-2.63	-3.32	-2.90
T-10°C Vnom		-2.37	-3.18	-3.36	-2.70
T-20°C Vnom		-3.92	-3.10	-3.88	-3.57
T-30°C Vnom		-4.12	-3.21	-3.10	-3.47
Vnom [V]: 120		Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20		Tmax [°C]: 60		Tmin [°C]: -30	



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==