



Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China

Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



## FCC REPORT

Report Reference No..... : **TRE1608014604** R/C.....: 11399

FCC ID..... : **2AASJSMD-4026B**

Applicant's name..... : **Daewoo International Corp.**

Address.....: 84-11, Namdaemunno 5-ga, Jung-gu, Seoul 100-753 Korea

Manufacturer.....: SGMC Co., Ltd.

Address.....: 5F Media Tower, 108-9 Sungsan 1-dong, Mapo-gu, Seoul 121-844 Korea

Test item description ..... : **Mobile Phone**

Trade Mark .....: DAEWOO

Model/Type reference.....: SMD-4026B

Listed Model(s) .....: -

Standard ..... : **47 CFR FCC Part 15 Subpart B - Unintentional Radiators**  
**ANSI C63.4: 2014**

Date of receipt of test sample.....: Aug.22, 2016

Date of testing.....: Aug.23, 2016 ~ Aug.31, 2016

Date of issue.....: Sep.01, 2016

**Result.....: Pass**

Compiled by

( position+printed name+signature)..: File administrators Candy Liu

Supervised by

( position+printed name+signature)..: Project Engineer Lion Cai

Approved by

( position+printed name+signature)..: RF Manager Hans Hu

Testing Laboratory Name ..... : **Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely corresponds to the test sample.*

*It is not permitted to copy extracts of these test result without the written permission of the test laboratory.*

## Contents

<u>1.</u>	<u>TEST STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Test Description	3
<u>2.</u>	<u>SUMMARY</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	EUT operation mode	5
2.4.	EUT configuration	5
2.5.	Configuration of Tested System	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Statement of the measurement uncertainty	8
3.5.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Conducted Emissions Test	9
4.2.	Radiated Emission Test	12
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>16</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>17</u>

## 1. TEST STANDARDS AND TEST DESCRIPTION

### 1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B - Unintentional Radiators](#)

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

### 1.2. Test Description

ReportSection	Test Item	FCC Rule	Result
4.1	Conducted Emissions Test	15.107	Pass
4.2	Radiated Emission Test	15.109	Pass

## 2. SUMMARY

### 2.1. Client Information

Applicant:	Daewoo International Corp.
Address:	84-11, Namdaemunno 5-ga, Jung-gu, Seoul 100-753 Korea
Manufacturer:	SGMC Co., Ltd.
Address:	5F Media Tower, 108-9 Sungsan 1-dong, Mapo-gu, Seoul 121-844 Korea

### 2.2. Product Description

Name of EUT	Mobile Phone
Trade Mark:	DAEWOOD
Model No.:	SMD-4026B
Listed Model(s):	-
IMEI 1:	357600062700188
IMEI 2:	357600062700196
Power supply:	DC 3.7V From internal battery
Adapter information:	Model: SMD-4026B Input:AC 100-240V,50/60Hz,150mA Output: 5Vd.c.,500mA

### 2.3. EUT operation mode

Test mode	Playing Video	PC Data Transfer	Camera
1	■		
2		■	
3			■

Note:

1. ■ is operation mode.

Pre-scan above all test mode, found below test mode which it was worse case mode.

Test item	Test mode (Worse case mode)
Conducted emission	Mode 2
Radiated emission	Mode 2

### 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:


● - supplied by the manufacturer

○ - supplied by the lab

	Length (m) :	/
	Shield :	/
	Detachable :	/
	Manufacturer :	/
	Model No. :	/

## 2.5. Configuration of Tested System

**Configuration of Tested System**

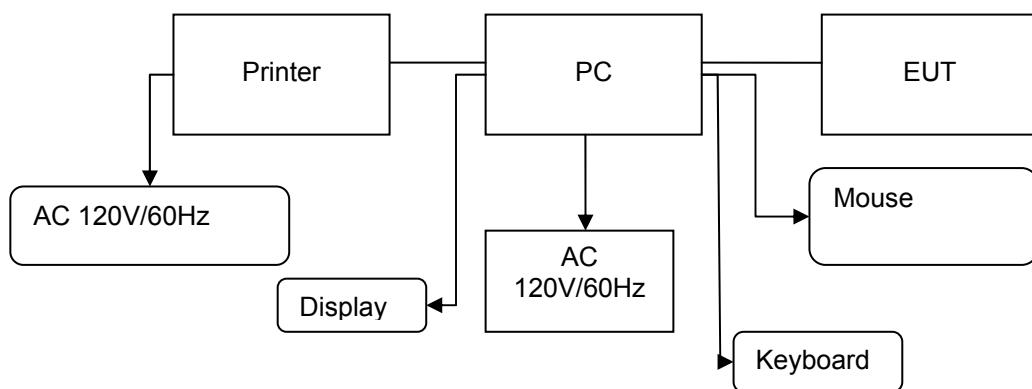

**Equipment Used in Tested System**

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/unshielded	Notes
1	PC	DELL	DIMEN SION E520	1RNN42X	/	/	DOC
2	Printer	ESPOn	C3990	C3990A	/	/	DOC
3	Mouse	DELL	MO56U OA	G0E02SY7	1.00m	unshielded	DOC
4	Display	DELL	1707FPt	CN-OFC237-71618- 65G-AAKC	/	/	DOC
5	Keyboard	DELL	L100	CNRH65665890726 009L	/	/	DOC
6	USB Cable (EUT to PC)	ITALCOM GROUP	USB 2.0	N/A	0.80m	unshielded	N/A
7	USB Cable (Printer to PC)	Genshuo	USB 2.0	N/A	1.20m	unshielded	N/A
8	Power line	/	/	N/A	1.00m	unshielded	N/A

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.  
Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China  
Phone: 86-755-26748019 Fax: 86-755-26748089

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

##### **A2LA-Lab Cert. No. 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

##### **FCC-Registration No.: 317478**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

##### **IC-Registration No.: 5377A&5377B**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec. 03, 2014, valid time is until Dec. 03, 2017.

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **VCCI**

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

##### **DNV**

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

### 3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.24 dB	(1)
Radiated Emission	1~18GHz	5.16 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.39 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.5. Equipments Used during the Test

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCI	100106	2015/11/2
2	ARTIFICIAL MAINS	Rohde & Schwarz	ESH2-Z5	100028	2015/11/2
3	PULSE LIMITER	Rohde & Schwarz	ESHSZ2	100044	2015/11/2
4	EMI TEST SOFTWARE	Rohde & Schwarz	ES-K1	N/A	N/A


Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ShwarzBeck	VULB9163	538	2015/11/2
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2015/11/2
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	MATURO	TT2.0	----	N/A
5	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
6	EMI TEST Software	Rohde & Schwarz	ESK1	N/A	N/A
7	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/2
8	Amplifier	Sonoma	310N	E009-13	2015/11/2
9	JS amplifier	Rohde & Schwarz	JS4-00101800-28-5A	F201504	2015/11/2
11	TURNTABLE	ETS	2088	2149	N/A
12	ANTENNA MAST	ETS	2075	2346	N/A
13	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2015/11/2

The calibration interval was one year.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

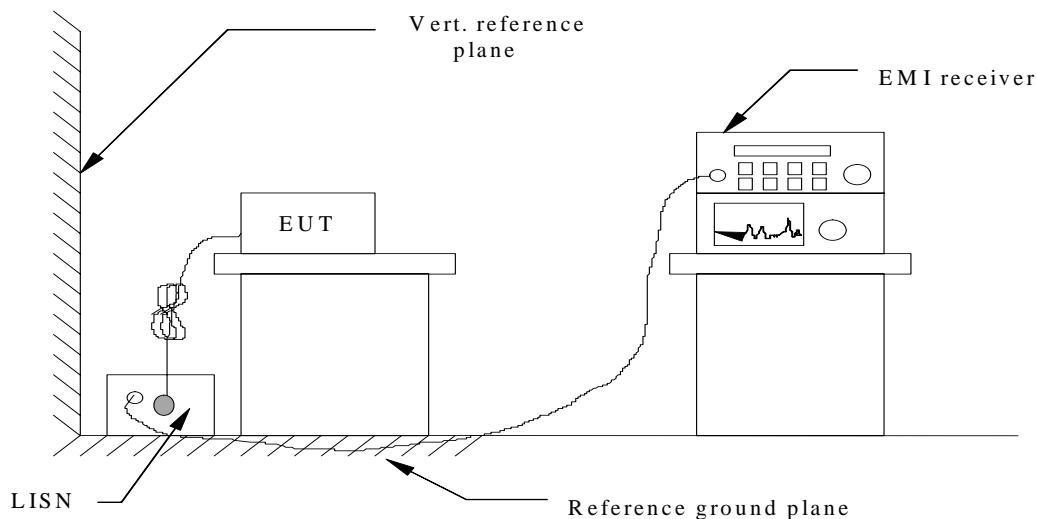

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2014.
2. Support equipment, if needed, was placed as per ANSI C63.4-2014.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2014.
4. The EUT received DC 5.0 from USB powered from AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


#### CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

#### TEST RESULTS

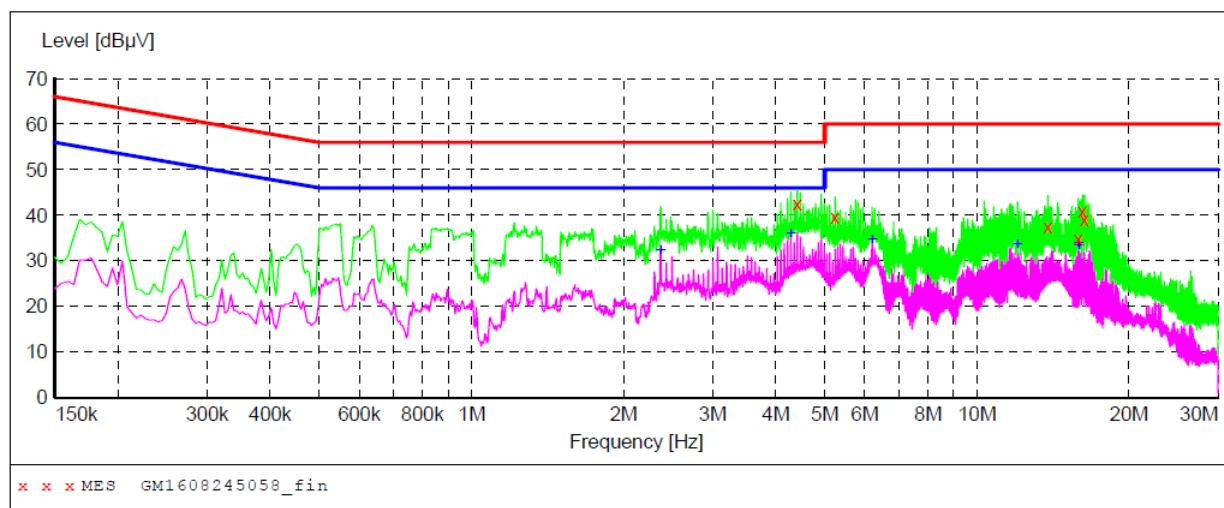

**MEASUREMENT RESULT: "GM1608245058\_fin"**


8/24/2016 5:27PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
4.416000	42.50	10.4	56	13.5	QP	L1	GND
5.244000	39.60	10.5	60	20.4	QP	L1	GND
13.821000	37.40	10.7	60	22.6	QP	L1	GND
15.873000	35.00	10.7	60	25.0	QP	L1	GND
16.188000	41.00	10.7	60	19.0	QP	L1	GND
16.318500	39.20	10.7	60	20.8	QP	L1	GND

**MEASUREMENT RESULT: "GM1608245058\_fin2"**

8/24/2016 5:27PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
2.368500	32.20	10.3	46	13.8	AV	L1	GND
4.285500	35.90	10.4	46	10.1	AV	L1	GND
6.207000	34.50	10.5	50	15.5	AV	L1	GND
12.030000	33.60	10.7	50	16.4	AV	L1	GND
15.868500	33.80	10.7	50	16.2	AV	L1	GND
15.931500	33.40	10.7	50	16.6	AV	L1	GND

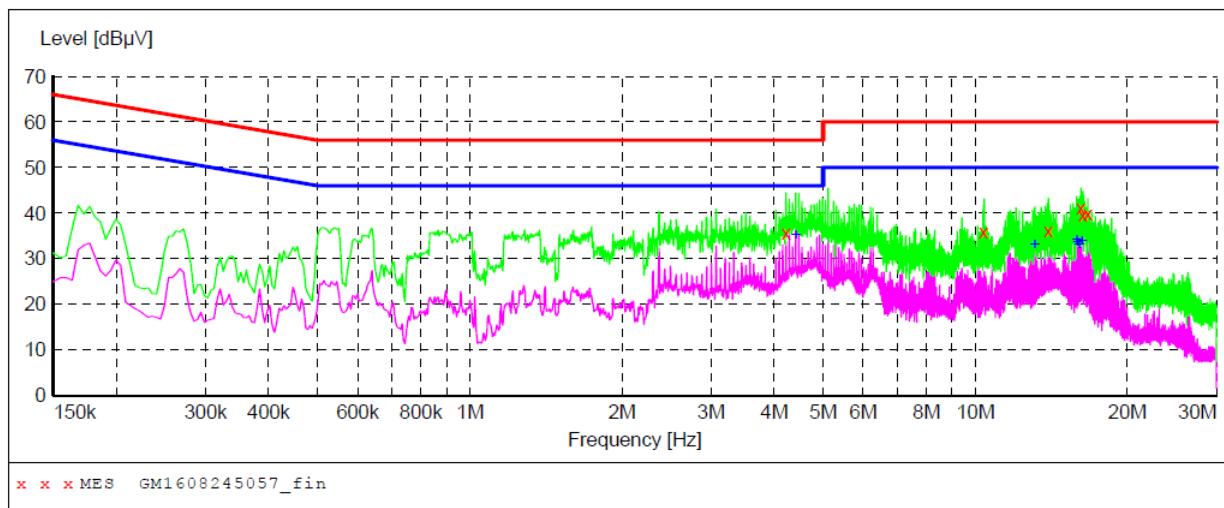

**MEASUREMENT RESULT: "GM1608245057\_fin"**

8/24/2016 5:25PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
4.227000	35.60	10.4	56	20.4	QP	N	GND
10.392000	36.00	10.7	60	24.0	QP	N	GND
13.951500	36.10	10.7	60	23.9	QP	N	GND
16.188000	41.30	10.7	60	18.7	QP	N	GND
16.318500	39.60	10.7	60	20.4	QP	N	GND
16.701000	39.80	10.7	60	20.2	QP	N	GND

**MEASUREMENT RESULT: "GM1608245057\_fin2"**

8/24/2016 5:25PM


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
4.416000	35.10	10.4	46	10.9	AV	N	GND
13.114500	32.90	10.7	50	17.1	AV	N	GND
15.868500	34.10	10.7	50	15.9	AV	N	GND
15.931500	33.60	10.7	50	16.4	AV	N	GND
16.057500	32.90	10.7	50	17.1	AV	N	GND
16.251000	33.80	10.7	50	16.2	AV	N	GND

Remark: Transd=Cable loss+ PULSE LIMITER factor+ ARTIFICIAL MAINS factor; Margin= Limit -Level


## 4.2. Radiated Emission Test

### TEST CONFIGURATION

a) Radiated Emission Test Set-Up, Frequency below 1000MHz

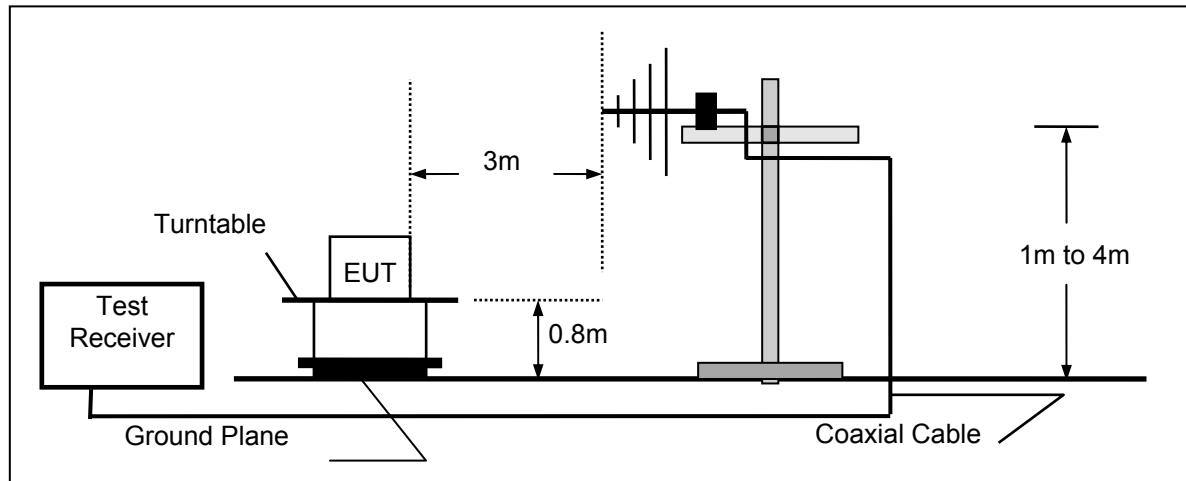

b) Radiated Emission Test Set-Up, Frequency above 1000MHz

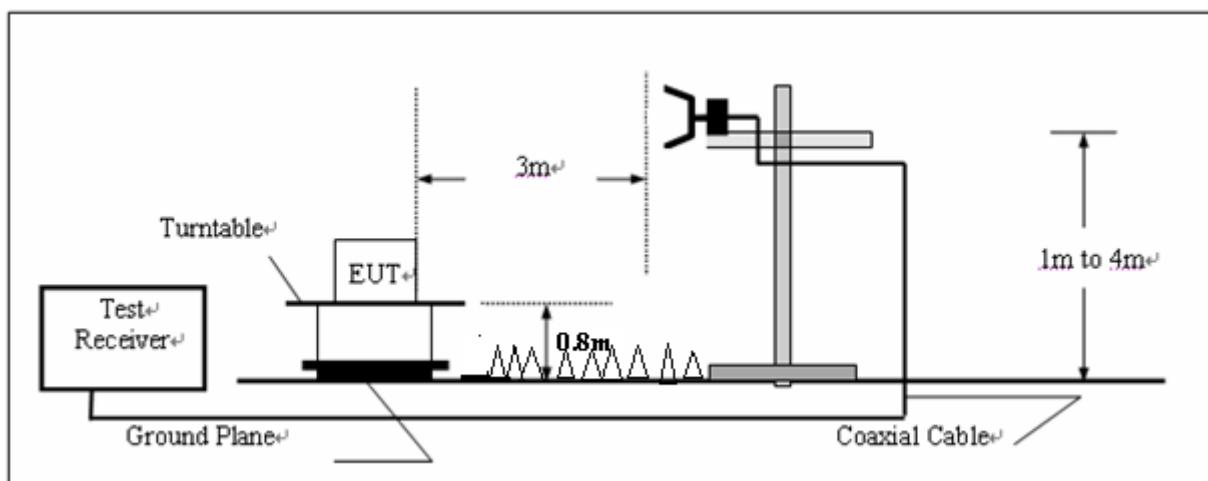

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

## FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CL - AG}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$


## RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

**TEST RESULTS**

Below1GHz  
HORIZONTAL

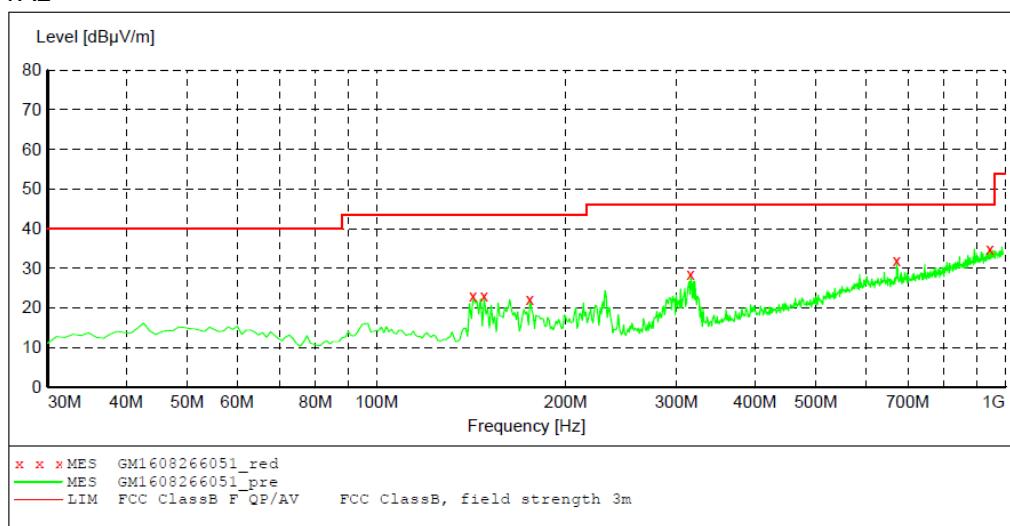
**MEASUREMENT RESULT: "GM1608266051\_red"**

8/26/2016 1:18PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB		cm	deg	
	142.520000	22.90	-18.2	43.5	20.6	QP	300.0	15.00	HORIZONTAL
	148.340000	23.00	-17.9	43.5	20.5	QP	300.0	39.00	HORIZONTAL
	175.500000	22.30	-16.1	43.5	21.2	QP	100.0	191.00	HORIZONTAL
	316.150000	28.40	-13.2	46.0	17.6	QP	100.0	155.00	HORIZONTAL
	672.140000	32.10	-2.0	46.0	13.9	QP	100.0	63.00	HORIZONTAL
	945.680000	34.90	3.6	46.0	11.1	QP	300.0	263.00	HORIZONTAL

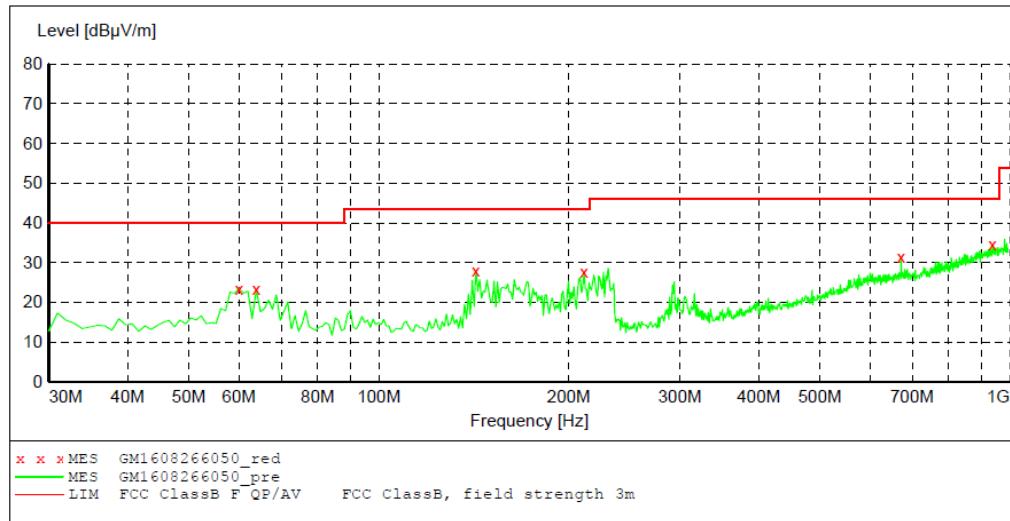**VERTICAL****MEASUREMENT RESULT: "GM1608266050\_red"**


8/26/2016 1:15PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB		cm	deg	
	60.070000	23.40	-14.9	40.0	16.6	QP	100.0	0.00	VERTICAL
	63.950000	23.20	-15.7	40.0	16.8	QP	100.0	237.00	VERTICAL
	142.520000	28.00	-18.2	43.5	15.5	QP	100.0	226.00	VERTICAL
	211.390000	27.50	-14.1	43.5	16.0	QP	100.0	190.00	VERTICAL
	672.140000	31.50	-2.0	46.0	14.5	QP	100.0	258.00	VERTICAL
	938.890000	34.50	3.5	46.0	11.5	QP	100.0	190.00	VERTICAL

Remark:Transd=Cable loss+ Antenna factor- Pre-amplifier;Margin=Limit -Level

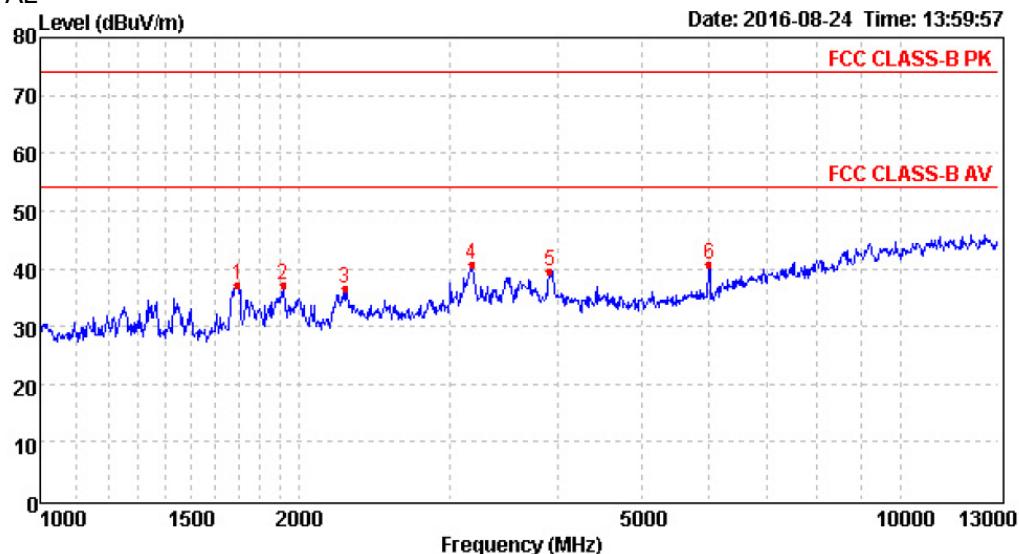Above 1GHz  
HORIZONTAL

Mark	Freq MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1696.18	43.36	25.30	5.59	37.01	37.24	74.00	-36.76	Peak
2	1918.41	42.54	25.89	6.01	37.19	37.25	74.00	-36.75	Peak
3	2260.65	40.43	27.08	6.60	37.47	36.64	74.00	-37.36	Peak
4	3171.57	41.61	28.57	8.41	37.99	40.60	74.00	-33.40	Peak
5	3913.97	39.69	29.36	8.64	37.99	39.70	74.00	-34.30	Peak
6	5991.46	35.76	33.17	9.76	37.91	40.78	74.00	-33.22	Peak

## VERTICAL

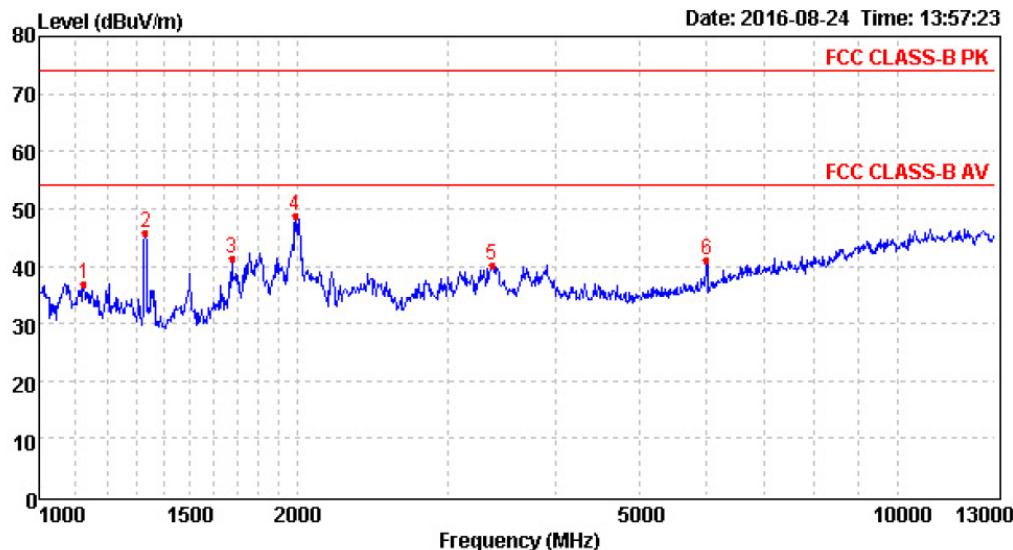

Mark	Freq MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1128.12	44.70	24.35	4.35	36.42	36.98	74.00	-37.02	Peak
2	1329.38	53.10	24.55	4.82	36.66	45.81	74.00	-28.19	Peak
3	1678.87	47.67	25.25	5.56	37.00	41.48	74.00	-32.52	Peak
4	1988.55	53.69	26.07	6.14	37.24	48.66	74.00	-25.34	Peak
5	3372.94	40.72	28.65	8.66	37.99	40.04	74.00	-33.96	Peak
6	5991.46	36.15	33.17	9.76	37.91	41.17	74.00	-32.83	Peak

Remark:Level=Reading+ Antenna factor+cable loss- Pre-amplifier; Margin= Level- Limit

## 5. Test Setup Photos of the EUT


Conducted Emission PC Data Transfer



Radiated Emission (30MHz-1GHz) PC Data Transfer



Radiated Emission (above 1GHz) PC Data Transfer

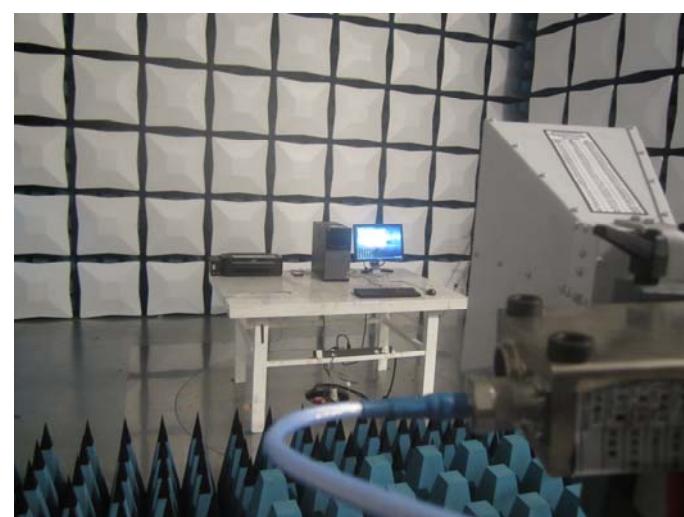

## **6. External and Internal Photos of the EUT**

Reference to the test report No. TRE168014601

.....End of Report.....