

# TEST REPORT

**Product Name** : Wi-Fi/BT Module  
**Brand Mark** : FN-LINK  
**Model No.** : 6222D-UUC  
**FCC ID** : 2AATL-6222D-UUC  
**Report Number** : BLA-EMC-202103-A7003  
**Date of Sample Receipt** : 2021/3/19  
**Date of Test** : 2021/3/19 to 2021/4/7  
**Date of Issue** : 2021/4/7  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**HUNAN FN-LINK TECHNOLOGY LIMITED**

**No.8, Litong Road, Liuyang Economic & Technical Development Zone,  
Changsha, Hunan, CHINA**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,  
Shenzhen, Guangdong Province, China**

**TEL: +86-755-23059481**

Compiled by:

*Ben Zang*

Review by:

*Sweet. Liang*

Approved by:

*Jamen Li*

Date: 2021/4/7



**REPORT REVISE RECORD**

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	2021/4/7	Original

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>5</b>
<b>2</b>	<b>GENERAL INFORMATION .....</b>	<b>6</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T. ....</b>	<b>6</b>
<b>4</b>	<b>BLOCK DIAGRAM OF EUT CONNECTION .....</b>	<b>6</b>
<b>5</b>	<b>TEST ENVIRONMENT .....</b>	<b>7</b>
<b>6</b>	<b>TEST MODE .....</b>	<b>7</b>
<b>7</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>8</b>	<b>DESCRIPTION OF SUPPORT UNIT.....</b>	<b>8</b>
<b>9</b>	<b>LABORATORY LOCATION.....</b>	<b>8</b>
<b>10</b>	<b>TEST INSTRUMENTS LIST .....</b>	<b>9</b>
<b>1</b>	<b>MINIMUM 6DB BANDWIDTH .....</b>	<b>12</b>
1.1	LIMITS .....	12
1.2	BLOCK DIAGRAM OF TEST SETUP .....	12
1.3	TEST DATA .....	12
<b>2</b>	<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....</b>	<b>13</b>
2.1	LIMITS .....	13
2.2	BLOCK DIAGRAM OF TEST SETUP .....	14
2.3	PROCEDURE .....	14
2.4	TEST DATA .....	16
<b>3</b>	<b>CONDUCTED PEAK OUTPUT POWER .....</b>	<b>32</b>
3.1	LIMITS .....	32
3.2	BLOCK DIAGRAM OF TEST SETUP .....	32
3.3	EST DATA .....	32
<b>4</b>	<b>RADIATED SPURIOUS EMISSIONS.....</b>	<b>33</b>
4.1	LIMITS .....	33
4.2	BLOCK DIAGRAM OF TEST SETUP .....	34
4.3	PROCEDURE .....	34
4.4	TEST DATA .....	36
<b>5</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>50</b>

5.1	CONCLUSION .....	50
<b>6</b>	<b>CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>51</b>
6.1	LIMITS .....	51
6.2	BLOCK DIAGRAM OF TEST SETUP .....	51
6.3	TEST DATA .....	51
<b>7</b>	<b>POWER SPECTRUM DENSITY.....</b>	<b>52</b>
7.1	LIMITS .....	52
7.2	BLOCK DIAGRAM OF TEST SETUP .....	52
7.3	TEST DATA .....	52
<b>8</b>	<b>APPENDIX.....</b>	<b>53</b>
8.1	MAXIMUM CONDUCTED OUTPUT POWER .....	53
8.2	-6DB BANDWIDTH .....	66
8.3	MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	79
8.4	BAND EDGE .....	92
8.5	CONDUCTED RF SPURIOUS EMISSION .....	109
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....	134
	APPENDIX B: PHOTOGRAPHS OF EUT .....	135

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass


## 2 GENERAL INFORMATION

<b>Applicant</b>	HUNAN FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Manufacturer</b>	HUNAN FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Factory</b>	HUNAN FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Product Name</b>	Wi-Fi/BT Module
<b>Test Model No.</b>	6222D-UUC

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V2.0
<b>Software Version</b>	V2.0
<b>Operation Frequency:</b>	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
<b>Modulation Type:</b>	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
<b>Channel Spacing:</b>	5MHz
<b>Number of Channels:</b>	11
<b>Antenna Type:</b>	External Antenna
<b>Antenna Gain:</b>	2.5dBi(Provided by customer)

## 4 BLOCK DIAGRAM OF EUT CONNECTION

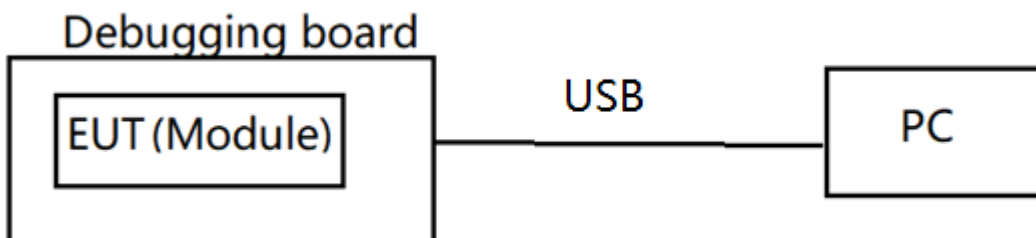

## 5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.3V

## 6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation

Remark: Only the data of the worst mode would be recorded in this report.

## 7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

## 8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

## 9 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co., Ltd.  
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,  
China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.



## 10 TEST INSTRUMENTS LIST

Test Equipment Of Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Radiated Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

**Test Equipment Of Conducted Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11

Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

**Test Equipment Of Power Spectrum Density**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11


## 1 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	60%

### 1.1 LIMITS

<b>Limit:</b>	≥500 kHz
---------------	----------

### 1.2 BLOCK DIAGRAM OF TEST SETUP

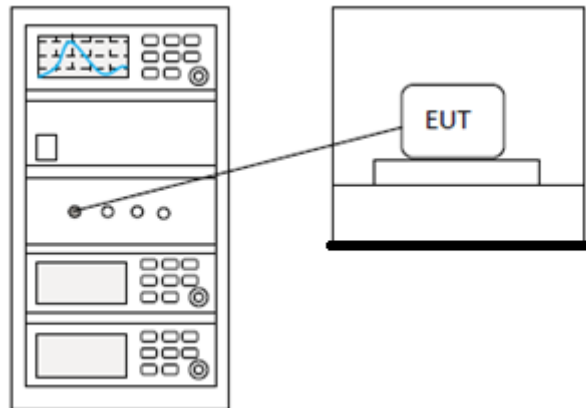

### 1.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

## 2 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX Low channel;TX high channel
<b>Test Mode (Final Test)</b>	TX Low channel;TX high channel
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 2.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 2.2 BLOCK DIAGRAM OF TEST SETUP

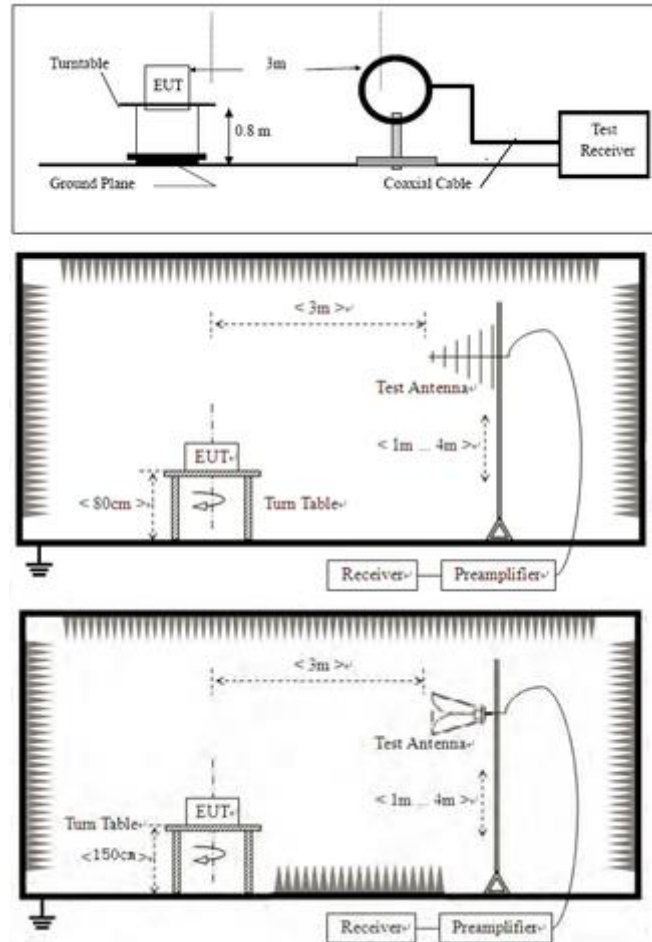

## 2.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

## 2.4 TEST DATA

Remark: In SISO mode, The pre-test were performed on Antenna1 and Antenna2 frequencies, only the worst case's (Antenna1) data was showed.

[Test Moed: TX Low channel] ;[Polarity: Horizontal]

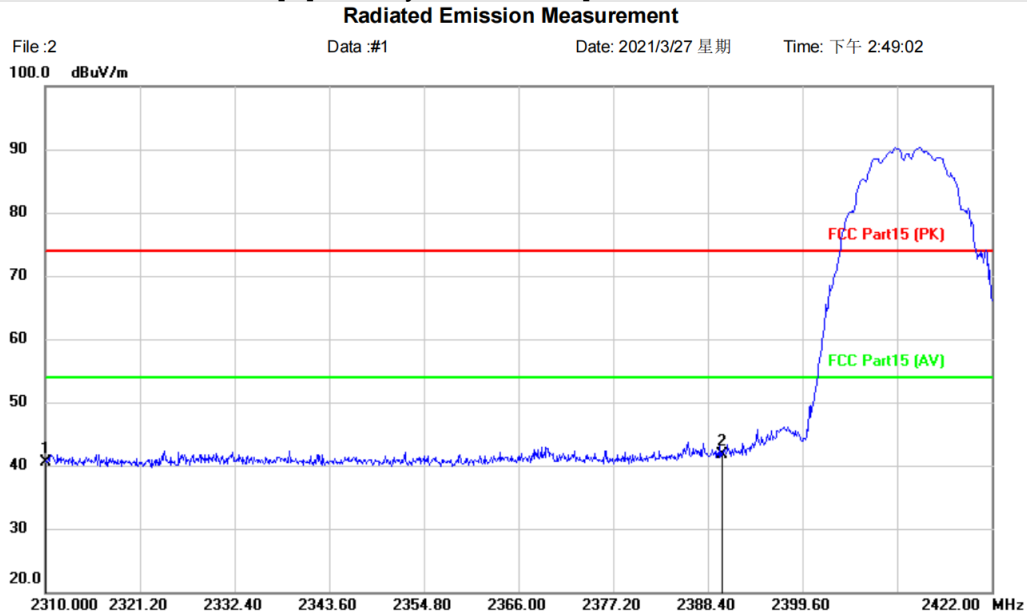

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11b-2412-ant1		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.20	-4.61	40.59	74.00	-33.41	peak		
2	*	2390.000	45.95	-4.27	41.68	74.00	-32.32	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only


## Test Result:





[Test Moed: TX high channel] ; [Polarity: Horizontal]

**Radiated Emission Measurement**

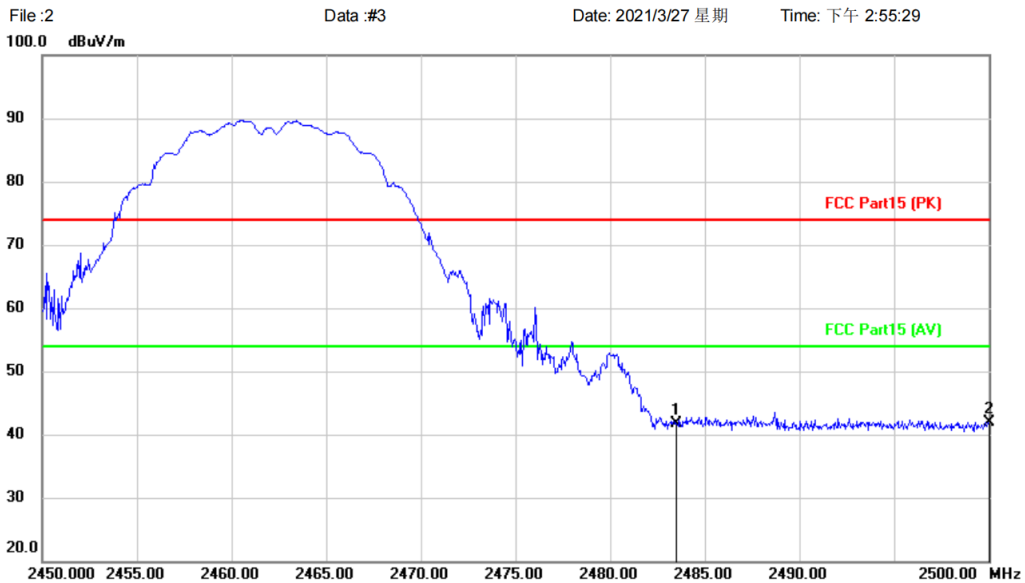

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11b-2462-ant1		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	45.57	-3.84	41.73	74.00	-32.27	peak		
2	*	2500.000	45.59	-3.78	41.81	74.00	-32.19	peak		


\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result:**

[Test Moed: TX high channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

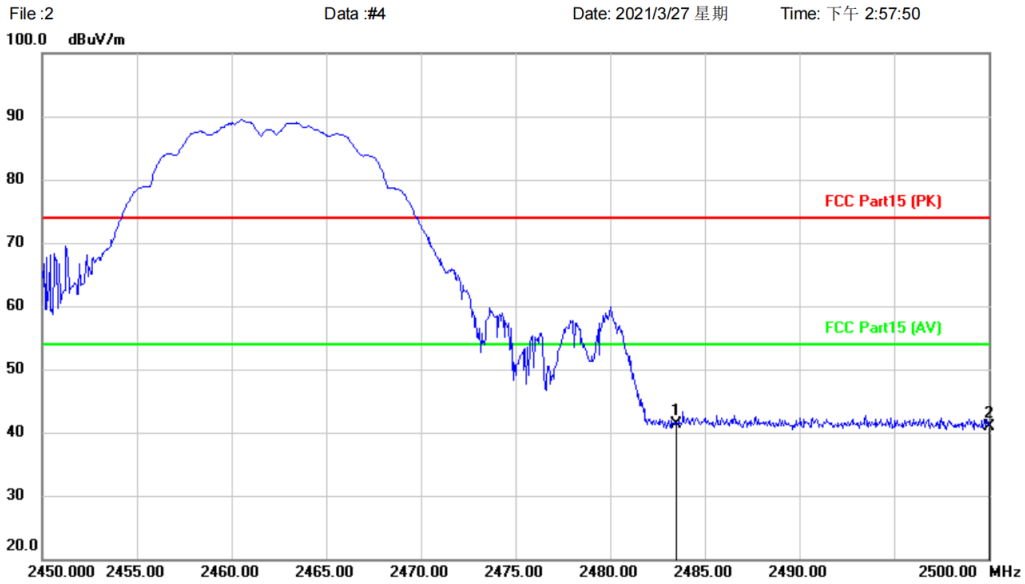

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11b-2462-ant1		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	45.20	-3.84	41.36	74.00	-32.64	peak			
2		2500.000	44.65	-3.78	40.87	74.00	-33.13	peak			

\*:Maximum data    x:Over limit    !:over margin                      <Reference Only

**Test Result:**

[Test Moed: TX Low channel] ; [Polarity: Horizontal]

**Radiated Emission Measurement**

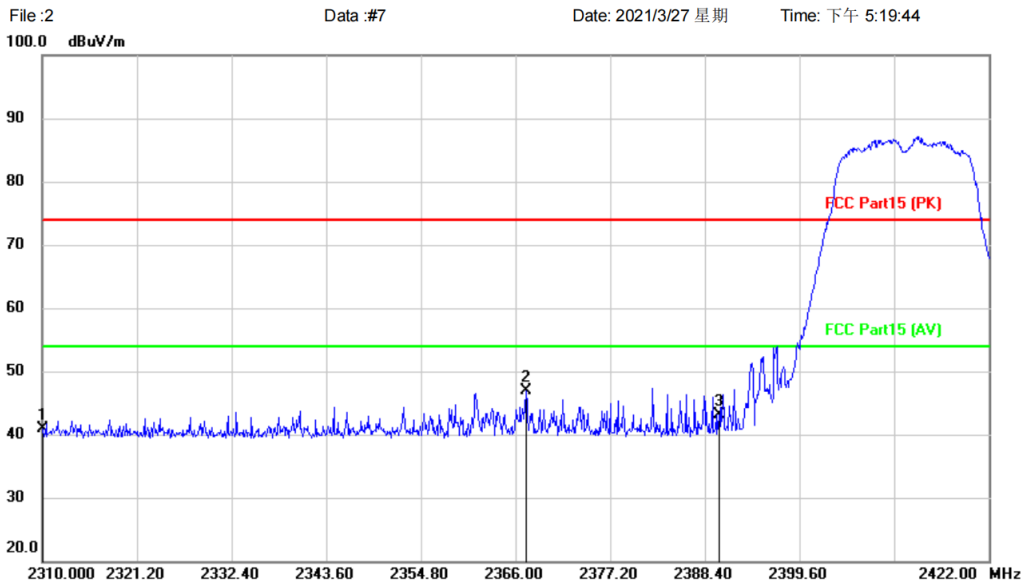

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11g-2412-ant1		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.53	-4.61	40.92	74.00	-33.08			peak
2	*	2367.232	51.21	-4.37	46.84	74.00	-27.16			peak
3		2390.000	47.40	-4.27	43.13	74.00	-30.87			peak

\*:Maximum data    x:Over limit    !:over margin      <Reference Only

**Test Result:**

[Test Moed: TX Low channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

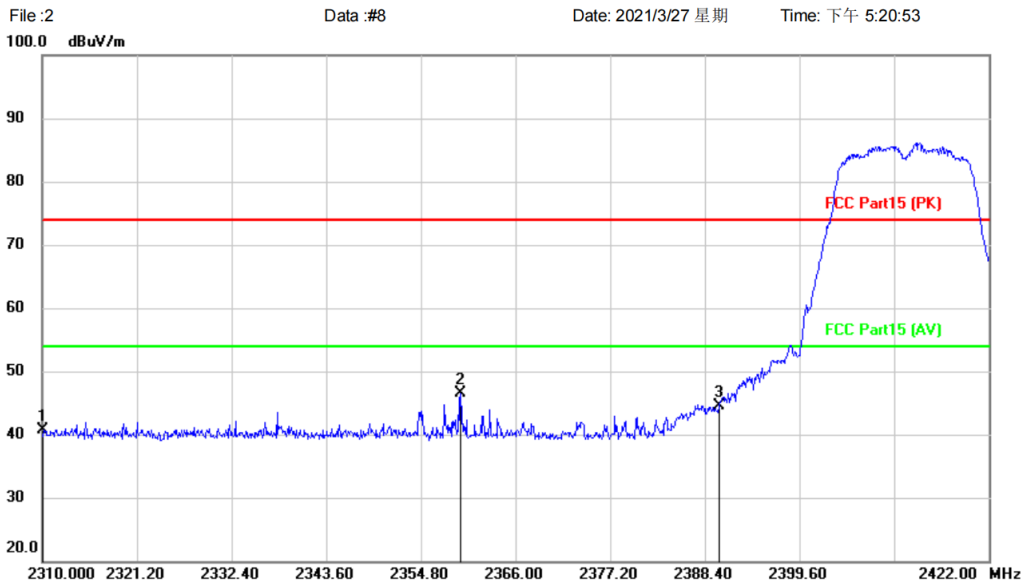

Site Polarization: **Vertical** Temperature:  
 Limit: FCC Part15 (PK) Power: Humidity: %  
 EUT: True Wireless Earbuds Distance: 3m  
 M/N: 6222D-UUC  
 Mode: 802.11g-2412-ant1  
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.36	-4.61	40.75	74.00	-33.25	peak		
2	*	2359.504	50.91	-4.40	46.51	74.00	-27.49	peak		
3		2390.000	48.82	-4.27	44.55	74.00	-29.45	peak		

\*:Maximum data x:Over limit !:over margin <Reference Only

**Test Result:**

[Test Moed: TX high channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

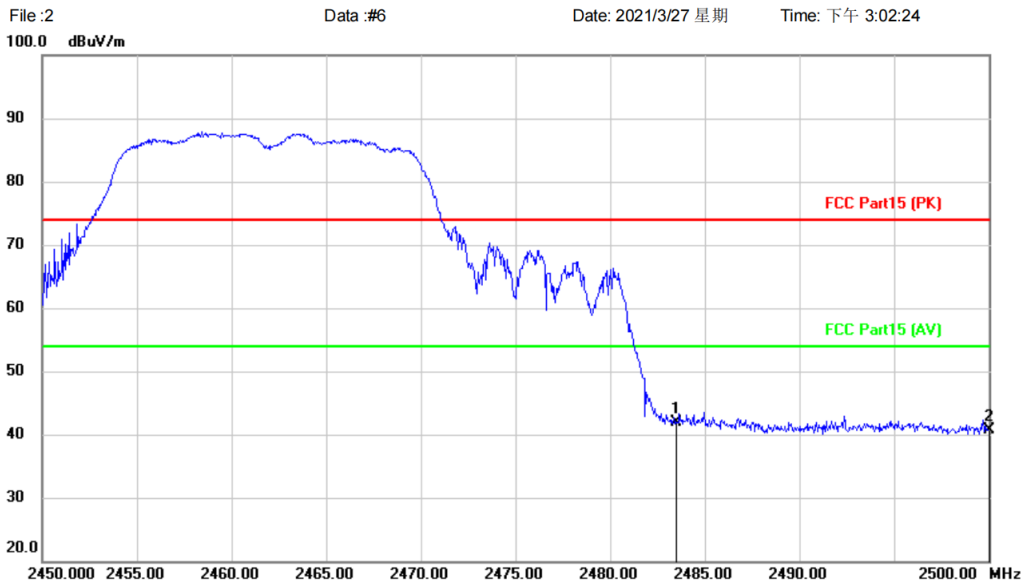

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11g-2462-ant1		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	45.69	-3.84	41.85	74.00	-32.15	peak		
2		2500.000	44.40	-3.78	40.62	74.00	-33.38	peak		


\*:Maximum data    x:Over limit    !:over margin                      <Reference Only

**Test Result:**



MIMO:

[Test Moed: TX Low channel] ; [Polarity: Horizontal]

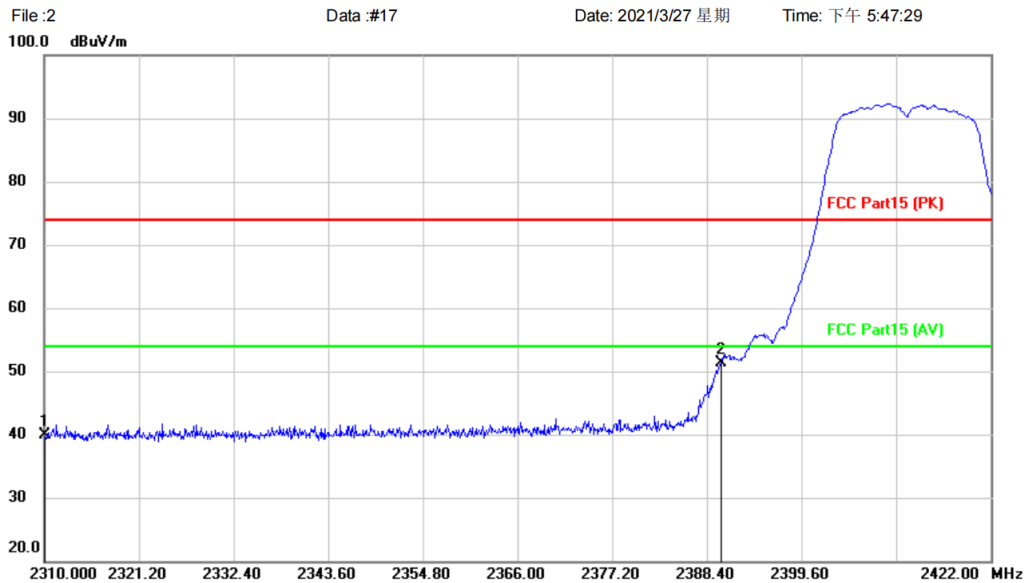**Radiated Emission Measurement**


Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n20-2412-ant1&2		
Note:		

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1		2310.000	44.55	-4.61	39.94	74.00	-34.06	peak		
2	*	2390.000	55.58	-4.27	51.31	74.00	-22.69	peak		


\*:Maximum data    x:Over limit    !:over margin                      <Reference Only

**Test Result:**



[Test Moed: TX Low channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

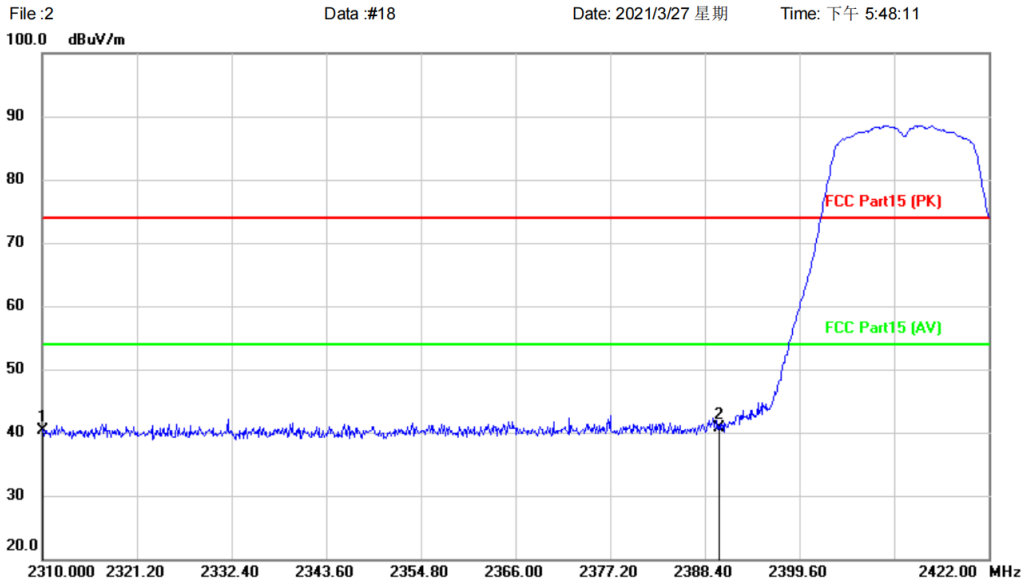

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n20-2412-ant1&2		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	44.81	-4.61	40.20	74.00	-33.80	peak		
2	*	2390.000	45.03	-4.27	40.76	74.00	-33.24	peak		


\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result:**

[Test Moed: TX high channel] ; [Polarity: Horizontal]

**Radiated Emission Measurement**

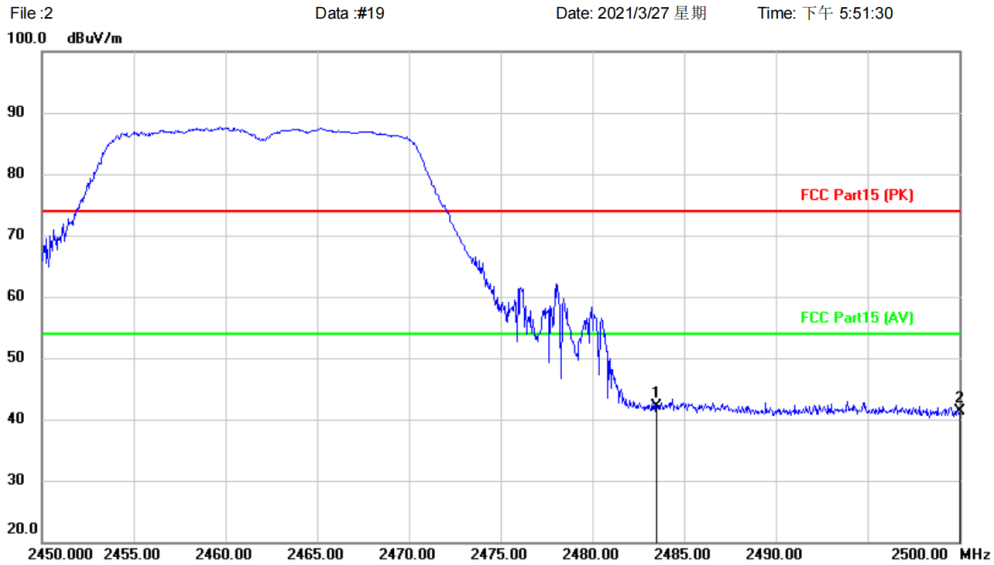

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n20-2462-ant1&2		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	45.89	-3.84	42.05	74.00	-31.95	peak		
2		2500.000	45.15	-3.78	41.37	74.00	-32.63	peak		


\*:Maximum data    x:Over limit    !:over margin                      <Reference Only

**Test Result:**

[Test Moed: TX high channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

File :2    Data :#20    Date: 2021/3/27 星期    Time: 下午 5:52:22

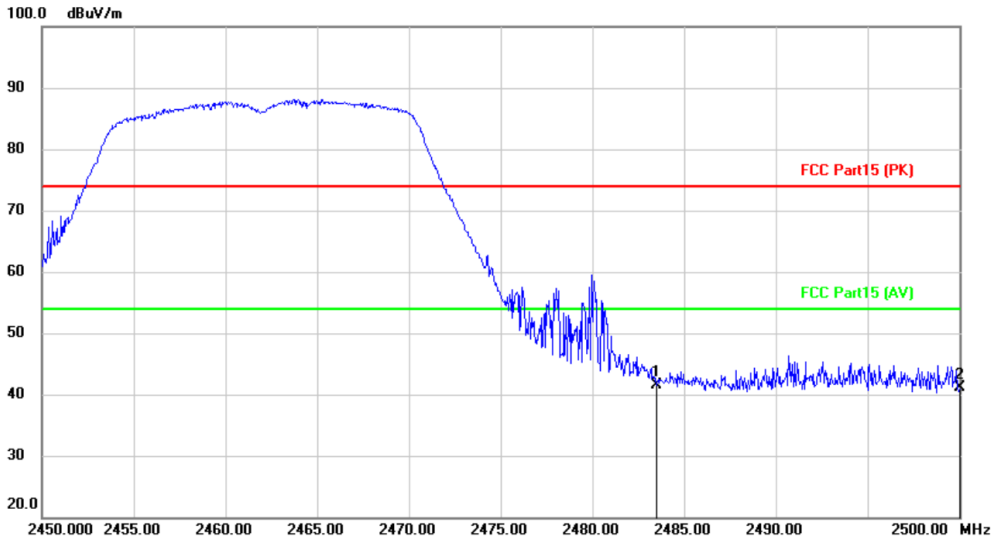


Site	Polarization: <i>Vertical</i>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n20-2462-ant1&2		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	
							Detector	Comment		
1	*	2483.500	45.40	-3.84	41.56	74.00	-32.44	peak		
2		2500.000	44.91	-3.78	41.13	74.00	-32.87	peak		

\*:Maximum data    x:Over limit    !:over margin    <Reference Only

**Test Result:**

[Test Moed: TX Low channel] ; [Polarity: Horizontal]

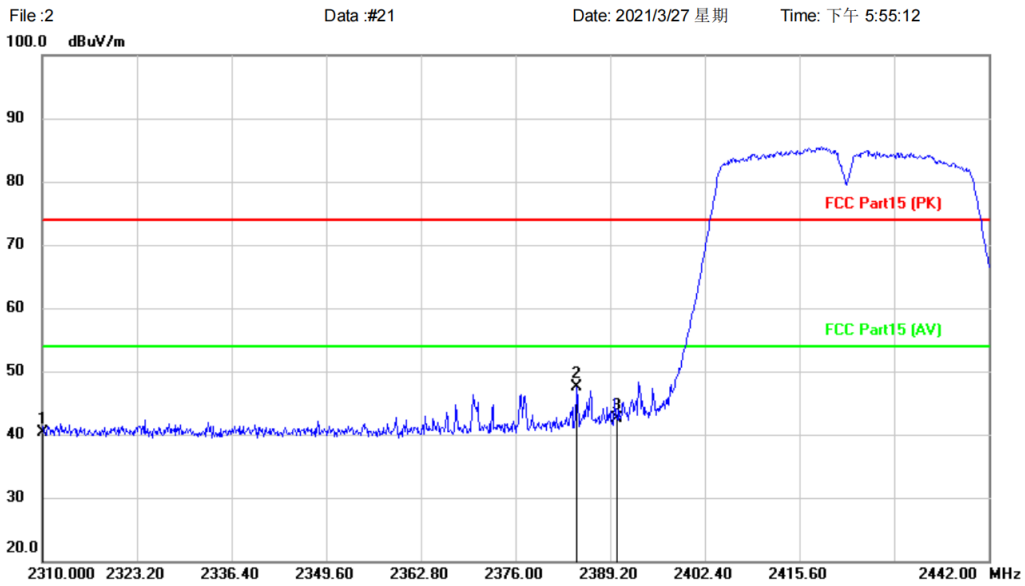**Radiated Emission Measurement**


Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n40-2422-ant1&2		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	44.88	-4.61	40.27	74.00	-33.73	peak		
2	*	2384.580	51.70	-4.29	47.41	74.00	-26.59	peak		
3		2390.000	46.79	-4.27	42.52	74.00	-31.48	peak		


\*:Maximum data    x:Over limit    !:over margin

&lt;Reference Only

**Test Result:**

[Test Moed: TX Low channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

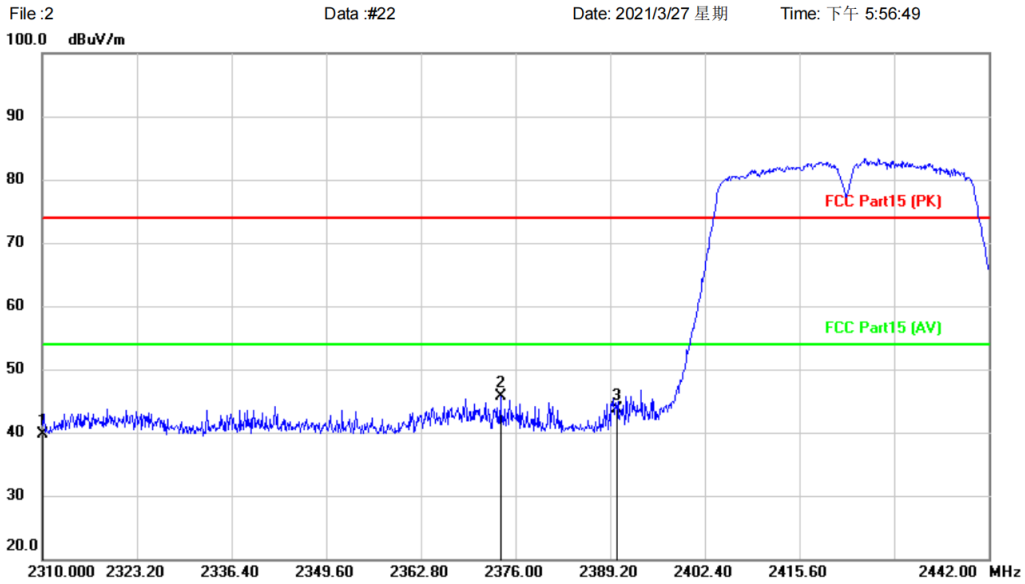

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n40-2422-ant1&2		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2310.000	44.31	-4.61	39.70	74.00	-34.30	peak			
2	*	2373.888	50.08	-4.35	45.73	74.00	-28.27	peak			
3		2390.000	48.05	-4.27	43.78	74.00	-30.22	peak			


\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result:**

[Test Moed: TX high channel] ; [Polarity: Horizontal]

**Radiated Emission Measurement**

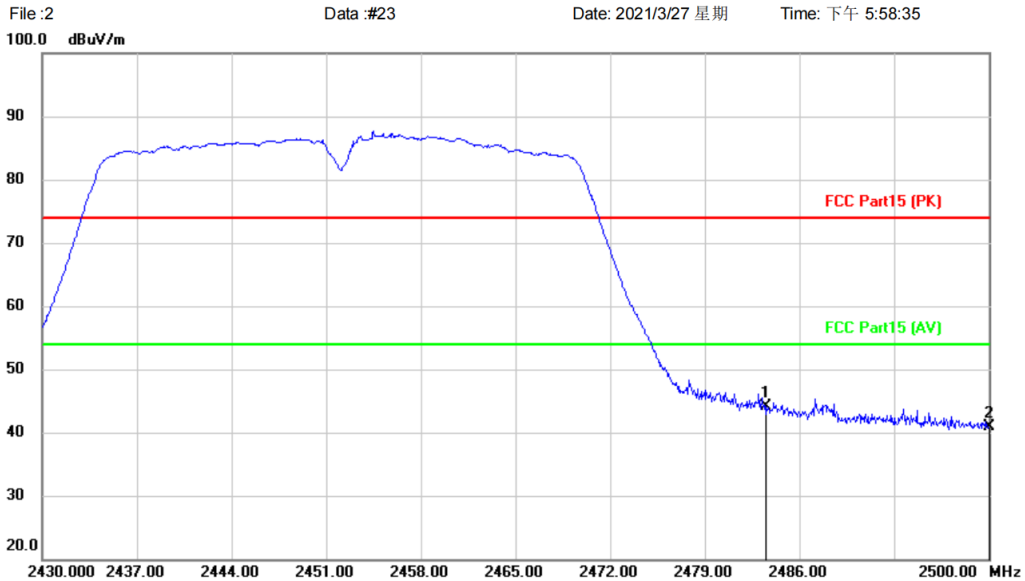

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n40-2452-ant1&2		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	47.87	-3.84	44.03	74.00	-29.97	peak		
2		2500.000	44.63	-3.78	40.85	74.00	-33.15	peak		

\*:Maximum data    x:Over limit    !:over margin                      <Reference Only

**Test Result:**

[Test Moed: TX high channel] ; [Polarity: Vertical]

**Radiated Emission Measurement**

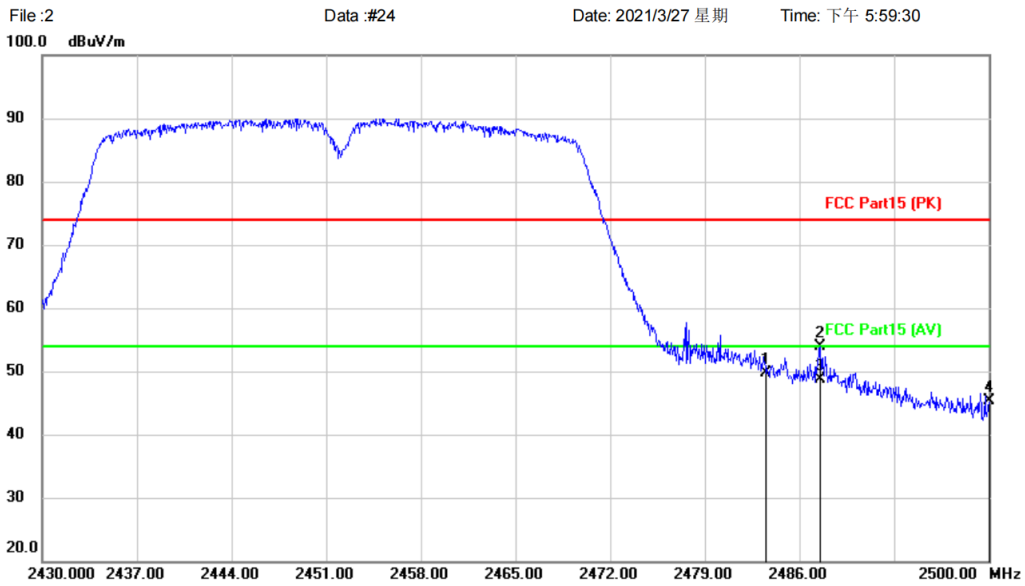

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11n40-2452-ant1&2		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	53.56	-3.84	49.72	74.00	-24.28			peak
2		2487.540	57.70	-3.84	53.86	74.00	-20.14			peak
3	*	2487.540	52.63	-3.84	48.79	54.00	-5.21			AVG
4		2500.000	49.02	-3.78	45.24	74.00	-28.76			peak

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result:**


### 3 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

#### 3.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

#### 3.2 BLOCK DIAGRAM OF TEST SETUP

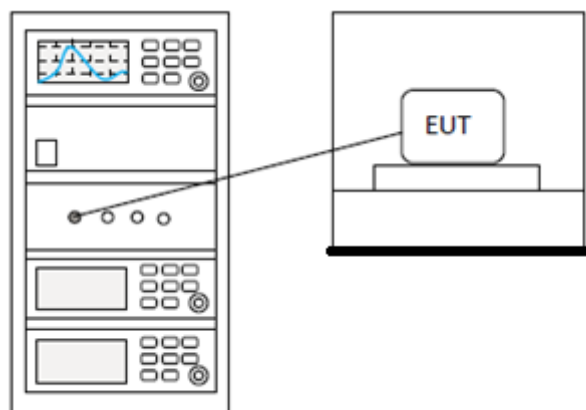

#### 3.3 EST DATA

**Pass: Please Refer To Appendix: For Details**



#### 4 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX mode (SE) below 1G;TX Low channel;TX middle channel;TX high channel
<b>Test Mode (Final Test)</b>	TX mode (SE) below 1G;TX Low channel;TX middle channel;TX high channel
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

##### 4.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 4.2 BLOCK DIAGRAM OF TEST SETUP

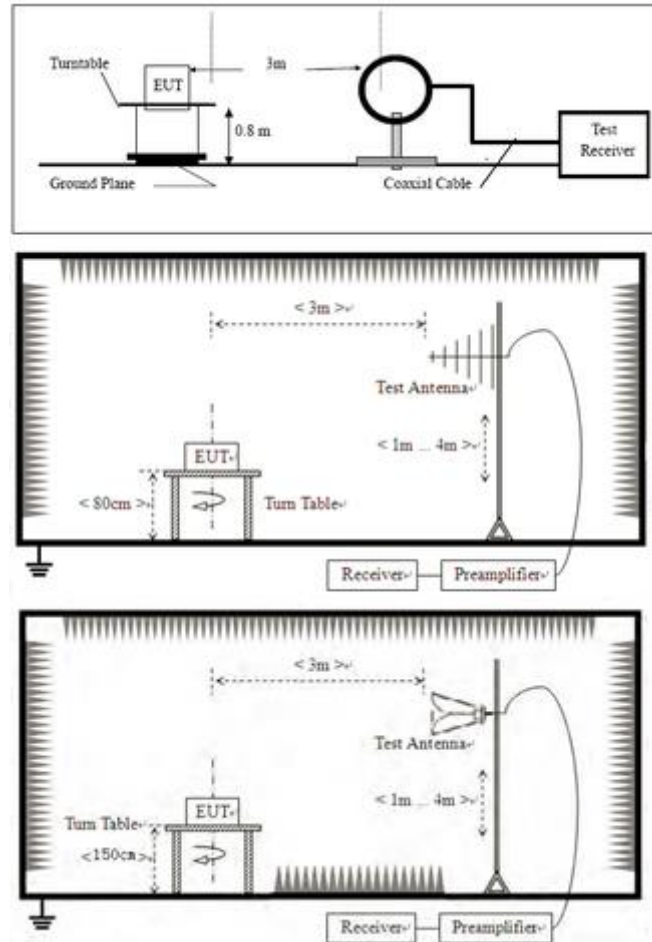

## 4.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

#### 4.4 TEST DATA

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

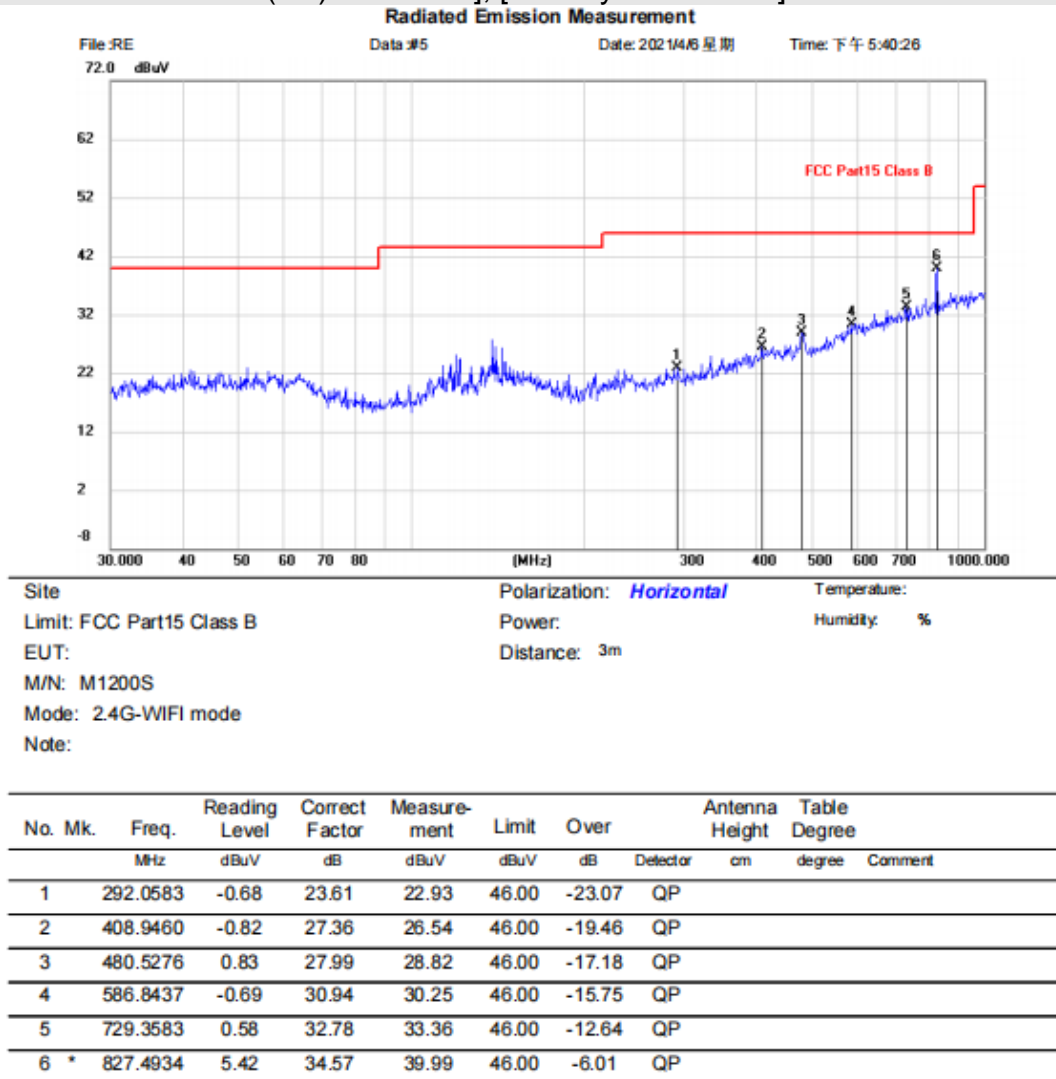


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

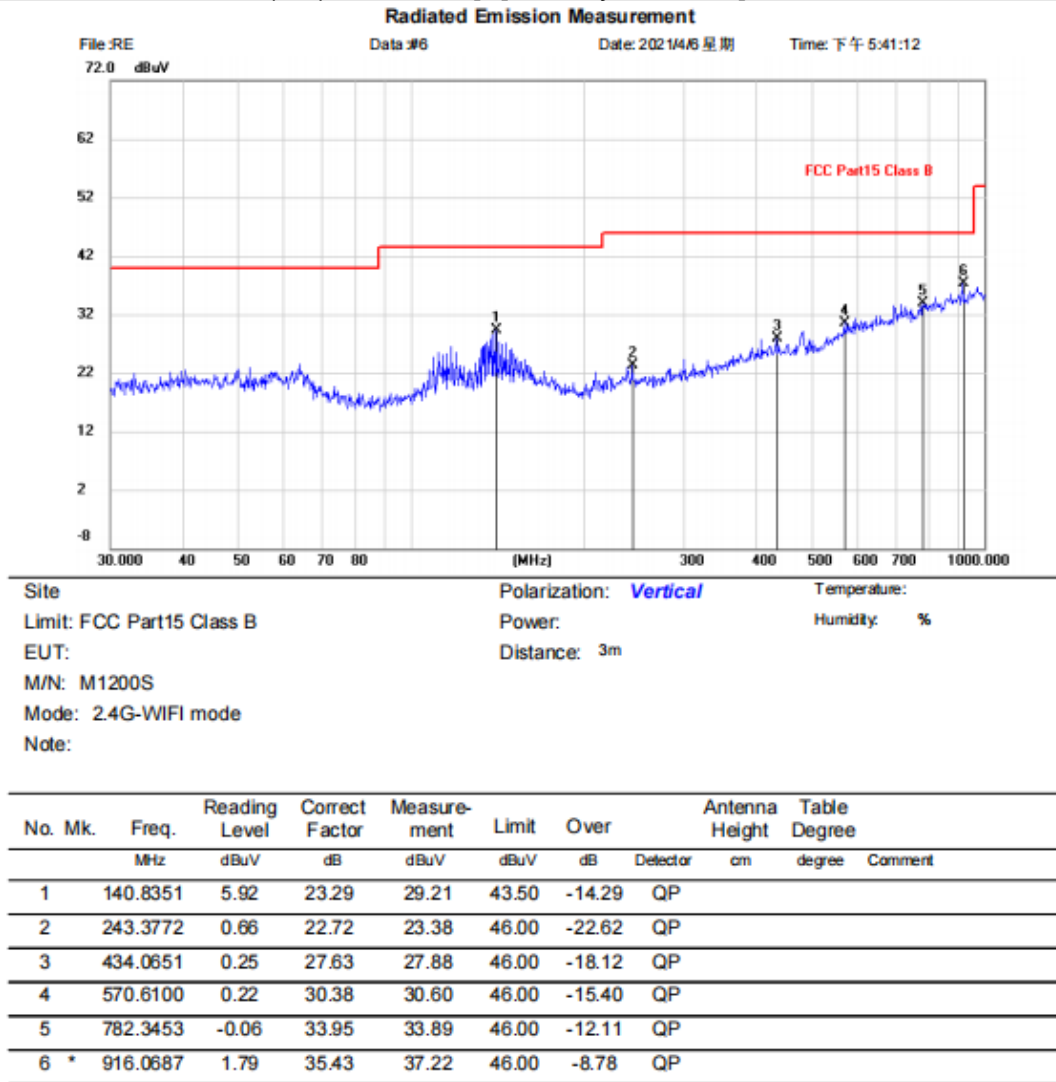

\*:Maximum data    x:Over limit    !:over margin


(Reference Only)

**Test Result: Pass**

Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11b mode which it is worse case.

[TestMode: TX Low channel]; [Polarity: Horizontal]

**Radiated Emission Measurement**

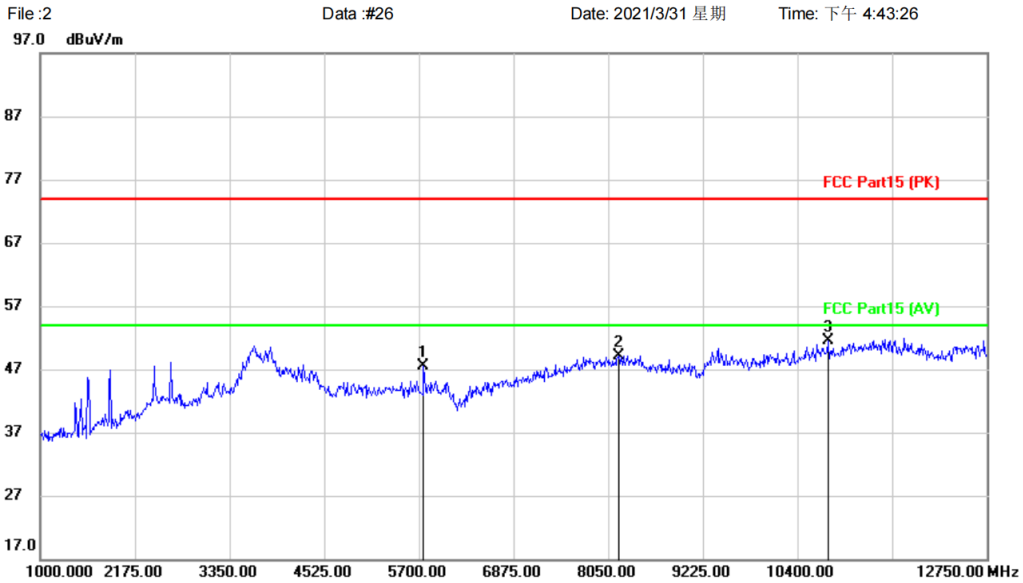

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: True Wireless Earbuds	Distance: 3m	
M/N: 6222D-UUC		
Mode: 802.11b-2412-ant1		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5758.750	43.51	3.92	47.43	74.00	-26.57	peak		
2		8179.250	41.00	8.18	49.18	74.00	-24.82	peak		
3	*	10776.000	39.82	11.70	51.52	74.00	-22.48	peak		

\*:Maximum data    x:Over limit    !:over margin                      <Reference Only

**Test Result: Pass**








[TestMode: TX middle channel]; [Polarity: Vertical]

**Radiated Emission Measurement**

File :2 Data :#28 Date: 2021/3/31 星期 Time: 下午 4:50:47

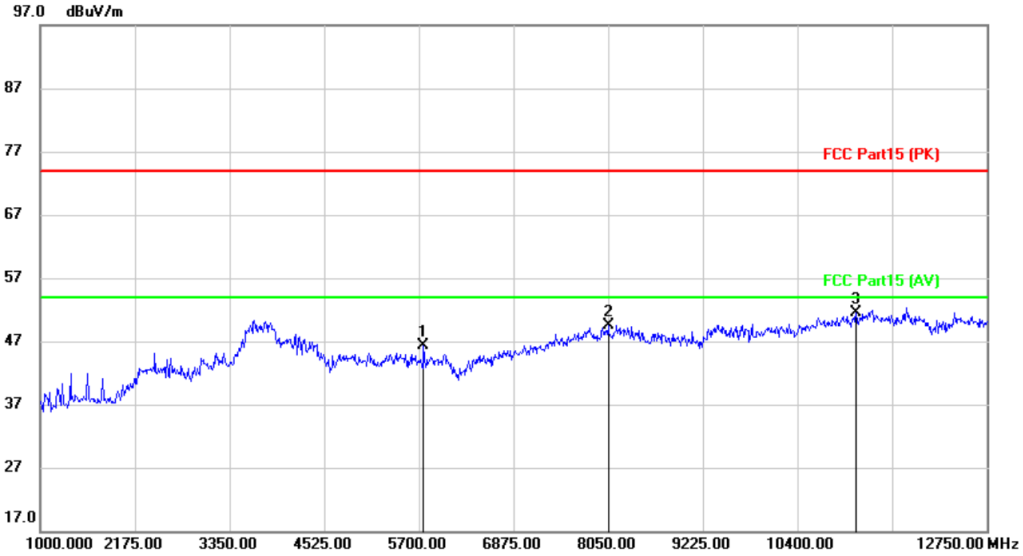

Site: Polarization: **Vertical** Temperature:   
 Limit: FCC Part15 (PK) Power: Humidity: %   
 EUT: True Wireless Earbuds Distance: 3m   
 M/N: 6222D-UUC   
 Mode: 802.11b-2437-ant1   
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5758.750	42.43	3.92	46.35	74.00	-27.65	peak		
2		8050.000	41.53	8.01	49.54	74.00	-24.46	peak		
3	*	11128.500	39.43	12.02	51.45	74.00	-22.55	peak		

\*:Maximum data x:Over limit !:over margin

<Reference Only

**Test Result: Pass**

