



FCC TEST REPORT

FCC ID: 2AATL-6233BUUB

On Behalf of

FN-LINK TECHNOLOGY LIMITED

WIFI/Bluetooth MODULE

Model No.: 6233BUUB

Prepared for : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development
Zone, Changsha, Hunan, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2305037-C01-R01
Date of Receipt : May 22, 2023
Date of Test : May 22, 2023-October 18, 2023
Date of Report : November 2, 2023
Version Number : V0

TABLE OF CONTENTS

| <u>Description</u> | <u>Page</u> |
|---|-------------|
| 1. SUMMARY OF STANDARDS AND RESULTS ----- | 5 |
| 1.1. Description of Standards and Results ----- | 5 |
| 2. GENERAL INFORMATION ----- | 6 |
| 2.1. Description of Device (EUT) ----- | 6 |
| 2.2. Accessories of Device (EUT) ----- | 7 |
| 2.3. Tested Supporting System Details ----- | 7 |
| 2.4. Block Diagram of connection between EUT and simulators ----- | 7 |
| 2.5. Test Mode Description ----- | 7 |
| 2.6. Test Conditions ----- | 8 |
| 2.7. Test Facility ----- | 8 |
| 2.8. Measurement Uncertainty ----- | 8 |
| 2.9. Test Equipment List ----- | 9 |
| 3. MAXIMUM PEAK OUTPUT POWER ----- | 10 |
| 3.1. Limit ----- | 10 |
| 3.2. Test Procedure ----- | 10 |
| 3.3. Test Setup ----- | 10 |
| 3.4. Test Result ----- | 10 |
| 4. BANDWIDTH ----- | 11 |
| 4.1. Limit ----- | 11 |
| 4.2. Test Procedure ----- | 11 |
| 4.3. Test Result ----- | 11 |
| 5. CARRIER FREQUENCY SEPARATION ----- | 22 |
| 5.1. Limit ----- | 22 |
| 5.2. Test Procedure ----- | 22 |
| 5.3. Test Result ----- | 22 |
| 6. NUMBER OF HOPPING CHANNEL ----- | 24 |
| 6.1. Limit ----- | 24 |
| 6.2. Test Procedure ----- | 24 |
| 6.3. Test Result ----- | 24 |
| 7. DWELL TIME ----- | 26 |
| 7.1. Test limit ----- | 26 |
| 7.2. Test Procedure ----- | 26 |
| 7.3. Test Result ----- | 26 |
| 8. RADIATED EMISSIONS ----- | 32 |
| 8.1. Limit ----- | 32 |
| 8.2. Block Diagram of Test setup ----- | 33 |
| 8.3. Test Procedure ----- | 34 |
| 8.4. Test Result ----- | 34 |
| 9. BAND EDGE COMPLIANCE ----- | 49 |
| 9.1. Block Diagram of Test Setup ----- | 49 |
| 9.2. Limit ----- | 49 |
| 9.3. Test Procedure ----- | 49 |
| 9.4. Test Result ----- | 49 |
| 10. POWER LINE CONDUCTED EMISSIONS ----- | 65 |
| 10.1. Block Diagram of Test Setup ----- | 65 |
| 10.2. Limit ----- | 65 |
| 10.3. Test Procedure ----- | 65 |
| 10.4. Test Result ----- | 65 |
| 11. ANTENNA REQUIREMENTS ----- | 68 |
| 11.1. Limit ----- | 68 |
| 11.2. Result ----- | 68 |
| 12. TEST SETUP PHOTO ----- | 69 |
| 12.1. Photo of Radiated Emission test ----- | 69 |
| 12.2. Photo of Conducted Emission test ----- | 70 |
| 13. EUT Photo ----- | 71 |

TEST REPORT DECLARATION

Applicant : FN-LINK TECHNOLOGY LIMITED

Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, China

Manufacturer : FN-LINK TECHNOLOGY LIMITED

Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, China

EUT Description : WIFI/Bluetooth MODULE

(A) Model No. 6233BUUB

(B) Trademark 


Measurement Standard Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
Project Engineer 

Approved by (name + signature).....: Reak Yang
Project Manager 

Date of issue.....: November 2, 2023

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|------------------|------------------------|------------|
| V0 | November 2, 2023 | Initial released Issue | Lucas Pang |

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

| Test Item | Standards Paragraph | Result |
|--|--|--------|
| Maximum Peak Output Power | FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013 | P |
| Bandwidth | FCC Part 15: 15.215 ANSI C63.10 :2013 | P |
| Carrier Frequency Separation | FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013 | P |
| Number Of Hopping Channel | FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013 | P |
| Dwell Time | FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013 | P |
| Radiated Emission | FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013 | P |
| Band Edge Compliance | FCC Part 15: 15.247(d) ANSI C63.10 :2013 | P |
| Power Line Conducted Emissions | FCC Part 15: 15.207 ANSI C63.10 :2013 | P |
| Antenna requirement | FCC Part 15: 15.203 | P |
| <p>Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.</p> | | |

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

| | | |
|------------------------|---|--|
| Description | : | WIFI/Bluetooth MODULE |
| Model Number | : | 6233BUUB |
| Diff | : | N/A |
| Power supply | : | DC 3.3V from USB adapter board |
| Radio Technology | : | Bluetooth V5.2 EDR |
| Operation frequency | : | 2402-2480MHz |
| Channel No. | : | 79 Channels |
| Channel spacing | : | 1MHz |
| Modulation type | : | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Antenna Type | : | Rob Antenna, max gain 3.35dBi (Antenna information is provided by applicant.) |
| Software version | : | V1.0 |
| Hardware version | : | V1.0 |
| Connector cable loss | : | N/A |
| Intend use environment | : | Residential, commercial and light industrial environment |


2.2. Accessories of Device (EUT)

Accessories : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

| No. | Description | Manufacturer | Model | Serial Number | Certification or SDoC |
|-----|-------------|--------------|-------|---------------|-----------------------|
| 1. | Notebook PC | Lenovo | T430 | N/A | N/A |

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

| Tested mode, channel information | | |
|----------------------------------|--------------|-----------------|
| Mode | Channel | Frequency (MHz) |
| GFSK | Low :CH1 | 2402 |
| | Middle: CH40 | 2441 |
| | High: CH79 | 2480 |
| $\pi/4$ DQPSK | Low :CH1 | 2402 |
| | Middle: CH40 | 2441 |
| | High: CH79 | 2480 |
| 8DPSK | Low :CH1 | 2402 |
| | Middle: CH40 | 2441 |
| | High: CH79 | 2480 |

2.6. Test Conditions

| Items | Required | Actual |
|--------------------|-----------|--------|
| Temperature range: | 15-35°C | 24°C |
| Humidity range: | 25-75% | 56% |
| Pressure range: | 86-106kPa | 980kPa |

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

September 15, 2019 Certificated by IC
Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

| Item | Uncertainty |
|--|---------------------------|
| Uncertainty for Power point Conducted Emissions Test | 1.63dB |
| Uncertainty for Radiation Emission test in 3m chamber (below 30MHz) | 3.5dB |
| Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz) | 3.74dB(Polarize: V) |
| | 3.76dB(Polarize: H) |
| Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz) | 3.77dB(Polarize: V) |
| | 3.80dB(Polarize: H) |
| Uncertainty for radio frequency | 5.06×10^{-8} GHz |
| Uncertainty for conducted RF Power | 0.40dB |
| Uncertainty for temperature | 0.2°C |
| Uncertainty for humidity | 1% |
| Uncertainty for DC and low frequency voltages | 0.06% |

2.9. Test Equipment List

| Equipment | Manufacture | Model No. | Firmware version | Serial No. | Last cal. | Cal Interval |
|-----------------------------|---------------|------------------|------------------|----------------------------|------------|--------------|
| 9*6*6 anechoic chamber | CHENYU | 9*6*6 | / | N/A | 2022.05.17 | 3Year |
| Spectrum analyzer | ROHDE&SCHWARZ | FSV40-N | 2.3 | 102137 | 2023.08.16 | 1Year |
| Spectrum analyzer | Agilent | N9020A | A.14.16 | MY499100060 | 2023.08.16 | 1Year |
| Receiver | ROHDE&SCHWARZ | ESR | 2.28 SP1 | 1316.3003K03-10 2082-Wa | 2023.08.16 | 1Year |
| Receiver | R&S | ESCI | 4.42 SP1 | 101165 | 2023.08.16 | 1Year |
| Bilog Antenna | Schwarzbeck | VULB 9168 | / | VULB 9168#627 | 2023.08.28 | 1Year |
| Horn Antenna | SCHWARZBECK | BBHA 9120 D | / | 2106 | 2023.08.19 | 1Year |
| Loop Antenna | SCHWARZBECK | FMZB 1519B | / | 00128 | 2023.08.19 | 1Year |
| RF Cable | Resenberger | Cable 1 | / | RE1 | 2023.08.16 | 1Year |
| RF Cable | Resenberger | Cable 2 | / | RE2 | 2023.08.16 | 1Year |
| RF Cable | Resenberger | Cable 3 | / | CE1 | 2023.08.16 | 1Year |
| Pre-amplifier | HP | HP8347A | / | 2834A00455 | 2023.08.16 | 1Year |
| Pre-amplifier | Agilent | 8449B | / | 3008A02664 | 2023.08.16 | 1Year |
| L.I.S.N.#1 | Schwarzbeck | NSLK8126 | / | 8126-466 | 2023.08.16 | 1Year |
| L.I.S.N.#2 | ROHDE&SCHWARZ | ENV216 | / | 101043 | 2023.08.16 | 1Year |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | / | 00946 | 2023.08.19 | 1Year |
| Preamplifier | SKET | LNPA_1840 -50 | / | SK2018101801 | 2023.08.16 | 1 Year |
| Power Meter | Agilent | E9300A | / | MY41496628 | 2023.08.16 | 1 Year |
| Power Sensor | DARE | RPR3006W | / | 15100041SNO91 | 2023.08.16 | 1 Year |
| Temp. & Humid. Chamber | Teelong | TL-HW408S | / | TL-20191205-01 | 2023.07.25 | 1 Year |
| Switching Mode Power Supply | JUNKE | JK12010S | / | 20140927-6 | 2023.08.16 | 1 Year |
| Adjustable attenuator | MWRFtest | N/A | / | N/A | N/A | N/A |
| 10dB Attenuator | Mini-Circuits | DC-6G | / | N/A | N/A | N/A |

| Software Information | | | |
|----------------------|---------------|--------------|-----------|
| Test Item | Software Name | Manufacturer | Version |
| RE | EZ-EMC | Farad | Alpha-3A1 |
| CE | EZ-EMC | Farad | Alpha-3A1 |
| RF-CE | MTS 8310 | MW | V2.0.0.0 |

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

| Mode | Freq(MHz) | PK Output Power(dBm) | Limit(dBm) | Result |
|---------------|-----------|----------------------|------------|--------|
| GFSK | 2402 | 6.314 | 30 | Pass |
| | 2441 | 6.594 | 30 | Pass |
| | 2480 | 5.525 | 30 | Pass |
| $\pi/4$ DQPSK | 2402 | 6.375 | 21 | Pass |
| | 2441 | 6.901 | 21 | Pass |
| | 2480 | 5.576 | 21 | Pass |
| 8DPSK | 2402 | 6.068 | 21 | Pass |
| | 2441 | 6.418 | 21 | Pass |
| | 2480 | 5.479 | 21 | Pass |

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result

-20dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -20 dB Bandwidth (MHz) | Limit -20 dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT | 1-DH1 | 2402 | Ant1 | 0.858 | N/A | Pass |
| NVNT | 1-DH1 | 2441 | Ant1 | 0.918 | N/A | Pass |
| NVNT | 1-DH1 | 2480 | Ant1 | 0.936 | N/A | Pass |
| NVNT | 2-DH1 | 2402 | Ant1 | 1.274 | N/A | Pass |
| NVNT | 2-DH1 | 2441 | Ant1 | 1.22 | N/A | Pass |
| NVNT | 2-DH1 | 2480 | Ant1 | 1.244 | N/A | Pass |
| NVNT | 3-DH1 | 2402 | Ant1 | 1.296 | N/A | Pass |
| NVNT | 3-DH1 | 2441 | Ant1 | 1.262 | N/A | Pass |
| NVNT | 3-DH1 | 2480 | Ant1 | 1.256 | N/A | Pass |

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

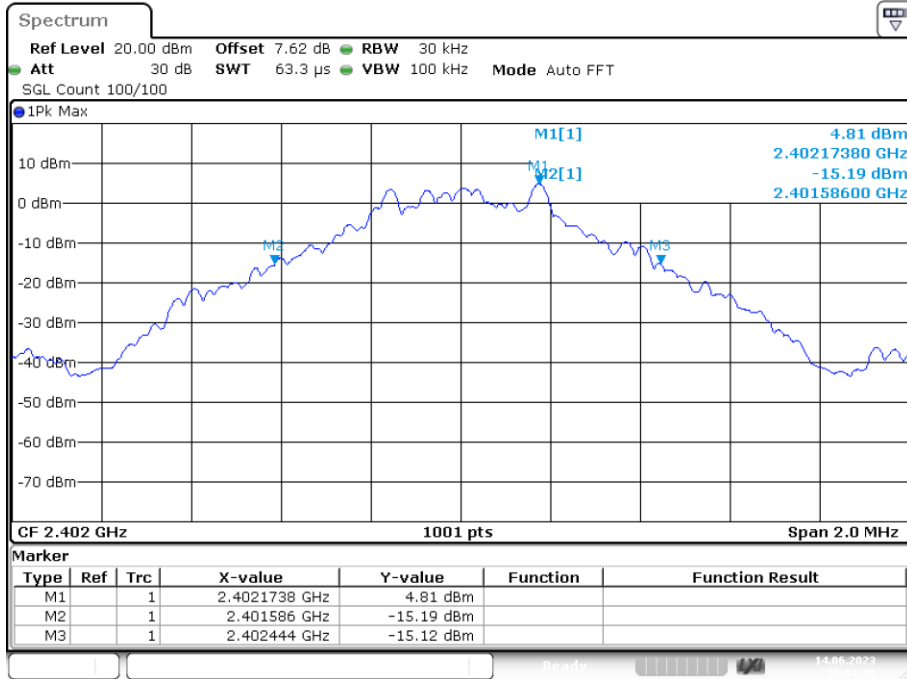


Date: 14.JUN.2023 10:04:30

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

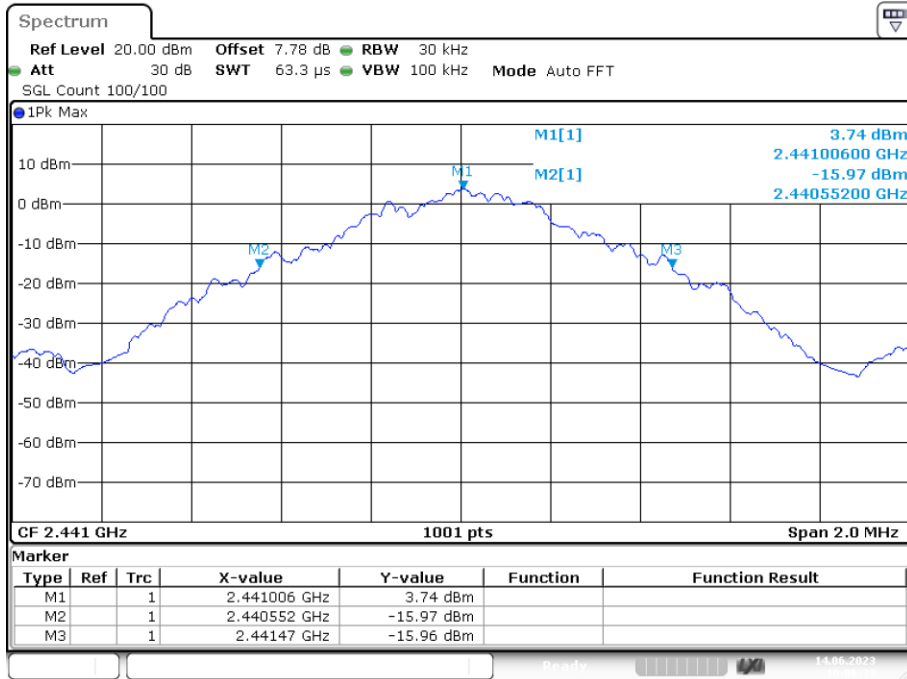


Date: 14.JUN.2023 10:06:33

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

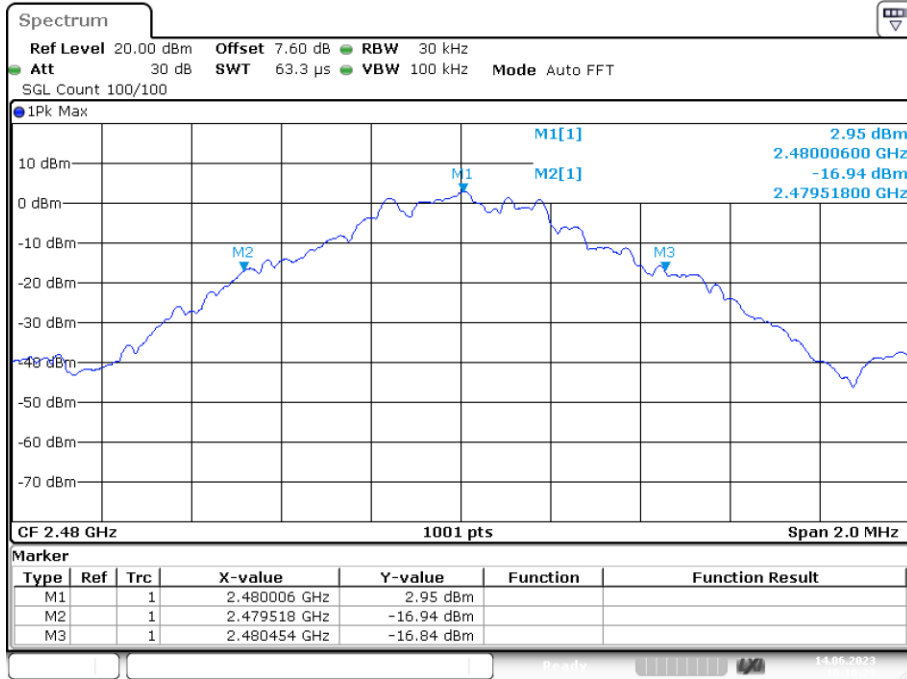


Date: 14.JUN.2023 10:10:23

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

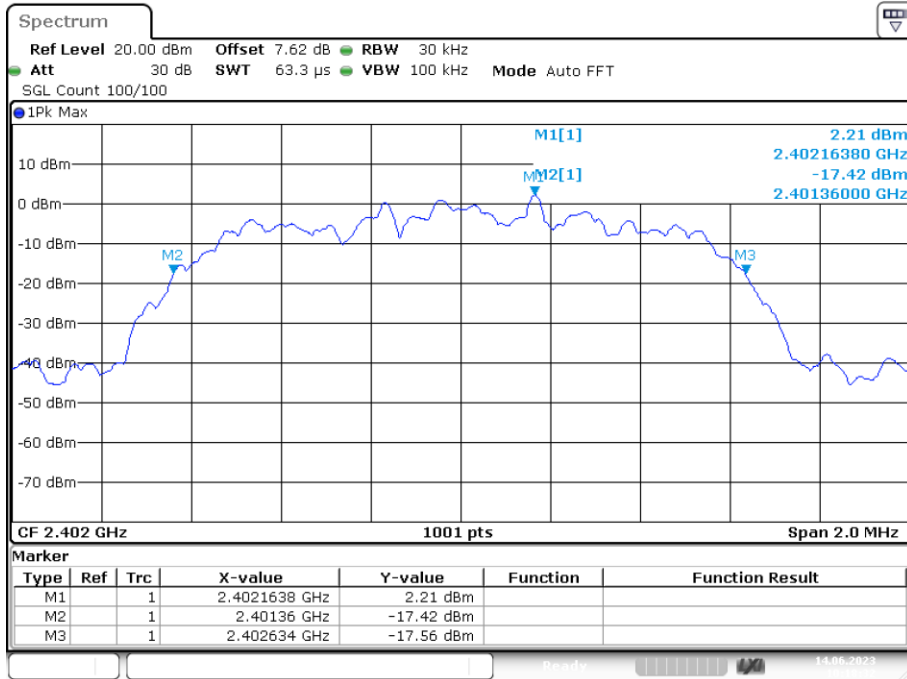


Date: 14.JUN.2023 10:18:31

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

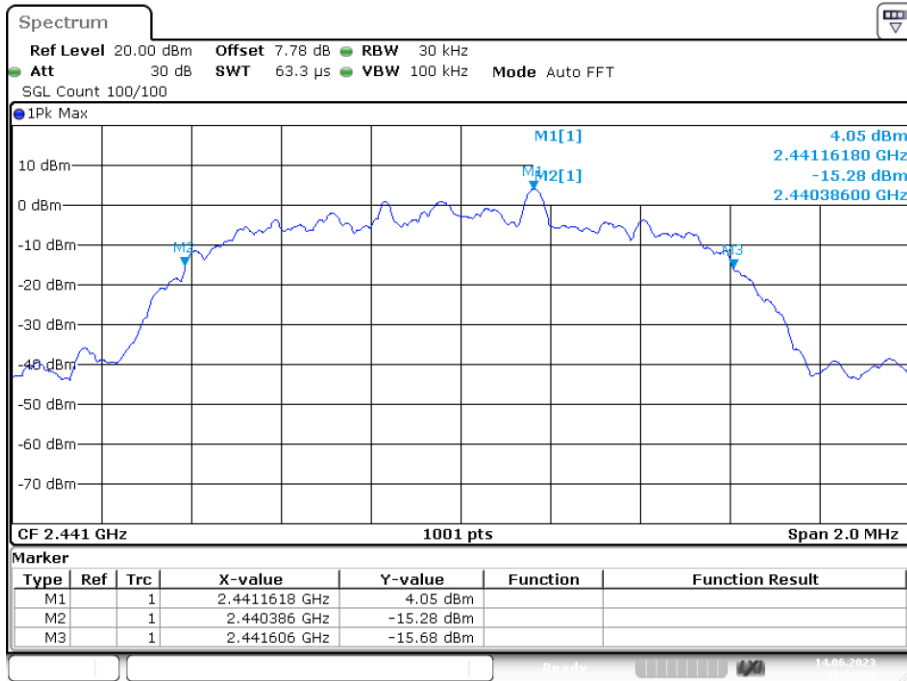


Date: 14.JUN.2023 10:20:59

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

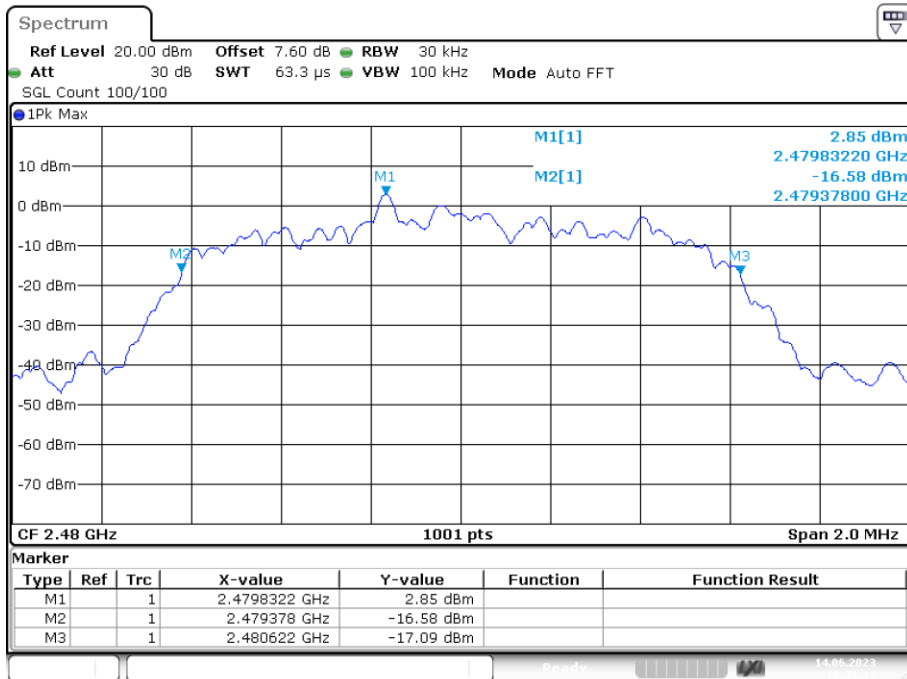


Date: 14.JUN.2023 10:23:34

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

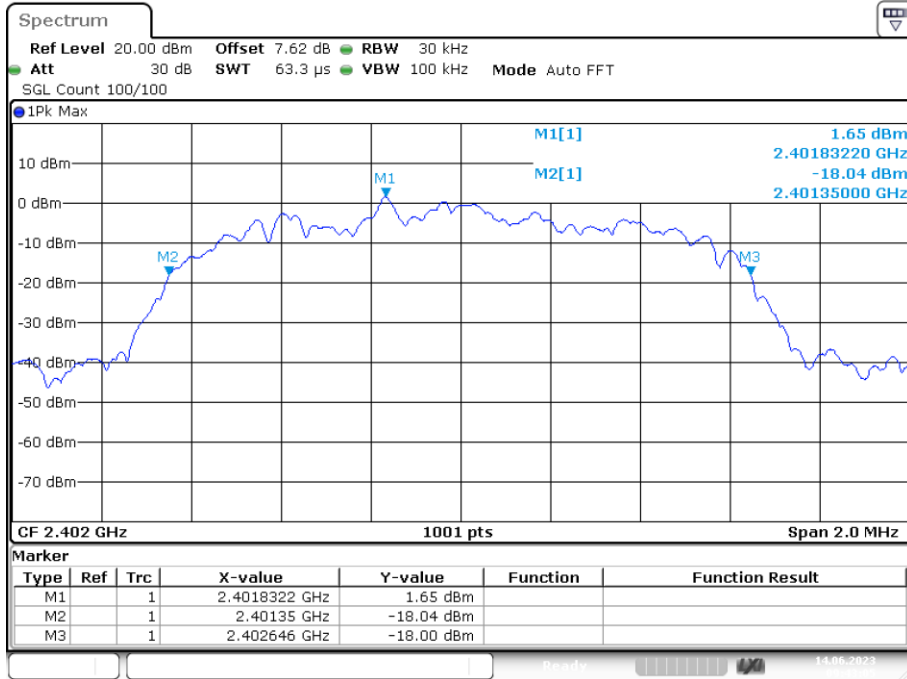


Date: 14.JUN.2023 09:43:05

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

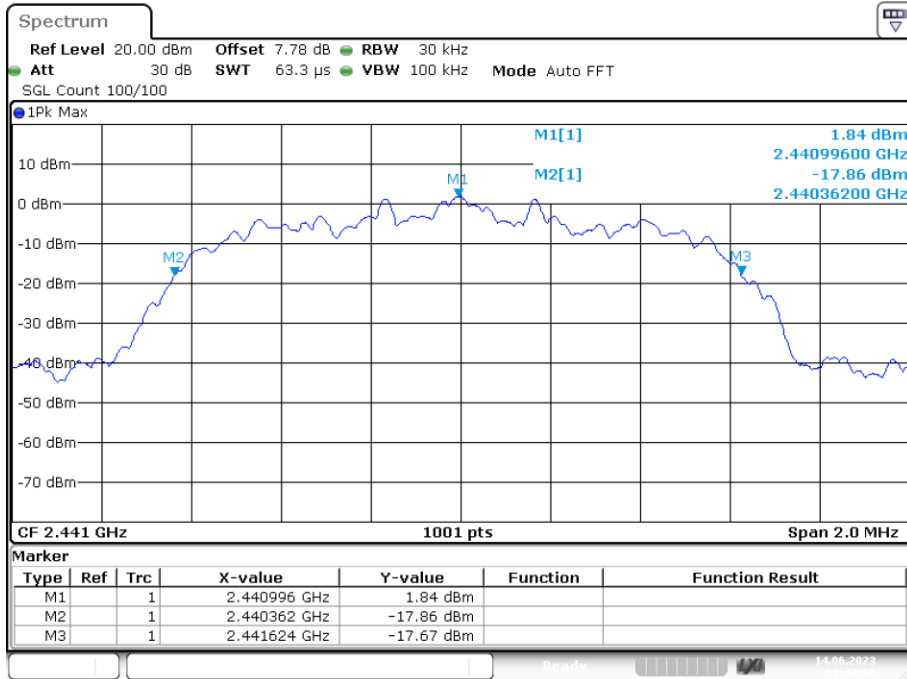

Date: 14.JUN.2023 09:46:08

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

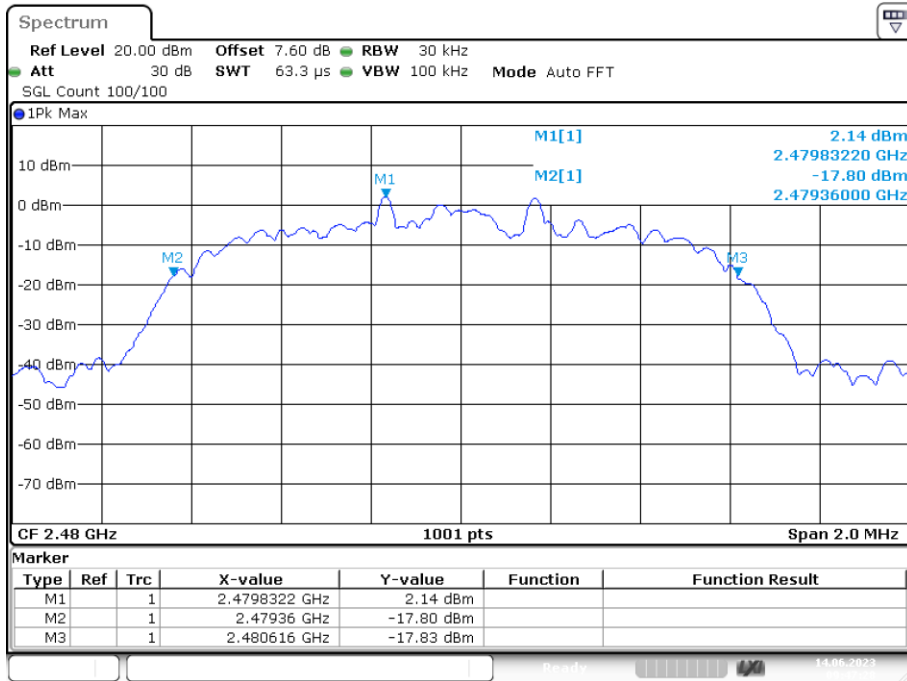


Date: 14.JUN.2023 09:47:28

Occupied Channel Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|-------|-----------------|---------|---------------|
| NVNT | 1-DH1 | 2402 | Ant1 | 0.873 |
| NVNT | 1-DH1 | 2441 | Ant1 | 0.871 |
| NVNT | 1-DH1 | 2480 | Ant1 | 0.865 |
| NVNT | 2-DH1 | 2402 | Ant1 | 1.151 |
| NVNT | 2-DH1 | 2441 | Ant1 | 1.159 |
| NVNT | 2-DH1 | 2480 | Ant1 | 1.141 |
| NVNT | 3-DH1 | 2402 | Ant1 | 1.161 |
| NVNT | 3-DH1 | 2441 | Ant1 | 1.169 |
| NVNT | 3-DH1 | 2480 | Ant1 | 1.151 |

OBW NVNT 1-DH1 2402MHz Ant1

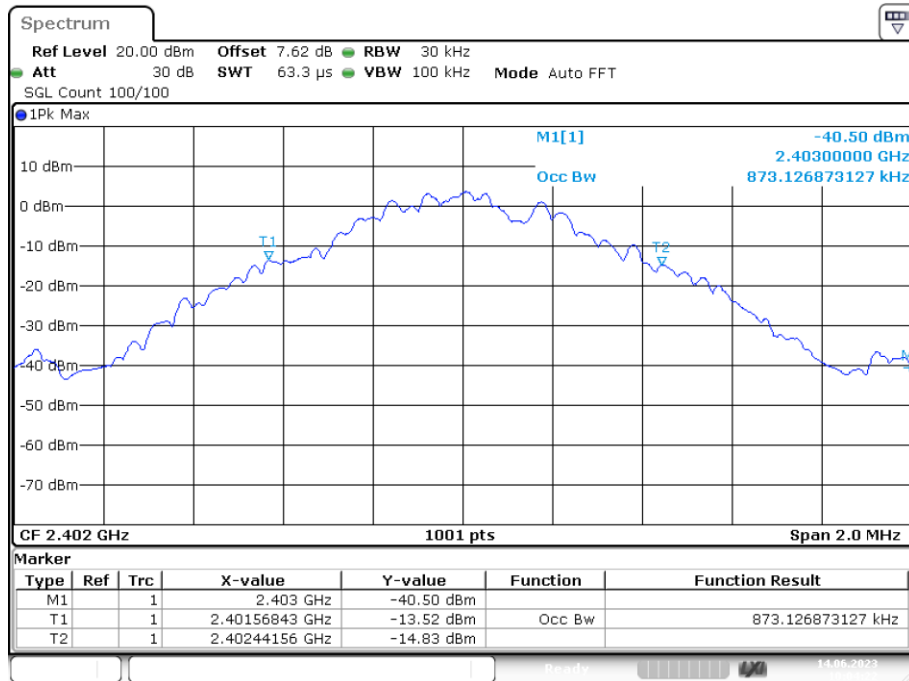


Date: 14.JUN.2023 10:04:22

OBW NVNT 1-DH1 2441MHz Ant1

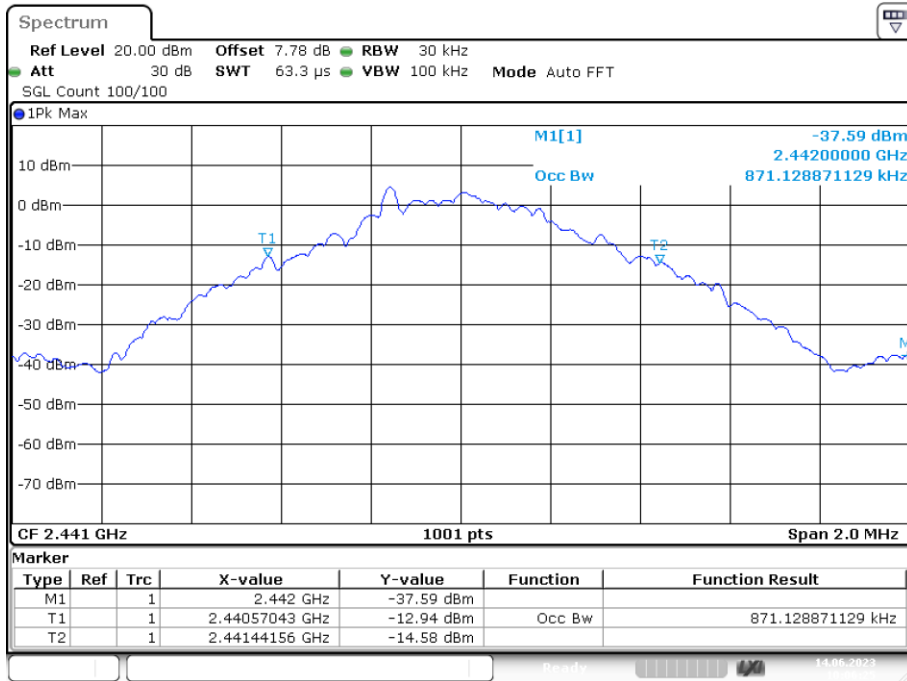


Date: 14.JUN.2023 10:06:25

OBW NVNT 1-DH1 2480MHz Ant1

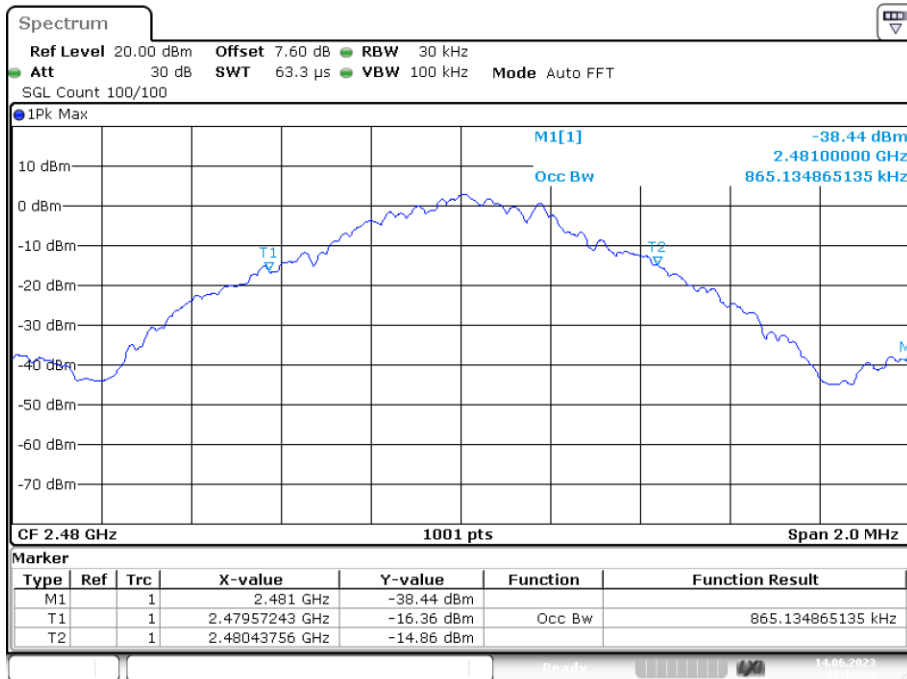


Date: 14.JUN.2023 10:10:15

OBW NVNT 2-DH1 2402MHz Ant1

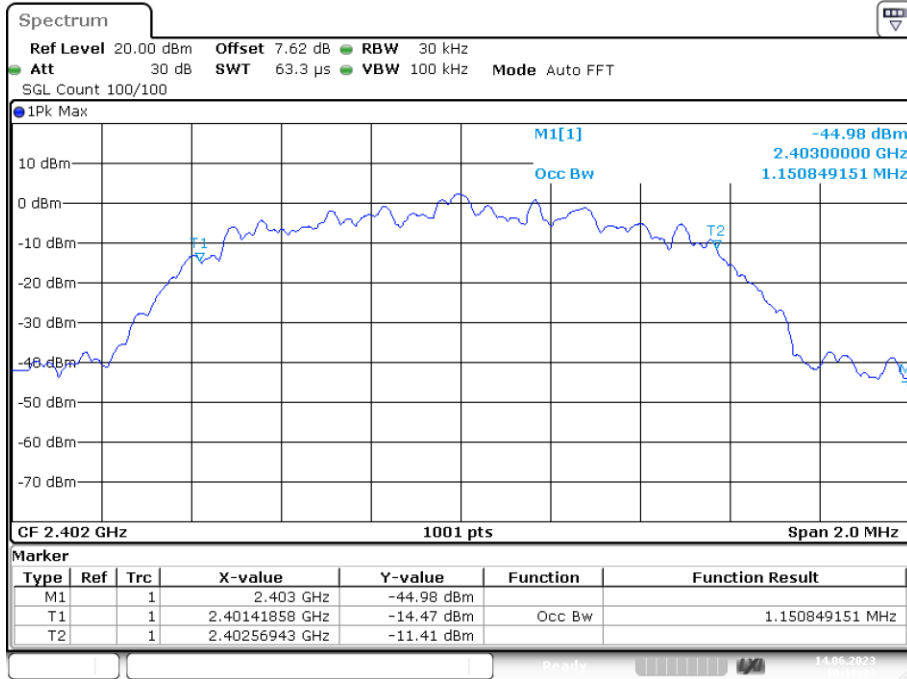


Date: 14.JUN.2023 10:18:22

OBW NVNT 2-DH1 2441MHz Ant1

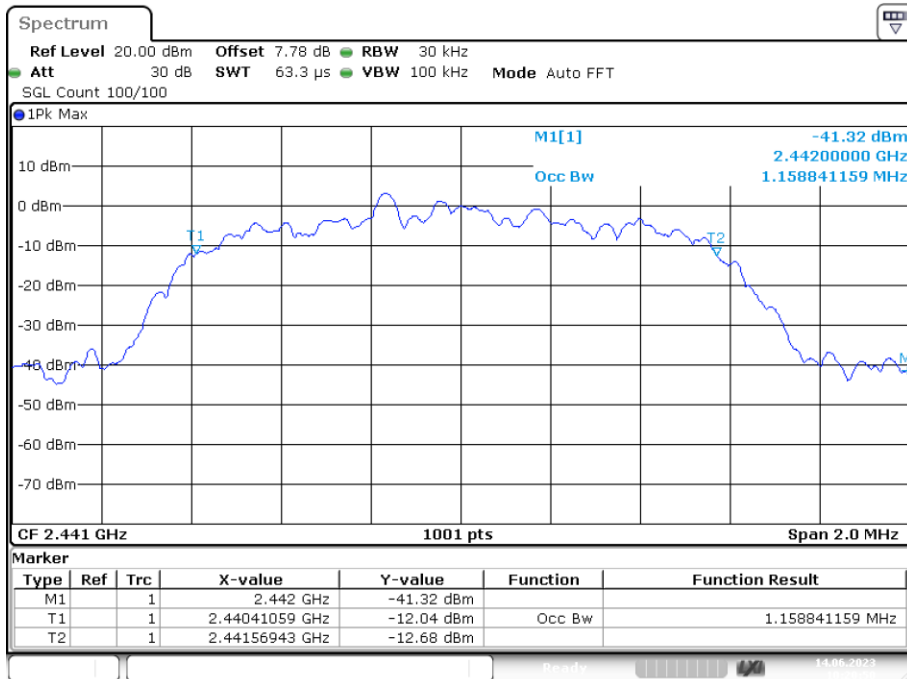


Date: 14.JUN.2023 10:20:49

OBW NVNT 2-DH1 2480MHz Ant1

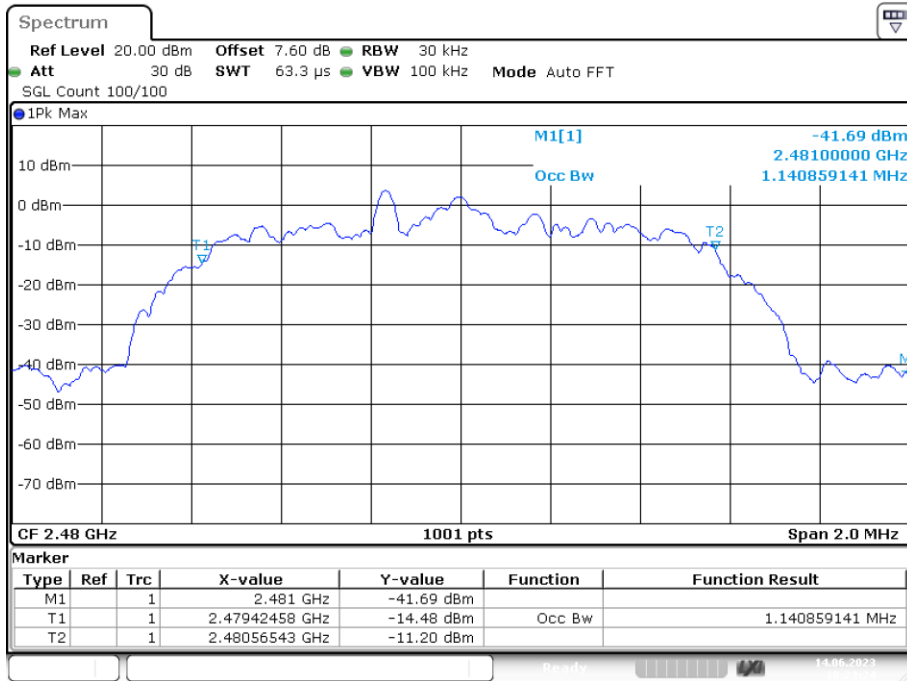


Date: 14.JUN.2023 10:23:24

OBW NVNT 3-DH1 2402MHz Ant1

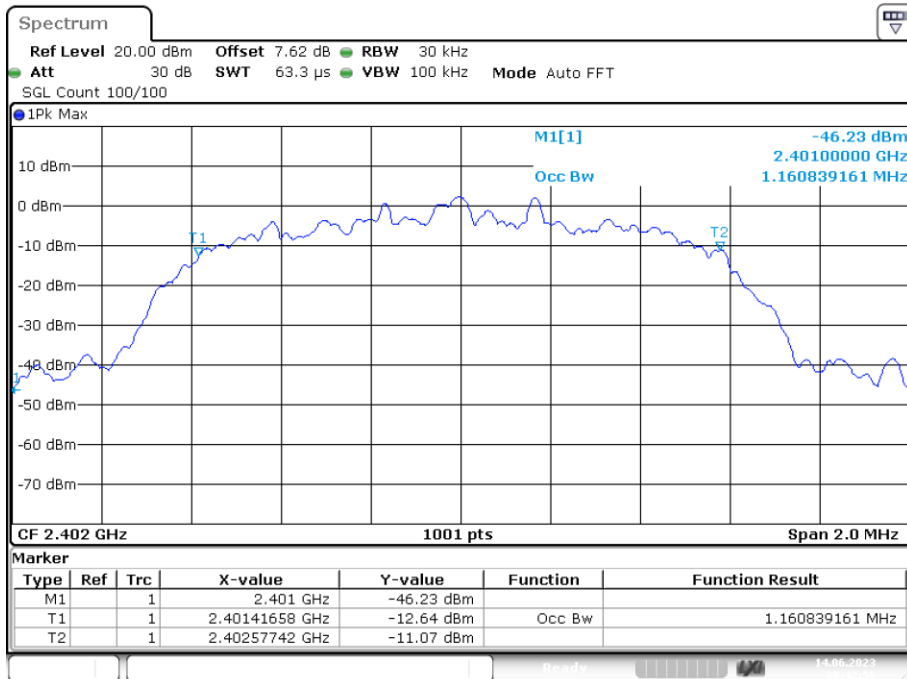


Date: 14.JUN.2023 09:42:56

OBW NVNT 3-DH1 2441MHz Ant1

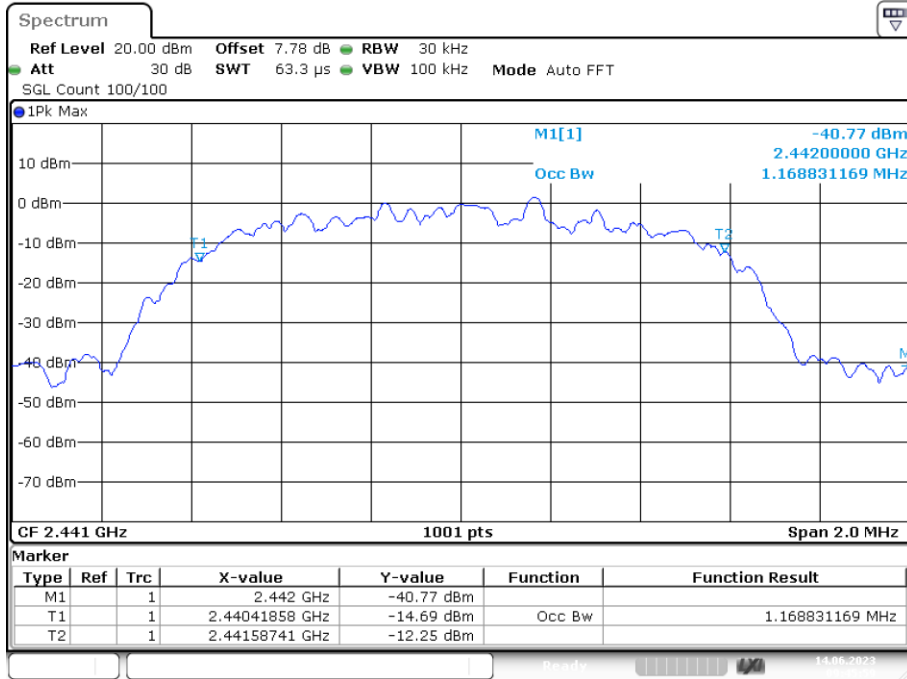

Date: 14.JUN.2023 09:45:58

OBW NVNT 3-DH1 2480MHz Ant1

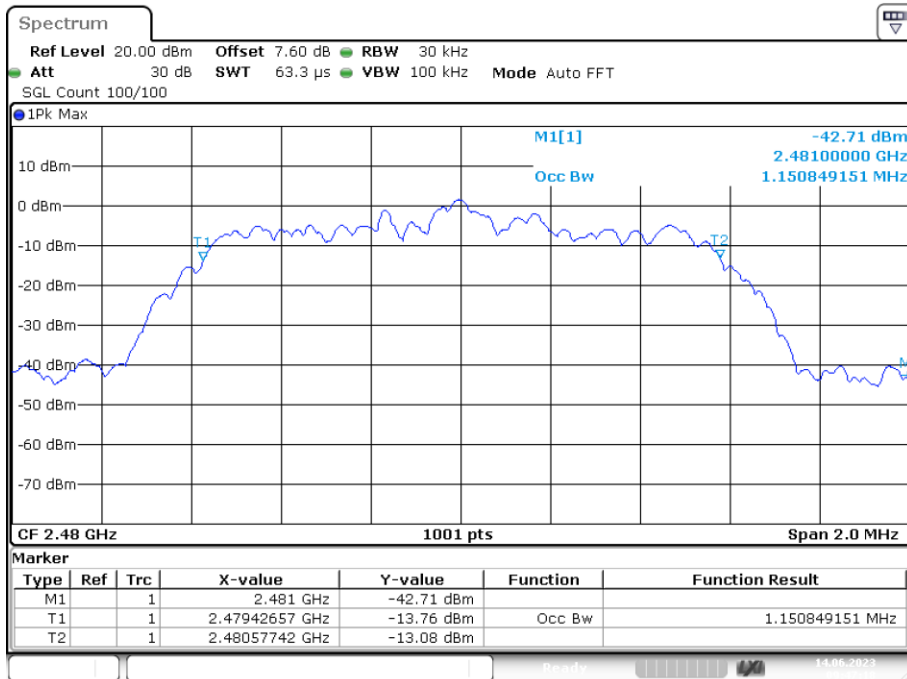

Date: 14.JUN.2023 09:47:18

5. CARRIER FREQUENCY SEPARATION

5.1. Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.


5.3. Test Result

| Condition | Mode | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT | 1-DH1 | Ant1 | 2441.172 | 2442.172 | 1 | 0.025 | Pass |
| NVNT | 2-DH1 | Ant1 | 2440.83 | 2441.832 | 1.002 | 0.025 | Pass |
| NVNT | 3-DH1 | Ant1 | 2441.160 | 2442.160 | 1 | 0.025 | Pass |

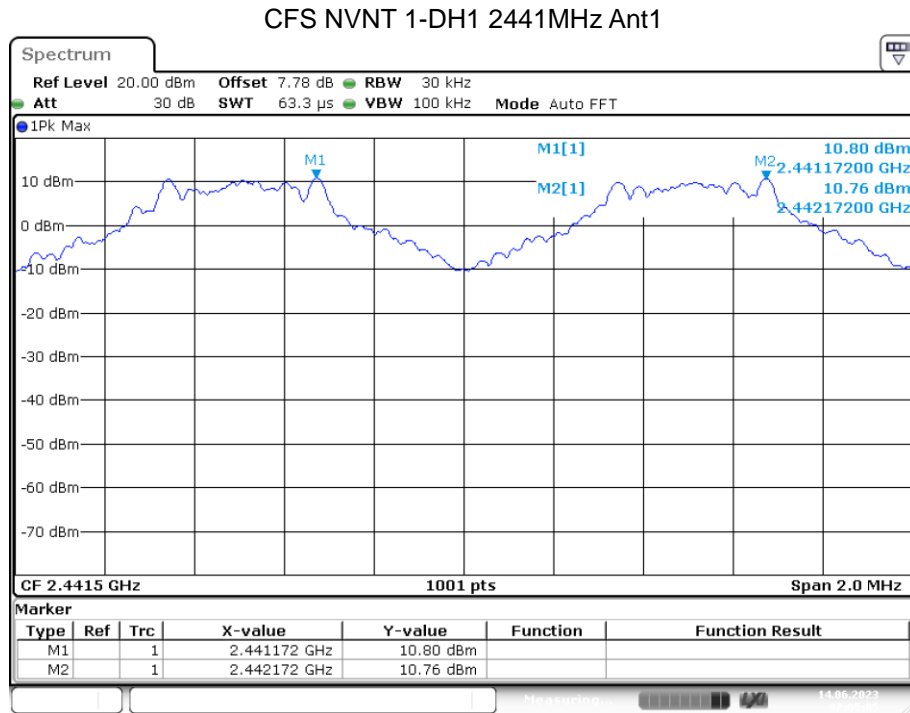


Date: 14.JUN.2023 07:05:05

CFS NVNT 2-DH1 2441MHz Ant1

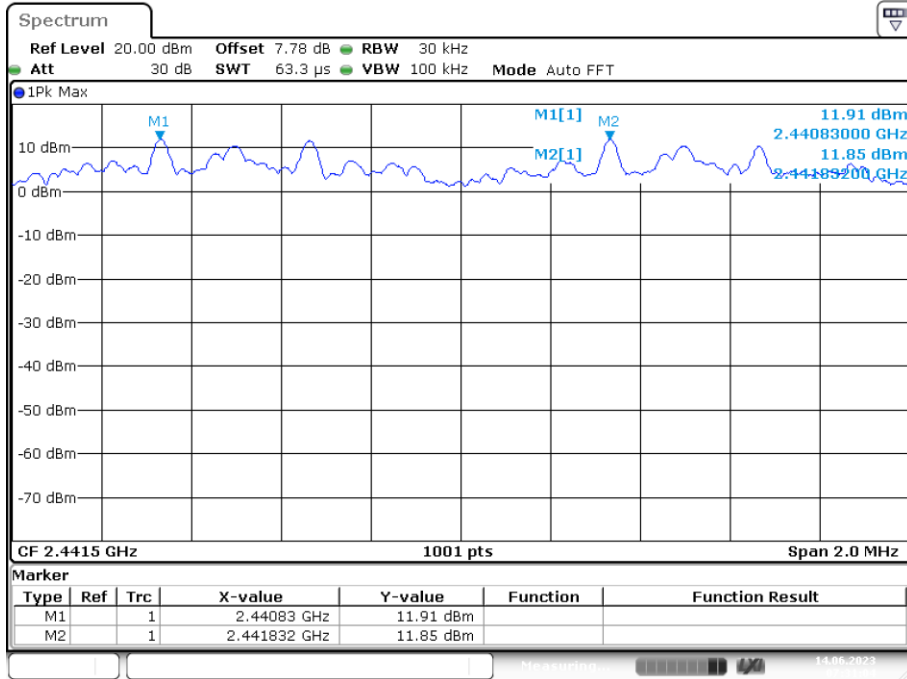

Date: 14.JUN.2023 07:31:04

CFS NVNT 3-DH1 2441MHz Ant1

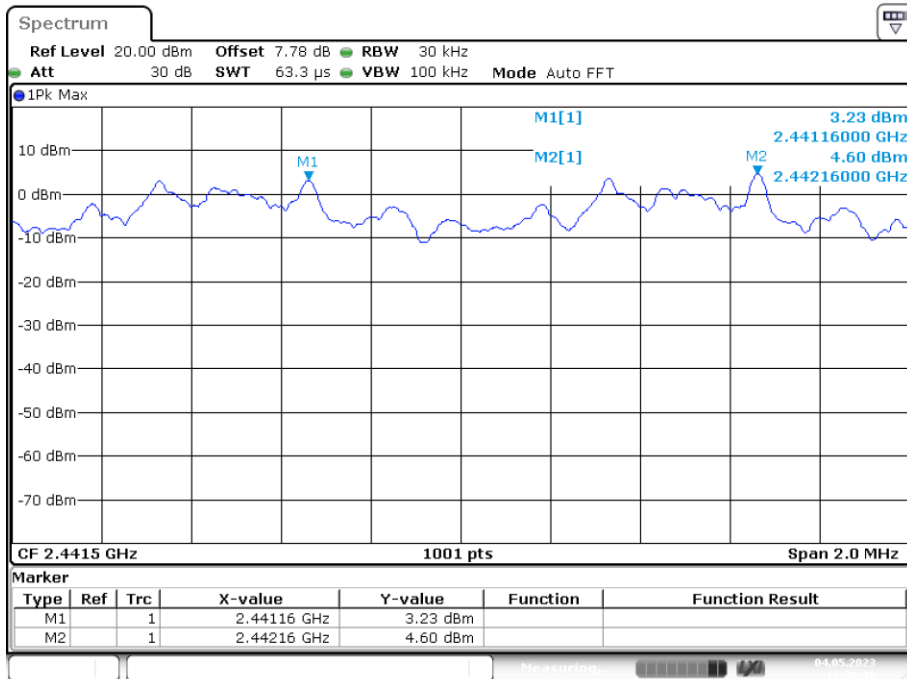

Date: 4.MAY.2023 11:36:35

6. NUMBER OF HOPPING CHANNEL

6.1. Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.


6.3. Test Result

| Condition | Mode | Antenna | Hopping Number | Limit | Verdict |
|-----------|-------|---------|----------------|-------|---------|
| NVNT | 1-DH1 | Ant1 | 79 | 15 | Pass |
| NVNT | 2-DH1 | Ant1 | 79 | 15 | Pass |
| NVNT | 3-DH1 | Ant1 | 79 | 15 | Pass |

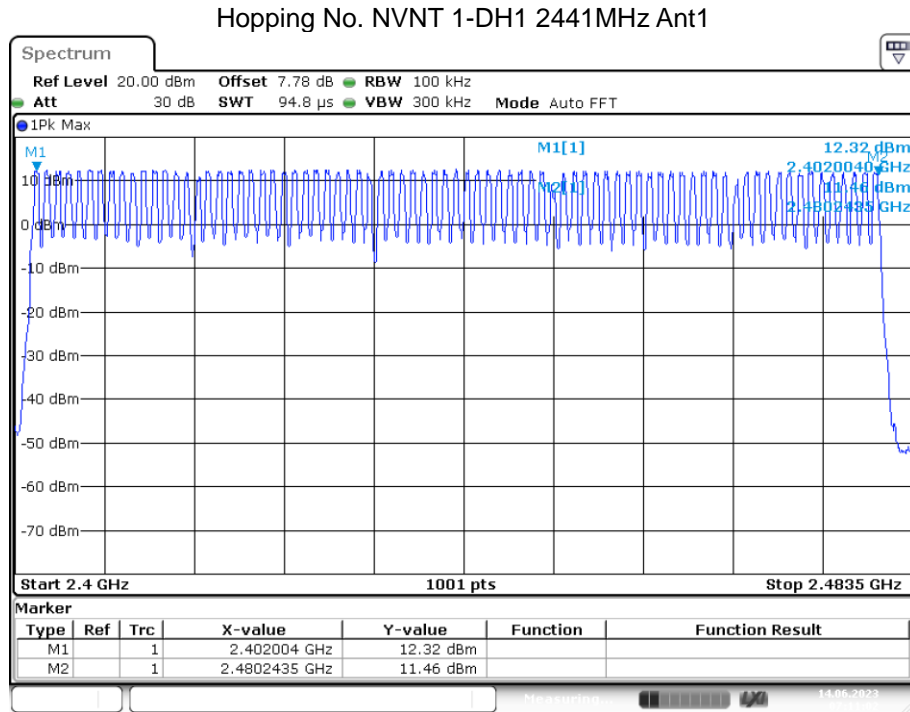


Date: 14.JUN.2023 07:11:02

Hopping No. NVNT 2-DH1 2441MHz Ant1

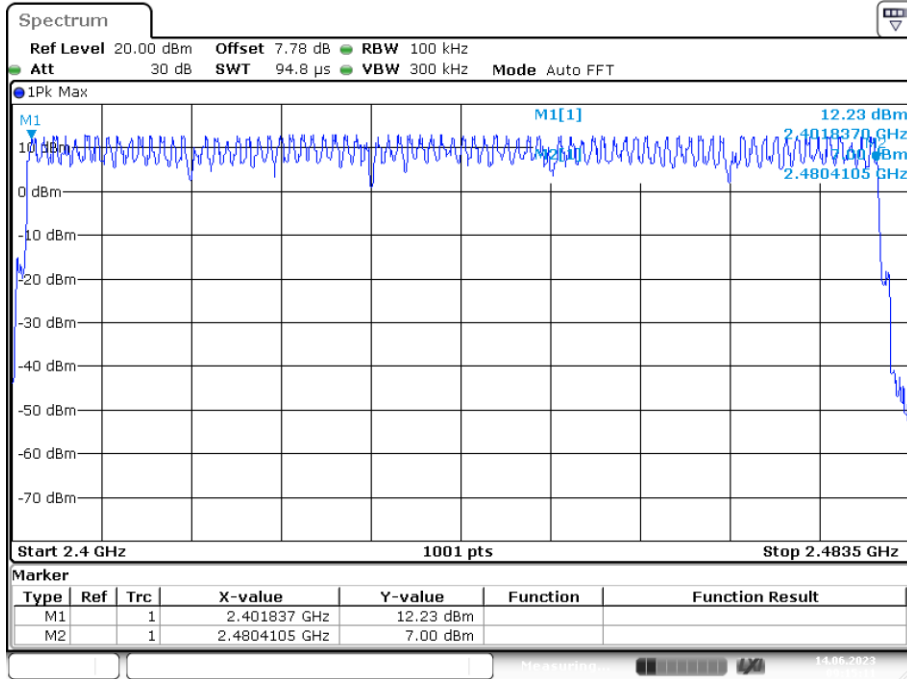

Date: 14.JUN.2023 09:15:10

Hopping No. NVNT 3-DH1 2441MHz Ant1

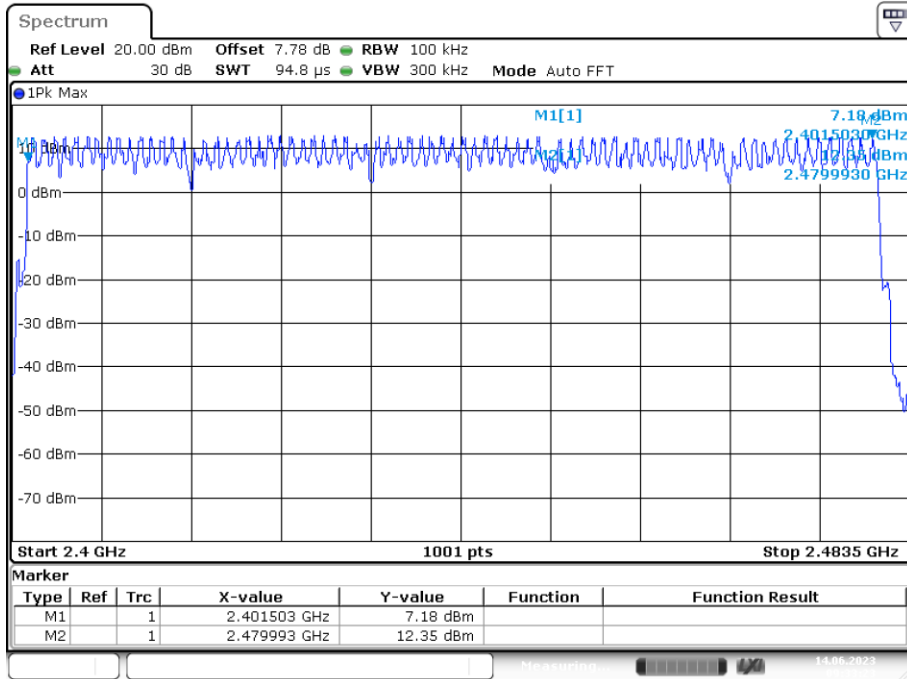

Date: 14.JUN.2023 09:33:23

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz.

The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 sec- onds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.


7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.


7.3. Test Result

| TestMode | Antenna | Freq(MHz) | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit[s] | Verdict |
|----------|---------|-----------|-----------------|-----------------|-----------|----------|---------|
| | | | 0.383 | 314 | 0.120 | ≤0.4 | PASS |
| | | | 1.639 | 155 | 0.254 | ≤0.4 | PASS |
| | | | 2.887 | 102 | 0.294 | ≤0.4 | PASS |
| | | | 0.392 | 501 | 0.196 | ≤0.4 | PASS |
| | | | 1.642 | 154 | 0.253 | ≤0.4 | PASS |
| | | | 2.89 | 101 | 0.292 | ≤0.4 | PASS |
| | | | 0.391 | 501 | 0.196 | ≤0.4 | PASS |
| | | | 1.643 | 160 | 0.263 | ≤0.4 | PASS |
| 3DH5 | Ant1 | Hop | 2.893 | 95 | 0.275 | ≤0.4 | PASS |


Note: Total Dwell Time= Pulse Time* Burst Count

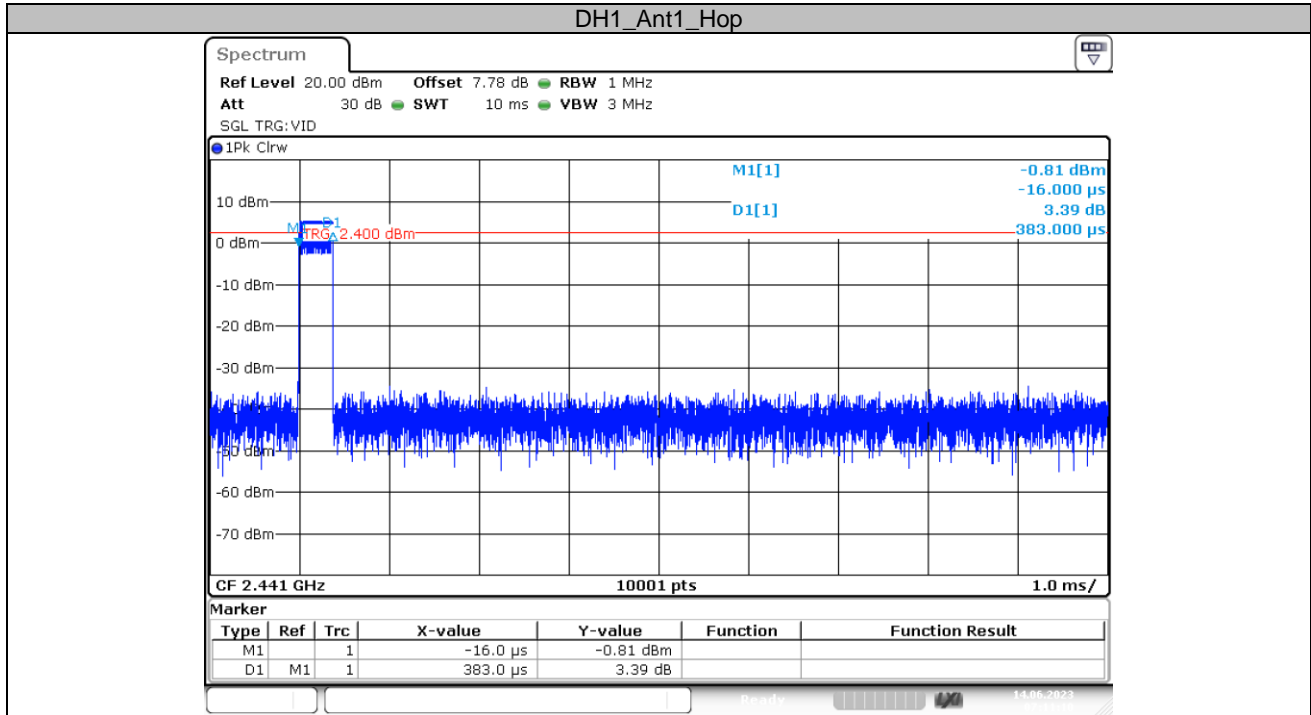


Date: 14.JUN.2023 07:11:10

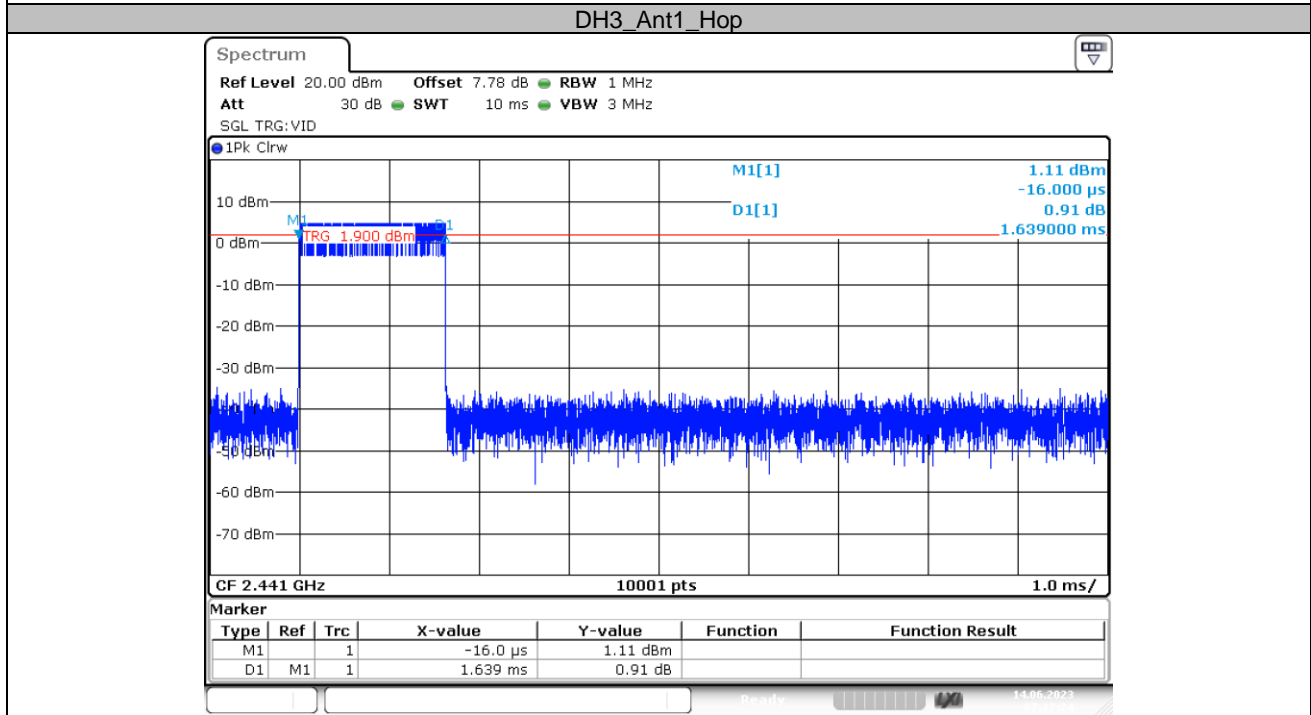


Date: 14.JUN.2023 07:17:24

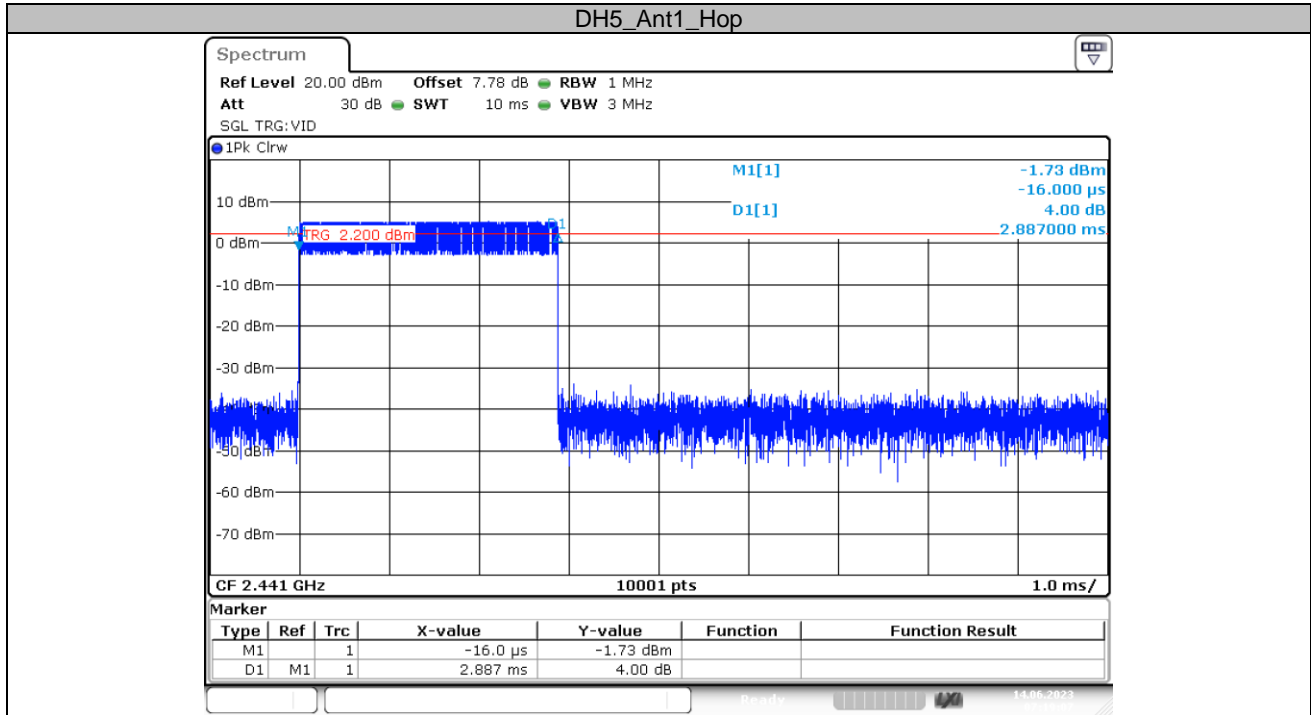


Date: 14.JUN.2023 07:19:07

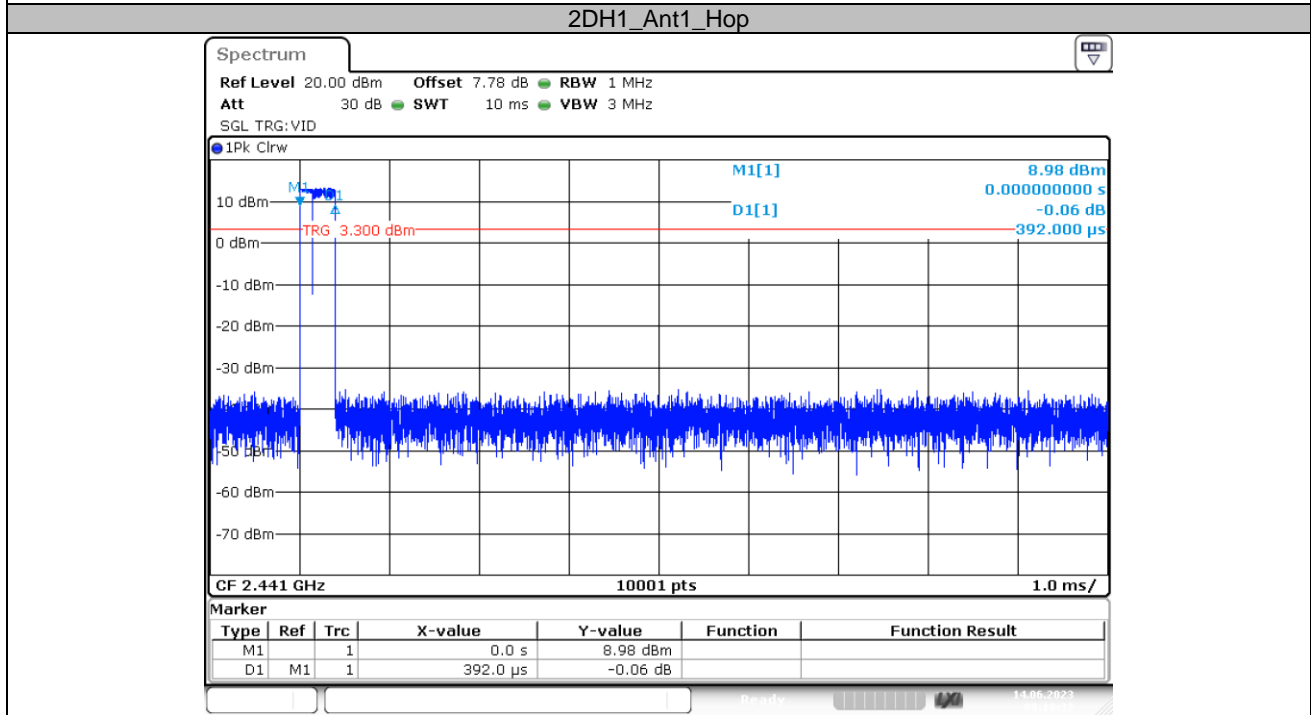



Date: 14.JUN.2023 09:19:32

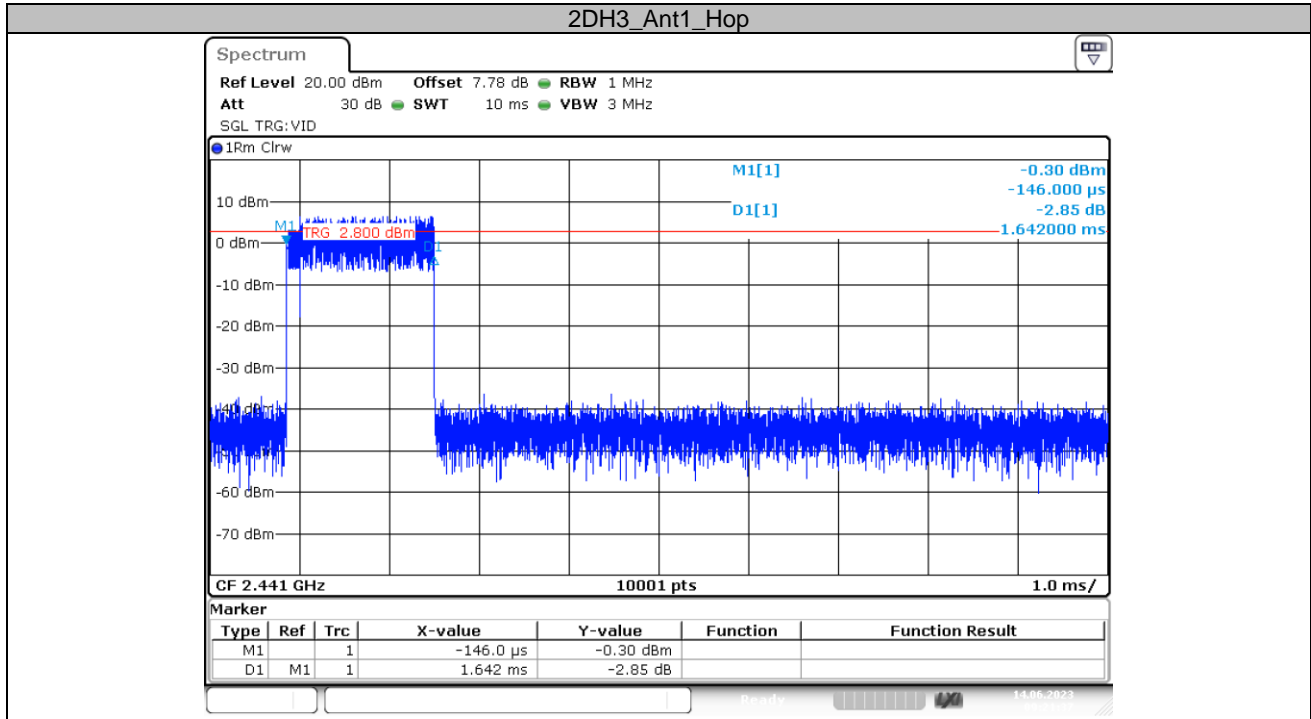


Date: 14.JUN.2023 09:21:36

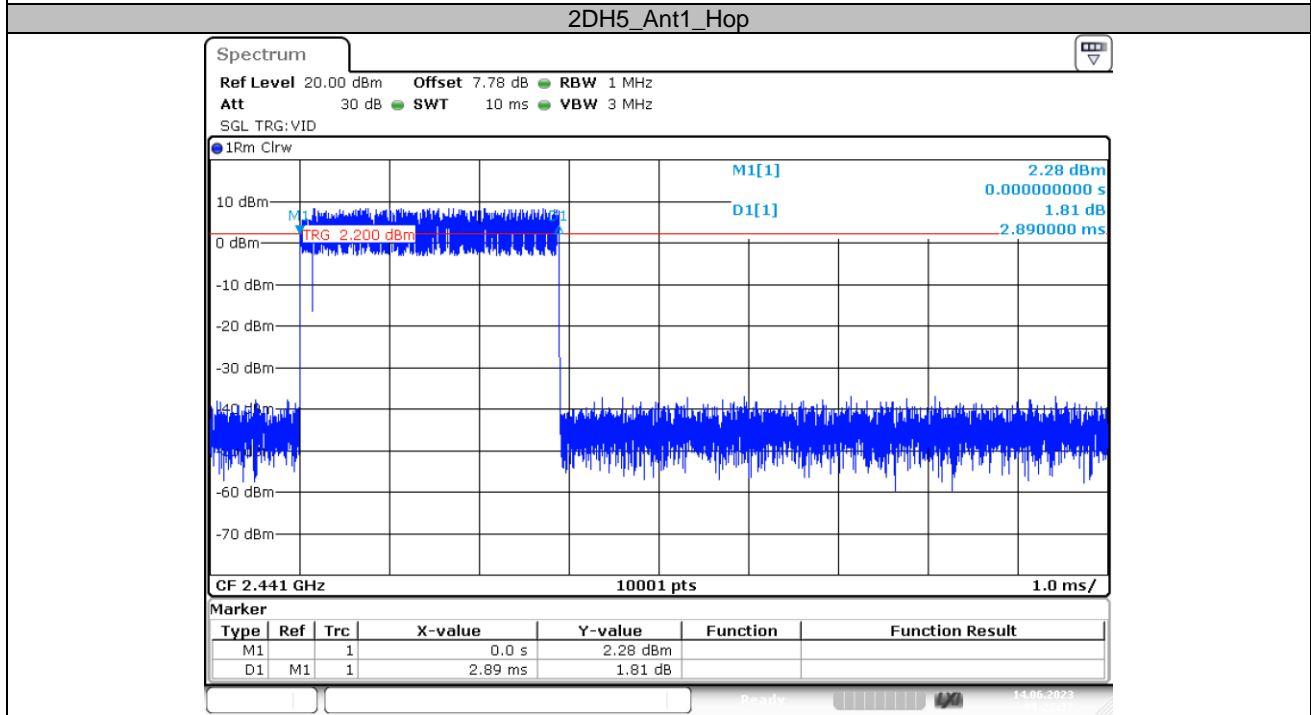

Date: 14.JUN.2023 09:22:37

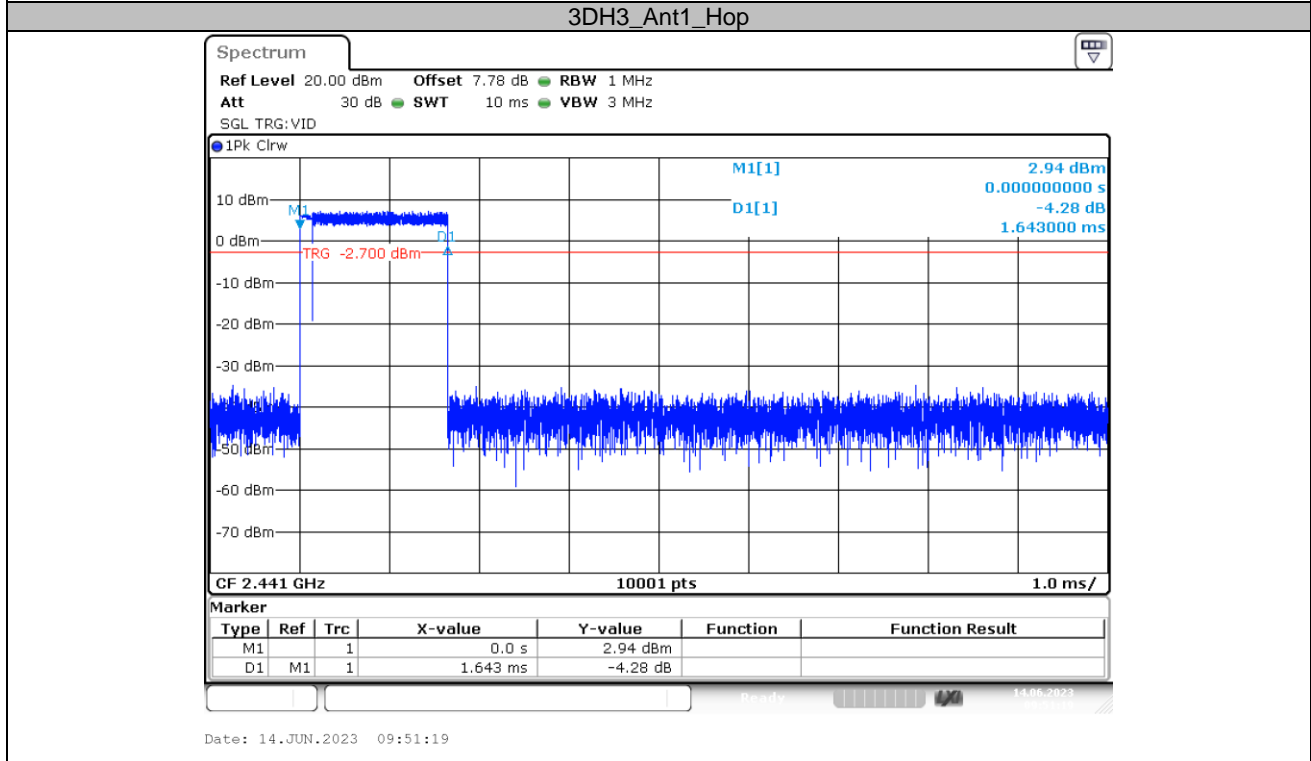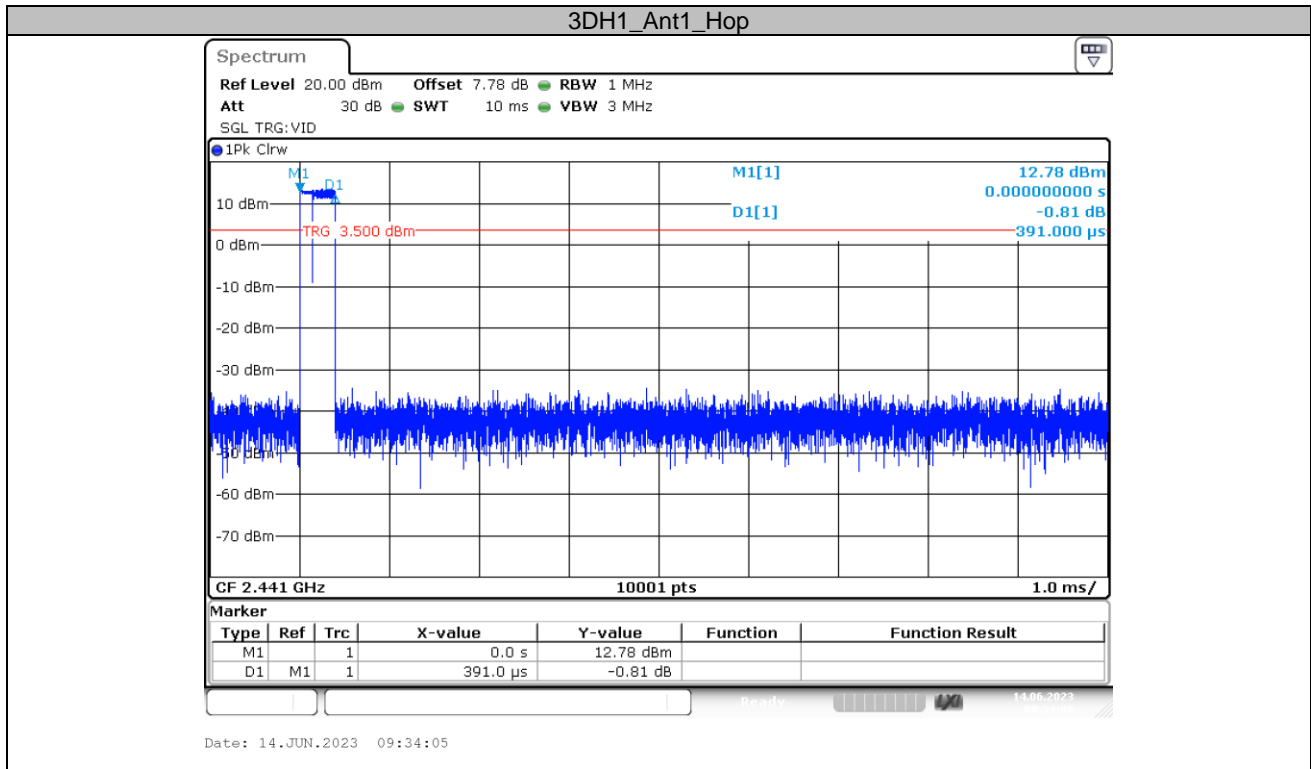

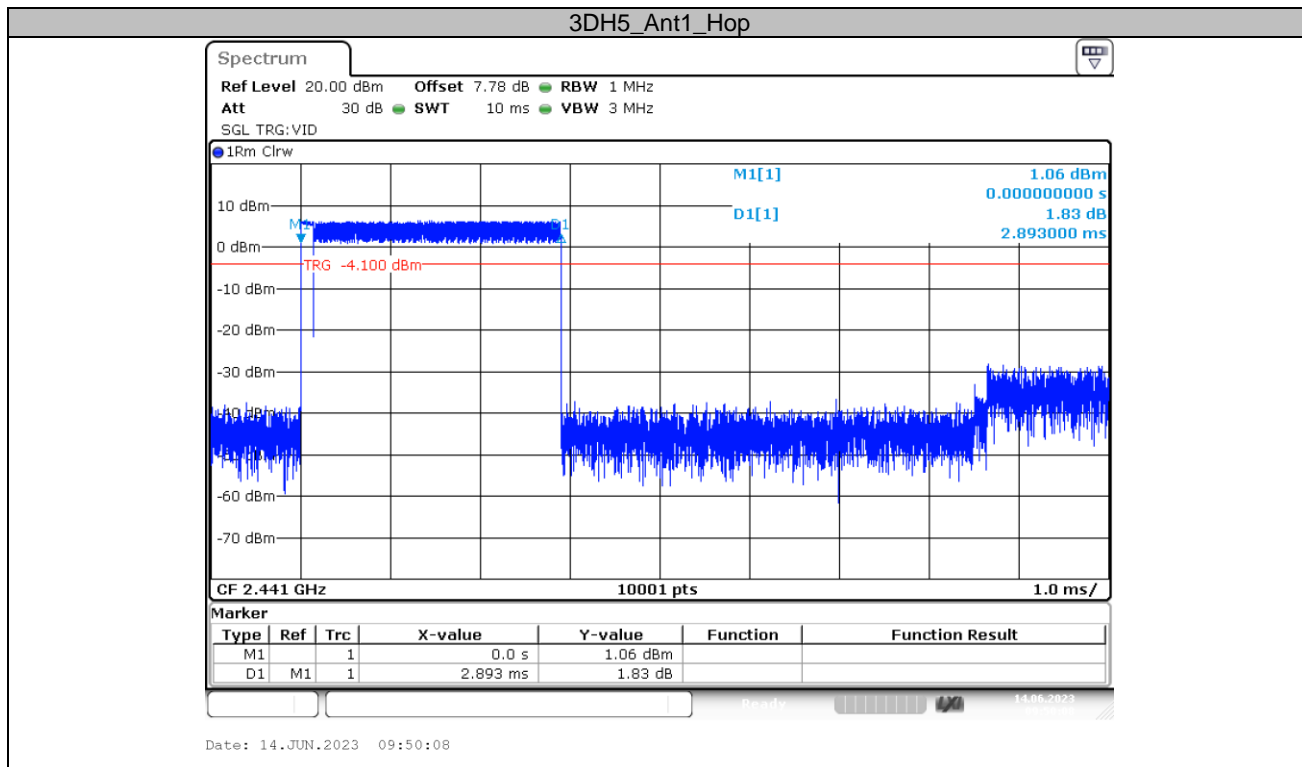

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |

15.209 Limit


| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|------------------|--------------------|---|----------|
| | | μV/m | dB(μV)/m |
| 0.009-0.490 | 300 | 2400/F(KHz) | / |
| 0.490-1.705 | 30 | 24000/F(KHz) | / |
| 1.705-30 | 30 | 30 | 29.5 |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | 74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average) | |

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

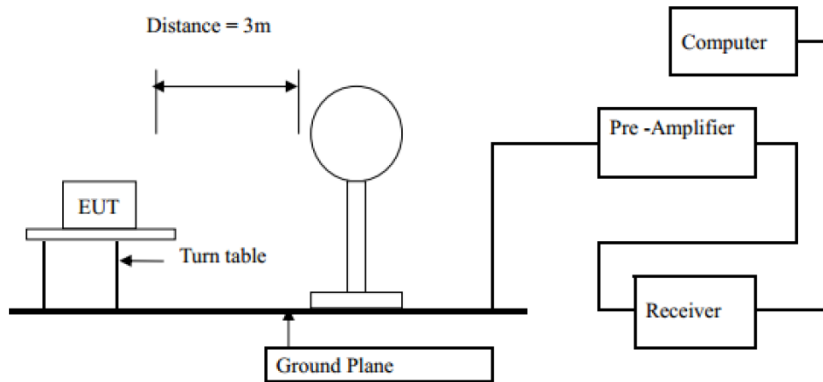

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

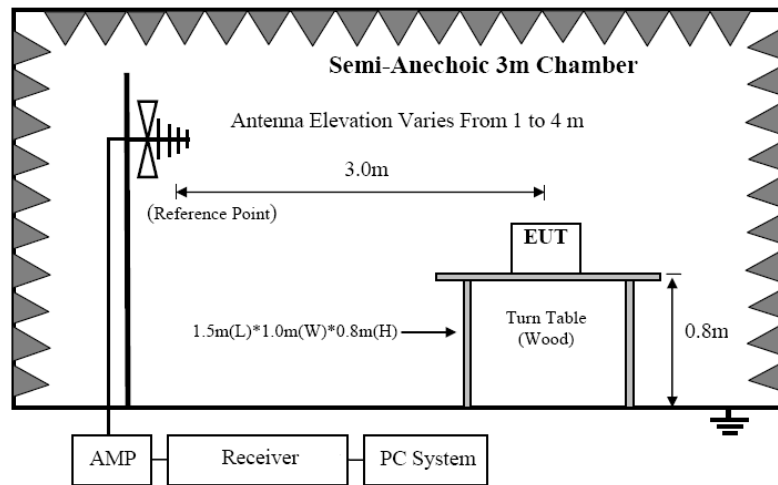

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

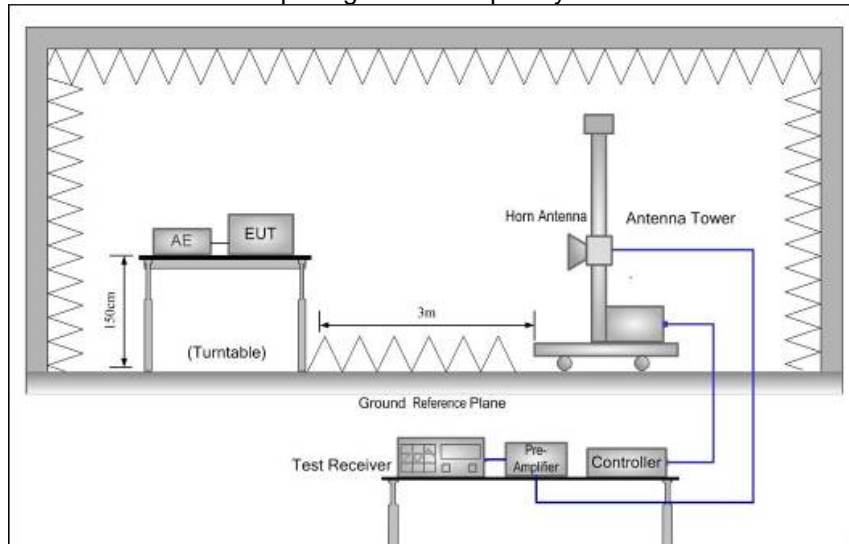

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

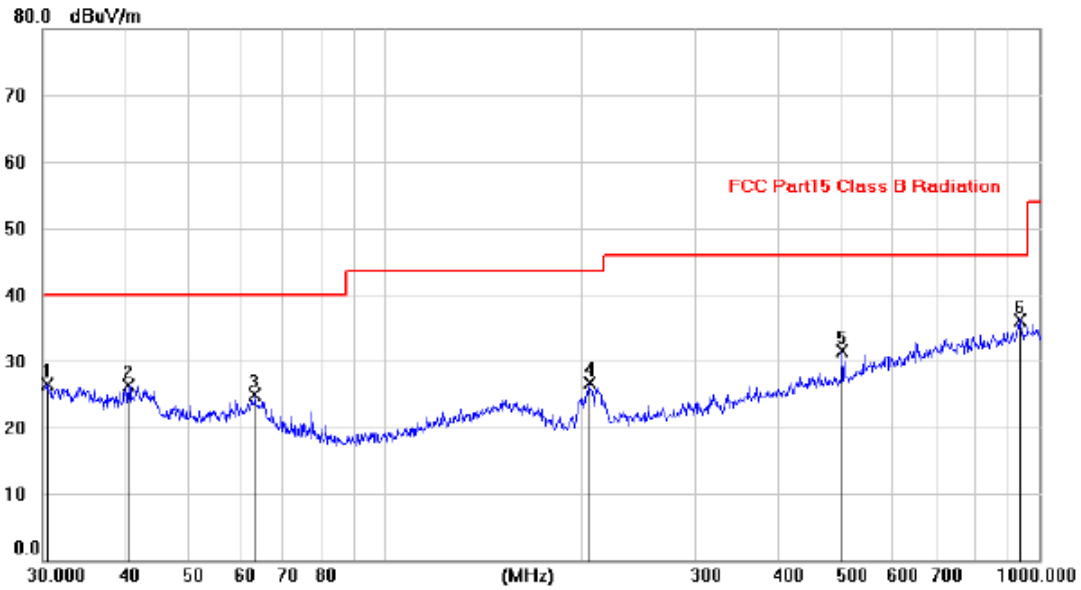


| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Margin | Antenna | Table |
|-----|-----|----------|---------|---------|----------|--------|--------|---------|--------|
| | | MHz | Level | Factor | ment | | | Height | Degree |
| | | | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree |
| 1 | | 30.5342 | 12.96 | 13.56 | 26.52 | 40.00 | -13.48 | | |
| 2 | | 40.6113 | 11.96 | 14.39 | 26.35 | 40.00 | -13.65 | | |
| 3 | | 63.3873 | 12.35 | 12.51 | 24.86 | 40.00 | -15.14 | | |
| 4 | | 204.9551 | 15.65 | 10.98 | 26.63 | 43.50 | -16.87 | | |
| 5 | | 500.0088 | 13.24 | 18.21 | 31.45 | 46.00 | -14.55 | | |
| 6 | * | 936.5310 | 11.68 | 24.52 | 36.20 | 46.00 | -9.80 | | |

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

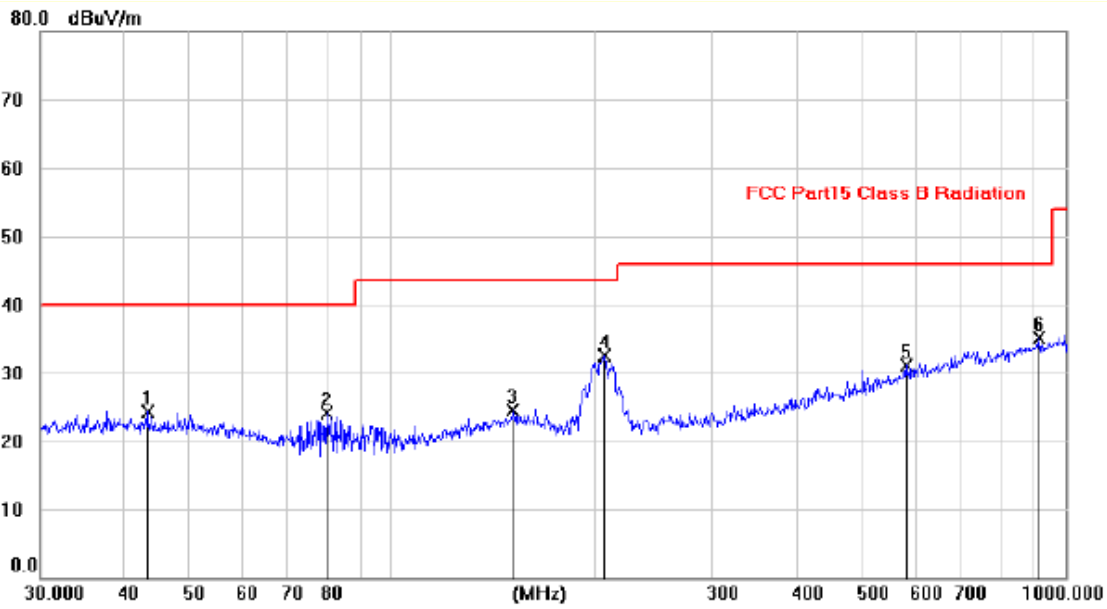

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Antenna Height | Table Degree | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree | Comment |
| 1 | | 43.2826 | 10.03 | 14.22 | 24.25 | 40.00 | -15.75 | | | peak |
| 2 | | 80.0337 | 14.15 | 9.89 | 24.04 | 40.00 | -15.96 | | | peak |
| 3 | | 151.2079 | 9.40 | 15.06 | 24.46 | 43.50 | -19.04 | | | peak |
| 4 | | 206.9047 | 21.42 | 11.02 | 32.44 | 43.50 | -11.06 | | | peak |
| 5 | | 580.4990 | 11.20 | 19.84 | 31.04 | 46.00 | -14.96 | | | peak |
| 6 | * | 915.6405 | 10.76 | 24.25 | 35.01 | 46.00 | -10.99 | | | peak |

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz

| Test Mode: GFSK TX Low | | | | | | | | | |
|-------------------------|---------------------|-------------|-----------------------|----------------|-----------------|-----------------|----------------|-------------|--------|
| Freq (MHz) | Read Level (dBuV/m) | Polar (H/V) | Antenna Factor (dB/m) | Cable loss(dB) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 4804 | 44.28 | V | 33.95 | 10.18 | 34.26 | 54.15 | 74 | -19.85 | PK |
| 4804 | 39.15 | V | 33.95 | 10.18 | 34.26 | 49.02 | 54 | -4.98 | AV |
| 7206 | / | / | / | / | / | / | / | / | / |
| 9608 | / | / | / | / | / | / | / | / | / |
| 4804 | 44.62 | H | 33.95 | 10.18 | 34.26 | 54.49 | 74 | -19.51 | PK |
| 4804 | 35.20 | H | 33.95 | 10.18 | 34.26 | 45.07 | 54 | -8.93 | AV |
| 7206 | / | / | / | / | / | / | / | / | / |
| 9608 | / | / | / | / | / | / | / | / | / |
| Test Mode: GFSK TX Mid | | | | | | | | | |
| 4882 | 43.11 | V | 33.93 | 10.2 | 34.29 | 52.95 | 74 | -21.05 | PK |
| 4882 | 34.45 | V | 33.93 | 10.2 | 34.29 | 44.29 | 54 | -9.71 | AV |
| 7323 | / | / | / | / | / | / | / | / | / |
| 9764 | / | / | / | / | / | / | / | / | / |
| 4882 | 44.90 | H | 33.93 | 10.2 | 34.29 | 54.74 | 74 | -19.26 | PK |
| 4882 | 35.16 | H | 33.93 | 10.2 | 34.29 | 45.00 | 54 | -9.00 | AV |
| 7323 | / | / | / | / | / | / | / | / | / |
| 9764 | / | / | / | / | / | / | / | / | / |
| Test Mode: GFSK TX High | | | | | | | | | |
| 4960 | 44.03 | V | 33.98 | 10.22 | 34.25 | 53.98 | 74 | -20.02 | PK |
| 4960 | 33.17 | V | 33.98 | 10.22 | 34.25 | 43.12 | 54 | -10.88 | AV |
| 7440 | / | / | / | / | / | / | / | / | / |
| 9920 | / | / | / | / | / | / | / | / | / |
| 4960 | 41.77 | H | 33.98 | 10.22 | 34.25 | 51.72 | 74 | -22.28 | PK |
| 4960 | 32.39 | H | 33.98 | 10.22 | 34.25 | 42.34 | 54 | -11.66 | AV |
| 7440 | / | / | / | / | / | / | / | / | / |
| 9920 | / | / | / | / | / | / | / | / | / |

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor


2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

| Test Mode: $\pi/4$ DQPSK TX Low | | | | | | | | | |
|---|---------------------|-------------|-----------------------|----------------|-----------------|-----------------|----------------|-------------|--------|
| Freq (MHz) | Read Level (dBuV/m) | Polar (H/V) | Antenna Factor (dB/m) | Cable loss(dB) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 4804 | 44.05 | V | 33.95 | 10.18 | 34.26 | 53.92 | 74 | -20.08 | PK |
| 4804 | 37.91 | V | 33.95 | 10.18 | 34.26 | 47.78 | 54 | -6.22 | AV |
| 7206 | / | / | / | / | / | / | / | / | / |
| 9608 | / | / | / | / | / | / | / | / | / |
| 4804 | 43.75 | H | 33.95 | 10.18 | 34.26 | 53.62 | 74 | -20.38 | PK |
| 4804 | 33.60 | H | 33.95 | 10.18 | 34.26 | 43.47 | 54 | -10.53 | AV |
| 7206 | / | / | / | / | / | / | / | / | / |
| 9608 | / | / | / | / | / | / | / | / | / |
| Test Mode: $\pi/4$ DQPSK TX Mid | | | | | | | | | |
| 4882 | 41.68 | V | 33.93 | 10.2 | 34.29 | 51.52 | 74 | -22.48 | PK |
| 4882 | 34.59 | V | 33.93 | 10.2 | 34.29 | 44.43 | 54 | -9.57 | AV |
| 7323 | / | / | / | / | / | / | / | / | / |
| 9764 | / | / | / | / | / | / | / | / | / |
| 4882 | 44.53 | H | 33.93 | 10.2 | 34.29 | 54.37 | 74 | -19.63 | PK |
| 4882 | 36.77 | H | 33.93 | 10.2 | 34.29 | 46.61 | 54 | -7.39 | AV |
| 7323 | / | / | / | / | / | / | / | / | / |
| 9764 | / | / | / | / | / | / | / | / | / |
| Test Mode: $\pi/4$ DQPSK TX High | | | | | | | | | |
| 4960 | 43.61 | V | 33.98 | 10.22 | 34.25 | 53.56 | 74 | -20.44 | PK |
| 4960 | 34.40 | V | 33.98 | 10.22 | 34.25 | 44.35 | 54 | -9.65 | AV |
| 7440 | / | / | / | / | / | / | / | / | / |
| 9920 | / | / | / | / | / | / | / | / | / |
| 4960 | 43.55 | H | 33.98 | 10.22 | 34.25 | 53.50 | 74 | -20.50 | PK |
| 4960 | 32.17 | H | 33.98 | 10.22 | 34.25 | 42.12 | 54 | -11.88 | AV |
| 7440 | / | / | / | / | / | / | / | / | / |
| 9920 | / | / | / | / | / | / | / | / | / |
| Note: | | | | | | | | | |
| 1, Result = Read level + Antenna factor + cable loss-Amp factor | | | | | | | | | |
| 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | | | | |

| Test Mode: 8DPSK TX Low | | | | | | | | | |
|---|---------------------|-------------|-----------------------|----------------|-----------------|-----------------|----------------|-------------|--------|
| Freq (MHz) | Read Level (dBuV/m) | Polar (H/V) | Antenna Factor (dB/m) | Cable loss(dB) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 4804 | 43.70 | V | 33.95 | 10.18 | 34.26 | 53.57 | 74 | -20.43 | PK |
| 4804 | 39.02 | V | 33.95 | 10.18 | 34.26 | 48.89 | 54 | -5.11 | AV |
| 7206 | / | / | / | / | / | / | / | / | / |
| 9608 | / | / | / | / | / | / | / | / | / |
| 4804 | 43.43 | H | 33.95 | 10.18 | 34.26 | 53.30 | 74 | -20.70 | PK |
| 4804 | 33.08 | H | 33.95 | 10.18 | 34.26 | 42.95 | 54 | -11.05 | AV |
| 7206 | / | / | / | / | / | / | / | / | / |
| 9608 | / | / | / | / | / | / | / | / | / |
| Test Mode: 8DPSK TX Mid | | | | | | | | | |
| 4882 | 42.87 | V | 33.93 | 10.2 | 34.29 | 52.71 | 74 | -21.29 | PK |
| 4882 | 35.03 | V | 33.93 | 10.2 | 34.29 | 44.87 | 54 | -9.13 | AV |
| 7323 | / | / | / | / | / | / | / | / | / |
| 9764 | / | / | / | / | / | / | / | / | / |
| 4882 | 44.79 | H | 33.93 | 10.2 | 34.29 | 54.63 | 74 | -19.37 | PK |
| 4882 | 35.26 | H | 33.93 | 10.2 | 34.29 | 45.10 | 54 | -8.90 | AV |
| 7323 | / | / | / | / | / | / | / | / | / |
| 9764 | / | / | / | / | / | / | / | / | / |
| Test Mode: 8DPSK TX High | | | | | | | | | |
| 4960 | 43.12 | V | 33.98 | 10.22 | 34.25 | 53.07 | 74 | -20.93 | PK |
| 4960 | 33.41 | V | 33.98 | 10.22 | 34.25 | 43.36 | 54 | -10.64 | AV |
| 7440 | / | / | / | / | / | / | / | / | / |
| 9920 | / | / | / | / | / | / | / | / | / |
| 4960 | 45.40 | H | 33.98 | 10.22 | 34.25 | 55.35 | 74 | -18.65 | PK |
| 4960 | 32.32 | H | 33.98 | 10.22 | 34.25 | 42.27 | 54 | -11.73 | AV |
| 7440 | / | / | / | / | / | / | / | / | / |
| 9920 | / | / | / | / | / | / | / | / | / |
| Note: | | | | | | | | | |
| 1, Result = Read level + Antenna factor + cable loss-Amp factor | | | | | | | | | |
| 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | | | | |


Conducted RF Spurious Emission

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

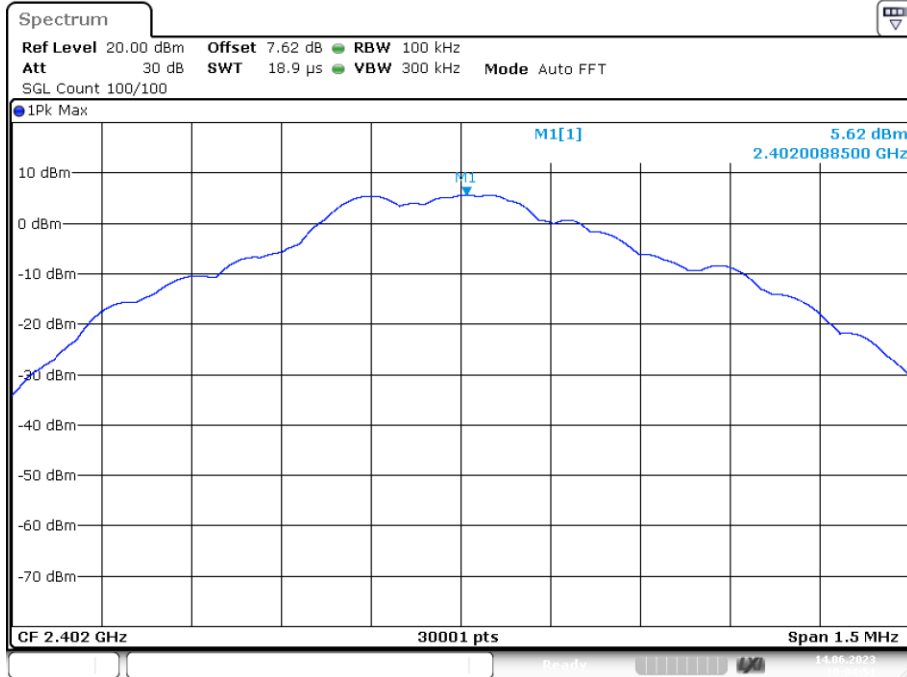


Date: 14.JUN.2023 10:04:51

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

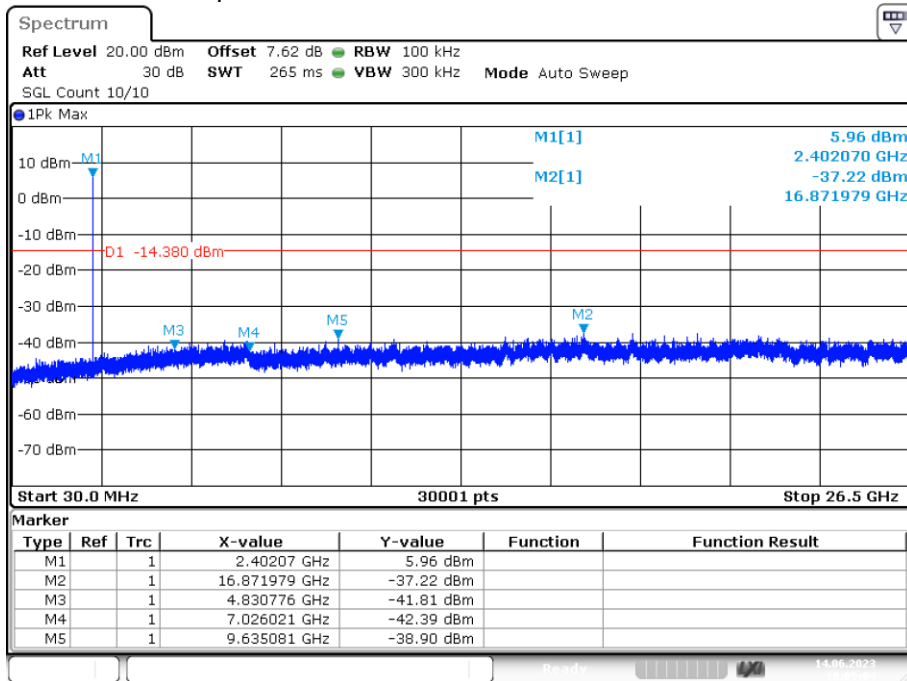


Date: 14.JUN.2023 10:05:05

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

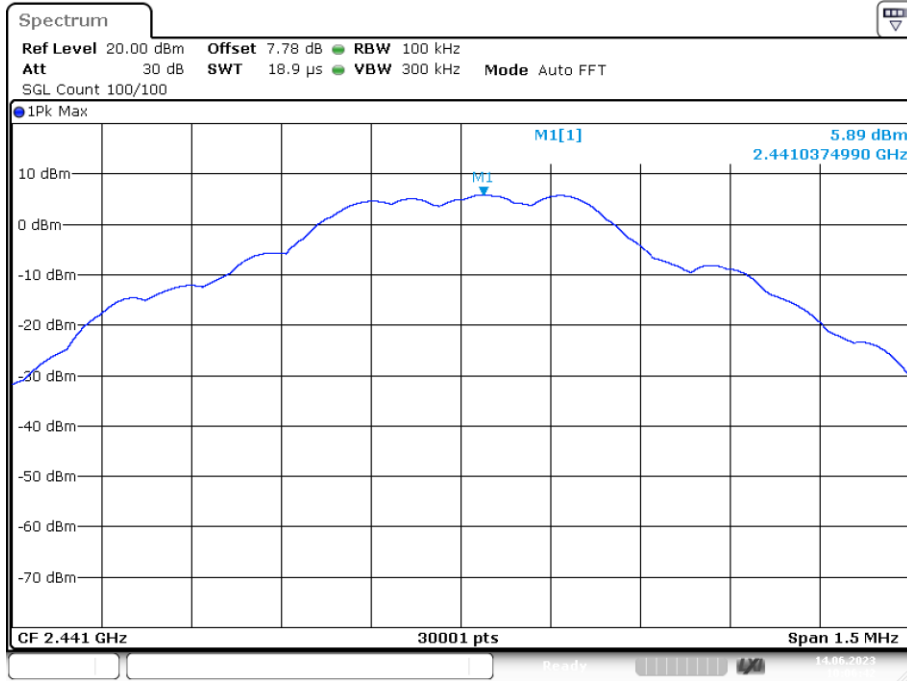


Date: 14.JUN.2023 10:06:42

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

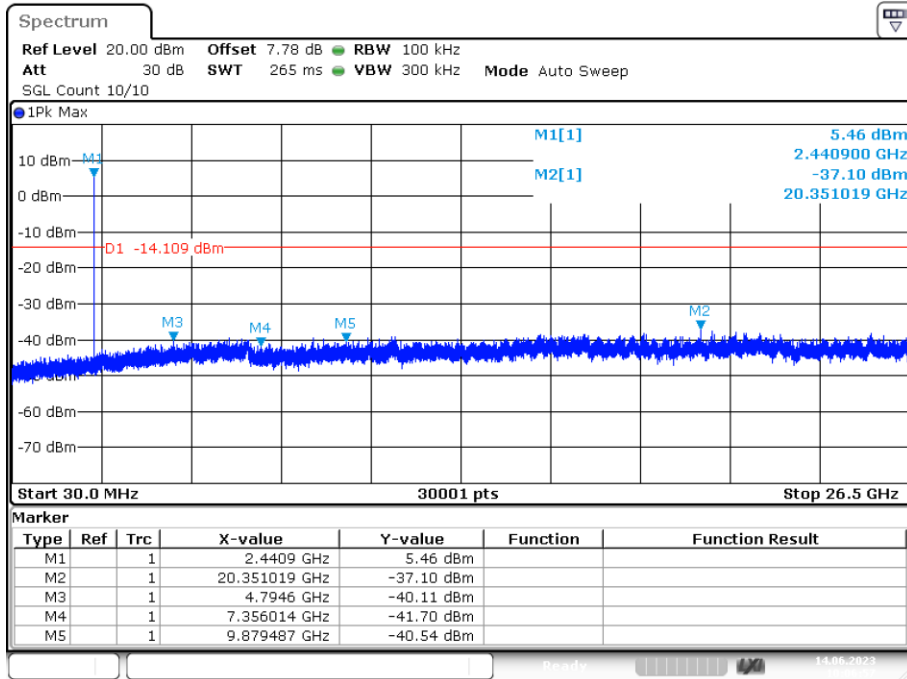


Date: 14.JUN.2023 10:06:56

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

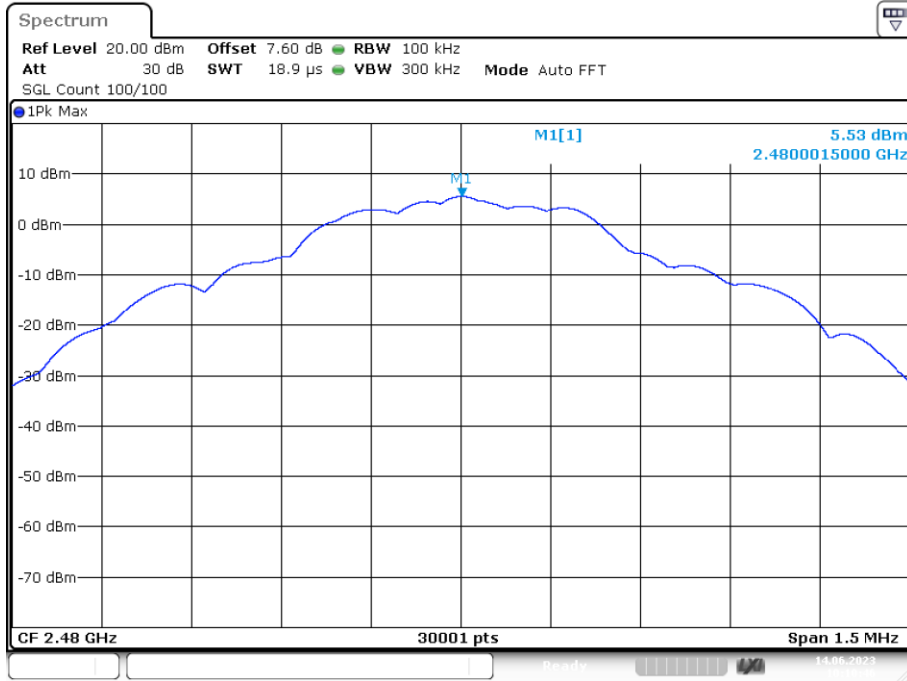


Date: 14.JUN.2023 10:10:46

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

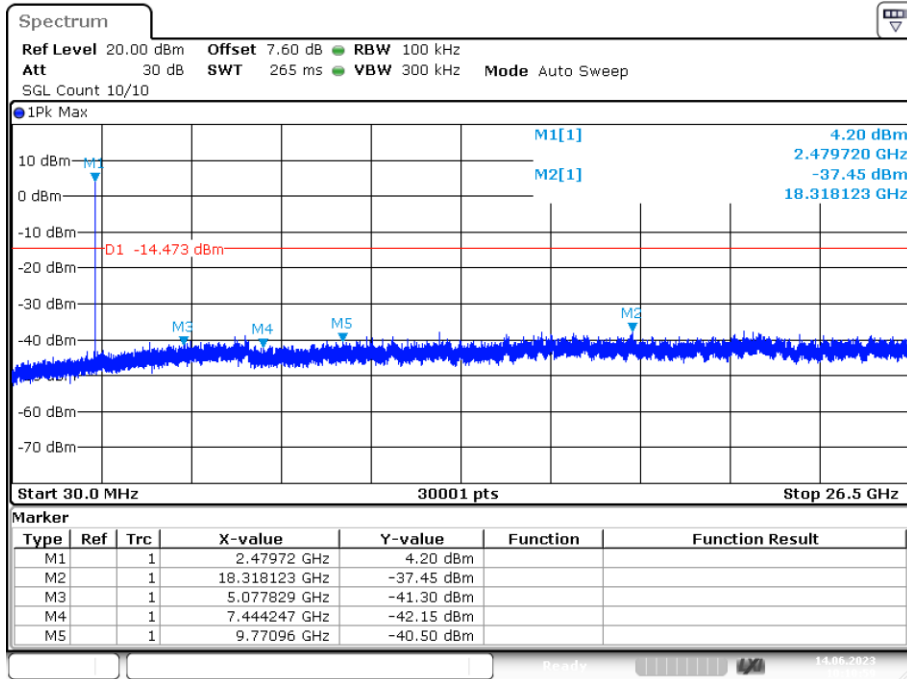


Date: 14.JUN.2023 10:11:00

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

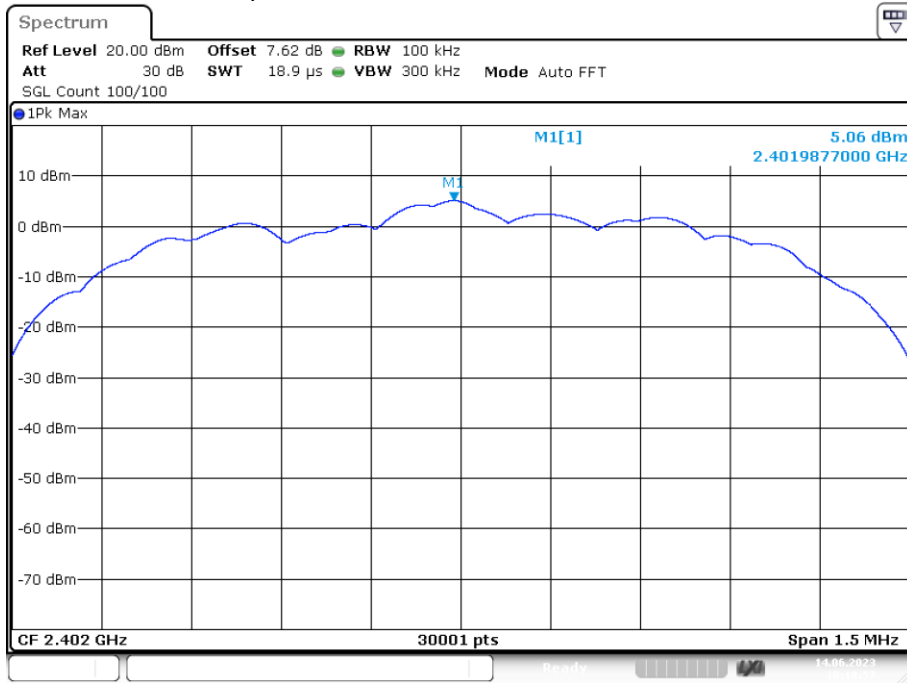


Date: 14.JUN.2023 10:18:56

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

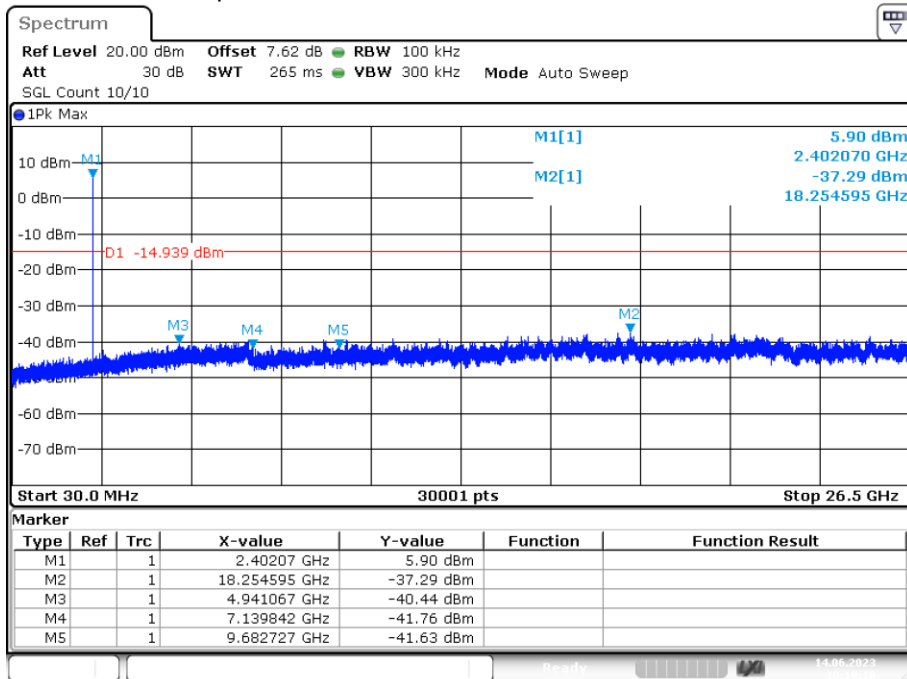


Date: 14.JUN.2023 10:19:10

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

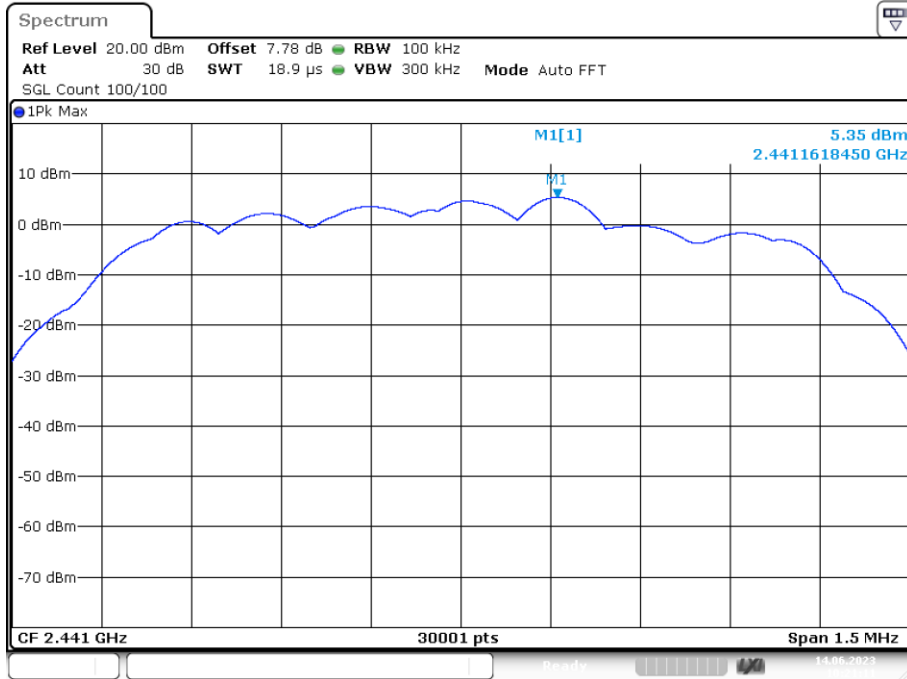


Date: 14.JUN.2023 10:21:11

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

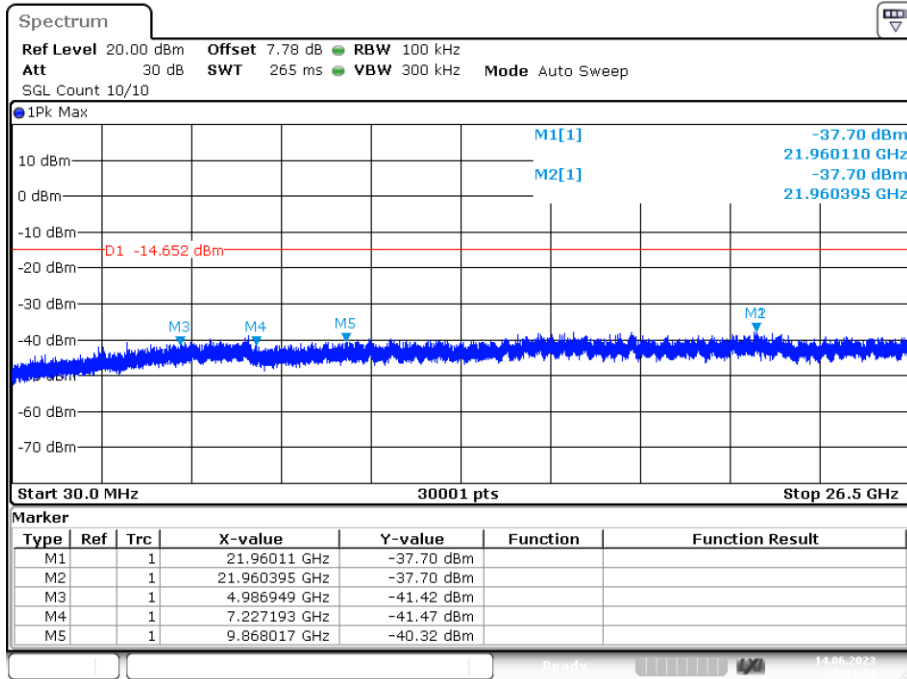


Date: 14.JUN.2023 10:21:24

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

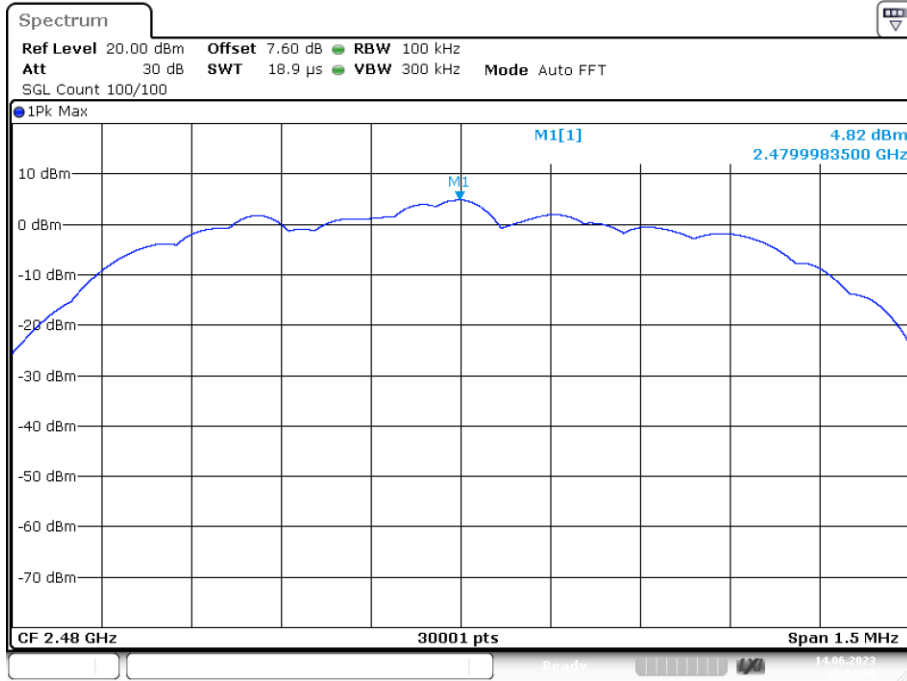


Date: 14.JUN.2023 10:24:00

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

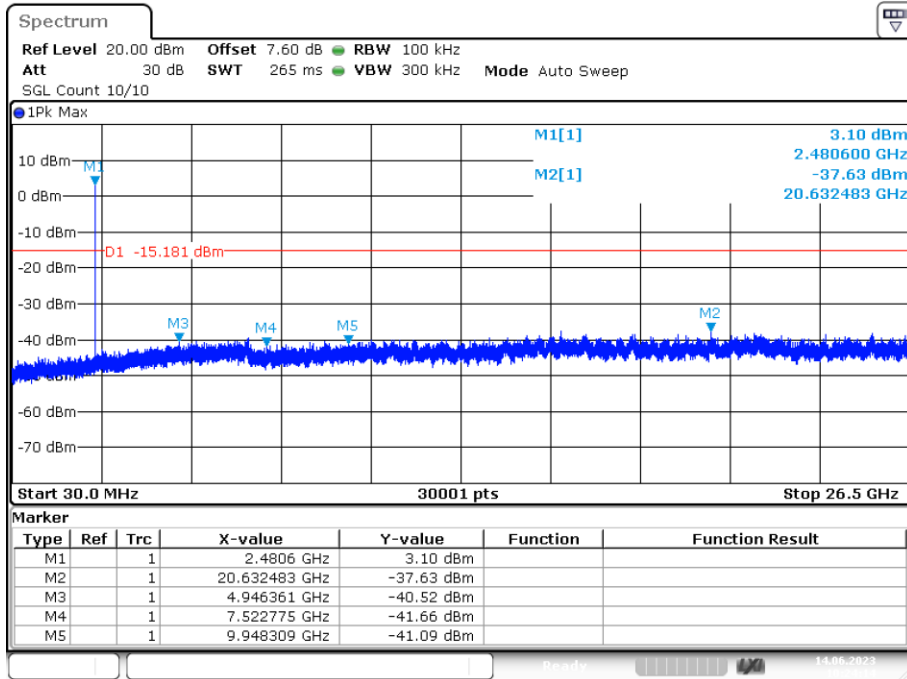


Date: 14.JUN.2023 10:24:14

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

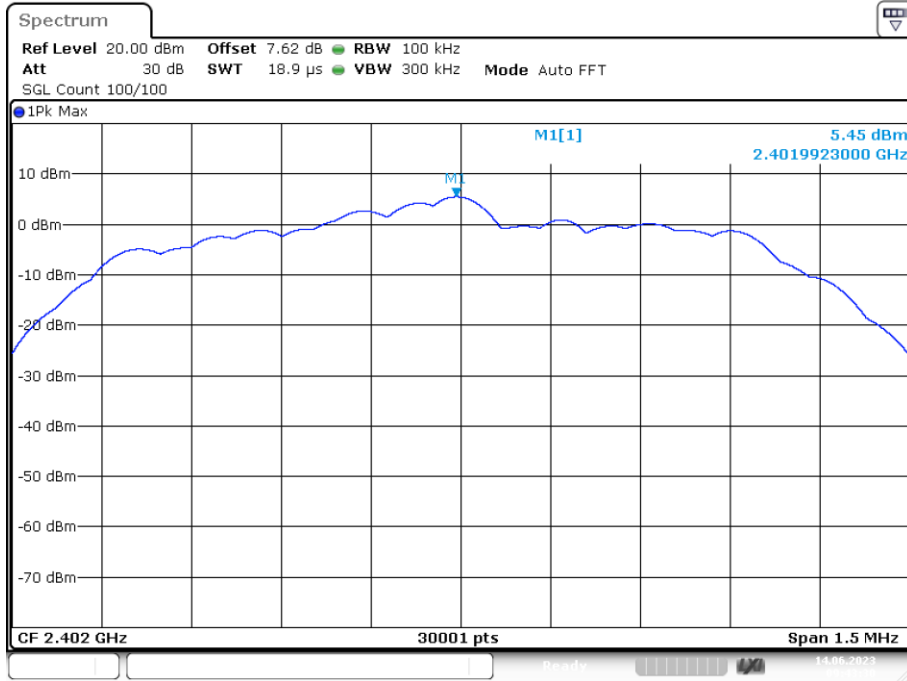


Date: 14. JUN. 2023 09:43:29

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

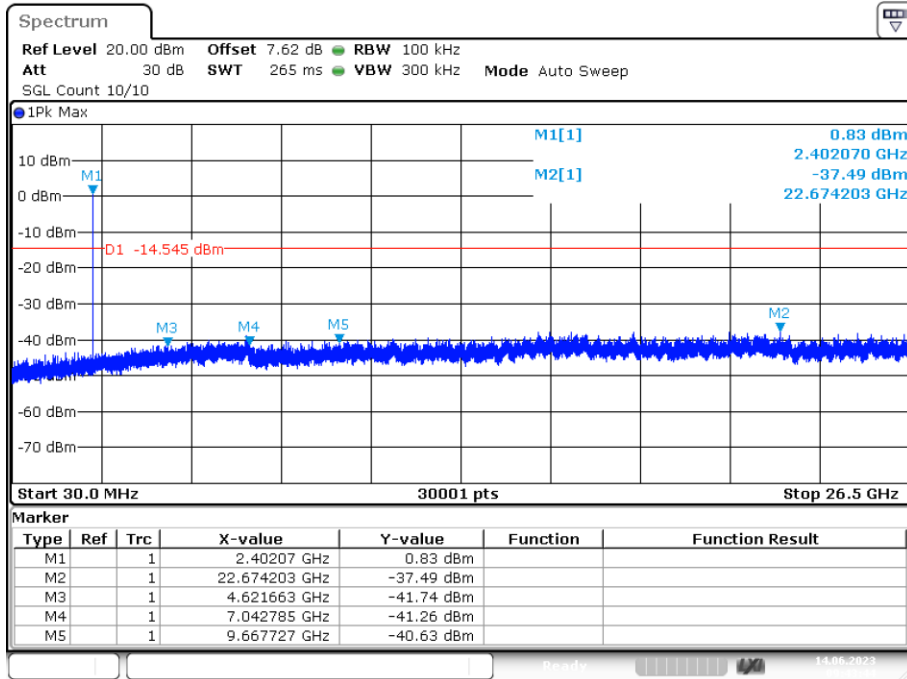


Date: 14. JUN. 2023 09:43:43

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

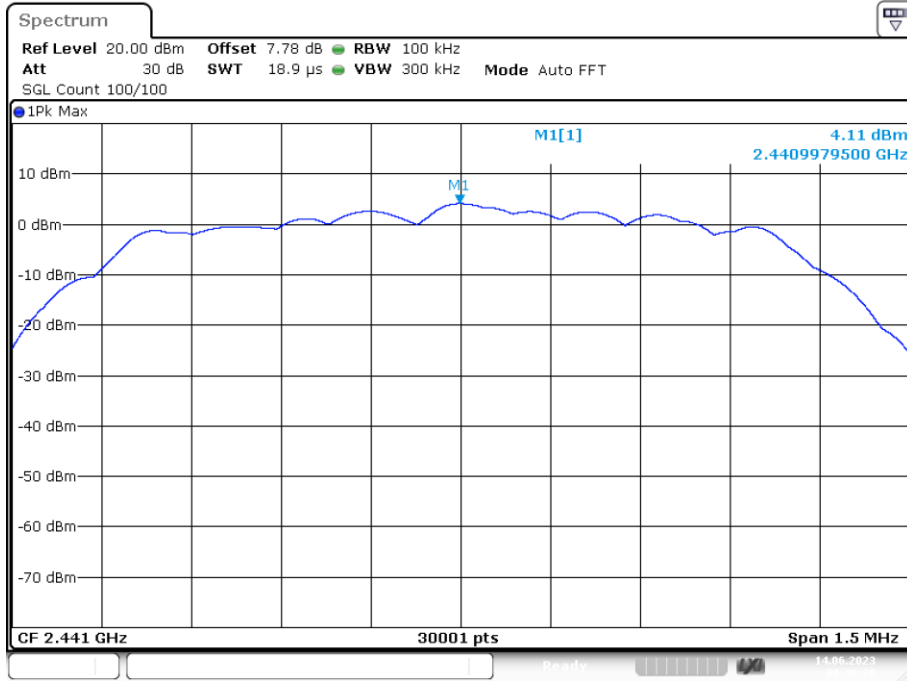


Date: 14.JUN.2023 09:46:19

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

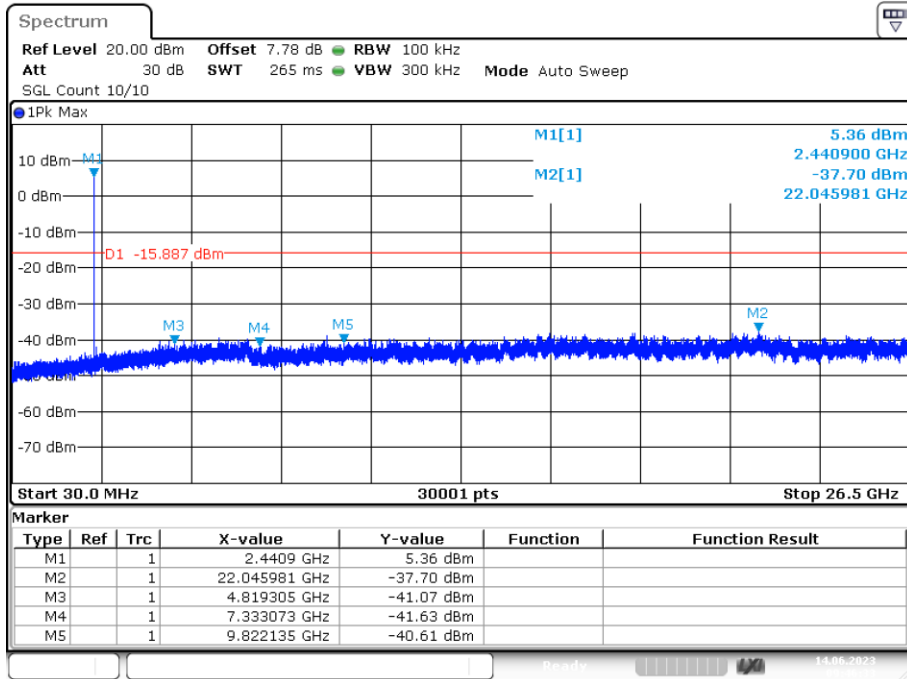


Date: 14.JUN.2023 09:46:33

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

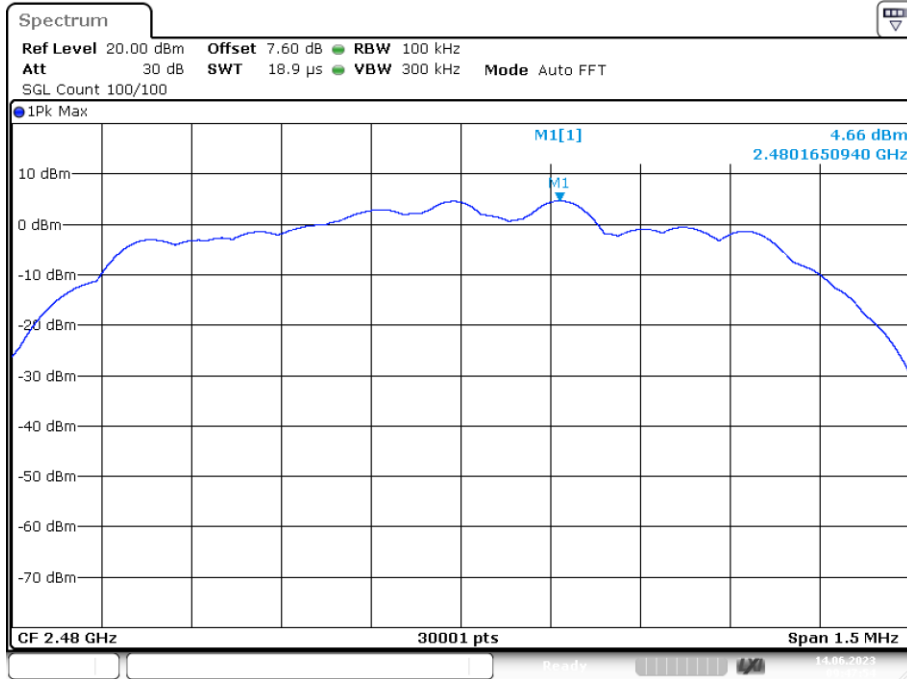

Date: 14. JUN. 2023 09:47:54


Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

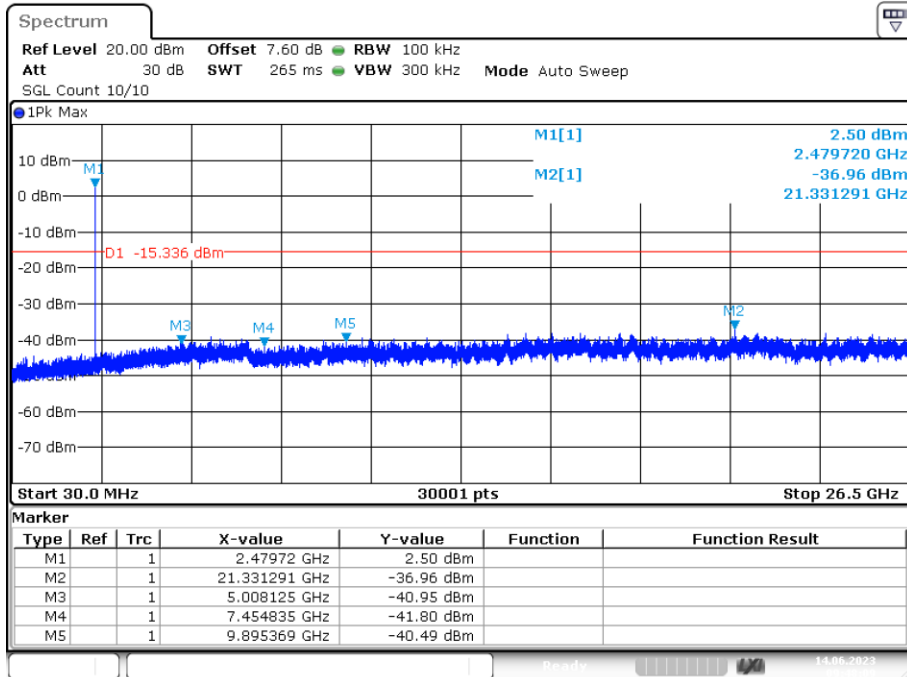

Date: 14. JUN. 2023 09:48:08

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

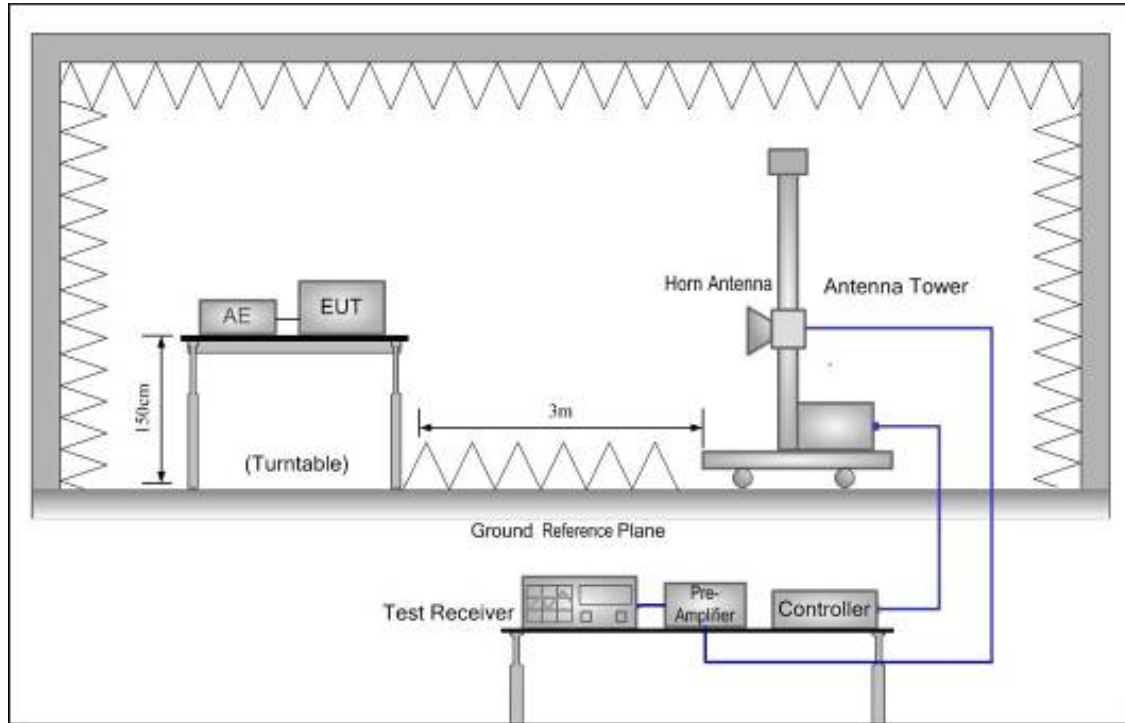

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

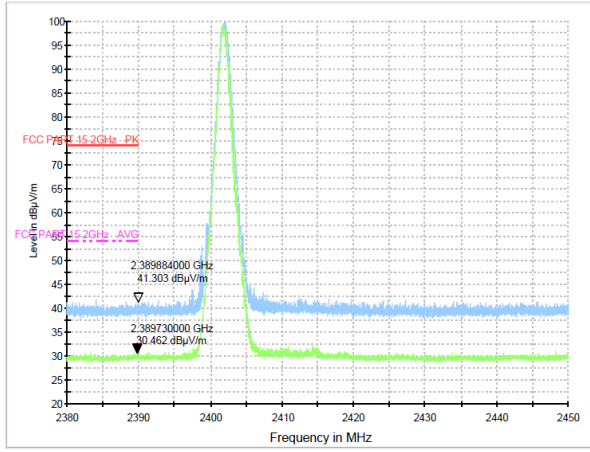


Test Mode: GFSK-High Hopping-off

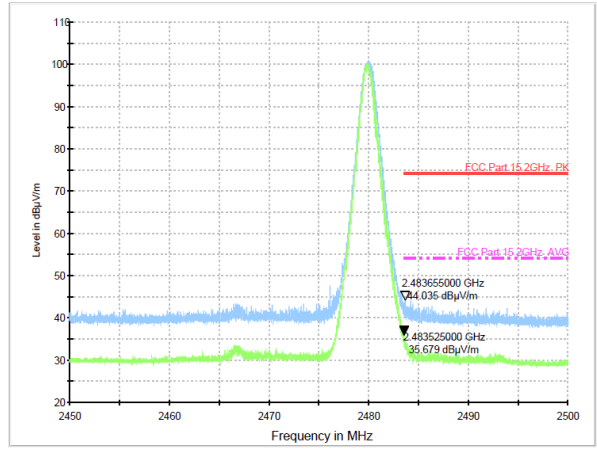


Test Mode: GFSK-Low Hopping-on

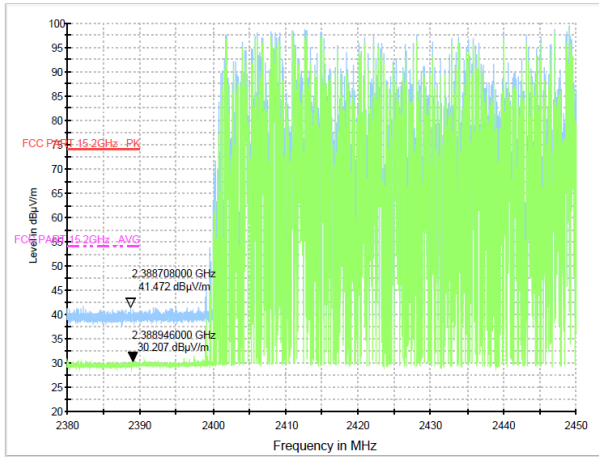


Test Mode: GFSK-High Hopping-on

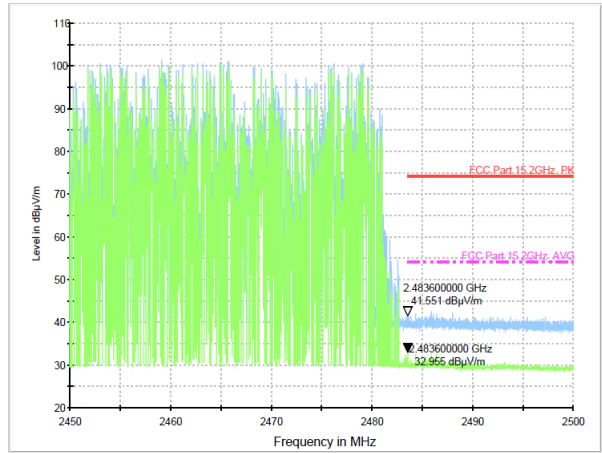


Test Mode: $\pi/4$ DQPSK-Low Hopping-off

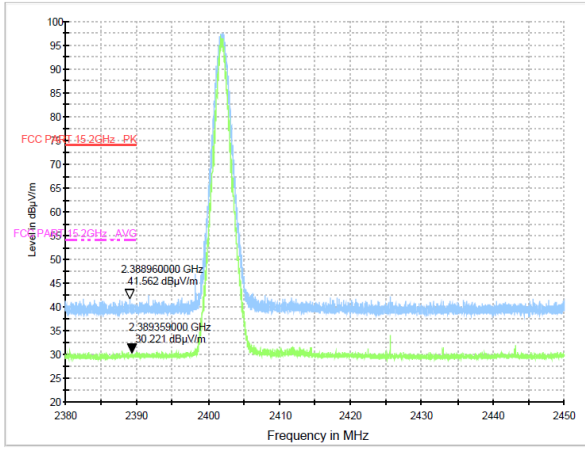

Test Mode: $\pi/4$ DQPSK-High Hopping-off

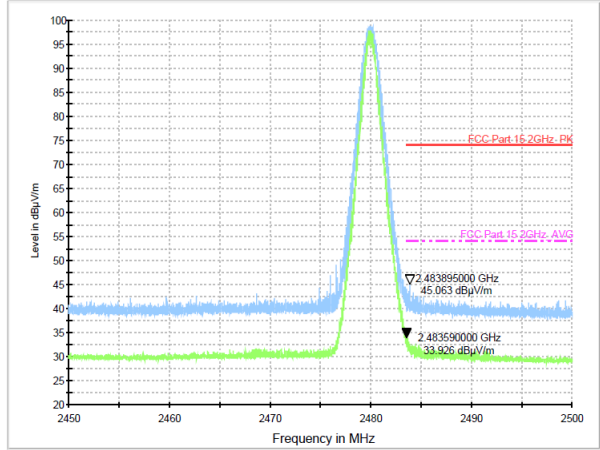

Test Mode: $\pi/4$ DQPSK-Low Hopping-on

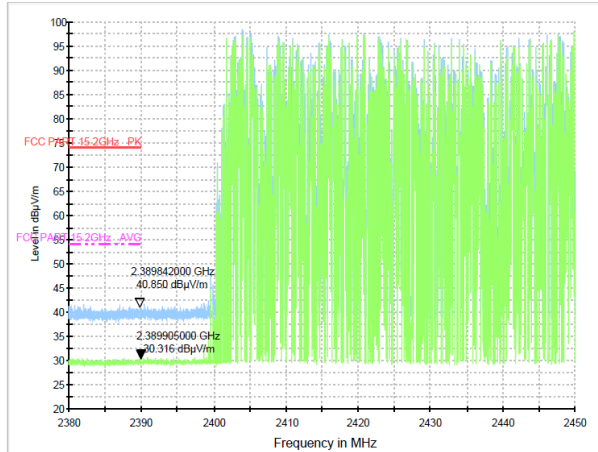

Test Mode: $\pi/4$ DQPSK-High Hopping-on

