




### PSD NVNT n20 5825MHz Ant2

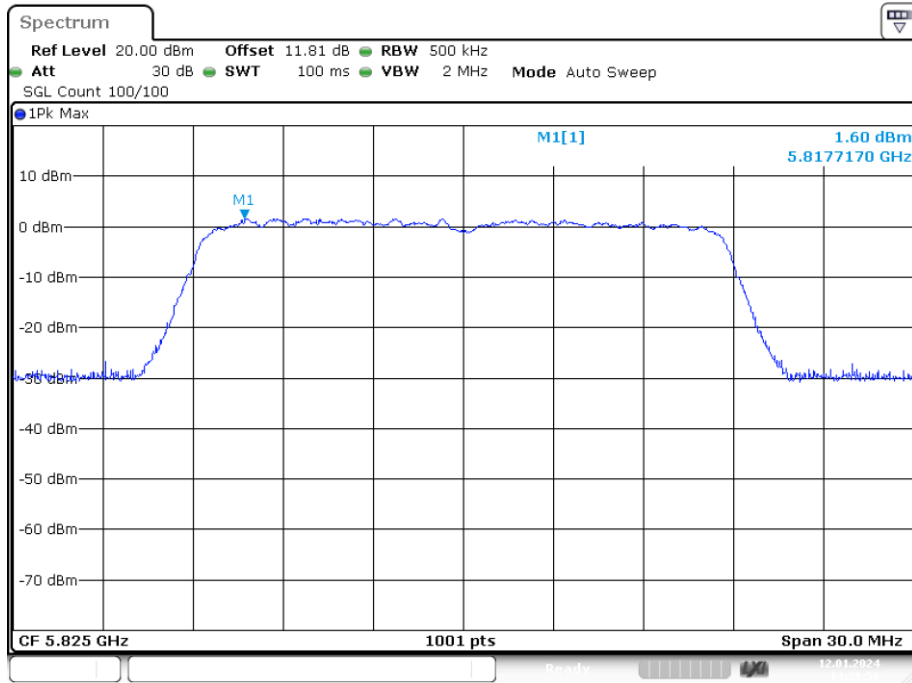

### PSD NVNT n40 5755MHz Ant2

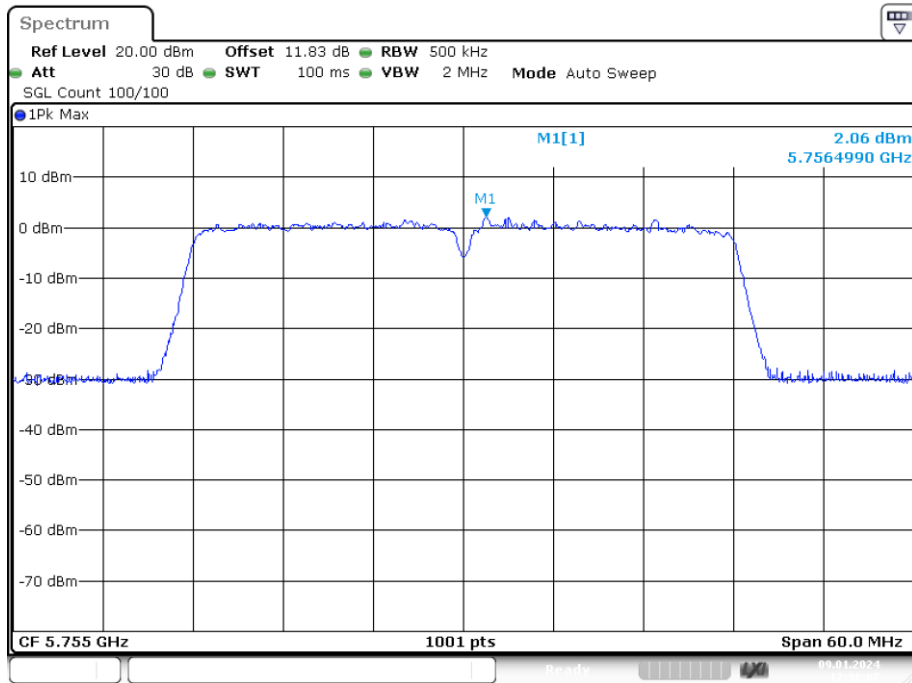


### PSD NVNT n40 5795MHz Ant2

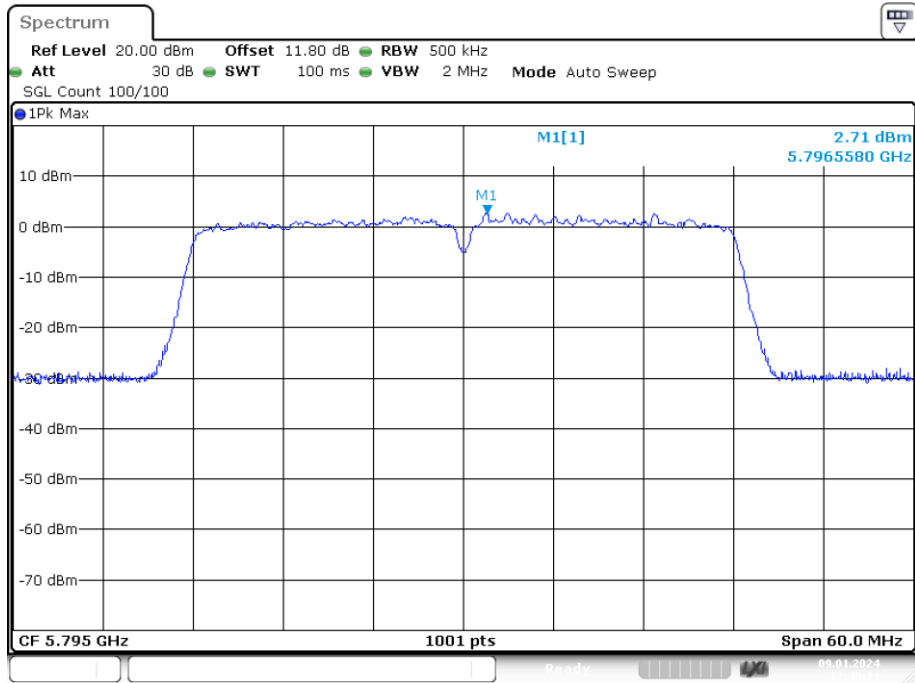

Date: 9.JAN.2024 17:40:33

## 4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205, RSS-Gen §8.9																							
Test Method:	ANSI C63.10:2013																							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																							
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>				Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																				
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																				
	AV	1MHz	3MHz	Average Value																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>68.2</td> <td>Peak Value</td> </tr> </tbody> </table> <p>Undesirable emission limits:</p> <p>(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p>				Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																						
30MHz-88MHz	40.0	Quasi-peak Value																						
88MHz-216MHz	43.5	Quasi-peak Value																						
216MHz-960MHz	46.0	Quasi-peak Value																						
960MHz-1GHz	54.0	Quasi-peak Value																						
Above 1GHz	54.0	Average Value																						
	68.2	Peak Value																						
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>																							
Test setup:	Above 1GHz																							

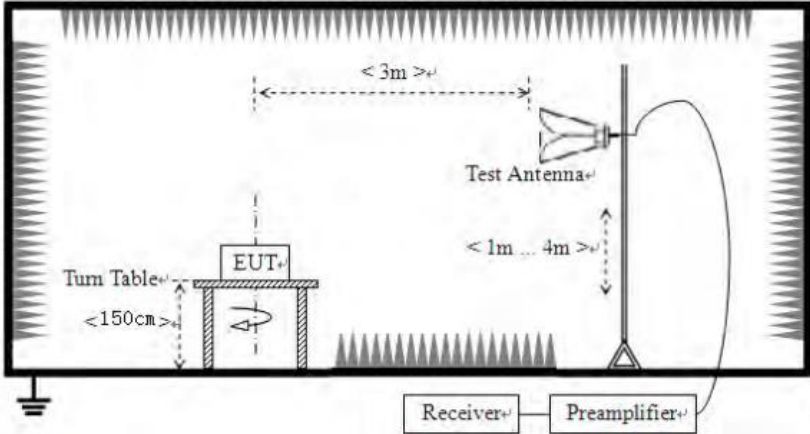	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Remark:**

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

**Measurement Data:****Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.99	17.18	54.17	68.20	-14.03	PK
V	5150.00	36.20	17.18	53.38	68.20	-14.82	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.89	17.18	42.07	54.00	-11.93	AV
V	5150.00	23.42	17.18	40.60	54.00	-13.40	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.31	17.18	51.49	68.20	-16.71	PK
V	5350.00	34.44	17.18	51.62	68.20	-16.58	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.53	17.18	43.71	54.00	-10.29	AV
V	5350.00	24.23	17.18	41.41	54.00	-12.59	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.52	17.18	52.70	68.20	-15.50	PK
V	5150.00	35.82	17.18	53.00	68.20	-15.20	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	28.01	17.18	45.19	54.00	-8.81	AV
V	5150.00	23.45	17.18	40.63	54.00	-13.37	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.74	17.18	52.92	68.20	-15.28	PK
V	5350.00	34.36	17.18	51.54	68.20	-16.66	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.25	17.18	42.43	54.00	-11.57	AV
V	5350.00	23.90	17.18	41.08	54.00	-12.92	AV

Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.04	17.18	54.22	68.20	-13.98	PK
V	5150.00	33.65	17.18	50.83	68.20	-17.37	PK
Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.67	17.18	41.85	54.00	-12.15	AV
V	5150.00	25.27	17.18	42.45	54.00	-11.55	AV
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.85	17.18	51.03	68.20	-17.17	PK
V	5350.00	36.71	17.18	53.89	68.20	-14.31	PK
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.20	17.18	44.38	54.00	-9.62	AV
V	5350.00	23.45	17.18	40.63	54.00	-13.37	AV

Mode:		802.11ax20		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.20	17.18	52.38	68.20	-15.82	PK
V	5150.00	33.63	17.18	50.81	68.20	-17.39	PK
Mode:		802.11ax20		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.39	17.18	44.57	54.00	-9.43	AV
V	5150.00	26.95	17.18	44.13	54.00	-9.87	AV
Mode:		802.11ax20		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.13	17.18	52.31	68.20	-15.89	PK
V	5350.00	35.30	17.18	52.48	68.20	-15.72	PK
Mode:		802.11ax20		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.51	17.18	43.69	54.00	-10.31	AV
V	5350.00	26.92	17.18	44.10	54.00	-9.90	AV



Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.98	17.18	51.16	68.20	-17.04	PK
V	5150.00	34.05	17.18	51.23	68.20	-16.97	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.89	17.18	42.07	54.00	-11.93	AV
V	5150.00	25.56	17.18	42.74	54.00	-11.26	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.80	17.18	51.98	68.20	-16.22	PK
V	5350.00	34.32	17.18	51.50	68.20	-16.70	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.22	17.18	43.40	54.00	-10.60	AV
V	5350.00	26.65	17.18	43.83	54.00	-10.17	AV

Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.15	17.18	52.33	68.20	-15.87	PK
V	5150.00	35.33	17.18	52.51	68.20	-15.69	PK
Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.14	17.18	44.32	54.00	-9.68	AV
V	5150.00	25.48	17.18	42.66	54.00	-11.34	AV
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.86	17.18	53.04	68.20	-15.16	PK
V	5350.00	35.45	17.18	52.63	68.20	-15.57	PK
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.33	17.18	42.51	54.00	-11.49	AV
V	5350.00	23.68	17.18	40.86	54.00	-13.14	AV

Mode:		802.11ax40		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.89	17.18	51.07	68.20	-17.13	PK
V	5150.00	33.27	17.18	50.45	68.20	-17.75	PK
Mode:		802.11ax40		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	28.16	17.18	45.34	54.00	-8.66	AV
V	5150.00	27.12	17.18	44.30	54.00	-9.70	AV
Mode:		802.11ax40		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.05	17.18	54.23	68.20	-13.97	PK
V	5350.00	35.39	17.18	52.57	68.20	-15.63	PK
Mode:		802.11ax40		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.82	17.18	43.00	54.00	-11.00	AV
V	5350.00	26.49	17.18	43.67	54.00	-10.33	AV

Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.95	17.18	53.13	68.20	-15.07	PK
V	5150.00	32.93	17.18	50.11	68.20	-18.09	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	26.62	17.18	43.80	54.00	-10.20	AV
V	5150.00	25.22	17.18	42.40	54.00	-11.60	AV
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.32	17.18	52.50	68.20	-15.70	PK
V	5350.00	36.48	17.18	53.66	68.20	-14.54	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.80	17.18	41.98	54.00	-12.02	AV
V	5350.00	26.04	17.18	43.22	54.00	-10.78	AV

Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.10	17.18	54.28	68.20	-13.92	PK
V	5150.00	34.79	17.18	51.97	68.20	-16.23	PK
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.63	17.18	42.81	54.00	-11.19	AV
V	5150.00	26.25	17.18	43.43	54.00	-10.57	AV
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.82	17.18	51.00	68.20	-17.20	PK
V	5350.00	34.69	17.18	51.87	68.20	-16.33	PK
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.10	17.18	42.28	54.00	-11.72	AV
V	5350.00	24.93	17.18	42.11	54.00	-11.89	AV

**Band2**

Mode:		802.11a		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.68	17.19	51.87	68.20	-16.33	PK
V	5150.00	35.96	17.19	53.15	68.20	-15.05	PK
Mode:		802.11a		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.83	17.19	45.02	54.00	-8.98	AV
V	5150.00	23.83	17.19	41.02	54.00	-12.98	AV
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.83	17.19	54.02	68.20	-14.18	PK
V	5350.00	35.62	17.19	52.81	68.20	-15.39	PK
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.48	17.19	42.67	54.00	-11.33	AV
V	5350.00	27.50	17.19	44.69	54.00	-9.31	AV

Mode:		802.11n(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.95	17.19	52.14	68.20	-16.06	PK
V	5150.00	35.75	17.19	52.94	68.20	-15.26	PK
Mode:		802.11n(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.32	17.19	44.51	54.00	-9.49	AV
V	5150.00	25.86	17.19	43.05	54.00	-10.95	AV
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.95	17.19	55.14	68.20	-13.06	PK
V	5350.00	37.31	17.19	54.50	68.20	-13.70	PK
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.93	17.19	45.12	54.00	-8.88	AV
V	5350.00	27.12	17.19	44.31	54.00	-9.69	AV

Mode:		802.11ac(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.49	17.19	51.68	68.20	-16.52	PK
V	5150.00	37.51	17.19	54.70	68.20	-13.50	PK
Mode:		802.11ac(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.33	17.19	42.52	54.00	-11.48	AV
V	5150.00	26.66	17.19	43.85	54.00	-10.15	AV
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.45	17.19	53.64	68.20	-14.56	PK
V	5350.00	34.92	17.19	52.11	68.20	-16.09	PK
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.72	17.19	41.91	54.00	-12.09	AV
V	5350.00	24.44	17.19	41.63	54.00	-12.37	AV



Mode:		802.11ax20		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.71	17.19	54.90	68.20	-13.30	PK
V	5150.00	37.39	17.19	54.58	68.20	-13.62	PK
Mode:		802.11ax20		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	28.02	17.19	45.21	54.00	-8.79	AV
V	5150.00	27.34	17.19	44.53	54.00	-9.47	AV
Mode:		802.11ax20		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.47	17.19	53.66	68.20	-14.54	PK
V	5350.00	35.02	17.19	52.21	68.20	-15.99	PK
Mode:		802.11ax20		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.73	17.19	42.92	54.00	-11.08	AV
V	5350.00	26.05	17.19	43.24	54.00	-10.76	AV

Mode:		802.11n(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.23	17.19	53.42	68.20	-14.78	PK
V	5150.00	35.78	17.19	52.97	68.20	-15.23	PK
Mode:		802.11n(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	26.52	17.19	43.71	54.00	-10.29	AV
V	5150.00	25.27	17.19	42.46	54.00	-11.54	AV
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.98	17.19	53.17	68.20	-15.03	PK
V	5350.00	33.62	17.19	50.81	68.20	-17.39	PK
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.55	17.19	43.74	54.00	-10.26	AV
V	5350.00	24.63	17.19	41.82	54.00	-12.18	AV

Mode:		802.11ac(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.73	17.19	53.92	68.20	-14.28	PK
V	5150.00	36.23	17.19	53.42	68.20	-14.78	PK
Mode:		802.11ac(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	28.28	17.19	45.47	54.00	-8.53	AV
V	5150.00	25.72	17.19	42.91	54.00	-11.09	AV
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.00	17.19	52.19	68.20	-16.01	PK
V	5350.00	33.85	17.19	51.04	68.20	-17.16	PK
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.08	17.19	42.27	54.00	-11.73	AV
V	5350.00	25.07	17.19	42.26	54.00	-11.74	AV

Mode:		802.11ax40		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.46	17.19	52.65	68.20	-15.55	PK
V	5150.00	34.87	17.19	52.06	68.20	-16.14	PK
Mode:		802.11ax40		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	26.53	17.19	43.72	54.00	-10.28	AV
V	5150.00	26.70	17.19	43.89	54.00	-10.11	AV
Mode:		802.11ax40		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.14	17.19	52.33	68.20	-15.87	PK
V	5350.00	36.05	17.19	53.24	68.20	-14.96	PK
Mode:		802.11ax40		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.08	17.19	43.27	54.00	-10.73	AV
V	5350.00	26.67	17.19	43.86	54.00	-10.14	AV

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.00	17.19	53.19	68.20	-15.01	PK
V	5150.00	37.02	17.19	54.21	68.20	-13.99	PK
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.39	17.19	41.58	54.00	-12.42	AV
V	5150.00	26.06	17.19	43.25	54.00	-10.75	AV
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.51	17.19	51.70	68.20	-16.50	PK
V	5350.00	33.79	17.19	50.98	68.20	-17.22	PK
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.88	17.19	43.07	54.00	-10.93	AV
V	5350.00	23.73	17.19	40.92	54.00	-13.08	AV

Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.58	17.19	54.77	68.20	-13.43	PK
V	5150.00	35.55	17.19	52.74	68.20	-15.46	PK
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.39	17.19	41.58	54.00	-12.42	AV
V	5150.00	23.81	17.19	41.00	54.00	-13.00	AV
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.73	17.19	52.92	68.20	-15.28	PK
V	5350.00	35.92	17.19	53.11	68.20	-15.09	PK
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.79	17.19	41.98	54.00	-12.02	AV
V	5350.00	26.40	17.19	43.59	54.00	-10.41	AV

**Band3**

Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	38.58	17.21	55.79	68.20	-12.41	PK
V	5470.00	36.93	17.21	54.14	68.20	-14.06	PK
Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	25.27	17.21	42.48	54.00	-11.52	AV
V	5470.00	26.26	17.21	43.47	54.00	-10.53	AV
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	36.07	17.21	53.28	68.20	-14.92	PK
V	5725.00	35.63	17.21	52.84	68.20	-15.36	PK
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	28.70	17.21	45.91	54.00	-8.09	AV
V	5725.00	25.81	17.21	43.02	54.00	-10.98	AV

Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	36.14	17.21	53.35	68.20	-14.85	PK
V	5470.00	34.44	17.21	51.65	68.20	-16.55	PK
Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	27.72	17.21	44.93	54.00	-9.07	AV
V	5470.00	26.84	17.21	44.05	54.00	-9.95	AV
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	36.44	17.21	53.65	68.20	-14.55	PK
V	5725.00	34.25	17.21	51.46	68.20	-16.74	PK
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	25.89	17.21	43.10	54.00	-10.90	AV
V	5725.00	25.80	17.21	43.01	54.00	-10.99	AV



Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	38.10	17.21	55.31	68.20	-12.89	PK
V	5470.00	37.66	17.21	54.87	68.20	-13.33	PK
Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	28.13	17.21	45.34	54.00	-8.66	AV
V	5470.00	26.13	17.21	43.34	54.00	-10.66	AV
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	35.89	17.21	53.10	68.20	-15.10	PK
V	5725.00	36.88	17.21	54.09	68.20	-14.11	PK
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.62	17.21	44.83	54.00	-9.17	AV
V	5725.00	27.57	17.21	44.78	54.00	-9.22	AV

Mode:		802.11ax20		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.45	17.21	53.66	68.20	-14.54	PK
V	5470.00	36.52	17.21	53.73	68.20	-14.47	PK
Mode:		802.11ax20		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	26.41	17.21	43.62	54.00	-10.38	AV
V	5470.00	27.35	17.21	44.56	54.00	-9.44	AV
Mode:		802.11ax20		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.42	17.21	54.63	68.20	-13.57	PK
V	5725.00	35.70	17.21	52.91	68.20	-15.29	PK
Mode:		802.11ax20		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.97	17.21	45.18	54.00	-8.82	AV
V	5725.00	27.73	17.21	44.94	54.00	-9.06	AV

Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	39.19	17.21	56.40	68.20	-11.80	PK
V	5470.00	35.85	17.21	53.06	68.20	-15.14	PK
Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	27.18	17.21	44.39	54.00	-9.61	AV
V	5470.00	26.79	17.21	44.00	54.00	-10.00	AV
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	35.53	17.21	52.74	68.20	-15.46	PK
V	5725.00	36.85	17.21	54.06	68.20	-14.14	PK
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	28.06	17.21	45.27	54.00	-8.73	AV
V	5725.00	25.43	17.21	42.64	54.00	-11.36	AV

Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	39.34	17.21	56.55	68.20	-11.65	PK
V	5470.00	36.81	17.21	54.02	68.20	-14.18	PK
Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	25.85	17.21	43.06	54.00	-10.94	AV
V	5470.00	27.92	17.21	45.13	54.00	-8.87	AV
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	38.98	17.21	56.19	68.20	-12.01	PK
V	5725.00	36.79	17.21	54.00	68.20	-14.20	PK
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	25.69	17.21	42.90	54.00	-11.10	AV
V	5725.00	24.65	17.21	41.86	54.00	-12.14	AV


Mode:		802.11ax40		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.52	17.21	53.73	68.20	-14.47	PK
V	5470.00	37.01	17.21	54.22	68.20	-13.98	PK
Mode:		802.11ax40		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	28.21	17.21	45.42	54.00	-8.58	AV
V	5470.00	25.52	17.21	42.73	54.00	-11.27	AV
Mode:		802.11ax40		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	36.91	17.21	54.12	68.20	-14.08	PK
V	5725.00	37.43	17.21	54.64	68.20	-13.56	PK
Mode:		802.11ax40		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	26.14	17.21	43.35	54.00	-10.65	AV
V	5725.00	25.69	17.21	42.90	54.00	-11.10	AV

Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	35.95	17.21	53.16	68.20	-15.04	PK
V	5470.00	35.22	17.21	52.43	68.20	-15.77	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	26.31	17.21	43.52	54.00	-10.48	AV
V	5470.00	26.61	17.21	43.82	54.00	-10.18	AV
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	36.77	17.21	53.98	68.20	-14.22	PK
V	5725.00	35.20	17.21	52.41	68.20	-15.79	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	26.48	17.21	43.69	54.00	-10.31	AV
V	5725.00	25.12	17.21	42.33	54.00	-11.67	AV

Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	38.03	17.21	55.24	68.20	-12.96	PK
V	5470.00	36.07	17.21	53.28	68.20	-14.92	PK
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	27.42	17.21	44.63	54.00	-9.37	AV
V	5470.00	25.98	17.21	43.19	54.00	-10.81	AV
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.57	17.21	54.78	68.20	-13.42	PK
V	5725.00	36.04	17.21	53.25	68.20	-14.95	PK
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	26.80	17.21	44.01	54.00	-9.99	AV
V	5725.00	27.96	17.21	45.17	54.00	-8.83	AV

Band4


802.11a

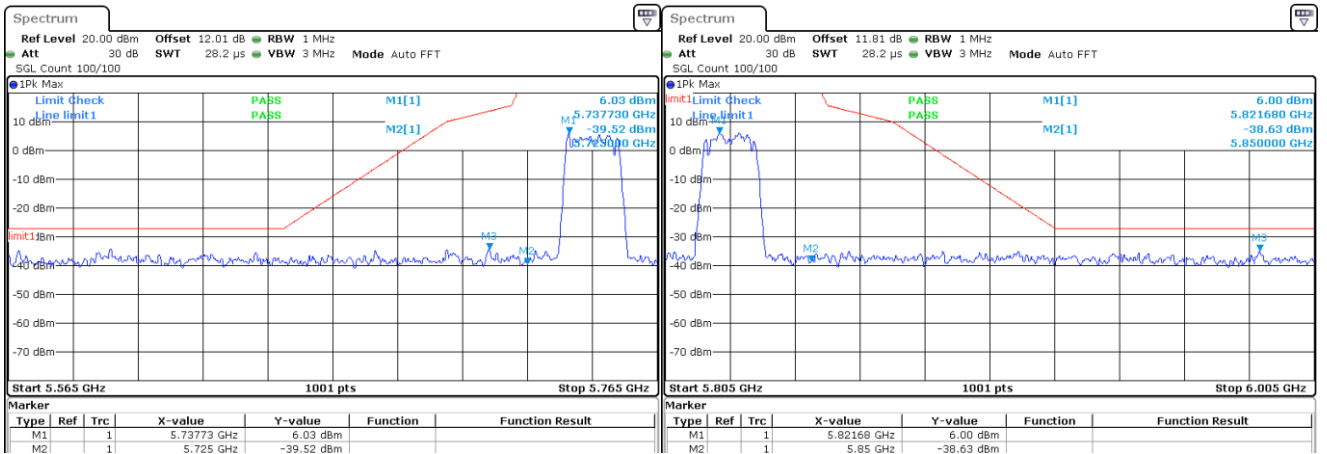

Low: 5745MHz

High: 5825MHz


802.11n(HT20)

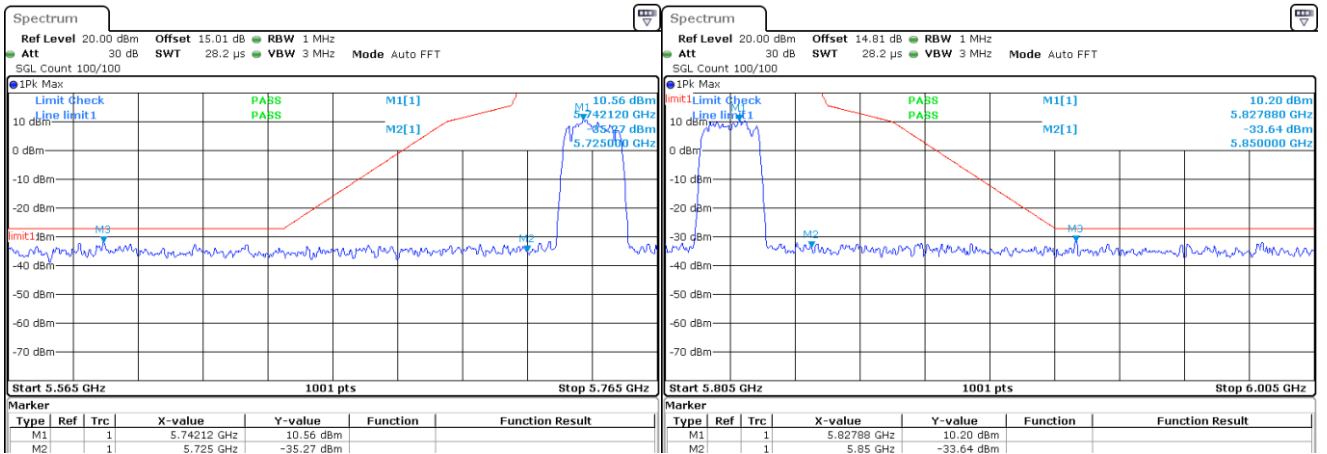

Low: 5745MHz

High: 5825MHz

802.11ac(HT20)

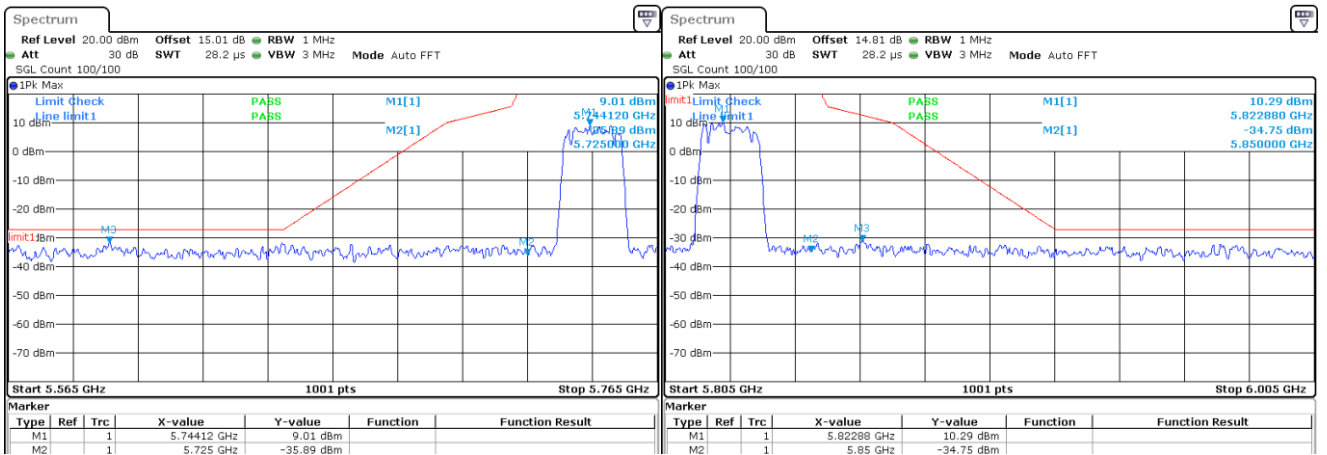


Low: 5745MHz


High: 5825MHz



802.11n(HT40)

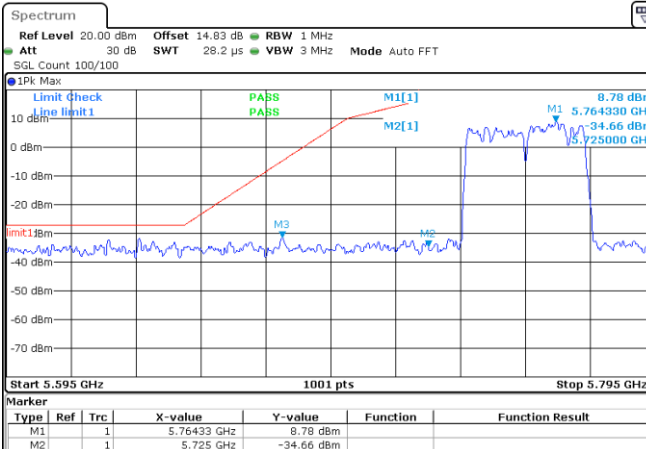


Low: 5755MHz

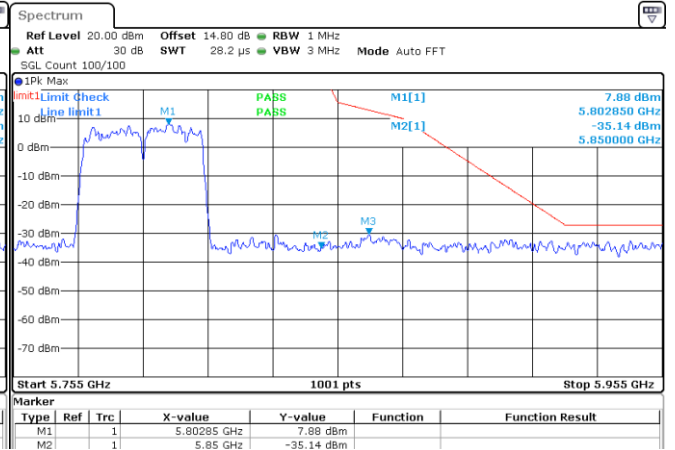


High: 5795MHz

802.11ac(HT40)

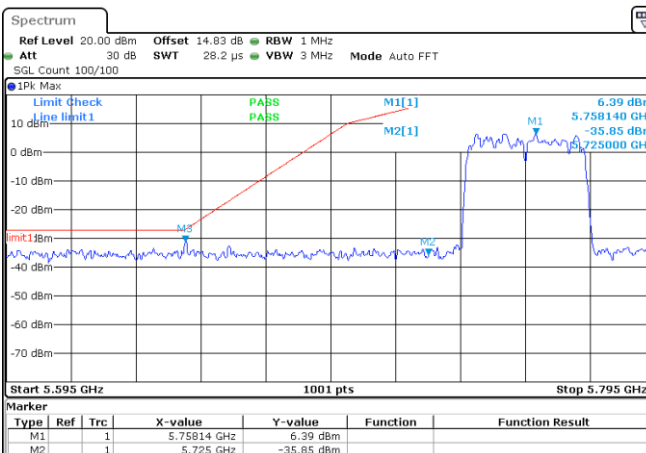


Low: 5755MHz

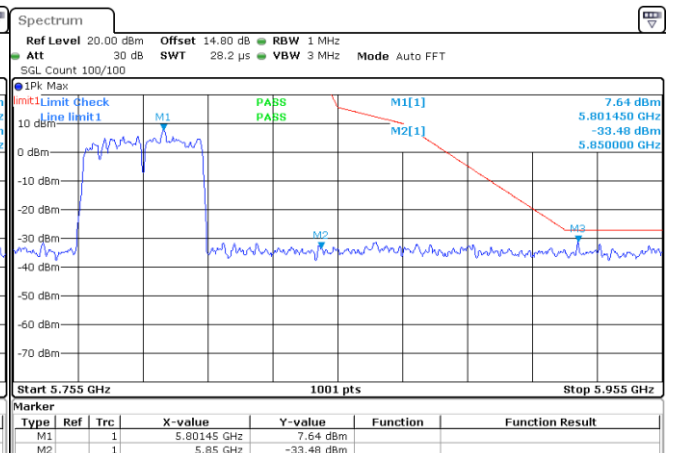


High: 5795MHz

802.11ac(HT80)

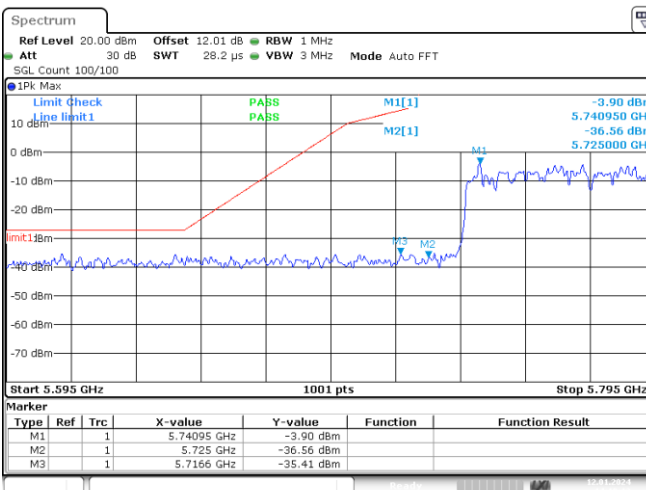


5775MHz

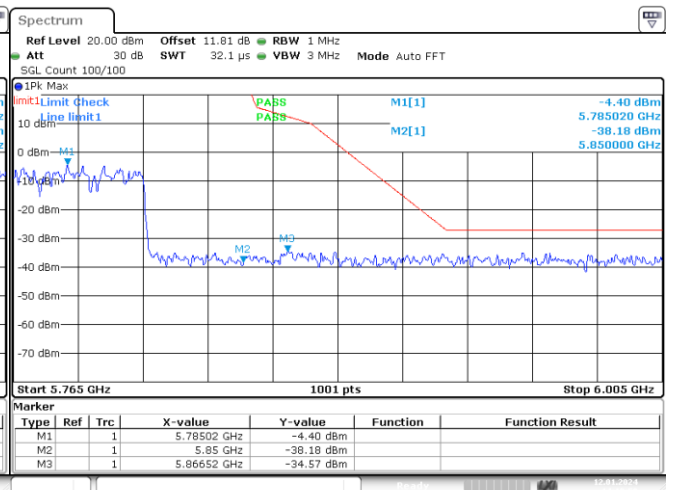

5775MHz


802.11ax20

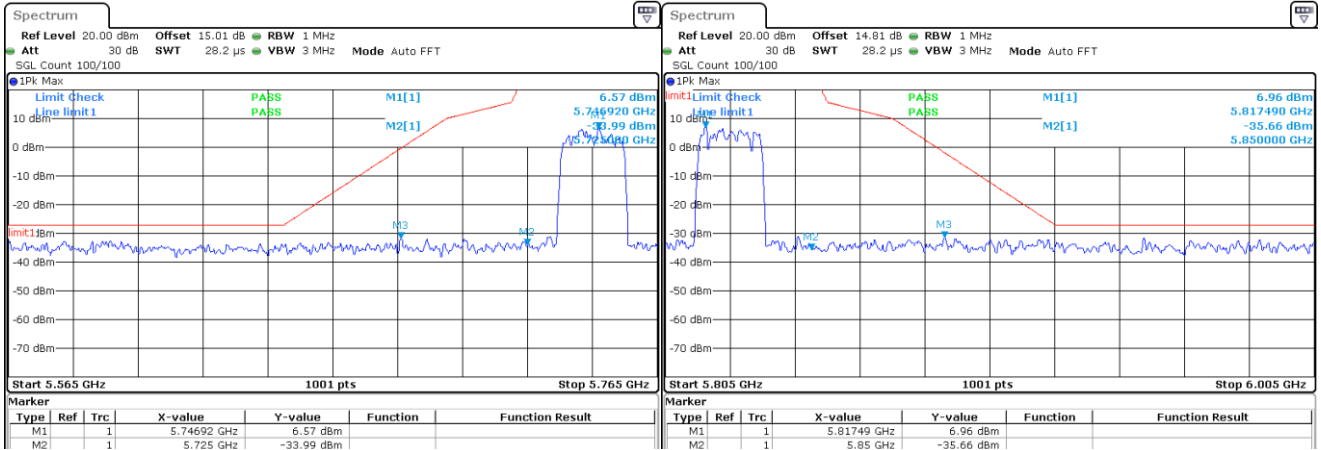

Low: 5745MHz

High: 5825MHz


802.11ax40

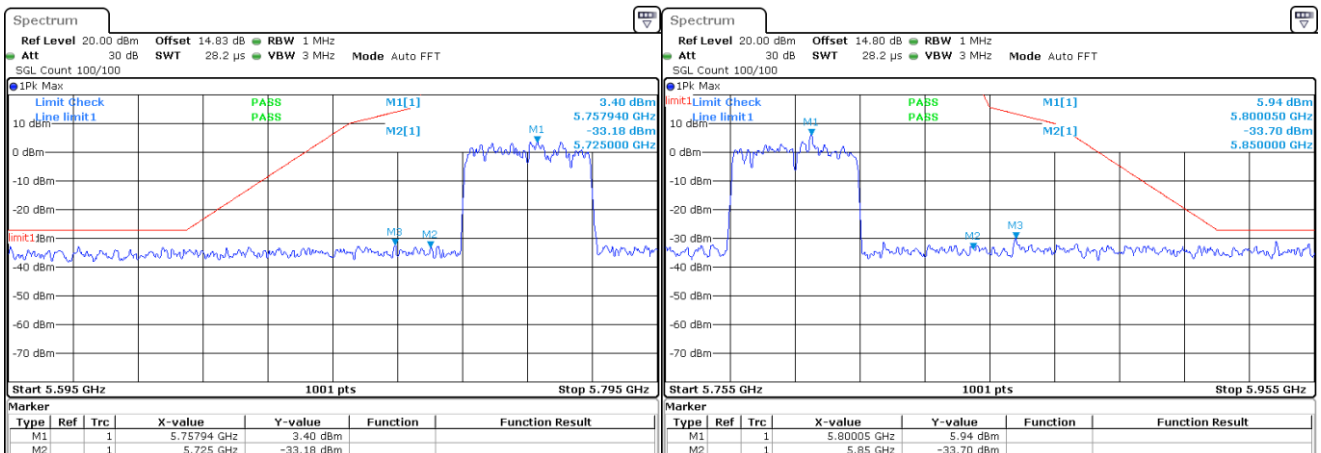

Low: 5755MHz

High: 5795MHz

802.11ax80

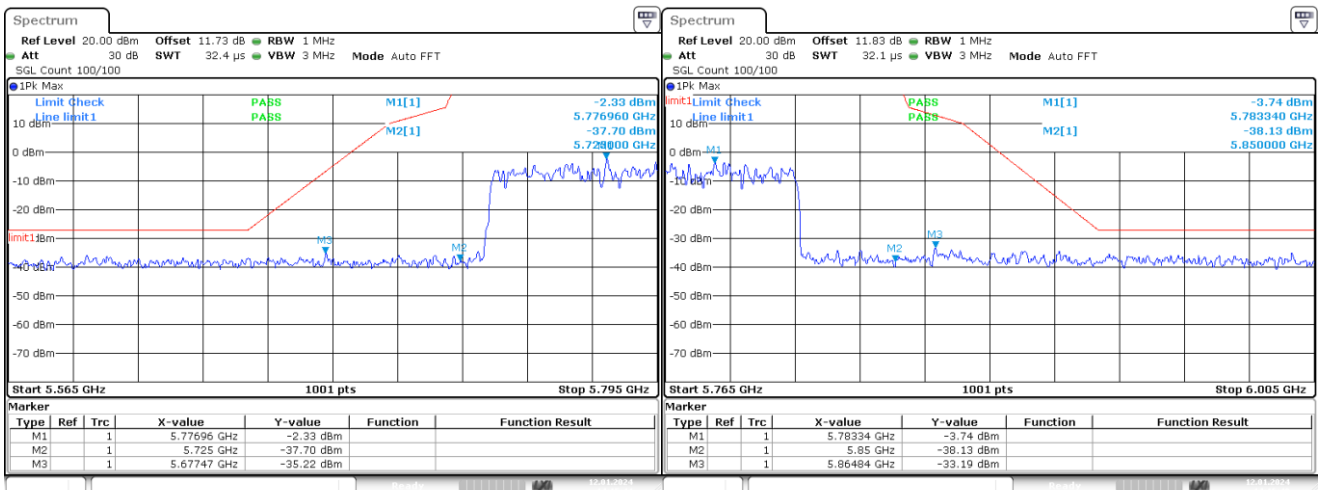

5775MHz


5775MHz


Note: 1. Except for mode a, other modes test the MIMO status.

2. All antennas have been tested, only the worst data of each pattern is reflected.

## 4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
		54.0		Average Value	
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below:</p> <p>1&gt;.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> <p>2&gt;.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider.</li> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> </ol>				

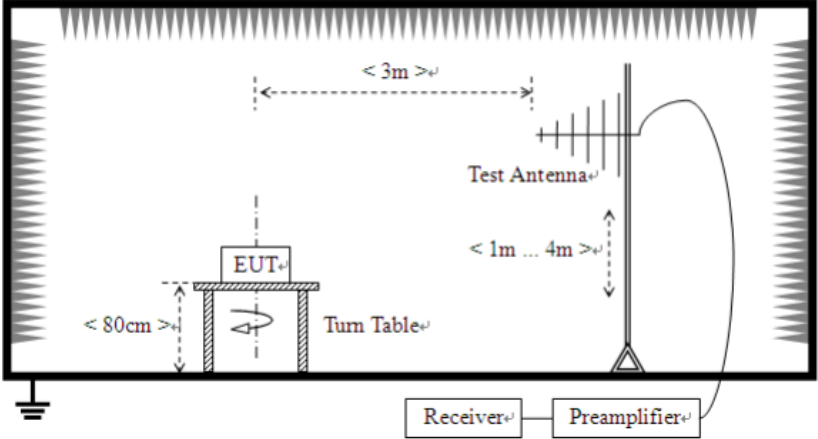	<ol style="list-style-type: none"> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</li> <li>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</li> <li>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:  <math display="block">\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}</math>           where:            Pg is the generator output power into the substitution antenna.</li> </ol>
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>

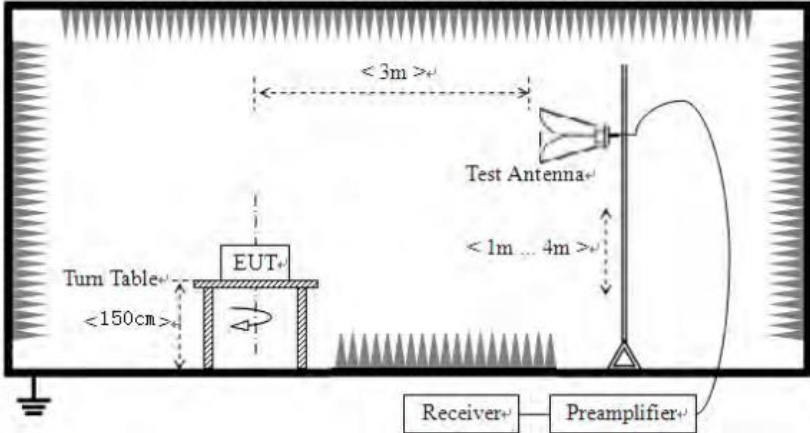	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Measurement Data:****Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.12	47.81	11.25	0.59	30.08	29.57	40	-10.43	Vertical
55.17	41.65	11.93	0.81	29.96	24.43	40	-15.57	Vertical
120.34	46.25	9.4	1.36	29.57	27.44	43.5	-16.06	Vertical
172.53	43.54	8.5	1.7	29.31	24.43	43.5	-19.07	Vertical
440.45	36.77	16.29	3.05	29.41	26.70	46	-19.30	Vertical
860.74	33.30	21.83	4.69	29.14	30.68	46	-15.32	Vertical
64.25	35.99	8.73	0.9	29.89	15.73	40	-24.27	Horizontal
99.55	33.70	11.73	1.19	29.7	16.92	43.5	-26.58	Horizontal
269.47	45.42	12.53	2.22	29.79	30.38	46	-15.62	Horizontal
351.17	36.99	14.5	2.62	29.73	24.38	46	-21.62	Horizontal
628.00	36.44	19.43	3.83	29.27	30.43	46	-15.57	Horizontal
955.88	41.35	22.54	5.06	29.1	39.85	46	-6.15	Horizontal

**Above 1GHz:****802.11a(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.53	67.41	11.25	14.62	32.65	60.63	74	-13.37	Vertical
15540.81	63.73	11.93	17.66	34.46	58.86	74	-15.14	Vertical
10360.21	64.97	9.4	14.62	32.65	56.34	74	-17.66	Horizontal
15540.71	67.59	8.5	17.66	34.46	59.29	74	-14.71	Horizontal

**802.11a(HT20) 5200MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.34	67.68	16.29	14.62	32.65	65.94	74	-8.06	Vertical
15600.44	55.35	21.83	17.66	34.46	60.38	74	-13.62	Vertical
10400.73	65.20	8.73	14.62	32.65	55.90	74	-18.10	Horizontal
15600.62	68.42	11.73	17.66	34.46	63.35	74	-10.65	Horizontal

**802.11a(HT20) 5240MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.54	67.68	11.25	14.62	32.65	60.90	74	-13.10	Vertical
15720.60	63.16	11.93	17.66	34.46	58.29	74	-15.71	Vertical
10480.67	64.16	9.4	14.62	32.65	55.53	74	-18.47	Horizontal
15720.14	68.51	8.5	17.66	34.46	60.21	74	-13.79	Horizontal

**802.11n(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.33	67.52	16.29	14.62	32.65	65.78	74	-8.22	Vertical
15540.57	55.05	21.83	17.66	34.46	60.08	74	-13.92	Vertical
10360.71	65.40	8.73	14.62	32.65	56.10	74	-17.90	Horizontal
15540.91	68.41	11.73	17.66	34.46	63.34	74	-10.66	Horizontal

**802.11n(HT20) 5200MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.96	67.80	11.25	14.62	32.65	61.02	74	-12.98	Vertical
15600.81	63.07	11.93	17.66	34.46	58.20	74	-15.80	Vertical
10400.40	64.63	9.4	14.62	32.65	56.00	74	-18.00	Horizontal
15600.99	67.86	8.5	17.66	34.46	59.56	74	-14.44	Horizontal

**802.11n(HT20) 5240MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.21	67.93	16.29	14.62	32.65	66.19	74	-7.81	Vertical
15720.45	54.81	21.83	17.66	34.46	59.84	74	-14.16	Vertical
10480.20	65.36	8.73	14.62	32.65	56.06	74	-17.94	Horizontal
15720.09	68.49	11.73	17.66	34.46	63.42	74	-10.58	Horizontal

## 802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.75	67.02	11.25	14.62	32.65	60.24	74	-13.76	Vertical
15540.49	63.51	11.93	17.66	34.46	58.64	74	-15.36	Vertical
10360.43	64.60	9.4	14.62	32.65	55.97	74	-18.03	Horizontal
15540.85	68.06	8.5	17.66	34.46	59.76	74	-14.24	Horizontal

## 802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.21	67.93	16.29	14.62	32.65	66.19	74	-7.81	Vertical
15600.47	55.13	21.83	17.66	34.46	60.16	74	-13.84	Vertical
10400.88	64.67	8.73	14.62	32.65	55.37	74	-18.63	Horizontal
15600.91	68.26	11.73	17.66	34.46	63.19	74	-10.81	Horizontal

## 802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.16	67.10	11.25	14.62	32.65	60.32	74	-13.68	Vertical
15720.97	63.24	11.93	17.66	34.46	58.37	74	-15.63	Vertical
10480.60	64.32	9.4	14.62	32.65	55.69	74	-18.31	Horizontal
15720.79	68.22	8.5	17.66	34.46	59.92	74	-14.08	Horizontal

## 802.11ax20 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.46	67.37	16.29	14.62	32.65	65.63	74	-8.37	Vertical
15540.01	55.29	21.83	17.66	34.46	60.32	74	-13.68	Vertical
10360.27	64.65	8.73	14.62	32.65	55.35	74	-18.65	Horizontal
15540.26	68.54	11.73	17.66	34.46	63.47	74	-10.53	Horizontal

## 802.11ax20 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.36	67.43	11.25	14.62	32.65	60.65	74	-13.35	Vertical
15600.80	63.75	11.93	17.66	34.46	58.88	74	-15.12	Vertical
10400.02	64.25	9.4	14.62	32.65	55.62	74	-18.38	Horizontal
15600.27	67.60	8.5	17.66	34.46	59.30	74	-14.70	Horizontal

## 802.11ax20 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.76	67.60	16.29	14.62	32.65	65.86	74	-8.14	Vertical
15720.27	55.30	21.83	17.66	34.46	60.33	74	-13.67	Vertical
10480.84	64.61	8.73	14.62	32.65	55.31	74	-18.69	Horizontal
15720.82	68.33	11.73	17.66	34.46	63.26	74	-10.74	Horizontal

## 802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.48	67.93	11.25	14.62	32.65	61.15	74	-12.85	Vertical
15570.32	63.56	11.93	17.66	34.46	58.69	74	-15.31	Vertical
10380.45	64.94	9.4	14.62	32.65	56.31	74	-17.69	Horizontal
15570.58	68.23	8.5	17.66	34.46	59.93	74	-14.07	Horizontal

## 802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.60	67.88	16.29	14.62	32.65	66.14	74	-7.86	Vertical
15690.32	54.86	21.83	17.66	34.46	59.89	74	-14.11	Vertical
10460.93	65.07	8.73	14.62	32.65	55.77	74	-18.23	Horizontal
15690.29	68.28	11.73	17.66	34.46	63.21	74	-10.79	Horizontal

## 802.11ac(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.05	67.62	11.25	14.62	32.65	60.84	74	-13.16	Vertical
15570.97	63.11	11.93	17.66	34.46	58.24	74	-15.76	Vertical
10380.27	64.95	9.4	14.62	32.65	56.32	74	-17.68	Horizontal
15570.25	67.92	8.5	17.66	34.46	59.62	74	-14.38	Horizontal

## 802.11ac(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.52	67.70	16.29	14.62	32.65	65.96	74	-8.04	Vertical
15690.91	55.47	21.83	17.66	34.46	60.50	74	-13.50	Vertical
10460.38	65.42	8.73	14.62	32.65	56.12	74	-17.88	Horizontal
15690.18	67.89	11.73	17.66	34.46	62.82	74	-11.18	Horizontal

## 802.11ax40 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.34	67.39	11.25	14.62	32.65	60.61	74	-13.39	Vertical
15570.61	63.31	11.93	17.66	34.46	58.44	74	-15.56	Vertical
10380.48	64.65	9.4	14.62	32.65	56.02	74	-17.98	Horizontal
15570.74	68.08	8.5	17.66	34.46	59.78	74	-14.22	Horizontal

## 802.11ax40 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.61	67.83	16.29	14.62	32.65	66.09	74	-7.91	Vertical
15690.32	54.89	21.83	17.66	34.46	59.92	74	-14.08	Vertical
10460.07	64.78	8.73	14.62	32.65	55.48	74	-18.52	Horizontal
15690.93	67.73	11.73	17.66	34.46	62.66	74	-11.34	Horizontal



## 802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.56	67.55	11.25	14.62	32.65	60.77	74	-13.23	Vertical
15630.23	62.90	11.93	17.66	34.46	58.03	74	-15.97	Vertical
10420.55	64.19	9.4	14.62	32.65	55.56	74	-18.44	Horizontal
15630.83	68.23	8.5	17.66	34.46	59.93	74	-14.07	Horizontal

## 802.11ax80 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.80	67.38	16.29	14.62	32.65	65.64	74	-8.36	Vertical
15630.47	55.32	21.83	17.66	34.46	60.35	74	-13.65	Vertical
10420.21	64.57	8.73	14.62	32.65	55.27	74	-18.73	Horizontal
15630.49	67.75	11.73	17.66	34.46	62.68	74	-11.32	Horizontal

## Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case (U-NII-1).
5. Except for mode a, other modes test the MIMO status.
6. All antennas have been tested, only the worst data of each pattern is reflected.

## 4.8 Frequency stability

Test Standard	15.407(f), RSS-Gen §6.11
Test limit	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test results:	Pass

**Measurement Data:**

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	DC 3.0V	5179.992	8	5239.988	12
	DC 3.3V	5179.986	14	5239.990	10
	DC 3.6V	5179.990	10	5239.987	13
Mode	Voltage (V)	FHL (5260MHz)	Deviation (KHz)	FHH (5320MHz)	Deviation (KHz)
Band 2 (5250-5350 MHz)	DC 3.0V	5259.989	11	5319.988	12
	DC 3.3V	5259.992	8	5319.992	8
	DC 3.6V	5259.990	10	5319.988	12
Mode	DC 5.0V	FHL (5500MHz)	Deviation (KHz)	FHH (5700MHz)	Deviation (KHz)
Band 3 (5470-5725 MHz)	DC 3.0V	5499.991	9	5699.989	11
	DC 3.3V	5499.987	13	5699.989	11
	DC 3.6V	5499.987	13	5699.992	8
Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	DC 3.0V	5744.991	9	5824.987	13
	DC 3.3V	5744.986	14	5824.988	12
	DC 3.6V	5744.987	13	5824.991	9

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	0°C	5179.988	12	5239.987	13
	+10°C	5179.988	12	5239.989	11
	+20°C	5179.992	8	5239.987	13
	+30°C	5179.991	9	5239.991	9
	+40°C	5179.992	8	5239.988	12
	+50°C	5179.987	13	5239.988	12
	+60°C	5179.992	8	5239.992	8
	+70°C	5179.986	14	5239.987	13

Mode	Temperature (°C)	FHL (5260MHz)	Deviation (KHz)	FHH (5320MHz)	Deviation (KHz)
Band 2 (5250-5350 MHz)	0°C	5259.992	8	5319.991	9
	+10°C	5259.988	12	5319.987	13
	+20°C	5259.990	10	5319.991	9
	+30°C	5259.989	11	5319.992	8
	+40°C	5259.986	14	5319.989	11
	+50°C	5259.988	12	5319.988	12
	+60°C	5259.987	13	5319.987	13
	+70°C	5259.989	11	5319.989	11
Mode	Temperature (°C)	FHL (5500MHz)	Deviation (KHz)	FHH (5700MHz)	Deviation (KHz)
Band 3 (5470-5725 MHz)	0°C	5499.988	12	5699.987	13
	+10°C	5499.988	12	5699.991	9
	+20°C	5499.987	13	5699.987	13
	+30°C	5499.988	12	5699.987	13
	+40°C	5499.990	10	5699.990	10
	+50°C	5499.987	13	5699.990	10
	+60°C	5499.992	8	5699.989	11
	+70°C	5499.992	8	5699.992	8
Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	0°C	5744.987	13	5824.987	13
	+10°C	5744.991	9	5824.988	12
	+20°C	5744.991	9	5824.991	9
	+30°C	5744.987	13	5824.990	10
	+40°C	5744.989	11	5824.987	13
	+50°C	5744.989	11	5824.988	12
	+60°C	5744.987	13	5824.991	9
	+70°C	5744.991	9	5824.989	11

-----END OF REPORT-----