



PSD NVNT n40 5795MHz Ant1

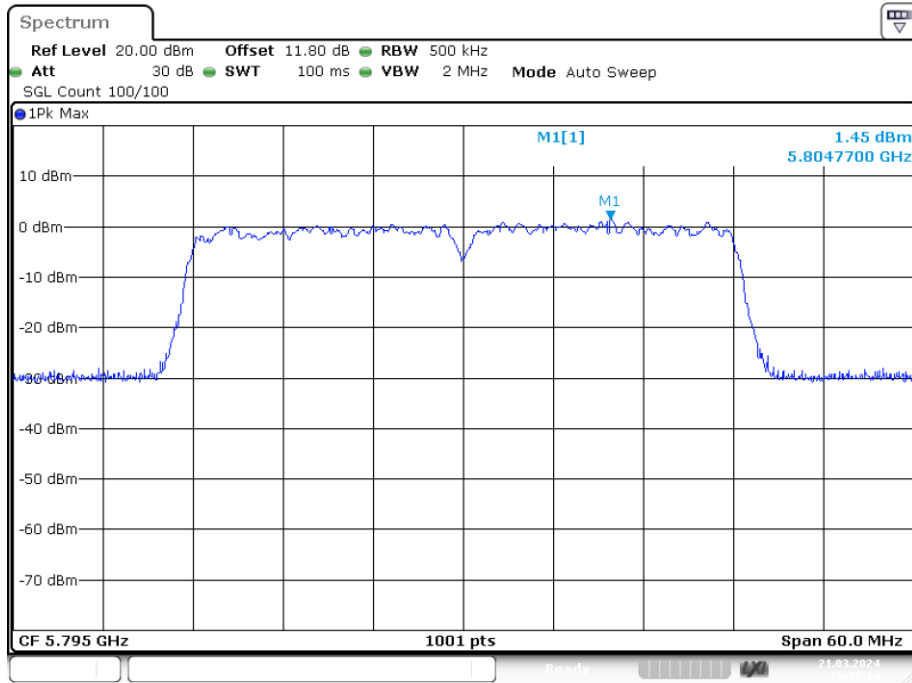


Date: 21.MAR.2024 20:27:15

PSD NVNT a 5745MHz Ant2

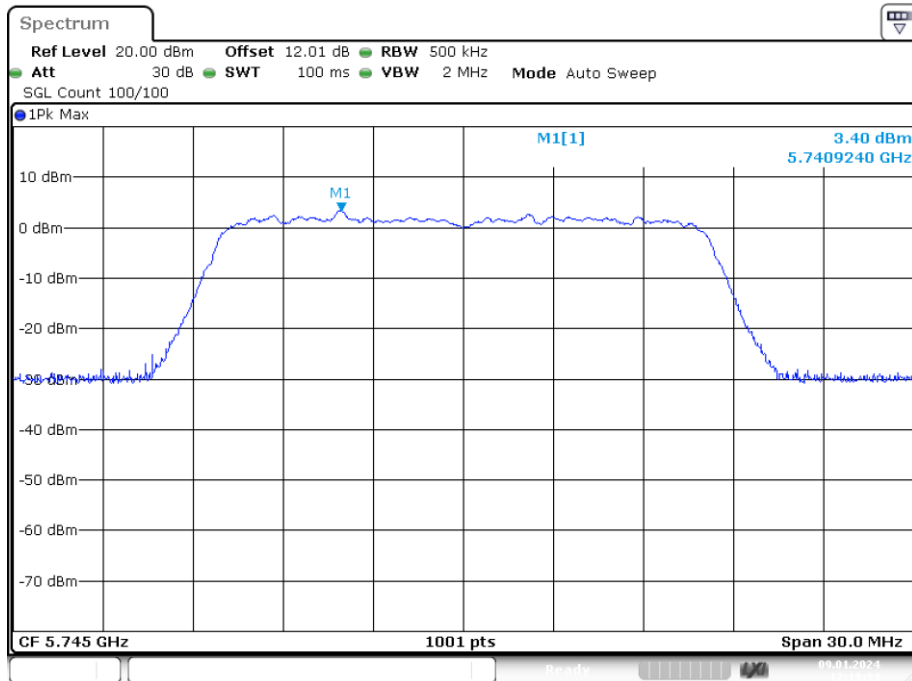


Date: 9.JAN.2024 17:19:34


PSD NVNT a 5785MHz Ant2

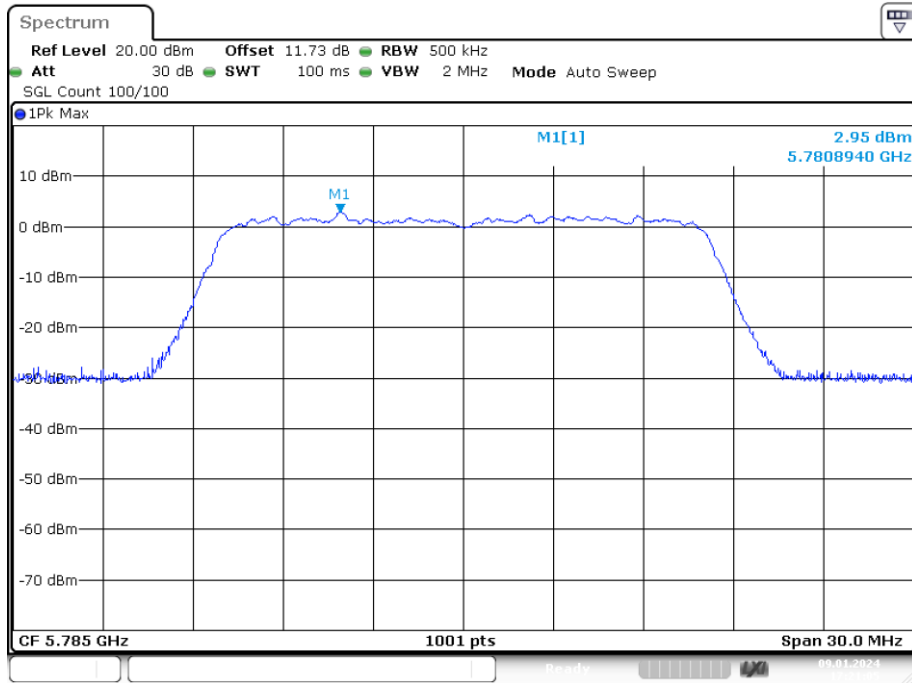

PSD NVNT a 5825MHz Ant2

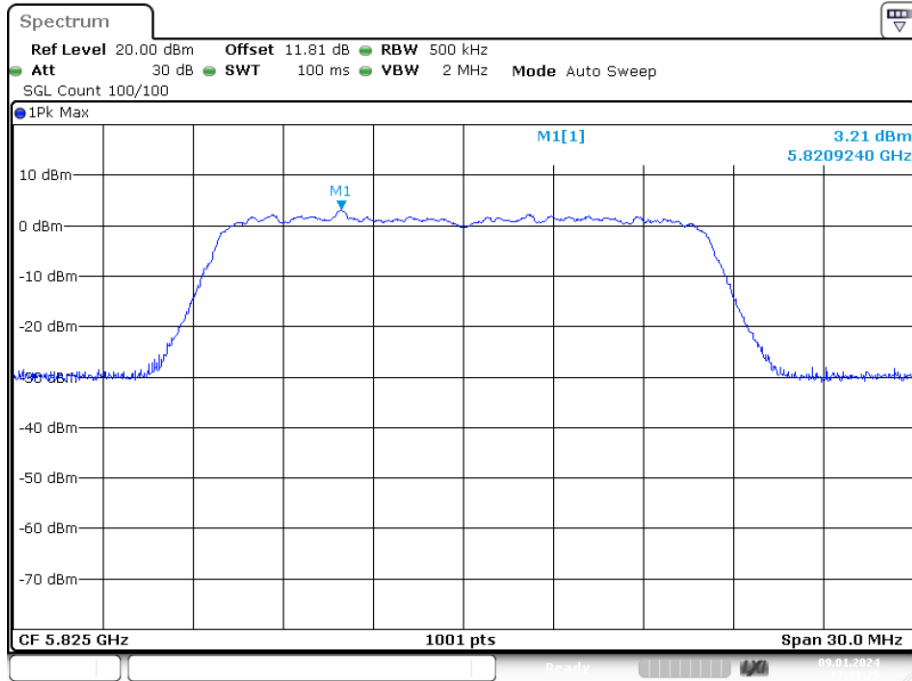


PSD NVNT ac20 5745MHz Ant2

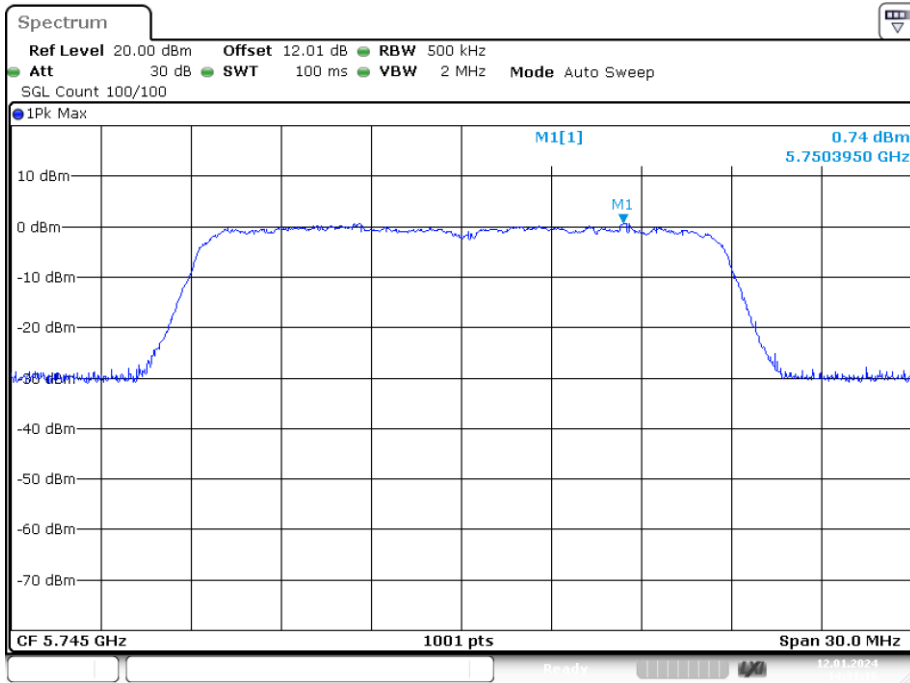


Date: 12.JAN.2024 14:31:15

PSD NVNT ac20 5785MHz Ant2

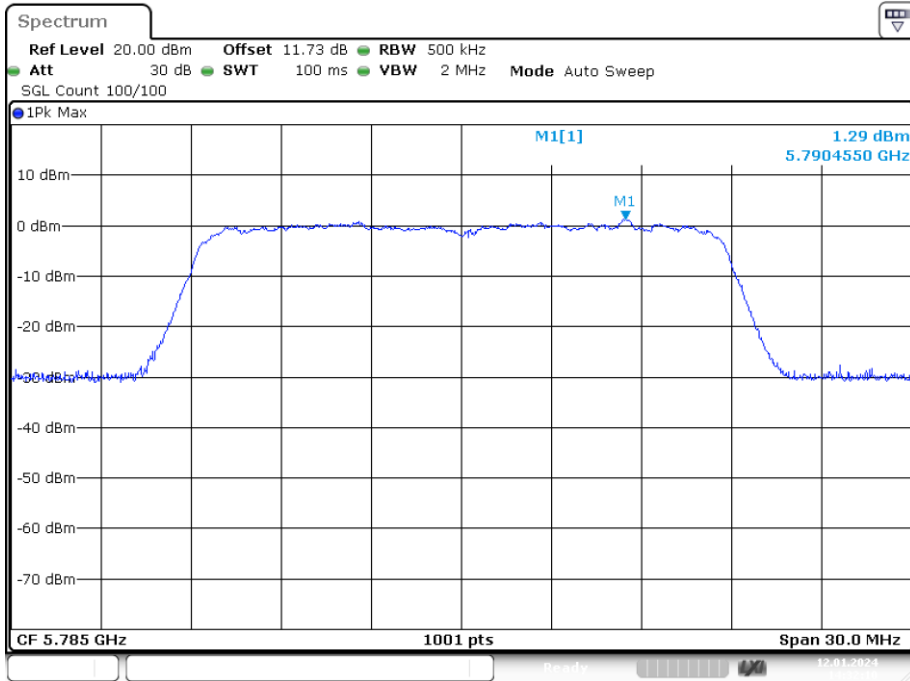


Date: 12.JAN.2024 14:32:10


PSD NVNT ac20 5825MHz Ant2

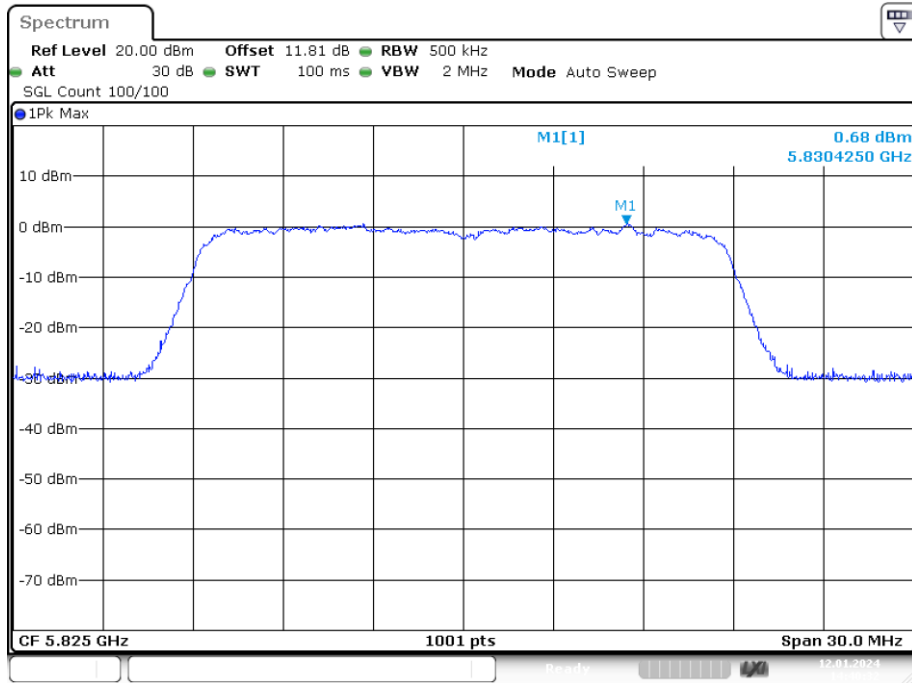


PSD NVNT ac40 5755MHz Ant2

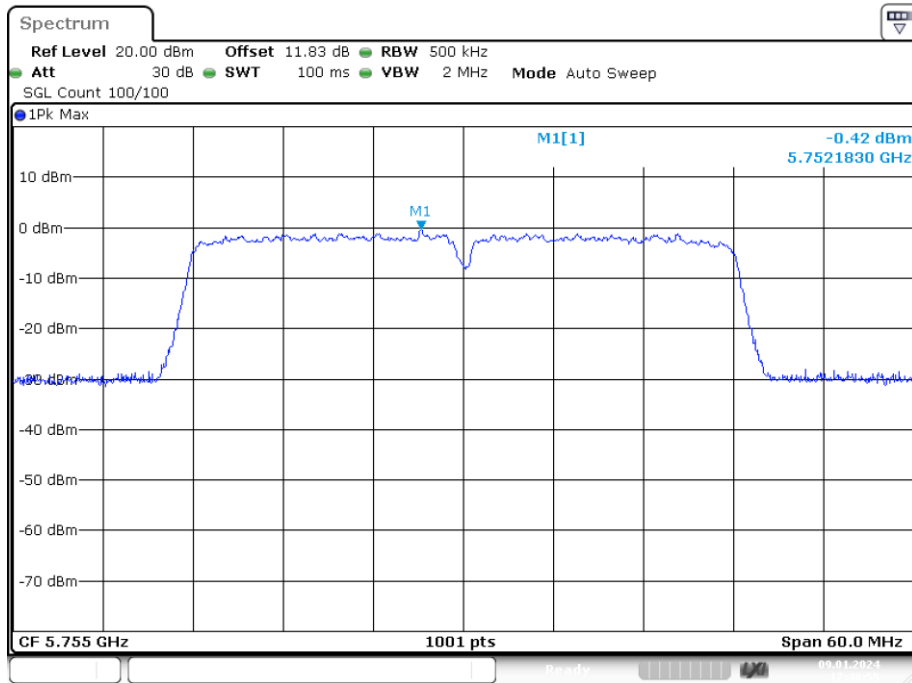


PSD NVNT ac40 5795MHz Ant2

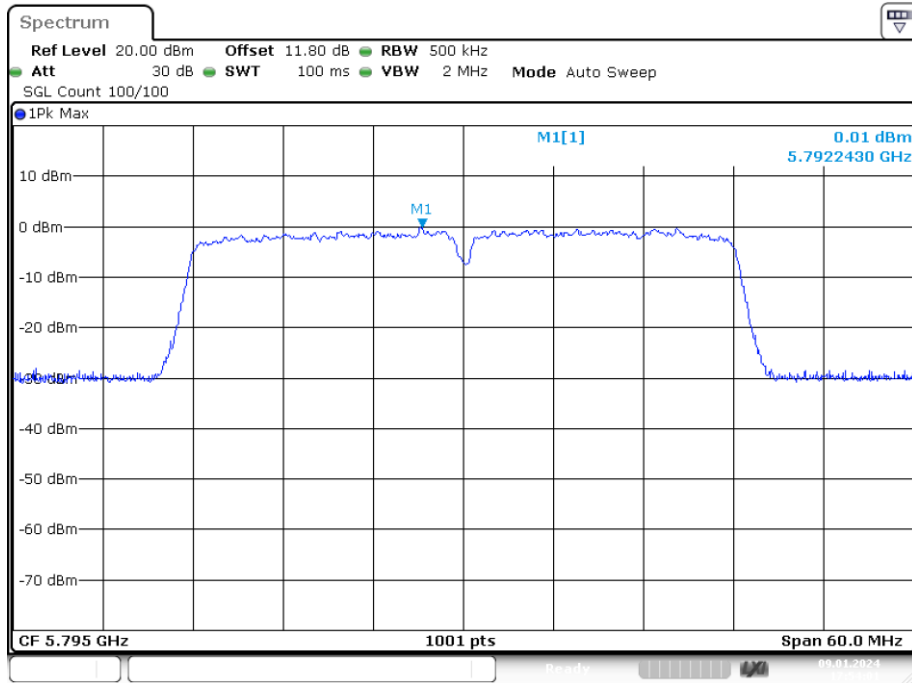

PSD NVNT ac80 5775MHz Ant2

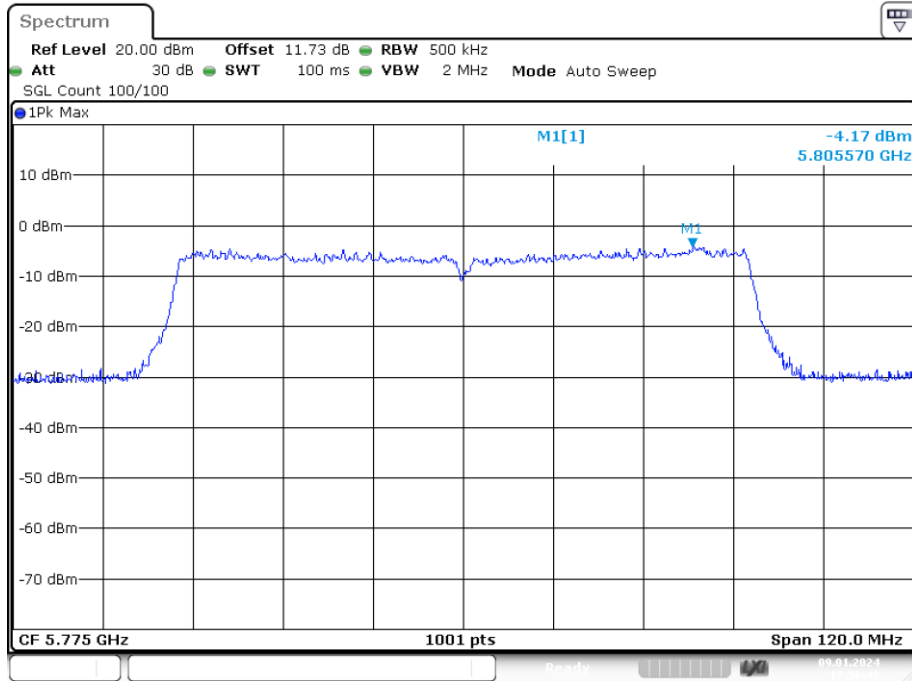


PSD NVNT ax20 5745MHz Ant2

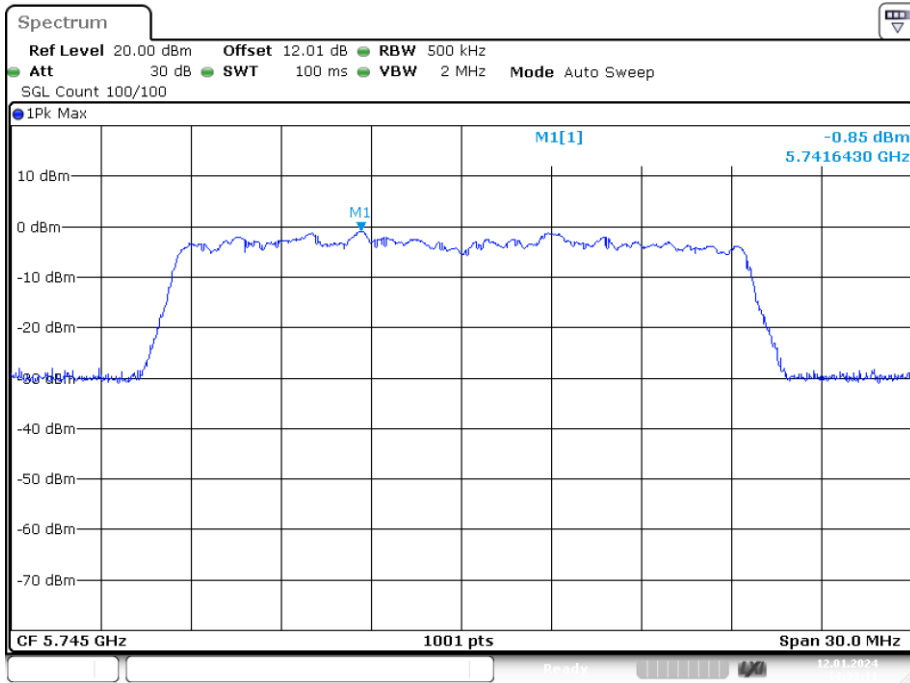


Date: 12.JAN.2024 14:33:11

PSD NVNT ax20 5785MHz Ant2

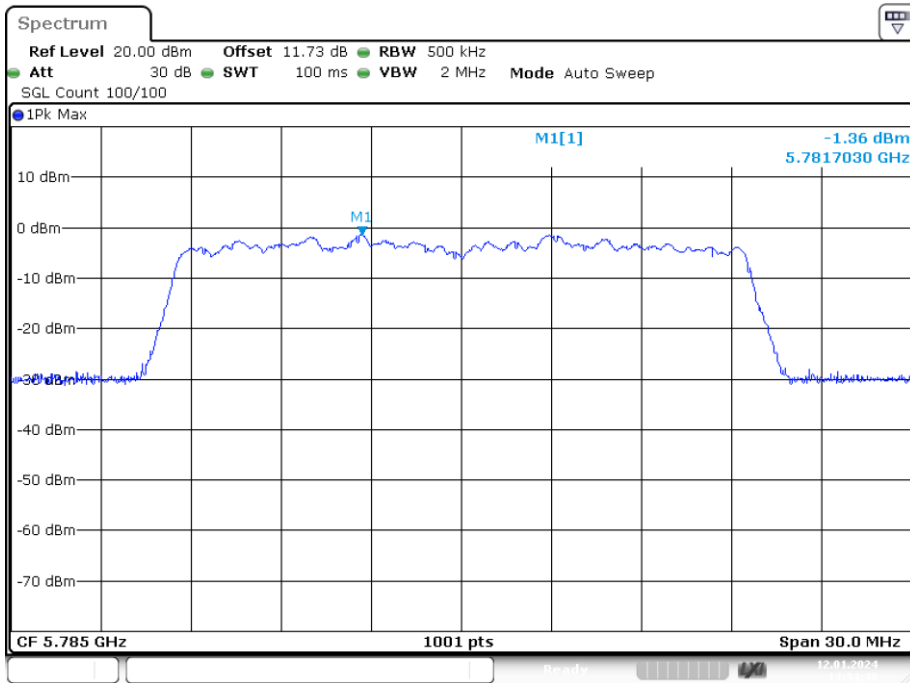


Date: 12.JAN.2024 14:34:48


PSD NVNT ax20 5825MHz Ant2

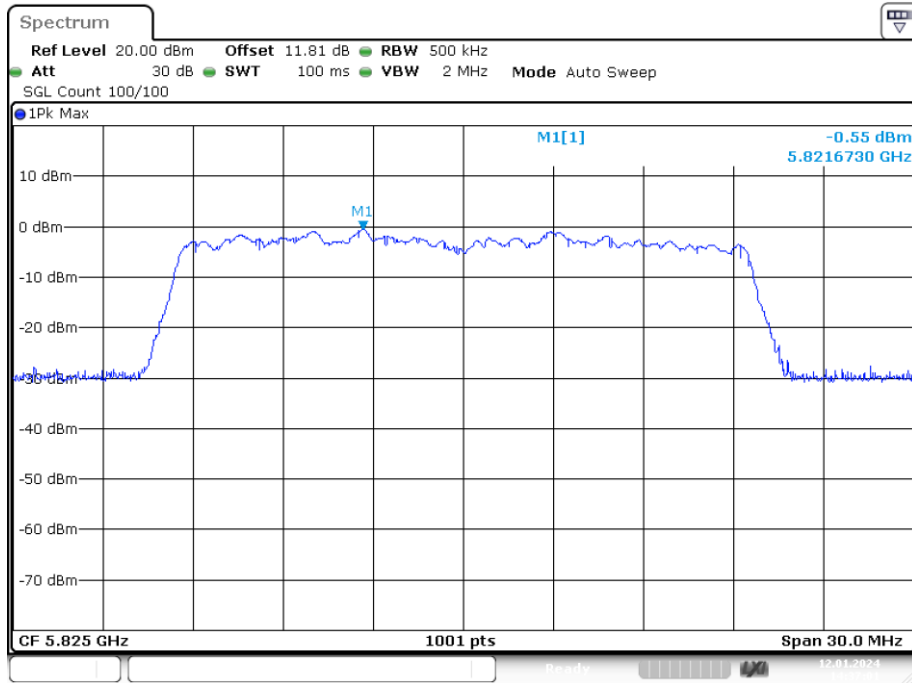


PSD NVNT ax40 5755MHz Ant2

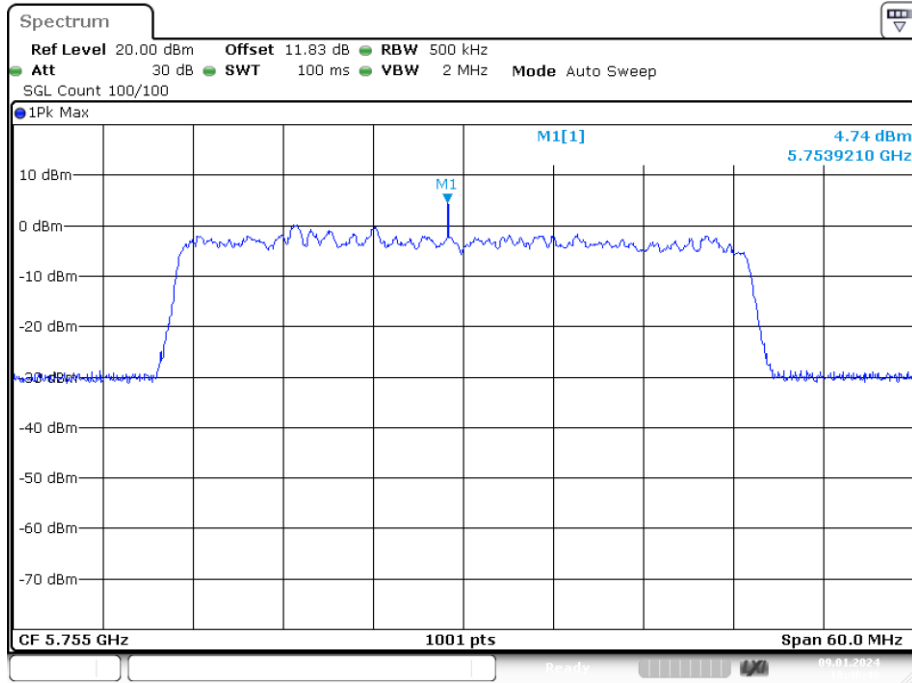


PSD NVNT ax40 5795MHz Ant2

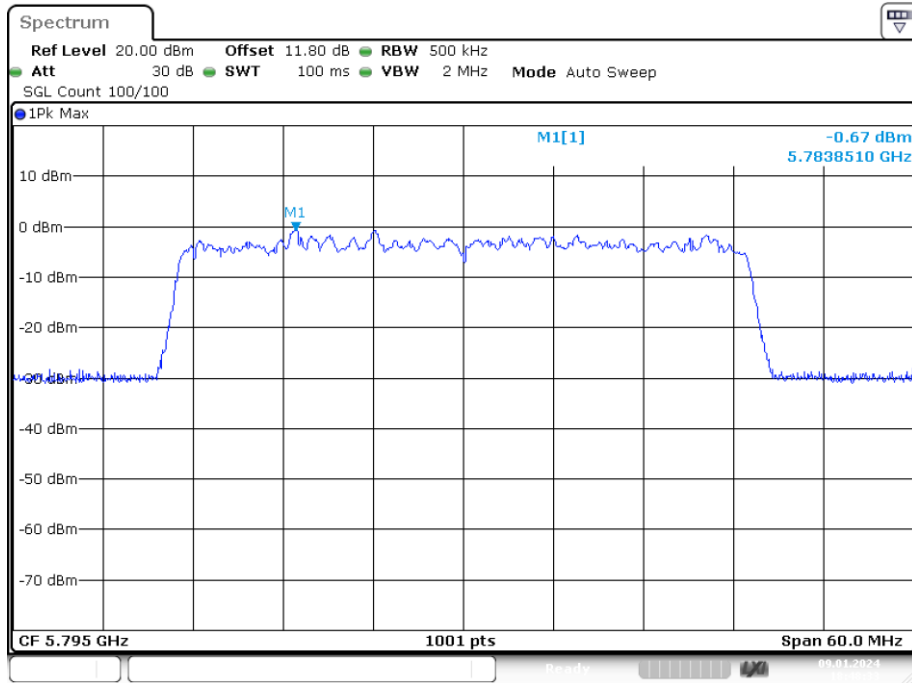


PSD NVNT ax80 5775MHz Ant2

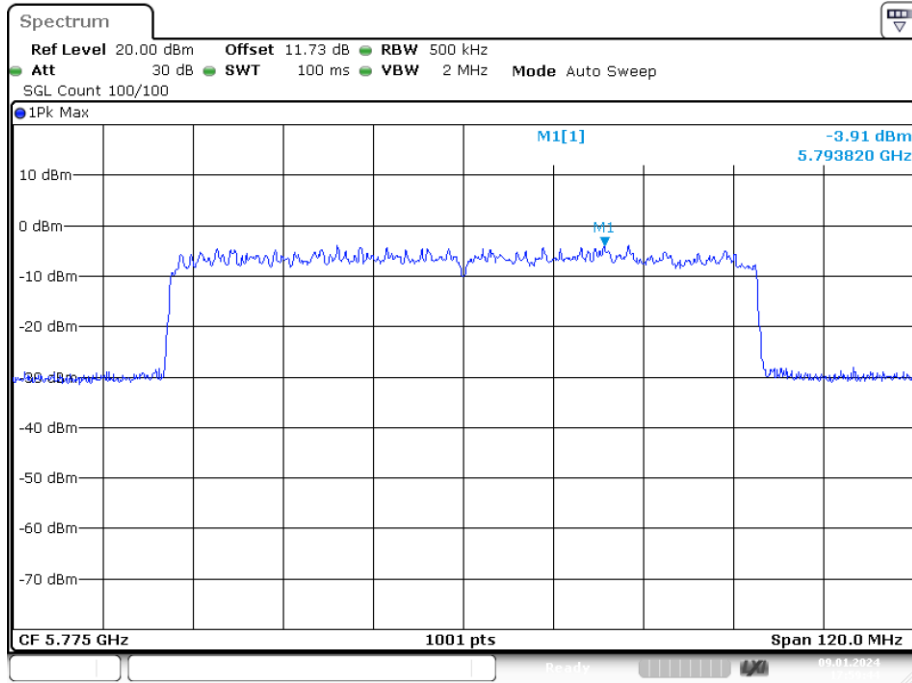


PSD NVNT n20 5745MHz Ant2

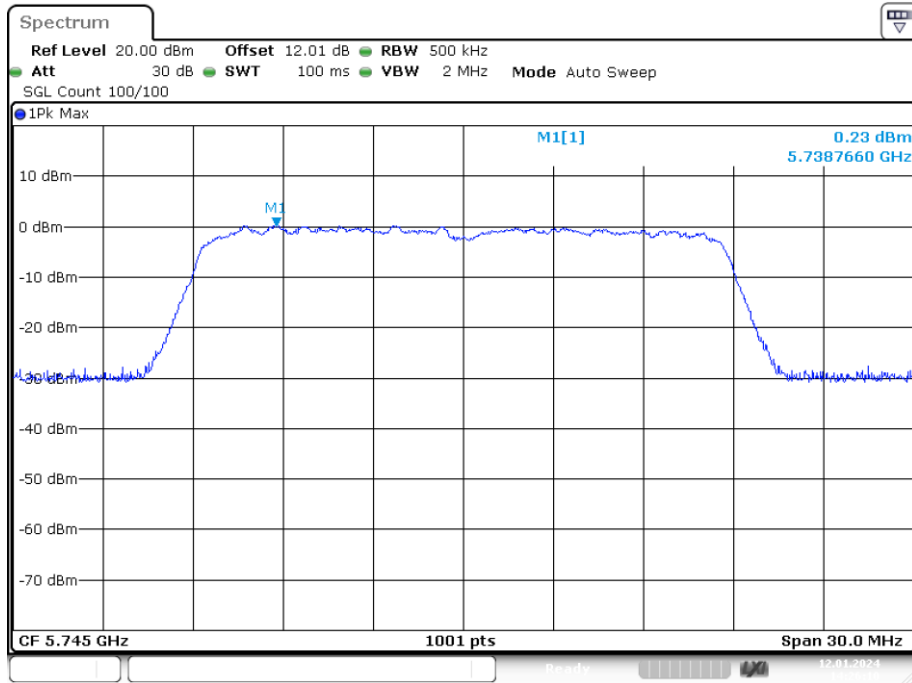


PSD NVNT n20 5785MHz Ant2

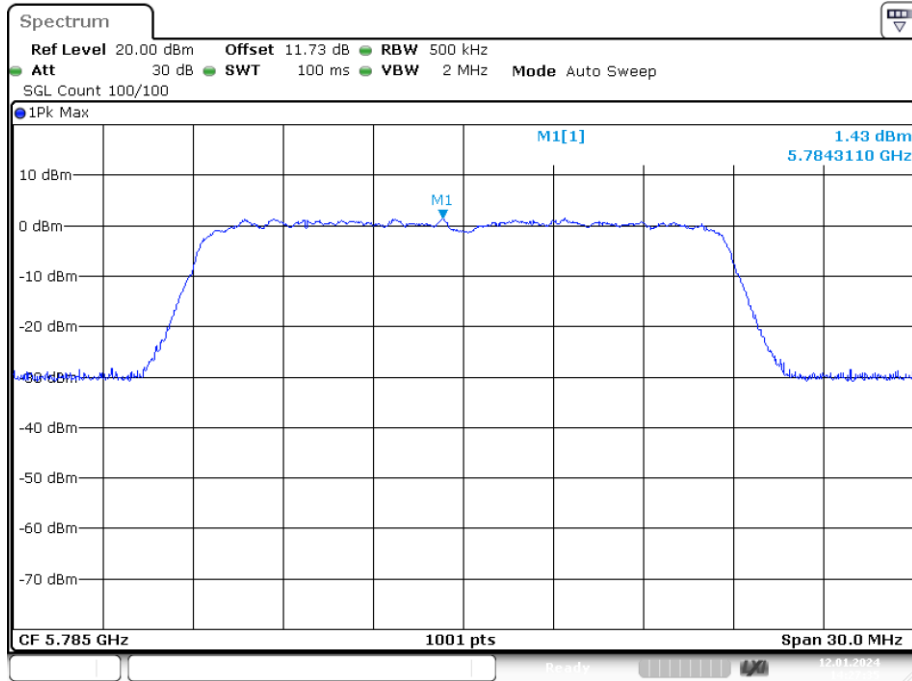


PSD NVNT n20 5825MHz Ant2

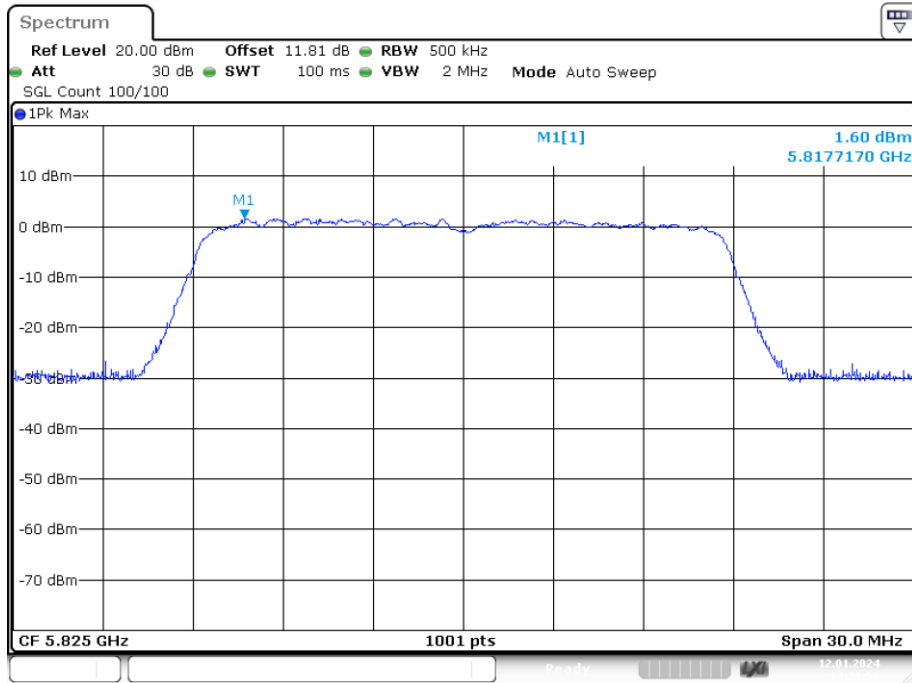

PSD NVNT n40 5755MHz Ant2

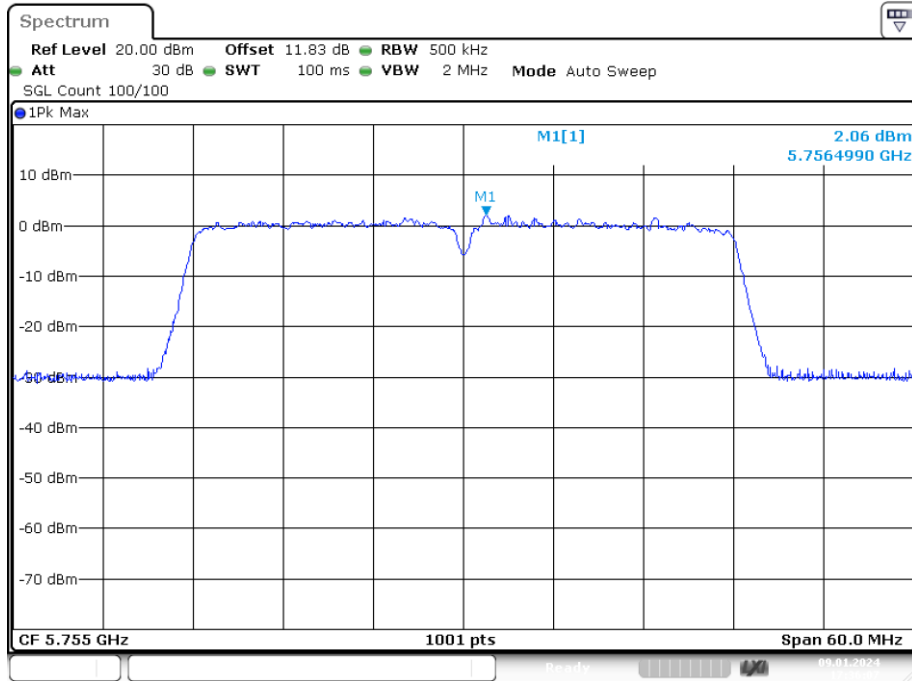


PSD NVNT n40 5795MHz Ant2

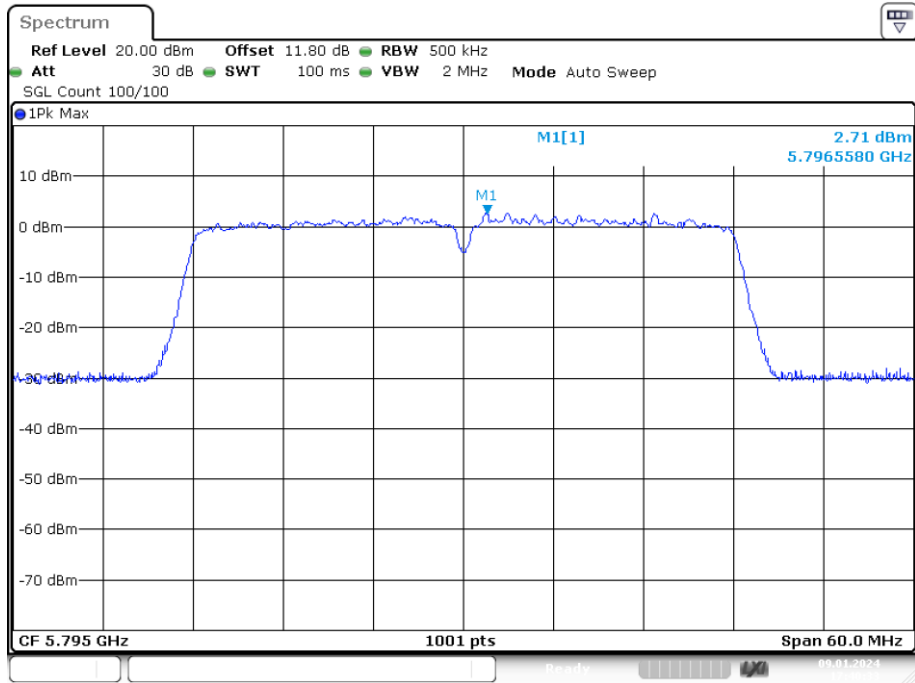

Date: 9.JAN.2024 17:40:33

4.5 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205, RSS-Gen §8.9																				
Test Method:	ANSI C63.10:2013																				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																				
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																	
Above 1GHz	Peak	1MHz	3MHz	Peak Value																	
	AV	1MHz	3MHz	Average Value																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>68.2</td> <td>Peak Value</td> </tr> </tbody> </table> <p>Undesirable emission limits:</p> <p>(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p>	Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	68.2	Peak Value																			
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>																				
Test setup:	Above 1GHz																				

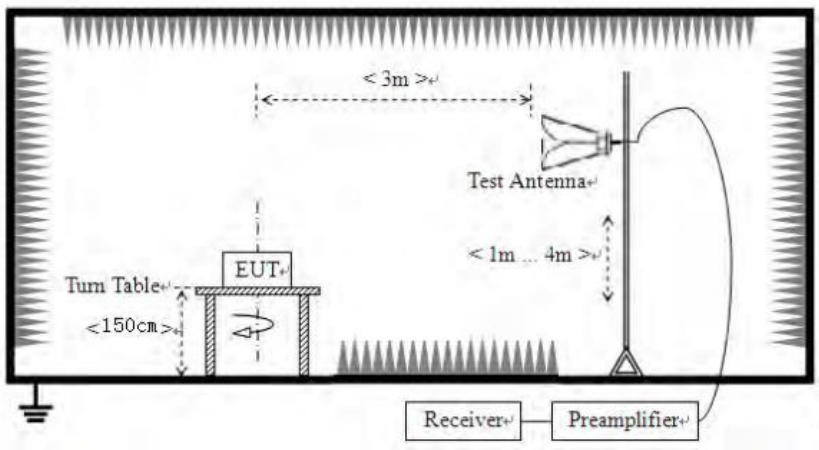	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.96	17.18	53.14	68.20	-15.06	PK
V	5150.00	36.52	17.18	53.70	68.20	-14.50	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.62	17.18	44.80	54.00	-9.20	AV
V	5150.00	24.96	17.18	42.14	54.00	-11.86	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.85	17.18	52.03	68.20	-16.17	PK
V	5350.00	35.96	17.18	53.14	68.20	-15.06	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.23	17.18	42.41	54.00	-11.59	AV
V	5350.00	23.75	17.18	40.93	54.00	-13.07	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.54	17.18	53.72	68.20	-14.48	PK
V	5150.00	34.47	17.18	51.65	68.20	-16.55	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.45	17.18	41.63	54.00	-12.37	AV
V	5150.00	27.27	17.18	44.45	54.00	-9.55	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.23	17.18	54.41	68.20	-13.79	PK
V	5350.00	36.45	17.18	53.63	68.20	-14.57	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.47	17.18	42.65	54.00	-11.35	AV
V	5350.00	25.47	17.18	42.65	54.00	-11.35	AV

Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.03	17.18	54.21	68.20	-13.99	PK
V	5150.00	33.49	17.18	50.67	68.20	-17.53	PK
Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.93	17.18	42.11	54.00	-11.89	AV
V	5150.00	24.73	17.18	41.91	54.00	-12.09	AV
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.47	17.18	54.65	68.20	-13.55	PK
V	5350.00	36.03	17.18	53.21	68.20	-14.99	PK
Mode:		802.11ac(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.69	17.18	43.87	54.00	-10.13	AV
V	5350.00	24.35	17.18	41.53	54.00	-12.47	AV

Mode:		802.11ax20		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.51	17.18	51.69	68.20	-16.51	PK
V	5150.00	33.63	17.18	50.81	68.20	-17.39	PK
Mode:		802.11ax20		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.88	17.18	43.06	54.00	-10.94	AV
V	5150.00	23.81	17.18	40.99	54.00	-13.01	AV
Mode:		802.11ax20		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.45	17.18	52.63	68.20	-15.57	PK
V	5350.00	36.30	17.18	53.48	68.20	-14.72	PK
Mode:		802.11ax20		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.31	17.18	44.49	54.00	-9.51	AV
V	5350.00	25.41	17.18	42.59	54.00	-11.41	AV

Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.95	17.18	51.13	68.20	-17.07	PK
V	5150.00	35.34	17.18	52.52	68.20	-15.68	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	26.80	17.18	43.98	54.00	-10.02	AV
V	5150.00	26.57	17.18	43.75	54.00	-10.25	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.37	17.18	51.55	68.20	-16.65	PK
V	5350.00	34.13	17.18	51.31	68.20	-16.89	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.53	17.18	44.71	54.00	-9.29	AV
V	5350.00	24.10	17.18	41.28	54.00	-12.72	AV

Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.59	17.18	51.77	68.20	-16.43	PK
V	5150.00	34.74	17.18	51.92	68.20	-16.28	PK
Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.30	17.18	44.48	54.00	-9.52	AV
V	5150.00	26.24	17.18	43.42	54.00	-10.58	AV
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.30	17.18	51.48	68.20	-16.72	PK
V	5350.00	34.47	17.18	51.65	68.20	-16.55	PK
Mode:		802.11ac(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.37	17.18	42.55	54.00	-11.45	AV
V	5350.00	24.32	17.18	41.50	54.00	-12.50	AV

Mode:		802.11ax40		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.67	17.18	51.85	68.20	-16.35	PK
V	5150.00	34.48	17.18	51.66	68.20	-16.54	PK
Mode:		802.11ax40		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.51	17.18	41.69	54.00	-12.31	AV
V	5150.00	26.96	17.18	44.14	54.00	-9.86	AV
Mode:		802.11ax40		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.32	17.18	54.50	68.20	-13.70	PK
V	5350.00	33.67	17.18	50.85	68.20	-17.35	PK
Mode:		802.11ax40		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	28.16	17.18	45.34	54.00	-8.66	AV
V	5350.00	27.08	17.18	44.26	54.00	-9.74	AV

Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.50	17.18	52.68	68.20	-15.52	PK
V	5150.00	35.65	17.18	52.83	68.20	-15.37	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.43	17.18	42.61	54.00	-11.39	AV
V	5150.00	25.23	17.18	42.41	54.00	-11.59	AV
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.05	17.18	53.23	68.20	-14.97	PK
V	5350.00	35.35	17.18	52.53	68.20	-15.67	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.32	17.18	41.50	54.00	-12.50	AV
V	5350.00	23.43	17.18	40.61	54.00	-13.39	AV

Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.61	17.18	53.79	68.20	-14.41	PK
V	5150.00	35.27	17.18	52.45	68.20	-15.75	PK
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.63	17.18	42.81	54.00	-11.19	AV
V	5150.00	23.65	17.18	40.83	54.00	-13.17	AV
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.34	17.18	52.52	68.20	-15.68	PK
V	5350.00	33.92	17.18	51.10	68.20	-17.10	PK
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.38	17.18	42.56	54.00	-11.44	AV
V	5350.00	26.43	17.18	43.61	54.00	-10.39	AV

Band2

Mode:		802.11a		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.58	17.19	53.77	68.20	-14.43	PK
V	5150.00	34.13	17.19	51.32	68.20	-16.88	PK
Mode:		802.11a		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.86	17.19	45.05	54.00	-8.95	AV
V	5150.00	25.69	17.19	42.88	54.00	-11.12	AV
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	37.49	17.19	54.68	68.20	-13.52	PK
V	5350.00	33.61	17.19	50.80	68.20	-17.40	PK
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.66	17.19	44.85	54.00	-9.15	AV
V	5350.00	25.65	17.19	42.84	54.00	-11.16	AV

Mode:		802.11n(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.31	17.19	52.50	68.20	-15.70	PK
V	5150.00	35.73	17.19	52.92	68.20	-15.28	PK
Mode:		802.11n(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.71	17.19	44.90	54.00	-9.10	AV
V	5150.00	24.61	17.19	41.80	54.00	-12.20	AV
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.48	17.19	51.67	68.20	-16.53	PK
V	5350.00	35.88	17.19	53.07	68.20	-15.13	PK
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.21	17.19	42.40	54.00	-11.60	AV
V	5350.00	24.55	17.19	41.74	54.00	-12.26	AV

Mode:		802.11ac(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.25	17.19	52.44	68.20	-15.76	PK
V	5150.00	34.30	17.19	51.49	68.20	-16.71	PK
Mode:		802.11ac(HT20)		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	27.07	17.19	44.26	54.00	-9.74	AV
V	5150.00	24.58	17.19	41.77	54.00	-12.23	AV
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.58	17.19	53.77	68.20	-14.43	PK
V	5350.00	37.43	17.19	54.62	68.20	-13.58	PK
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.74	17.19	42.93	54.00	-11.07	AV
V	5350.00	25.30	17.19	42.49	54.00	-11.51	AV

Mode:		802.11ax20		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.15	17.19	52.34	68.20	-15.86	PK
V	5150.00	35.60	17.19	52.79	68.20	-15.41	PK
Mode:		802.11ax20		Frequency:		5260MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.99	17.19	43.18	54.00	-10.82	AV
V	5150.00	26.21	17.19	43.40	54.00	-10.60	AV
Mode:		802.11ax20		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.42	17.19	53.61	68.20	-14.59	PK
V	5350.00	34.20	17.19	51.39	68.20	-16.81	PK
Mode:		802.11ax20		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.28	17.19	44.47	54.00	-9.53	AV
V	5350.00	26.98	17.19	44.17	54.00	-9.83	AV

Mode:		802.11n(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.40	17.19	53.59	68.20	-14.61	PK
V	5150.00	35.69	17.19	52.88	68.20	-15.32	PK
Mode:		802.11n(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	28.29	17.19	45.48	54.00	-8.52	AV
V	5150.00	26.75	17.19	43.94	54.00	-10.06	AV
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.63	17.19	52.82	68.20	-15.38	PK
V	5350.00	35.75	17.19	52.94	68.20	-15.26	PK
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.97	17.19	42.16	54.00	-11.84	AV
V	5350.00	24.41	17.19	41.60	54.00	-12.40	AV

Mode:		802.11ac(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	37.35	17.19	54.54	68.20	-13.66	PK
V	5150.00	34.31	17.19	51.50	68.20	-16.70	PK
Mode:		802.11ac(HT40)		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.23	17.19	42.42	54.00	-11.58	AV
V	5150.00	24.76	17.19	41.95	54.00	-12.05	AV
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.79	17.19	53.98	68.20	-14.22	PK
V	5350.00	37.18	17.19	54.37	68.20	-13.83	PK
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.15	17.19	44.34	54.00	-9.66	AV
V	5350.00	25.49	17.19	42.68	54.00	-11.32	AV

Mode:		802.11ax40		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.52	17.19	53.71	68.20	-14.49	PK
V	5150.00	35.25	17.19	52.44	68.20	-15.76	PK
Mode:		802.11ax40		Frequency:		5270MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.60	17.19	42.79	54.00	-11.21	AV
V	5150.00	25.42	17.19	42.61	54.00	-11.39	AV
Mode:		802.11ax40		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	35.00	17.19	52.19	68.20	-16.01	PK
V	5350.00	36.87	17.19	54.06	68.20	-14.14	PK
Mode:		802.11ax40		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.40	17.19	44.59	54.00	-9.41	AV
V	5350.00	25.18	17.19	42.37	54.00	-11.63	AV

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	36.21	17.19	53.40	68.20	-14.80	PK
V	5150.00	35.23	17.19	52.42	68.20	-15.78	PK
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.35	17.19	41.54	54.00	-12.46	AV
V	5150.00	24.87	17.19	42.06	54.00	-11.94	AV
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.34	17.19	51.53	68.20	-16.67	PK
V	5350.00	36.99	17.19	54.18	68.20	-14.02	PK
Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.72	17.19	43.91	54.00	-10.09	AV
V	5350.00	25.52	17.19	42.71	54.00	-11.29	AV

Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	35.32	17.19	52.51	68.20	-15.69	PK
V	5150.00	37.02	17.19	54.21	68.20	-13.99	PK
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.35	17.19	41.54	54.00	-12.46	AV
V	5150.00	23.82	17.19	41.01	54.00	-12.99	AV
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	36.15	17.19	53.34	68.20	-14.86	PK
V	5350.00	35.33	17.19	52.52	68.20	-15.68	PK
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.30	17.19	42.49	54.00	-11.51	AV
V	5350.00	24.23	17.19	41.42	54.00	-12.58	AV

Band3

Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	39.19	17.21	56.40	68.20	-11.80	PK
V	5470.00	37.22	17.21	54.43	68.20	-13.77	PK
Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	25.51	17.21	42.72	54.00	-11.28	AV
V	5470.00	26.16	17.21	43.37	54.00	-10.63	AV
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	36.51	17.21	53.72	68.20	-14.48	PK
V	5725.00	37.91	17.21	55.12	68.20	-13.08	PK
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	25.97	17.21	43.18	54.00	-10.82	AV
V	5725.00	26.96	17.21	44.17	54.00	-9.83	AV

Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	39.41	17.21	56.62	68.20	-11.58	PK
V	5470.00	35.63	17.21	52.84	68.20	-15.36	PK
Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	28.67	17.21	45.88	54.00	-8.12	AV
V	5470.00	26.82	17.21	44.03	54.00	-9.97	AV
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	38.91	17.21	56.12	68.20	-12.08	PK
V	5725.00	37.24	17.21	54.45	68.20	-13.75	PK
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	26.69	17.21	43.90	54.00	-10.10	AV
V	5725.00	24.65	17.21	41.86	54.00	-12.14	AV

Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	38.57	17.21	55.78	68.20	-12.42	PK
V	5470.00	35.45	17.21	52.66	68.20	-15.54	PK
Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	25.74	17.21	42.95	54.00	-11.05	AV
V	5470.00	24.76	17.21	41.97	54.00	-12.03	AV
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	36.77	17.21	53.98	68.20	-14.22	PK
V	5725.00	34.47	17.21	51.68	68.20	-16.52	PK
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	26.75	17.21	43.96	54.00	-10.04	AV
V	5725.00	28.04	17.21	45.25	54.00	-8.75	AV

Mode:		802.11ax20		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	37.10	17.21	54.31	68.20	-13.89	PK
V	5470.00	36.04	17.21	53.25	68.20	-14.95	PK
Mode:		802.11ax20		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	25.08	17.21	42.29	54.00	-11.71	AV
V	5470.00	27.91	17.21	45.12	54.00	-8.88	AV
Mode:		802.11ax20		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	38.99	17.21	56.20	68.20	-12.00	PK
V	5725.00	37.92	17.21	55.13	68.20	-13.07	PK
Mode:		802.11ax20		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	26.11	17.21	43.32	54.00	-10.68	AV
V	5725.00	28.26	17.21	45.47	54.00	-8.53	AV

Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.74	17.21	53.95	68.20	-14.25	PK
V	5470.00	34.95	17.21	52.16	68.20	-16.04	PK
Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	27.50	17.21	44.71	54.00	-9.29	AV
V	5470.00	26.46	17.21	43.67	54.00	-10.33	AV
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.71	17.21	54.92	68.20	-13.28	PK
V	5725.00	37.17	17.21	54.38	68.20	-13.82	PK
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.34	17.21	44.55	54.00	-9.45	AV
V	5725.00	26.09	17.21	43.30	54.00	-10.70	AV

Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.51	17.21	53.72	68.20	-14.48	PK
V	5470.00	35.42	17.21	52.63	68.20	-15.57	PK
Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	25.72	17.21	42.93	54.00	-11.07	AV
V	5470.00	25.34	17.21	42.55	54.00	-11.45	AV
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.92	17.21	55.13	68.20	-13.07	PK
V	5725.00	36.35	17.21	53.56	68.20	-14.64	PK
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	25.62	17.21	42.83	54.00	-11.17	AV
V	5725.00	28.29	17.21	45.50	54.00	-8.50	AV


Mode:		802.11ax40		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.15	17.21	53.36	68.20	-14.84	PK
V	5470.00	34.81	17.21	52.02	68.20	-16.18	PK
Mode:		802.11ax40		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	28.00	17.21	45.21	54.00	-8.79	AV
V	5470.00	28.31	17.21	45.52	54.00	-8.48	AV
Mode:		802.11ax40		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	36.14	17.21	53.35	68.20	-14.85	PK
V	5725.00	36.91	17.21	54.12	68.20	-14.08	PK
Mode:		802.11ax40		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.93	17.21	45.14	54.00	-8.86	AV
V	5725.00	28.15	17.21	45.36	54.00	-8.64	AV

Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	35.70	17.21	52.91	68.20	-15.29	PK
V	5470.00	36.24	17.21	53.45	68.20	-14.75	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	26.87	17.21	44.08	54.00	-9.92	AV
V	5470.00	27.98	17.21	45.19	54.00	-8.81	AV
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	39.10	17.21	56.31	68.20	-11.89	PK
V	5725.00	34.14	17.21	51.35	68.20	-16.85	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.93	17.21	45.14	54.00	-8.86	AV
V	5725.00	25.47	17.21	42.68	54.00	-11.32	AV

Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	38.07	17.21	55.28	68.20	-12.92	PK
V	5470.00	35.49	17.21	52.70	68.20	-15.50	PK
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	26.76	17.21	43.97	54.00	-10.03	AV
V	5470.00	25.95	17.21	43.16	54.00	-10.84	AV
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.39	17.21	54.60	68.20	-13.60	PK
V	5725.00	37.40	17.21	54.61	68.20	-13.59	PK
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.05	17.21	44.26	54.00	-9.74	AV
V	5725.00	24.59	17.21	41.80	54.00	-12.20	AV

Band4


802.11a

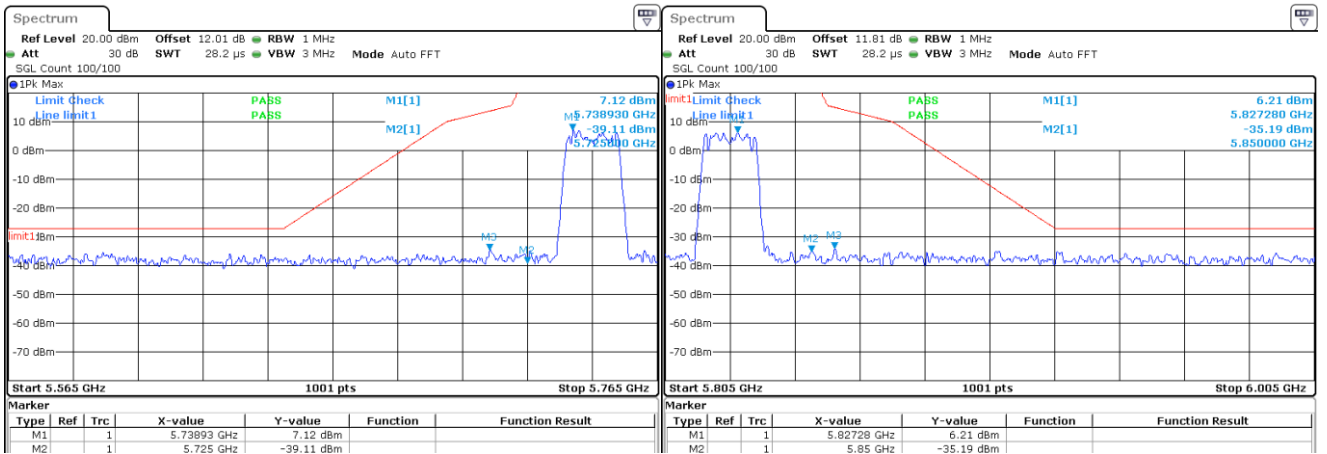

Low: 5745MHz

High: 5825MHz


802.11n(HT20)

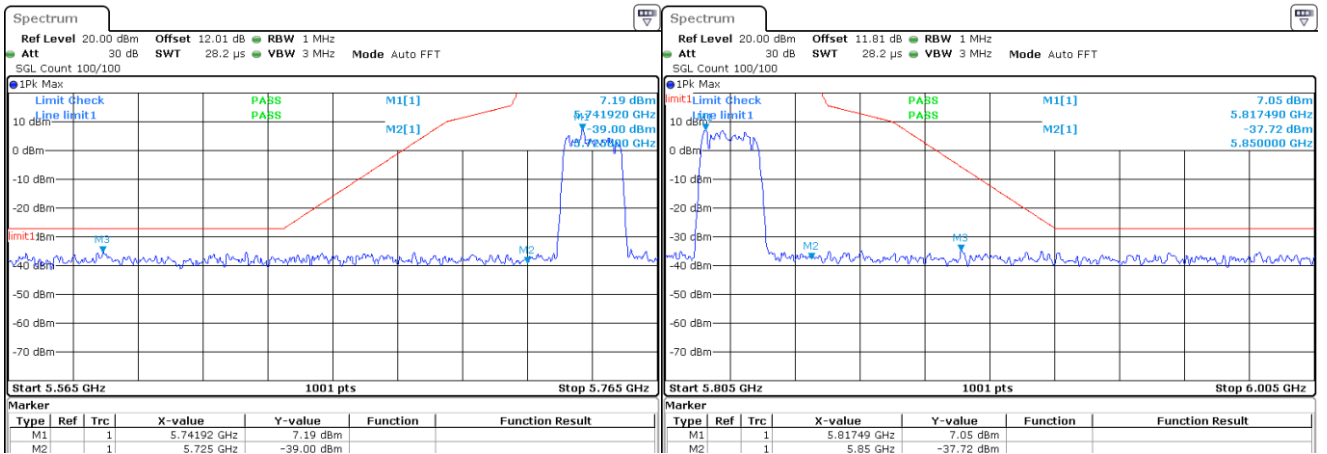

Low: 5745MHz

High: 5825MHz


802.11ac(HT20)

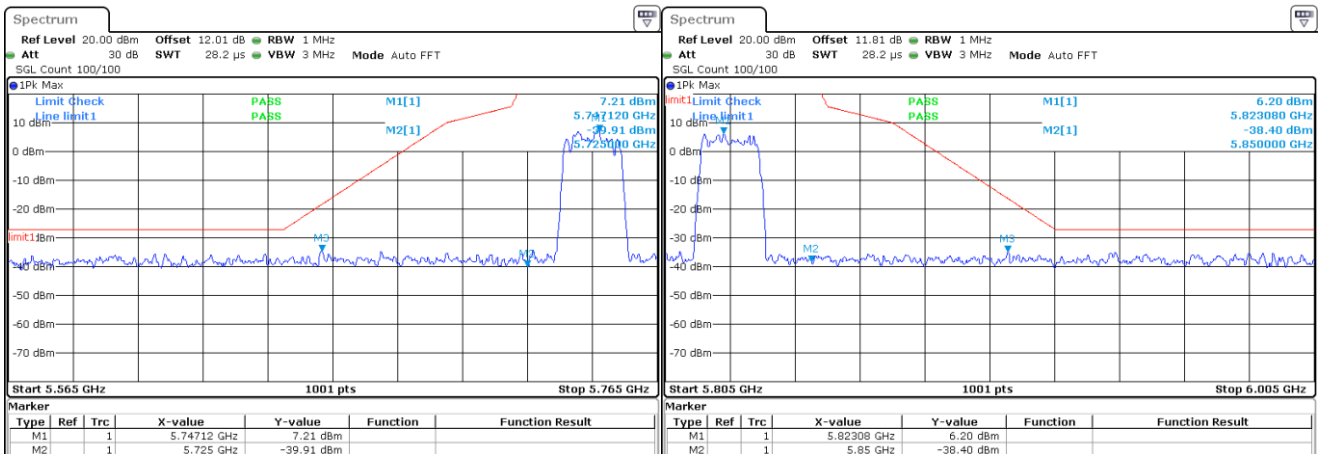


Low: 5745MHz

High: 5825MHz

802.11n(HT40)

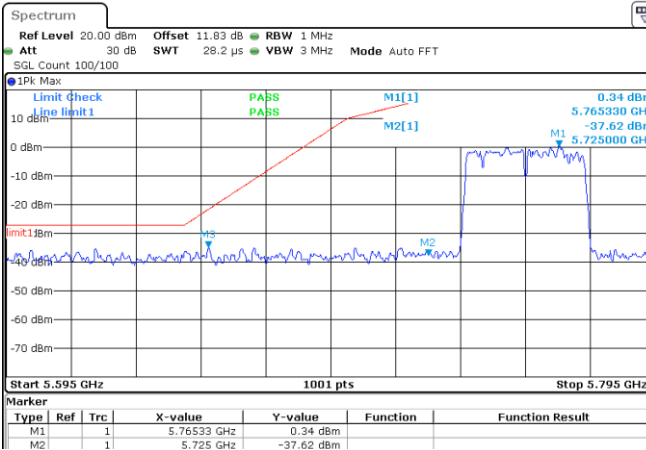


Low: 5755MHz

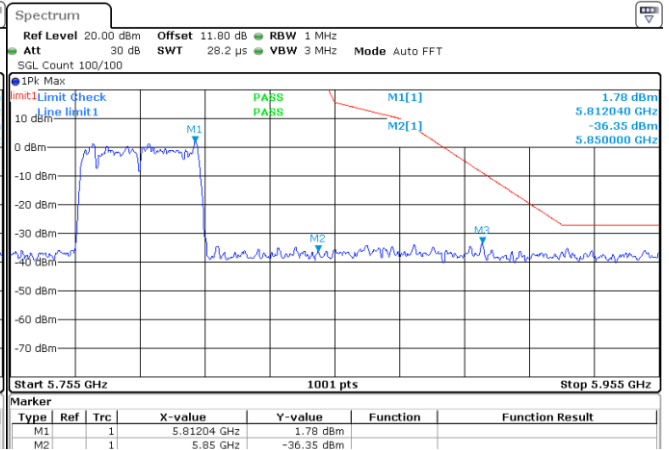


High: 5795MHz

802.11ac(HT40)

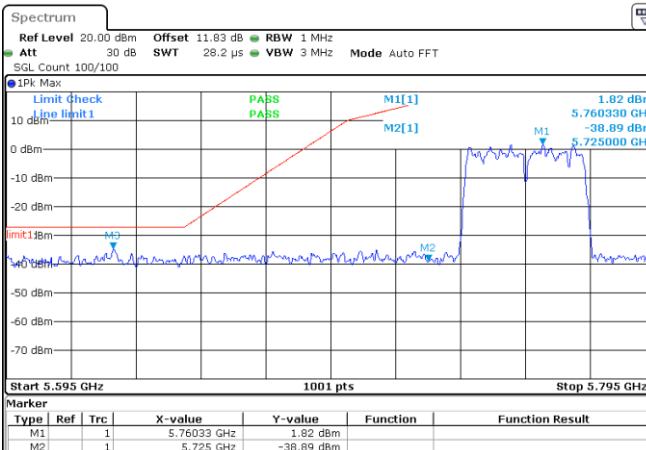


Low: 5755MHz

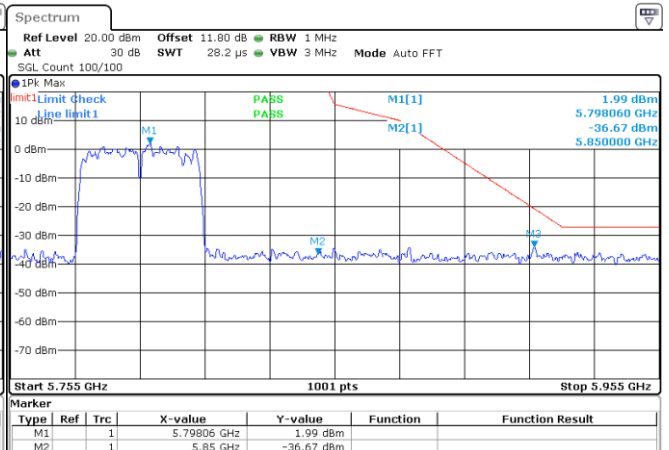


High: 5795MHz

802.11ac(HT80)

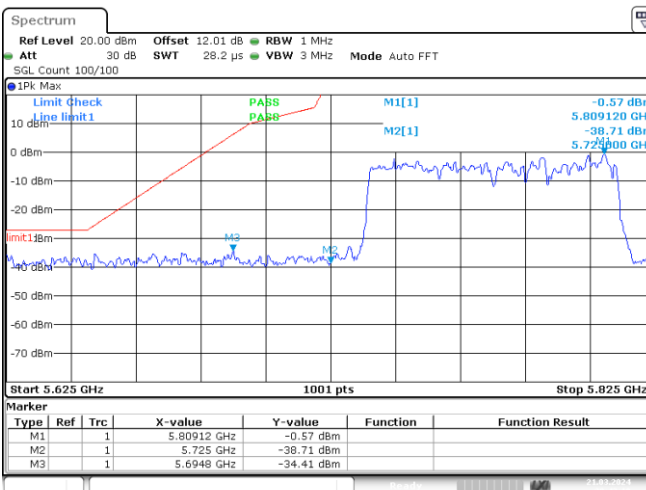


5775MHz

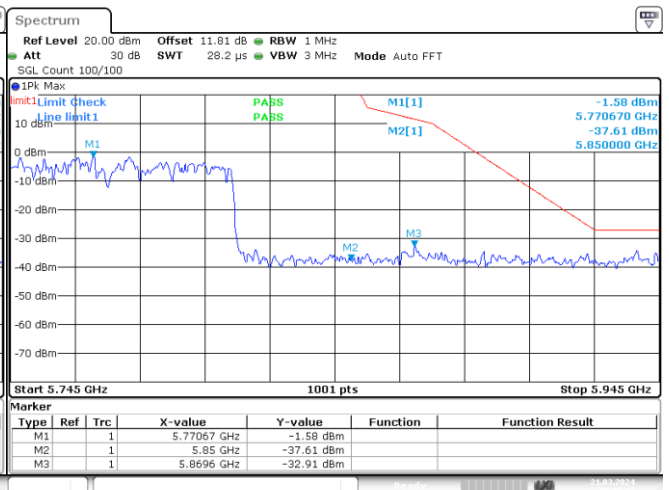

5775MHz


802.11ax20

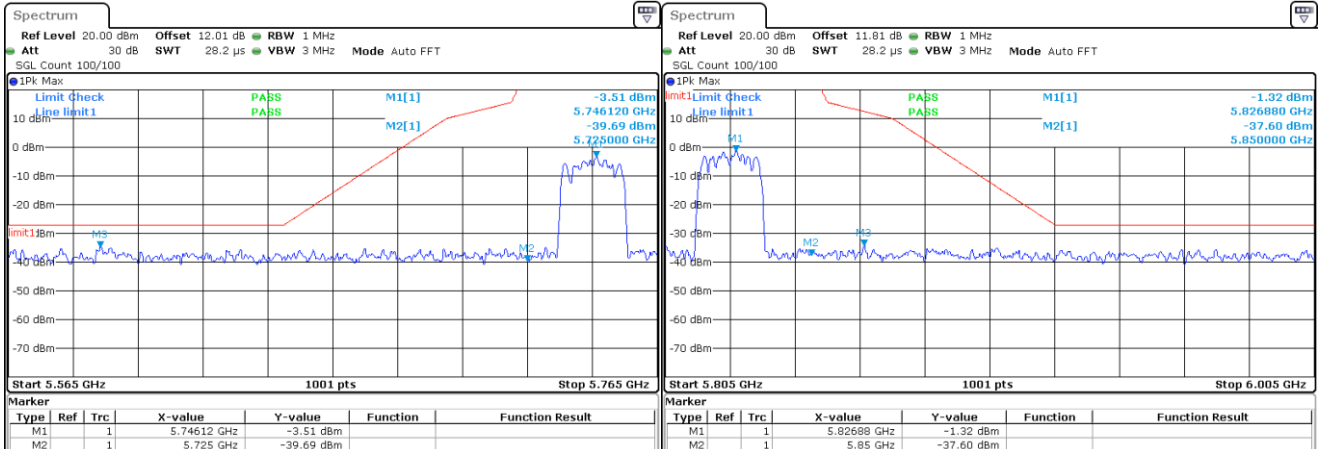

Low: 5745MHz

High: 5825MHz


802.11ax40

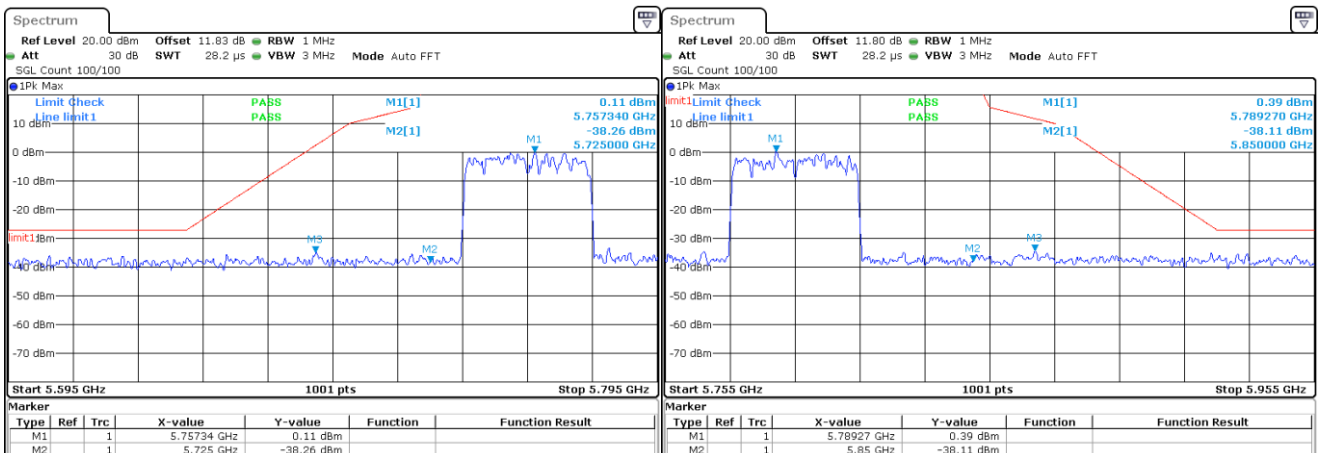

Low: 5755MHz

High: 5795MHz

802.11ax80

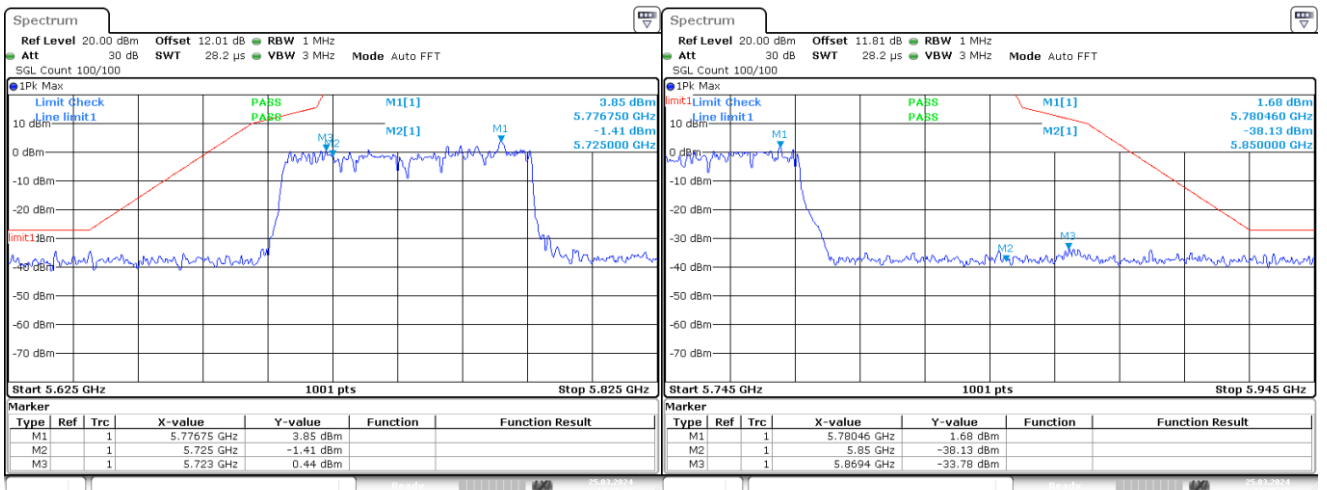

Date: 25.MAR.2024 14:27:59

Date: 25.MAR.2024 14:28:15


5775MHz


5775MHz

Note: 1. Except for mode a, other modes test the MIMO status.

4.6 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
		54.0		Average Value	
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1>.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>2>.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 				

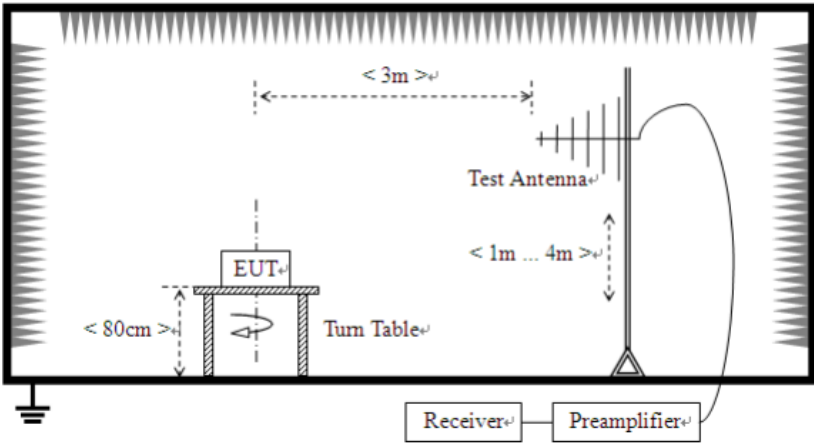	<ol style="list-style-type: none"> 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>

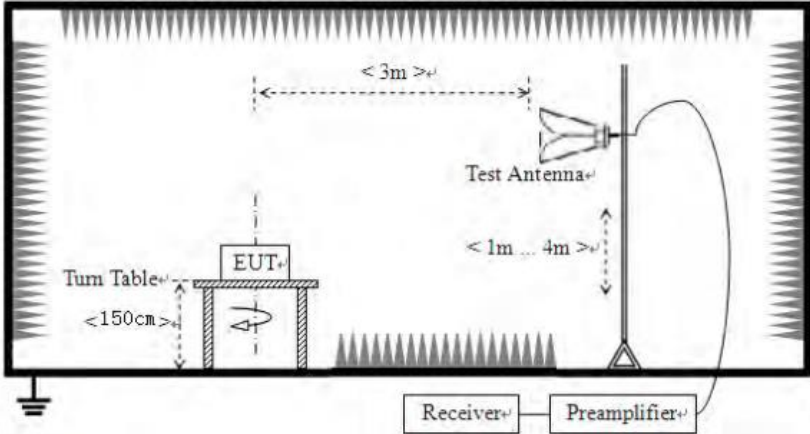	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:**Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.77	47.91	11.25	0.59	30.08	29.67	40	-10.33	Vertical
54.47	41.39	11.93	0.81	29.96	24.17	40	-15.83	Vertical
120.73	46.87	9.4	1.36	29.57	28.06	43.5	-15.44	Vertical
172.32	42.97	8.5	1.7	29.31	23.86	43.5	-19.64	Vertical
441.19	36.68	16.29	3.05	29.41	26.61	46	-19.39	Vertical
860.35	33.65	21.83	4.69	29.14	31.03	46	-14.97	Vertical
65.16	35.61	8.73	0.9	29.89	15.35	40	-24.65	Horizontal
100.53	34.24	11.73	1.19	29.7	17.46	43.5	-26.04	Horizontal
270.40	45.37	12.53	2.22	29.79	30.33	46	-15.67	Horizontal
350.56	36.80	14.5	2.62	29.73	24.19	46	-21.81	Horizontal
627.39	36.01	19.43	3.83	29.27	30.00	46	-16.00	Horizontal
955.84	41.45	22.54	5.06	29.1	39.95	46	-6.05	Horizontal

Above 1GHz:**802.11a(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.64	67.86	11.25	14.62	32.65	61.08	74	-12.92	Vertical
15540.06	63.31	11.93	17.66	34.46	58.44	74	-15.56	Vertical
10360.74	64.22	9.4	14.62	32.65	55.59	74	-18.41	Horizontal
15540.41	68.01	8.5	17.66	34.46	59.71	74	-14.29	Horizontal

802.11a(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.89	67.91	16.29	14.62	32.65	66.17	74	-7.83	Vertical
15600.60	55.40	21.83	17.66	34.46	60.43	74	-13.57	Vertical
10400.52	65.41	8.73	14.62	32.65	56.11	74	-17.89	Horizontal
15600.16	68.48	11.73	17.66	34.46	63.41	74	-10.59	Horizontal

802.11a(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.20	67.12	11.25	14.62	32.65	60.34	74	-13.66	Vertical
15720.26	63.23	11.93	17.66	34.46	58.36	74	-15.64	Vertical
10480.57	64.74	9.4	14.62	32.65	56.11	74	-17.89	Horizontal
15720.88	68.14	8.5	17.66	34.46	59.84	74	-14.16	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.51	67.41	16.29	14.62	32.65	65.67	74	-8.33	Vertical
15540.53	54.95	21.83	17.66	34.46	59.98	74	-14.02	Vertical
10360.05	65.36	8.73	14.62	32.65	56.06	74	-17.94	Horizontal
15540.31	68.32	11.73	17.66	34.46	63.25	74	-10.75	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.15	67.64	11.25	14.62	32.65	60.86	74	-13.14	Vertical
15600.64	62.78	11.93	17.66	34.46	57.91	74	-16.09	Vertical
10401.00	64.16	9.4	14.62	32.65	55.53	74	-18.47	Horizontal
15600.99	67.81	8.5	17.66	34.46	59.51	74	-14.49	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.81	67.51	16.29	14.62	32.65	65.77	74	-8.23	Vertical
15720.68	54.72	21.83	17.66	34.46	59.75	74	-14.25	Vertical
10480.97	64.96	8.73	14.62	32.65	55.66	74	-18.34	Horizontal
15720.49	68.06	11.73	17.66	34.46	62.99	74	-11.01	Horizontal

802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.98	67.39	11.25	14.62	32.65	60.61	74	-13.39	Vertical
15540.43	63.36	11.93	17.66	34.46	58.49	74	-15.51	Vertical
10360.97	64.16	9.4	14.62	32.65	55.53	74	-18.47	Horizontal
15540.86	67.72	8.5	17.66	34.46	59.42	74	-14.58	Horizontal

802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.97	67.19	16.29	14.62	32.65	65.45	74	-8.55	Vertical
15600.96	55.18	21.83	17.66	34.46	60.21	74	-13.79	Vertical
10400.20	65.41	8.73	14.62	32.65	56.11	74	-17.89	Horizontal
15600.77	68.45	11.73	17.66	34.46	63.38	74	-10.62	Horizontal

802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.46	67.54	11.25	14.62	32.65	60.76	74	-13.24	Vertical
15720.83	63.02	11.93	17.66	34.46	58.15	74	-15.85	Vertical
10480.91	64.51	9.4	14.62	32.65	55.88	74	-18.12	Horizontal
15720.83	67.66	8.5	17.66	34.46	59.36	74	-14.64	Horizontal

802.11ax20 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.38	67.09	16.29	14.62	32.65	65.35	74	-8.65	Vertical
15540.28	55.08	21.83	17.66	34.46	60.11	74	-13.89	Vertical
10360.00	64.67	8.73	14.62	32.65	55.37	74	-18.63	Horizontal
15540.94	67.92	11.73	17.66	34.46	62.85	74	-11.15	Horizontal

802.11ax20 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.35	67.45	11.25	14.62	32.65	60.67	74	-13.33	Vertical
15600.23	62.92	11.93	17.66	34.46	58.05	74	-15.95	Vertical
10400.39	64.29	9.4	14.62	32.65	55.66	74	-18.34	Horizontal
15600.69	67.80	8.5	17.66	34.46	59.50	74	-14.50	Horizontal

802.11ax20 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.77	67.24	16.29	14.62	32.65	65.50	74	-8.50	Vertical
15720.54	54.81	21.83	17.66	34.46	59.84	74	-14.16	Vertical
10480.65	64.71	8.73	14.62	32.65	55.41	74	-18.59	Horizontal
15720.01	67.57	11.73	17.66	34.46	62.50	74	-11.50	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.98	67.95	11.25	14.62	32.65	61.17	74	-12.83	Vertical
15570.16	63.36	11.93	17.66	34.46	58.49	74	-15.51	Vertical
10380.59	64.30	9.4	14.62	32.65	55.67	74	-18.33	Horizontal
15570.38	67.74	8.5	17.66	34.46	59.44	74	-14.56	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.52	67.02	16.29	14.62	32.65	65.28	74	-8.72	Vertical
15690.35	55.54	21.83	17.66	34.46	60.57	74	-13.43	Vertical
10460.05	64.75	8.73	14.62	32.65	55.45	74	-18.55	Horizontal
15690.07	67.59	11.73	17.66	34.46	62.52	74	-11.48	Horizontal

802.11ac(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.45	67.20	11.25	14.62	32.65	60.42	74	-13.58	Vertical
15570.25	63.05	11.93	17.66	34.46	58.18	74	-15.82	Vertical
10380.32	64.79	9.4	14.62	32.65	56.16	74	-17.84	Horizontal
15570.03	67.92	8.5	17.66	34.46	59.62	74	-14.38	Horizontal

802.11ac(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.10	67.17	16.29	14.62	32.65	65.43	74	-8.57	Vertical
15690.86	55.31	21.83	17.66	34.46	60.34	74	-13.66	Vertical
10460.77	65.50	8.73	14.62	32.65	56.20	74	-17.80	Horizontal
15690.06	68.24	11.73	17.66	34.46	63.17	74	-10.83	Horizontal

802.11ax40 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.76	67.98	11.25	14.62	32.65	61.20	74	-12.80	Vertical
15570.02	62.87	11.93	17.66	34.46	58.00	74	-16.00	Vertical
10380.87	64.27	9.4	14.62	32.65	55.64	74	-18.36	Horizontal
15570.96	67.58	8.5	17.66	34.46	59.28	74	-14.72	Horizontal

802.11ax40 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.02	67.05	16.29	14.62	32.65	65.31	74	-8.69	Vertical
15690.88	55.50	21.83	17.66	34.46	60.53	74	-13.47	Vertical
10460.16	65.46	8.73	14.62	32.65	56.16	74	-17.84	Horizontal
15690.55	68.48	11.73	17.66	34.46	63.41	74	-10.59	Horizontal

802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.59	67.70	11.25	14.62	32.65	60.92	74	-13.08	Vertical
15630.91	63.36	11.93	17.66	34.46	58.49	74	-15.51	Vertical
10420.84	64.88	9.4	14.62	32.65	56.25	74	-17.75	Horizontal
15630.95	68.01	8.5	17.66	34.46	59.71	74	-14.29	Horizontal

802.11ax80 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.13	67.20	16.29	14.62	32.65	65.46	74	-8.54	Vertical
15630.93	54.96	21.83	17.66	34.46	59.99	74	-14.01	Vertical
10420.92	65.04	8.73	14.62	32.65	55.74	74	-18.26	Horizontal
15630.90	67.75	11.73	17.66	34.46	62.68	74	-11.32	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case (U-NII-1).
5. Except for mode a, other modes test the MIMO status.

-----END OF REPORT-----