
FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

FN-LINK TECHNOLOGY LIMITED

**5th Floor, A Building, Haoye Logistics Park, Shugang Channel, Ban'an
District, Shenzhen City, China**

E.U.T.: USB WIFI Module

Model Name: F11AUUM13-W3, F11AUUM13-W2

Brand Name: FN-LINK

FCC ID: 2AATL-F11AUUM13

Report Number: NTC1501248F

Test Date(s): February 06, 2015 to March 23, 2015

Report Date(s): March 21, 2015

Prepared by

Dongguan Nore Testing Center Co., Ltd.

**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Rose Hu / Engineer



Sunm Lv / Q.A. Director



Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	7
1.4 EQUIPMENT MODIFICATIONS	7
1.5 SUPPORT DEVICE	7
1.6 TEST FACILITY AND LOCATION.....	8
1.7 SUMMARY OF TEST RESULTS.....	8
2. SYSTEM TEST CONFIGURATION.....	9
2.1 EUT CONFIGURATION	9
2.2 SPECIAL ACCESSORIES.....	9
2.3 DESCRIPTION OF TEST MODES	9
2.4 EUT EXERCISE	9
3. CONDUCTED EMISSIONS TEST	10
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
3.2 TEST CONDITION	10
3.3 MEASUREMENT RESULTS.....	10
4. MAX. CONDUCTED OUTPUT POWER.....	13
4.1 MEASUREMENT PROCEDURE	13
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
4.3 MEASUREMENT RESULTS.....	13
5. 6DB&20DB BANDWIDTH.....	23
5.1 MEASUREMENT PROCEDURE	23
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	23
5.3 MEASUREMENT RESULTS.....	23
6. POWER SPECTRAL DENSITY	47
6.1 MEASUREMENT PROCEDURE	47
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	47
6.3 MEASUREMENT RESULTS.....	47
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	61
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE.....	61
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	61
7.3 MEASUREMENT RESULTS.....	61



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS	79
8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	79
8.2 MEASUREMENT PROCEDURE	80
8.3 LIMIT.....	81
8.4 MEASUREMENT RESULTS	82
9. ANTENNA APPLICATION	106
9.1 ANTENNA REQUIREMENT	106
9.2 MEASUREMENT RESULTS.....	106
10. TEST EQUIPMENT LIST.....	107

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This device is a USB WIFI Module. It's powered by DC 3.3V come from external power source. For more details features, please refer to User's Manual.

Manufacturer : FN-LINK TECHNOLOGY LIMITED
Address : 5th Floor, A Building, Haoye Logistics Park, Shugang Channel, Ban'an District, Shenzhen City, China

Power Supply : DC 3.3V

Model name : F11AUUM13-W3, F11AUUM13-W2

Note : Both of models have the same circuit schematic, construction and critical components except model number due to marketing purpose.
Only one of the model F11AUUM13-W3 was test in this report.

Technical parameters

For 2.4G Function

Frequency Range : 2412-2462MHz for 802.11b/g/n(HT20)
2422-2452MHz for 802.11n(HT40)

Modulation : CCK, DQPSK, DBPSK for 802.11b
OFDM for 802.11g/n

Number of Channel : 11 for 802.11b/g/n(HT20)
7 for 802.11n(HT40)

Channel space : 5MHz

Date Rate : 802.11b:1~11Mbps, 802.11g:6~54Mbps
802.11n: 6.5~135Mbps

Antenna Type : Integral (The kind of antenna that users can be use: FPC antenna, PCB antenna, Integral antenna)

Antenna Gain : 0 dBi (declared by manufacturer)



Technical parameters	For 5.8G Function
Frequency Range	: 5725-5850MHz
Modulation	: OFDM-BPSK, QPSK, 16QAM, 64QAM for 802.11a/n OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM for 802.11ac
Number of Channel	: 149-165(5) for 802.11a/n(HT20)/ac(VHT20), 151-159(2) for 802.11n(HT40)/ac(VHT40), 155(1) for 802.11ac(VHT80)
Antenna Type	: Integral (The kind of antenna that users can be use: FPC antenna, PCB antenna, Integral antenna)
Antenna Gain	: 0 dBi (declared by manufacturer)

For 2.4GHz, Channel List

802.11 b/g/n(HT20)		802.11 n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	---	---
2	2417	---	---
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	---	---
11	2462	---	---

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)		802.11 n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	3	2422
6	2437	6	2437
11	2462	9	2452

For 5.8GHz

802.11a/n(HT20)/n(VHT20)		802.11 n(HT40)/n(VHT40)	
Channel	Frequency MHz	Channel	Frequency MHz
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805	802.11 n(VHT80)	
165	5825	155	5775

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AATL-F11AUUM13** filing to comply with Section 15.247 of the FCC Part 15(2013), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and KDB558074 (v03r02). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

PC	:	Manufacturer: DELL M/N: Vostro 3902 S/N: 108MY02 Power Cord: 1.8m Unshielded, with core CE, FCC: DOC
LCD Monitor	:	Manufacturer: LENOVO M/N: L2061WD S/N: 3M04769B1102083 Data Cable: 1.5m Shielded, with core Power Cord: 1.5m Unshielded, with core CE , FCC:DOC
Mouse	:	Manufacturer: HP M/N: MODGUO S/N: PSA1104008298 Data Cable: 1.5m Shielded CE, FCC: DOC
Keyboard	:	Manufacturer: HP M/N: PR1101U S/N: BAUWT0AHHZX8BC Data Cable: 1.5m Shielded CE, FCC: DOC



1.6 Test Facility and Location

Listed by FCC, August 02, 2011
 The Certificate Registration Number is 665078.
 Listed by Industry Canada, July 01, 2011
 The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.
 (Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,
 Nancheng District, Dongguan City, Guangdong, China
 (Full Name: Building D, Gaosheng Science & Technology Park,
 Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207 (a)	AC Power Conducted Emission	Compliance
§15.247(b)(3)	Max. Conducted Output Power	Compliance
§15.247(a)(2)	Bandwidth	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	Compliance
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	Compliance
§15.203	Antenna Requirement	Compliance

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested. But only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

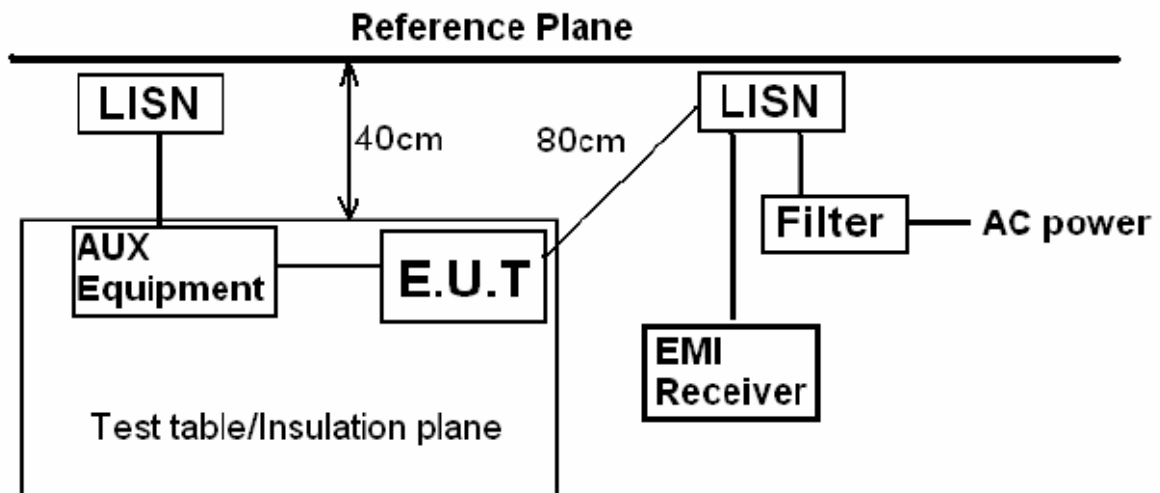

3.2 Test Condition

Test Requirement: FCC Part 15.207


Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: WIFI Mode

3.3 Measurement Results

Please refer to following the worst case (802.11b) plots.

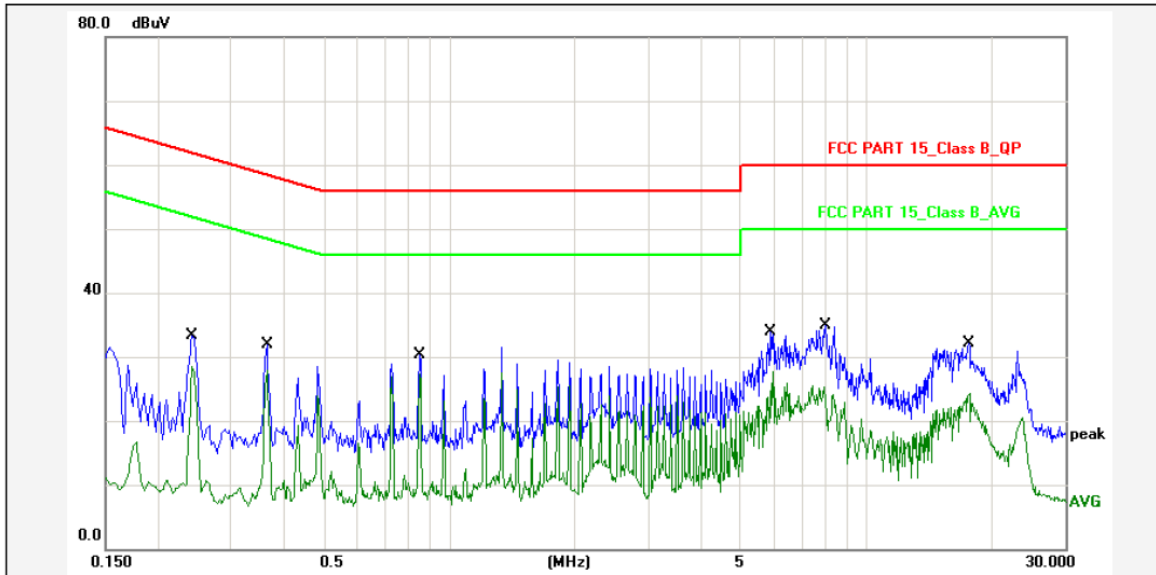


Report No.: F11AUUM13-W3
 Test Standard: FCC PART 15_Class B_QP
 Test item: Conducted Emission
 Applicant: FN-LINK
 Product: USB WIFI Module
 Model No.: F11AUUM13-W3

Phase: L1
 Temp.()/Hum.(%): 21(C) / 55 %
 Power Rating: AC 120V/60Hz
 Test Engineer: Jason

Test Mode: 802.11b
 Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2420	10.80	20.50	31.30	62.02	-30.72	QP	P	
2	0.2420	10.80	15.80	26.60	52.02	-25.42	AVG	P	
3	0.3660	10.80	19.00	29.80	58.59	-28.79	QP	P	
4	0.3660	10.80	15.10	25.90	48.59	-22.69	AVG	P	
5	0.8500	10.80	17.60	28.40	56.00	-27.60	QP	P	
6	0.8500	10.80	14.40	25.20	46.00	-20.80	AVG	P	
7	5.8819	10.80	21.10	31.90	60.00	-28.10	QP	P	
8	5.8819	10.80	14.90	25.70	50.00	-24.30	AVG	P	
9	8.0059	10.80	22.00	32.80	60.00	-27.20	QP	P	
10	8.0059	10.80	12.80	23.60	50.00	-26.40	AVG	P	
11	17.6219	10.80	19.30	30.10	60.00	-29.90	QP	P	
12	17.6219	10.80	11.60	22.40	50.00	-27.60	AVG	P	

Note: Level=Reading+Factor.
 Margin=Limit-Level.

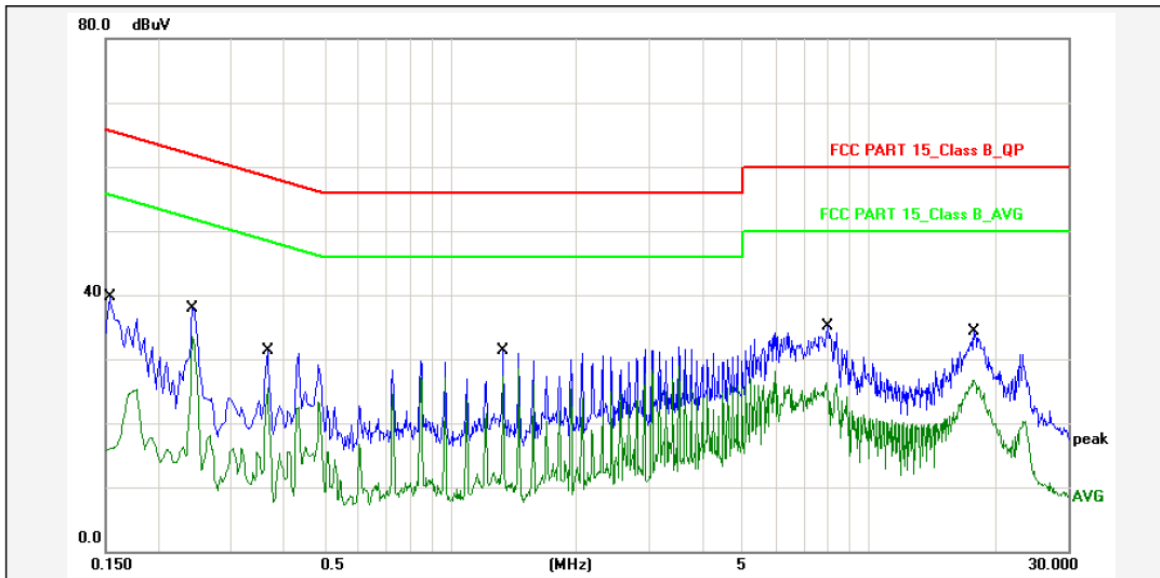

Report No.: F11AUUM13-W3
 Test Standard: FCC PART 15_Class B_QP
 Test item: Conducted Emission Phase: N
 Applicant: FN-LINK Temp.()/Hum.(%): 21(C) / 55 %
 Product: USB WIFI Module Power Rating: AC 120V/60Hz
 Model No.: F11AUUM13-W3 Test Engineer: Jason

Test Mode: 802.11b
 Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	26.80	37.60	65.78	-28.18	QP	P	
2	0.1539	10.80	12.60	23.40	55.78	-32.38	AVG	P	
3	0.2420	10.80	25.00	35.80	62.02	-26.22	QP	P	
4	0.2420	10.80	20.80	31.60	52.02	-20.42	AVG	P	
5	0.3660	10.80	18.60	29.40	58.59	-29.19	QP	P	
6	0.3660	10.80	12.60	23.40	48.59	-25.19	AVG	P	
7	1.3380	10.80	18.50	29.30	56.00	-26.70	QP	P	
8	1.3380	10.80	15.80	26.60	46.00	-19.40	AVG	P	
9	8.0019	10.80	22.70	33.50	60.00	-26.50	QP	P	
10	8.0019	10.80	13.50	24.30	50.00	-25.70	AVG	P	
11	17.8659	10.80	21.50	32.30	60.00	-27.70	QP	P	
12	17.8659	10.80	13.80	24.60	50.00	-25.40	AVG	P	

Note: Level=Reading+Factor.
 Margin=Limit-Level.

4. Max. Conducted Output Power

4.1 Measurement Procedure


Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r02):

Maximum conducted (Average) output power:

1. Set the RBW = 1-5% of the OBW, not to exceed 1MHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Set the span $\geq 1.5 \times$ OBW
4. Detector = RMS
5. Sweep time = auto couple.
6. Number of points in sweep $\geq 2 \times$ span/RBW. (This gives bin-to-bin spacing ≤ 2 , so that narrowband signals are not lost between frequency bins.)
7. Trace mode = Trace average at least 100 traces in power averaging (i.e., RMS) mode.
8. If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results

Pass

Please refer to following table and plots.




Temperature :	22 °C	Humidity :	48%
Test By:	Sance	Test Date :	February 10, 2015
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	AV Output Power dBm	Limit dBm
For 2.4G IEEE 802.11b Mode (CCK, Antenna Gain=0dBi)			
Low Channel: 2412	1	14.88	30
Middle Channel: 2437	1	16.24	30
High Channel: 2462	1	15.98	30
IEEE 802.11g Mode (OFDM, Antenna Gain=0dBi)			
Low Channel: 2412	6	15.52	30
Middle Channel: 2437	6	16.05	30
High Channel: 2462	6	16.60	30
IEEE 802.11n(HT20) Mode (OFDM, Antenna Gain=0dBi)			
Low Channel: 2412	6.5	15.31	30
Middle Channel: 2437	6.5	15.94	30
High Channel: 2462	6.5	14.76	30
IEEE 802.11n(HT40) Mode (OFDM, Antenna Gain=0dBi)			
Low Channel: 2422	13	13.49	30
Middle Channel: 2437	13	12.44	30
High Channel: 2452	13	12.70	30




Frequency MHz	AV Output Power dBm	Limit dBm
For 5G IEEE 802.11a Mode (OFDM, Antenna Gain=0dBi)		
Low Channel: 5745	11.51	30
Middle Channel: 5785	10.11	30
High Channel: 5825	11.07	30
IEEE 802.11ac(VHT20) Mode (OFDM, Antenna Gain=0dBi)		
Low Channel: 5745	13.69	30
Middle Channel: 5785	11.74	30
High Channel: 5825	11.54	30
IEEE 802.11ac(VHT40) Mode (OFDM, Antenna Gain=0dBi)		
Low Channel: 5755	11.59	30
High Channel: 5795	10.16	30
IEEE 802.11ac(VHT20) Mode (OFDM, Antenna Gain=0dBi)		
Channel: 5775	11.04	30

Maximum Average Conducted Output Power 802.11b Low Channel

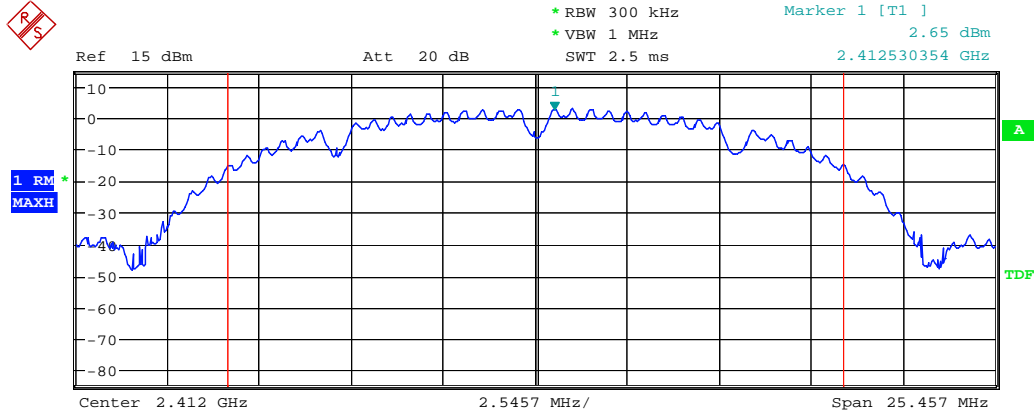


Tx Channel
 Bandwidth 16.971 MHz Power 14.88 dBm

802.11b Middle Channel

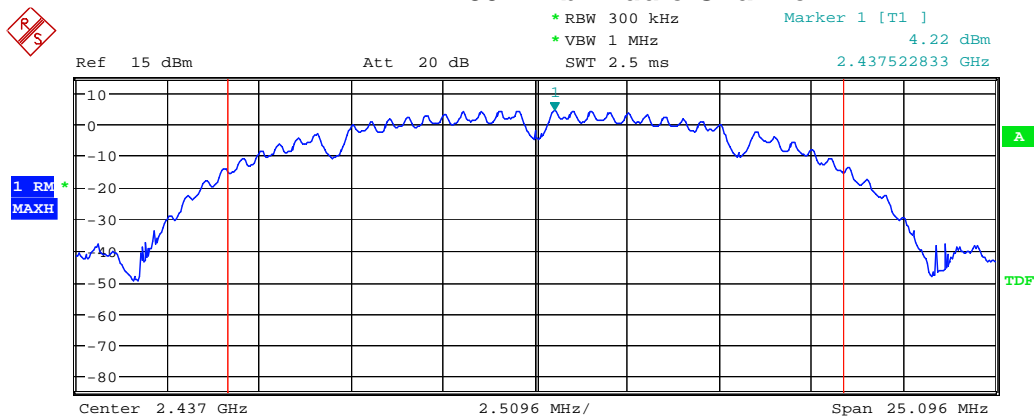


Tx Channel
 Bandwidth 16.731 MHz Power 16.24 dBm

802.11b High Channel

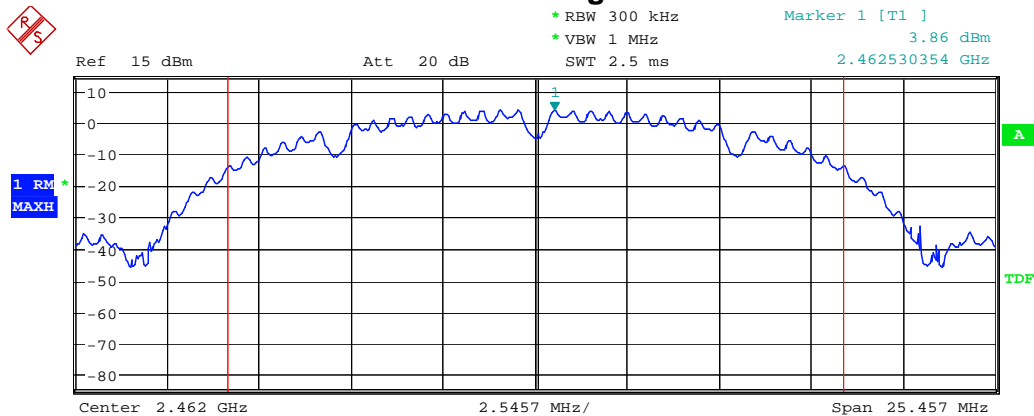


Tx Channel
 Bandwidth 16.971 MHz Power 15.98 dBm


802.11g Low Channel

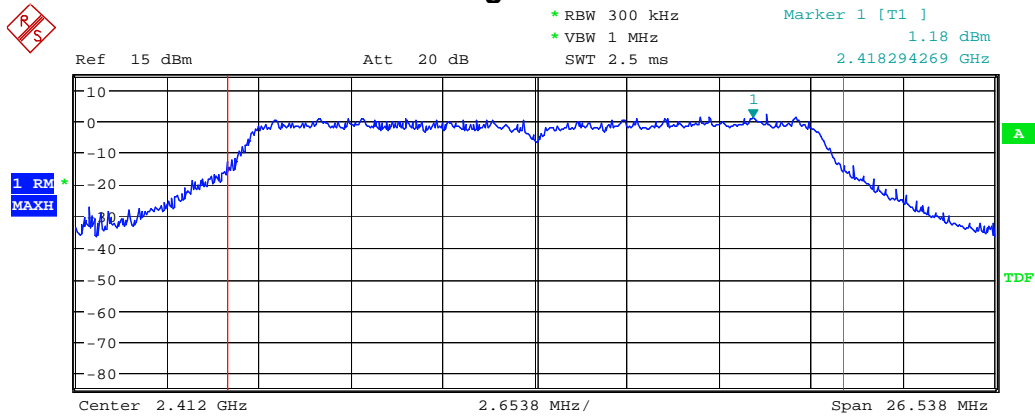


802.11g Middle Channel

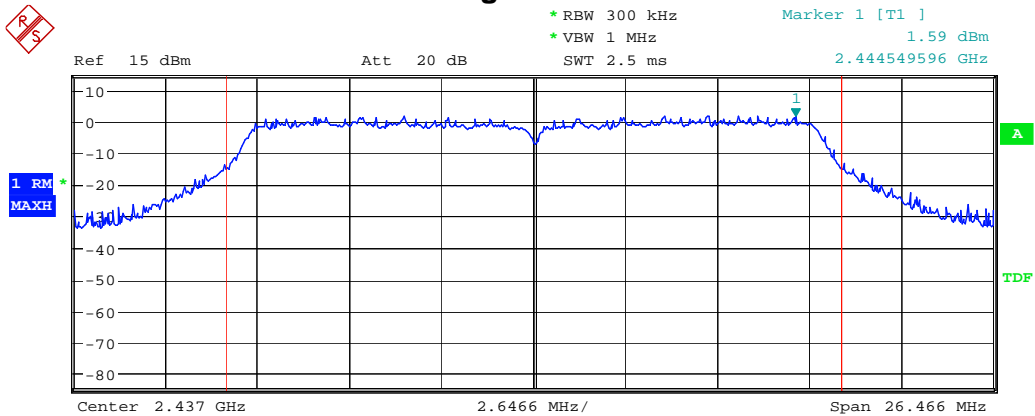


802.11g High Channel

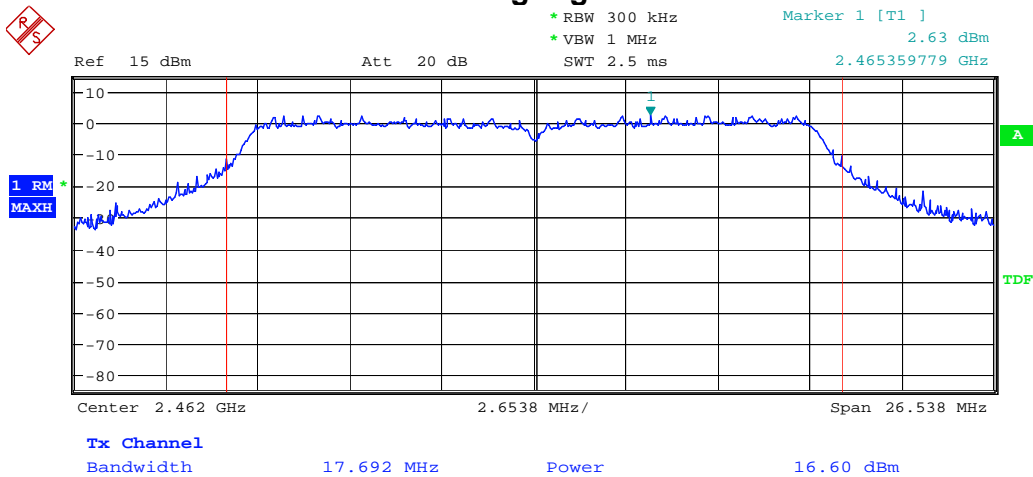


802.11n(HT20) Low Channel

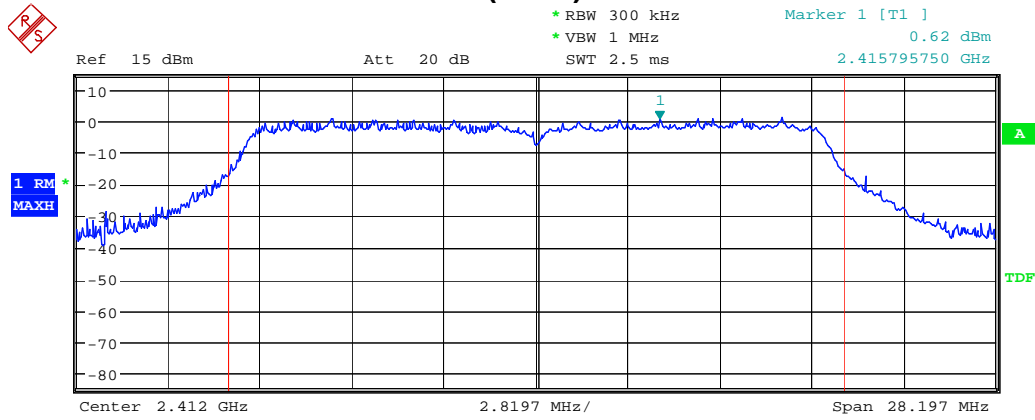


802.11n(HT20) Middle Channel

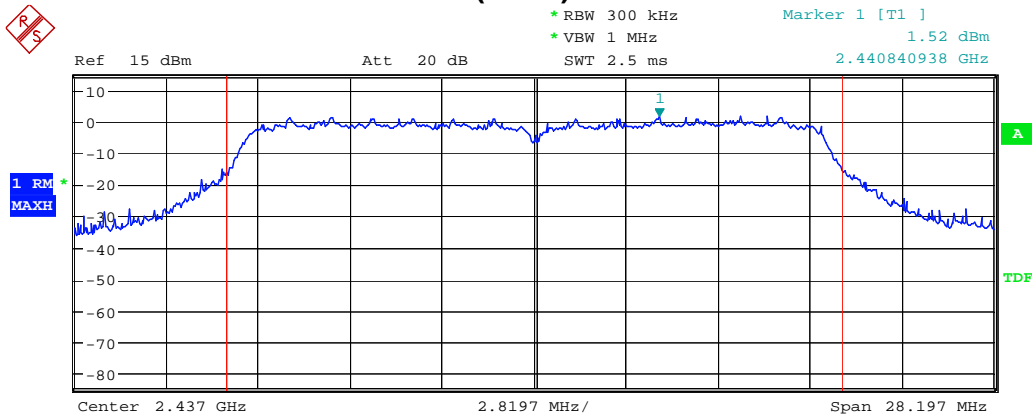


802.11n(HT20) High Channel

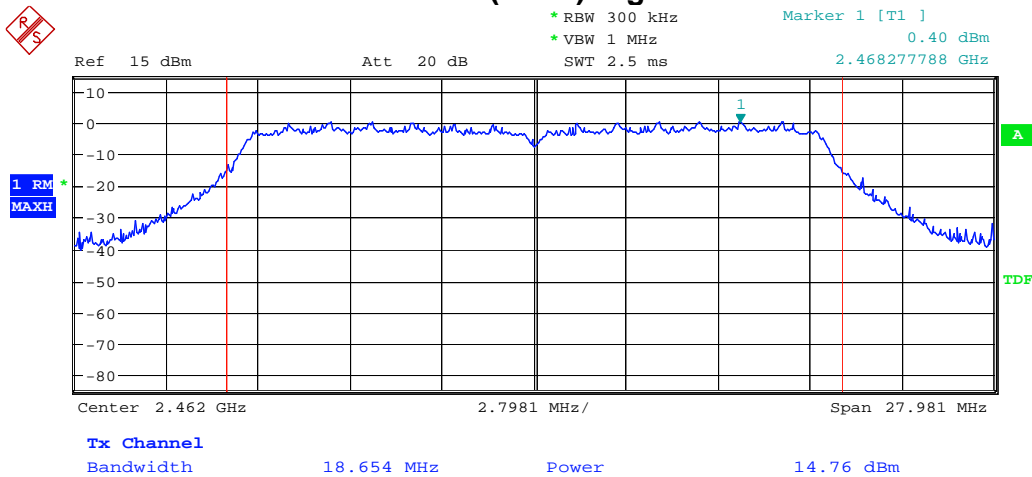


802.11n(HT40) Low Channel

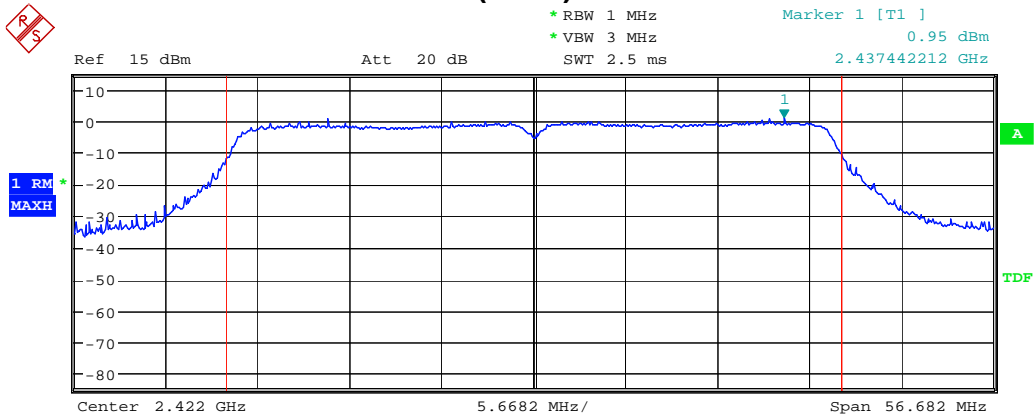


802.11n(HT40) Middle Channel

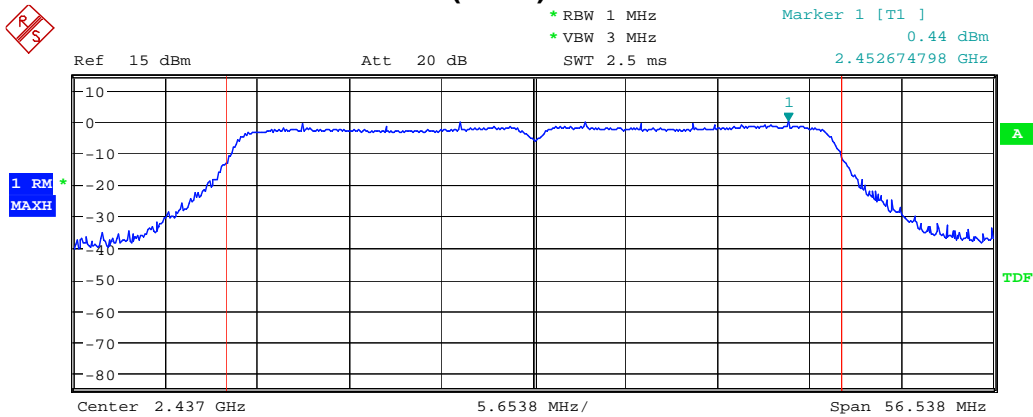


802.11n(HT40) High Channel

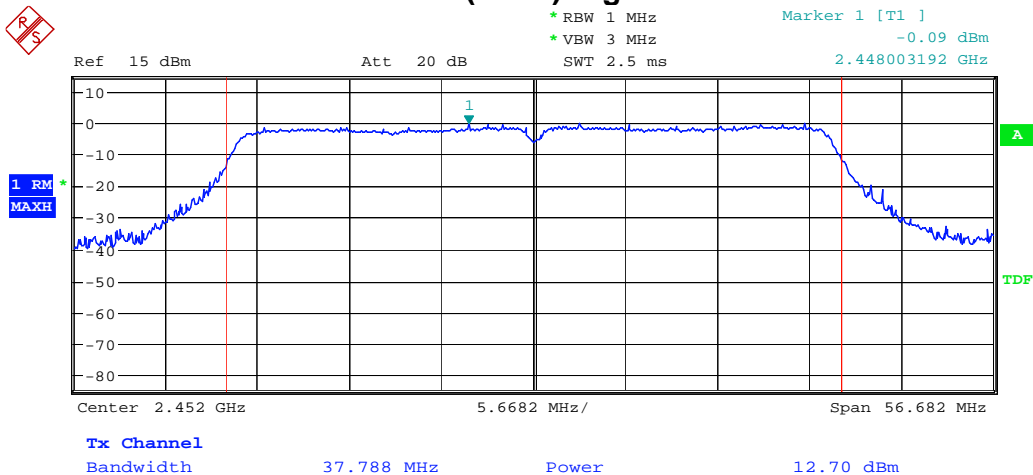


Maximum Average Conducted Output Power 802.11a Low Channel

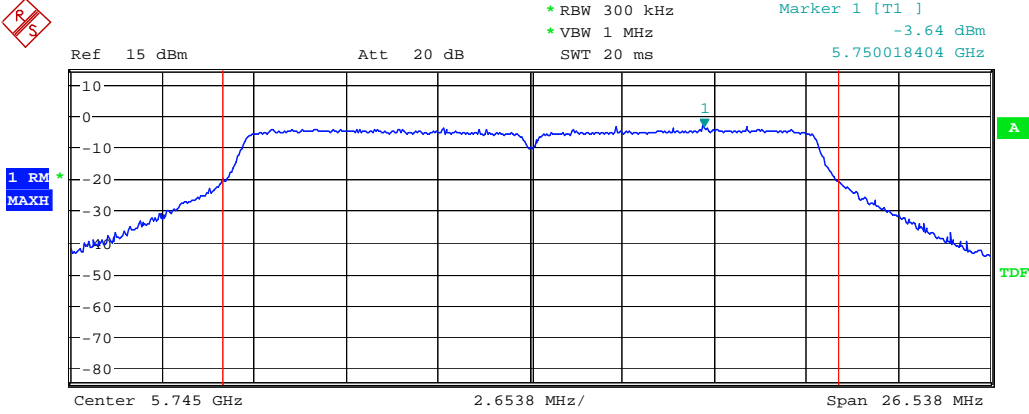


802.11a Middle Channel

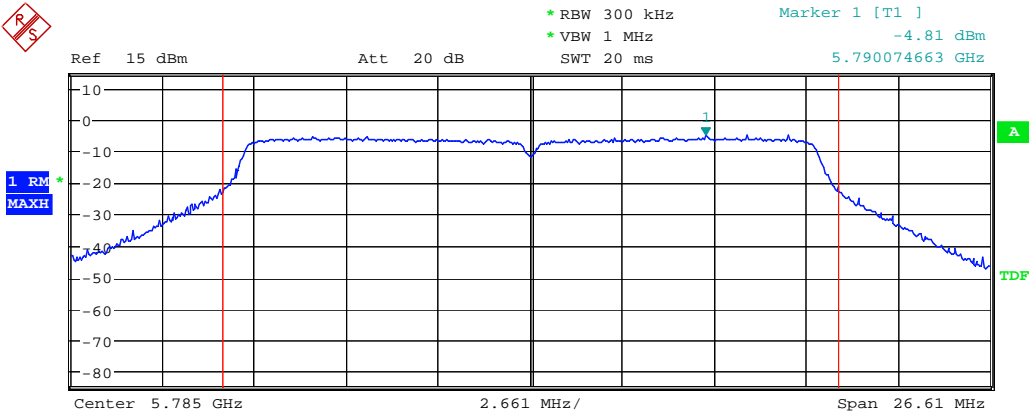


802.11a High Channel

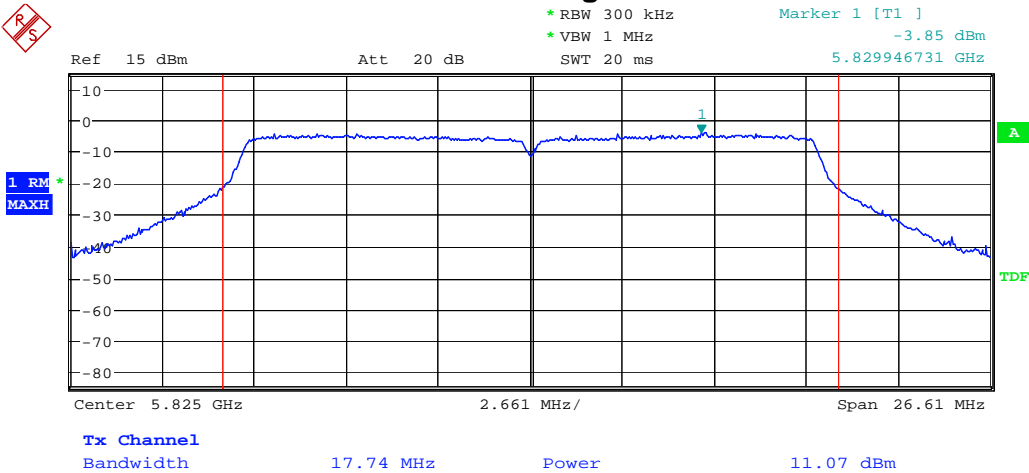


802.11ac(VHT20) Low Channel

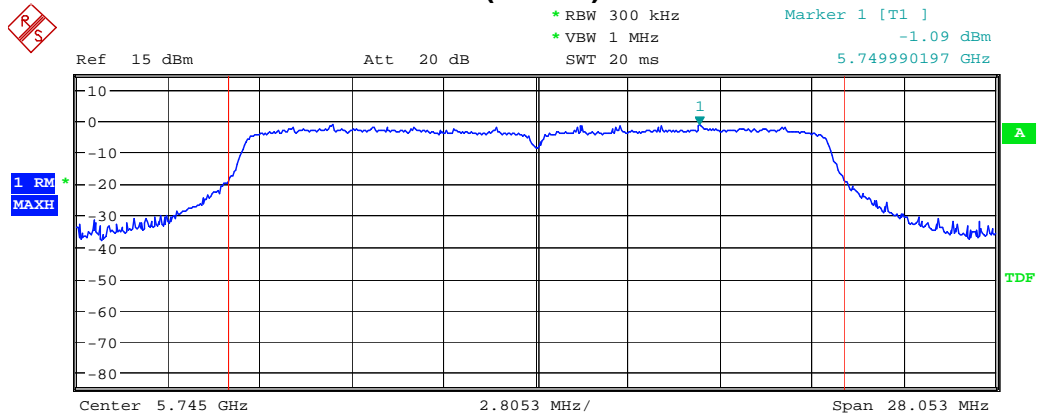


802.11ac(VHT20) Middle Channel

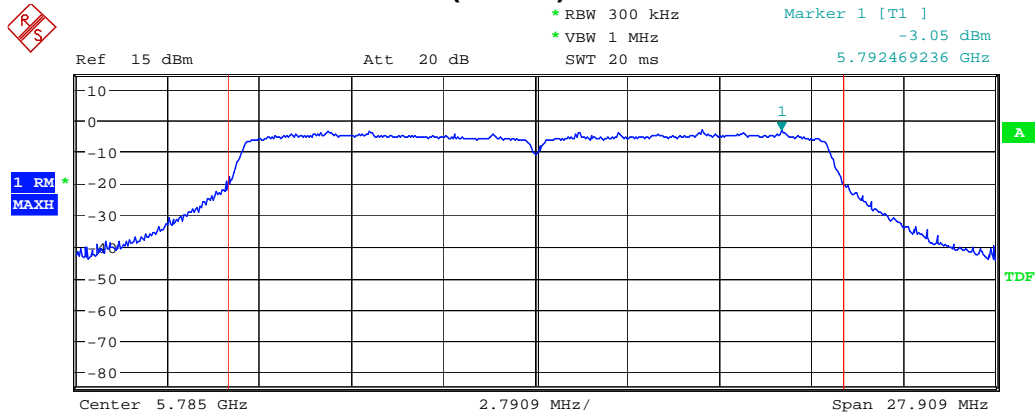


802.11ac(VHT20) High Channel

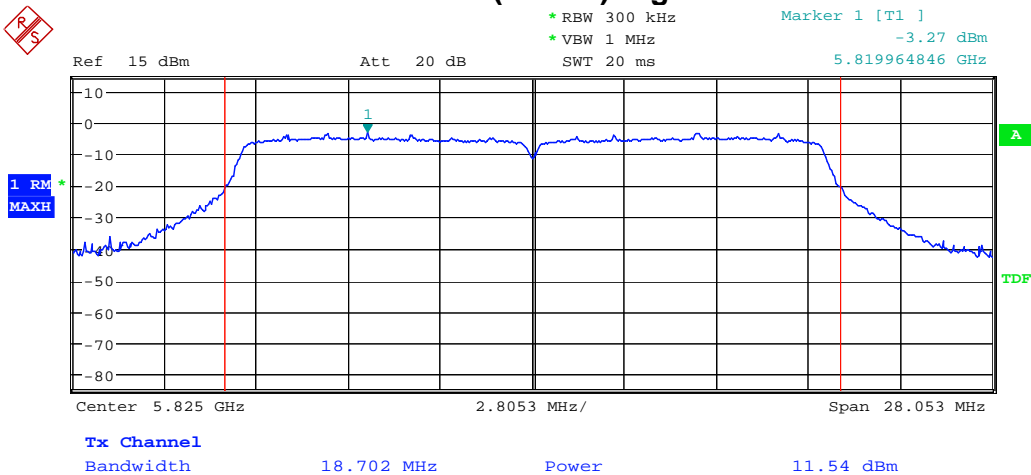


802.11ac(VHT40) Low Channel

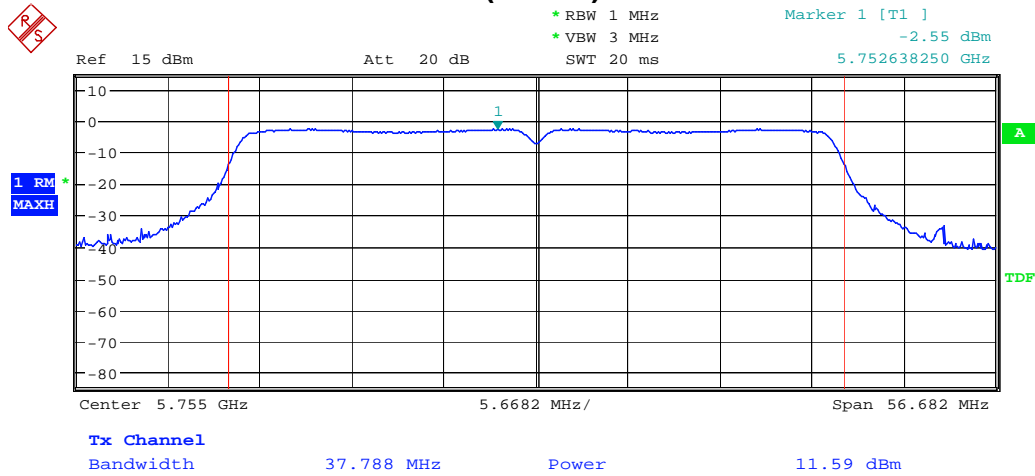

802.11ac(VHT40) High Channel

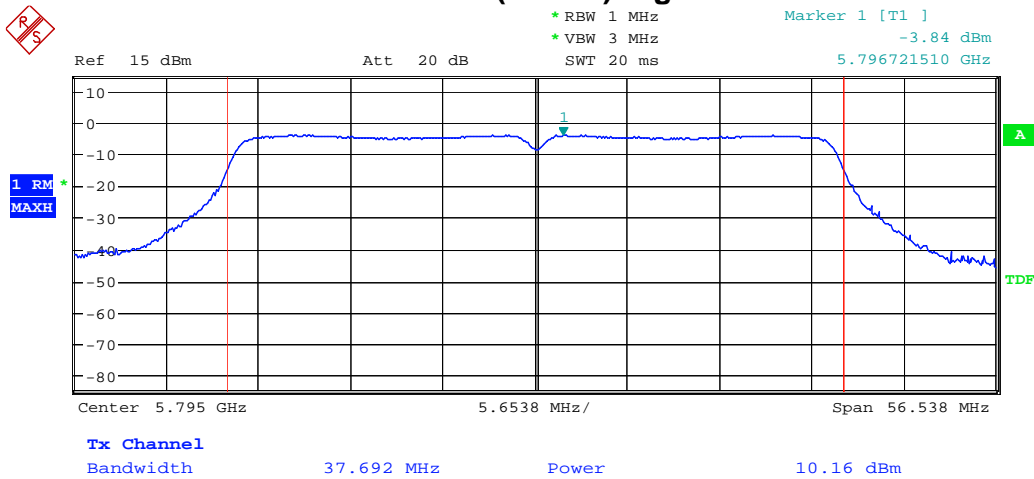

802.11ac(VHT80)

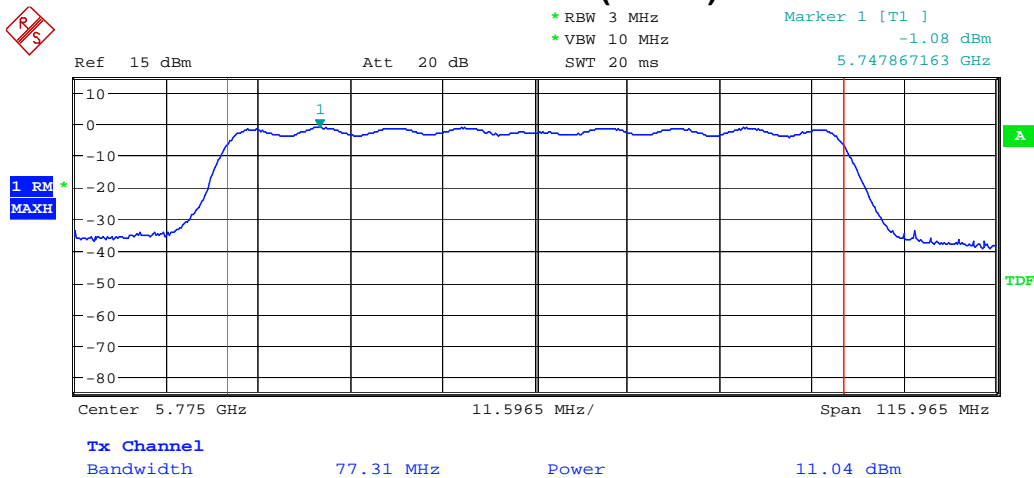

5. 6dB&20dB Bandwidth


5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03r02):

1. Set the RBW = 100KHz.
2. Set the VBW \geq 3 x RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2 Test SET-UP (Block Diagram of Configuration)



5.3 Measurement Results

Pass


Please refer to following table and plots.

Temperature :	22 °C	Humidity : 48 %		
Test By:	Sance	Test Date : February 10, 2015		
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	20dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)				
Low Channel: 2412	1	10.24	16.97	>500KHz
Middle Channel: 2437	1	10.19	16.73	>500KHz
High Channel: 2462	1	10.19	16.97	>500KHz
IEEE 802.11g Mode (OFDM)				
Low Channel: 2412	6	16.47	17.69	>500KHz
Middle Channel: 2437	6	16.47	17.64	>500KHz
High Channel: 2462	6	16.47	17.69	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)				
Low Channel: 2412	6.5	17.76	18.80	>500KHz
Middle Channel: 2437	6.5	17.69	18.80	>500KHz
High Channel: 2462	6.5	17.69	18.65	>500KHz
IEEE 802.11n(HT40) Mode (OFDM)				
Low Channel: 2422	13	36.54	37.79	>500KHz
Middle Channel: 2437	13	36.63	37.69	>500KHz
High Channel: 2452	13	36.54	37.79	>500KHz




Frequency MHz	6dB Bandwidth MHz	20dB Bandwidth MHz	Limit
IEEE 802.11a Mode (OFDM)			
Low Channel: 5745	16.54	17.69	>500KHz
Middle Channel: 5785	16.54	17.74	>500KHz
High Channel: 5825	16.54	17.74	>500KHz
IEEE 802.11ac(VHT20) Mode (OFDM)			
Low Channel: 5745	17.69	18.70	>500KHz
Middle Channel: 5785	17.76	18.61	>500KHz
High Channel: 5825	17.69	18.70	>500KHz
IEEE 802.11ac(VHT40) Mode (OFDM)			
Low Channel: 5755	36.54	37.79	>500KHz
High Channel: 5795	36.54	37.69	>500KHz
IEEE 802.11ac(VHT80) Mode (OFDM)			
Channel: 5775	76.35	77.31	>500KHz

6dB Bandwidth 802.11b Low Channel

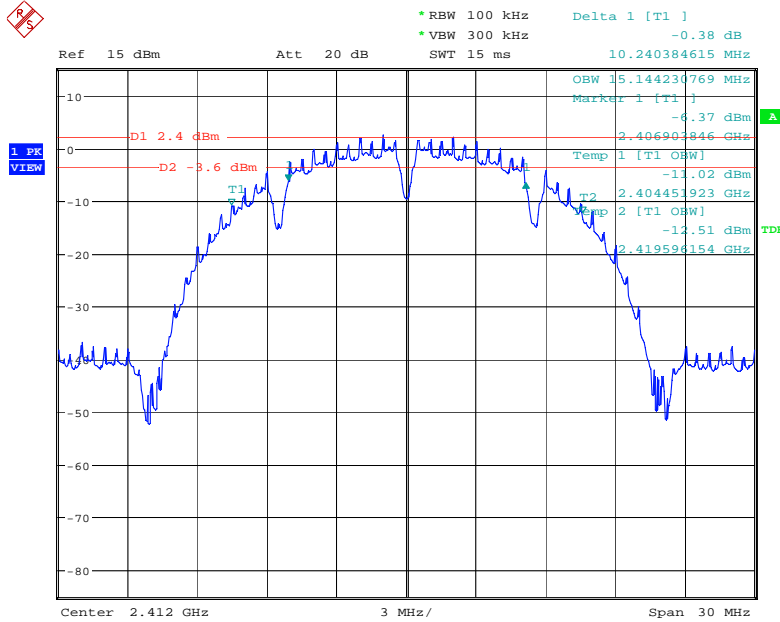


Date: 10.FEB.2015 18:29:01

802.11b Middle Channel

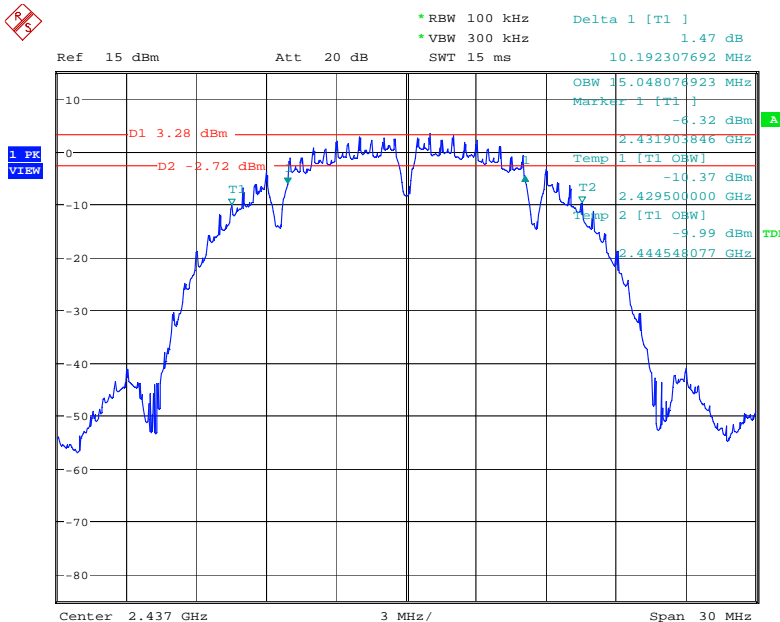


Date: 10.FEB.2015 18:31:33

802.11b High Channel

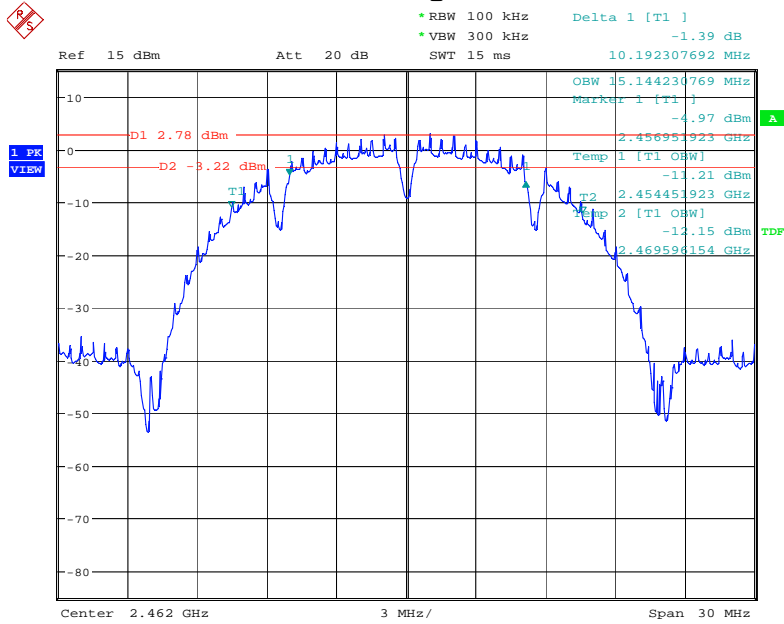


Date: 10.FEB.2015 18:32:36

802.11g Low Channel

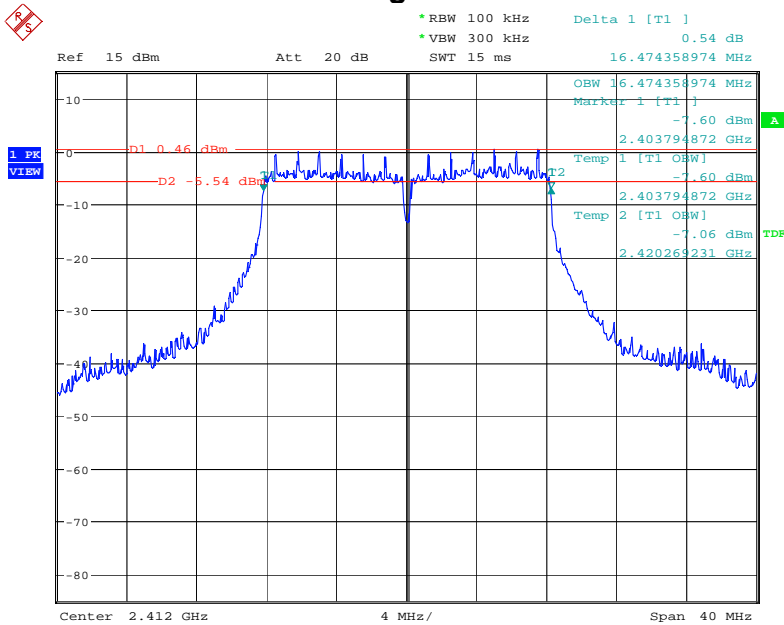


Date: 10.FEB.2015 18:37:50

802.11g Middle Channel

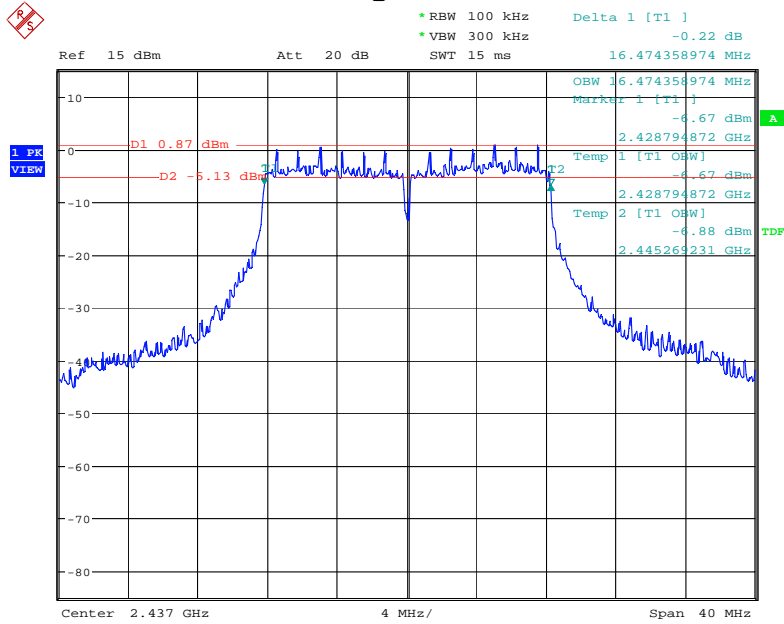


Date: 10.FEB.2015 18:39:03

802.11g High Channel

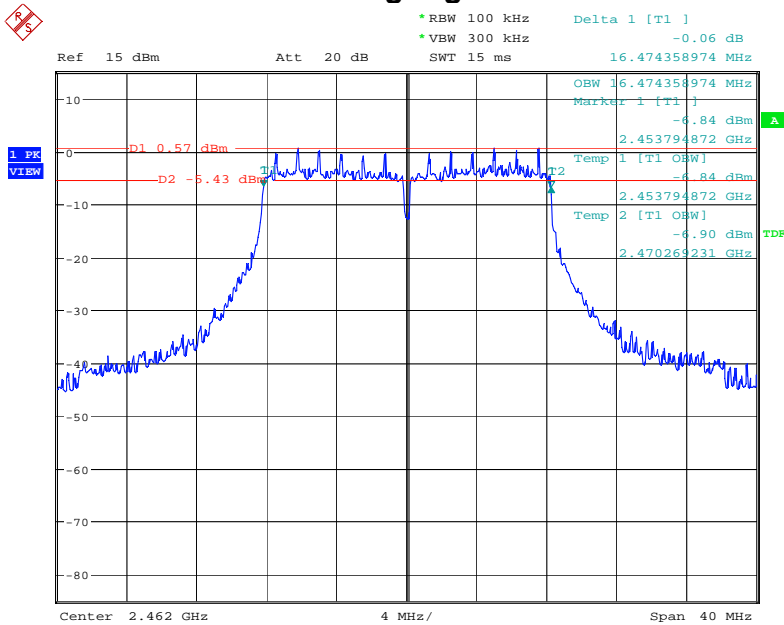


Date: 10.FEB.2015 18:40:24

802.11n(HT20) Low Channel

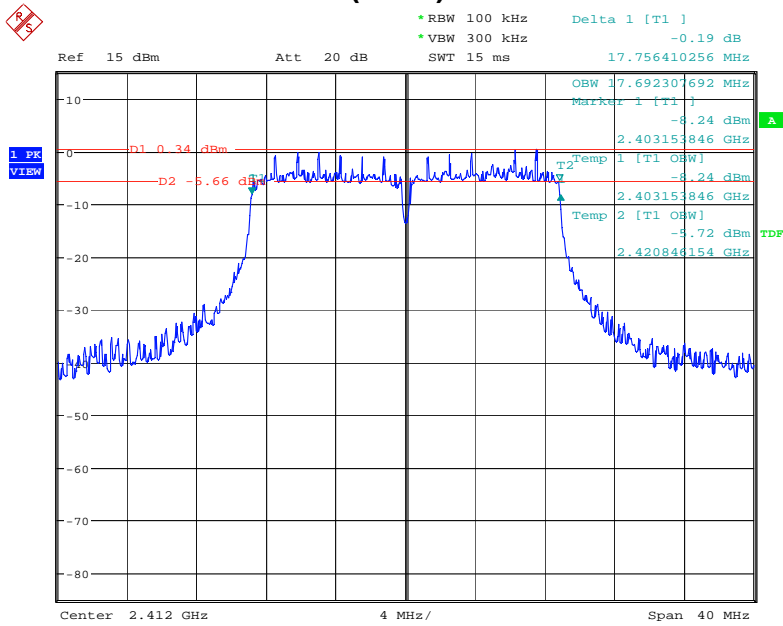


Date: 10.FEB.2015 18:42:39

802.11n(HT20) Middle Channel

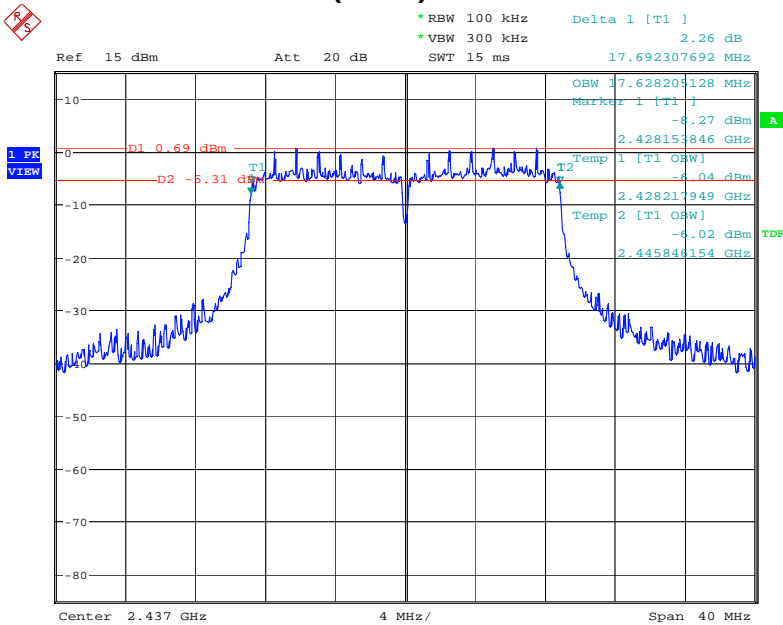


Date: 10.FEB.2015 18:43:44

802.11n(HT20) High Channel

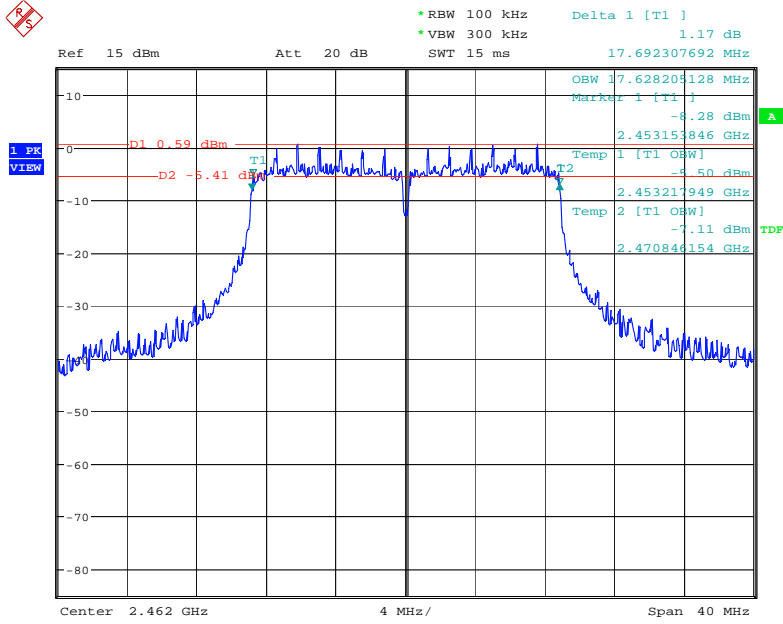


Date: 10.FEB.2015 18:44:36

802.11n(HT40) Low Channel

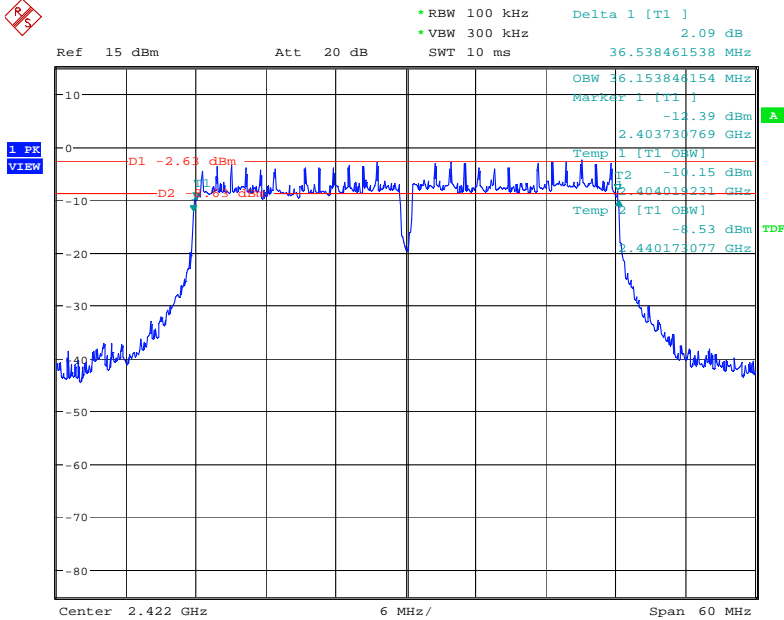


Date: 10.FEB.2015 18:46:07

802.11n(HT40) Middle Channel

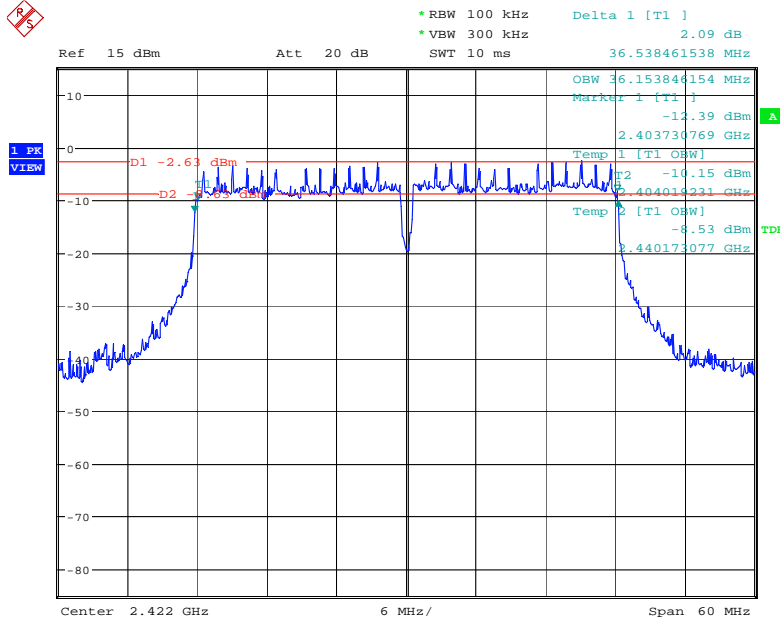


Date: 10.FEB.2015 18:46:07

802.11n(HT40) High Channel

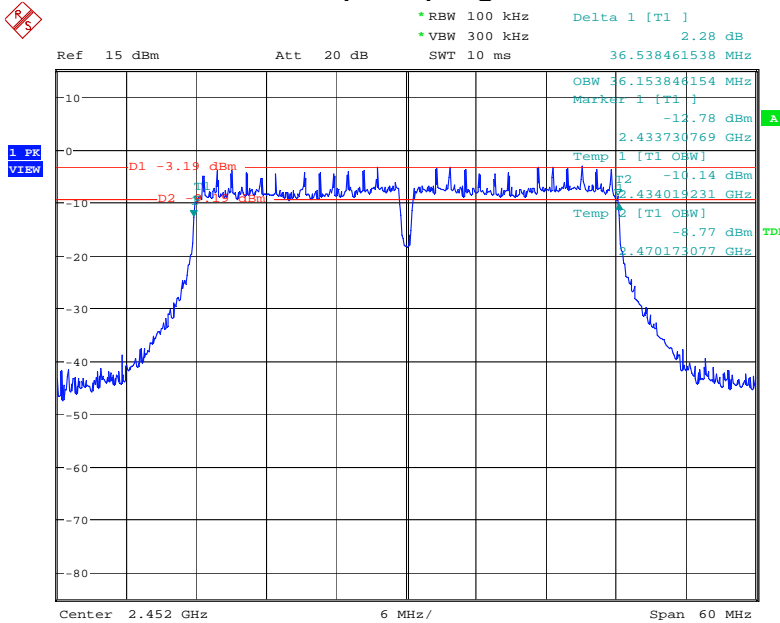


Date: 10.FEB.2015 18:50:41

20dB Bandwidth 802.11b Low Channel

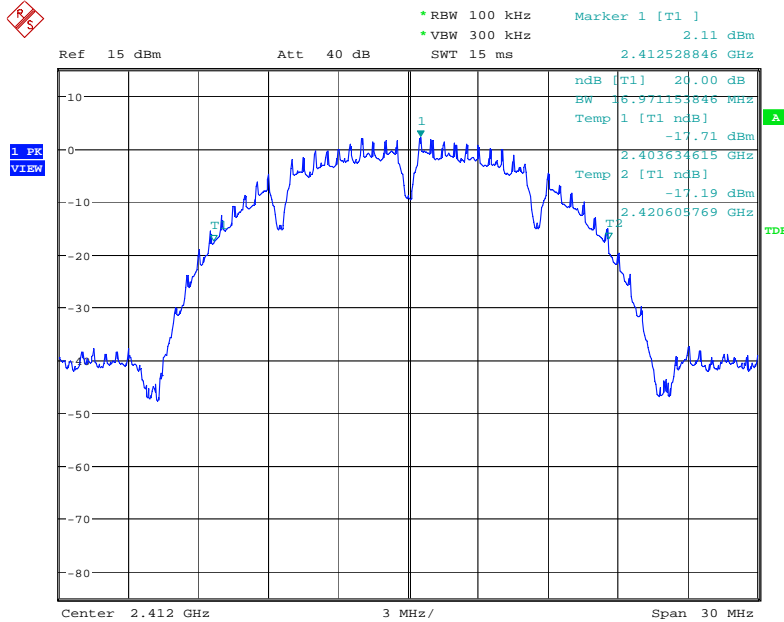


Date: 10.FEB.2015 19:16:03

802.11b Middle Channel

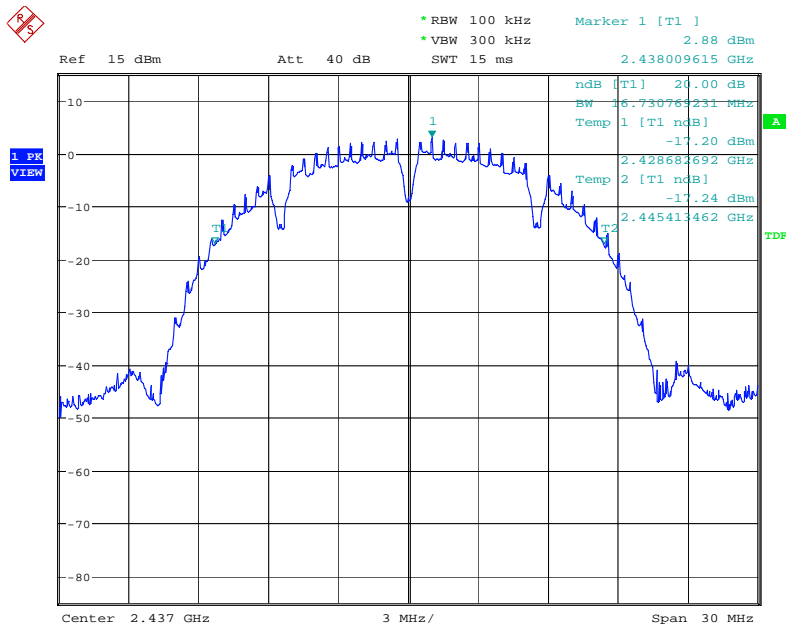


Date: 10.FEB.2015 19:19:05

802.11b High Channel

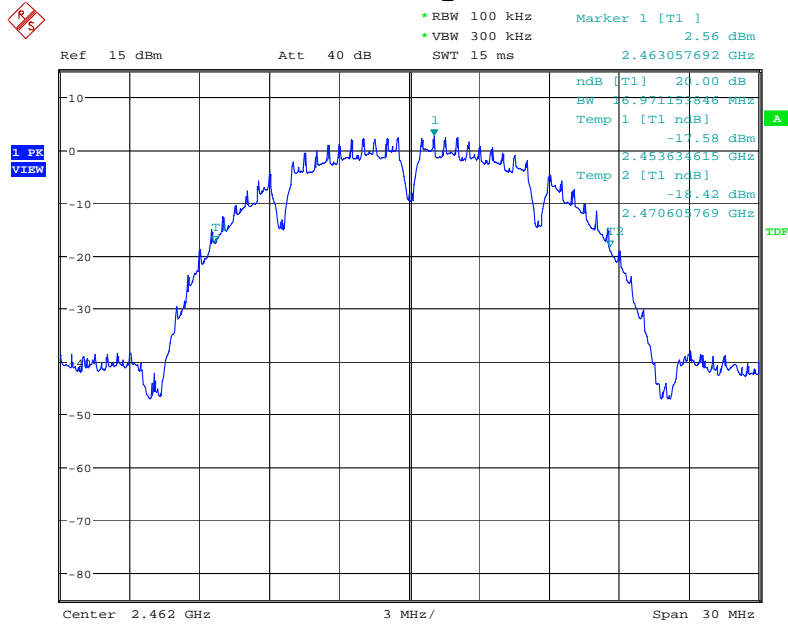


Date: 10.FEB.2015 19:19:46

802.11g Low Channel

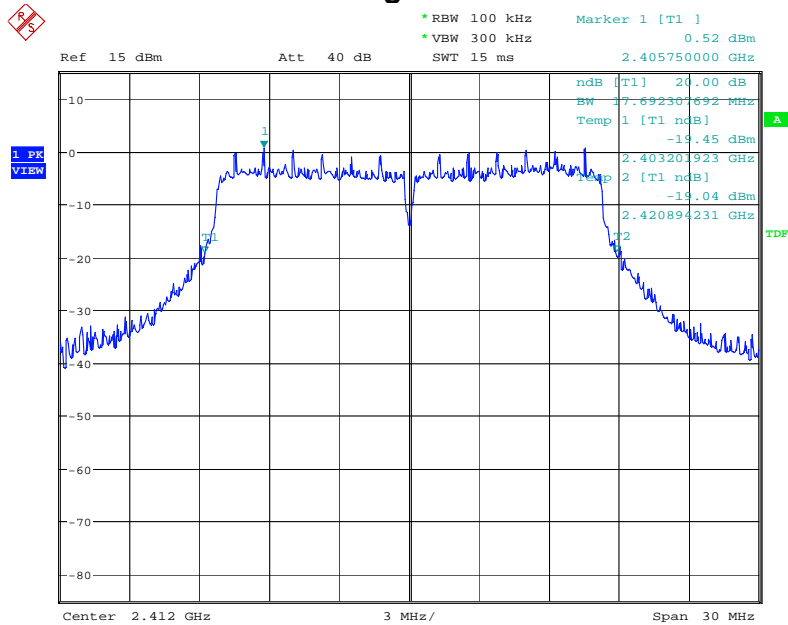


Date: 10.FEB.2015 19:20:33

802.11g Middle Channel

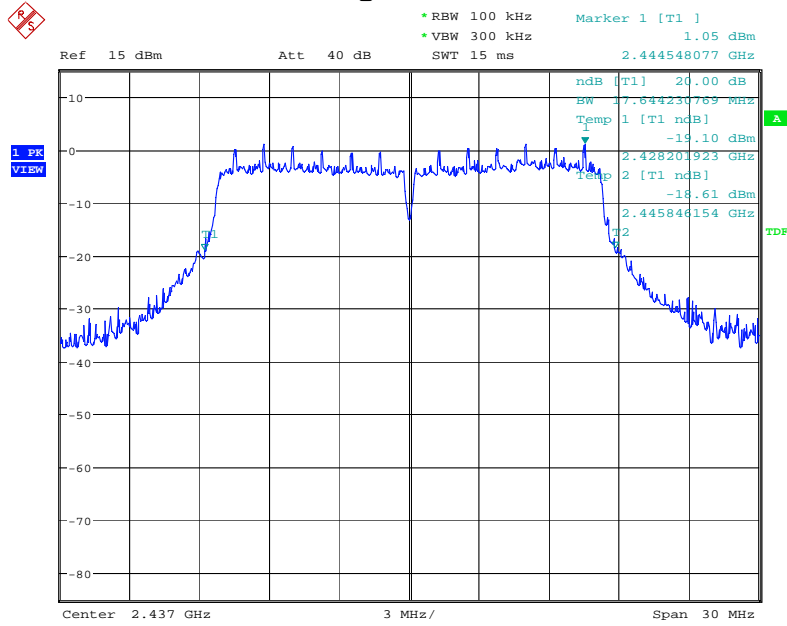


Date: 10.FEB.2015 19:21:03

802.11g High Channel

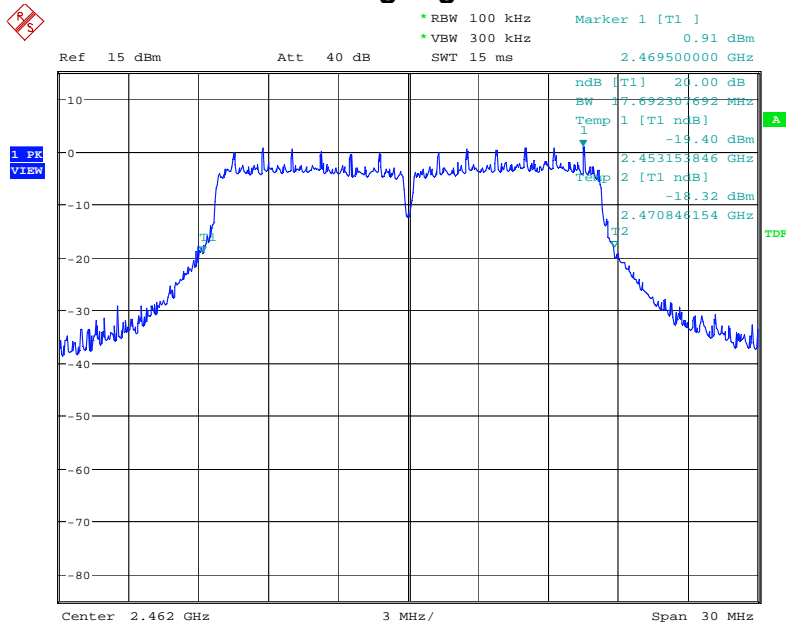


Date: 10.FEB.2015 19:21:51

802.11n(HT20) Low Channel

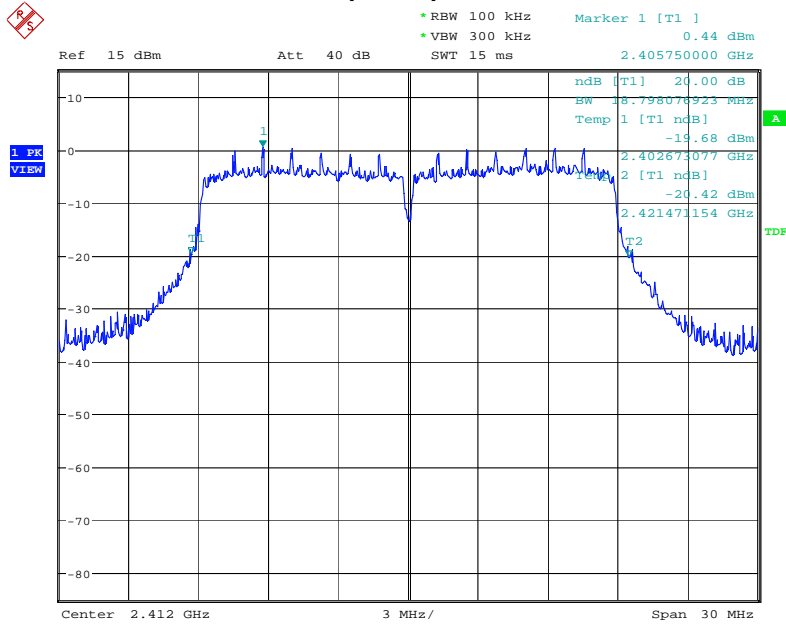


Date: 10.FEB.2015 19:22:26

802.11n(HT20) Middle Channel

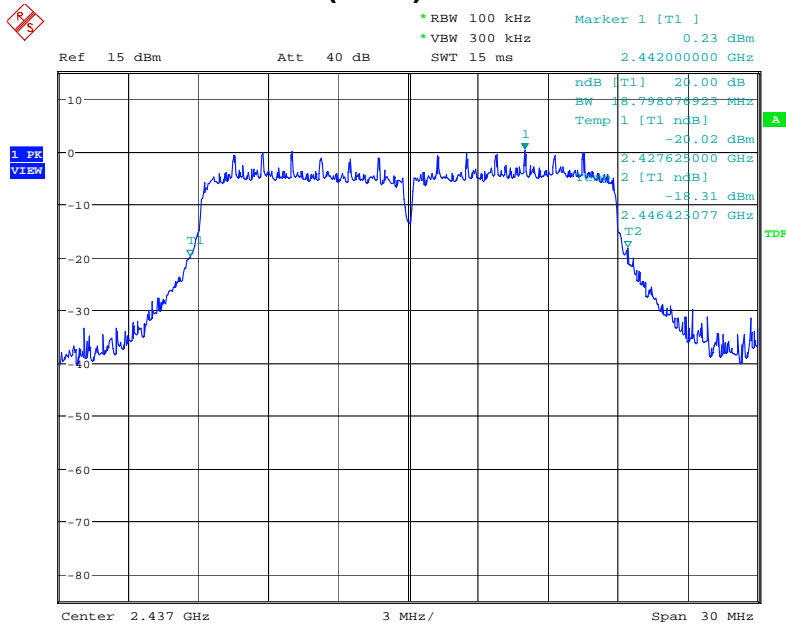


Date: 10.FEB.2015 19:23:03

802.11n(HT20) High Channel

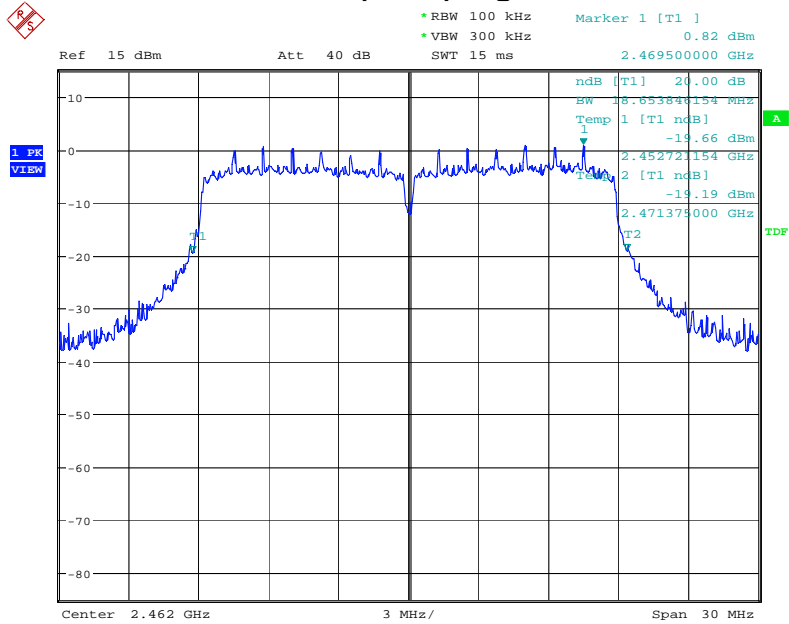


Date: 10.FEB.2015 19:23:58

802.11n(HT40) Low Channel

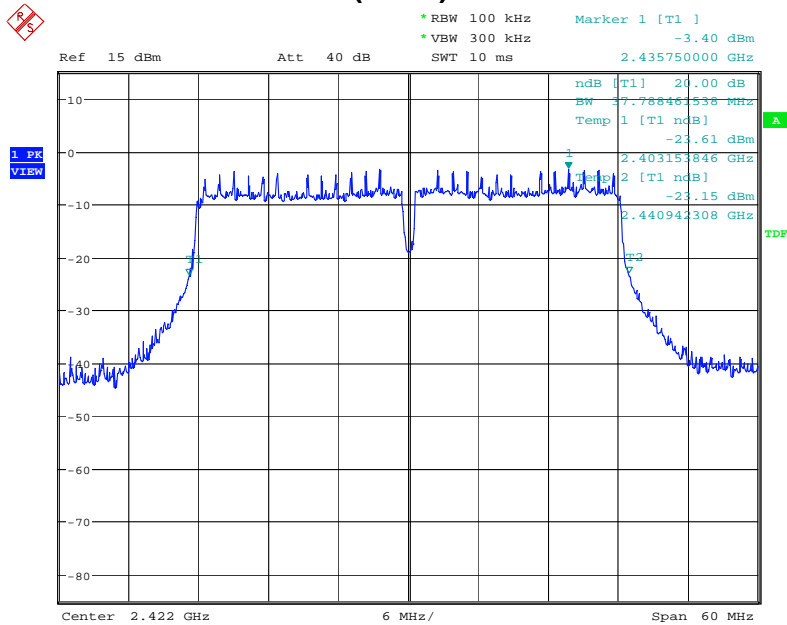


Date: 10.FEB.2015 19:24:53

802.11n(HT40) Middle Channel

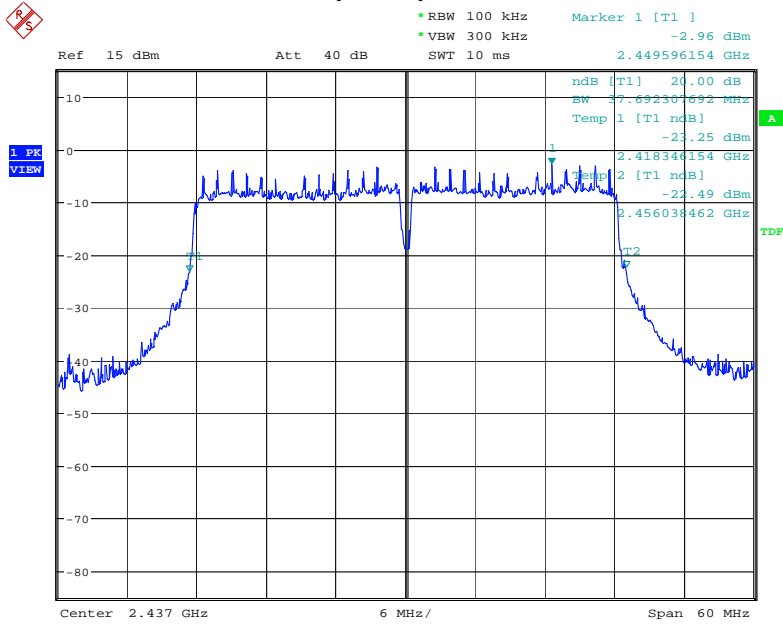


Date: 10.FEB.2015 19:25:31

802.11n(HT40) High Channel

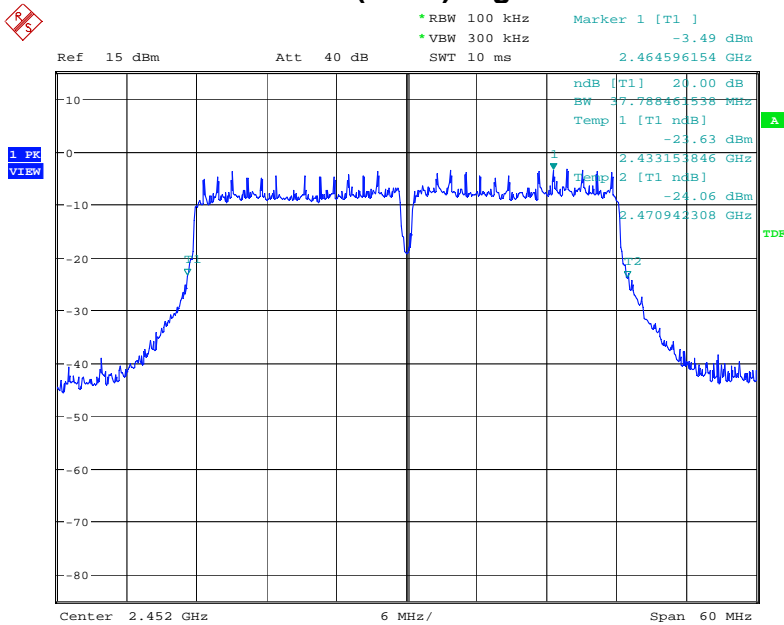


Date: 10.FEB.2015 19:26:07

6dB Bandwidth 802.11a Low Channel

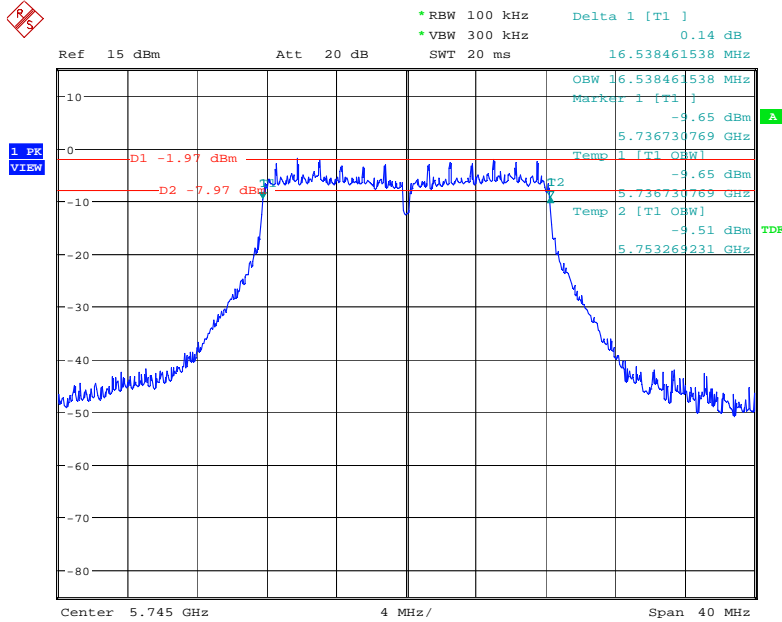


Date: 10.FEB.2015 18:53:00

802.11a Middle Channel

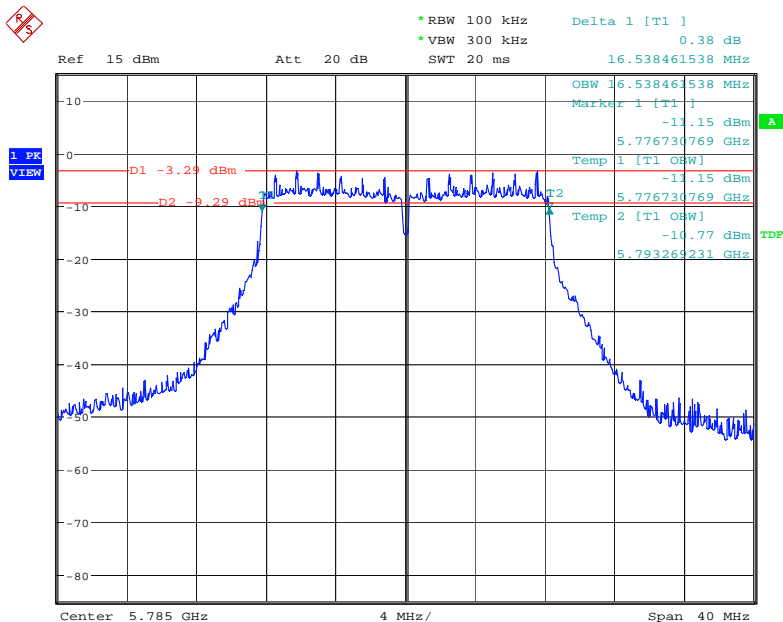


Date: 10.FEB.2015 18:54:10

802.11a High Channel

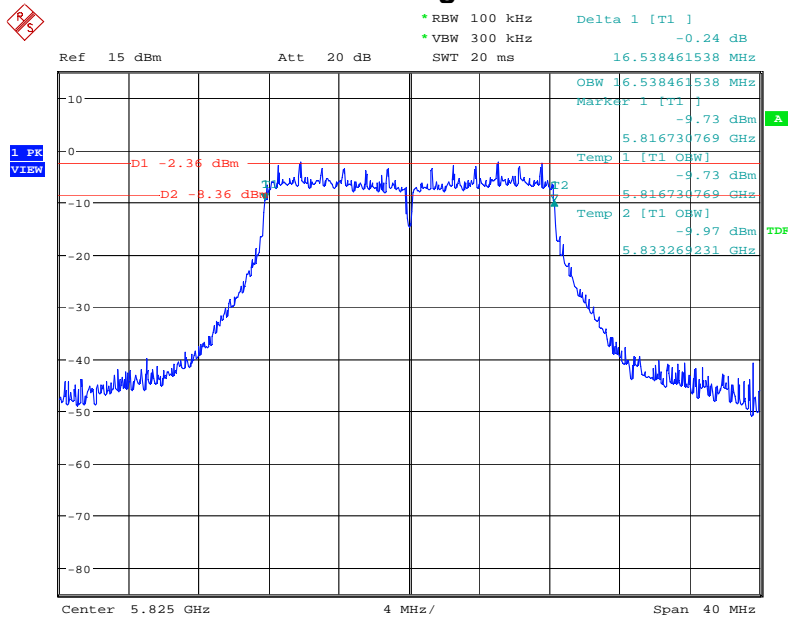


Date: 10.FEB.2015 18:55:36

802.11ac(VHT20) Low Channel

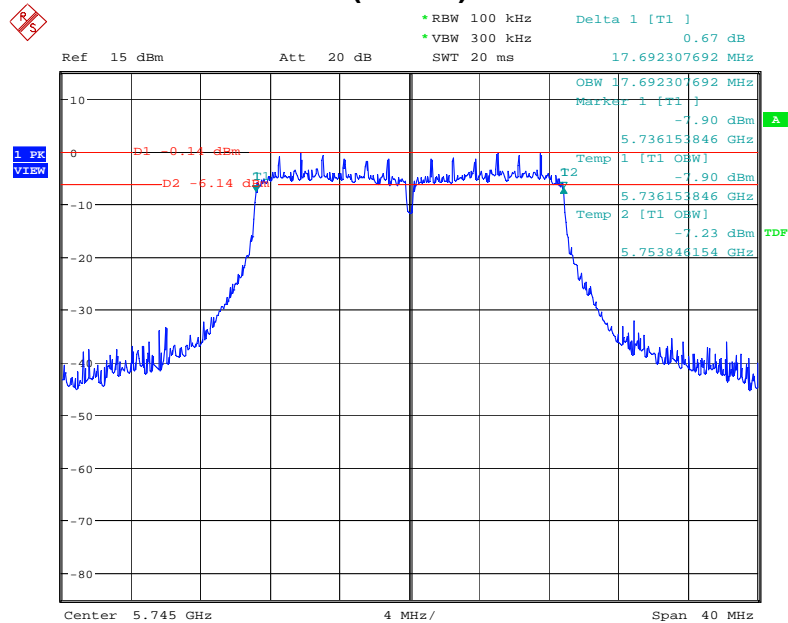


Date: 10.FEB.2015 18:57:27

802.11ac(VHT20) Middle Channel

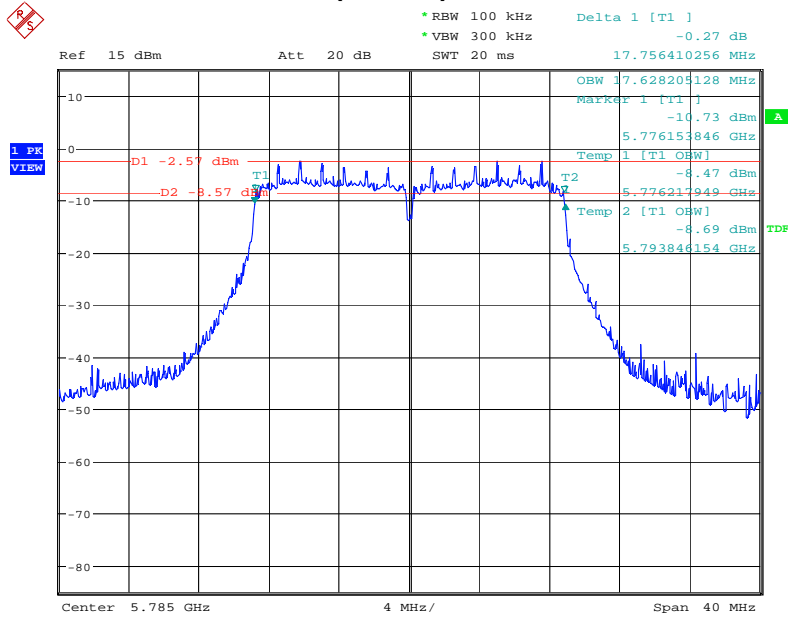


Date: 10.FEB.2015 18:58:36

802.11ac(VHT20) High Channel

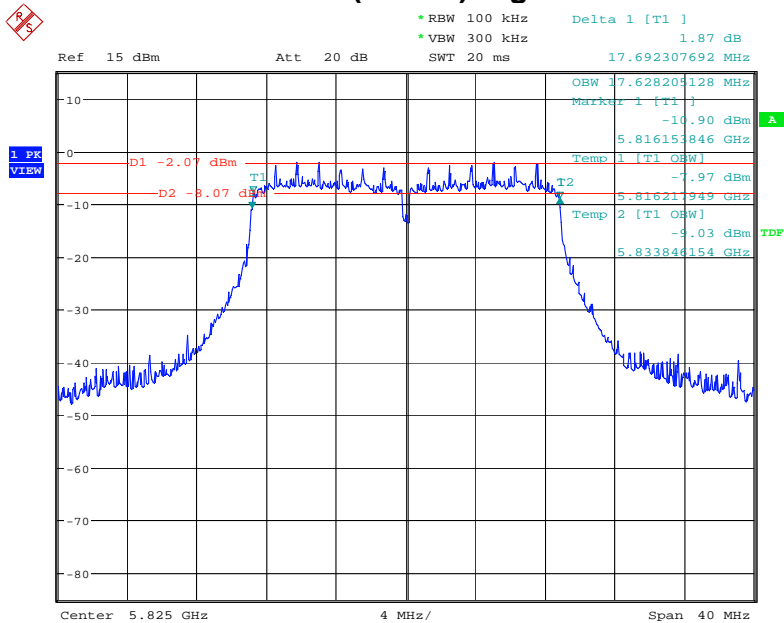


Date: 10.FEB.2015 19:00:17

802.11ac(VHT40) Low Channel

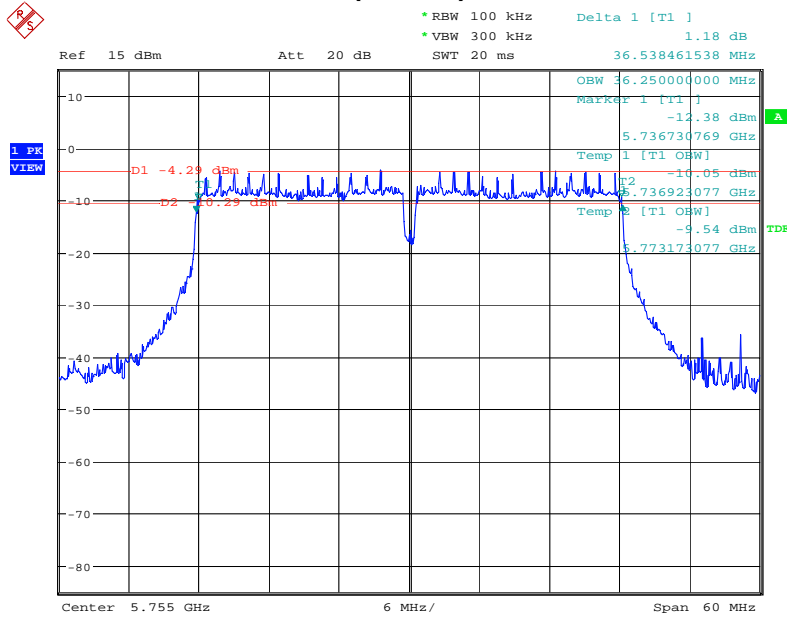


Date: 10.FEB.2015 19:02:34

802.11ac(VHT40) High Channel

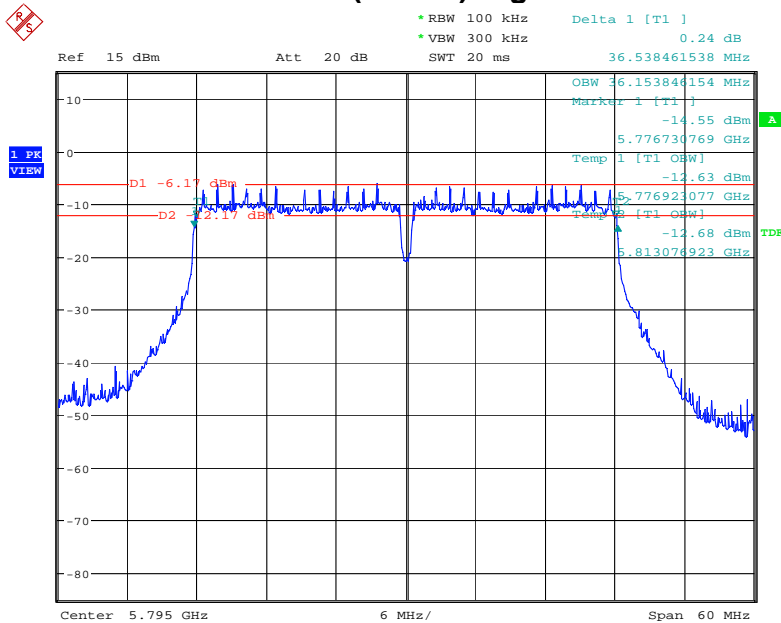


Date: 10.FEB.2015 19:06:50

802.11ac(VHT80)

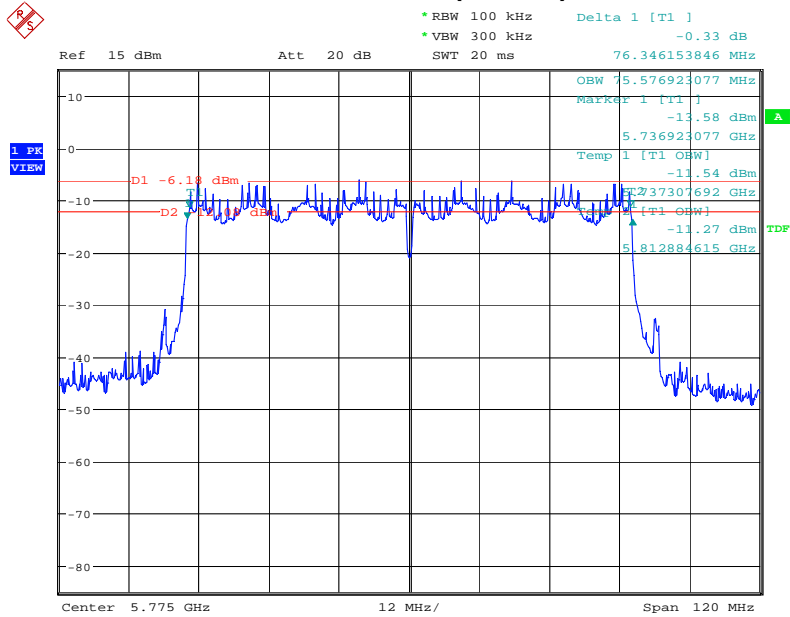


Date: 10.FEB.2015 19:08:00

20DB Bandwidth 802.11a Low Channel

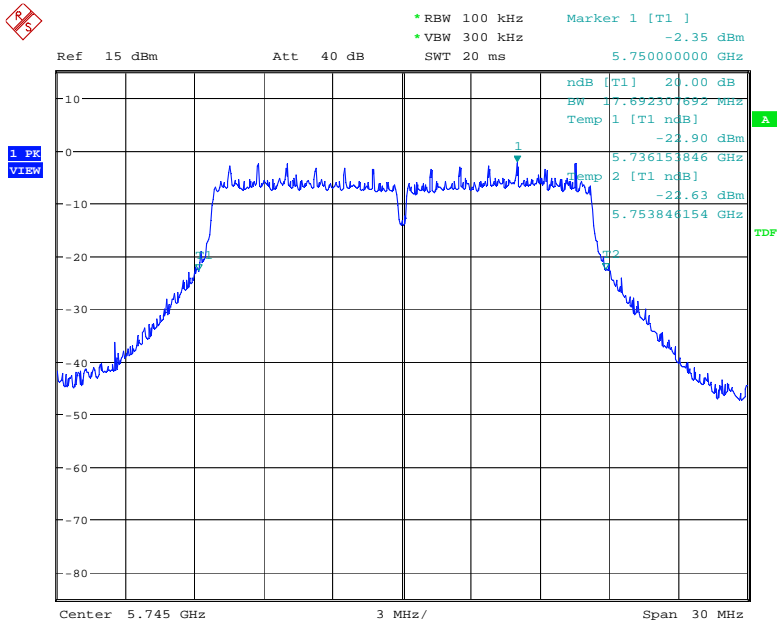


Date: 10.FEB.2015 19:14:06

802.11a Middle Channel

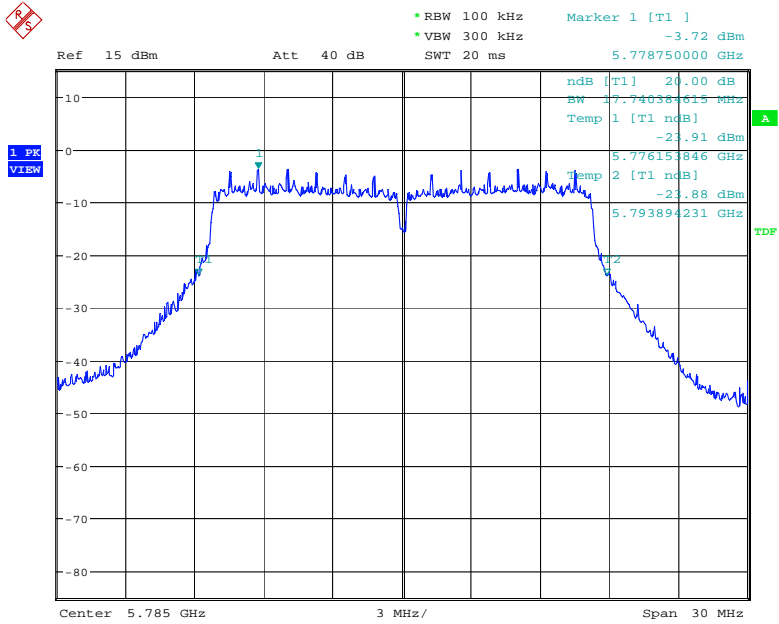


Date: 10.FEB.2015 19:14:40

802.11a High Channel

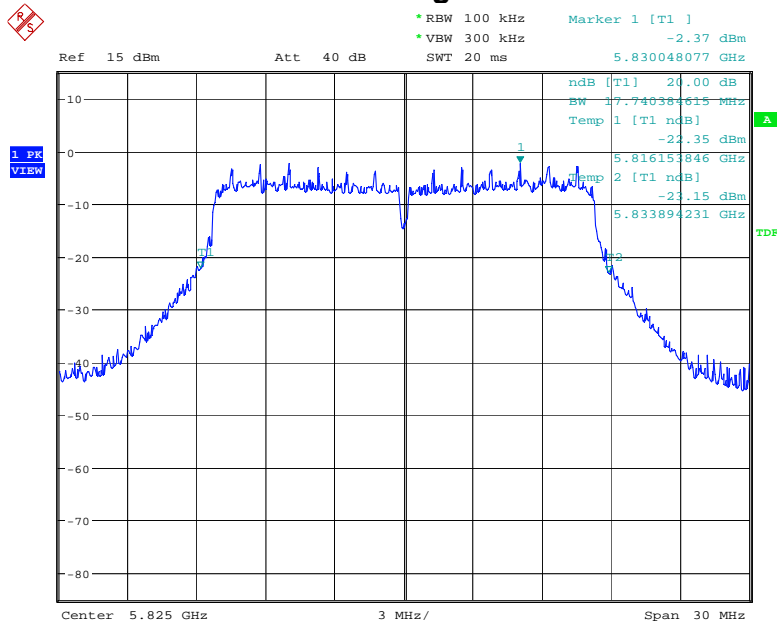


Date: 10.FEB.2015 19:15:14

802.11ac(VHT20) Low Channel

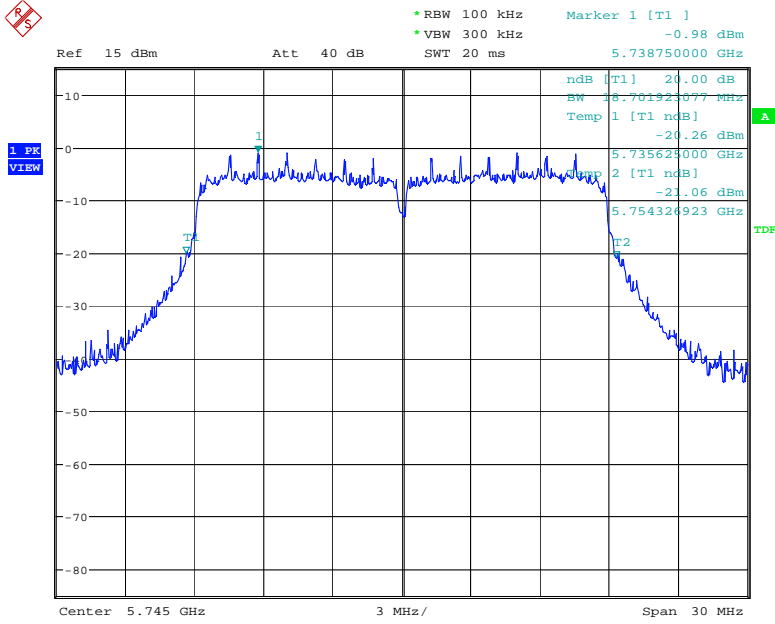


Date: 10.FEB.2015 19:10:55

802.11ac(VHT20) Middle Channel

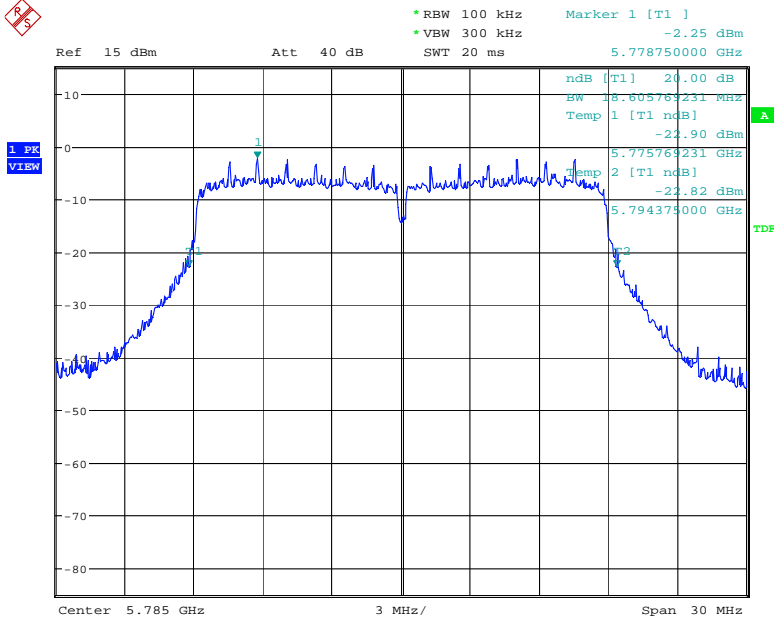


Date: 10.FEB.2015 19:11:31

802.11ac(VHT20) High Channel

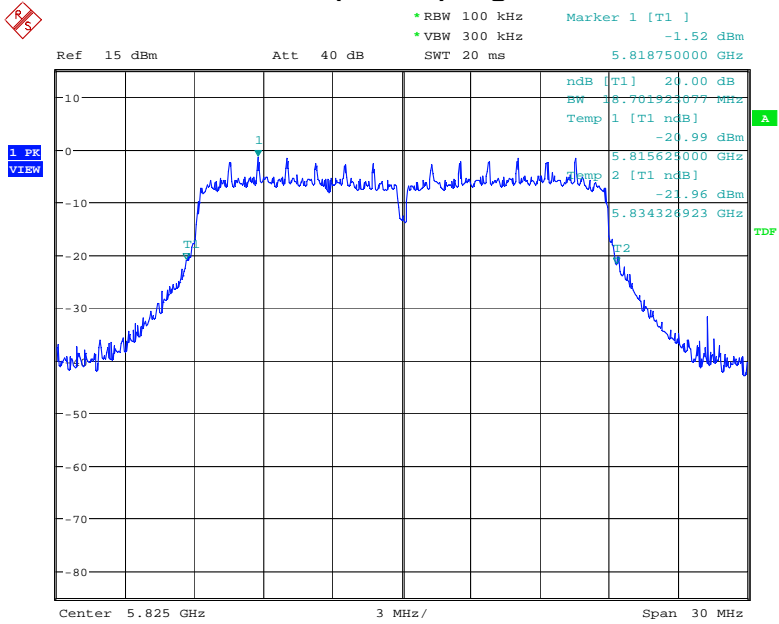


Date: 10.FEB.2015 19:12:05

802.11ac(VHT40) Low Channel

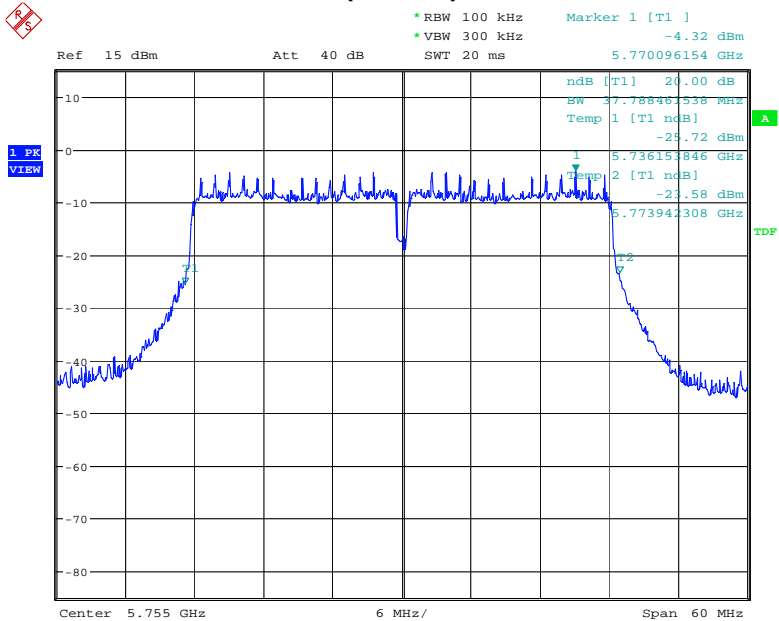


Date: 10.FEB.2015 19:09:32

802.11ac(VHT40) High Channel

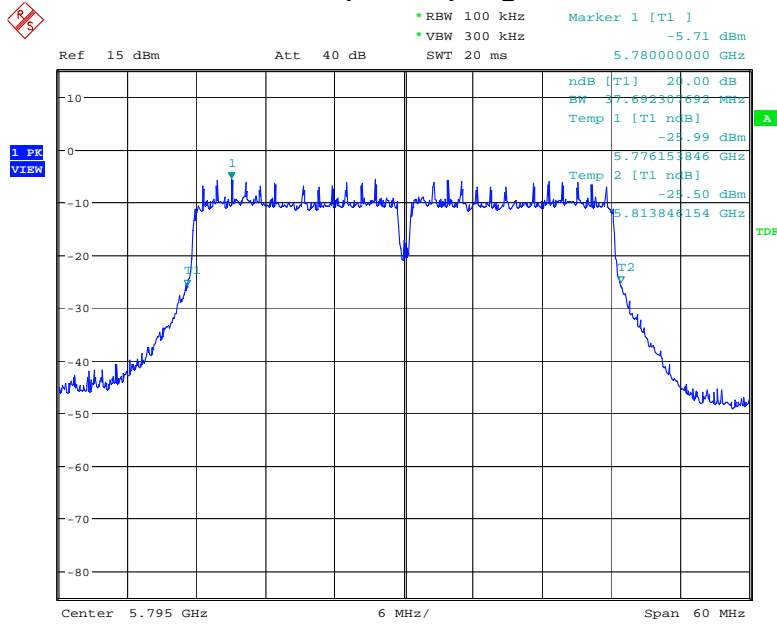

Date: 10.FEB.2015 19:10:01

802.11ac(VHT80)

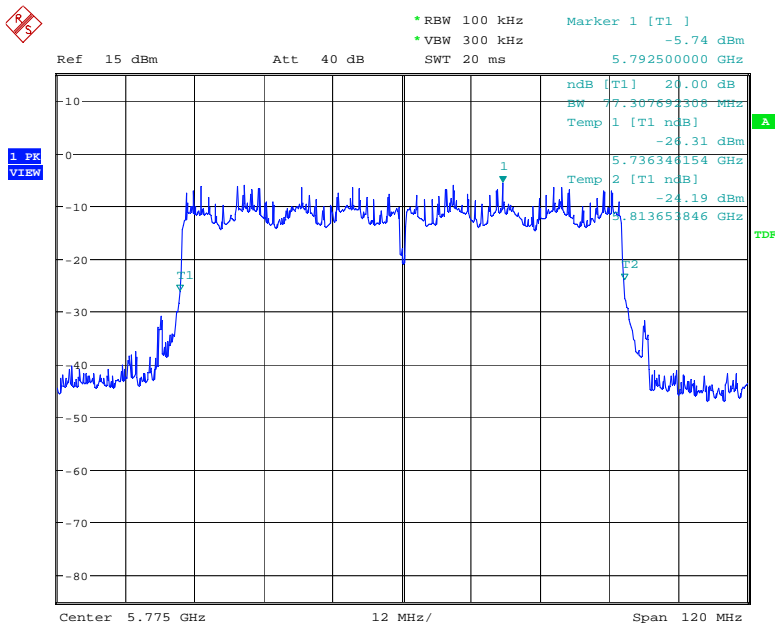

Date: 10.FEB.2015 19:08:57

6. Power Spectral Density

6.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r02):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Results

Pass

Please refer to following table and plots.




Temperature :	22 °C	Humidity :	48 %
Test By:	Sance	Test Date :	February 10, 2015
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm	Limit dBm
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-13.38	8
Middle Channel: 2437	1	-11.97	8
High Channel: 2462	1	-11.92	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-15.25	8
Middle Channel: 2437	6	-14.85	8
High Channel: 2462	6	-14.55	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-15.25	8
Middle Channel: 2437	6.5	-14.55	8
High Channel: 2462	6.5	-15.21	8
IEEE 802.11n(HT40) Mode (OFDM)			
Low Channel: 2422	13	-18.17	8
Middle Channel: 2437	13	-17.48	8
High Channel: 2452	13	-19.15	8




Frequency MHz	PSD dBm	Limit dBm
IEEE 802.11a Mode (OFDM)		
Low Channel: 5745	-15.30	8
Middle Channel: 5785	-16.68	8
High Channel: 5825	-15.84	8
IEEE 802.11ac(VHT20) Mode (OFDM)		
Low Channel: 5745	-16.14	8
Middle Channel: 5785	-16.89	8
High Channel: 5825	-15.97	8
IEEE 802.11ac(VHT40) Mode (OFDM)		
Low Channel: 5755	-18.45	8
High Channel: 5795	-19.04	8
IEEE 802.11ac(VHT80) Mode (OFDM)		
Channel: 5775	-22.20	8

802.11b Low Channel

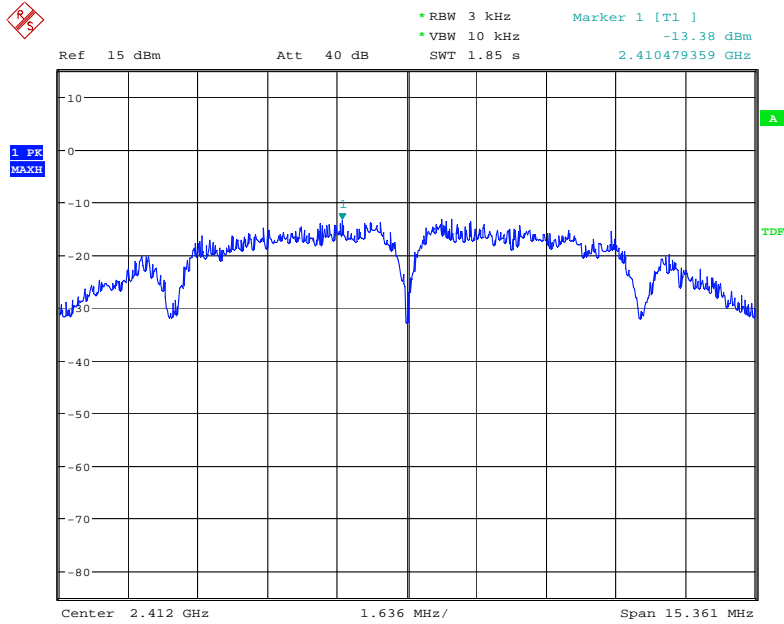


Date: 10.FEB.2015 19:44:28

802.11b Middle Channel

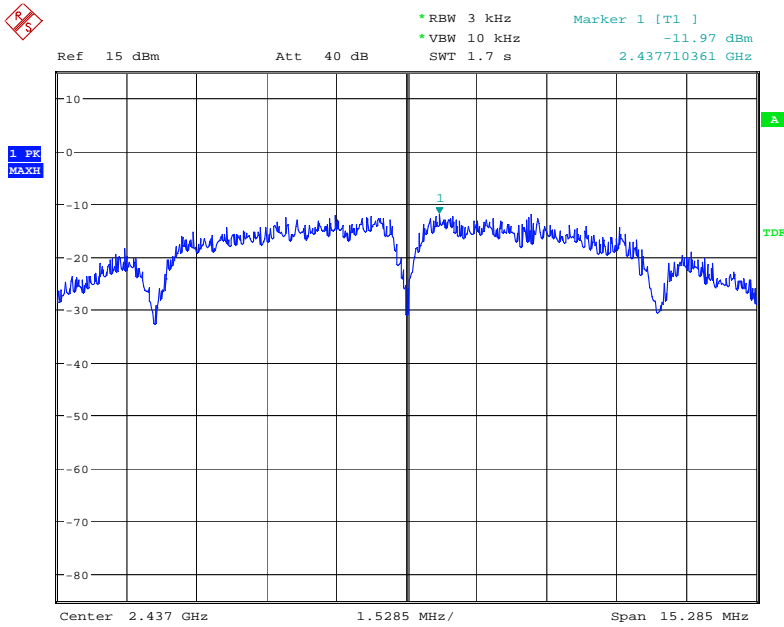


Date: 10.FEB.2015 19:44:50

802.11b High Channel

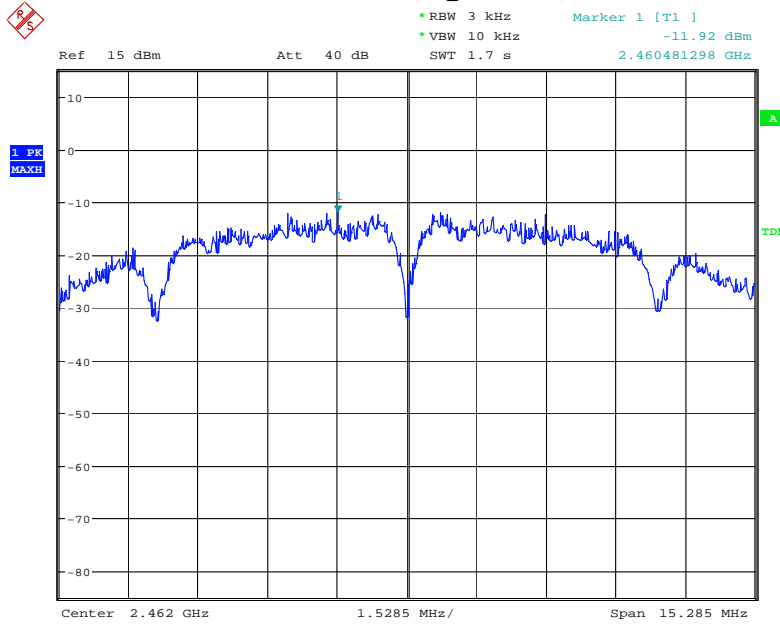


Date: 10.FEB.2015 19:45:13

802.11g Low Channel

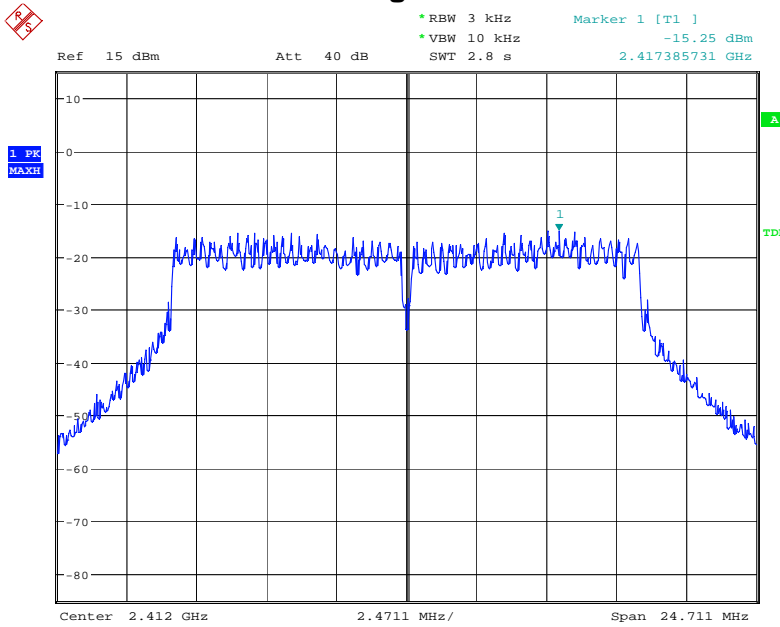


Date: 10.FEB.2015 19:45:57

802.11g Middle Channel

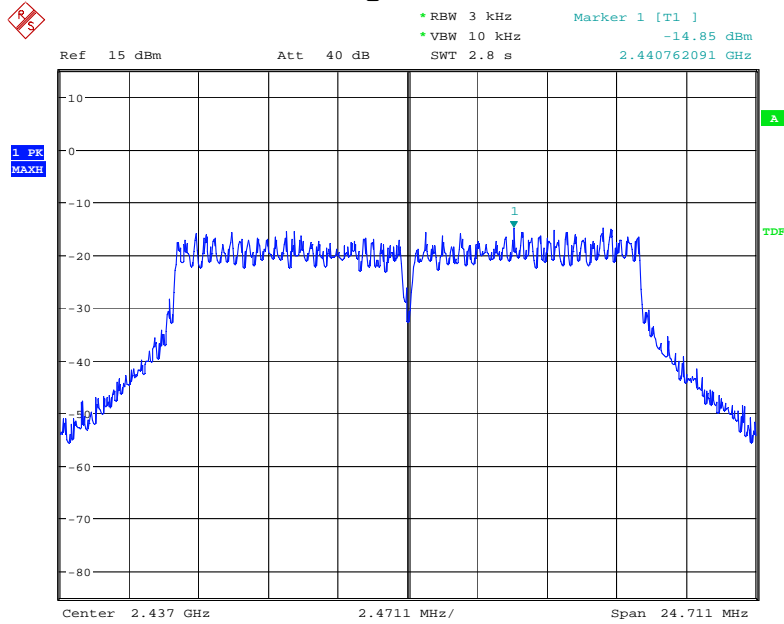


Date: 10.FEB.2015 19:46:18

802.11g High Channel

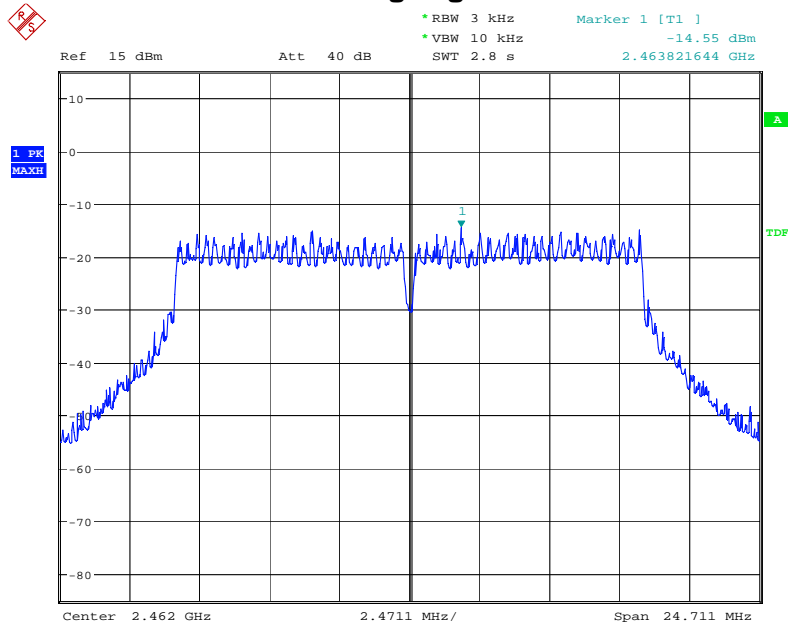


Date: 10.FEB.2015 19:46:40

802.11n(HT20) Low Channel

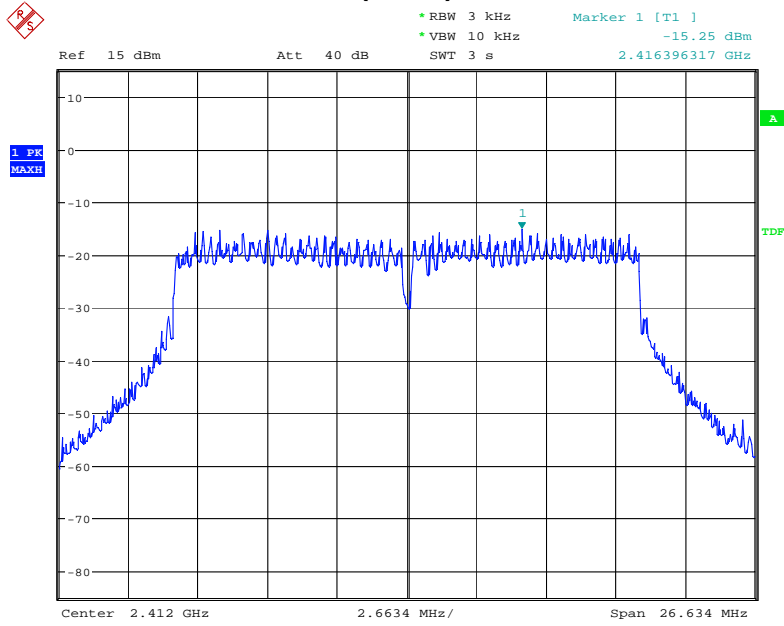


Date: 10.FEB.2015 19:47:04

802.11n(HT20) Middle Channel

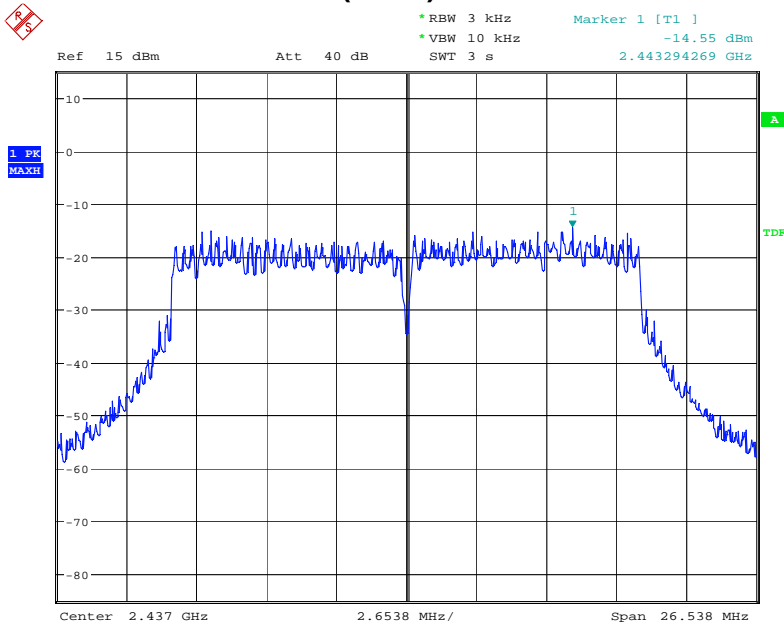


Date: 10.FEB.2015 19:47:29

802.11n(HT20) High Channel

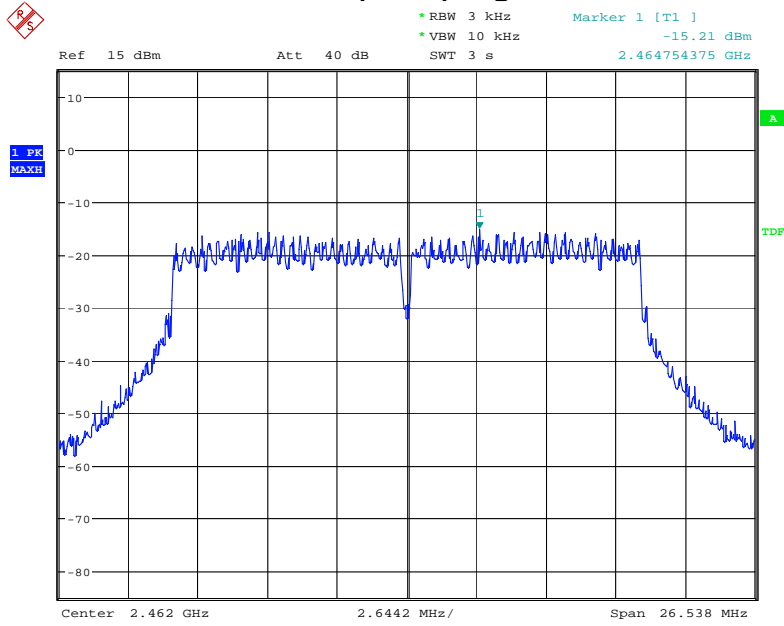


Date: 10.FEB.2015 19:47:50

802.11n(HT40) Low Channel

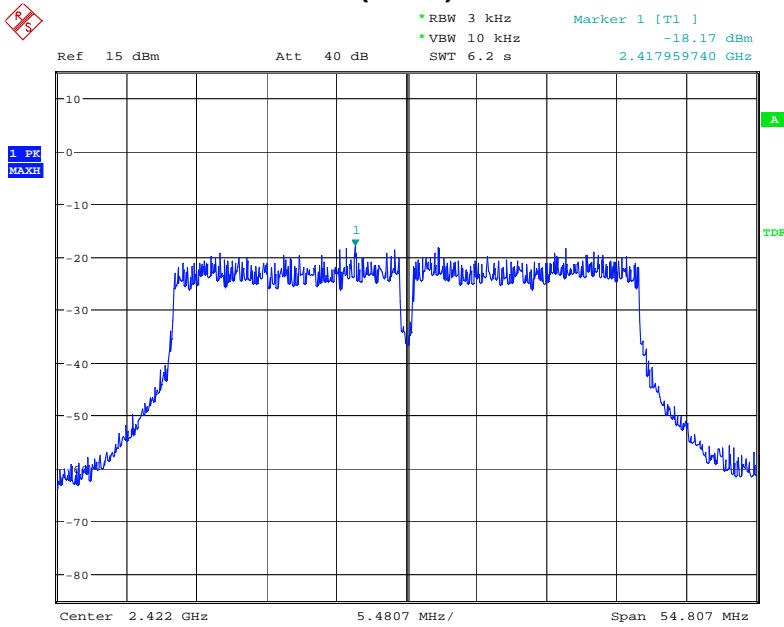


Date: 10.FEB.2015 19:48:29

802.11n(HT40) Middle Channel

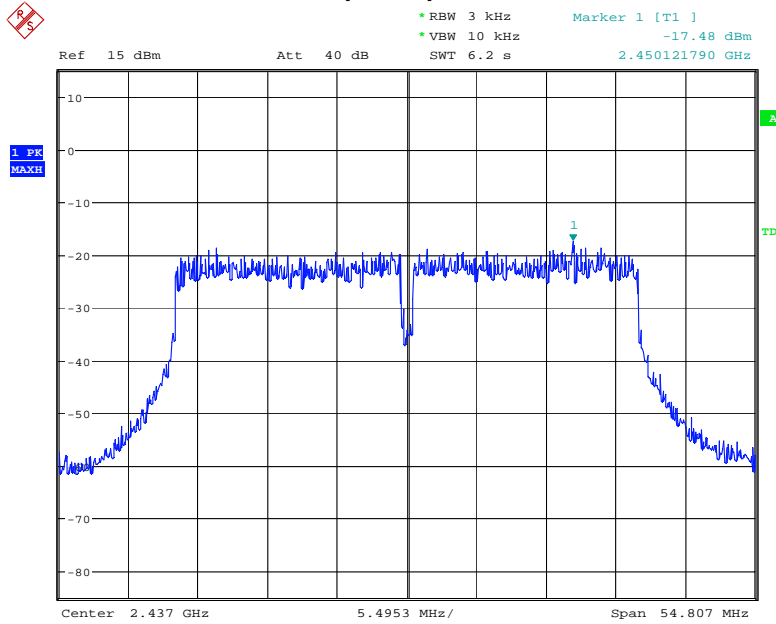


Date: 10.FEB.2015 19:48:58

802.11n(HT40) High Channel

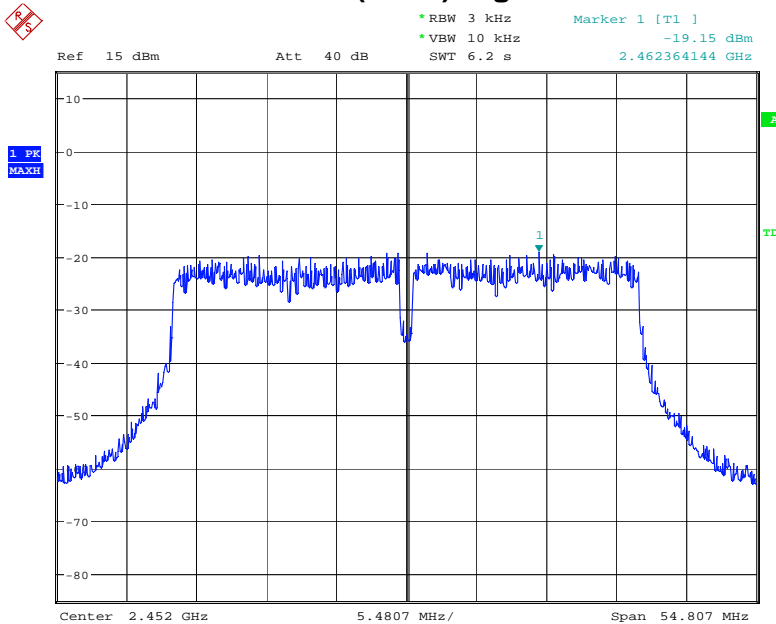


Date: 10.FEB.2015 19:49:25

802.11a Low Channel

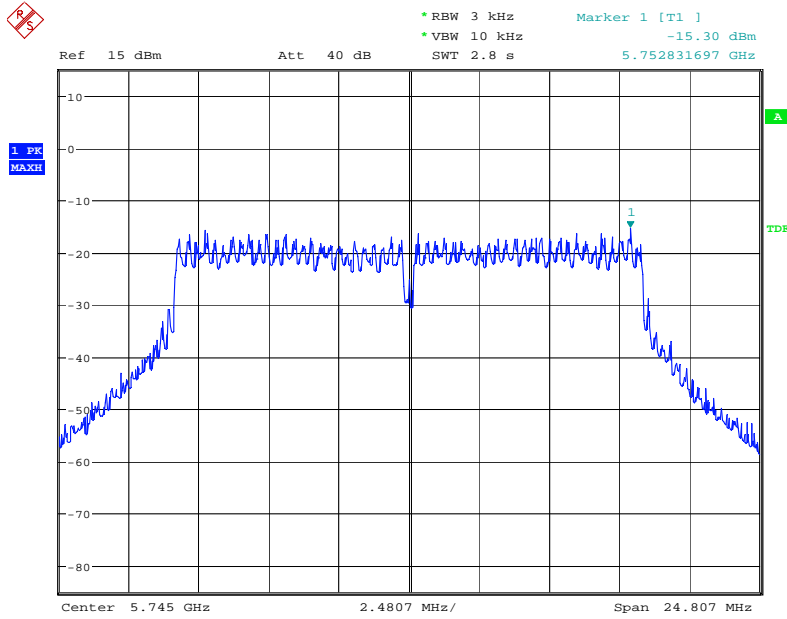


Date: 10.FEB.2015 19:50:31

802.11a Middle Channel

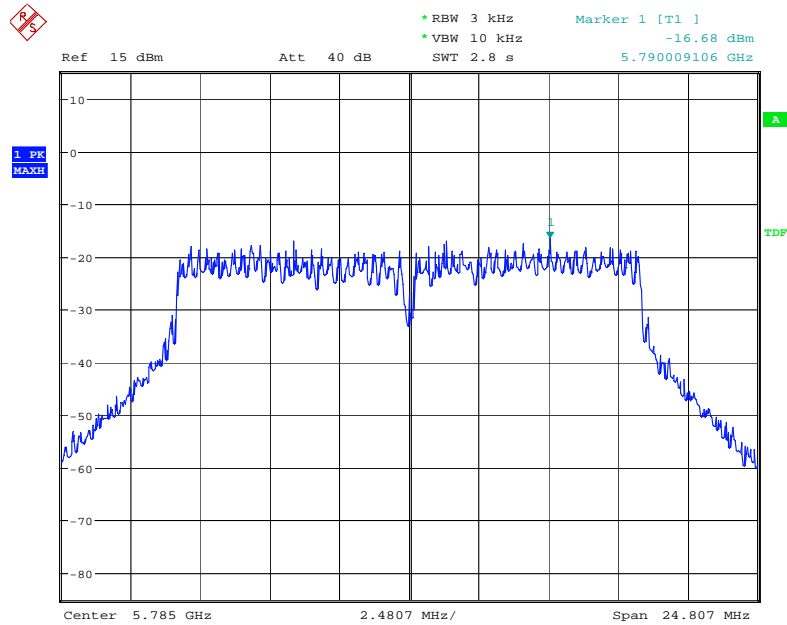


Date: 10.FEB.2015 19:50:49

802.11a High Channel

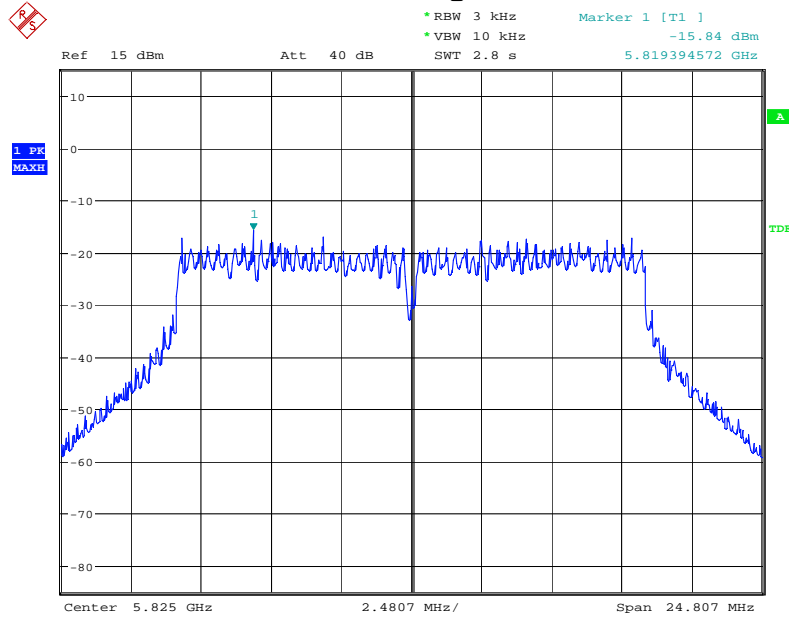


Date: 10.FEB.2015 19:51:18

802.11ac(VHT20) Low Channel

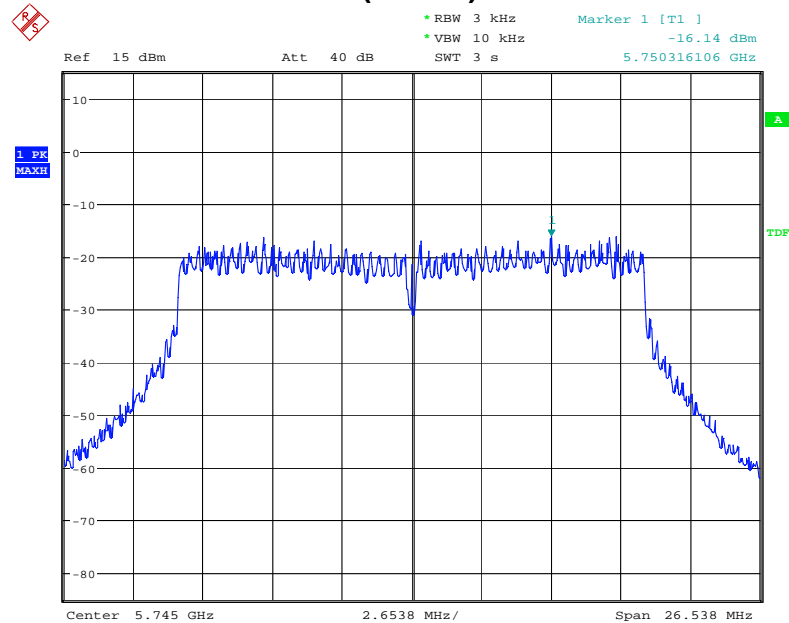


Date: 10.FEB.2015 19:51:45

802.11ac(VHT20) Middle Channel

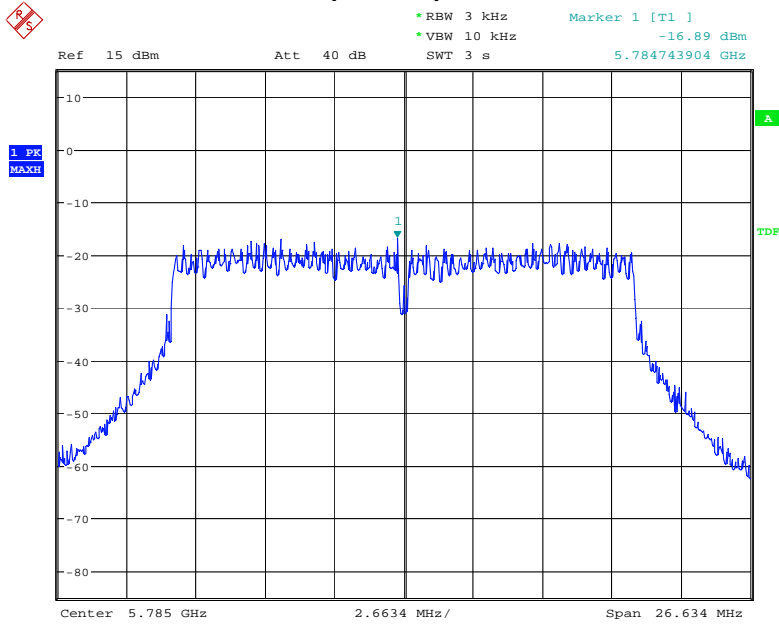


Date: 10.FEB.2015 19:53:17

802.11ac(VHT20) High Channel

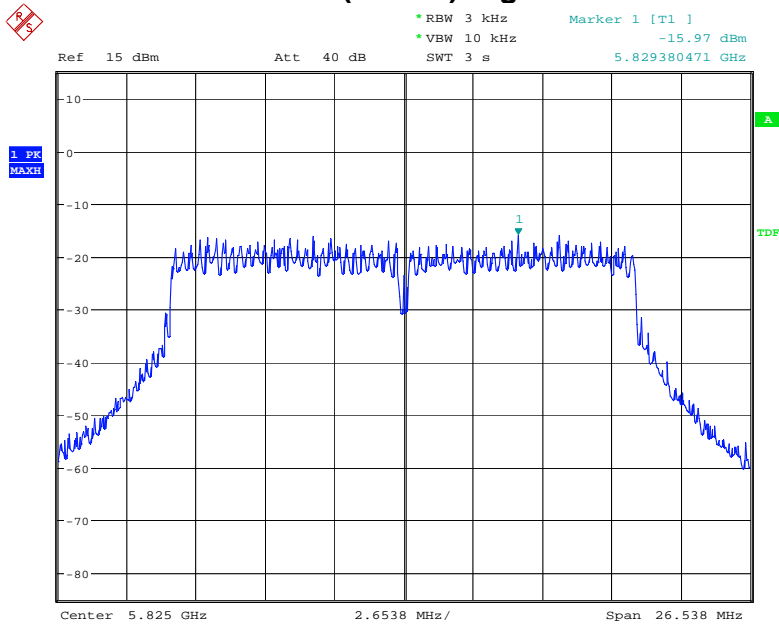


Date: 10.FEB.2015 19:53:42

802.11ac(VHT40) Low Channel

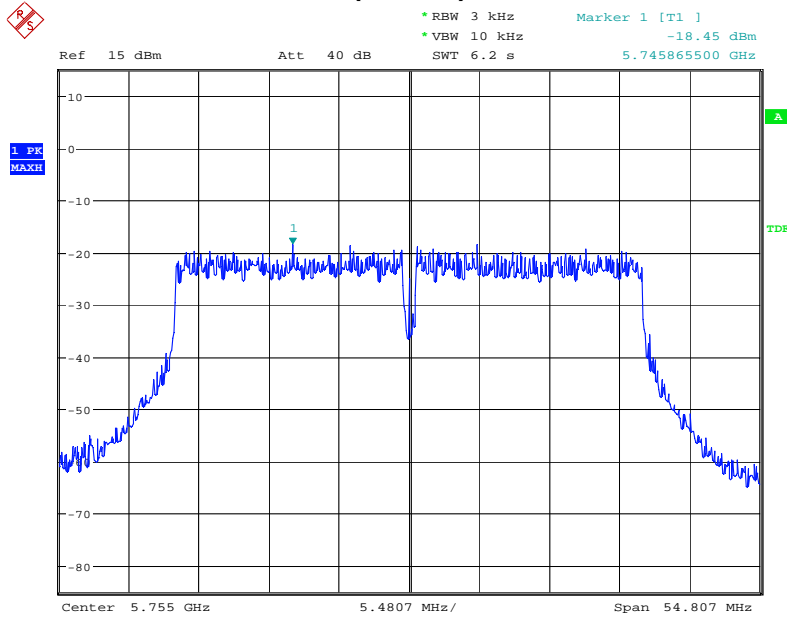


Date: 10.FEB.2015 19:54:30

802.11ac(VHT40) High Channel

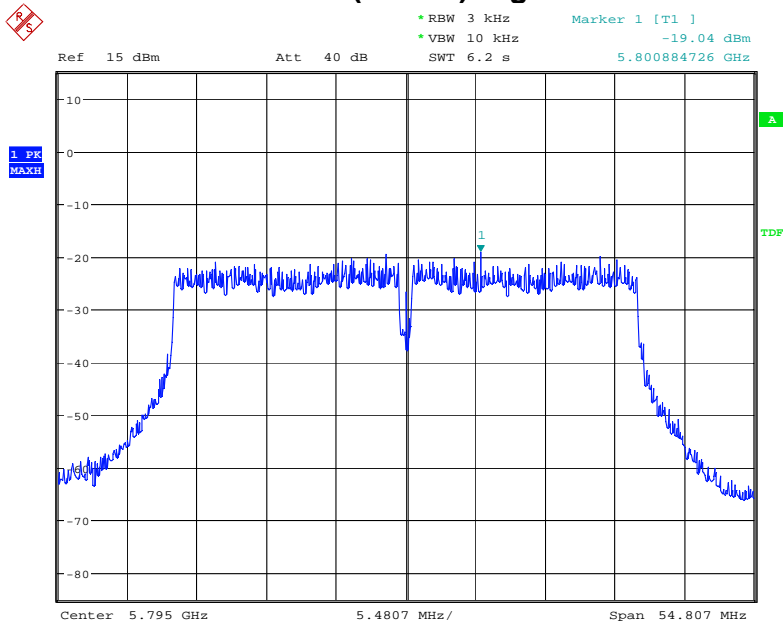

Date: 10.FEB.2015 19:55:05

802.11ac(VHT80)

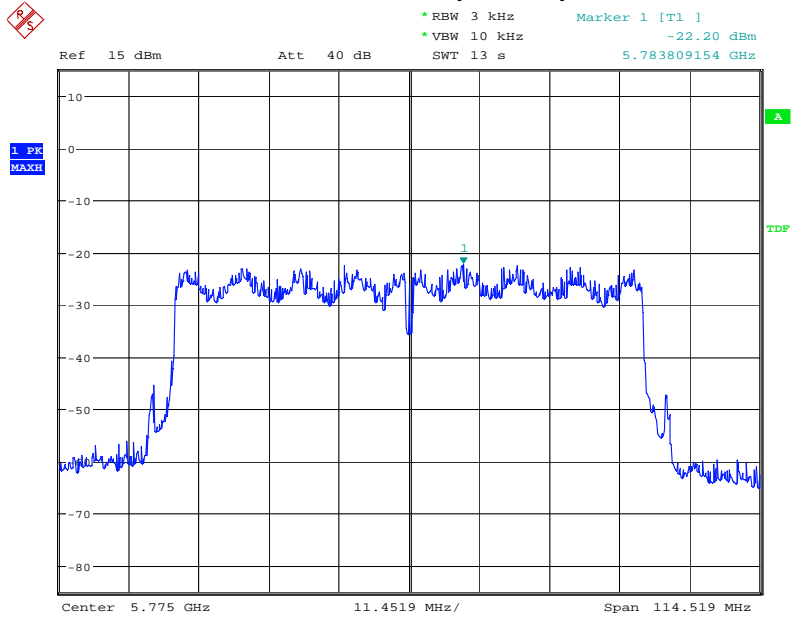

Date: 10.FEB.2015 19:56:21

7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

For 30MHz to 1GHz:

Set the spectrum analyzer as: RBW=120kHz, VBW=300kHz, Detector=Quasi-Peak

For Above 1GHz:


Set the spectrum analyzer as: RBW=1MHz, VBW=3MHz, Detector=Peak.

Set the spectrum analyzer as: RBW=1MHz, VBW=10Hz, Detector=Peak.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Results

The test plots showed that all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below tables and plots.



Spurious Emission in restricted band:

Operation Mode: TX Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

For Integral Antenna

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11b							
2399.180	H	47.53	32.69	74.00	54.00	-26.47	-21.31
2399.330	V	46.05	33.33	74.00	54.00	-27.95	-20.67
2490.490	H	48.10	35.24	74.00	54.00	-25.90	-18.76
2489.200	V	48.24	35.78	74.00	54.00	-25.76	-18.22
Test Mode: 802.11g							
2399.420	H	48.37	36.32	74.00	54.00	-25.63	-17.68
2398.000	V	50.82	36.15	74.00	54.00	-23.18	-17.85
2486.150	H	48.33	34.21	74.00	54.00	-25.67	-19.79
2487.240	V	48.43	35.09	74.00	54.00	-25.57	-18.91
Test Mode: 802.11n(HT20)							
2398.420	H	50.59	35.68	74.00	54.00	-23.41	-18.32
2398.160	V	50.46	34.73	74.00	54.00	-23.54	-19.27
2480.200	H	43.27	34.20	74.00	54.00	-30.73	-19.80
2480.460	V	43.29	34.27	74.00	54.00	-30.71	-19.73
Test Mode: 802.11n(HT40)							
2399.710	H	50.43	36.49	74.00	54.00	-23.57	-17.51
2398.770	V	51.51	36.97	74.00	54.00	-22.49	-17.03
2484.720	H	46.47	34.49	74.00	54.00	-27.53	-19.51
2485.520	V	46.47	35.90	74.00	54.00	-27.53	-18.10



Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11a							
5722.010	H	54.78	40.24	74.00	54.00	-19.22	-13.76
5722.200	V	54.28	42.34	74.00	54.00	-19.72	-11.66
5850.940	H	53.13	44.66	74.00	54.00	-20.87	-9.34
5850.900	V	53.24	44.15	74.00	54.00	-20.76	-9.85
Test Mode: 802.11ac(VHT20)							
5723.620	H	55.31	41.32	74.00	54.00	-18.69	-12.68
5720.600	V	55.01	43.40	74.00	54.00	-18.99	-10.60
5853.450	H	52.28	40.58	74.00	54.00	-21.72	-13.42
5853.460	V	55.22	40.40	74.00	54.00	-18.78	-13.60
Test Mode: 802.11ac(VHT40)							
5722.790	H	54.27	42.99	74.00	54.00	-19.73	-11.01
5719.660	V	57.50	42.01	74.00	54.00	-16.50	-11.99
5875.300	H	56.36	41.52	74.00	54.00	-17.64	-12.48
5876.800	V	52.21	42.60	74.00	54.00	-21.79	-11.40
Test Mode: 802.11ac(VHT80)							
5720.990	H	55.27	40.49	74.00	54.00	-18.73	-13.51
5722.890	V	55.29	38.82	74.00	54.00	-18.71	-15.18
5882.010	H	52.00	40.15	74.00	54.00	-22.00	-13.85
5880.720	V	52.16	40.22	74.00	54.00	-21.84	-13.78

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : ±3.7dB



For PCB Antenna

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11b							
2399.300	H	47.18	32.07	74.00	54.00	-26.82	-21.93
2399.300	V	45.59	33.26	74.00	54.00	-28.41	-20.74
2490.150	H	48.07	34.59	74.00	54.00	-25.93	-19.41
2490.150	V	46.75	35.75	74.00	54.00	-27.25	-18.25
Test Mode: 802.11g							
2399.660	H	48.79	36.56	74.00	54.00	-25.21	-17.44
2398.660	V	49.88	35.13	74.00	54.00	-24.12	-18.87
2486.000	H	47.27	34.56	74.00	54.00	-26.73	-19.44
2486.000	V	46.31	34.55	74.00	54.00	-27.69	-19.45
Test Mode: 802.11n(HT20)							
2398.900	H	48.11	35.15	74.00	54.00	-25.89	-18.85
2398.870	V	48.79	35.42	74.00	54.00	-25.21	-18.58
2480.150	H	46.75	34.03	74.00	54.00	-27.25	-19.97
2480.150	V	46.76	34.07	74.00	54.00	-27.24	-19.93
Test Mode: 802.11n(HT40)							
2399.330	H	51.22	36.35	74.00	54.00	-22.78	-17.65
2398.360	V	51.64	36.29	74.00	54.00	-22.36	-17.71
2486.000	H	45.02	35.13	74.00	54.00	-28.98	-18.87
2485.000	V	48.13	35.57	74.00	54.00	-25.87	-18.43



Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11a							
5722.000	H	54.36	42.08	74.00	54.00	-19.64	-11.92
5722.100	V	54.16	42.16	74.00	54.00	-19.84	-11.84
5850.550	H	55.39	45.94	74.00	54.00	-18.61	-8.06
5850.550	V	53.58	45.55	74.00	54.00	-20.42	-8.45
Test Mode: 802.11ac(VHT20)							
5722.780	H	52.21	41.00	74.00	54.00	-21.79	-13.00
5722.780	V	55.06	41.88	74.00	54.00	-18.94	-12.12
5853.090	H	52.34	37.12	74.00	54.00	-21.66	-16.88
5853.060	V	55.35	36.80	74.00	54.00	-18.65	-17.20
Test Mode: 802.11ac(VHT40)							
5722.890	H	54.01	42.79	74.00	54.00	-19.99	-11.21
5722.890	V	55.29	42.65	74.00	54.00	-18.71	-11.35
5875.120	H	54.24	35.41	74.00	54.00	-19.76	-18.59
5876.200	V	52.11	35.19	74.00	54.00	-21.89	-18.81
Test Mode: 802.11ac(VHT80)							
5721.510	H	55.05	40.42	74.00	54.00	-18.95	-13.58
5721.510	V	53.89	40.05	74.00	54.00	-20.11	-13.95
5882.048	H	55.45	36.00	74.00	54.00	-18.55	-18.00
5880.050	V	56.37	36.18	74.00	54.00	-17.63	-17.82

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : ±3.7dB



For FPC Antenna


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11b							
2399.510	H	49.48	33.49	74.00	54.00	-24.52	-20.51
2399.510	V	45.90	33.20	74.00	54.00	-28.10	-20.80
2490.000	H	46.19	34.52	74.00	54.00	-27.81	-19.48
2490.000	V	46.44	32.28	74.00	54.00	-27.56	-21.72
Test Mode: 802.11g							
2399.980	H	49.18	34.49	74.00	54.00	-24.82	-19.51
2399.980	V	49.32	38.07	74.00	54.00	-24.68	-15.93
2486.100	H	45.55	34.14	74.00	54.00	-28.45	-19.86
2486.020	V	44.90	32.45	74.00	54.00	-29.10	-21.55
Test Mode: 802.11n(HT20)							
2396.220	H	47.54	32.58	74.00	54.00	-26.46	-21.42
2395.590	V	48.00	35.88	74.00	54.00	-26.00	-18.12
2480.450	H	45.18	30.79	74.00	54.00	-28.82	-23.21
2480.450	V	46.22	32.31	74.00	54.00	-27.78	-21.69
Test Mode: 802.11n(HT40)							
2399.190	H	50.56	35.67	74.00	54.00	-23.44	-18.33
2398.190	V	48.31	35.11	74.00	54.00	-25.69	-18.89
2485.240	H	40.50	33.80	74.00	54.00	-33.50	-20.20
2482.230	V	42.66	31.42	74.00	54.00	-31.34	-22.58



Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11a							
5722.310	H	50.45	41.05	74.00	54.00	-23.55	-12.95
5722.350	V	50.70	41.56	74.00	54.00	-23.30	-12.44
5848.240	H	52.42	37.22	74.00	54.00	-21.58	-16.78
5850.050	V	51.33	35.49	74.00	54.00	-22.67	-18.51
Test Mode: 802.11ac(VHT20)							
5721.660	H	52.40	38.17	74.00	54.00	-21.60	-15.83
5721.580	V	54.80	37.60	74.00	54.00	-19.20	-16.40
5853.000	H	54.36	36.38	74.00	54.00	-19.64	-17.62
5853.000	V	52.77	36.52	74.00	54.00	-21.23	-17.48
Test Mode: 802.11ac(VHT40)							
5716.099	H	53.51	32.66	74.00	54.00	-20.49	-21.34
5720.150	V	55.60	32.24	74.00	54.00	-18.40	-21.76
5872.360	H	53.24	35.15	74.00	54.00	-20.76	-18.85
5872.360	V	55.45	35.17	74.00	54.00	-18.55	-18.83
Test Mode: 802.11ac(VHT80)							
5720.100	H	50.22	32.50	74.00	54.00	-23.78	-21.50
5723.000	V	50.59	35.23	74.00	54.00	-23.41	-18.77
5882.210	H	51.30	33.80	74.00	54.00	-22.70	-20.20
5880.880	V	55.42	32.17	74.00	54.00	-18.58	-21.83


Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : ±3.7dB

Band Edge 802.11b Low Channel

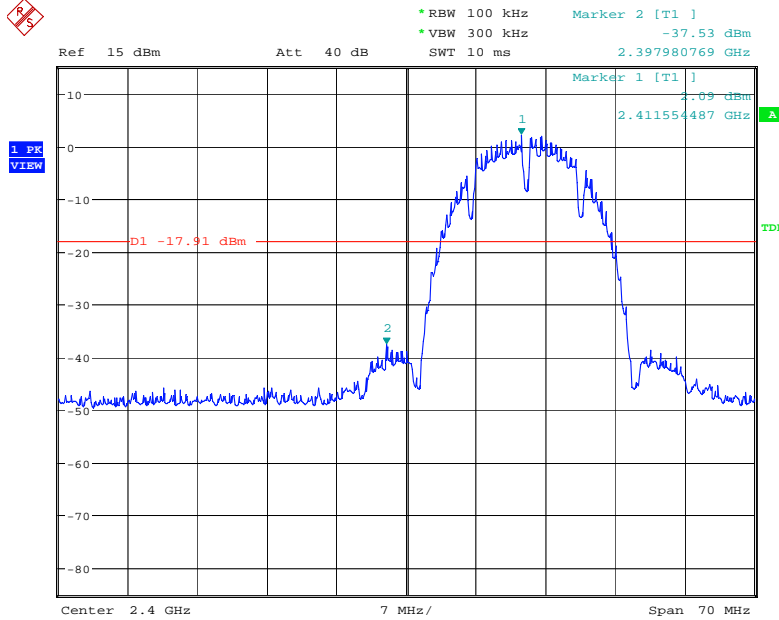


Date: 10.FEB.2015 19:57:50

802.11b High Channel

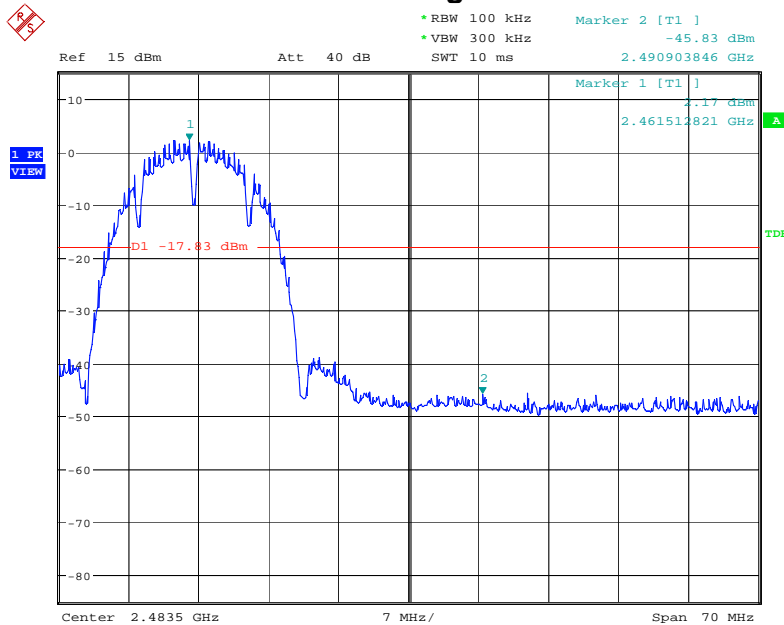


Date: 10.FEB.2015 19:58:56

802.11g Low Channel

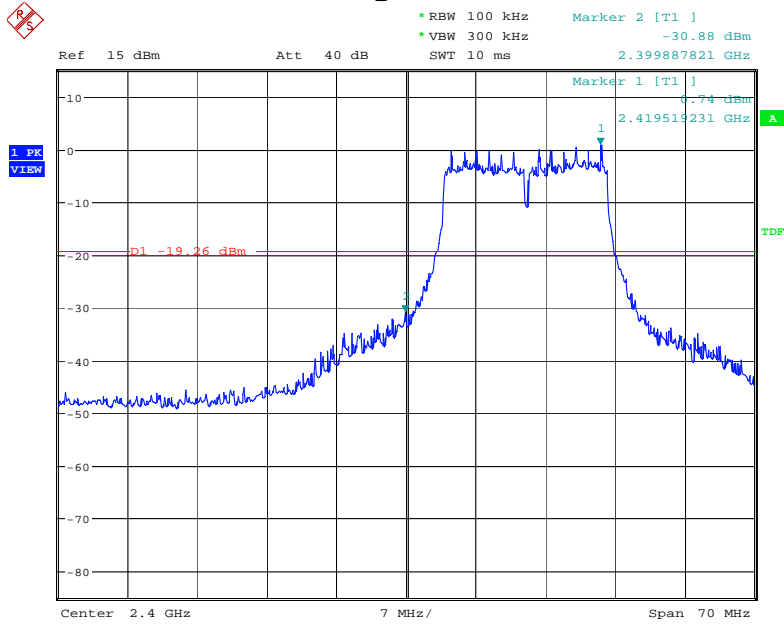


Date: 10.FEB.2015 20:00:01

802.11g High Channel

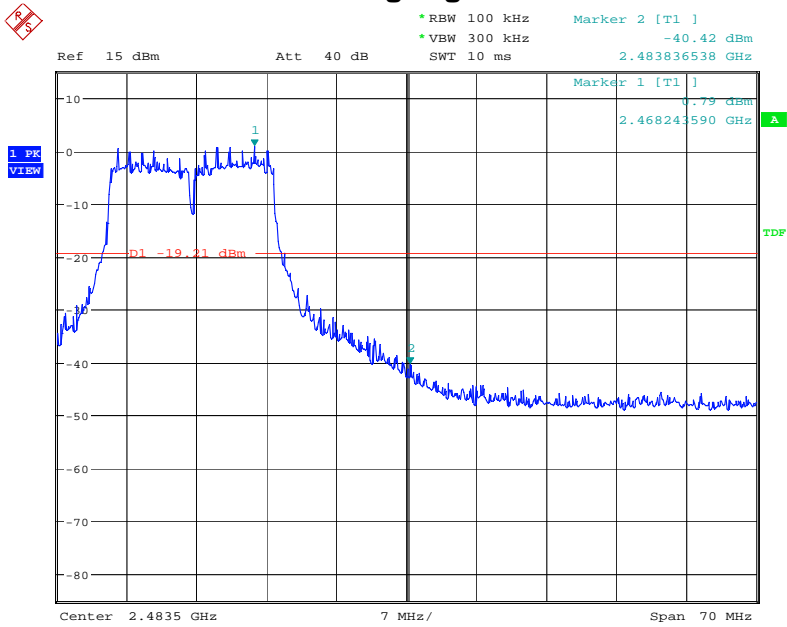


Date: 10.FEB.2015 20:00:35

802.11n(HT20) Low Channel

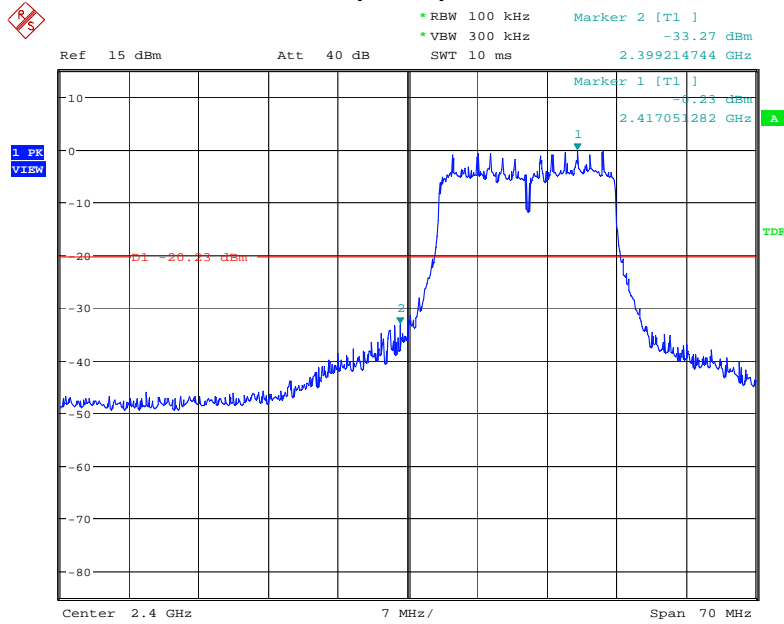


Date: 10.FEB.2015 20:01:23

802.11n(HT20) High Channel

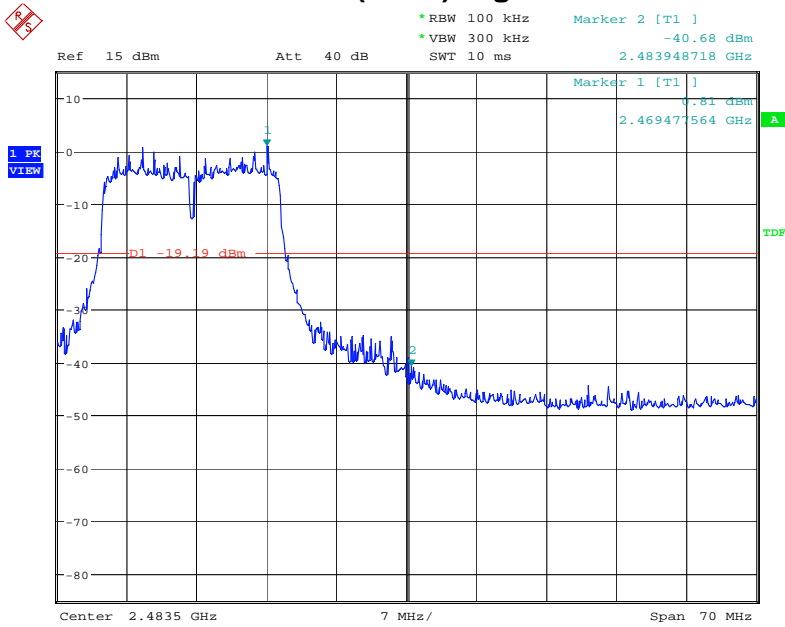


Date: 10.FEB.2015 20:02:05

802.11n(HT40) Low Channel

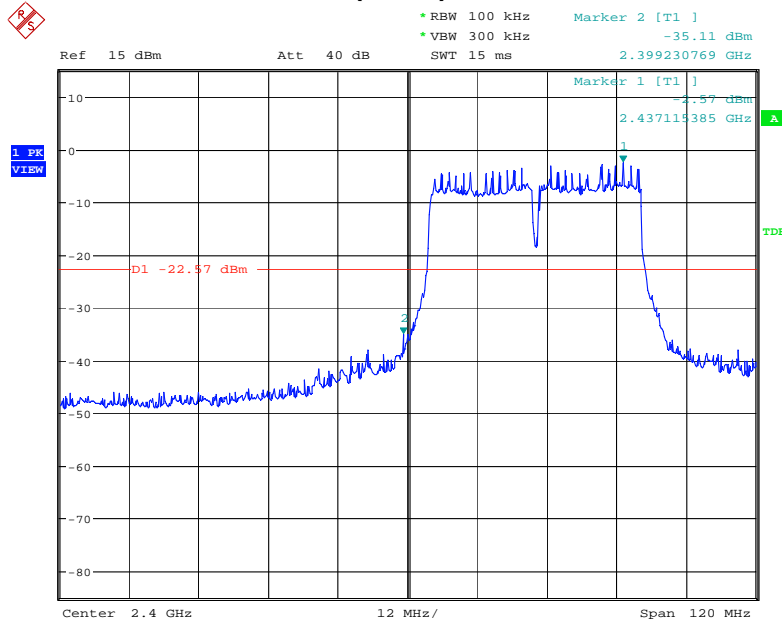


Date: 10.FEB.2015 20:02:51

802.11n(HT40) High Channel

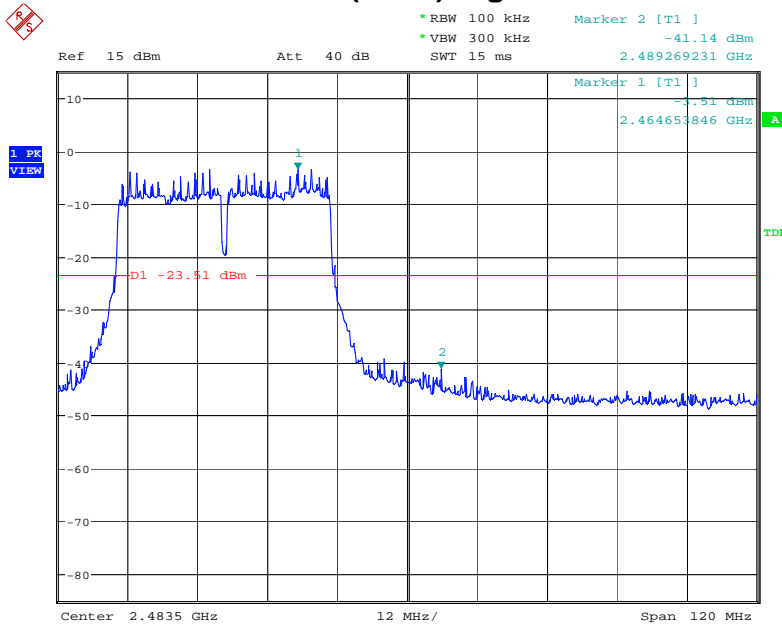


Date: 10.FEB.2015 20:03:38

802.11a Low Channel

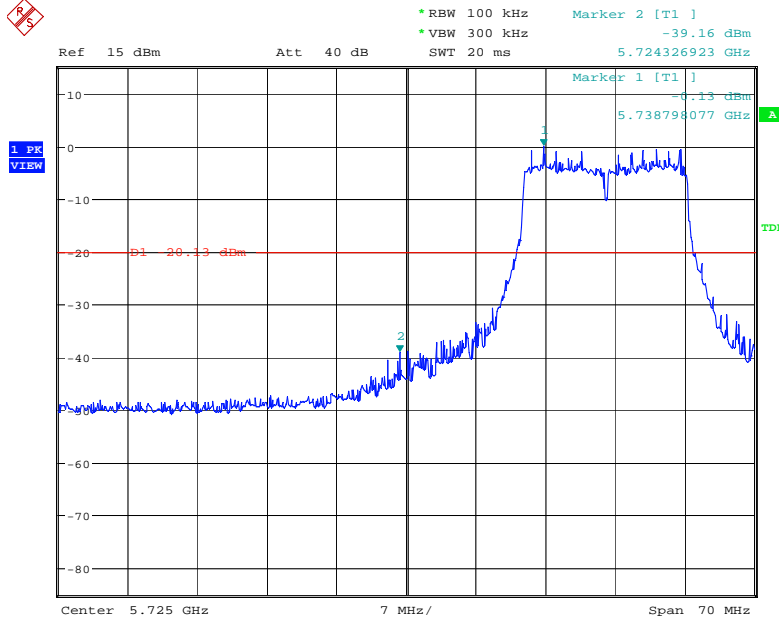


Date: 10.FEB.2015 20:05:17

802.11a High Channel

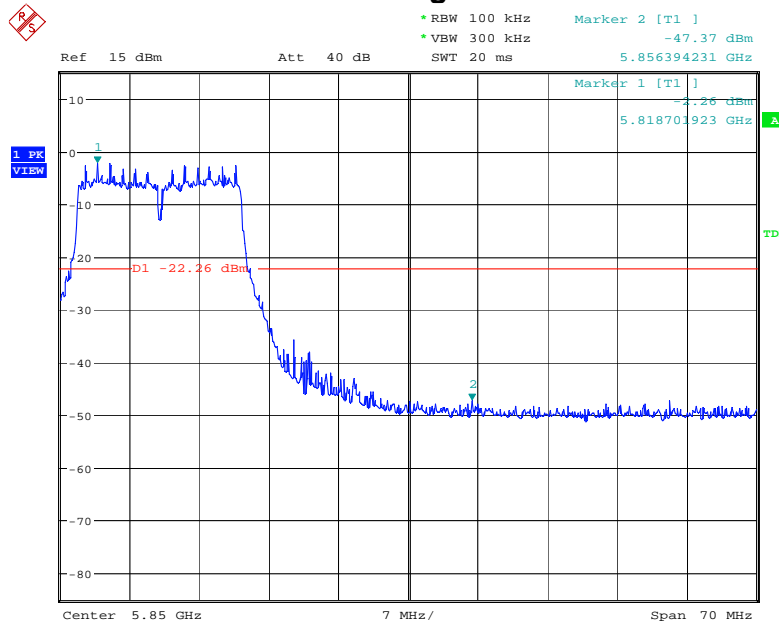


Date: 10.FEB.2015 20:06:27

802.11ac(VHT20) Low Channel

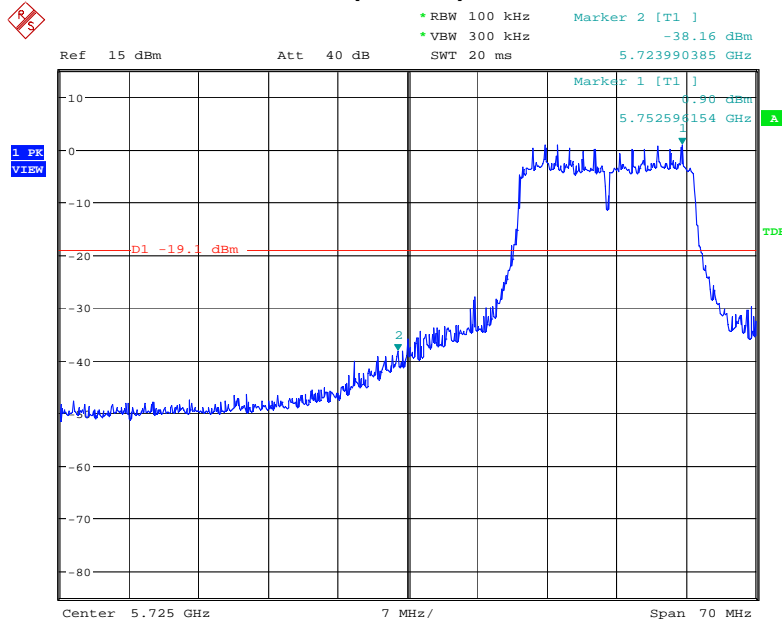


Date: 10.FEB.2015 20:07:16

802.11ac(VHT20) High Channel

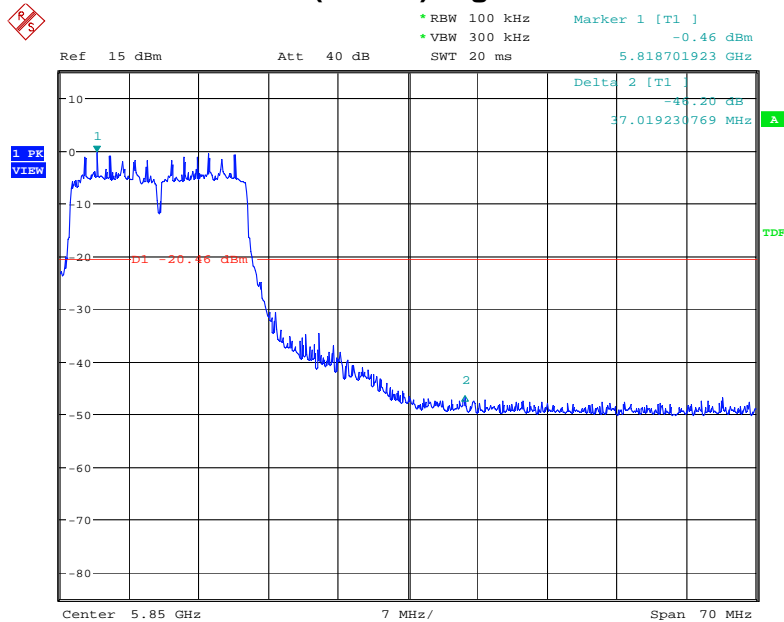


Date: 10.FEB.2015 20:07:55

802.11ac(VHT40) Low Channel

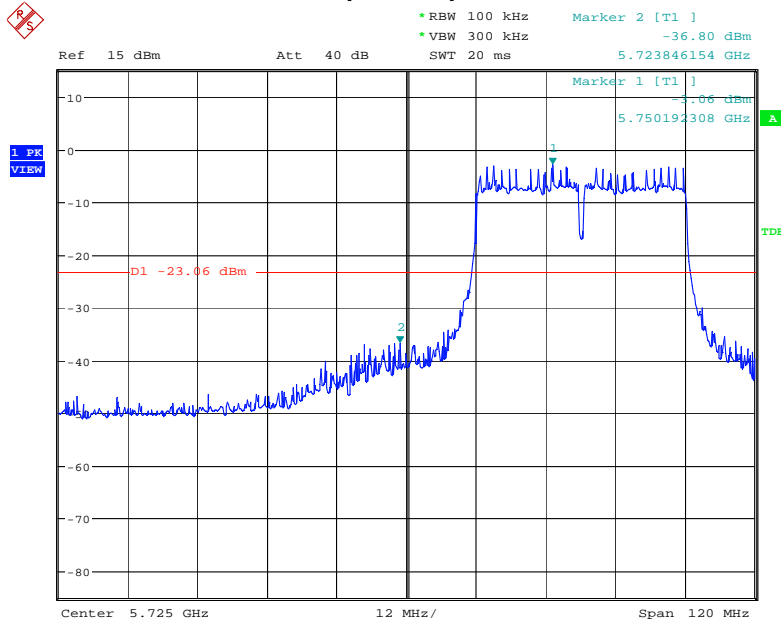


Date: 10.FEB.2015 20:08:44

802.11ac(VHT40) High Channel

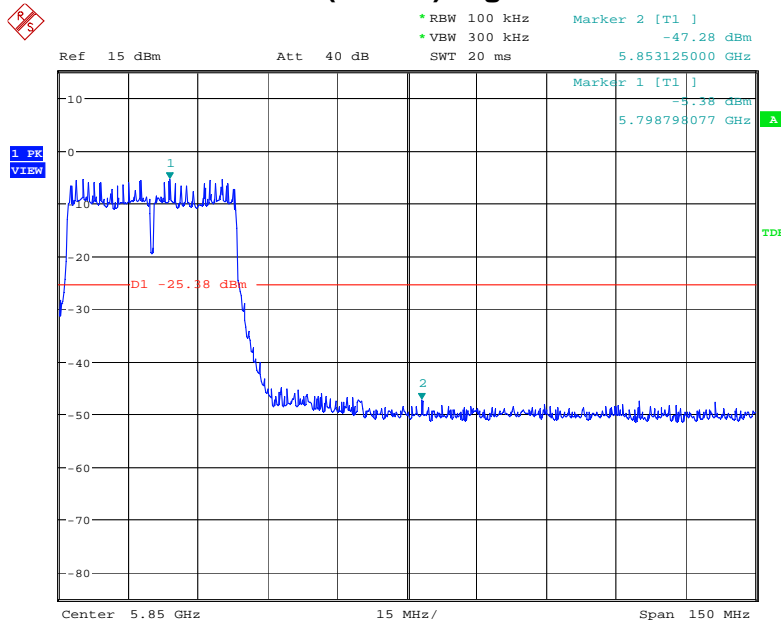


Date: 10.FEB.2015 20:09:41

802.11ac(VHT80) Low Channel

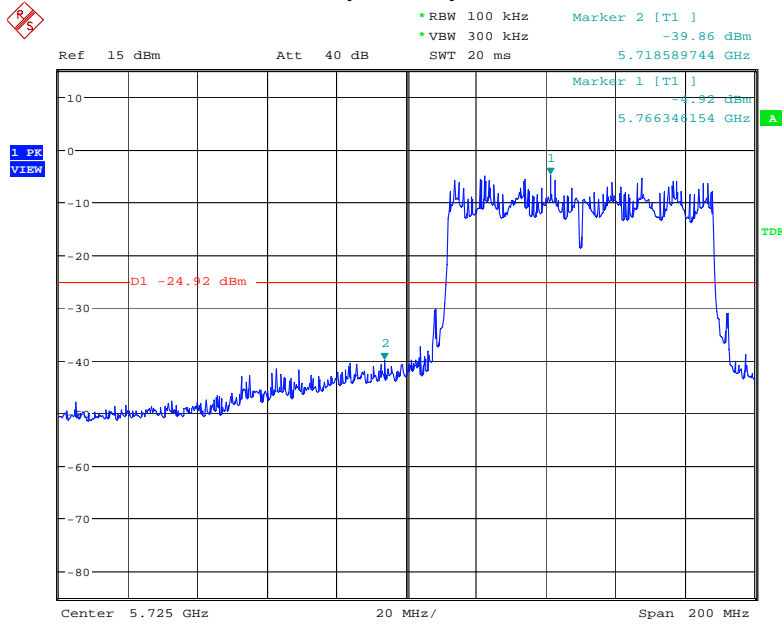


Date: 10.FEB.2015 20:10:37

802.11ac(VHT80) High Channel

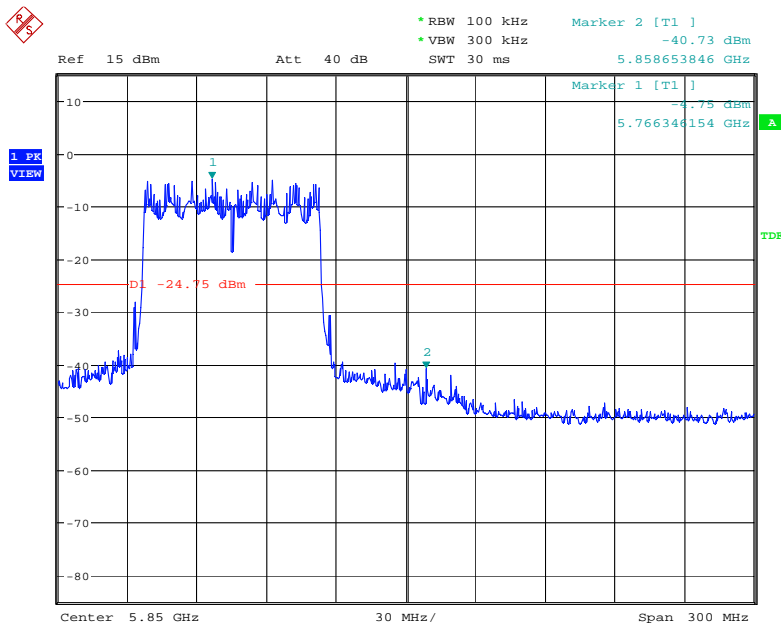


Date: 10.FEB.2015 20:11:30

Conducted Spurious Emissions The worst case: 802.11b Low Channel

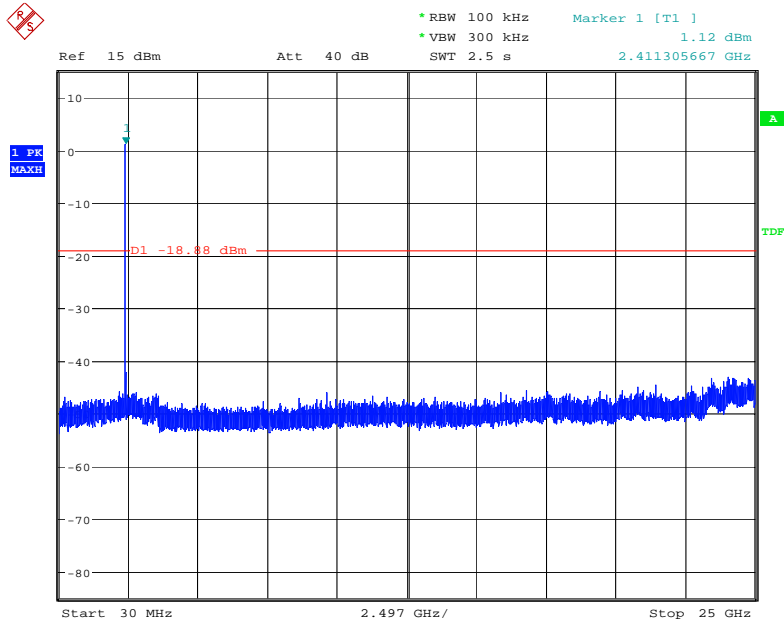


Date: 10.FEB.2015 20:13:44

Middle Channel

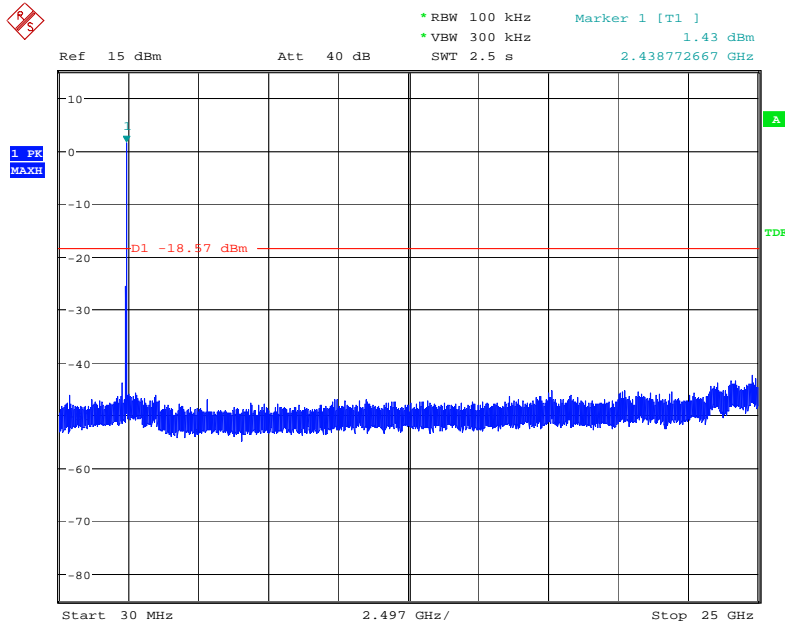


Date: 10.FEB.2015 20:14:31

High Channel

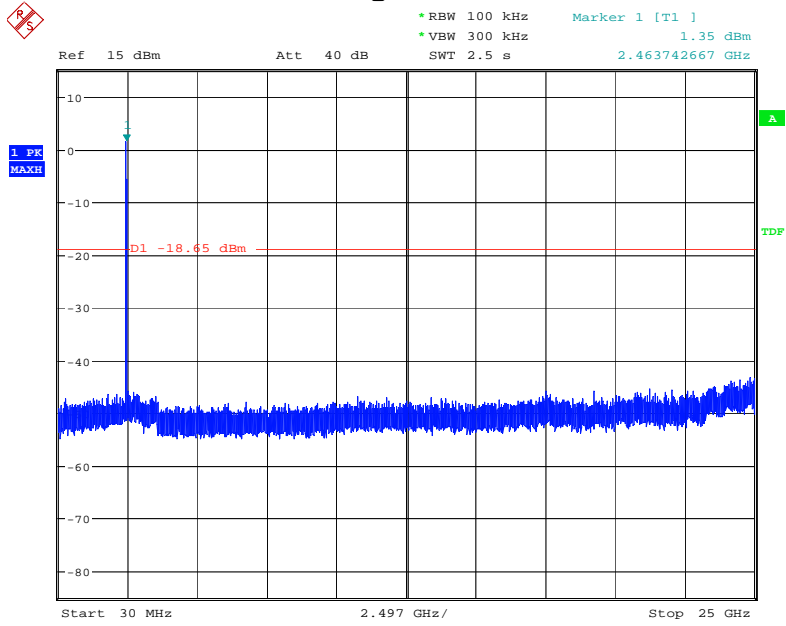


Date: 10.FEB.2015 20:15:08

For 5G The worst case: 802.11a Low Channel

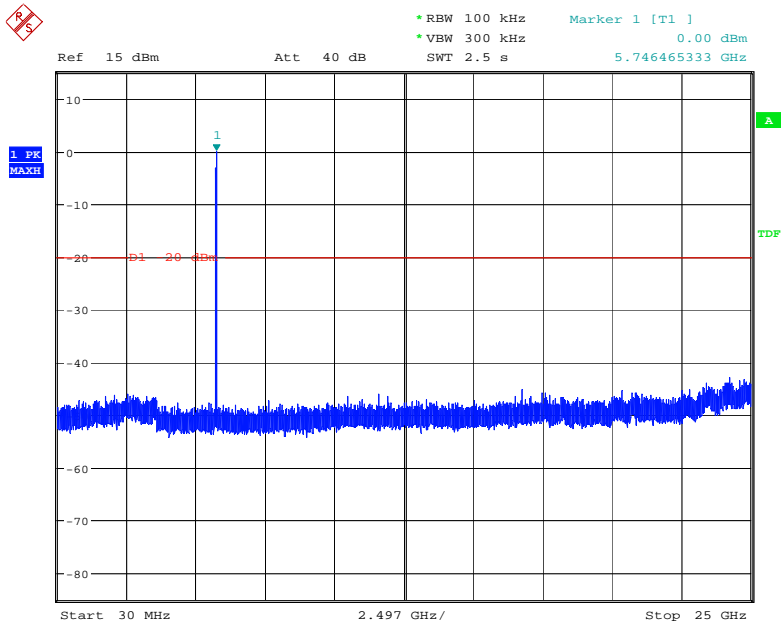


Date: 10.FEB.2015 20:16:02

Middle Channel

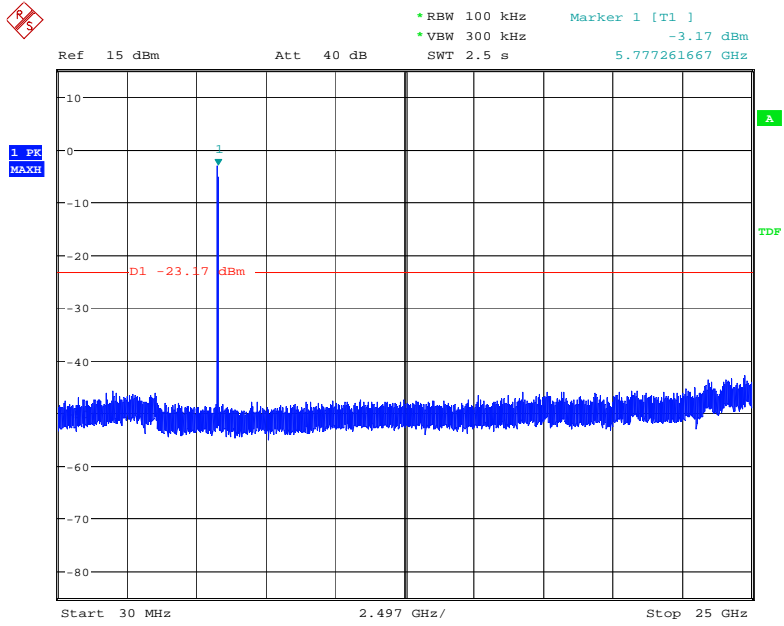

Date: 10.FEB.2015 20:16:48

High Channel

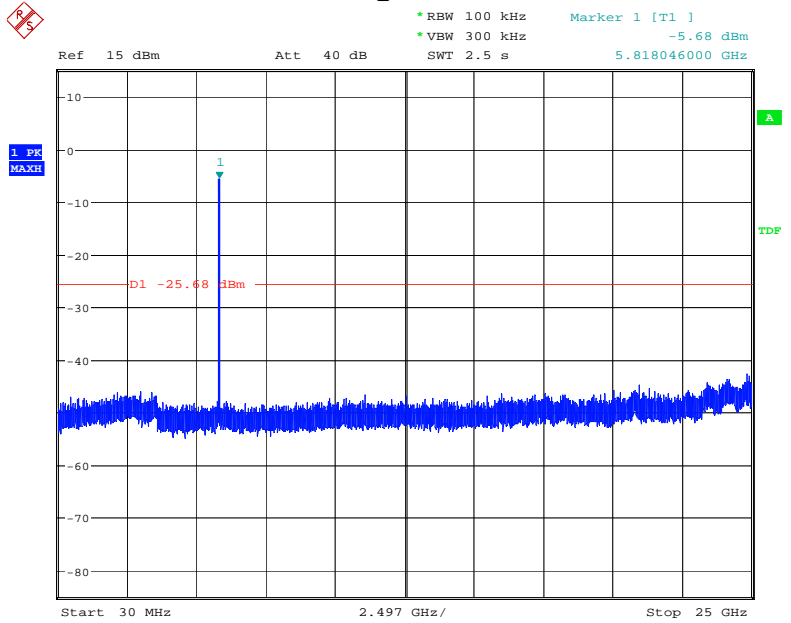


Date: 10.FEB.2015 20:17:40

For above 25GHz, there is no emission was found.


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

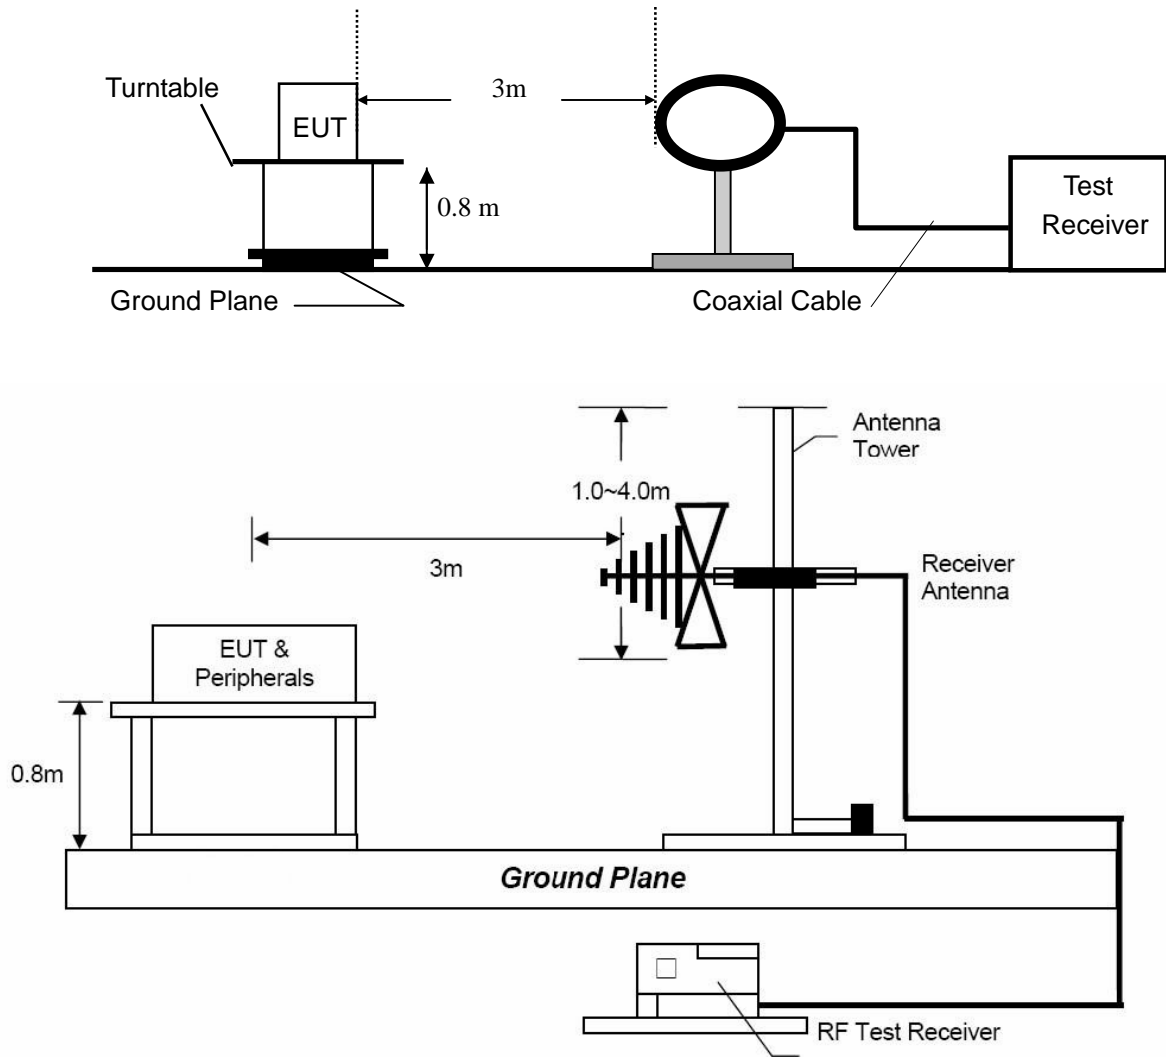

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

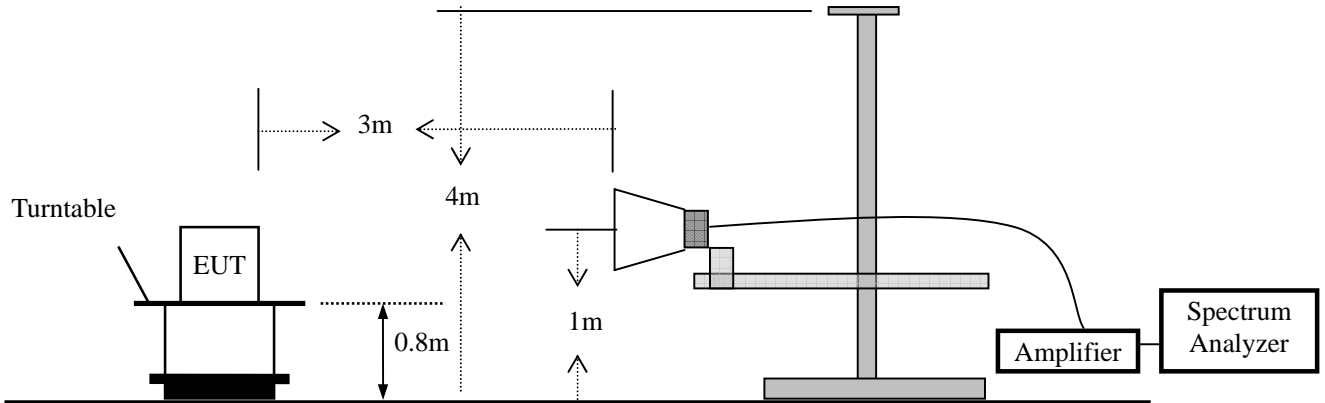

8.2 Measurement Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

For 30MHz to 1GHz:

Set the spectrum analyzer as: RBW=120kHz, VBW=300kHz, Detector=Quasi-Peak

For Above 1GHz:

Set the spectrum analyzer as: RBW=1MHz, VBW=3MHz, Detector=Peak.

Set the spectrum analyzer as: RBW=1MHz, VBW=10Hz, Detector=Peak.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark :
- (1) Emission level (dB) $\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.



8.4 Measurement Results

Integral Antenna

Test Mode: 802.11b(the worst case)
 Frequency Range: Below 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance
 Test Date : March 20, 2015


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
179.3798	H	32.49	43.50	-11.01	QP
232.7298	H	27.70	46.00	-18.30	QP
466.5000	H	31.61	46.00	-14.39	QP
550.4499	H	33.56	46.00	-12.44	QP
633.3400	H	34.66	46.00	-11.34	QP
834.1299	H	34.85	46.00	-11.15	QP

30.9695	V	21.79	40.00	-18.21	QP
179.3797	V	26.79	43.50	-16.71	QP
500.4499	V	33.10	46.00	-12.90	QP
633.3400	V	34.24	46.00	-11.76	QP
780.7798	V	34.08	46.00	-11.92	QP
901.0597	V	35.01	46.00	-10.99	QP

- Note:**
- (1) Emission Level= Reading Level + Factor
 - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (3) Measurement uncertainty : ±3.4dB
 - (4) Loop antenna used for the emission below 30MHz.
 - (5) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.


Horizontal

80.0 dBuV/m

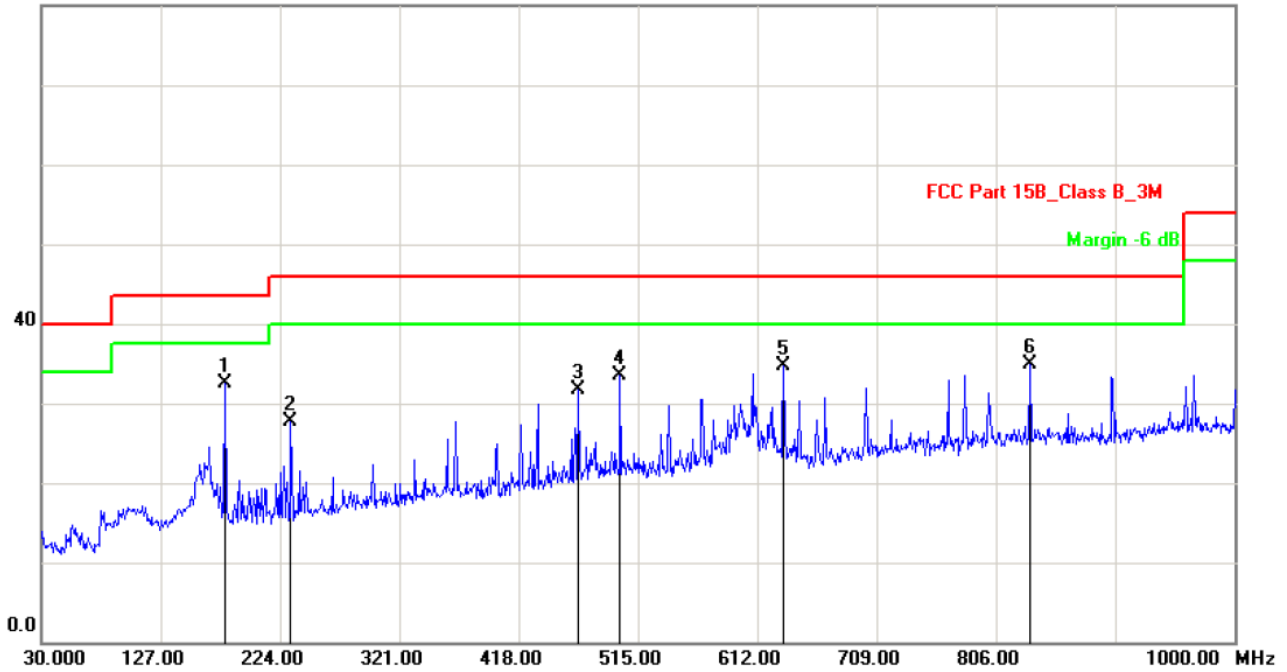

Vertical

80.0 dBuV/m

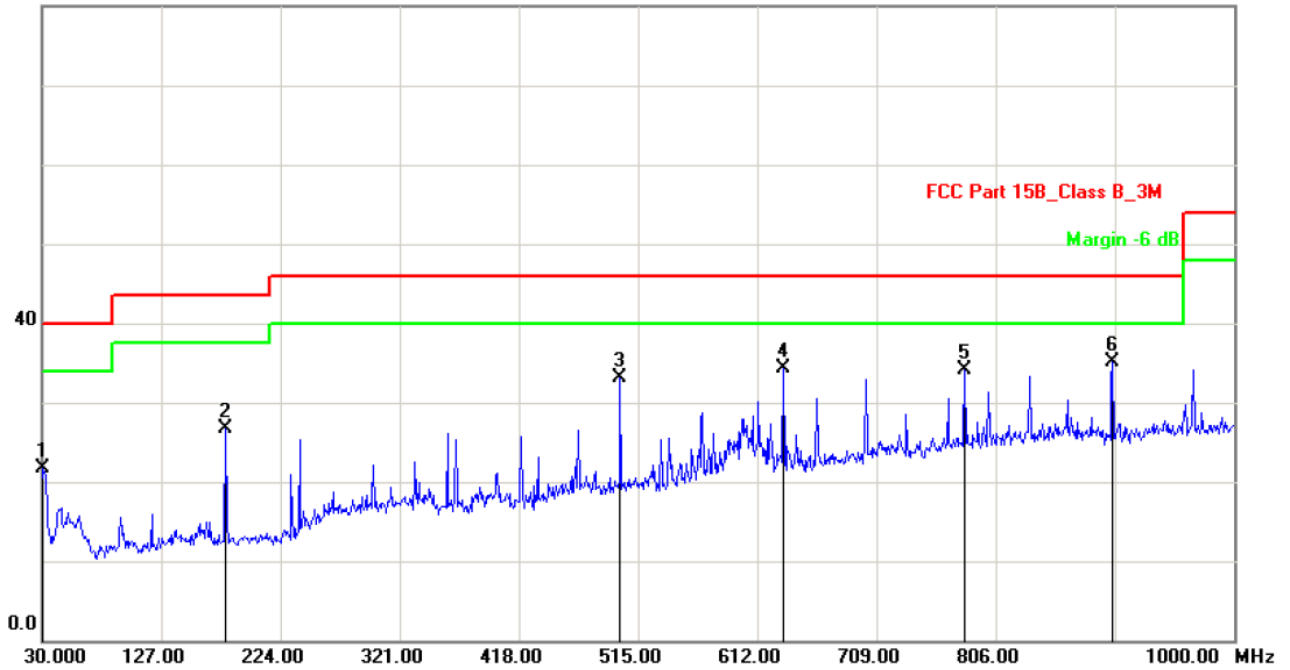



Test Mode: 802.11b Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	55.62	41.37	74.00	54.00	-18.38	-12.63
7236	V	56.50	42.42	74.00	54.00	-17.50	-11.58

4824	H	52.52	39.20	74.00	54.00	-21.48	-14.80
7236	H	52.30	36.60	74.00	54.00	-21.70	-17.40

Operation Mode: TX Mode (Mid)							
4874	V	55.48	42.71	74.00	54.00	-18.52	-11.29
7311	V	53.34	40.44	74.00	54.00	-20.66	-13.56

4874	H	55.15	41.19	74.00	54.00	-18.85	-12.81
7311	H	55.22	40.40	74.00	54.00	-18.78	-13.60

Operation Mode: TX Mode (High)							
4924	V	55.66	39.66	74.00	54.00	-18.34	-14.34
7386	V	52.79	41.18	74.00	54.00	-21.21	-12.82

4924	H	51.36	41.40	74.00	54.00	-22.64	-12.60
7386	H	51.28	41.77	74.00	54.00	-22.72	-12.23

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11g Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	57.93	45.52	74.00	54.00	-16.07	-8.48
7236	V	54.83	43.73	74.00	54.00	-19.17	-10.27

4824	H	56.95	42.17	74.00	54.00	-17.05	-11.83
7236	H	55.33	43.68	74.00	54.00	-18.67	-10.32

Operation Mode: TX Mode (Mid)							
4874	V	52.30	40.39	74.00	54.00	-21.70	-13.61
7311	V	55.66	43.96	74.00	54.00	-18.34	-10.04

4874	H	52.19	40.12	74.00	54.00	-21.81	-13.88
7311	H	54.60	42.80	74.00	54.00	-19.40	-11.20

Operation Mode: TX Mode (High)							
4924	V	57.45	44.38	74.00	54.00	-16.55	-9.62
7386	V	53.52	46.93	74.00	54.00	-20.48	-7.07

4924	H	55.44	42.75	74.00	54.00	-18.56	-11.25
7386	H	54.88	45.64	74.00	54.00	-19.12	-8.36

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amtplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11n(HT20) Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	51.32	42.66	74.00	54.00	-22.68	-11.34
7236	V	54.88	45.14	74.00	54.00	-19.12	-8.86

4824	H	58.77	48.32	74.00	54.00	-15.23	-5.68
7236	H	55.19	49.36	74.00	54.00	-18.81	-4.64

Operation Mode: TX Mode (Mid)							
4874	V	51.55	43.12	74.00	54.00	-22.45	-10.88
7311	V	55.83	46.76	74.00	54.00	-18.17	-7.24

4874	H	51.42	43.66	74.00	54.00	-22.58	-10.34
7311	H	52.32	41.56	74.00	54.00	-21.68	-12.44

Operation Mode: TX Mode (High)							
4924	V	52.25	43.38	74.00	54.00	-21.75	-10.62
7386	V	52.52	42.26	74.00	54.00	-21.48	-11.74

4924	H	52.39	44.12	74.00	54.00	-21.61	-9.88
7386	H	50.20	42.19	74.00	54.00	-23.80	-11.81

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11n(HT40) Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4844	V	49.69	38.03	74.00	54.00	-24.31	-15.97
7266	V	54.20	45.46	74.00	54.00	-19.80	-8.54

4844	H	48.14	43.69	74.00	54.00	-25.86	-10.31
7266	H	48.51	39.68	74.00	54.00	-25.49	-14.32

Operation Mode: TX Mode (Mid)							
4874	V	46.58	38.15	74.00	54.00	-27.42	-15.85
7311	V	48.92	40.85	74.00	54.00	-25.08	-13.15

4874	H	46.45	38.69	74.00	54.00	-27.55	-15.31
7311	H	49.41	41.65	74.00	54.00	-24.59	-12.35

Operation Mode: TX Mode (High)							
4904	V	49.95	38.08	74.00	54.00	-24.05	-15.92
7356	V	48.36	39.10	74.00	54.00	-25.64	-14.90

4904	H	48.09	38.82	74.00	54.00	-25.91	-15.18
7356	H	48.04	39.03	74.00	54.00	-25.96	-14.97

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Frequency Range: Above 1GHz Test Date : March 20, 2015
 Test Result: PASS Temperature : 22 °C
 Measured Distance: 3m Humidity : 48 %
 Test By: Sance

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11a							
Operation Mode: TX Mode (Low)							
11490	V	55.65	43.02	74.00	54.00	-18.35	-10.98

11490	H	57.20	42.66	74.00	54.00	-16.80	-11.34

Operation Mode: TX Mode (Mid)							
11570	V	55.34	41.48	74.00	54.00	-18.66	-12.52

11570	H	59.10	41.23	74.00	54.00	-14.90	-12.77

Operation Mode: TX Mode (High)							
11650	V	52.55	41.16	74.00	54.00	-21.45	-12.84

11650	H	51.67	41.59	74.00	54.00	-22.33	-12.41

Test Mode: 802.11ac(VHT20)							
Operation Mode: TX Mode (Low)							
11490	V	50.43	40.00	74.00	54.00	-23.57	-14.00

11490	H	52.42	40.15	74.00	54.00	-21.58	-13.85

Operation Mode: TX Mode (Mid)							
11570	V	48.59	37.00	74.00	54.00	-25.41	-17.00

11570	H	47.18	38.49	74.00	54.00	-26.82	-15.51

Operation Mode: TX Mode (High)							
11650	V	49.60	38.70	74.00	54.00	-24.40	-15.30

11650	H	47.22	40.51	74.00	54.00	-26.78	-13.49



Frequency Range: Above 1GHz Test Date : March 20, 2015
 Test Result: PASS Temperature : 22 °C
 Measured Distance: 3m Humidity : 48 %
 Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Test mode: 802.11ac(VHT40)							
Operation Mode: TX Mode (Low)							
11510	V	48.46	34.41	74.00	54.00	-25.54	-19.59

11510	H	49.79	37.56	74.00	54.00	-24.21	-16.44

Operation Mode: TX Mode (High)							
11590	V	45.22	35.78	74.00	54.00	-28.78	-18.22

11590	H	47.26	35.40	74.00	54.00	-26.74	-18.60

Test mode: 802.11ac(VHT80)							
Operation Mode: TX Mode							
11550	V	46.59	39.62	74.00	54.00	-27.41	-14.38

11550	H	46.77	37.21	74.00	54.00	-27.23	-16.79

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.

PCB Antenna

Test Mode: 802.11b(the worst case)
 Frequency Range: Below 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance
 Test Date : March 20, 2015


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBUV)	Limit 3m (dBUV/m)	Margin (dB)	Note
195.8700	H	32.67	43.50	-10.83	QP
408.3000	H	36.49	46.00	-9.51	QP
455.8300	H	34.43	46.00	-11.57	QP

30.9700	V	32.96	40.00	-7.04	QP
118.2700	V	33.59	43.50	-9.91	QP
891.3600	V	39.76	46.00	-6.24	QP
928.2200	V	40.48	46.00	-5.52	QP
945.6800	V	41.17	46.00	-4.83	QP
963.1400	V	42.16	54.00	-11.84	QP

- Note:**
- (1) Emission Level= Reading Level + Factor
 - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (3) Measurement uncertainty : ±3.4dB
 - (4) Loop antenna used for the emission below 30MHz.
 - (5) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.


Horizontal

80.0 dBuV/m

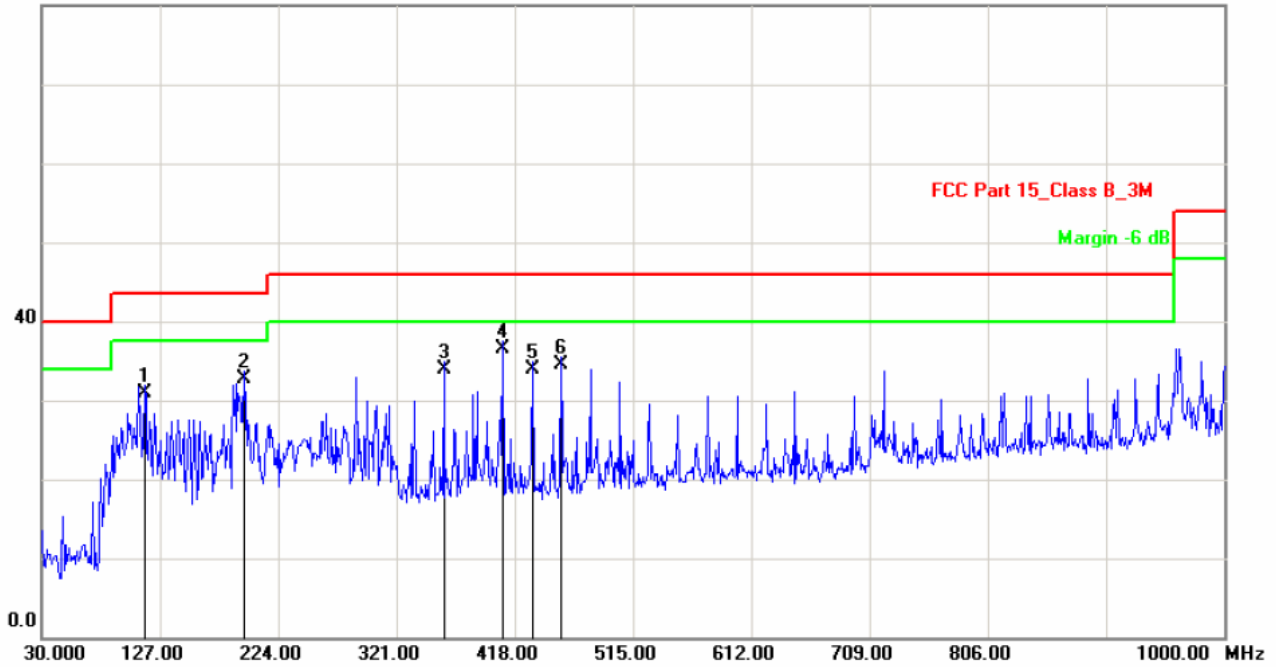

Vertical

80.0 dBuV/m

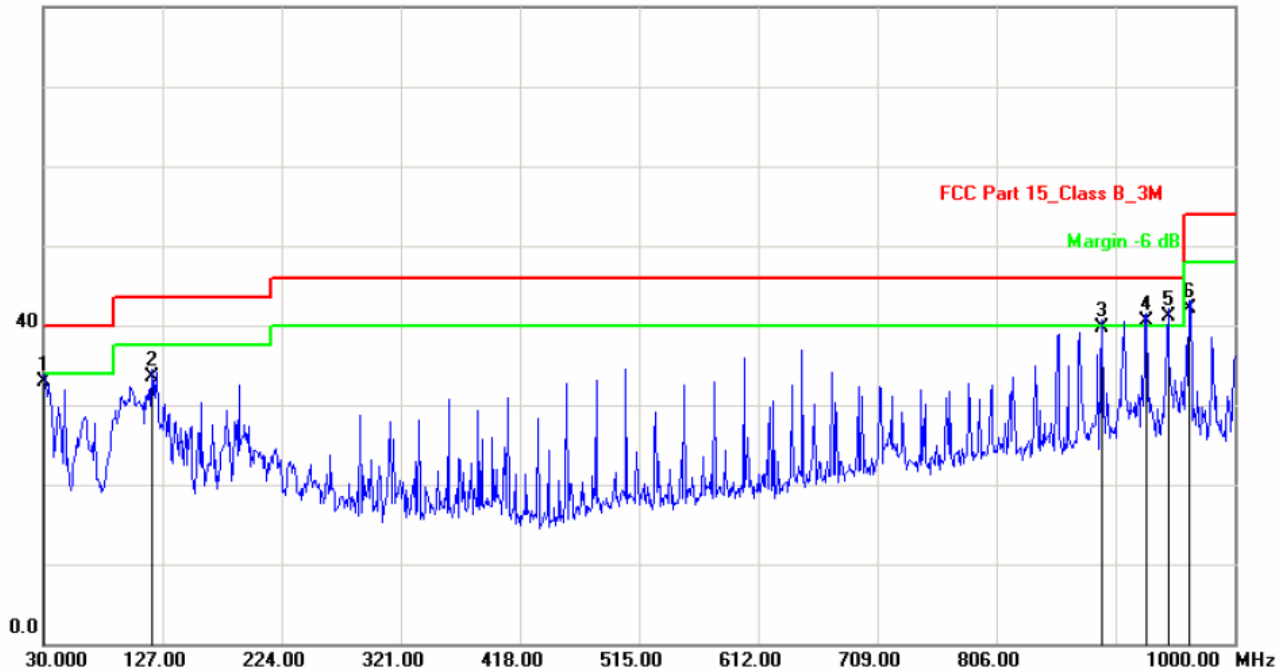



Test Mode: 802.11b Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	52.13	42.32	74.00	54.00	-21.87	-11.68
7236	V	55.43	43.67	74.00	54.00	-18.57	-10.33

4824	H	54.04	45.56	74.00	54.00	-19.96	-8.44
7236	H	55.73	46.33	74.00	54.00	-18.27	-7.67

Operation Mode: TX Mode (Mid)							
4874	V	47.71	41.85	74.00	54.00	-26.29	-12.15
7311	V	48.84	42.60	74.00	54.00	-25.16	-11.40

4874	H	45.96	40.95	74.00	54.00	-28.04	-13.05
7311	H	45.82	40.63	74.00	54.00	-28.18	-13.37

Operation Mode: TX Mode (High)							
4924	V	52.27	45.38	74.00	54.00	-21.73	-8.62
7386	V	51.92	43.09	74.00	54.00	-22.08	-10.91

4924	H	55.05	45.20	74.00	54.00	-18.95	-8.80
7386	H	52.28	43.02	74.00	54.00	-21.73	-8.62

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11g Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	45.84	40.07	74.00	54.00	-28.16	-13.93
7236	V	45.02	40.93	74.00	54.00	-28.98	-13.07

4824	H	44.61	41.23	74.00	54.00	-29.39	-12.77
7236	H	48.12	40.47	74.00	54.00	-25.88	-13.53

Operation Mode: TX Mode (Mid)							
4874	V	45.25	40.44	74.00	54.00	-28.75	-13.56
7311	V	42.50	42.07	74.00	54.00	-31.50	-11.93

4874	H	52.80	45.68	74.00	54.00	-21.20	-8.32
7311	H	52.63	45.18	74.00	54.00	-21.37	-8.82

Operation Mode: TX Mode (High)							
4924	V	47.04	40.50	74.00	54.00	-26.96	-13.50
7386	V	48.06	41.60	74.00	54.00	-25.94	-12.40

4924	H	45.43	41.95	74.00	54.00	-28.57	-12.05
7386	H	45.87	40.02	74.00	54.00	-28.13	-13.98

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amtplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11n(HT20) Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	53.59	43.70	74.00	54.00	-20.41	-10.30
7236	V	52.03	43.52	74.00	54.00	-21.97	-10.48

4824	H	45.85	39.39	74.00	54.00	-28.15	-14.61
7236	H	45.32	40.94	74.00	54.00	-28.68	-13.06

Operation Mode: TX Mode (Mid)							
4874	V	54.07	42.90	74.00	54.00	-19.93	-11.10
7311	V	51.88	43.83	74.00	54.00	-22.12	-10.17

4874	H	52.99	43.66	74.00	54.00	-21.01	-10.34
7311	H	53.11	45.31	74.00	54.00	-20.89	-8.69

Operation Mode: TX Mode (High)							
4924	V	49.33	42.23	74.00	54.00	-24.67	-11.77
7386	V	52.54	42.24	74.00	54.00	-21.46	-11.76

4924	H	48.64	41.12	74.00	54.00	-25.36	-12.88
7386	H	52.68	42.21	74.00	54.00	-21.32	-11.79

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11n(HT40) Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4844	V	54.09	48.45	74.00	54.00	-19.91	-5.55
7266	V	55.81	47.61	74.00	54.00	-18.19	-6.39

4844	H	53.93	46.70	74.00	54.00	-20.07	-7.30
7266	H	54.80	48.69	74.00	54.00	-19.20	-5.31

Operation Mode: TX Mode (Mid)							
4874	V	50.32	43.40	74.00	54.00	-23.68	-10.60
7311	V	50.91	48.33	74.00	54.00	-23.09	-5.67

4874	H	52.35	40.37	74.00	54.00	-21.65	-13.63
7311	H	51.90	40.24	74.00	54.00	-22.10	-13.76

Operation Mode: TX Mode (High)							
4904	V	51.43	43.64	74.00	54.00	-22.57	-10.36
7356	V	52.13	45.03	74.00	54.00	-21.87	-8.97

4904	H	52.38	40.26	74.00	54.00	-21.62	-13.74
7356	H	52.00	42.18	74.00	54.00	-22.00	-11.82

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Frequency Range: Above 1GHz Test Date : March 20, 2015
 Test Result: PASS Temperature : 22 °C
 Measured Distance: 3m Humidity : 48 %
 Test By: Sance

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11a							
Operation Mode: TX Mode (Low)							
11490	V	52.33	38.56	74.00	54.00	-21.67	-15.44

11490	H	55.64	37.40	74.00	54.00	-18.36	-16.60

Operation Mode: TX Mode (Mid)							
11570	V	55.57	36.93	74.00	54.00	-18.43	-17.07

11570	H	54.38	38.59	74.00	54.00	-19.62	-15.41

Operation Mode: TX Mode (High)							
11650	V	53.51	32.32	74.00	54.00	-20.49	-21.68

11650	H	57.43	37.51	74.00	54.00	-16.57	-16.49

Test Mode: 802.11ac(VHT20)							
Operation Mode: TX Mode (Low)							
11490	V	52.49	36.40	74.00	54.00	-21.51	-17.60

11490	H	52.05	36.32	74.00	54.00	-21.95	-17.68

Operation Mode: TX Mode (Mid)							
11570	V	51.19	35.11	74.00	54.00	-22.81	-18.89

11570	H	50.67	35.16	74.00	54.00	-23.33	-18.84

Operation Mode: TX Mode (High)							
11650	V	50.10	37.93	74.00	54.00	-23.90	-16.07

11650	H	50.89	36.19	74.00	54.00	-23.11	-17.81



Frequency Range: Above 1GHz Test Date : March 20, 2015
 Test Result: PASS Temperature : 22 °C
 Measured Distance: 3m Humidity : 48 %
 Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Test mode: 802.11ac(VHT40)							
Operation Mode: TX Mode (Low)							
11510	V	50.27	34.55	74.00	54.00	-23.73	-19.45

11510	H	50.41	35.40	74.00	54.00	-23.59	-18.60

Operation Mode: TX Mode (High)							
11590	V	52.46	34.82	74.00	54.00	-21.54	-19.18

11590	H	50.08	34.62	74.00	54.00	-23.92	-19.38

Test mode: 802.11ac(VHT80)							
Operation Mode: TX Mode							
11550	V	50.55	36.43	74.00	54.00	-23.45	-17.57

11550	H	50.41	37.17	74.00	54.00	-23.59	-16.83

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.

FPC Antenna

Test Mode: 802.11b(the worst case)
 Frequency Range: Below 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance
 Test Date : March 20, 2015


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
359.8000	H	37.80	46.00	-8.20	QP
466.5000	H	34.80	46.00	-11.20	QP
533.4299	H	35.50	46.00	-10.50	QP
850.6200	H	36.60	46.00	-9.40	QP

64.9200	V	30.90	40.00	-9.10	QP
127.9700	V	31.50	43.50	-12.00	QP
236.6100	V	30.90	46.00	-15.10	QP
359.8000	V	32.50	46.00	-13.50	QP
466.5000	V	38.40	46.00	-7.60	QP
533.4299	V	35.70	46.00	-10.30	QP

- Note:**
- (1) Emission Level= Reading Level + Factor
 - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (3) Measurement uncertainty : ±3.4dB
 - (4) Loop antenna used for the emission below 30MHz.
 - (5) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.


Horizontal

80.0 dBuV/m

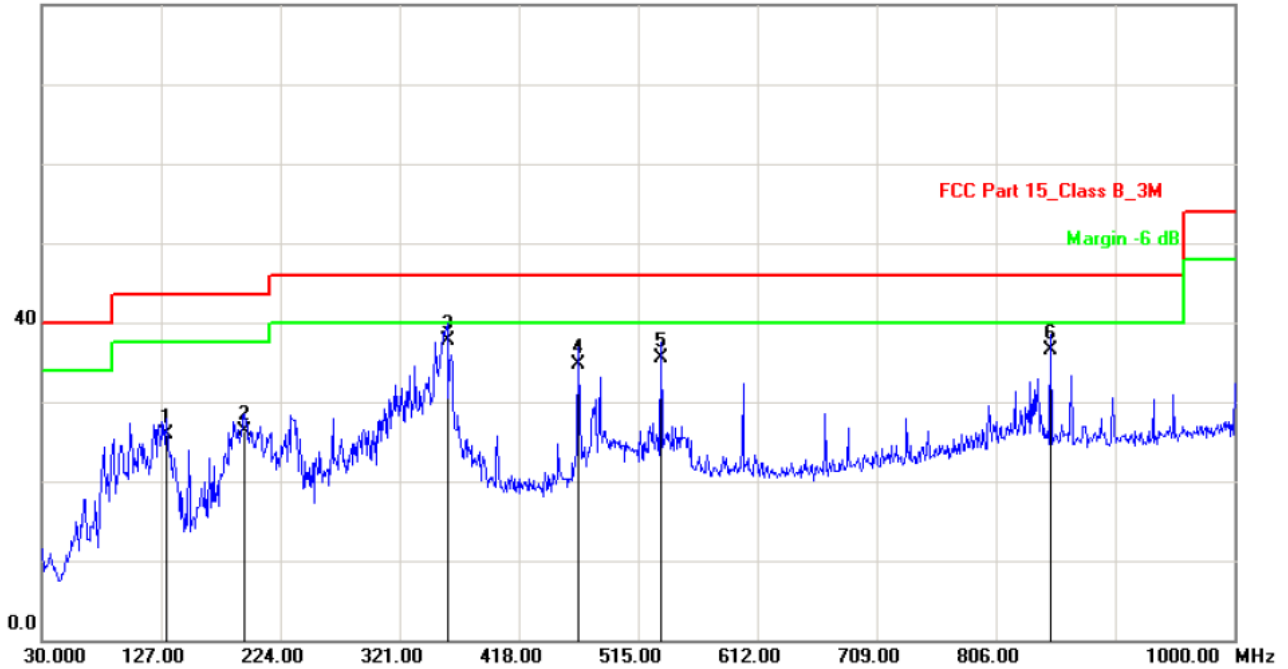

Vertical

80.0 dBuV/m

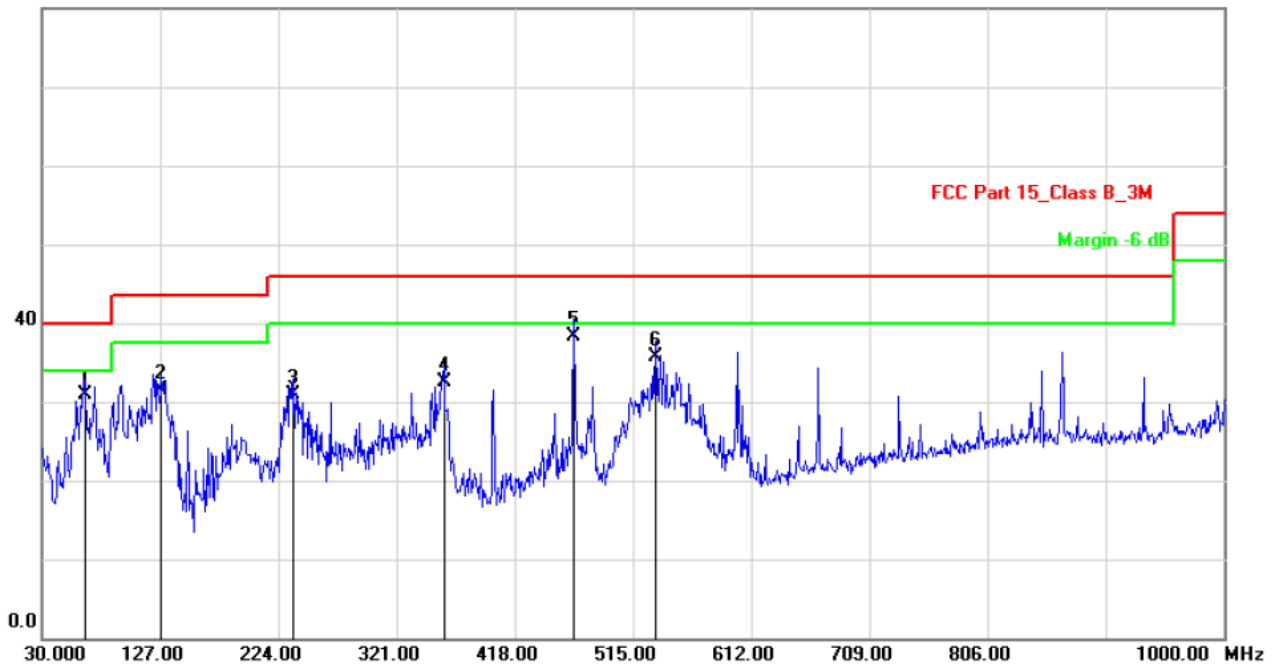



Test Mode: 802.11b Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	52.00	39.56	74.00	54.00	-22.00	-14.44
7236	V	55.45	40.19	74.00	54.00	-18.55	-13.81

4824	H	57.34	43.22	74.00	54.00	-16.66	-10.78
7236	H	54.20	42.65	74.00	54.00	-19.80	-11.35

Operation Mode: TX Mode (Mid)							
4874	V	55.40	47.37	74.00	54.00	-18.60	-6.63
7311	V	55.36	46.95	74.00	54.00	-18.64	-7.05

4874	H	56.51	48.10	74.00	54.00	-17.49	-5.90
7311	H	55.04	47.11	74.00	54.00	-18.96	-6.89

Operation Mode: TX Mode (High)							
4924	V	51.24	37.80	74.00	54.00	-22.76	-16.20
7386	V	52.95	40.04	74.00	54.00	-21.05	-13.96

4924	H	52.95	39.95	74.00	54.00	-21.05	-14.05
7386	H	50.96	39.06	74.00	54.00	-23.04	-14.94

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11g Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	57.77	41.46	74.00	54.00	-16.23	-12.54
7236	V	58.38	43.61	74.00	54.00	-15.62	-10.39

4824	H	55.27	43.84	74.00	54.00	-18.73	-10.16
7236	H	55.20	49.61	74.00	54.00	-18.80	-4.39

Operation Mode: TX Mode (Mid)							
4874	V	51.23	40.61	74.00	54.00	-22.77	-13.39
7311	V	51.47	40.82	74.00	54.00	-22.53	-13.18

4874	H	50.89	37.48	74.00	54.00	-23.11	-16.52
7311	H	50.14	40.78	74.00	54.00	-23.86	-13.22

Operation Mode: TX Mode (High)							
4924	V	49.80	36.25	74.00	54.00	-24.20	-17.75
7386	V	50.29	38.91	74.00	54.00	-23.71	-15.09

4924	H	51.34	36.89	74.00	54.00	-22.66	-17.11
7386	H	50.31	38.97	74.00	54.00	-23.69	-15.03

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amtplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11n(HT20) Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4824	V	52.19	39.34	74.00	54.00	-21.81	-14.66
7236	V	50.51	38.63	74.00	54.00	-23.49	-15.37

4824	H	51.89	39.36	74.00	54.00	-22.11	-14.64
7236	H	52.18	38.60	74.00	54.00	-21.82	-15.40

Operation Mode: TX Mode (Mid)							
4874	V	52.99	36.25	74.00	54.00	-21.01	-17.75
7311	V	51.29	37.85	74.00	54.00	-22.71	-16.15

4874	H	52.80	37.38	74.00	54.00	-21.20	-16.62
7311	H	54.53	40.76	74.00	54.00	-19.47	-13.24

Operation Mode: TX Mode (High)							
4924	V	54.29	40.94	74.00	54.00	-19.71	-13.06
7386	V	52.49	39.27	74.00	54.00	-21.51	-14.73

4924	H	51.14	39.60	74.00	54.00	-22.86	-14.40
7386	H	50.57	38.11	74.00	54.00	-23.43	-15.89

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Test Mode: 802.11n(HT40) Test Date : March 20, 2015
 Frequency Range: Above 1GHz Temperature : 22 °C
 Test Result: PASS Humidity : 48 %
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)							
4844	V	52.43	40.59	74.00	54.00	-21.57	-13.41
7266	V	55.25	40.66	74.00	54.00	-18.75	-13.34

4844	H	52.55	40.73	74.00	54.00	-21.45	-13.27
7266	H	52.91	40.61	74.00	54.00	-21.09	-13.39

Operation Mode: TX Mode (Mid)							
4874	V	54.45	39.42	74.00	54.00	-19.55	-14.58
7311	V	50.38	38.15	74.00	54.00	-23.62	-15.85

4874	H	52.19	41.20	74.00	54.00	-21.81	-12.80
7311	H	52.47	40.35	74.00	54.00	-21.53	-13.65

Operation Mode: TX Mode (High)							
4904	V	53.43	36.77	74.00	54.00	-20.57	-17.23
7356	V	51.13	36.19	74.00	54.00	-22.87	-17.81

4904	H	53.34	34.20	74.00	54.00	-20.66	-19.80
7356	H	53.35	38.16	74.00	54.00	-20.65	-15.84

- Not e:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.



Frequency Range: Above 1GHz Test Date : March 20, 2015
 Test Result: PASS Temperature : 22 °C
 Measured Distance: 3m Humidity : 48 %
 Test By: Sance

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	H/V	PK	AV	PK	AV	PK	AV
Test Mode: 802.11a							
Operation Mode: TX Mode (Low)							
11490	V	52.18	38.20	74.00	54.00	-21.82	-15.80

11490	H	51.47	41.62	74.00	54.00	-22.53	-12.38

Operation Mode: TX Mode (Mid)							
11570	V	52.60	40.10	74.00	54.00	-21.40	-13.90

11570	H	52.65	42.37	74.00	54.00	-21.35	-11.63

Operation Mode: TX Mode (High)							
11650	V	50.11	42.22	74.00	54.00	-23.89	-11.78

11650	H	51.79	42.38	74.00	54.00	-22.21	-11.62

Test Mode: 802.11ac(VHT20)							
Operation Mode: TX Mode (Low)							
11490	V	52.88	42.02	74.00	54.00	-21.12	-11.98

11490	H	52.40	40.04	74.00	54.00	-21.60	-13.96

Operation Mode: TX Mode (Mid)							
11570	V	51.10	41.51	74.00	54.00	-22.90	-12.49

11570	H	50.71	42.36	74.00	54.00	-23.29	-11.64

Operation Mode: TX Mode (High)							
11650	V	50.10	40.93	74.00	54.00	-23.90	-13.07

11650	H	50.89	40.19	74.00	54.00	-23.11	-13.81



Frequency Range: Above 1GHz Test Date : March 20, 2015
 Test Result: PASS Temperature : 22 °C
 Measured Distance: 3m Humidity : 48 %
 Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
Test mode: 802.11ac(VHT40)							
Operation Mode: TX Mode (Low)							
11510	V	48.46	34.33	74.00	54.00	-25.54	-19.67

11510	H	48.82	35.97	74.00	54.00	-25.18	-18.03

Operation Mode: TX Mode (High)							
11590	V	45.03	34.78	74.00	54.00	-28.97	-19.22

11590	H	48.11	34.03	74.00	54.00	-25.89	-19.97

Test mode: 802.11ac(VHT80)							
Operation Mode: TX Mode							
11550	V	48.62	36.17	74.00	54.00	-25.38	-17.83

11550	H	48.26	37.23	74.00	54.00	-25.74	-16.77

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ±3.7dB.
 - (6) Horn antenna used for the emission over 1000MHz.

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is PCB antenna (permanent attached antenna) that no antenna other than that furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 0dBi, So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 24, 2014	Nov. 23, 2015
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 27, 2014	Nov. 26, 2015
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 08, 2014	Nov. 07, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2014	Oct.23, 2015
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 06, 2014	Nov. 05, 2015
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2014	Oct.10, 2015
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	Apr. 09, 2014	Apr. 08, 2015
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 04, 2014	Nov. 03, 2015
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 08, 2014	Nov. 07, 2015

---End of report---