

# TEST REPORT

**Product Name** : WIFI module  
**Brand Mark** : Fn-link  
**Model No.** : H132A-S  
**Report Number** : BLA-EMC-202204-A1202  
**FCC ID** : 2AATL-H132AS  
**Date of Sample Receipt** : 2022/4/7  
**Date of Test** : 2022/4/7 to 2022/6/2  
**Date of Issue** : 2022/6/2  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**FN-LINK TECHNOLOGY LIMITED**

**No.8, Litong Road, Liuyang Economic & Technical Development Zone,  
Changsha, Hunan, CHINA**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**

**Building C, No. 107, Shihuan Road, Shiyang Sub-District, Baoan District,  
Shenzhen, Guangdong Province, China**

**TEL: +86-755-23059481**

Compiled by:

*Jozu*

Approved by:

*Bluezhong*

Review by:

*Sueels*

Date:

2022/6/2



**REPORT REVISE RECORD**

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	2022/6/2	Original

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>5</b>
<b>2</b>	<b>GENERAL INFORMATION .....</b>	<b>6</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T. ....</b>	<b>6</b>
<b>4</b>	<b>BLOCK DIAGRAM OF EUT CONNECTION .....</b>	<b>6</b>
<b>5</b>	<b>TEST ENVIRONMENT .....</b>	<b>7</b>
<b>6</b>	<b>TEST MODE .....</b>	<b>7</b>
<b>7</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>8</b>	<b>DESCRIPTION OF SUPPORT UNIT .....</b>	<b>8</b>
<b>9</b>	<b>LABORATORY LOCATION .....</b>	<b>8</b>
<b>10</b>	<b>TEST INSTRUMENTS LIST .....</b>	<b>9</b>
<b>11</b>	<b>POWER SPECTRUM DENSITY .....</b>	<b>12</b>
11.1	LIMITS .....	12
11.2	BLOCK DIAGRAM OF TEST SETUP .....	12
11.3	TEST DATA .....	12
<b>12</b>	<b>CONDUCTED PEAK OUTPUT POWER .....</b>	<b>13</b>
12.1	LIMITS .....	13
12.2	BLOCK DIAGRAM OF TEST SETUP .....	13
12.3	TEST DATA .....	14
<b>13</b>	<b>CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) .....</b>	<b>15</b>
13.1	LIMITS .....	15
13.2	BLOCK DIAGRAM OF TEST SETUP .....	15
13.3	PROCEDURE .....	15
13.4	TEST DATA .....	17
<b>14</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>19</b>
14.1	CONCLUSION .....	19
<b>15</b>	<b>RADIATED SPURIOUS EMISSIONS .....</b>	<b>21</b>
15.1	LIMITS .....	21
15.2	BLOCK DIAGRAM OF TEST SETUP .....	22
15.3	PROCEDURE .....	22

15.4	TEST DATA .....	24
<b>18</b>	<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....</b>	<b>32</b>
18.1	LIMITS .....	32
18.2	BLOCK DIAGRAM OF TEST SETUP .....	33
18.3	PROCEDURE .....	33
18.4	TEST DATA .....	35
<b>19</b>	<b>CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>39</b>
19.1	LIMITS .....	39
19.2	BLOCK DIAGRAM OF TEST SETUP .....	39
19.3	TEST DATA .....	40
<b>20</b>	<b>CONDUCTED BAND EDGES MEASUREMENT .....</b>	<b>41</b>
20.1	LIMITS .....	41
20.2	BLOCK DIAGRAM OF TEST SETUP .....	41
20.3	TEST DATA .....	42
<b>21</b>	<b>MINIMUM 6DB BANDWIDTH .....</b>	<b>43</b>
21.1	LIMITS .....	43
21.2	BLOCK DIAGRAM OF TEST SETUP .....	43
21.3	TEST DATA .....	43
<b>22</b>	<b>APPENDIX .....</b>	<b>44</b>
22.1	MAXIMUM CONDUCTED OUTPUT POWER .....	44
22.2	-6dB BANDWIDTH .....	51
22.3	OCCUPIED CHANNEL BANDWIDTH .....	58
22.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	65
22.5	BAND EDGE .....	72
22.6	CONDUCTED RF SPURIOUS EMISSION .....	81
	<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>94</b>
	<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>96</b>

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1) & 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass


## 2 GENERAL INFORMATION

<b>Applicant</b>	FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Manufacturer</b>	FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Factory</b>	FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Product Name</b>	WIFI module
<b>Test Model No.</b>	H132A-S

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V1.0
<b>Software Version</b>	V1.0
<b>Operation Frequency:</b>	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
<b>Modulation Type:</b>	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
<b>Channel Spacing:</b>	5MHz
<b>Number of Channels:</b>	802.11b/g/n(HT20):11 802.11n(HT40):7
<b>Antenna Type:</b>	External Antenna
<b>Antenna Gain:</b>	4dBi

## 4 BLOCK DIAGRAM OF EUT CONNECTION

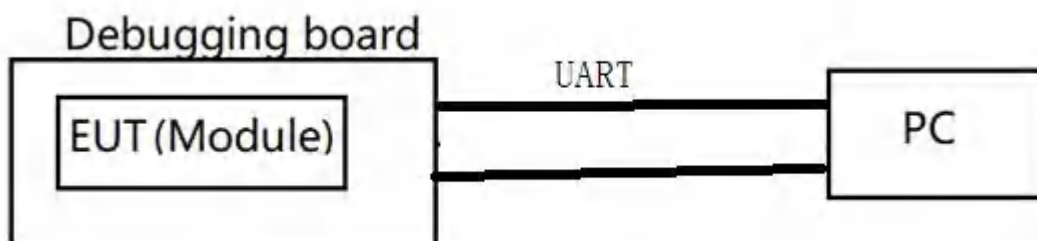

## 5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.3V

## 6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle ≥ 98%)
Remark: Only the data of the worst mode() would be recorded in this report.	

## 7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

## 8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

## 9 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co., Ltd.  
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,  
China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.



## 10 TEST INSTRUMENTS LIST

Test Equipment Of Power Spectrum Density					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

**Test Equipment Of Radiated Emissions which fall in the restricted bands**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

**Test Equipment Of Conducted Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
-----------	--------------	-------	-----	----------	---------

Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

**Test Equipment Of Conducted Band Edges Measurement**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

**Test Equipment Of Minimum 6dB Bandwidth**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022


## 11 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 11.1 LIMITS

**Limit:**  $\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

### 11.2 BLOCK DIAGRAM OF TEST SETUP

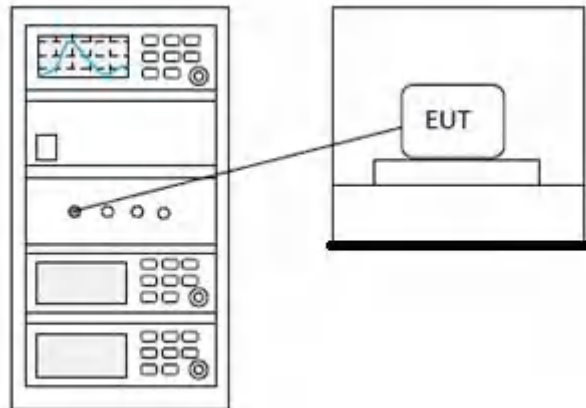

### 11.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**


## 12 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 12.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 12.2 BLOCK DIAGRAM OF TEST SETUP

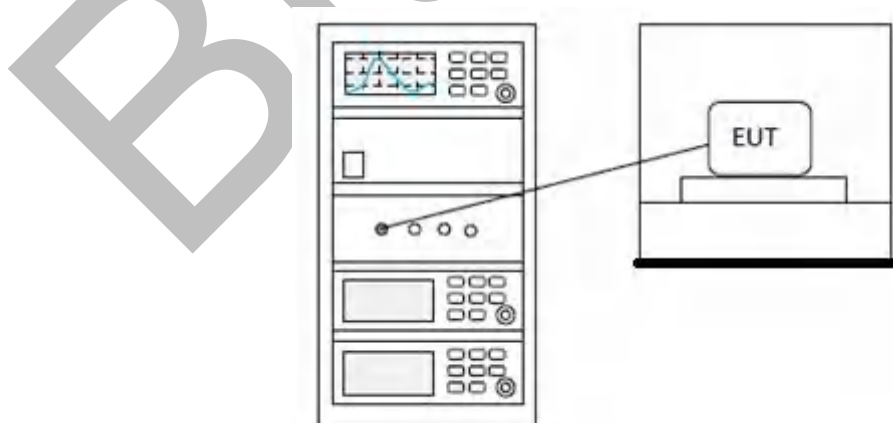

### 12.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia

### 13 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

#### 13.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 13.2 BLOCK DIAGRAM OF TEST SETUP

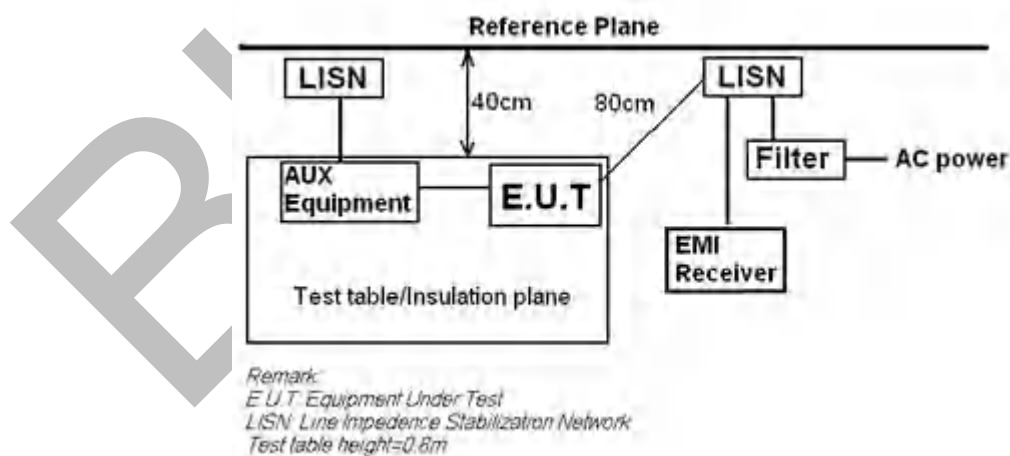

#### 13.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia



### 13.4 TEST DATA

[TestMode: TX]; [Line: Neutral] ;[Power:AC120V/60Hz]

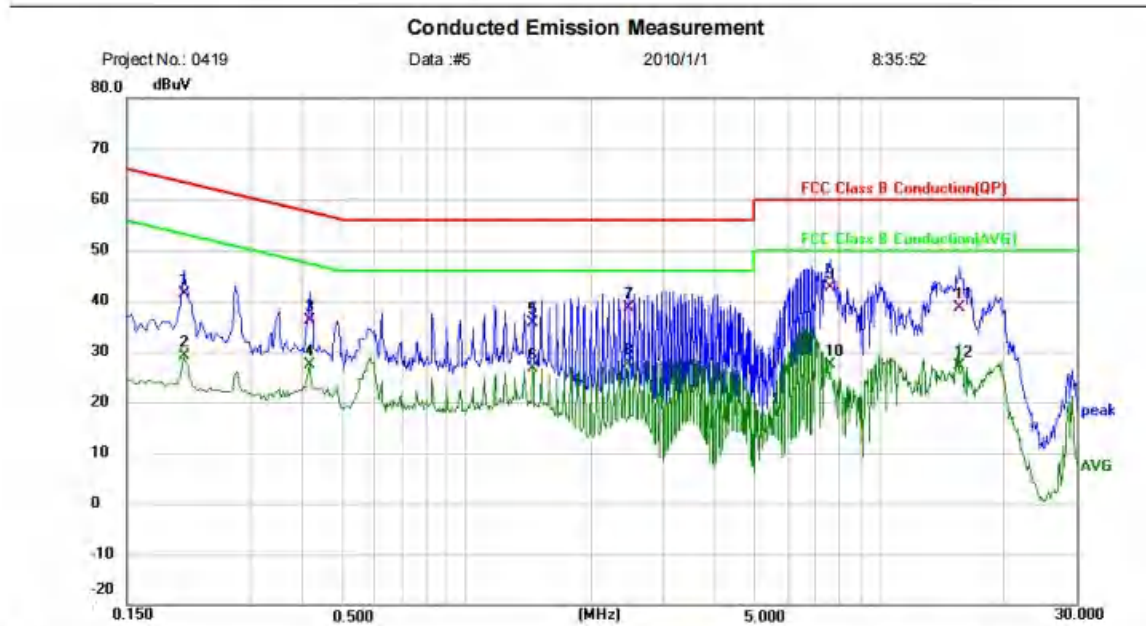

Project No.: 0419      Data :#5      2010/1/1      8:35:52

Site      Phase: **N**      Temperature: (C)

Limit: FCC Class B Conduction(QP)      Power:      Humidity: %RH

EUT: WIFI module

M/N: H132A-S

Mode: 2.4GWIFI mode

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2060	31.17	10.17	41.34	63.37	-22.03	QP	
2		0.2060	19.06	10.17	29.23	53.37	-24.14	AVG	
3		0.4140	26.44	9.78	36.22	57.57	-21.35	QP	
4		0.4140	17.50	9.78	27.28	47.57	-20.29	AVG	
5		1.4460	25.84	9.85	35.69	56.00	-20.31	QP	
6		1.4460	16.67	9.85	26.52	46.00	-19.48	AVG	
7	*	2.4820	28.82	9.87	38.69	56.00	-17.31	QP	
8		2.4820	17.72	9.87	27.59	46.00	-18.41	AVG	
9		7.5940	32.46	10.05	42.51	60.00	-17.49	QP	
10		7.5940	17.27	10.05	27.32	50.00	-22.68	AVG	
11		15.6780	28.23	10.31	38.54	60.00	-21.46	QP	
12		15.6780	16.75	10.31	27.06	50.00	-22.94	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX]; [Line: Line] ;[Power:AC120V/60Hz]

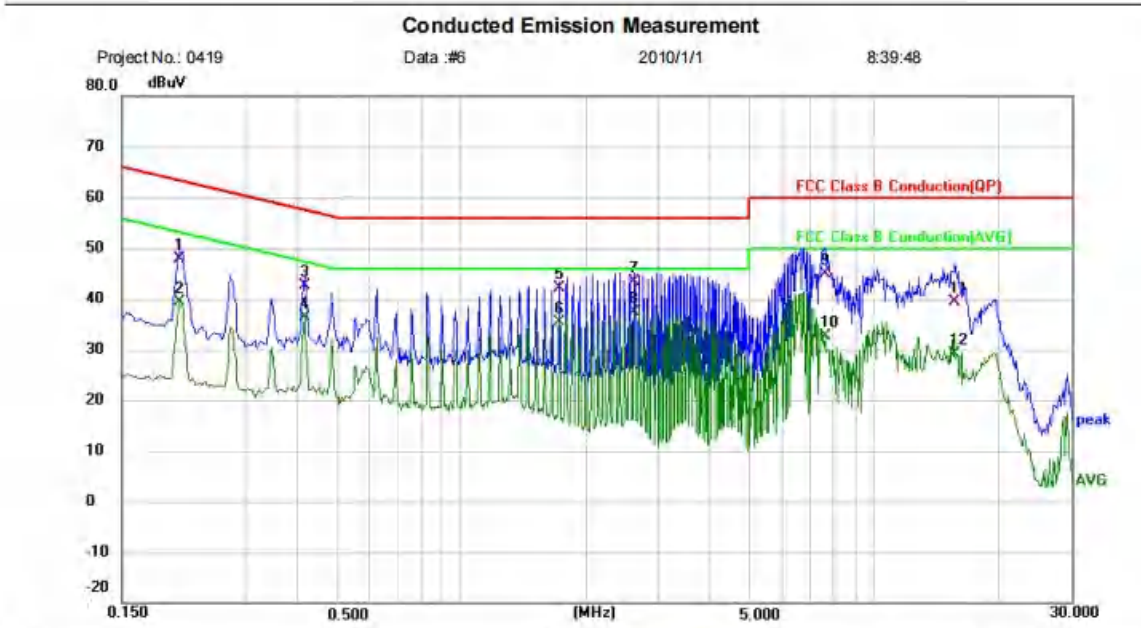

Site: \_\_\_\_\_ Phase: **L1** Temperature: (C)  
 Limit: FCC Class B Conduction(QP) Power: \_\_\_\_\_ Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI mode  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2060	37.73	10.25	47.98	63.37	-15.39	QP	
2		0.2060	29.07	10.25	39.32	53.37	-14.05	AVG	
3		0.4140	32.73	9.85	42.58	57.57	-14.99	QP	
4		0.4140	26.45	9.85	36.30	47.57	-11.27	AVG	
5		1.7260	32.19	9.93	42.12	56.00	-13.88	QP	
6		1.7260	25.40	9.93	35.33	46.00	-10.67	AVG	
7		2.6220	33.40	9.96	43.36	56.00	-12.64	QP	
8	*	2.6220	27.30	9.96	37.26	46.00	-8.74	AVG	
9		7.5900	34.71	10.10	44.81	60.00	-15.19	QP	
10		7.5900	22.49	10.10	32.59	50.00	-17.41	AVG	
11		15.6780	29.05	10.35	39.40	60.00	-20.60	QP	
12		15.6780	18.85	10.35	29.20	50.00	-20.80	AVG	

\*:Maximum data x:Over limit l:over margin

(Reference Only)

**Test Result: Pass**

## 14 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


### 14.1 CONCLUSION


Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4dBi.

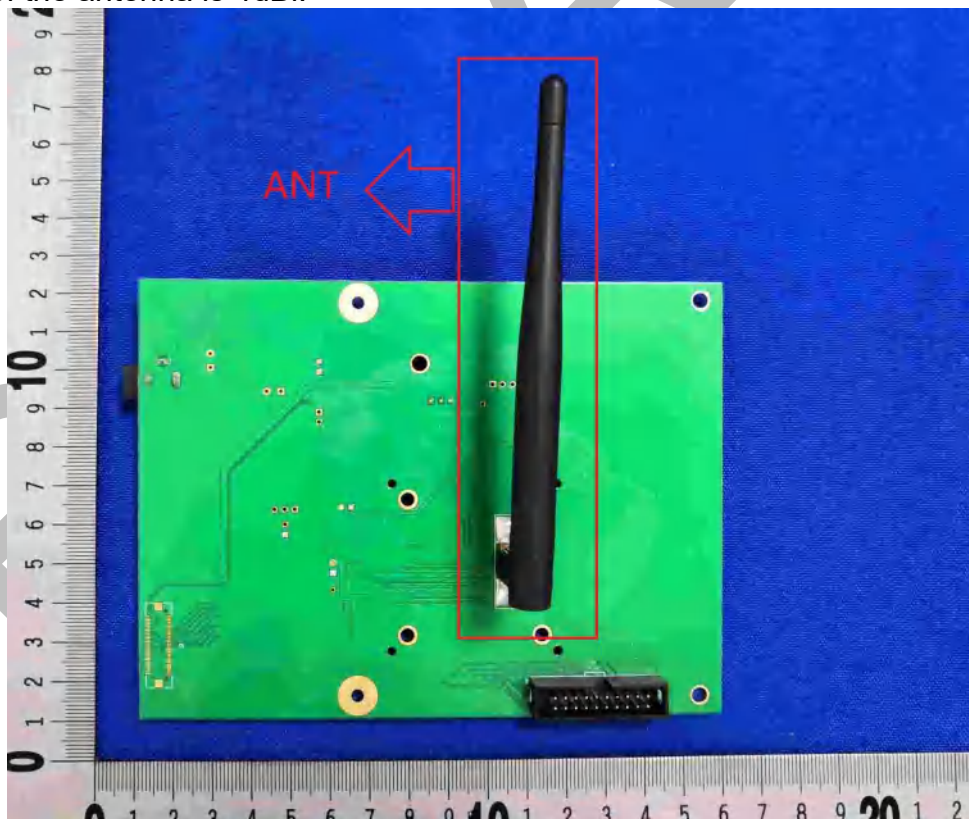

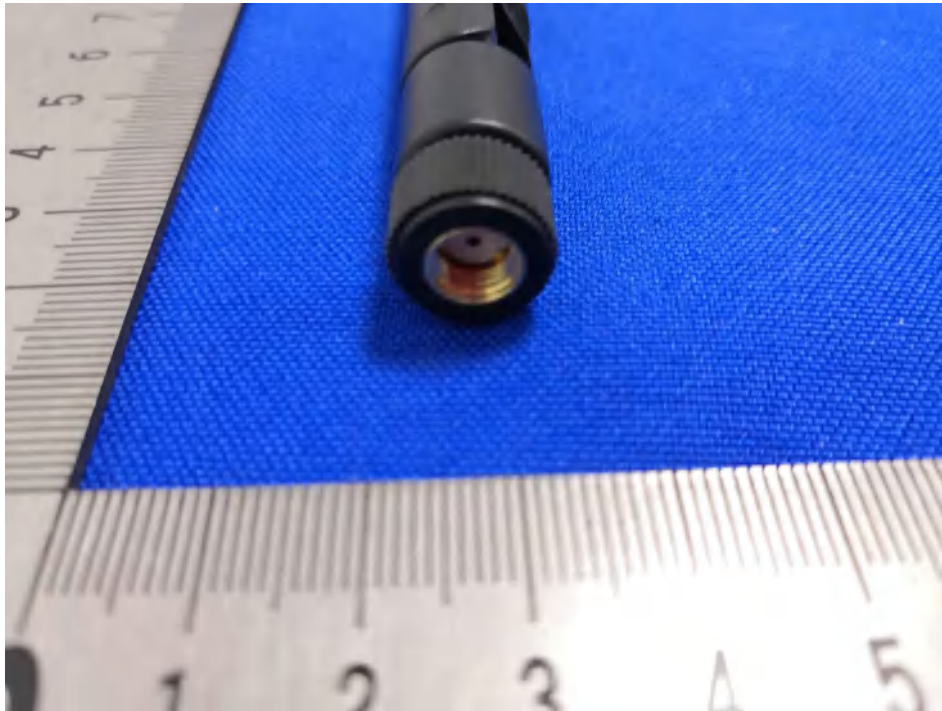

## 15 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25℃
<b>Humidity</b>	60%

### 15.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 15.2 BLOCK DIAGRAM OF TEST SETUP

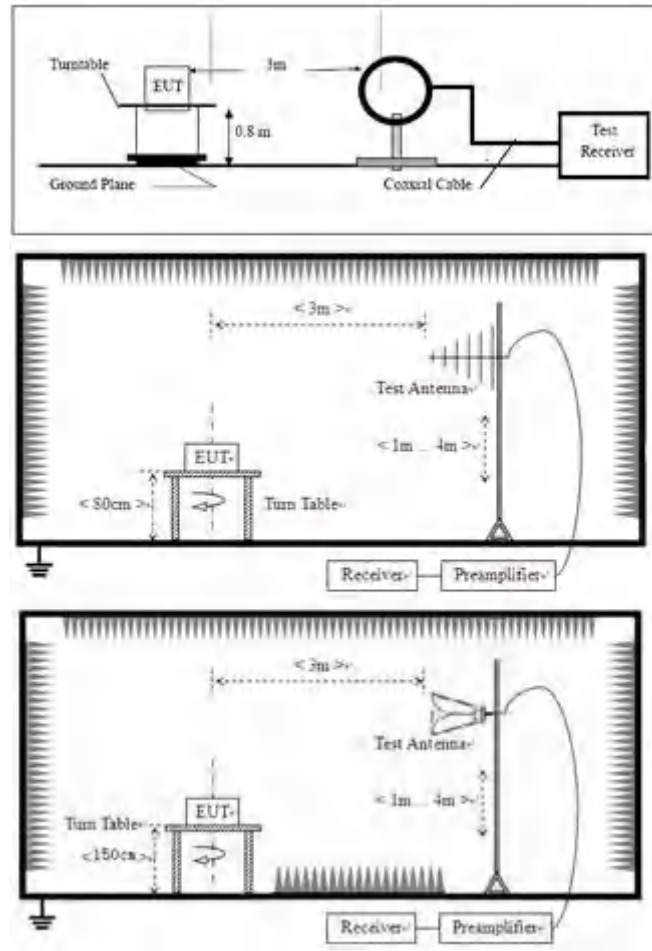

## 15.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

### 15.4 TEST DATA

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab ( RE #1 )	Project: BLA-EMC-202204-A12
EUT: WIFI module	Test Engineer: York
M/N: H132A-S	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2022-04-18 21:53:28

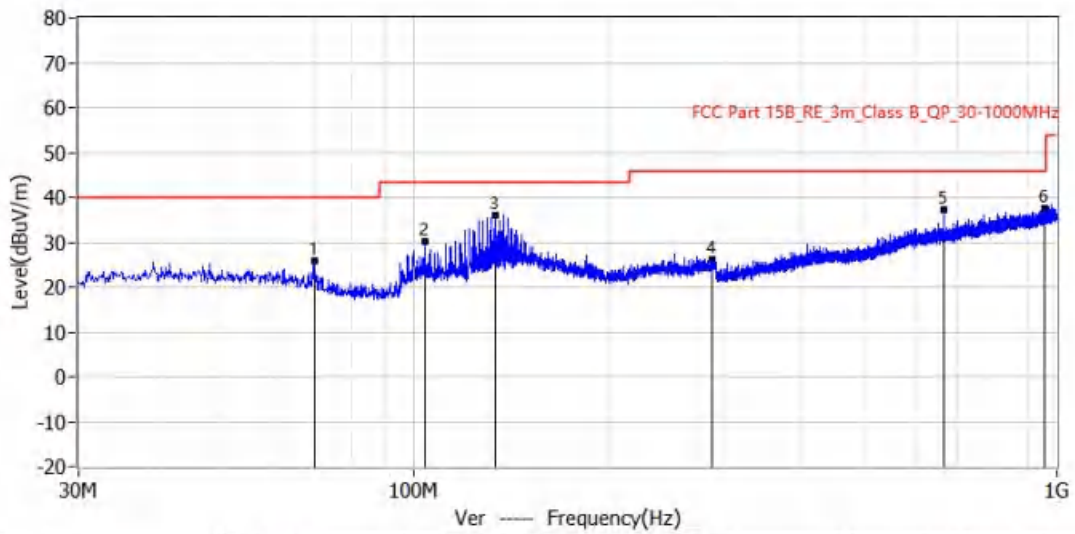


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	69.770MHz	40.0	26.0	-14.0	4.5	21.5	QP	Ver	100.0	274.0
2*	103.599MHz	43.5	30.2	-13.3	9.2	21.0	QP	Ver	100.0	271.0
3*	133.790MHz	43.5	36.1	-7.4	12.7	23.4	QP	Ver	100.0	271.0
4*	290.930MHz	46.0	26.2	-19.8	2.4	23.8	QP	Ver	100.0	271.0
5*	665.593MHz	46.0	37.1	-8.9	5.4	31.7	QP	Ver	100.0	296.0
6*	958.048MHz	46.0	37.4	-8.6	1.7	35.7	QP	Ver	100.0	249.0

**Test Result: Pass**



[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab ( RE #1 )	Project: BLA-EMC-202204-A12
EUT: WIFI module	Test Engineer: York
M/N: H132A-S	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2022-04-18 21:55:40

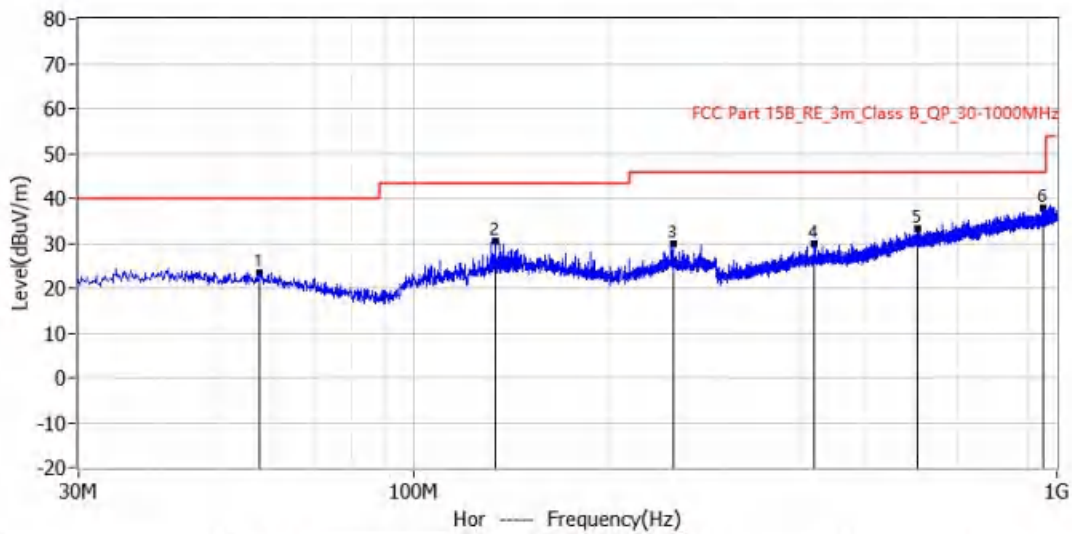


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	57.403MHz	40.0	23.5	-16.5	-0.1	23.6	QP	Hor	100.0	197.0
2*	133.790MHz	43.5	30.5	-13.0	7.1	23.4	QP	Hor	100.0	230.0
3*	252.615MHz	46.0	29.8	-16.2	7.1	22.7	QP	Hor	100.0	92.0
4*	418.243MHz	46.0	30.0	-16.0	2.5	27.5	QP	Hor	100.0	92.0
5*	606.786MHz	46.0	33.3	-12.7	2.0	31.3	QP	Hor	100.0	264.0
6*	951.985MHz	46.0	37.7	-8.3	2.1	35.6	QP	Hor	100.0	17.0

**Test Result: Pass**

Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11N40 mode which it is worse case.

[TestMode: TX low channel]; [Polarity: Horizontal]

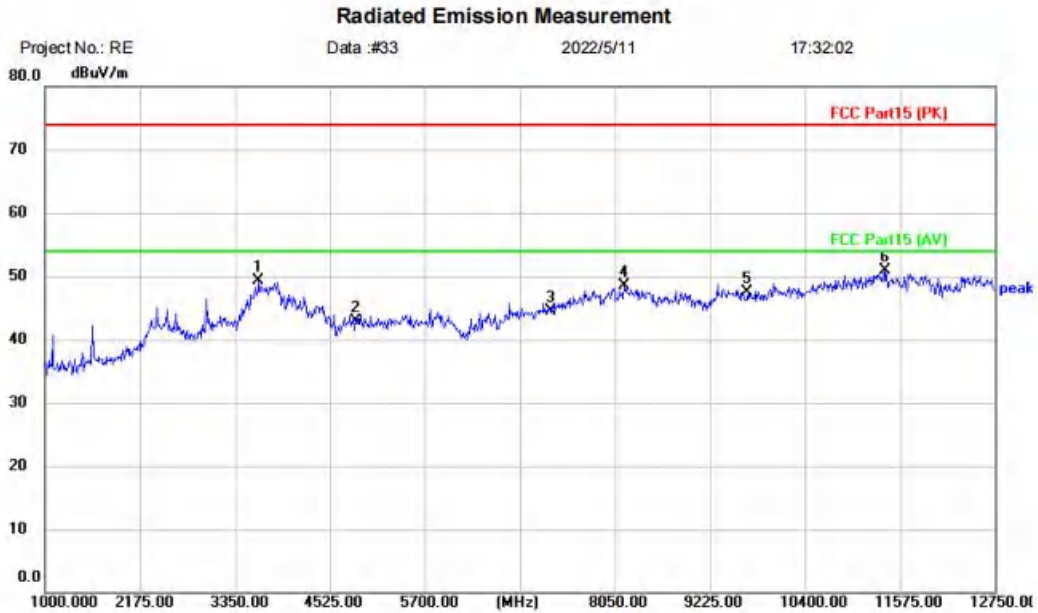

Project No.: RE      Data :#33      2022/5/11      17:32:02

Site:      Polarization: **Horizontal**      Temperature: (C)

Limit: FCC Part15 (PK)      Power:      Humidity: %RH

EUT: WIFI module

M/N: H132A-S

Mode: 2.4GWIFI-11N40-TX-L

Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3643.750	41.55	7.76	49.31	74.00	-24.69	peak	
2		4844.000	39.31	3.53	42.84	74.00	-31.16	peak	
3		7266.000	38.36	6.20	44.56	74.00	-29.44	peak	
4		8167.500	40.40	8.17	48.57	74.00	-25.43	peak	
5		9688.000	38.00	9.47	47.47	74.00	-26.53	peak	
6	*	11387.000	39.10	11.78	50.88	74.00	-23.12	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX low channel]; [Polarity: Vertical]

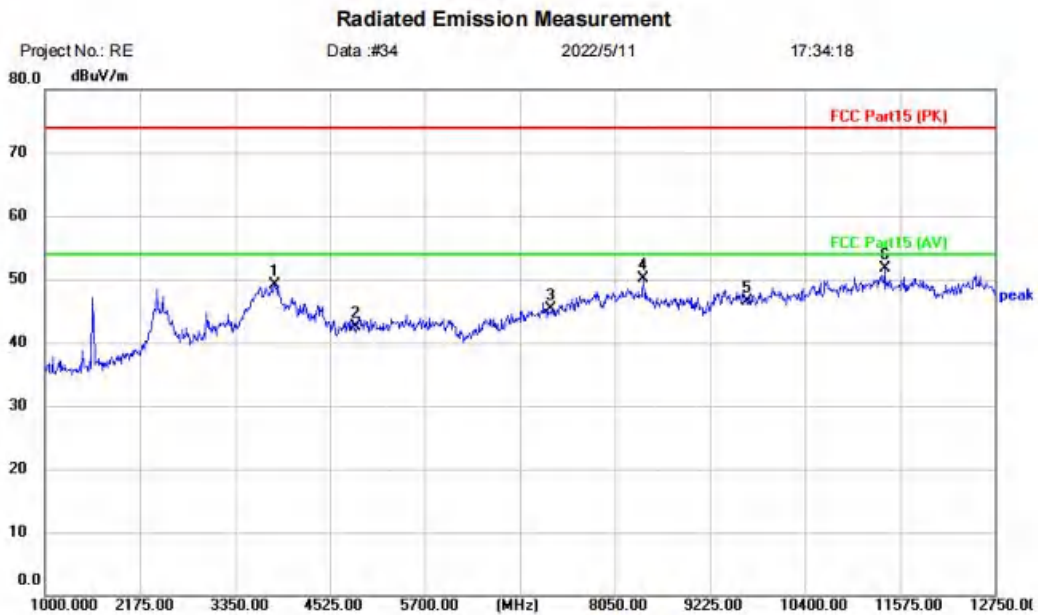

Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-L  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3843.500	42.07	7.12	49.19	74.00	-24.81	peak	
2		4844.000	39.07	3.53	42.60	74.00	-31.40	peak	
3		7266.000	39.17	6.20	45.37	74.00	-28.63	peak	
4		8402.500	41.77	8.28	50.05	74.00	-23.95	peak	
5		9688.000	36.98	9.47	46.45	74.00	-27.55	peak	
6	*	11387.000	39.91	11.78	51.69	74.00	-22.31	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX mid channel]; [Polarity: Horizontal]

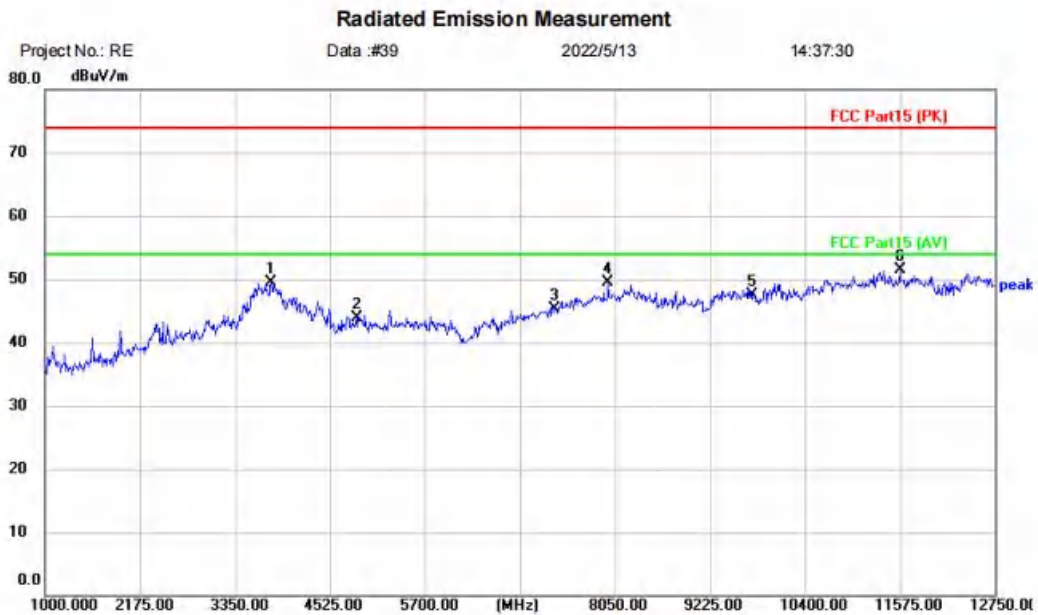

Site	Polarization: <b>Horizontal</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIFI module		
M/N: H132A-S		
Mode: 2.4GWIFI-11N40-TX-M		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3796.500	41.78	7.65	49.43	74.00	-24.57	peak	
2		4874.000	40.46	3.39	43.85	74.00	-30.15	peak	
3		7311.000	38.87	6.37	45.24	74.00	-28.76	peak	
4		7967.750	41.54	7.90	49.44	74.00	-24.56	peak	
5		9748.000	37.99	9.59	47.58	74.00	-26.42	peak	
6	*	11575.000	39.47	12.02	51.49	74.00	-22.51	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX mid channel]; [Polarity: Vertical]

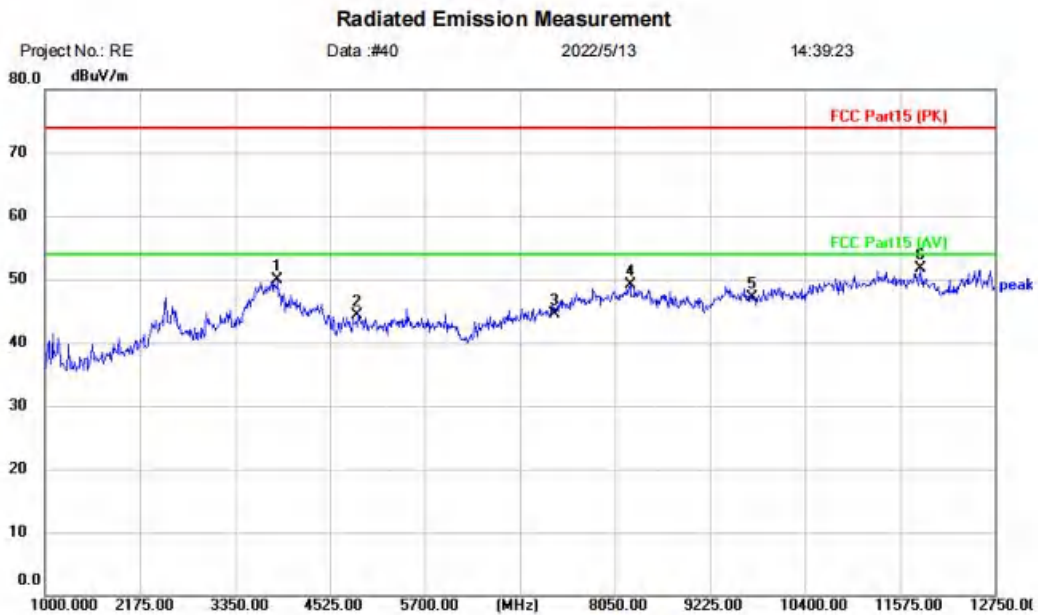

Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-M  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3878.750	43.16	6.67	49.83	74.00	-24.17	peak	
2		4874.000	41.01	3.39	44.40	74.00	-29.60	peak	
3		7311.000	38.10	6.37	44.47	74.00	-29.53	peak	
4		8238.000	40.88	8.22	49.10	74.00	-24.90	peak	
5		9748.000	37.47	9.59	47.06	74.00	-26.94	peak	
6	*	11833.500	40.12	11.50	51.62	74.00	-22.38	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Vertical]

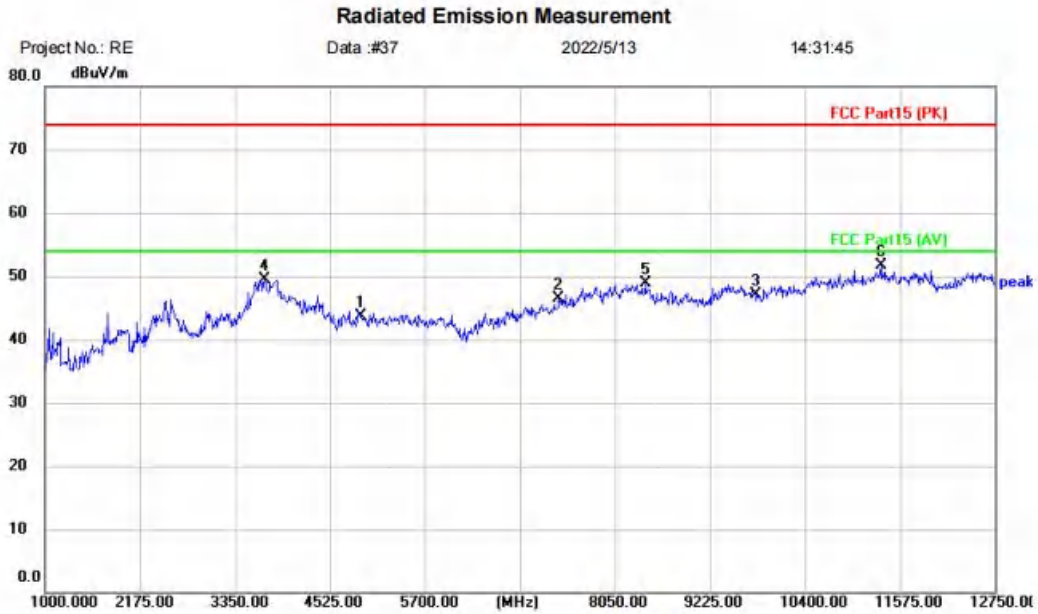

Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-H  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4904.000	40.46	3.30	43.76	74.00	-30.24	peak	
2		7356.000	39.94	6.56	46.50	74.00	-27.50	peak	
3		9808.000	37.44	9.73	47.17	74.00	-26.83	peak	
4		3714.250	41.78	7.72	49.50	74.00	-24.50	peak	
5		8426.000	40.62	8.24	48.86	74.00	-25.14	peak	
6	*	11340.000	39.86	11.85	51.71	74.00	-22.29	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Horizontal]

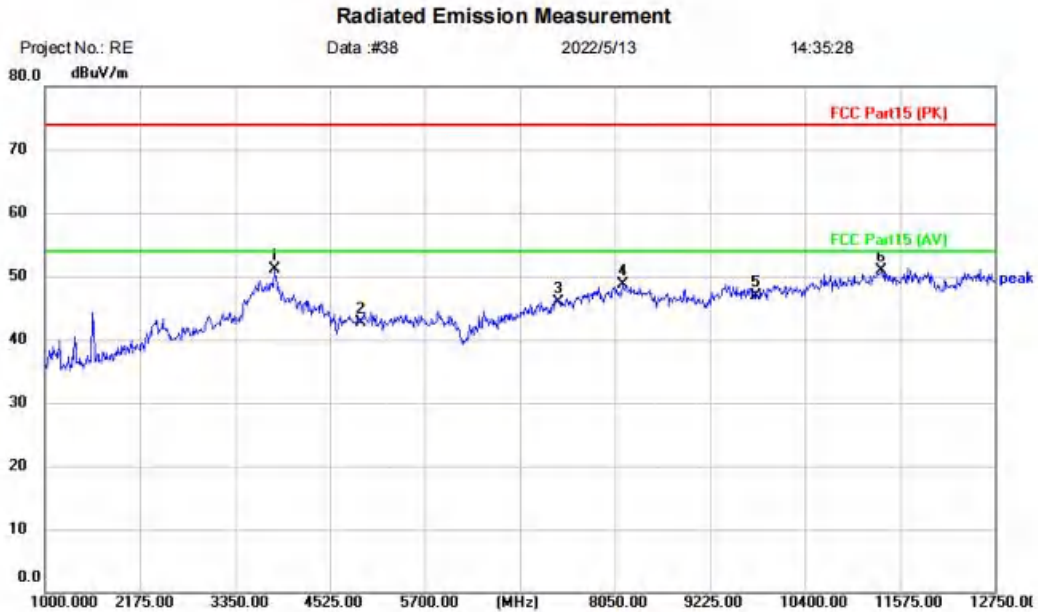

Site:      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-H  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	3843.500	43.95	7.12	51.07	74.00	-22.93	peak	
2		4904.000	39.50	3.30	42.80	74.00	-31.20	peak	
3		7356.000	39.30	6.56	45.86	74.00	-28.14	peak	
4		8144.000	40.54	8.13	48.67	74.00	-25.33	peak	
5		9808.000	37.10	9.73	46.83	74.00	-27.17	peak	
6		11351.750	39.08	11.82	50.90	74.00	-23.10	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

## 18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%


### 18.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



## 18.2 BLOCK DIAGRAM OF TEST SETUP

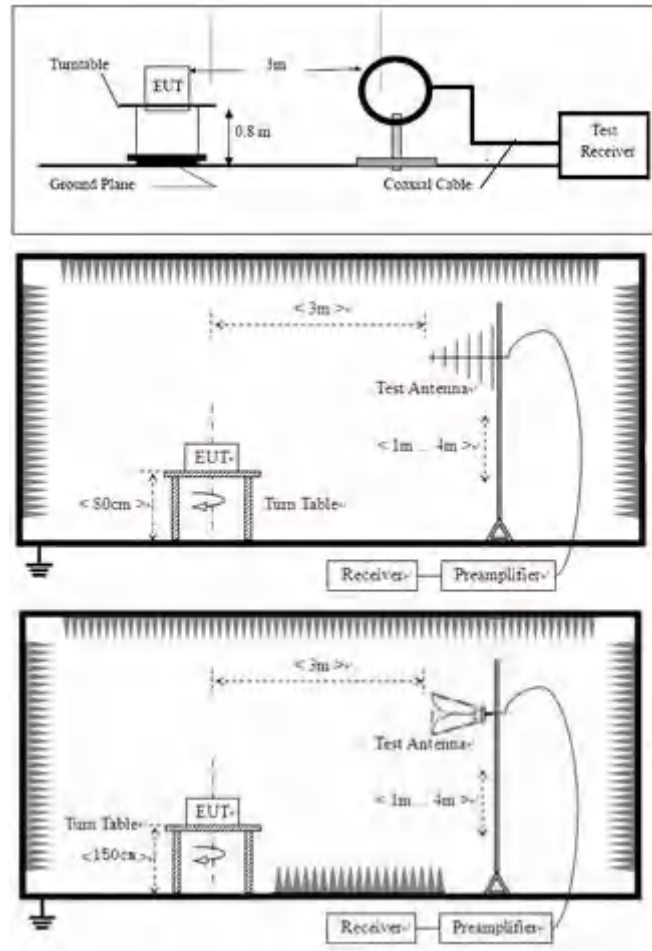

## 18.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

### 18.4 TEST DATA

Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11N40 mode which it is worse case.

[TestMode: TX low channel]; [Polarity: Vertical]

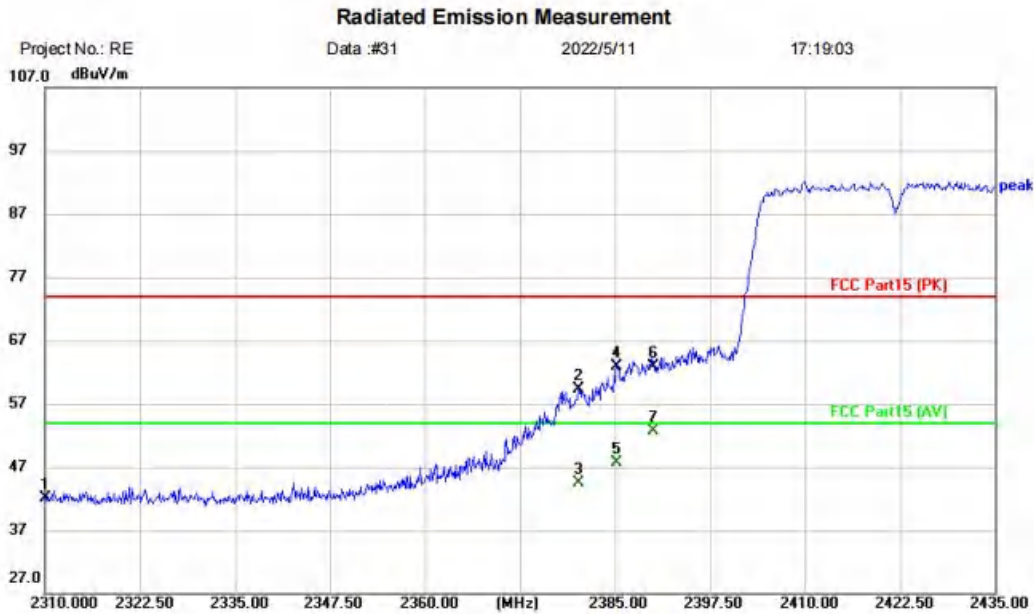

Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: WIFI module		
M/N: H132A-S		
Mode: 2.4GWIFI-11N40-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	46.06	-3.93	42.13	74.00	-31.87	peak	
2		2380.250	62.86	-3.63	59.23	74.00	-14.77	peak	
3		2380.250	48.06	-3.63	44.43	54.00	-9.57	AVG	
4		2385.250	66.50	-3.60	62.90	74.00	-11.10	peak	
5		2385.250	51.38	-3.60	47.78	54.00	-6.22	AVG	
6		2390.000	66.39	-3.58	62.81	74.00	-11.19	peak	
7	*	2390.000	56.29	-3.58	52.71	54.00	-1.29	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX low channel]; [Polarity: Horizontal]

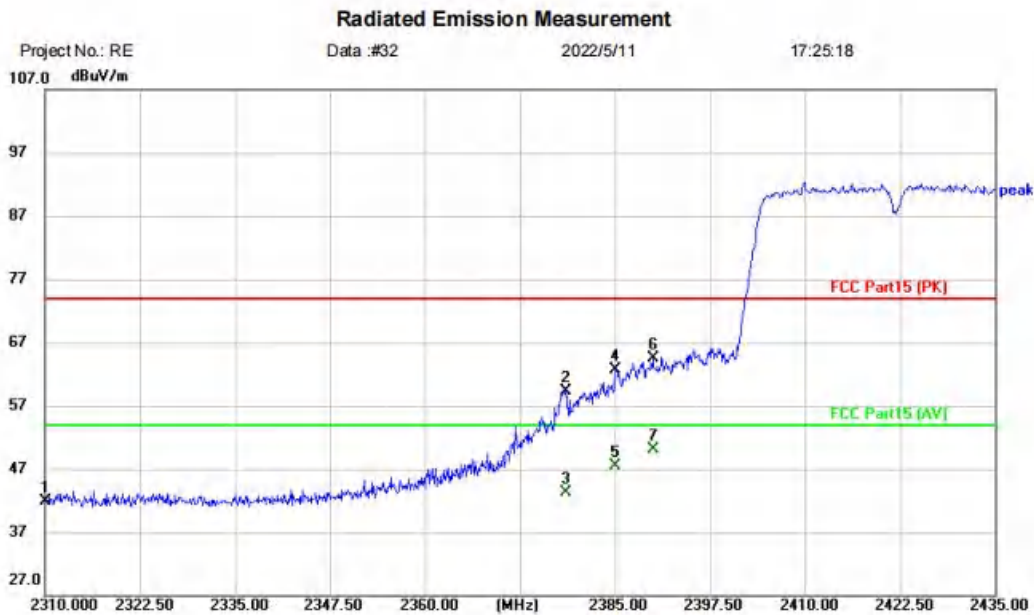

Site:      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-L  
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	45.92	-3.93	41.99	74.00	-32.01	peak	
2		2378.625	62.99	-3.63	59.36	74.00	-14.64	peak	
3		2378.625	47.03	-3.63	43.40	54.00	-10.60	AVG	
4		2385.000	66.37	-3.60	62.77	74.00	-11.23	peak	
5		2385.000	51.03	-3.60	47.43	54.00	-6.57	AVG	
6		2390.000	68.08	-3.58	64.50	74.00	-9.50	peak	
7	*	2390.000	53.70	-3.58	50.12	54.00	-3.88	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Horizontal]

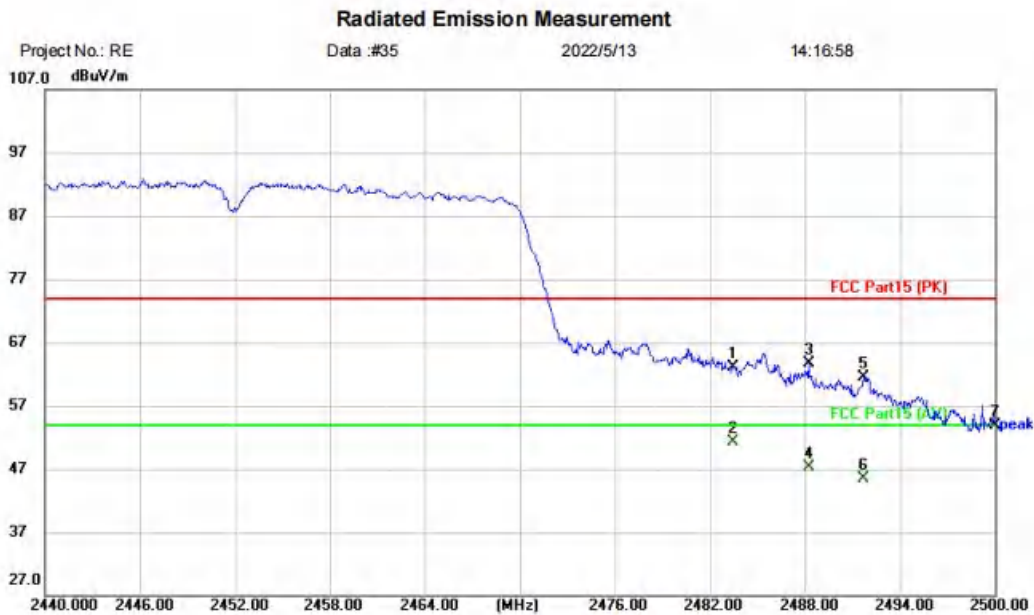

Site:      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-H  
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	66.27	-3.14	63.13	74.00	-10.87	peak	
2	*	2483.500	54.41	-3.14	51.27	54.00	-2.73	AVG	
3		2488.240	66.87	-3.13	63.74	74.00	-10.26	peak	
4		2488.240	50.45	-3.13	47.32	54.00	-6.68	AVG	
5		2491.720	64.60	-3.11	61.49	74.00	-12.51	peak	
6		2491.720	48.52	-3.11	45.41	54.00	-8.59	AVG	
7		2500.000	56.96	-3.08	53.88	74.00	-20.12	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Vertical]

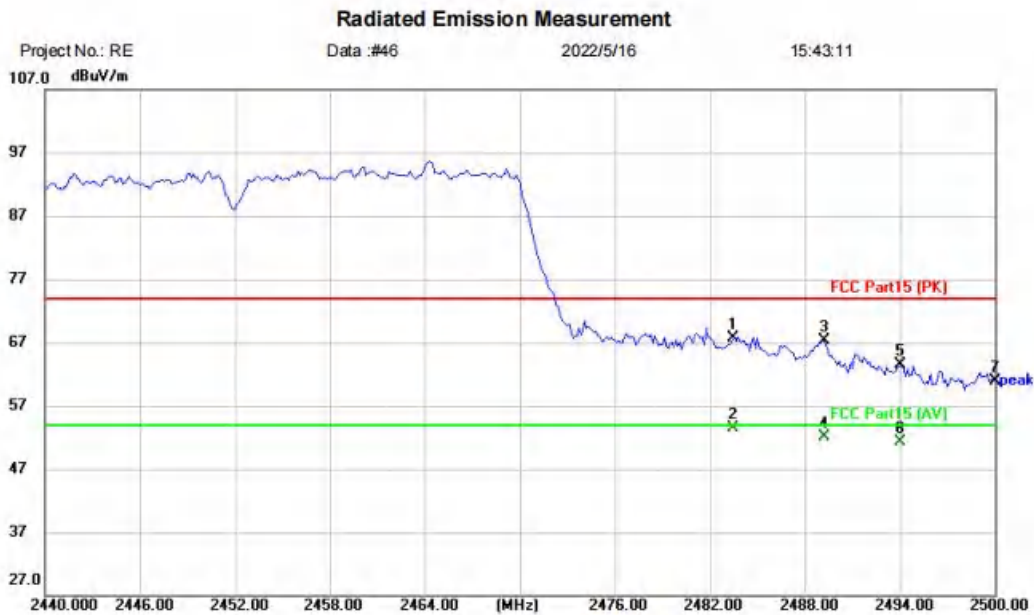

Site:      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: WIFI module  
 M/N: H132A-S  
 Mode: 2.4GWIFI-11N40-TX-H  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	70.78	-3.14	67.64	74.00	-6.36	peak	
2	*	2483.500	56.66	-3.14	53.52	54.00	-0.48	AVG	
3		2489.200	70.52	-3.13	67.39	74.00	-6.61	peak	
4		2489.200	55.32	-3.13	52.19	54.00	-1.81	AVG	
5		2494.000	66.59	-3.10	63.49	74.00	-10.51	peak	
6		2494.000	54.35	-3.10	51.25	54.00	-2.75	AVG	
7		2500.000	63.91	-3.08	60.83	74.00	-13.17	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**


## 19 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 19.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### 19.2 BLOCK DIAGRAM OF TEST SETUP

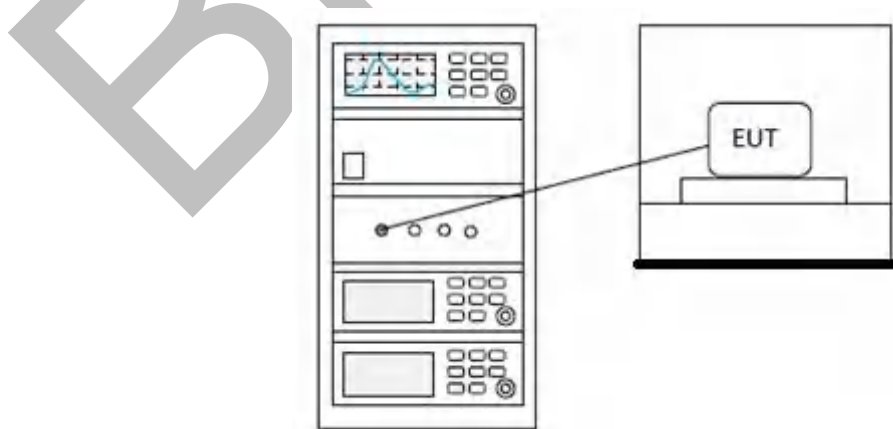

### 19.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia




## 20 CONDUCTED BAND EDGES MEASUREMENT

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 20.1 LIMITS

<b>Limit:</b>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

### 20.2 BLOCK DIAGRAM OF TEST SETUP

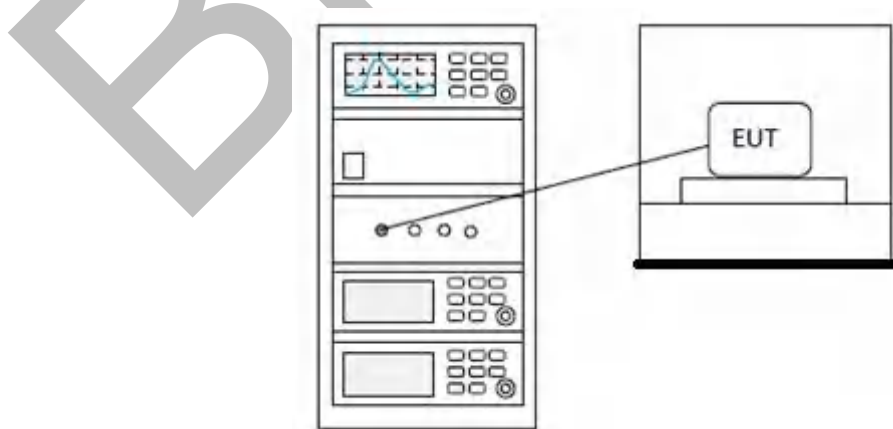

### 20.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 21 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 21.1 LIMITS

Limit:	$\geq 500$ kHz
--------	----------------

### 21.2 BLOCK DIAGRAM OF TEST SETUP

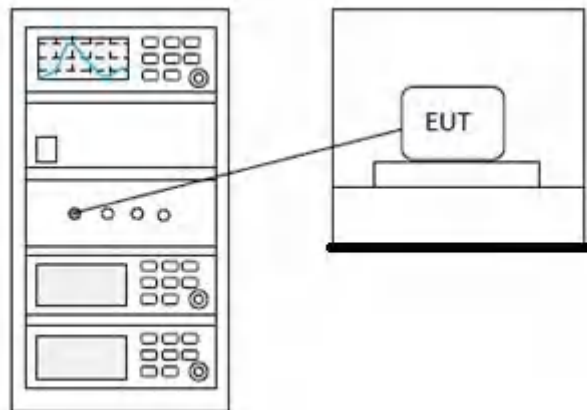

### 21.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

## 22 APPENDIX

### 22.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	16.029	30	Pass
NVNT	b	2437	Ant1	16.121	30	Pass
NVNT	b	2462	Ant1	15.98	30	Pass
NVNT	g	2412	Ant1	12.021	30	Pass
NVNT	g	2437	Ant1	12.084	30	Pass
NVNT	g	2462	Ant1	11.978	30	Pass
NVNT	n20	2412	Ant1	12.103	30	Pass
NVNT	n20	2437	Ant1	12.289	30	Pass
NVNT	n20	2462	Ant1	12.101	30	Pass
NVNT	n40	2422	Ant1	12.338	30	Pass
NVNT	n40	2437	Ant1	12.306	30	Pass
NVNT	n40	2452	Ant1	12.301	30	Pass

Power NVNT b 2412MHz Ant1



Power NVNT b 2437MHz Ant1



Power NVNT b 2462MHz Ant1



Power NVNT g 2412MHz Ant1



Power NVNT g 2437MHz Ant1



Power NVNT g 2462MHz Ant1




Power NVNT n20 2412MHz Ant1



Power NVNT n20 2437MHz Ant1




Power NVNT n20 2462MHz Ant1

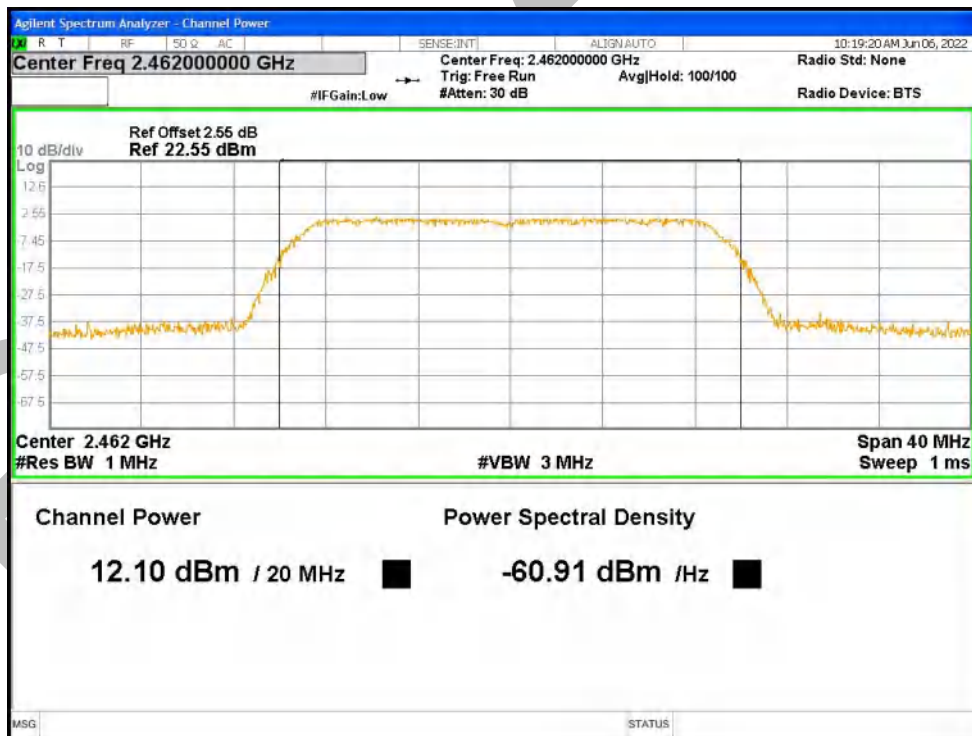


Power NVNT n40 2422MHz Ant1




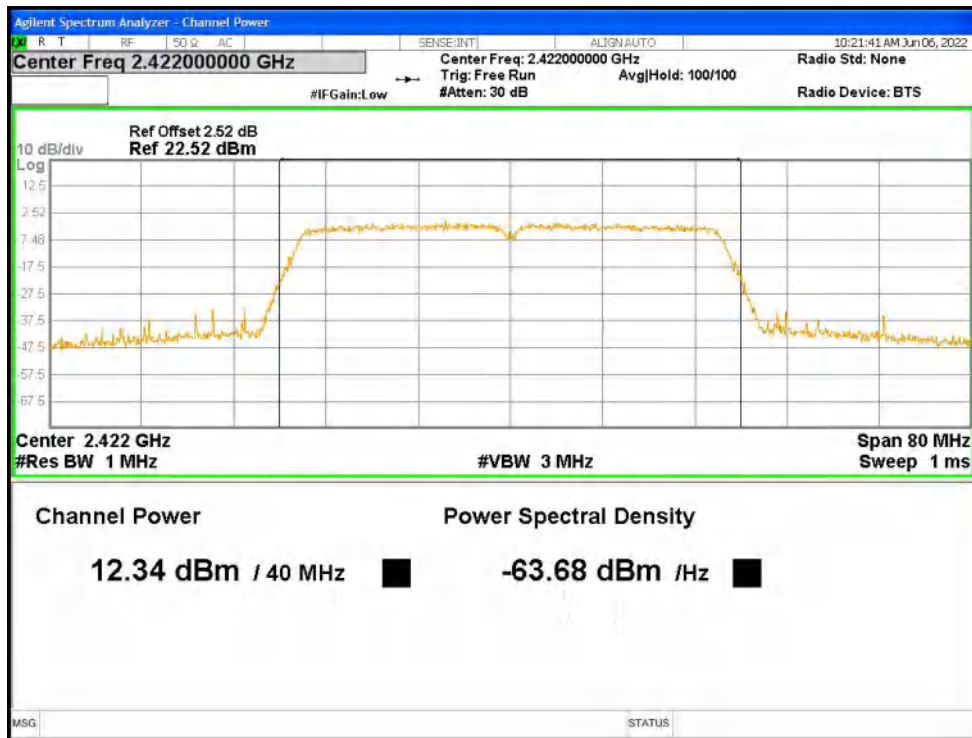

Power NVNT n40 2437MHz Ant1

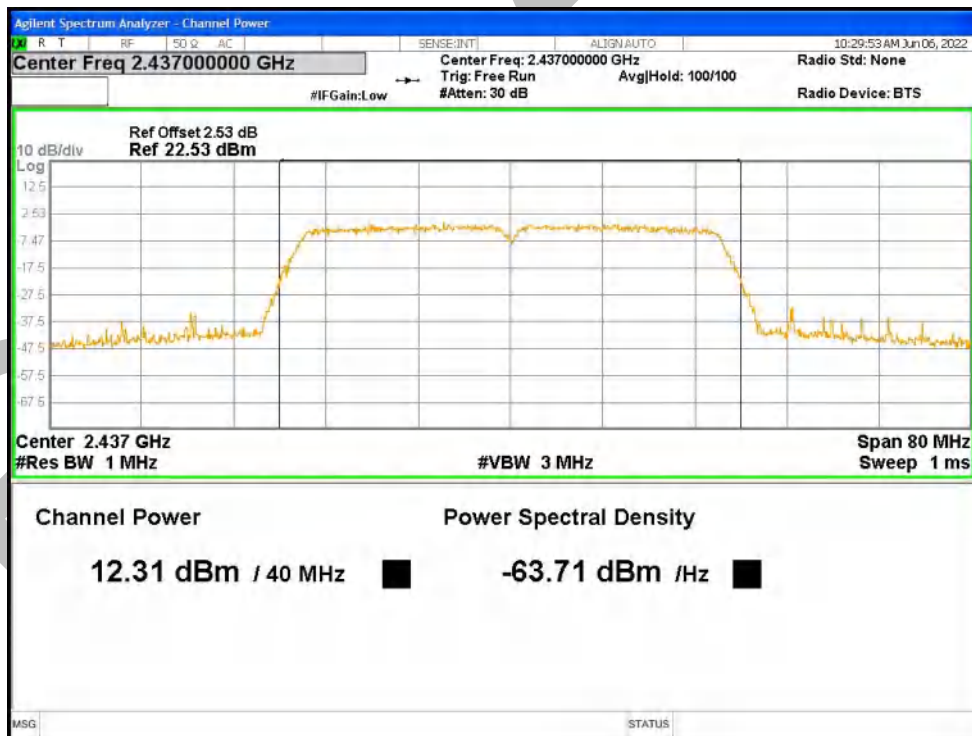

Power NVNT n40 2452MHz Ant1

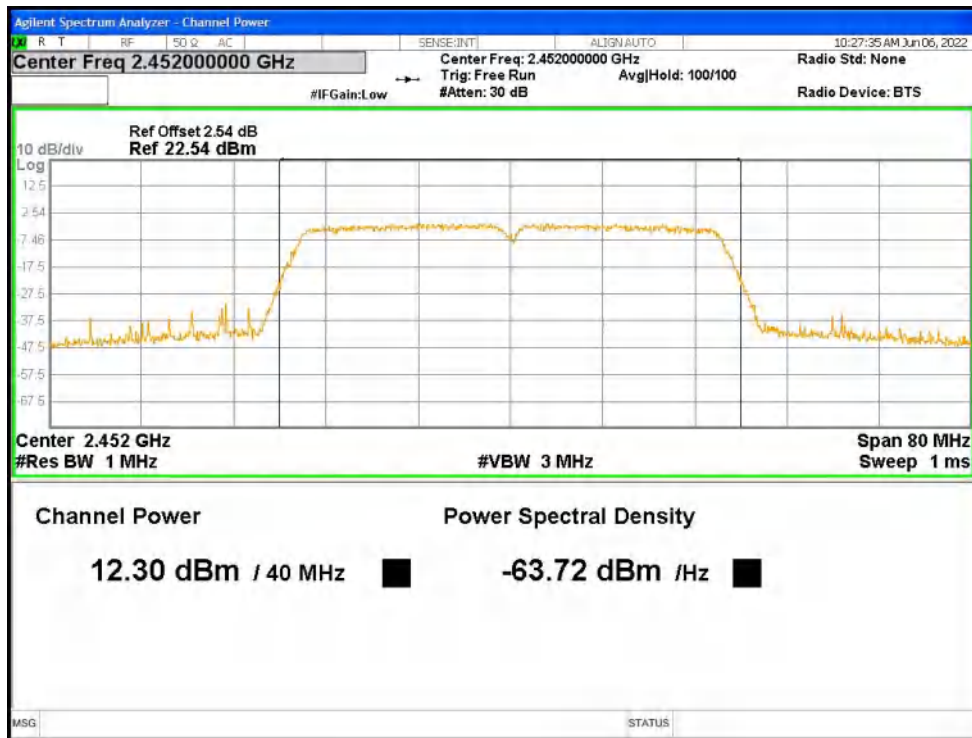


BlueEK


**22.2 -6DB BANDWIDTH**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.032	0.5	Pass
NVNT	b	2437	Ant1	10.054	0.5	Pass
NVNT	b	2462	Ant1	10	0.5	Pass
NVNT	g	2412	Ant1	16.35	0.5	Pass
NVNT	g	2437	Ant1	16.337	0.5	Pass
NVNT	g	2462	Ant1	16.406	0.5	Pass
NVNT	n20	2412	Ant1	17.627	0.5	Pass
NVNT	n20	2437	Ant1	17.607	0.5	Pass
NVNT	n20	2462	Ant1	17.589	0.5	Pass
NVNT	n40	2422	Ant1	35.954	0.5	Pass
NVNT	n40	2437	Ant1	35.699	0.5	Pass
NVNT	n40	2452	Ant1	35.29	0.5	Pass


-6dB Bandwidth NVNT b 2412MHz Ant1

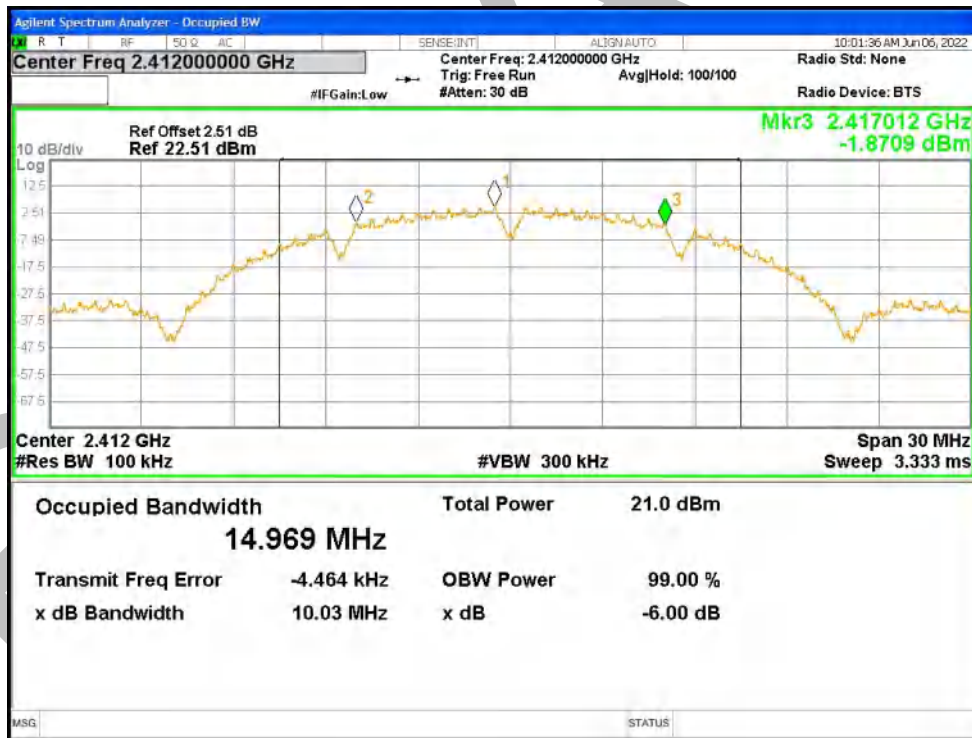


-6dB Bandwidth NVNT b 2437MHz Ant1

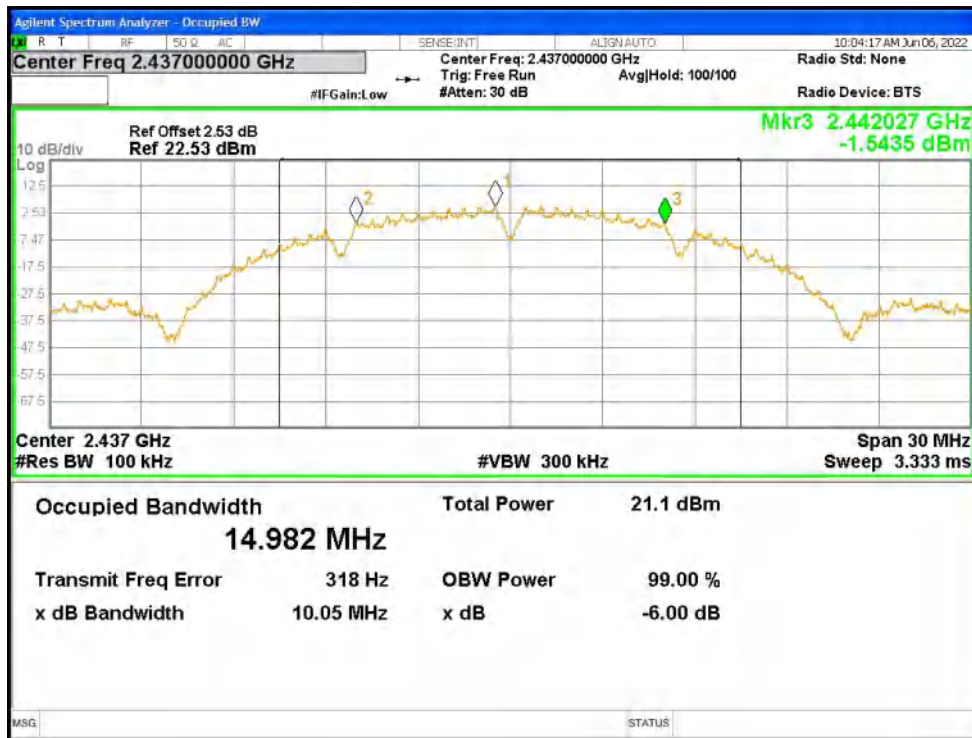


-6dB Bandwidth NVNT b 2462MHz Ant1

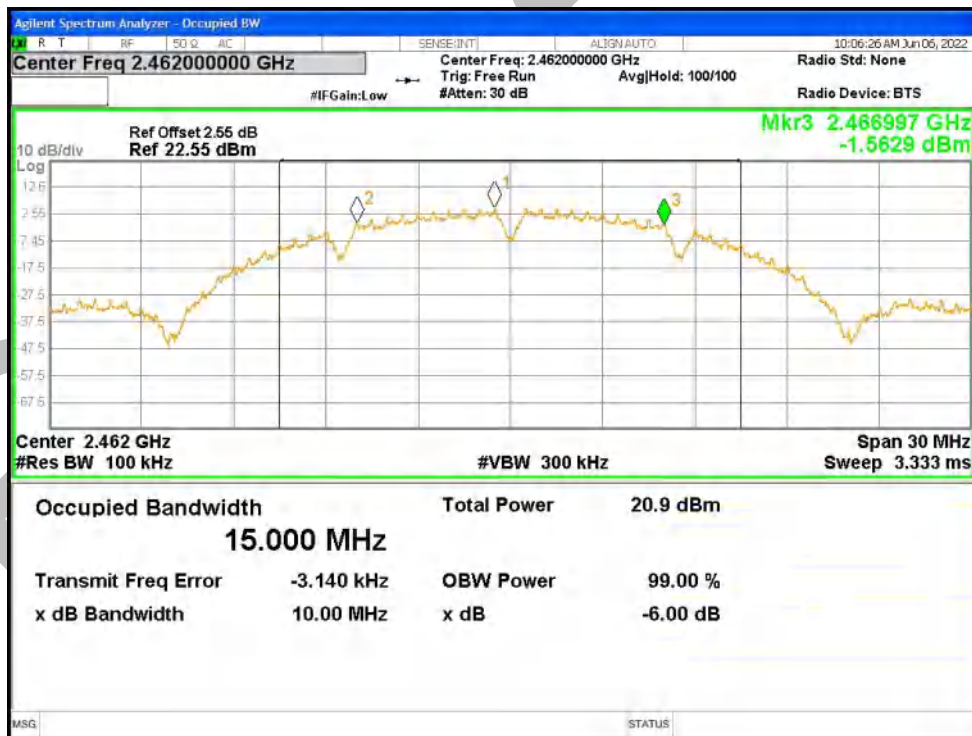


-6dB Bandwidth NVNT g 2412MHz Ant1

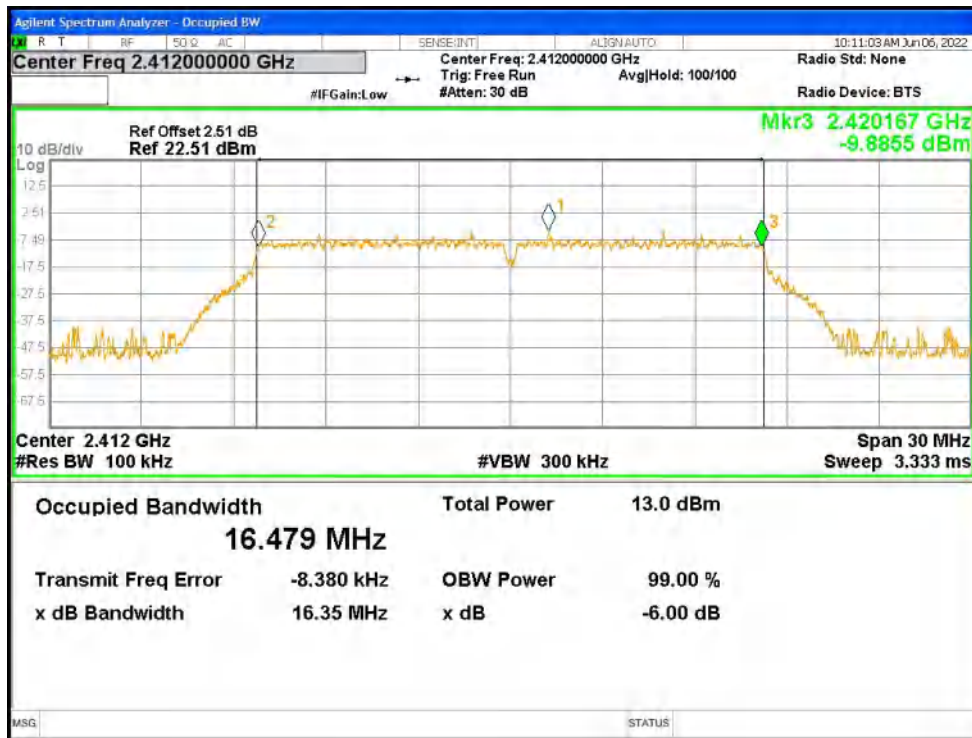


-6dB Bandwidth NVNT g 2437MHz Ant1

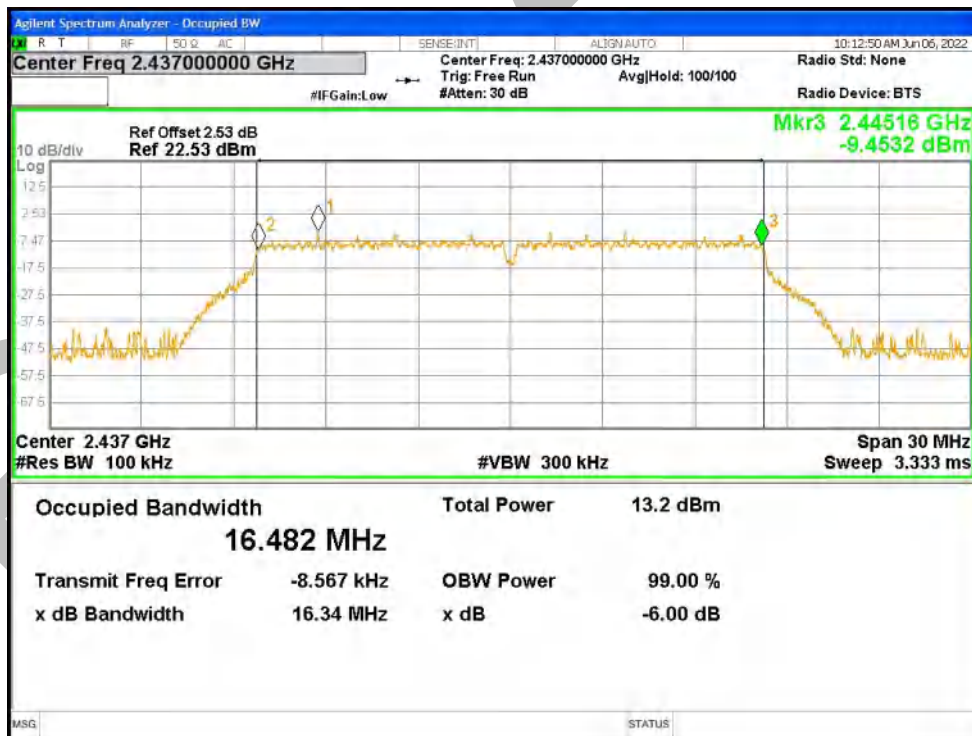


-6dB Bandwidth NVNT g 2462MHz Ant1

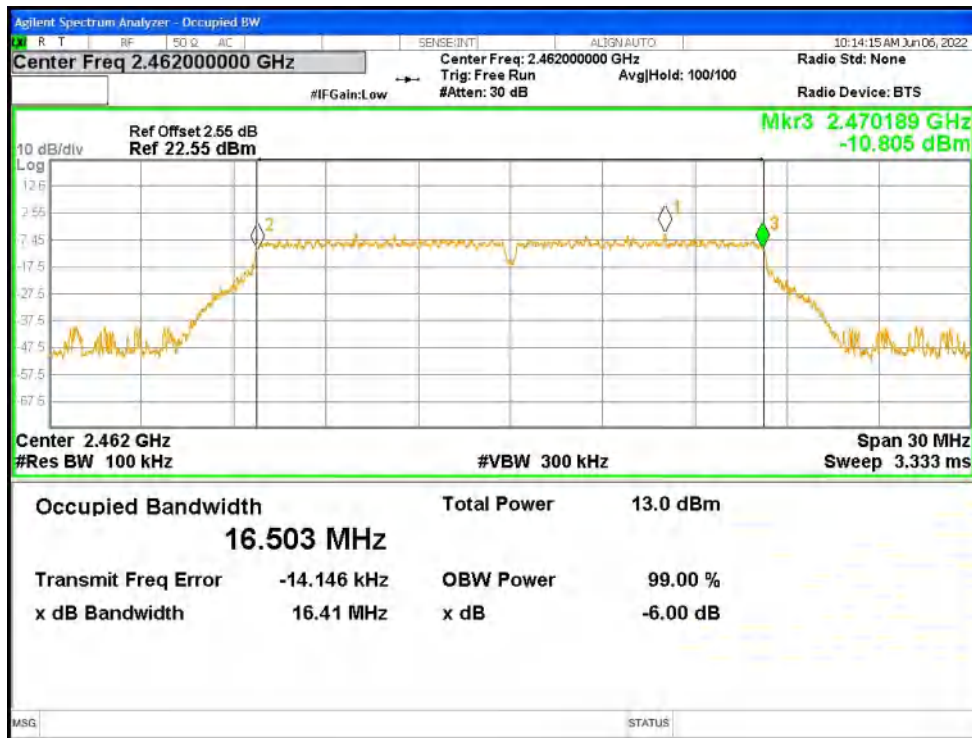

-6dB Bandwidth NVNT n20 2412MHz Ant1

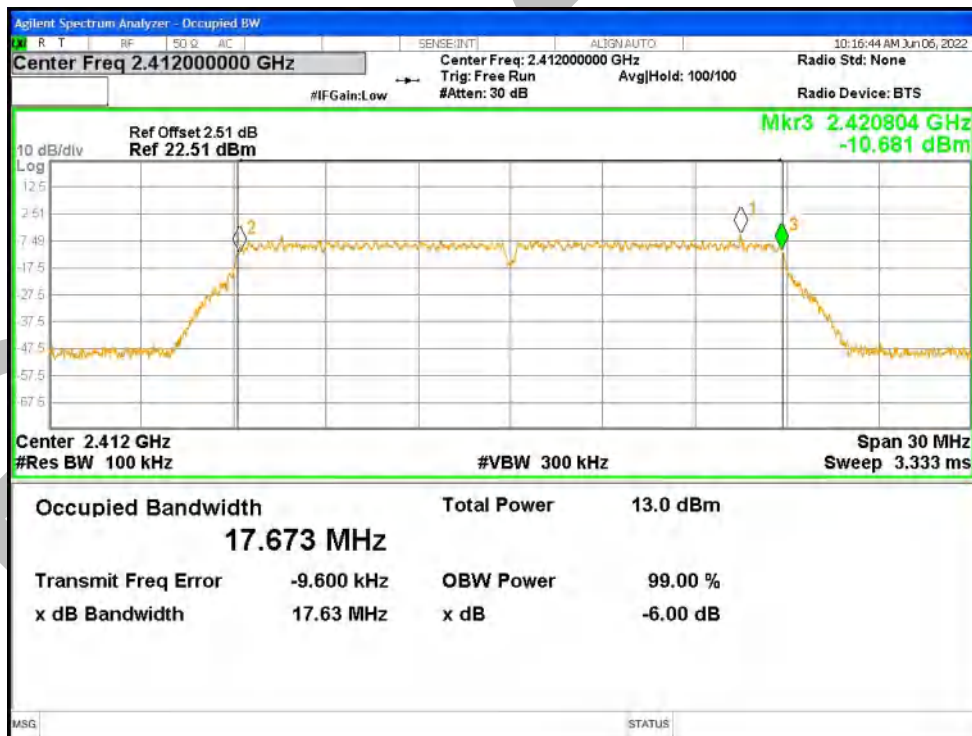


-6dB Bandwidth NVNT n20 2437MHz Ant1

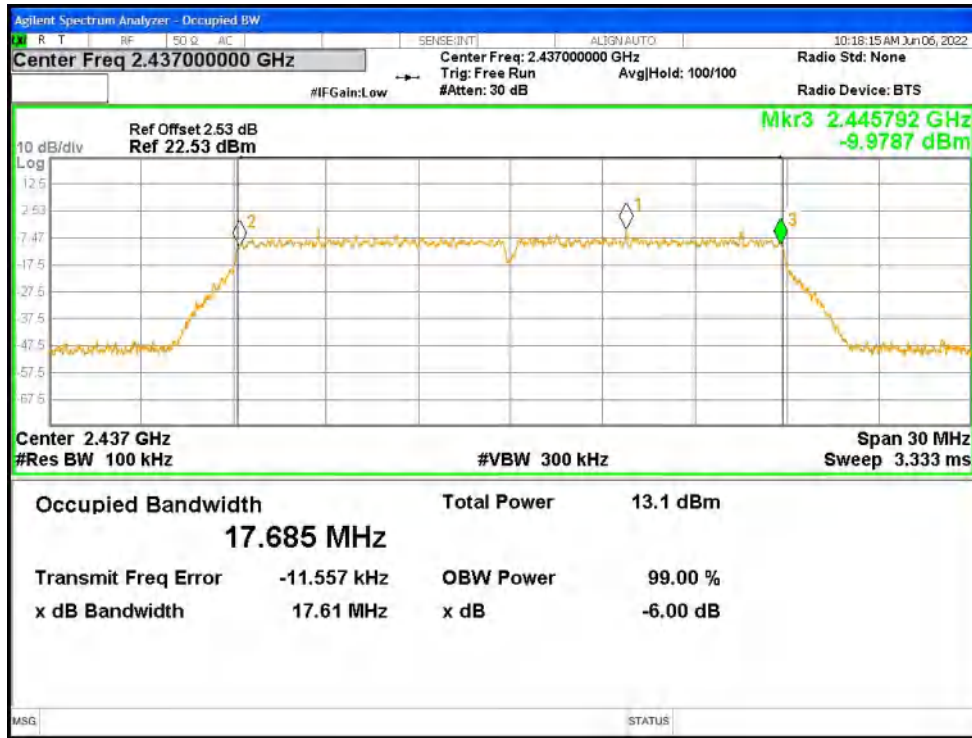


-6dB Bandwidth NVNT n20 2462MHz Ant1



-6dB Bandwidth NVNT n40 2422MHz Ant1

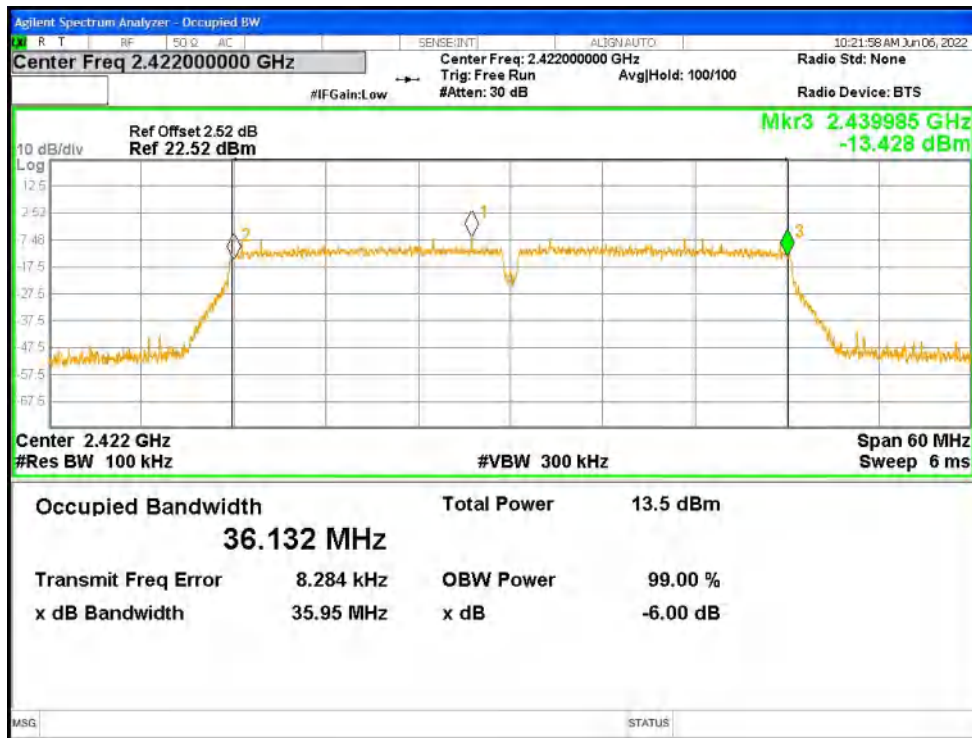


-6dB Bandwidth NVNT n40 2437MHz Ant1

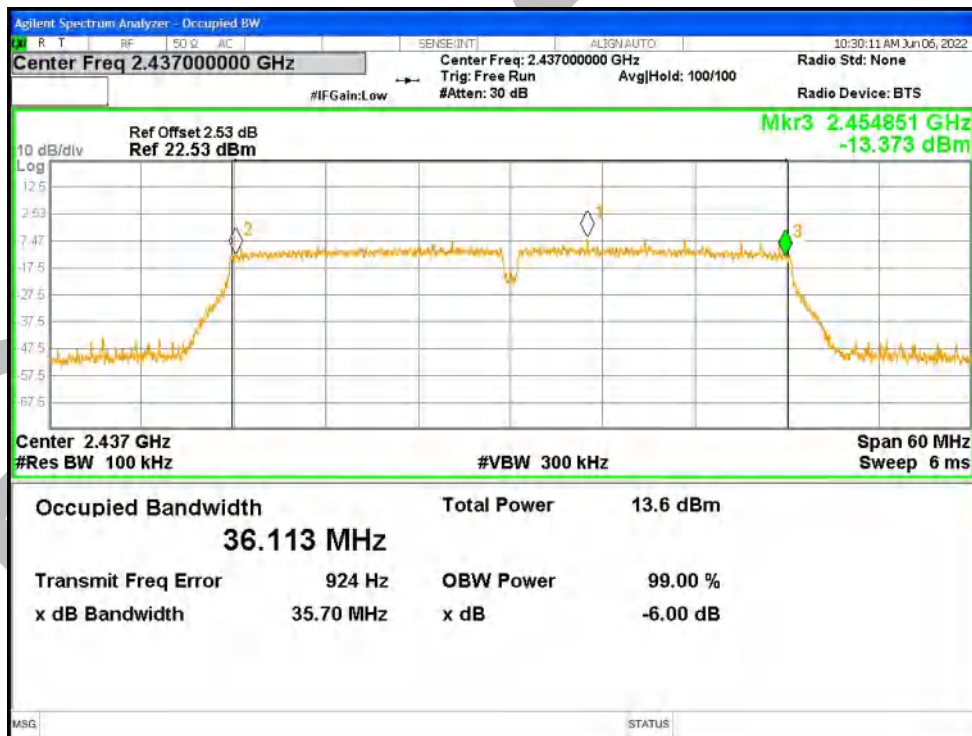

-6dB Bandwidth NVNT n40 2452MHz Ant1



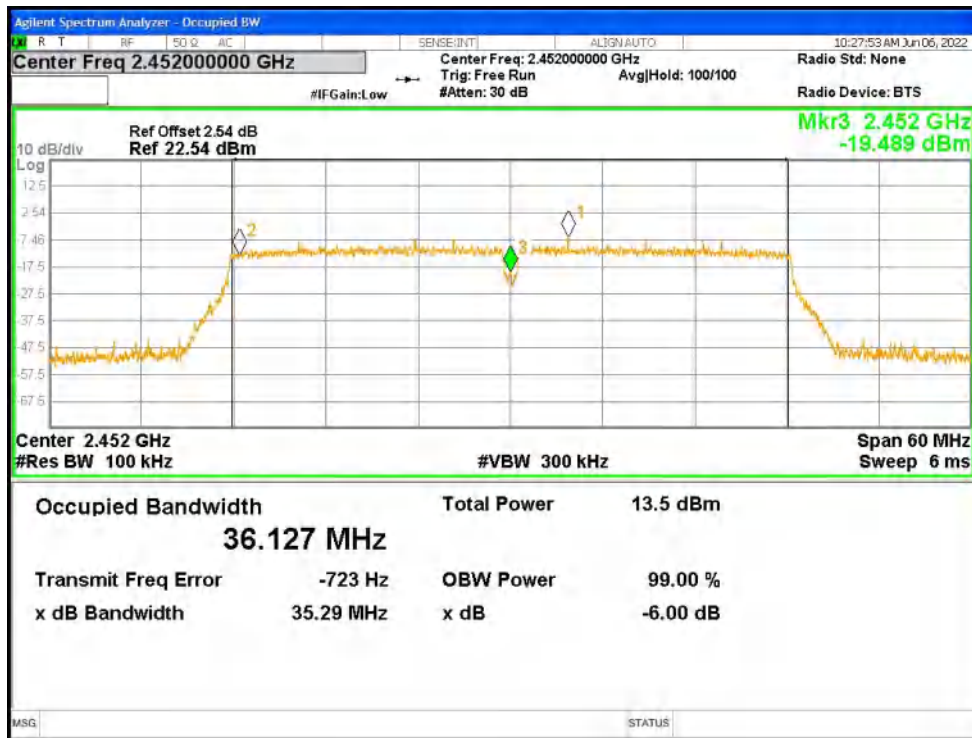


BlueAsia


### 22.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	15.0007112
NVNT	b	2437	Ant1	14.9914618
NVNT	b	2462	Ant1	15.03144044
NVNT	g	2412	Ant1	16.63971335
NVNT	g	2437	Ant1	16.64942415
NVNT	g	2462	Ant1	16.65061514
NVNT	n20	2412	Ant1	17.76800948
NVNT	n20	2437	Ant1	17.7987779
NVNT	n20	2462	Ant1	17.79262757
NVNT	n40	2422	Ant1	36.22538907
NVNT	n40	2437	Ant1	36.22973923
NVNT	n40	2452	Ant1	36.23563875


OBW NVNT b 2412MHz Ant1

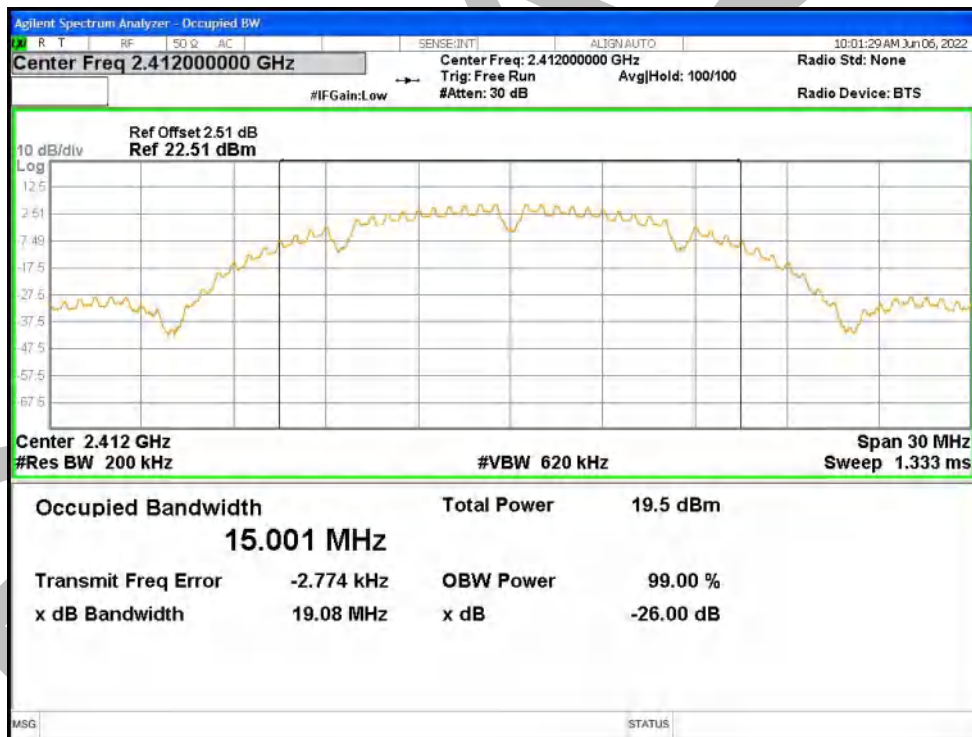


OBW NVNT b 2437MHz Ant1

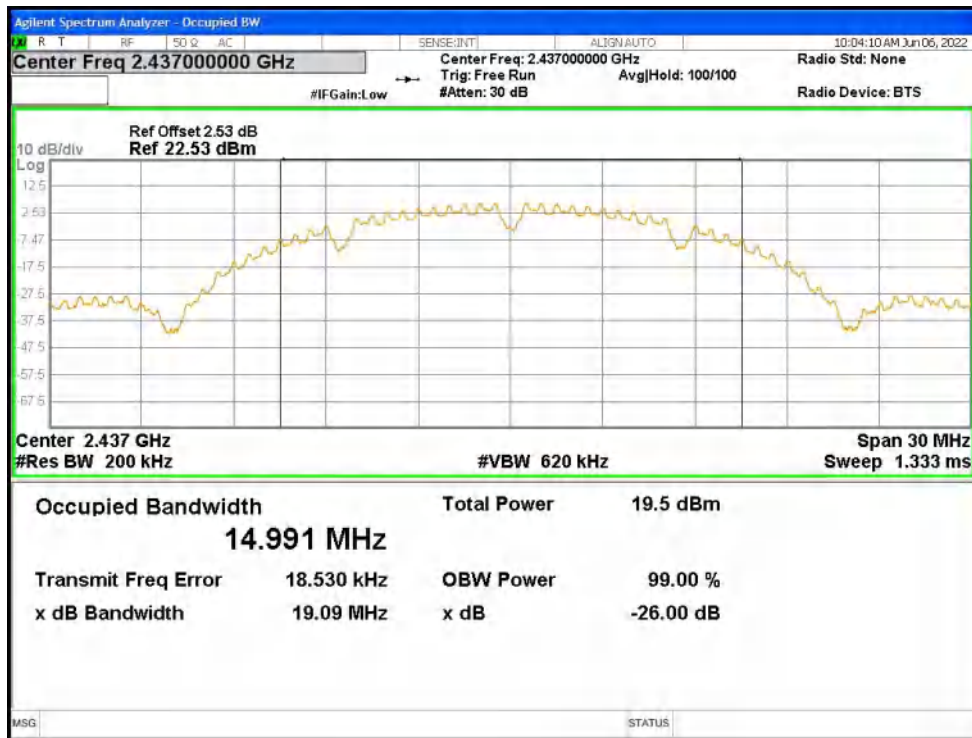


OBW NVNT b 2462MHz Ant1

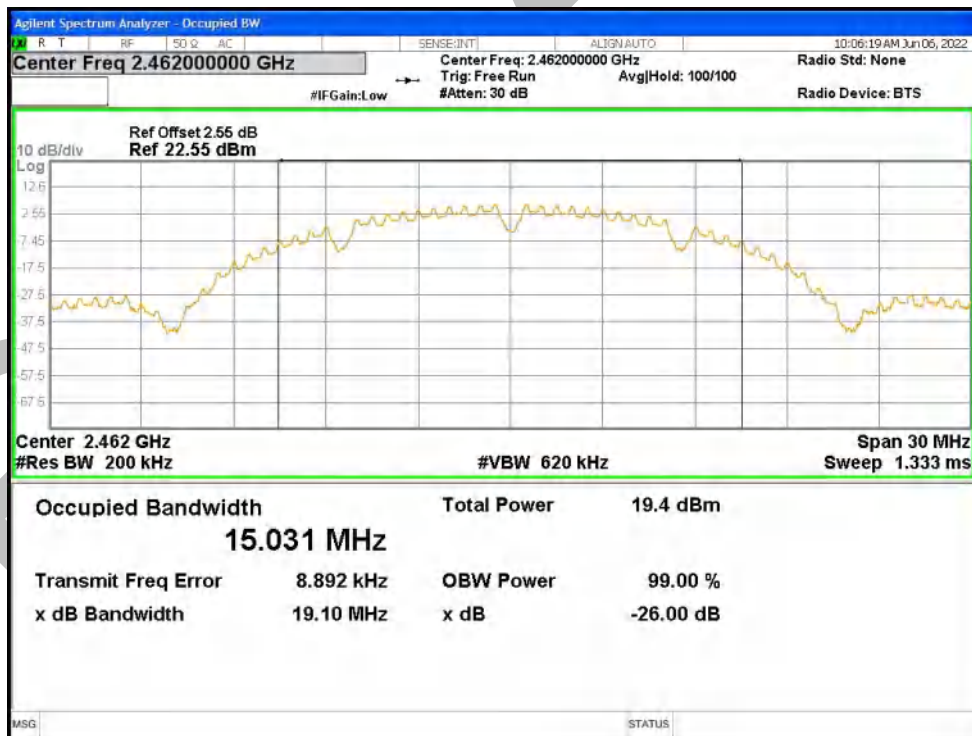


OBW NVNT g 2412MHz Ant1

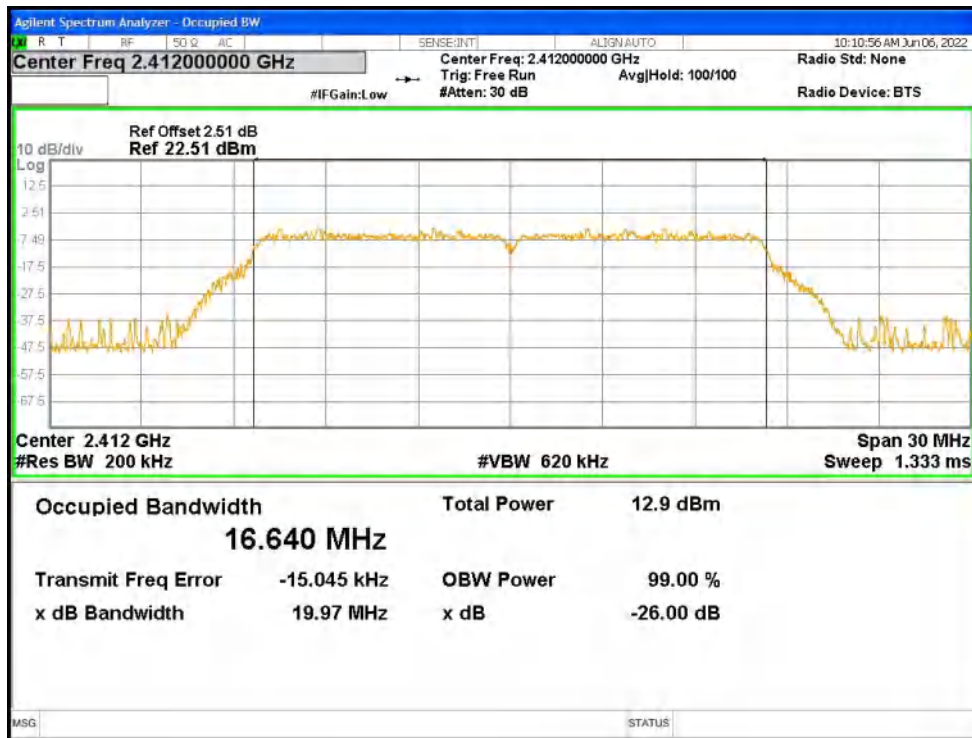


OBW NVNT g 2437MHz Ant1

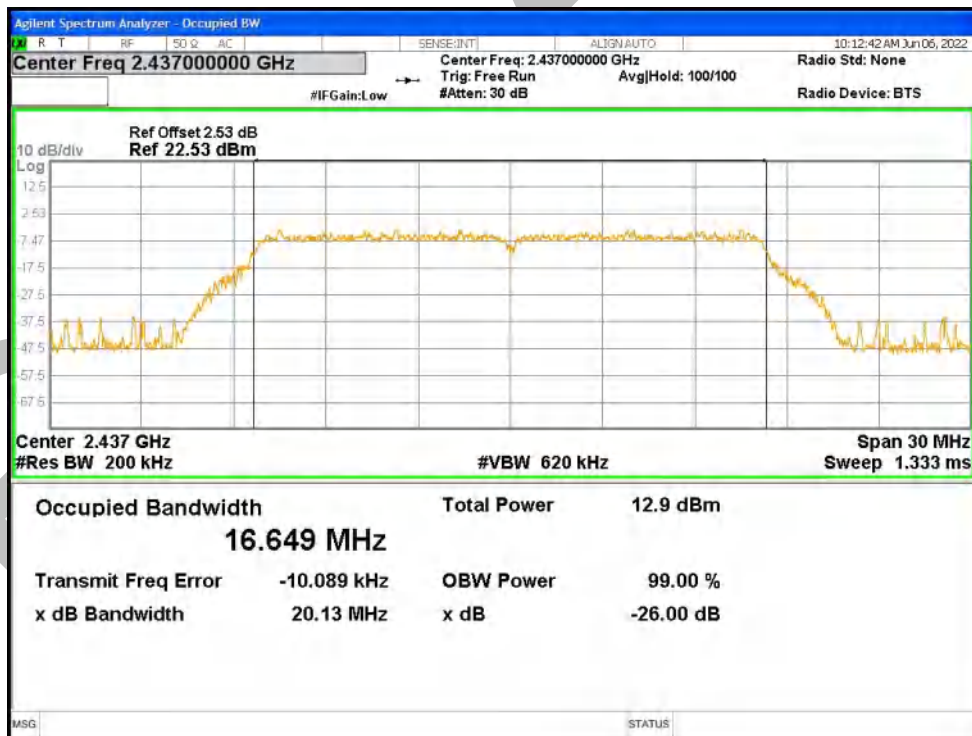


OBW NVNT g 2462MHz Ant1

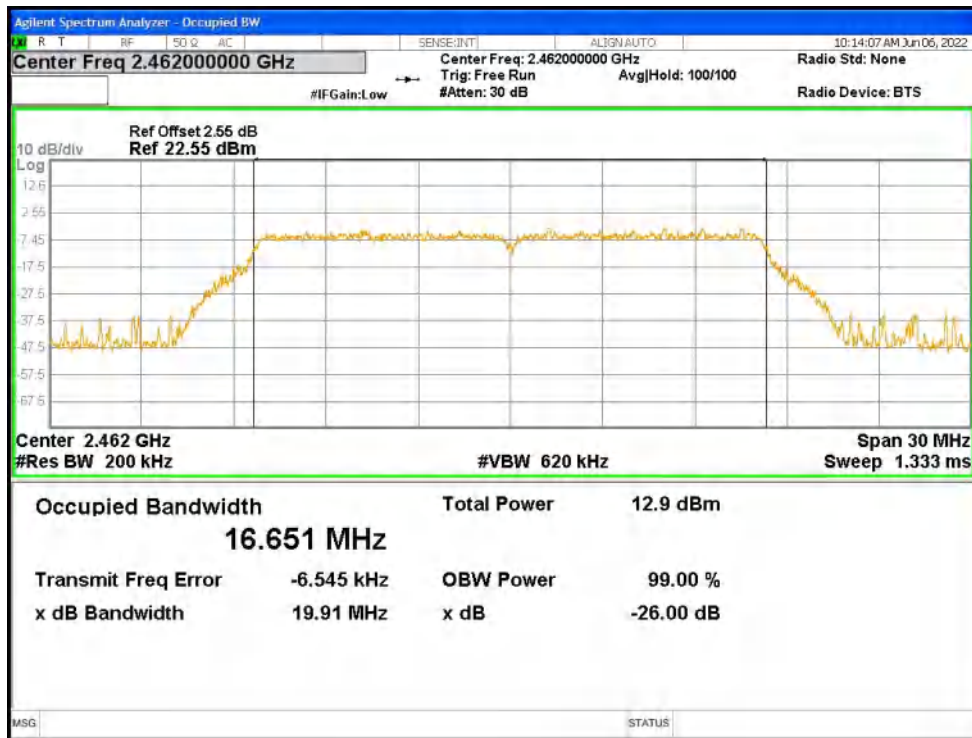


OBW NVNT n20 2412MHz Ant1

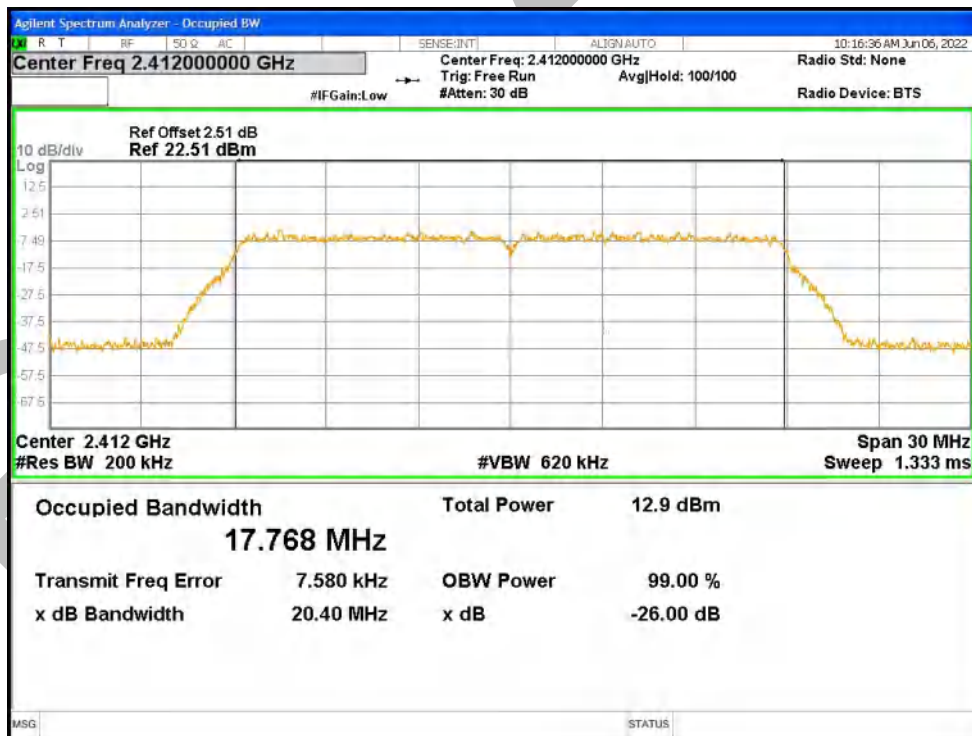


OBW NVNT n20 2437MHz Ant1

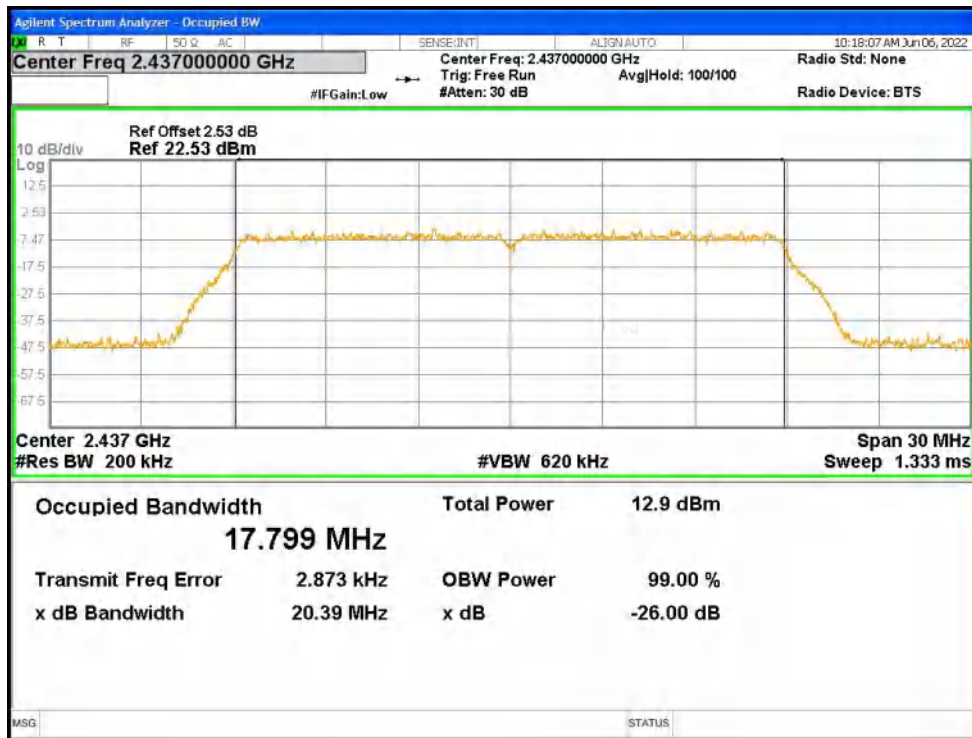


OBW NVNT n20 2462MHz Ant1

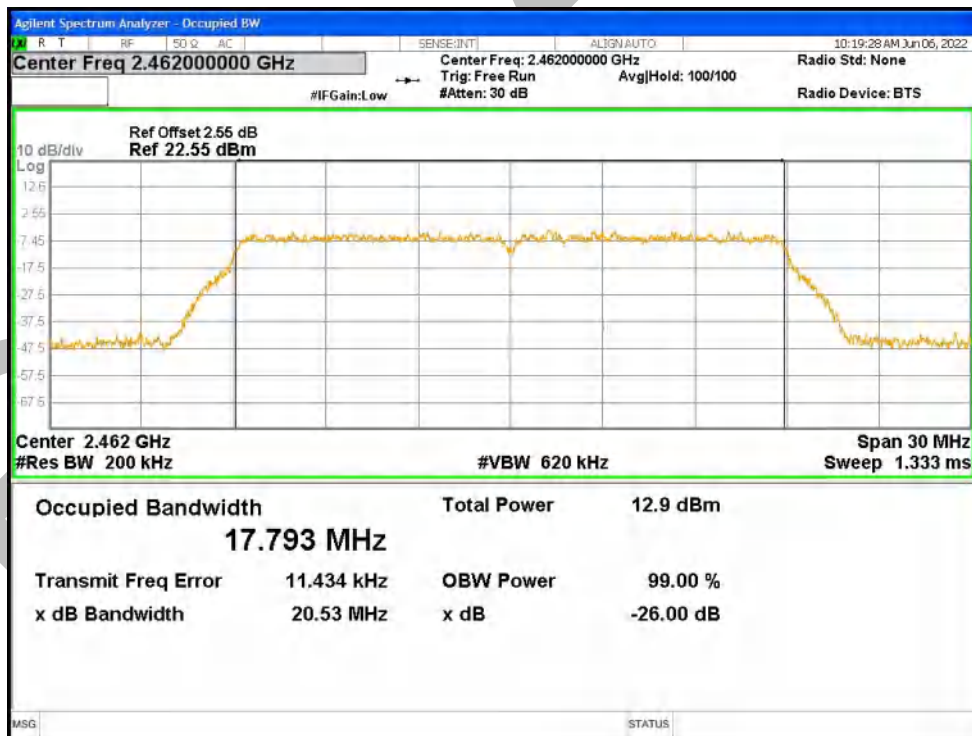


OBW NVNT n40 2422MHz Ant1

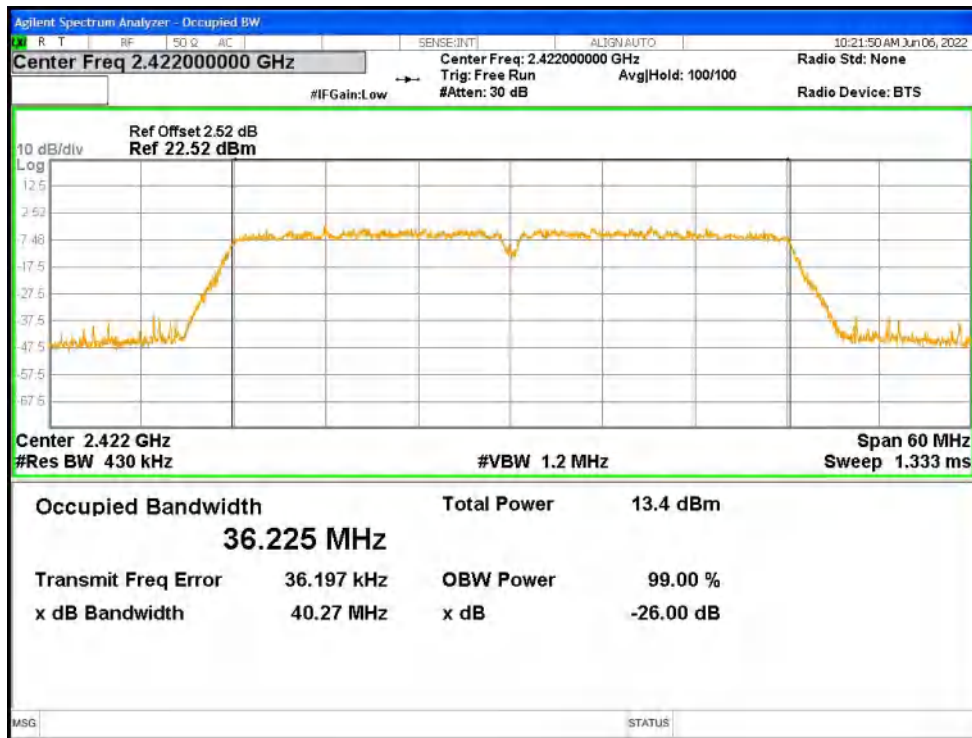

OBW NVNT n40 2437MHz Ant1

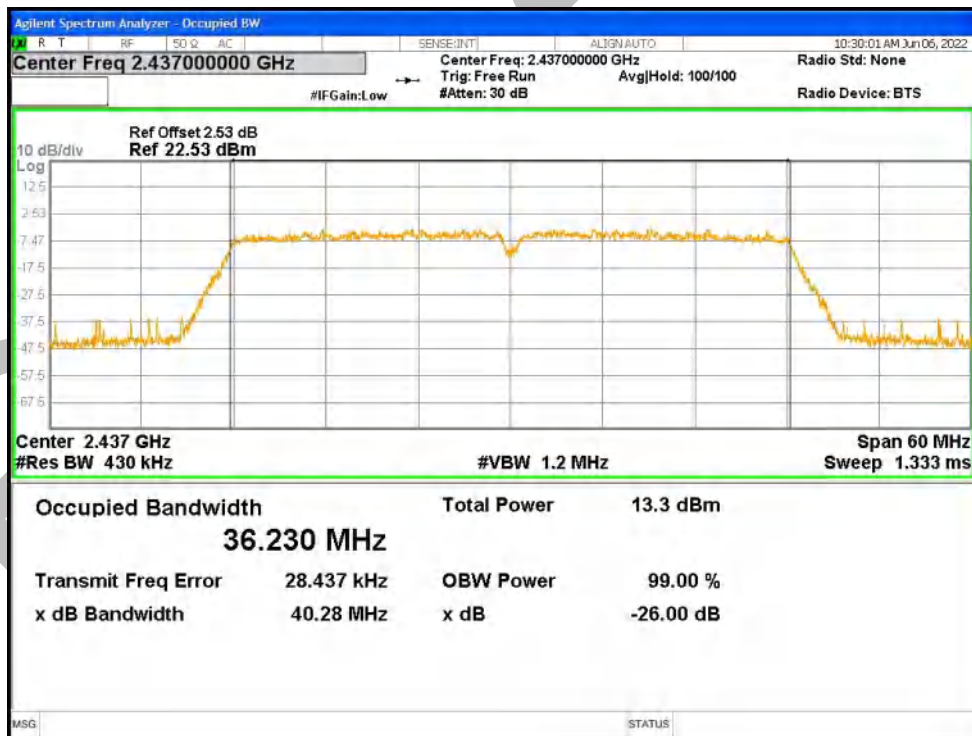

OBW NVNT n40 2452MHz Ant1

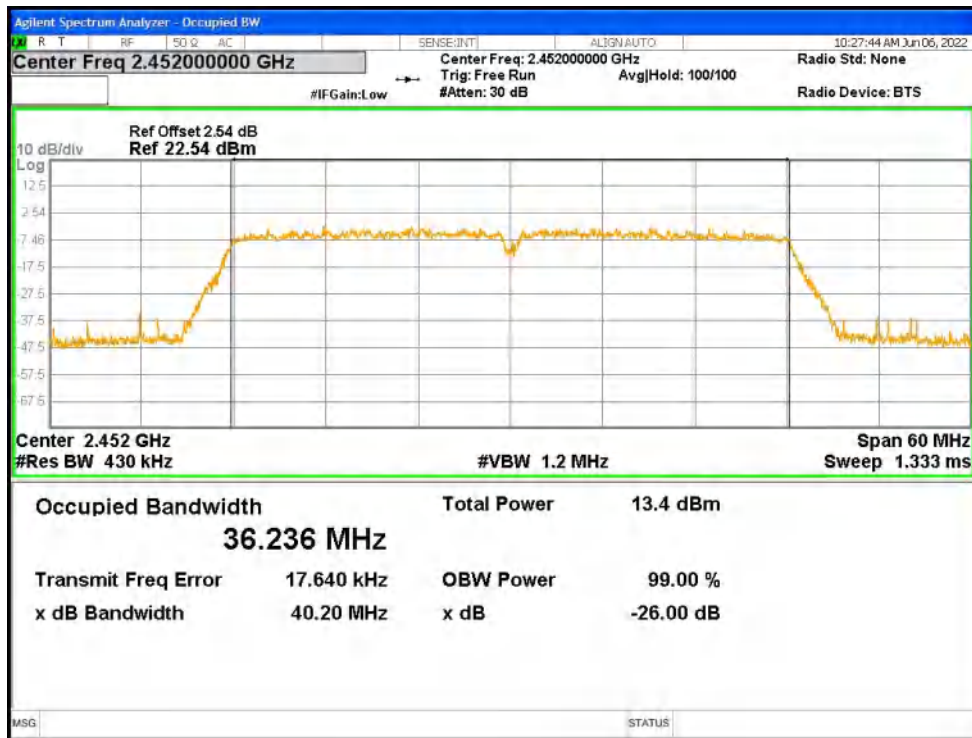

BlueAsia




**22.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	4.904	8	Pass
NVNT	b	2437	Ant1	4.958	8	Pass
NVNT	b	2462	Ant1	4.747	8	Pass
NVNT	g	2412	Ant1	-4.064	8	Pass
NVNT	g	2437	Ant1	-3.619	8	Pass
NVNT	g	2462	Ant1	-3.743	8	Pass
NVNT	n20	2412	Ant1	-4.46	8	Pass
NVNT	n20	2437	Ant1	-4.559	8	Pass
NVNT	n20	2462	Ant1	-4.259	8	Pass
NVNT	n40	2422	Ant1	-6.612	8	Pass
NVNT	n40	2437	Ant1	-6.251	8	Pass
NVNT	n40	2452	Ant1	-6.336	8	Pass


PSD NVNT b 2412MHz Ant1




PSD NVNT b 2437MHz Ant1

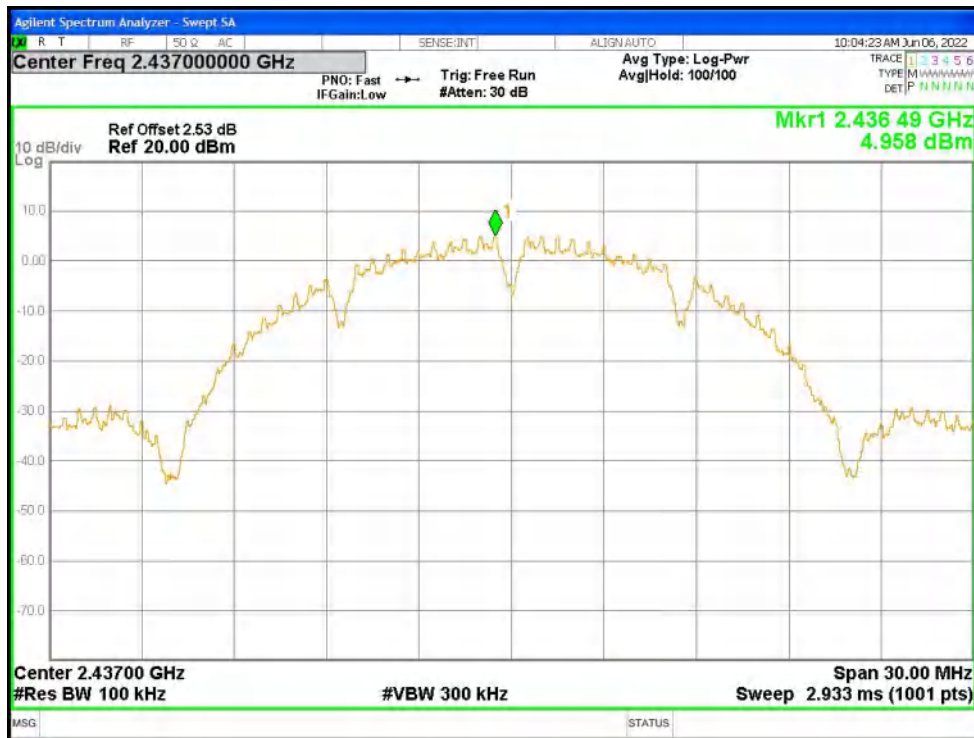


PSD NVNT b 2462MHz Ant1

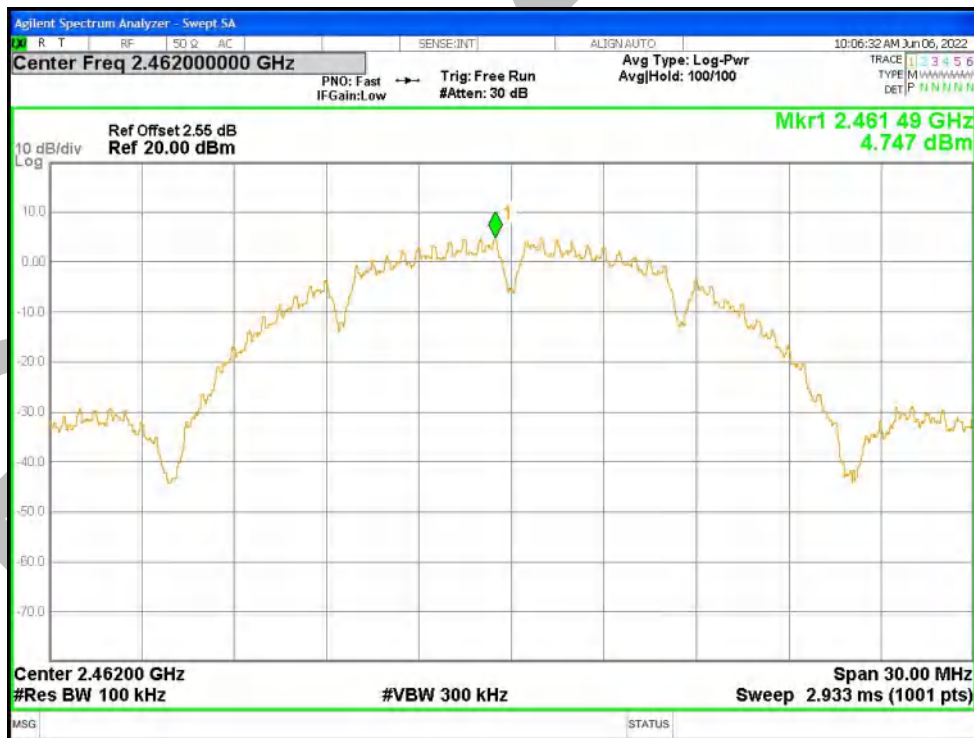

PSD NVNT g 2412MHz Ant1

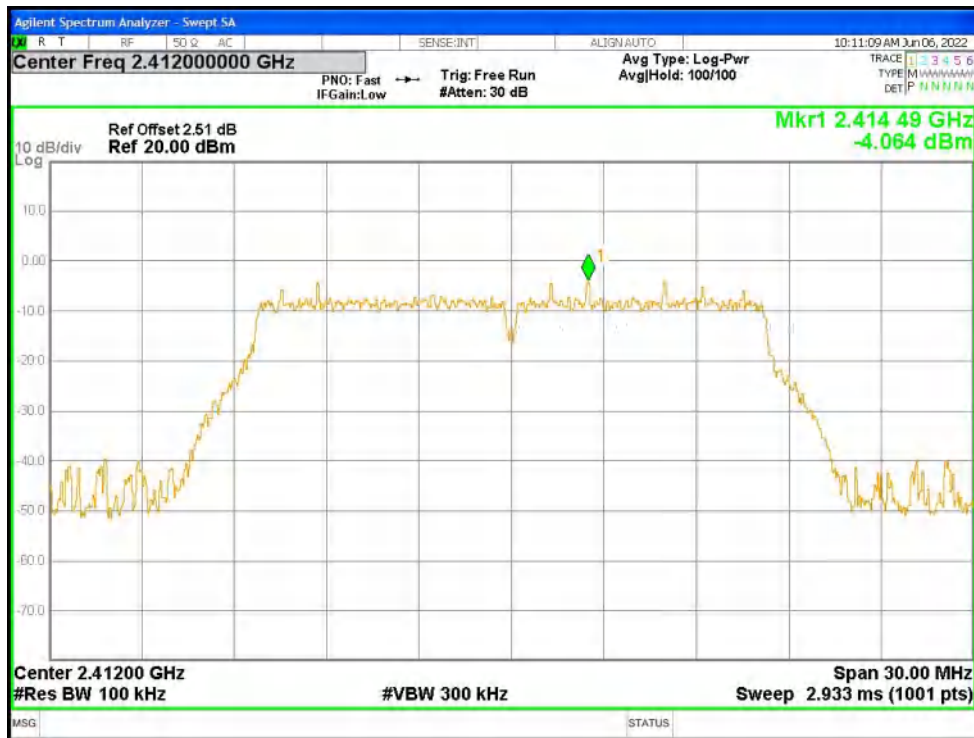


PSD NVNT g 2437MHz Ant1

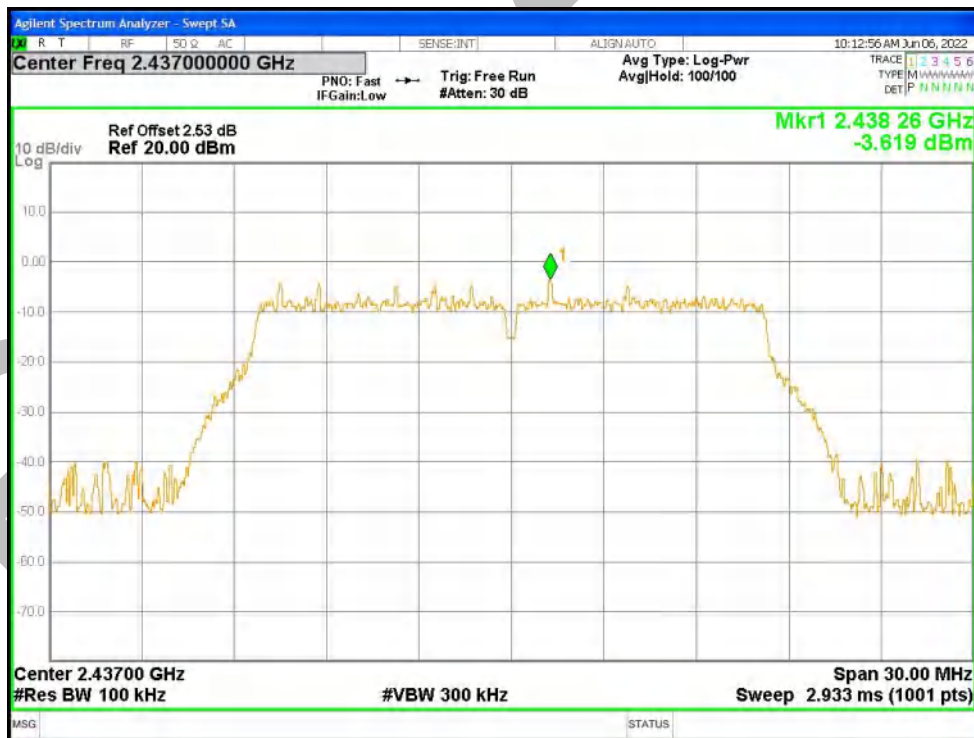


PSD NVNT g 2462MHz Ant1




PSD NVNT n20 2412MHz Ant1

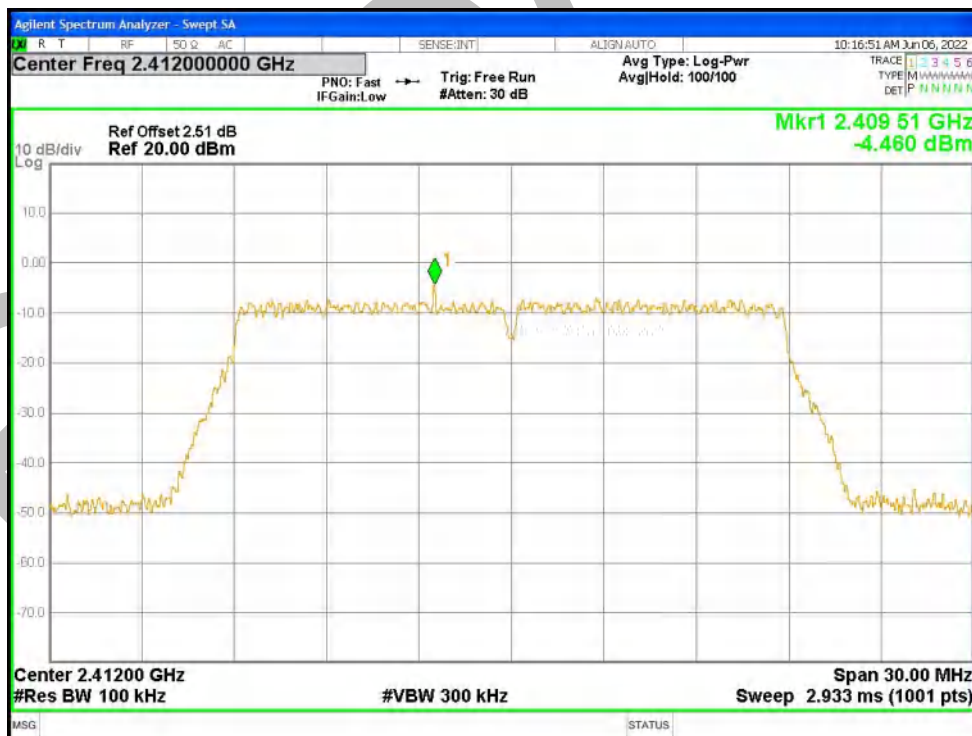


PSD NVNT n20 2437MHz Ant1

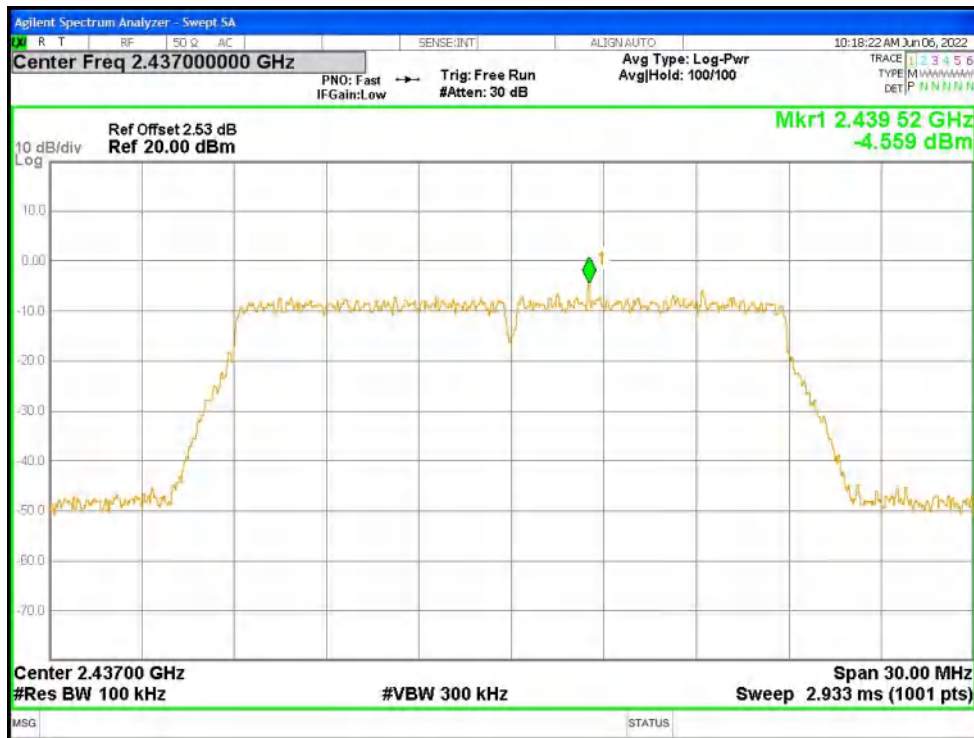


PSD NVNT n20 2462MHz Ant1

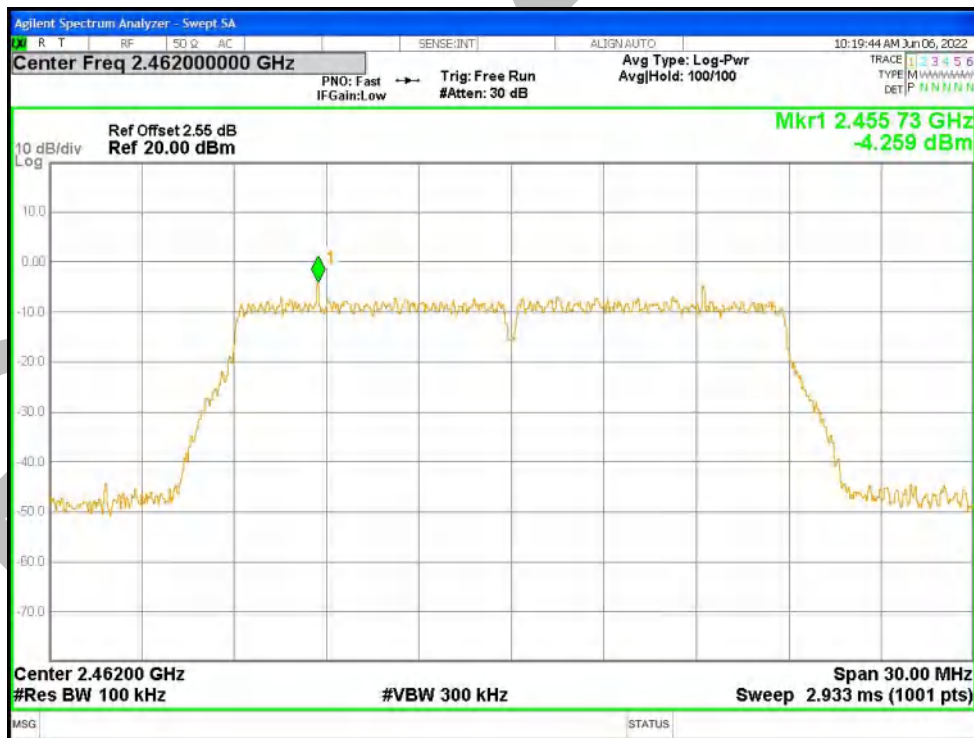


PSD NVNT n40 2422MHz Ant1

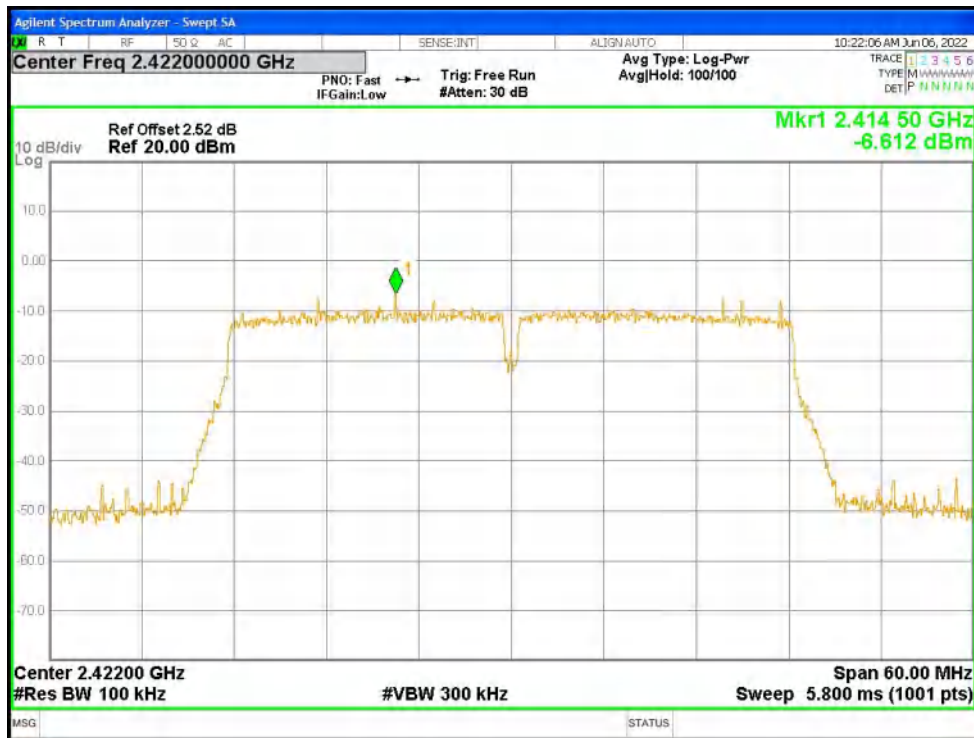

PSD NVNT n40 2437MHz Ant1

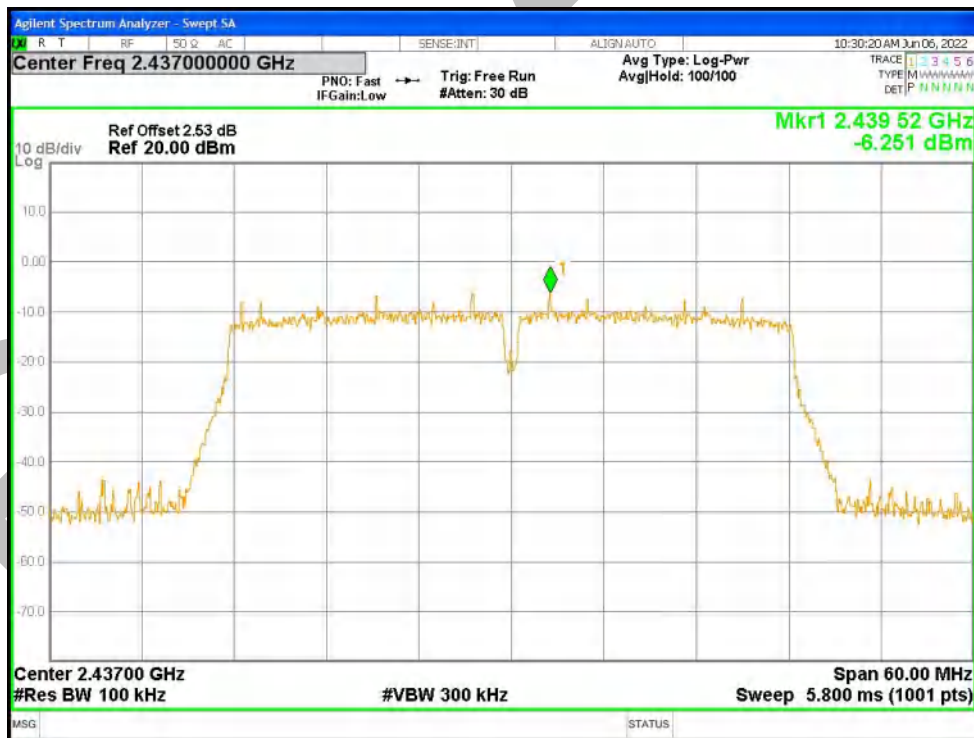

PSD NVNT n40 2452MHz Ant1

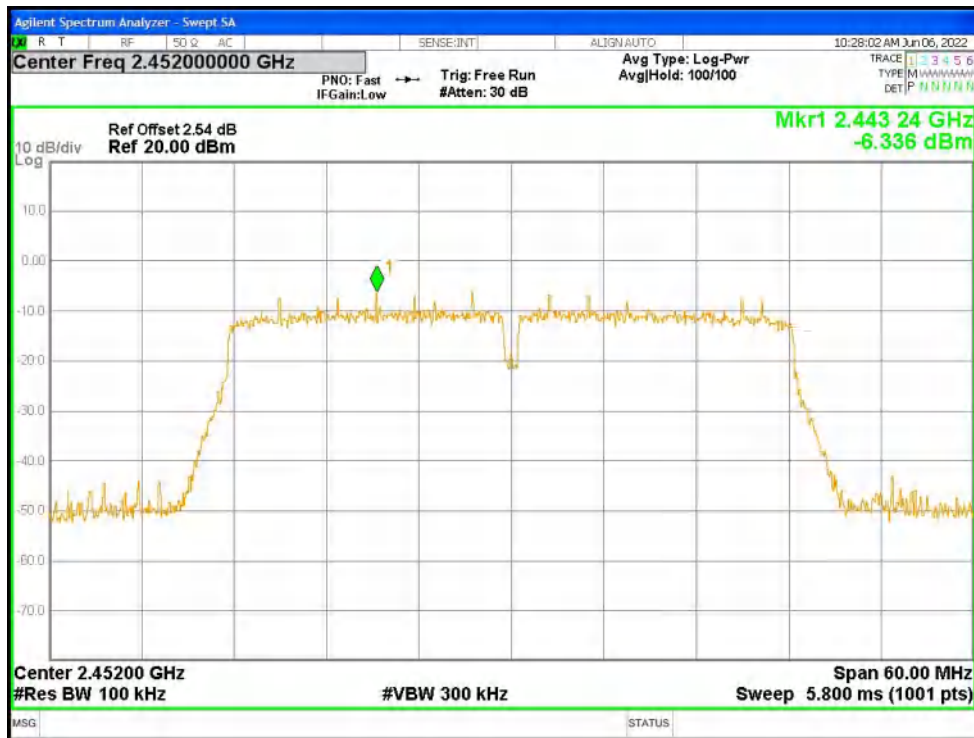


BlueK

### 22.5 BAND EDGE


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-52.04	-30	Pass
NVNT	b	2462	Ant1	-50.87	-30	Pass
NVNT	g	2412	Ant1	-44.36	-30	Pass
NVNT	g	2462	Ant1	-44.32	-30	Pass
NVNT	n20	2412	Ant1	-44.26	-30	Pass
NVNT	n20	2462	Ant1	-44.14	-30	Pass
NVNT	n40	2422	Ant1	-40.96	-30	Pass
NVNT	n40	2452	Ant1	-40.64	-30	Pass

Band Edge NVNT b 2412MHz Ant1 Ref

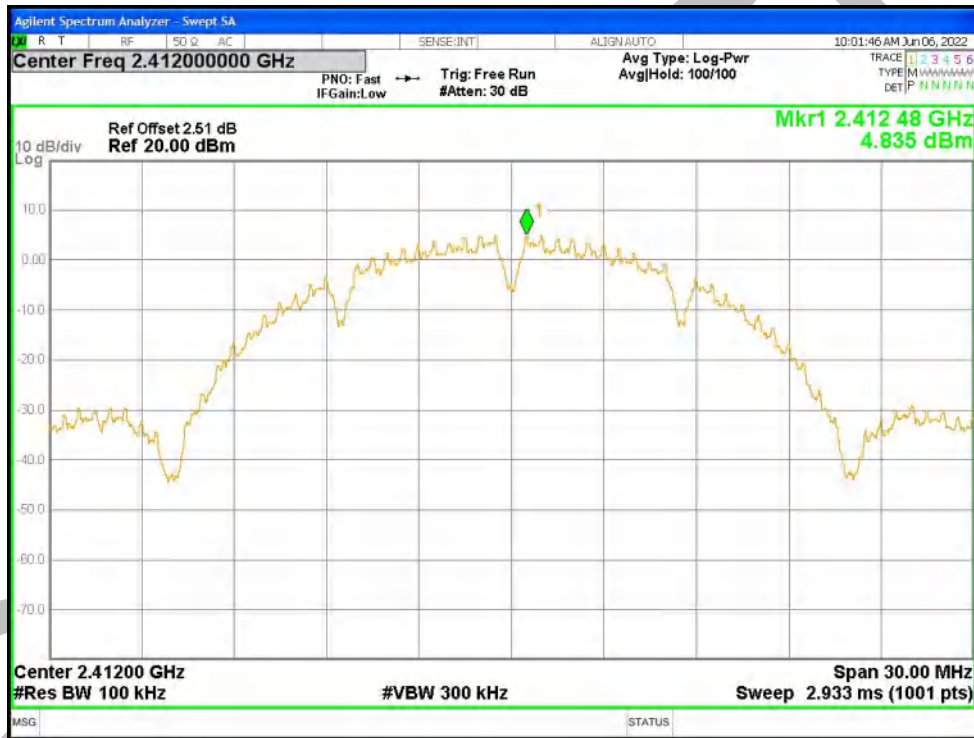

Band Edge NVNT b 2412MHz Ant1 Emission




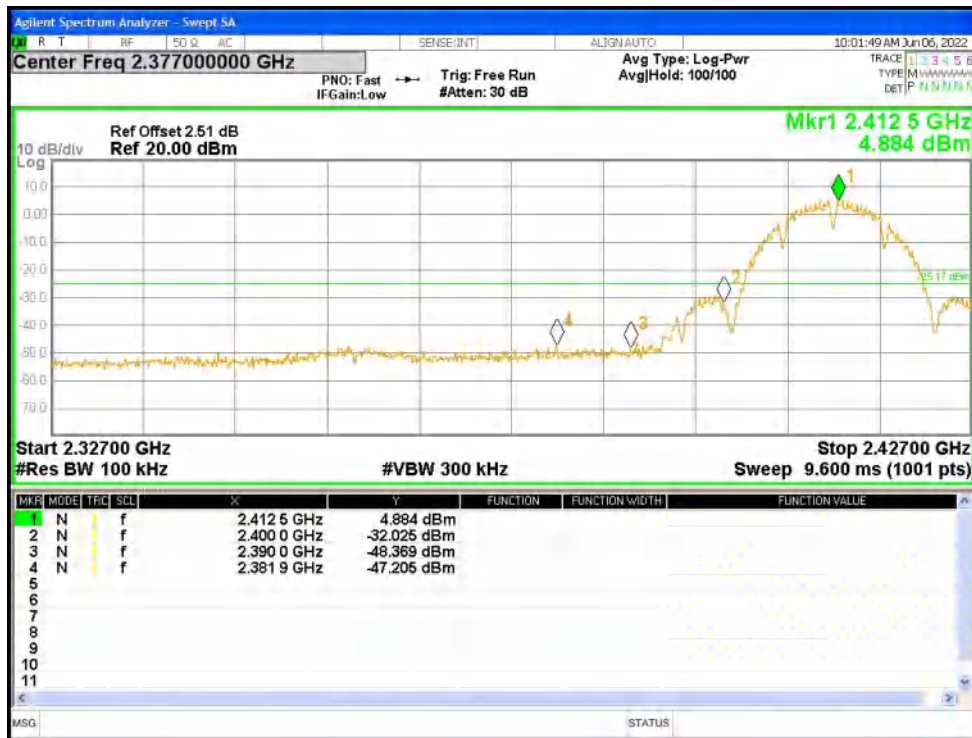

Band Edge NVNT b 2462MHz Ant1 Ref




Band Edge NVNT b 2462MHz Ant1 Emission

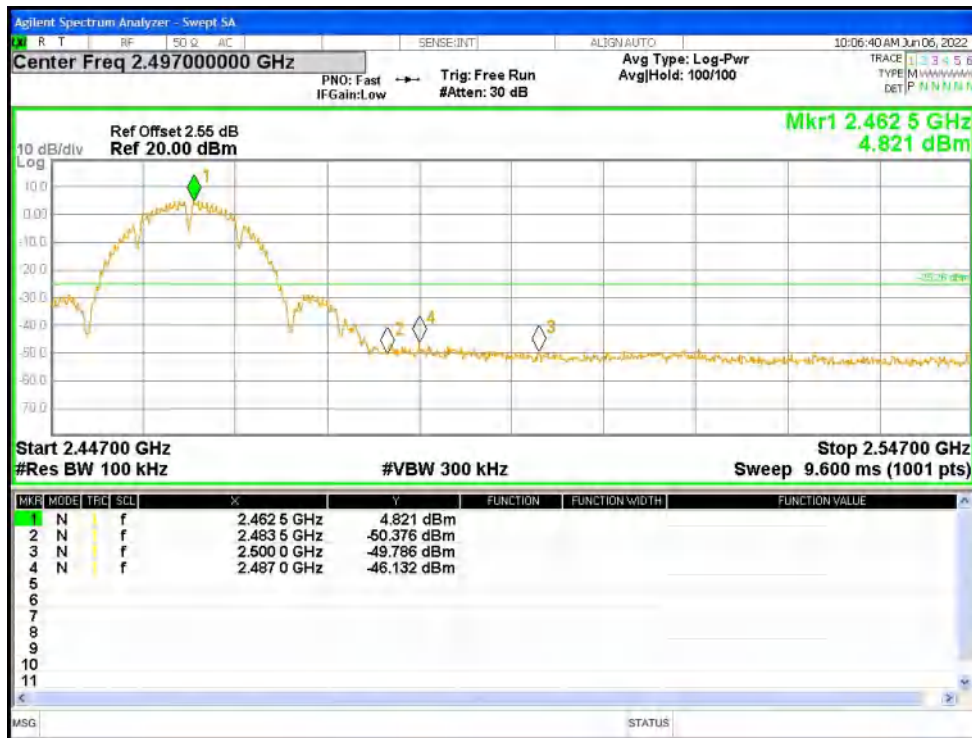

Band Edge NVNT g 2412MHz Ant1 Ref



Band Edge NVNT g 2412MHz Ant1 Emission

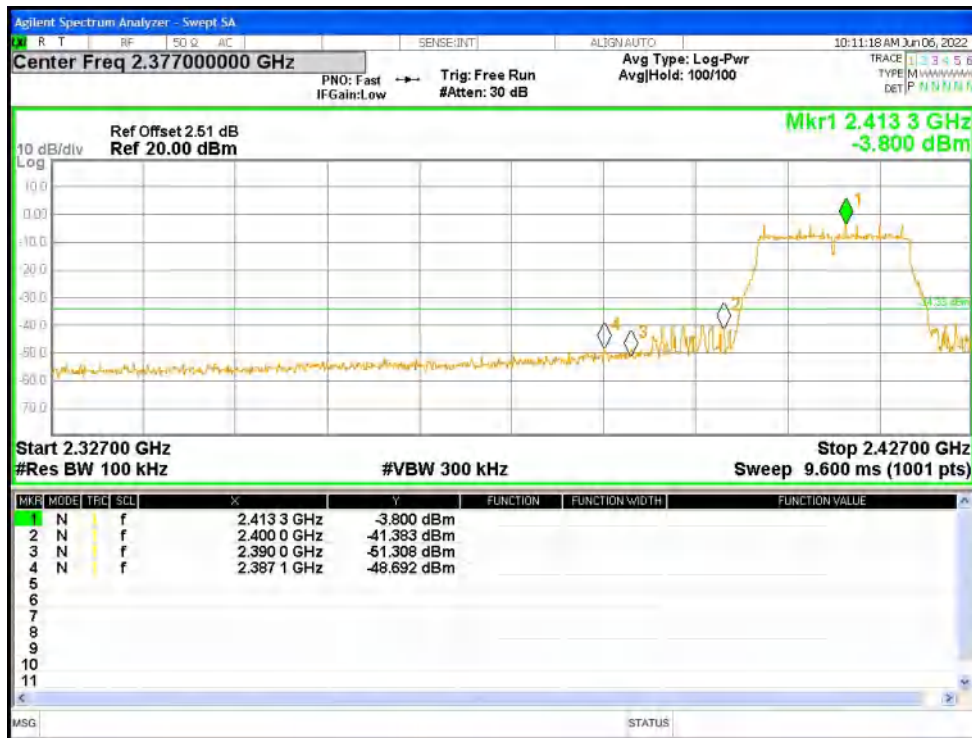

Band Edge NVNT g 2462MHz Ant1 Ref




Band Edge NVNT g 2462MHz Ant1 Emission




Band Edge NVNT n20 2412MHz Ant1 Ref




Band Edge NVNT n20 2412MHz Ant1 Emission

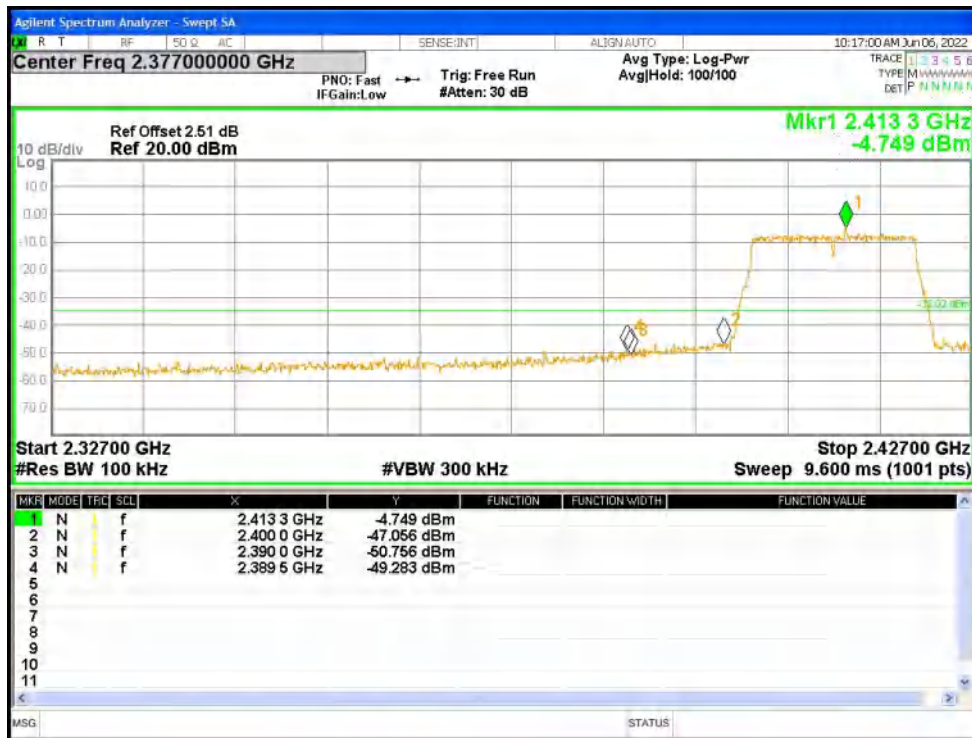


Band Edge NVNT n20 2462MHz Ant1 Ref

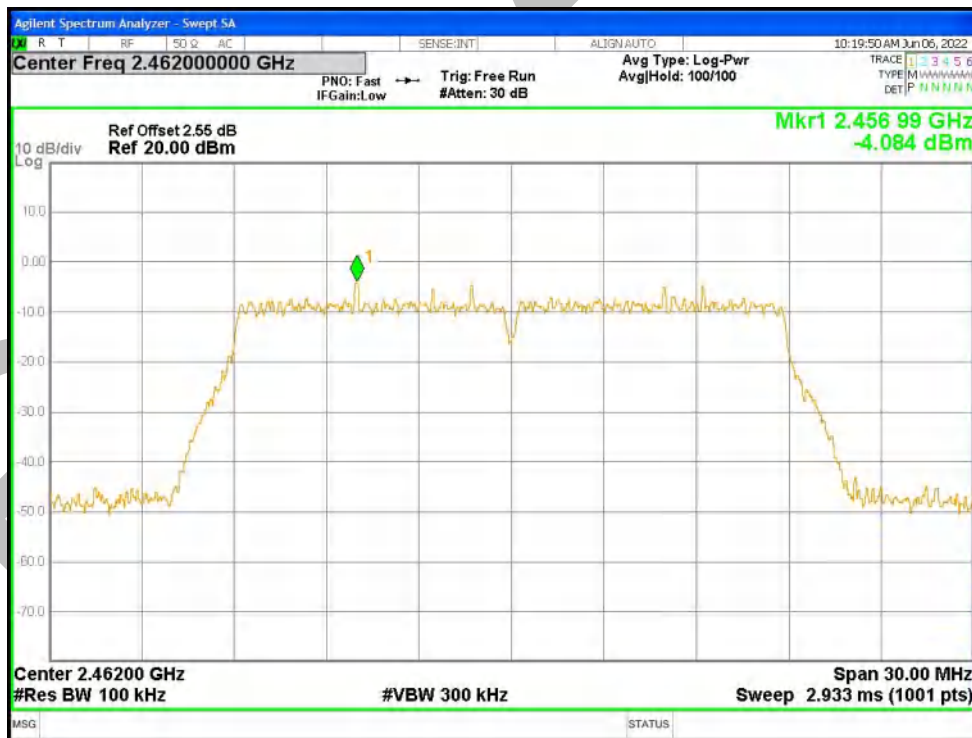


Band Edge NVNT n20 2462MHz Ant1 Emission

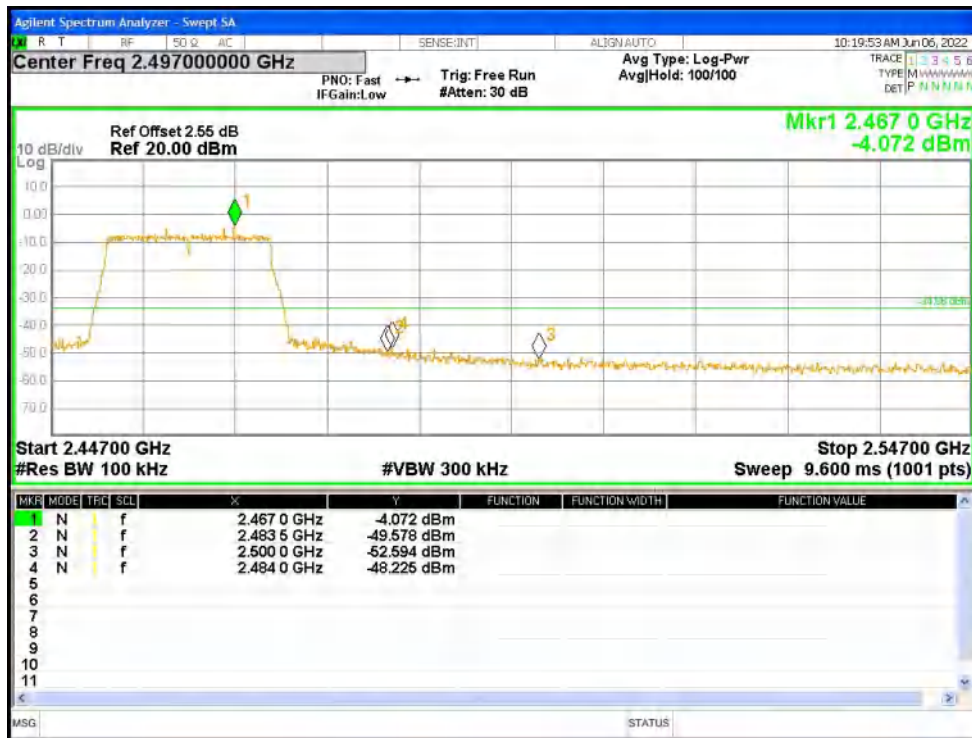


Band Edge NVNT n40 2422MHz Ant1 Ref

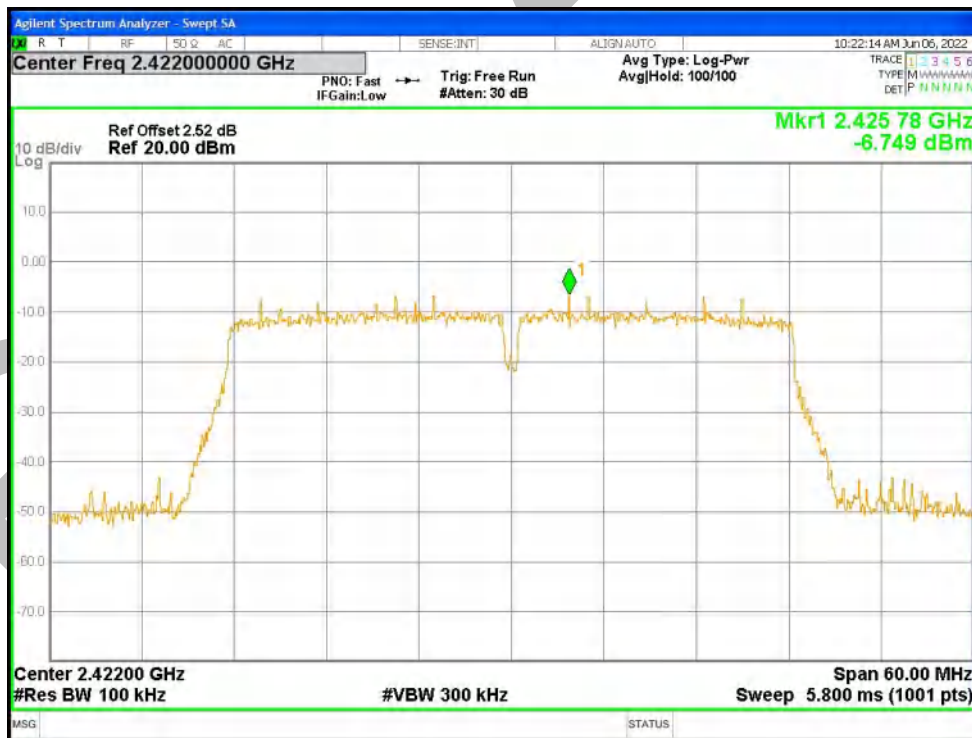


Band Edge NVNT n40 2422MHz Ant1 Emission

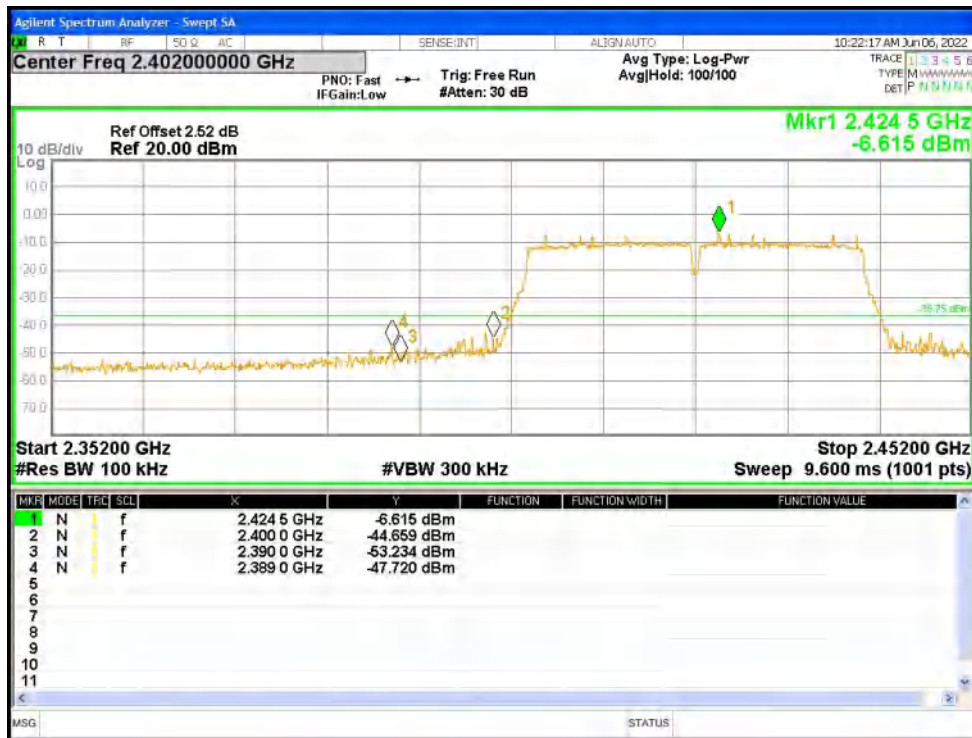

Band Edge NVNT n40 2452MHz Ant1 Ref

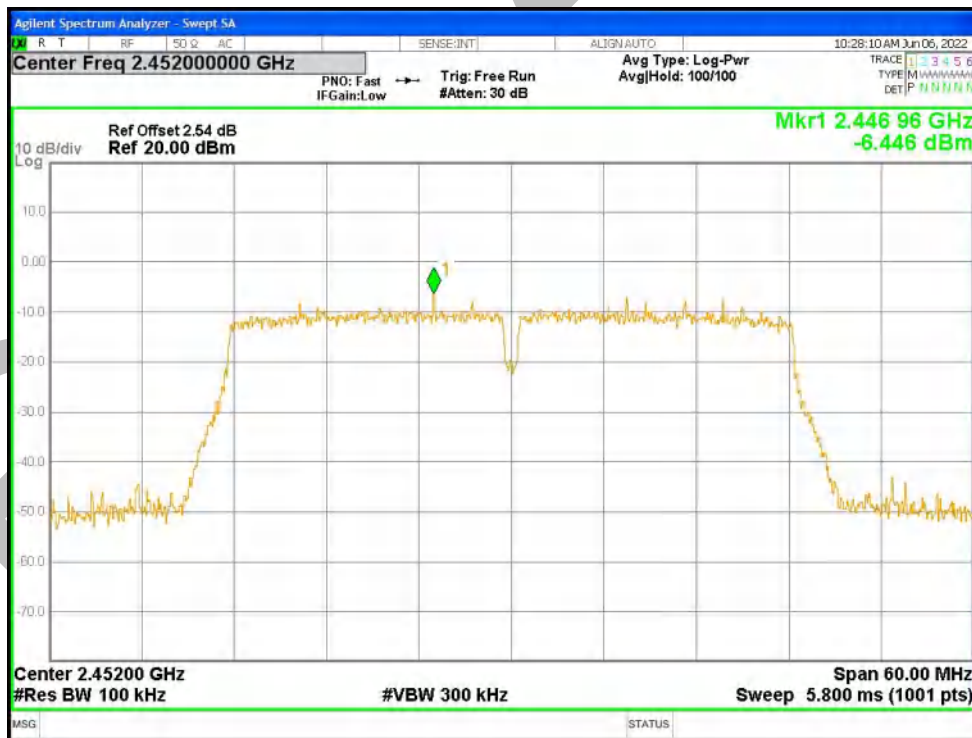

Band Edge NVNT n40 2452MHz Ant1 Emission

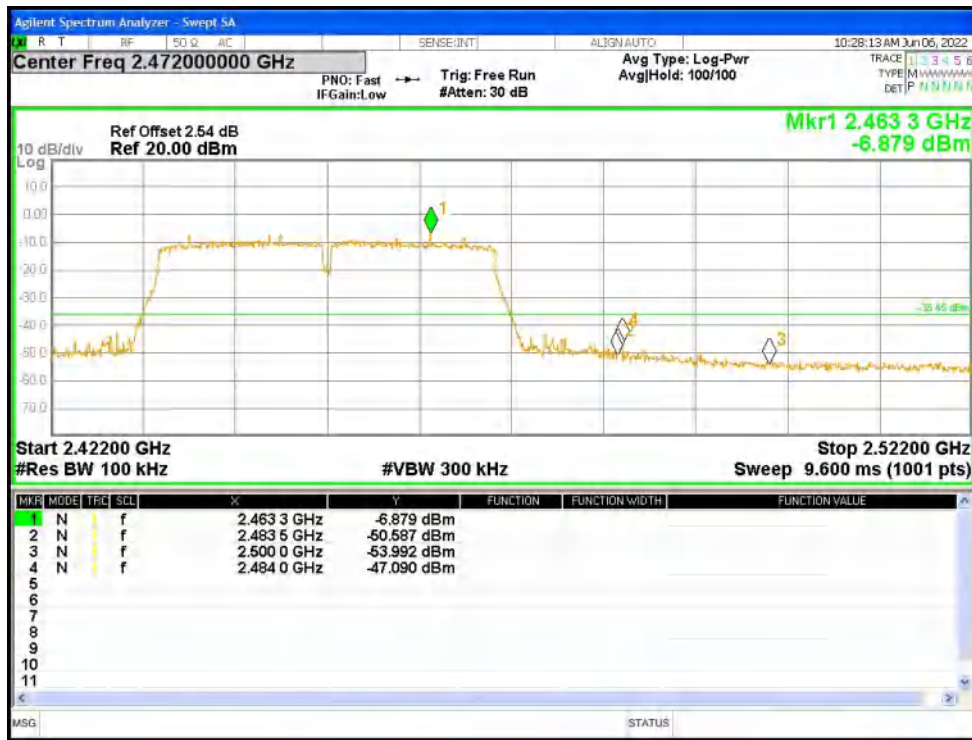


BlueE




### 22.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-49.89	-30	Pass
NVNT	b	2437	Ant1	-49.74	-30	Pass
NVNT	b	2462	Ant1	-49.54	-30	Pass
NVNT	g	2412	Ant1	-40.3	-30	Pass
NVNT	g	2437	Ant1	-40.9	-30	Pass
NVNT	g	2462	Ant1	-40.63	-30	Pass
NVNT	n20	2412	Ant1	-40.97	-30	Pass
NVNT	n20	2437	Ant1	-40.64	-30	Pass
NVNT	n20	2462	Ant1	-41.12	-30	Pass
NVNT	n40	2422	Ant1	-37.61	-30	Pass
NVNT	n40	2437	Ant1	-38.88	-30	Pass
NVNT	n40	2452	Ant1	-38.85	-30	Pass


Tx. Spurious NVNT b 2412MHz Ant1 Ref

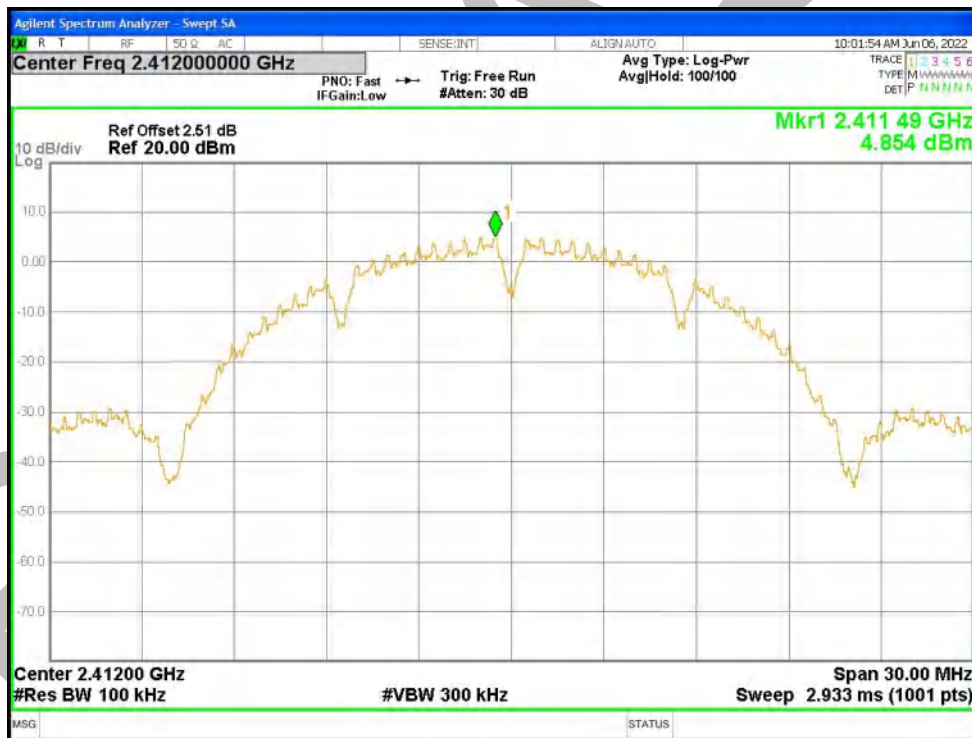


Tx. Spurious NVNT b 2412MHz Ant1 Emission

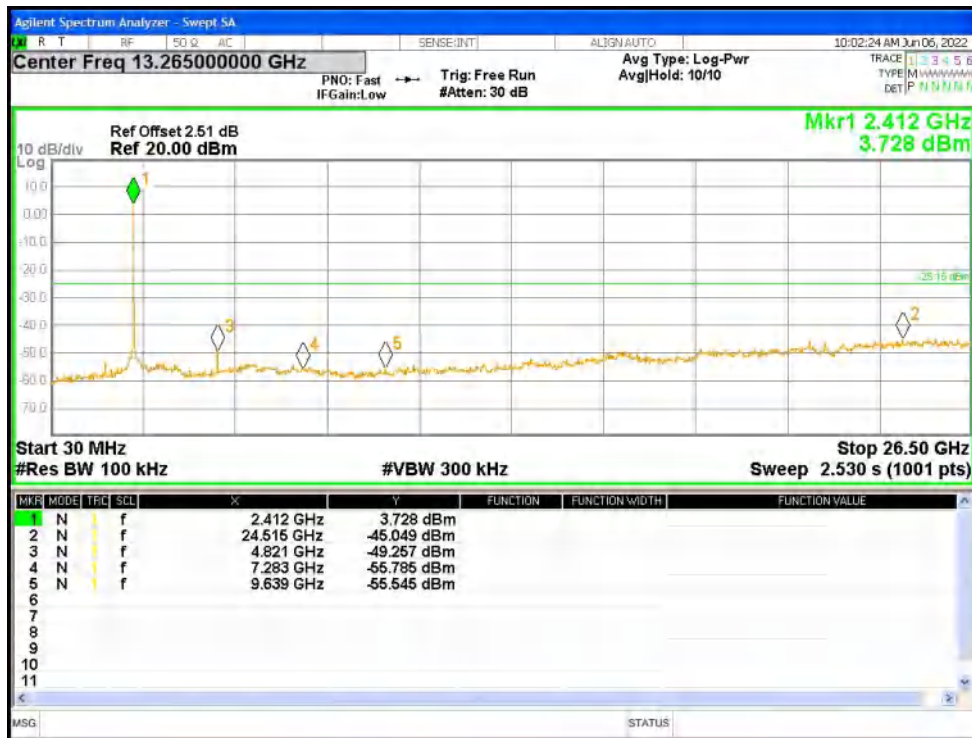

Tx. Spurious NVNT b 2437MHz Ant1 Ref

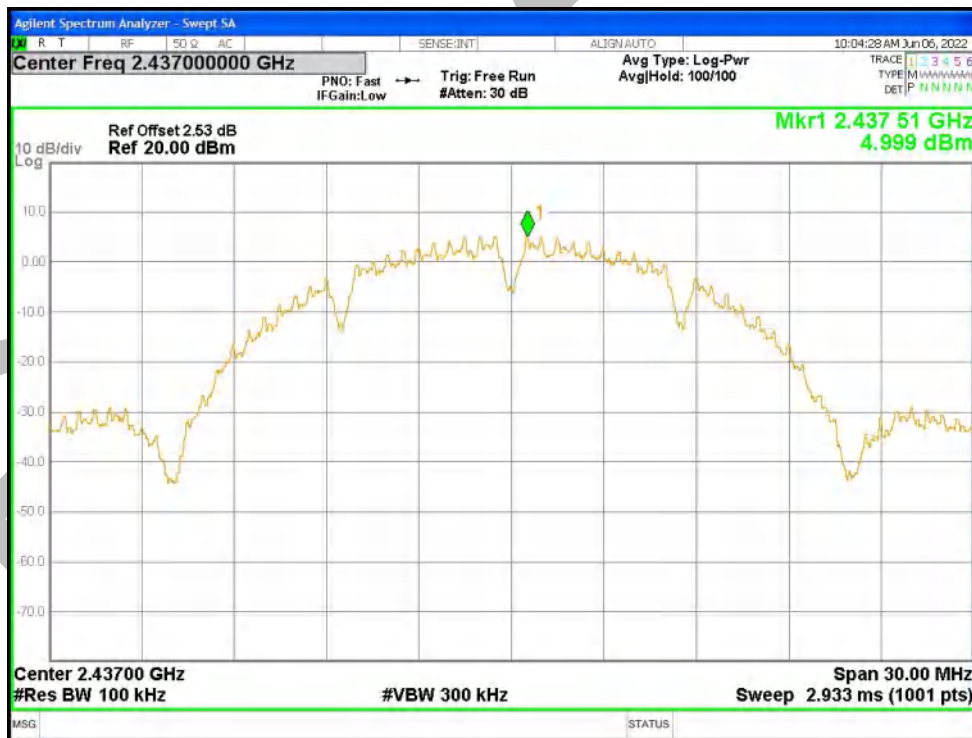


Tx. Spurious NVNT b 2437MHz Ant1 Emission

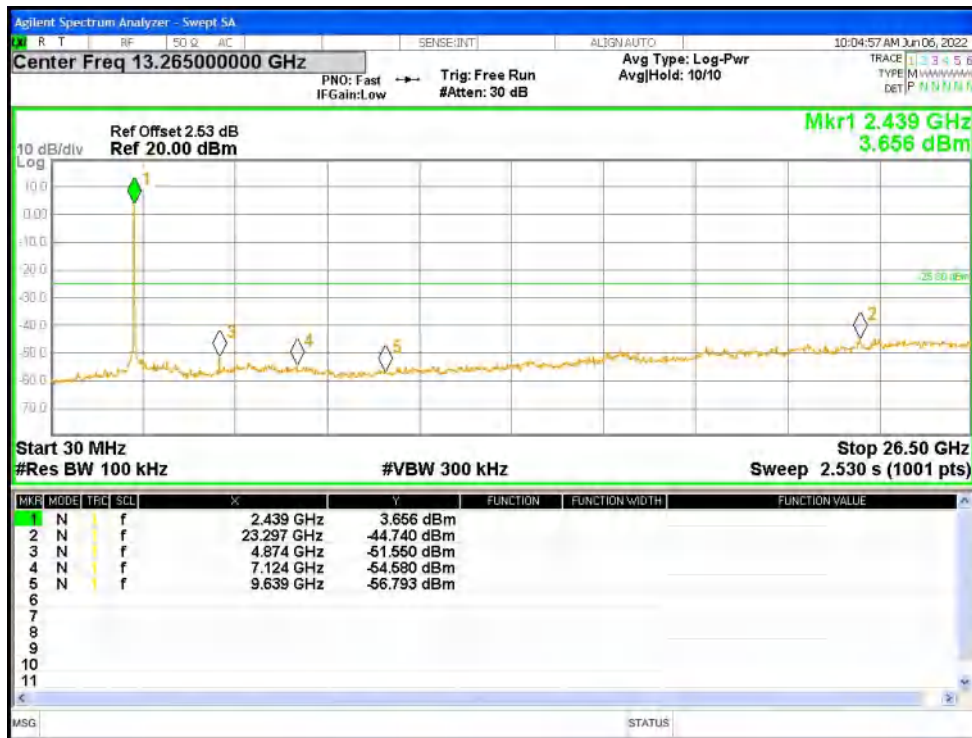

Tx. Spurious NVNT b 2462MHz Ant1 Ref



Tx. Spurious NVNT b 2462MHz Ant1 Emission

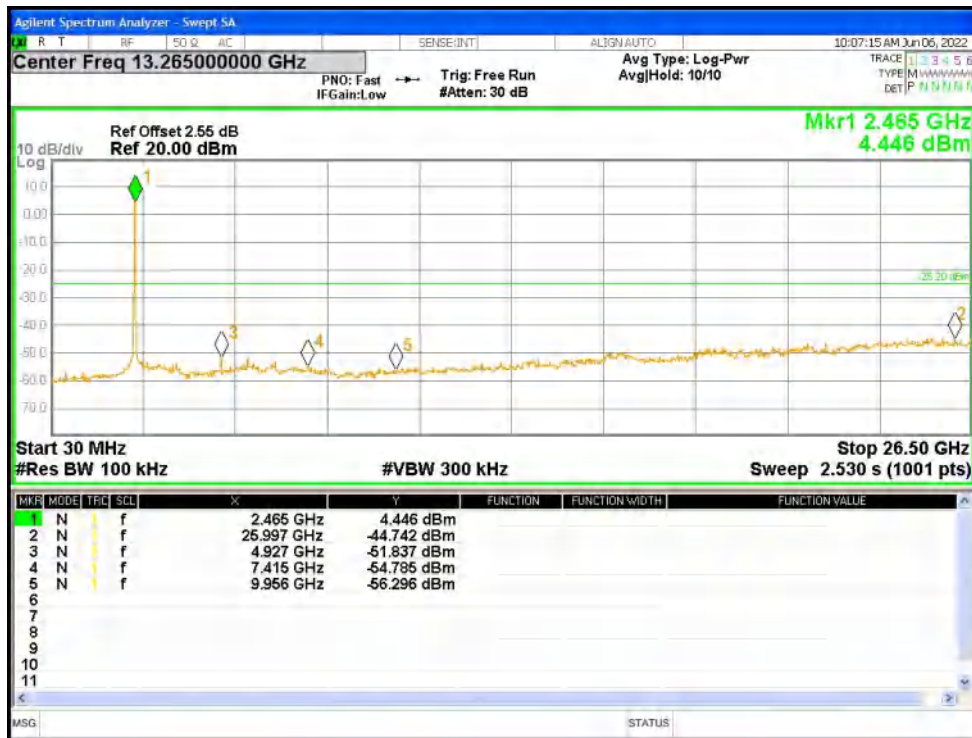


Tx. Spurious NVNT g 2412MHz Ant1 Ref




Tx. Spurious NVNT g 2412MHz Ant1 Emission




Tx. Spurious NVNT g 2437MHz Ant1 Ref

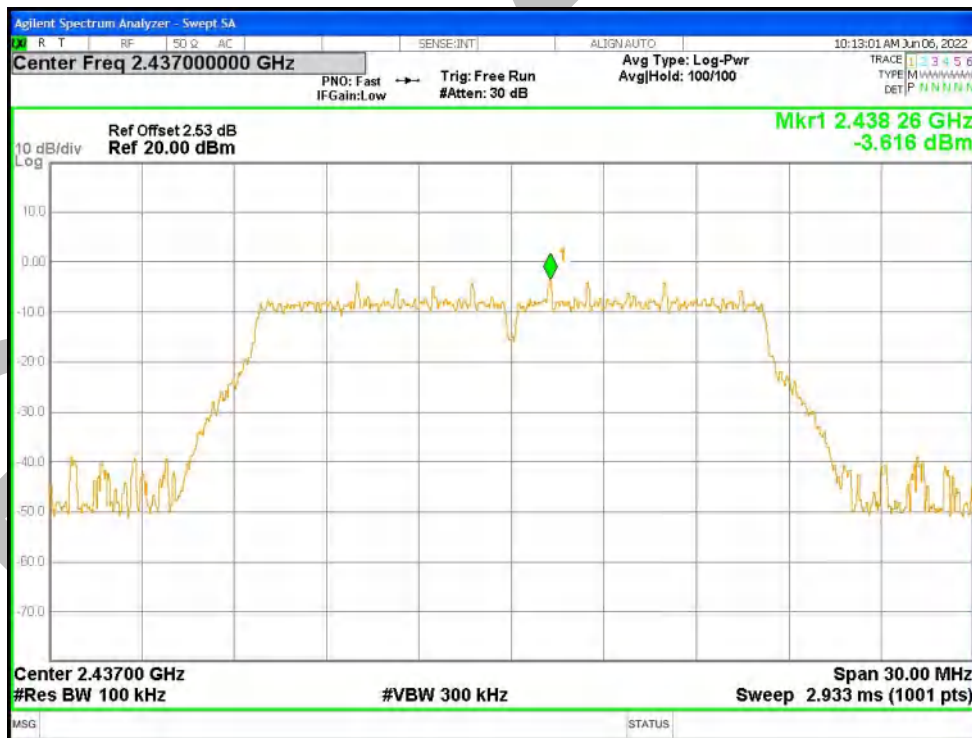

Tx. Spurious NVNT g 2437MHz Ant1 Emission

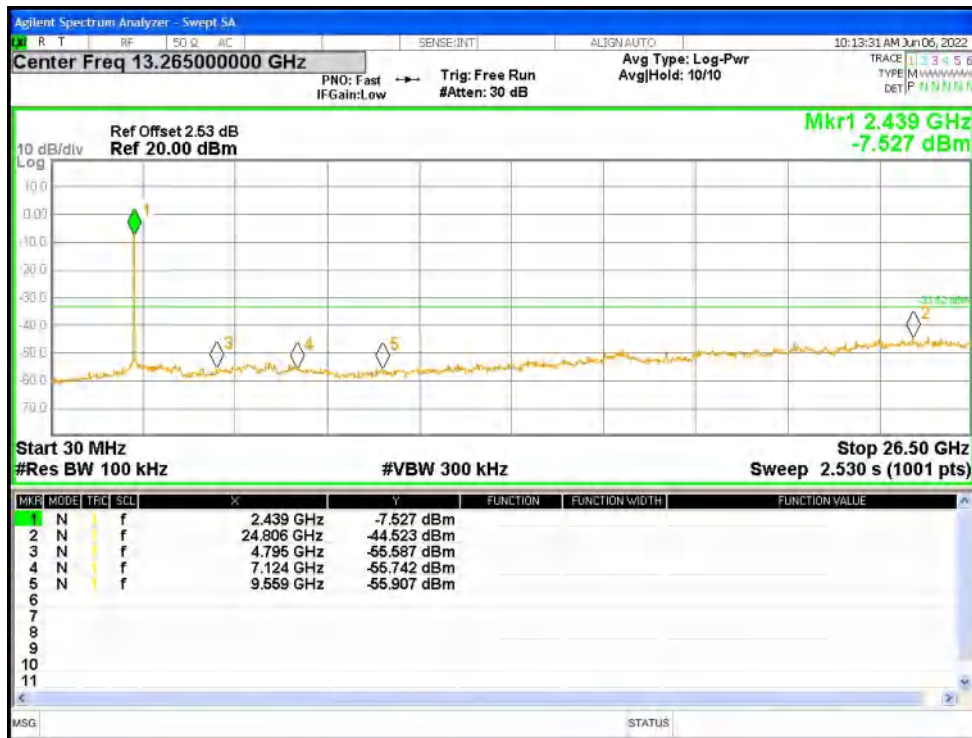


Tx. Spurious NVNT g 2462MHz Ant1 Ref

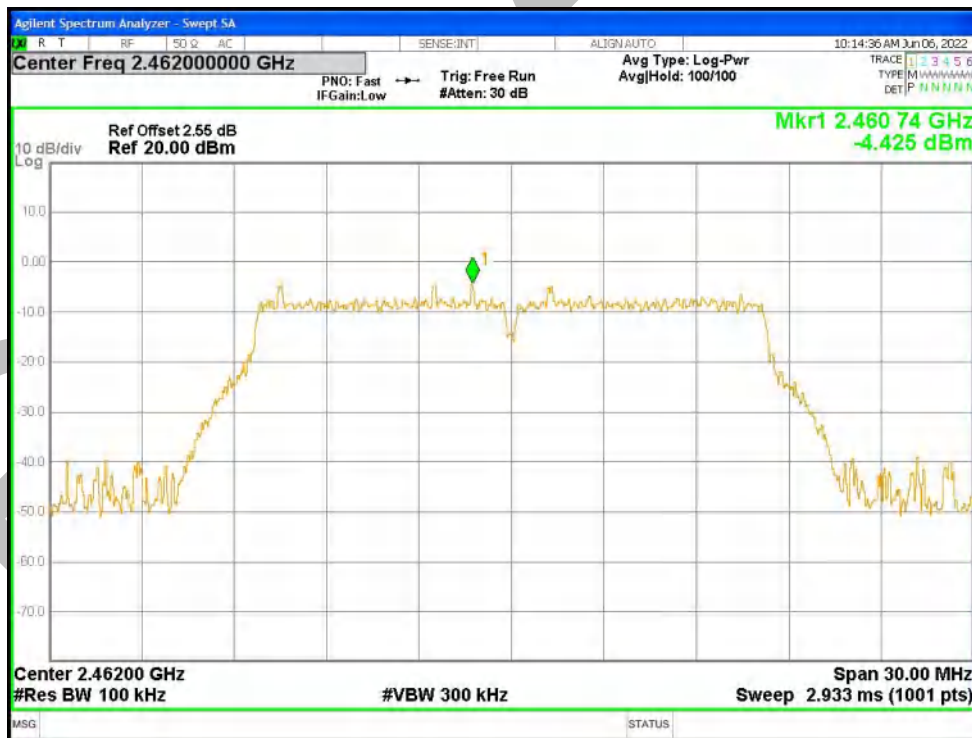

Tx. Spurious NVNT g 2462MHz Ant1 Emission




Tx. Spurious NVNT n20 2412MHz Ant1 Ref

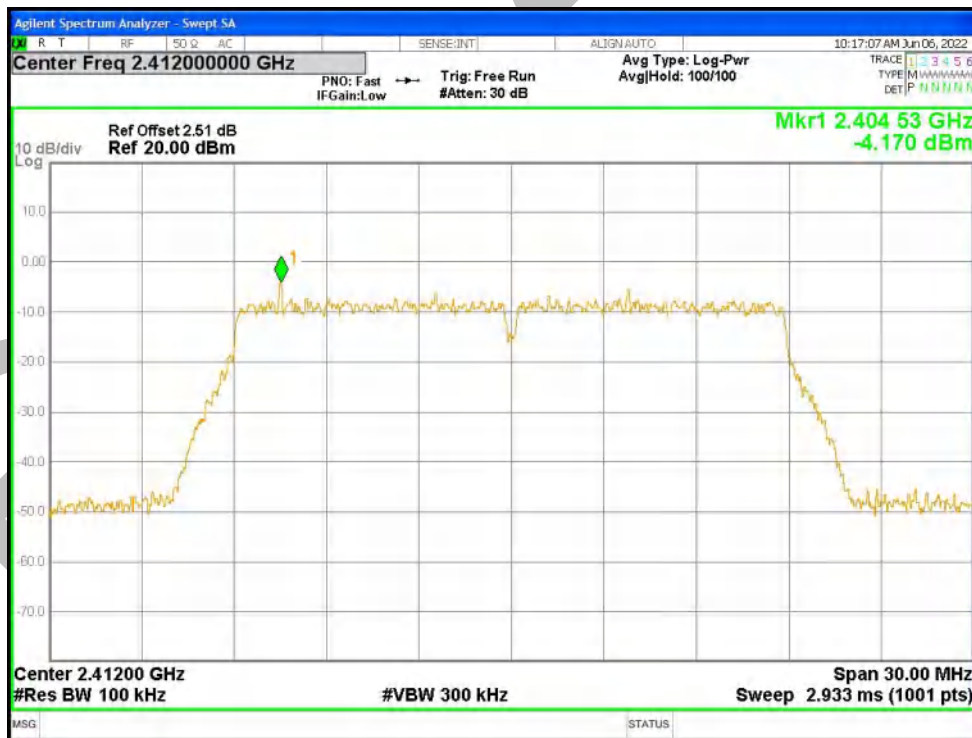

Tx. Spurious NVNT n20 2412MHz Ant1 Emission



Tx. Spurious NVNT n20 2437MHz Ant1 Ref

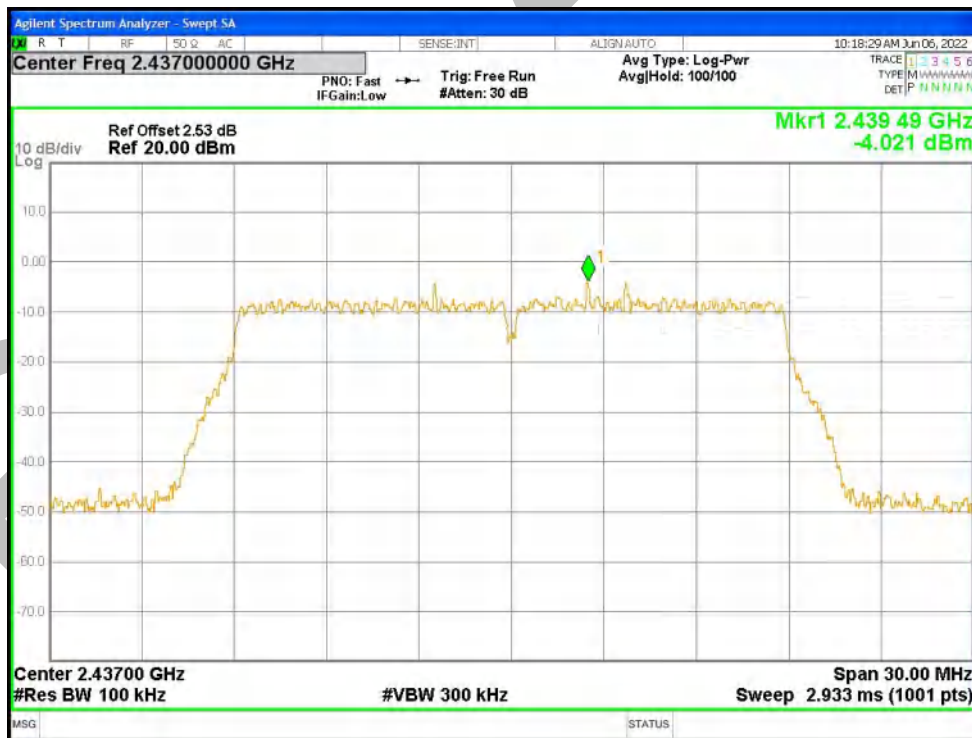


Tx. Spurious NVNT n20 2437MHz Ant1 Emission






Tx. Spurious NVNT n20 2462MHz Ant1 Ref

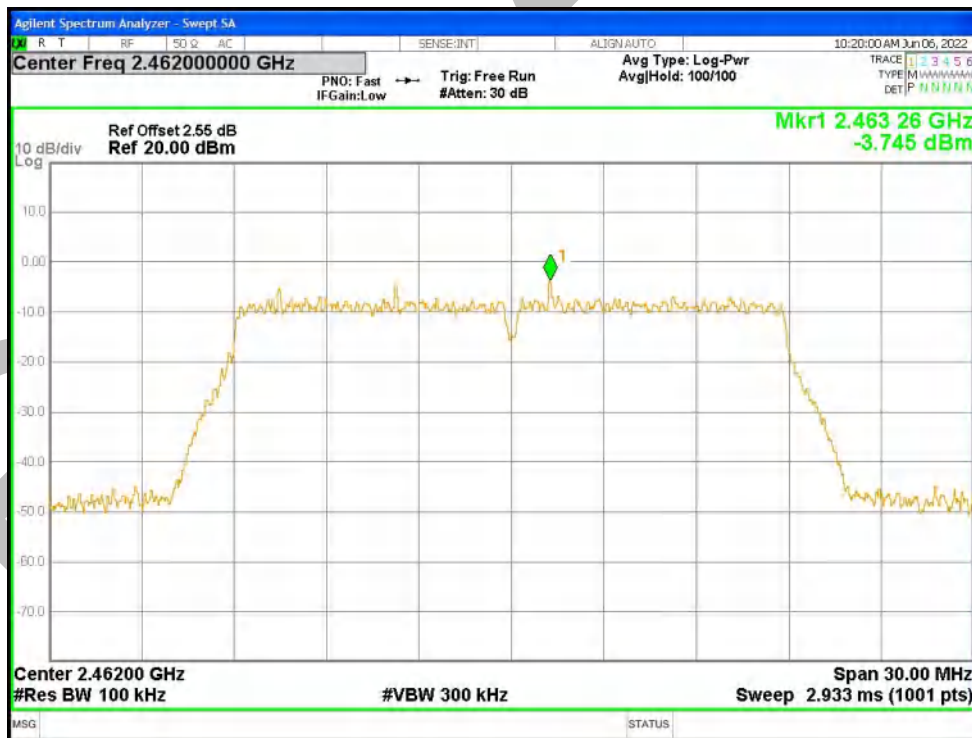

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

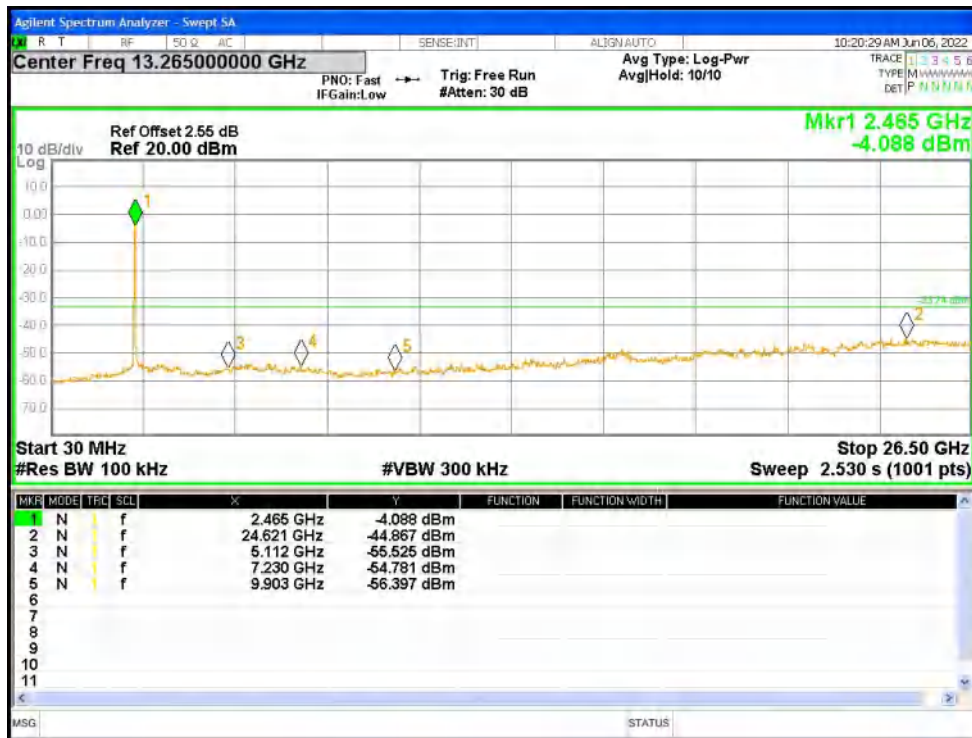

Tx. Spurious NVNT n40 2422MHz Ant1 Ref



Tx. Spurious NVNT n40 2422MHz Ant1 Emission




Tx. Spurious NVNT n40 2437MHz Ant1 Ref



Tx. Spurious NVNT n40 2437MHz Ant1 Emission



Tx. Spurious NVNT n40 2452MHz Ant1 Ref

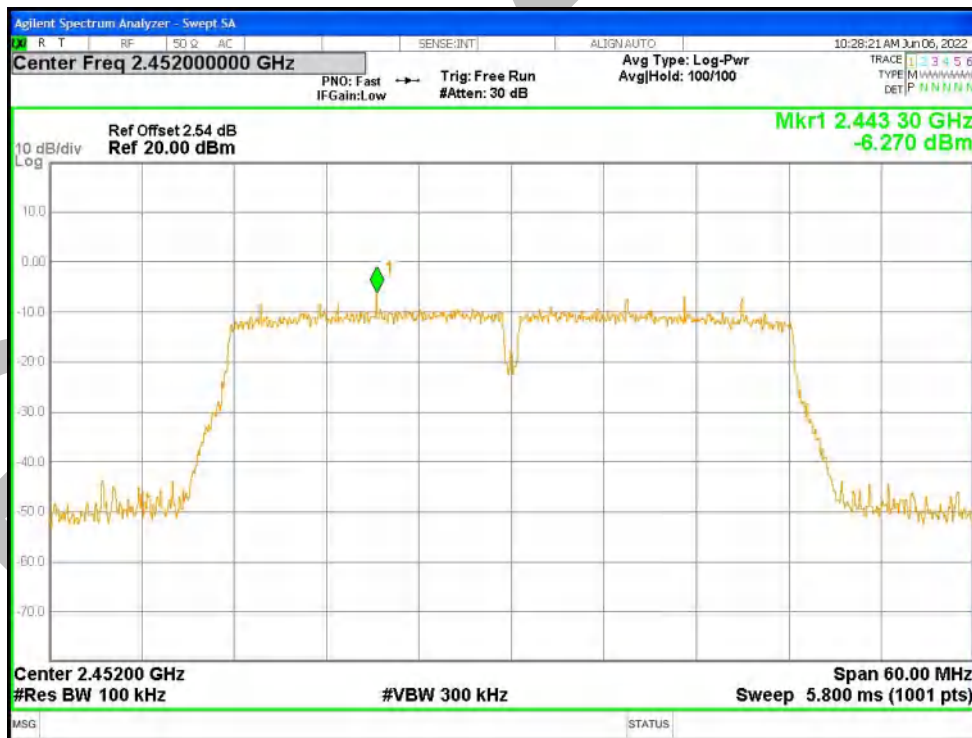

Tx. Spurious NVNT n40 2452MHz Ant1 Emission




BlueEK

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### Conducted Emissions at AC Power Line (150kHz-30MHz)



**Radiated Spurious Emissions**

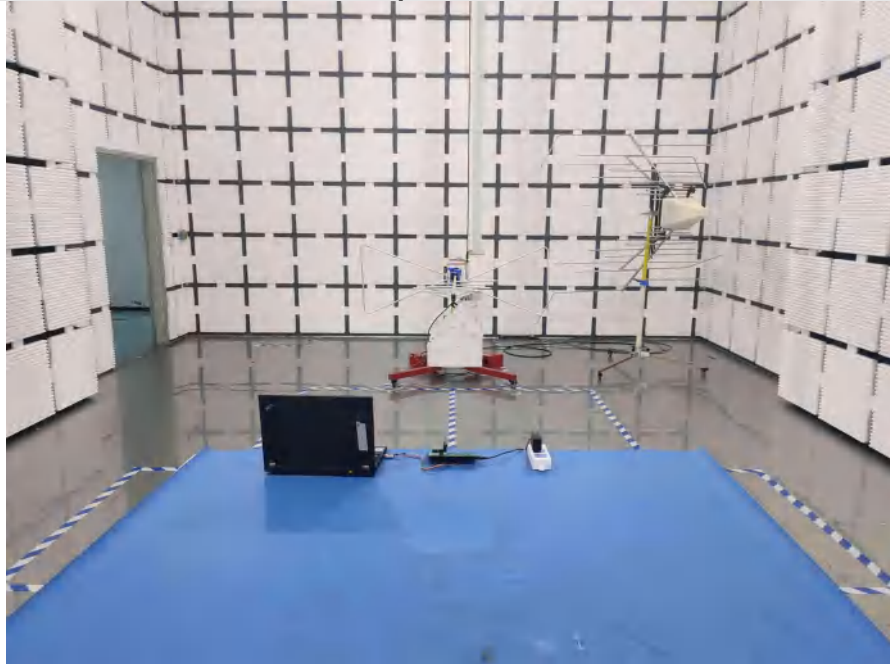

**APPENDIX B: PHOTOGRAPHS OF EUT**

Reference to the test report No. BLA-EMC-202204-A1201

**----END OF REPORT----**

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia