

TEST REPORT

Product Name : Wifi/bt Module
Brand Mark : FN-LINK
Model No. : L297B-SR
FCC ID : 2AATL-L297BSR
Report Number : BLA-EMC-202203-A4006
Date of Sample Receipt : 2022/3/9
Date of Test : 2022/3/9 to 2022/5/7
Date of Issue : 2022/5/7
Test Standard : 47 CFR Part 1.1307, Part 1.1310 greater than 20cm
Test Result : Pass

Prepared for:

FN-LINK TECHNOLOGY LIMITED

**No.8, Litong Road, Liuyang Economic & Technical Development Zone,
Changsha, Hunan, CHINA**

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Jozu

Approved by:

Blue Zhong

Review by:

Sueels

Date:

2022/5/7



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/5/7	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	4
2	GENERAL INFORMATION	5
3	GENERAL DESCRIPTION OF E.U.T.	5
4	BLOCK DIAGRAM OF EUT CONNECTION	6
5	LABORATORY LOCATION	7
6	RF EXPOSURE COMPLIANCE REQUIREMENT	8
6.1	LIMITS	8
6.2	TEST PROCEDURE	8
6.3	EUT RF EXPOSURE EVALUATION	9

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
RF Exposure	47 CFR Part 1.1307, Part 1.1310 greater than 20cm	CFR 47 Part 1.1310	CFR 47 Part 1.1310	PASS

BlueAsia

2 GENERAL INFORMATION

Applicant	FN-LINK TECHNOLOGY LIMITED
Address	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
Manufacturer	FN-LINK TECHNOLOGY LIMITED
Address	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
Factory	FN-LINK TECHNOLOGY LIMITED
Address	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
Product Name	Wifi/bt Module
Test Model No.	L297B-SR

3 GENERAL DESCRIPTION OF E.U.T.


Hardware Version	1.0
Software Version	1.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	External Antenna
Antenna Gain:	4dBi(Provided by the applicant)

Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	External Antenna
Antenna Gain:	4dBi(Provided by the applicant)

Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7

Antenna Type:	External Antenna
Antenna Gain:	4dBi(Provided by the applicant)
Operation Frequency:	Band 1 : 5180MHz-5240MHz; Band 2:5260MHz~5320MHz Band 3: 5500MHz~5700MHz; Band 4 : 5745MHz-5825MHz
Channel numbers:	Band 1: 802.11a/802.11n(HT20)/802.11ac(HT20): 4, 802.11n(HT40)/802.11ac(HT40):2, 802.11ac(HT80): 1 Band 2: 802.11a/802.11n(HT20)/802.11ac(HT20): 4, 802.11n(HT40)/802.11ac(HT40):2, 802.11ac(HT80): 1 Band 3: 802.11a/802.11n(HT20)/802.11ac(HT20): 11, 802.11n(HT40)/802.11ac(HT40):5, 802.11ac(HT80): 3 Band 4: 802.11a/802.11(HT20)/802.11ac(HT20): 5, 802.11n(HT40)/802.11ac(HT40): 2, 802.11ac(HT80): 1
Channel separation:	802.11a/n/ac(HT20): 20MHz, 802.11n/ac(HT40): 40MHz, 802.11ac(HT80): 80MHz
Modulation technology: (IEEE 802.11a/n/ac)	BPSK, QPSK, 16-QAM, 64-QAM, 256QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n/ac):	Up to 866.7Mbps
Antenna Type:	External antenna
Antenna gain:	Antenna 1:4dBi, Antenna 2:4dBi
Note:	Antenna number : 2 SISO mode: 802.11a MIMO mode: 802.11n(HT20)/ 802.11n(HT40)/ 802.11ac(HT20)/ 802.11ac(HT40)/ 802.11ac(HT80) Directional gain of MIMO mode: $4+10\log_2=7.01\text{dBi}$
Remark:The Antenna Gain is supplied by the customer.BlueAsia is not responsible for this data	

4 BLOCK DIAGRAM OF EUT CONNECTION

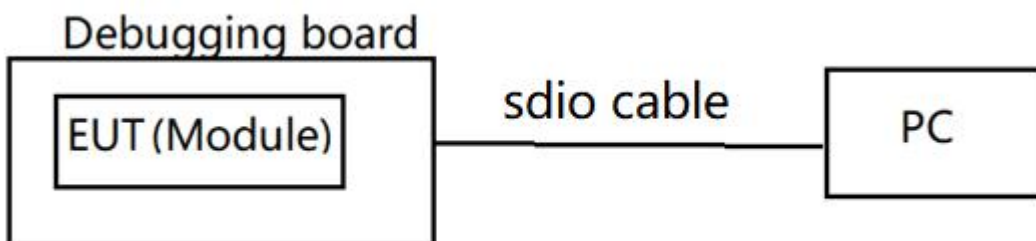

5 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

BlueAsia

6 RF EXPOSURE COMPLIANCE REQUIREMENT

6.1 LIMITS

According to FCC Part1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in part1.1307(b)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

F= Frequency in MHz

Friis Formula

Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

6.2 TEST PROCEDURE

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

6.3 EUT RF EXPOSURE EVALUATION

Antenna Gain: 2dBi

Antenna Gain: The maximum Gain measured in fully anechoic chamber is 1.584 in linear scale.

Output Power Into Antenna & RF Exposure Evaluation Distance:

BLE 1M:

Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Output Power to Antenna (mW)	Power Density at R = 20 cm (mW/cm ²)	Limit	Result
2402	7.684	5.867	0.00242	1.0	PASS

BT(GFSK):

Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Output Power to Antenna (mW)	Power Density at R = 20 cm (mW/cm ²)	Limit	Result
2480	7.523	5.653	0.00237	1.0	PASS

2.4G WIFI 802.11b:

Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Output Power to Antenna (mW)	Power Density at R = 20 cm (mW/cm ²)	Limit	Result
2412	17.519	56.48	0.00552	1.0	PASS

5G WIFI 802.11a:

Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Output Power to Antenna (mW)	Power Density at R = 20 cm (mW/cm ²)	Limit	Result
5320	16.16	41.30	0.00509	1.0	PASS

Note: Refer to report No. BLA-EMC-202201-A8402/03/04 for EUT test Max Conducted Peak Output Power value.

The distance r (4th column) calculated from the Fries transmission formula is far greater than 20 cm separation Requirement

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.