


Scale Type

Log

Span 27.62 MHz Sweep 65.87 ms (1000 pts)



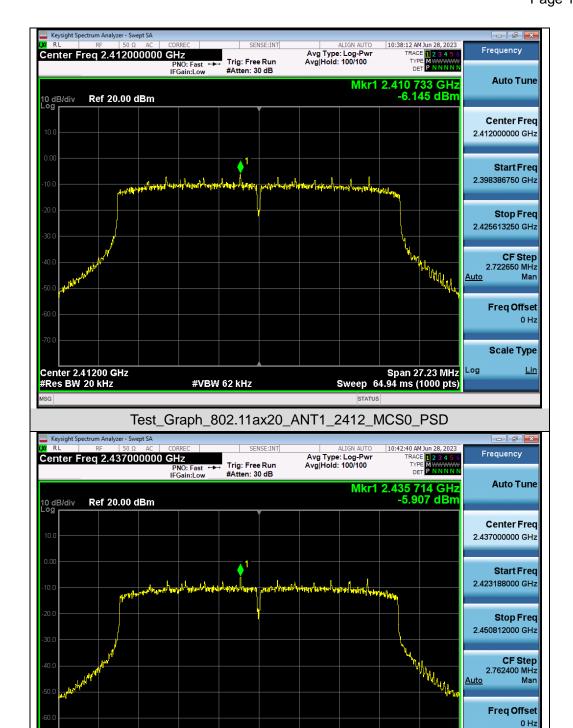


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ax20_ANT1_2437_MCS0_PSD


#VBW 62 kHz


Center 2.43700 GHz #Res BW 20 kHz



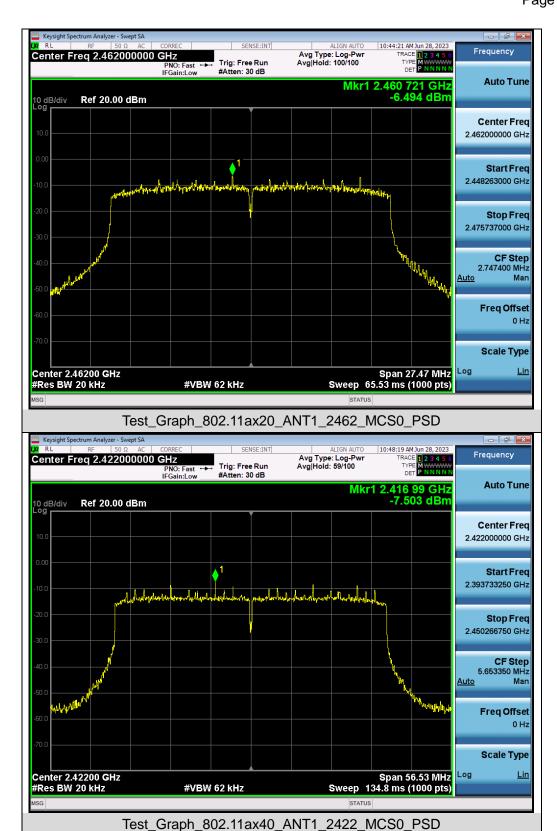



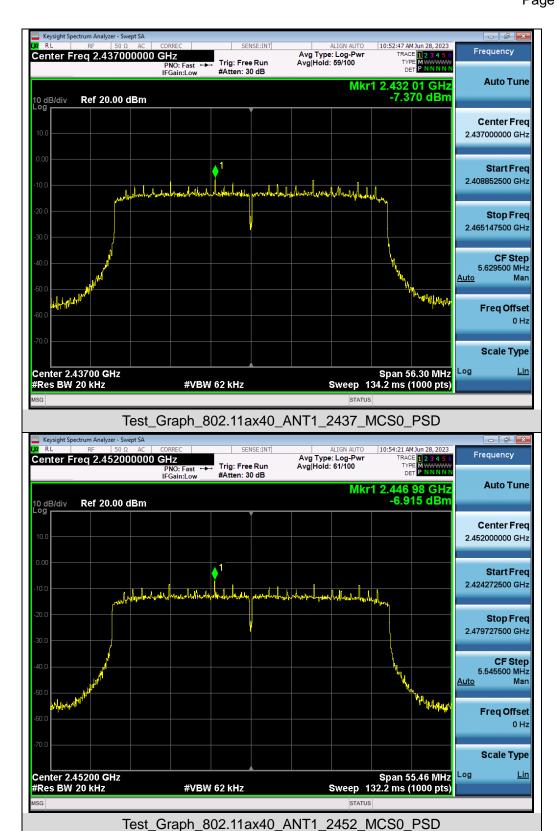



Freq Offset 0 Hz

Scale Type

Log

Span 13.55 MHz Sweep 32.30 ms (1000 pts)






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT2_2437_1Mbps_PSD

#VBW 62 kHz

Center 2.437000 GHz #Res BW 20 kHz




Freq Offset

Scale Type

Log

Span 24.49 MHz Sweep 58.41 ms (1000 pts)



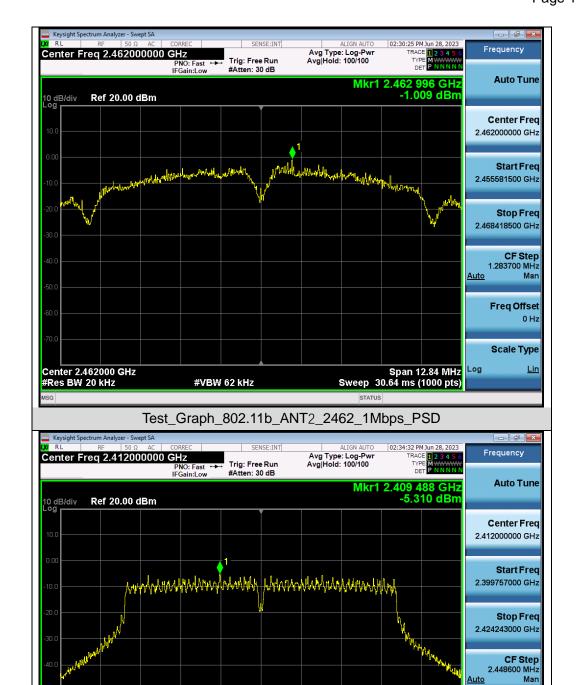


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT2_2412_6Mbps_PSD

#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz




Freq Offset 0 Hz

Scale Type

Log

Span 24.49 MHz Sweep 58.41 ms (1000 pts)



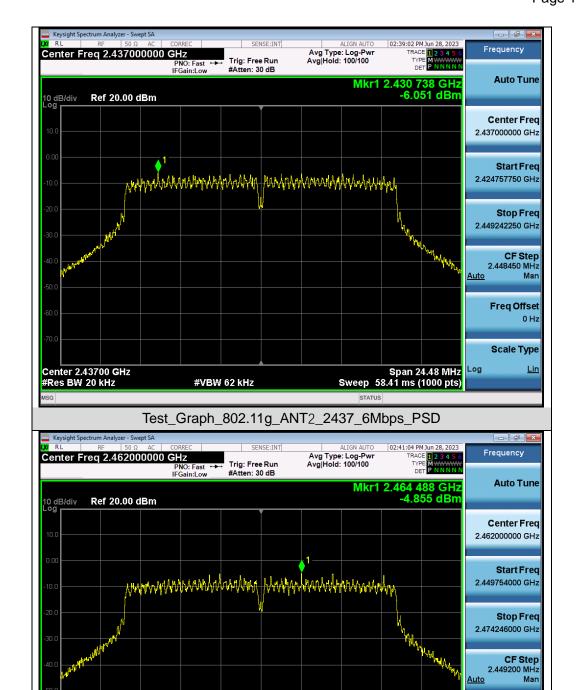


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT2_2462_6Mbps_PSD

#VBW 62 kHz

Center 2.46200 GHz #Res BW 20 kHz




Freq Offset 0 Hz

Scale Type

Log

Span 25.92 MHz Sweep 61.80 ms (1000 pts)



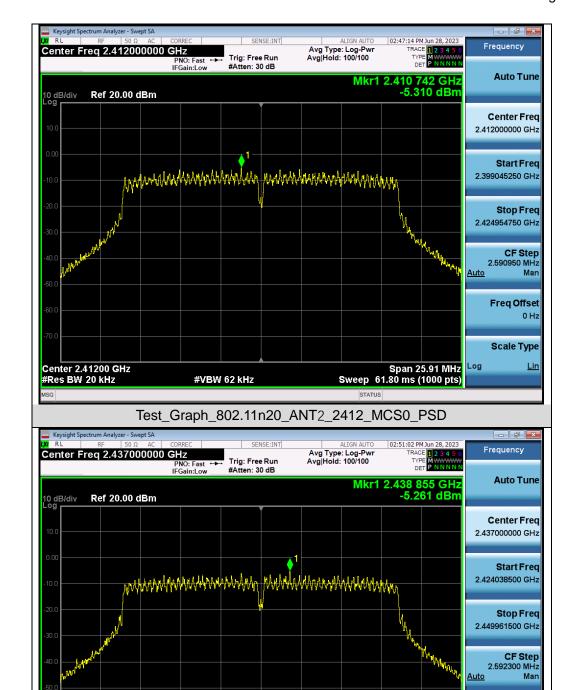


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT2_2437_MCS0_PSD

#VBW 62 kHz

Center 2.43700 GHz #Res BW 20 kHz




0 Hz

Scale Type

Log

Span 54.28 MHz Sweep 129.4 ms (1000 pts)



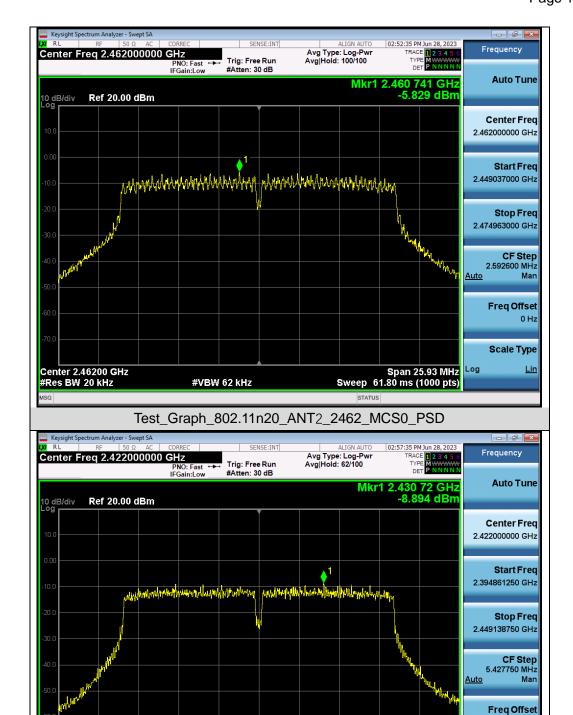


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2422_MCS0_PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz




Freq Offset 0 Hz

Scale Type

Log

Span 54.29 MHz Sweep 129.5 ms (1000 pts)



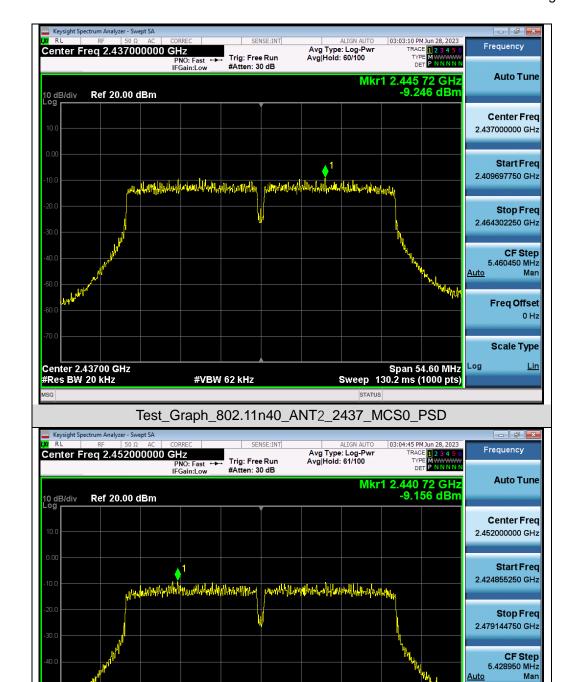


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2452_MCS0_PSD

#VBW 62 kHz

Center 2.45200 GHz #Res BW 20 kHz




0 Hz

Scale Type

Log

Span 27.35 MHz Sweep 65.20 ms (1000 pts)



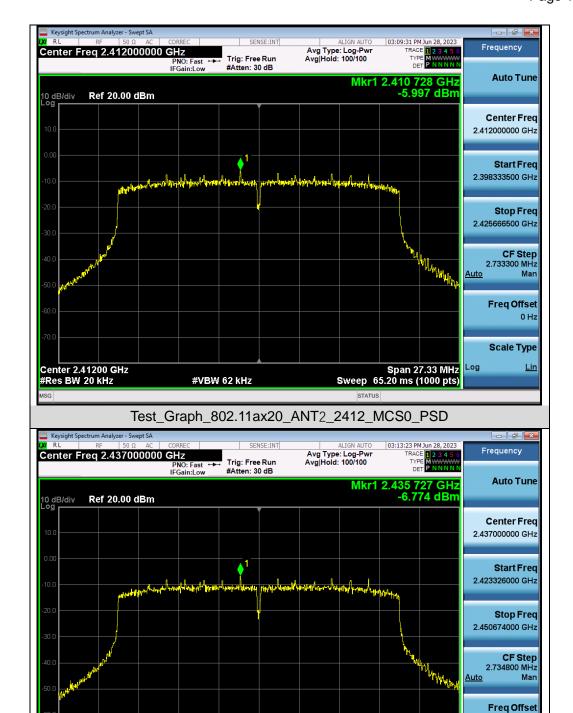


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ax20_ANT2_2437_MCS0_PSD

#VBW 62 kHz

Center 2.43700 GHz #Res BW 20 kHz




Freq Offset 0 Hz

Scale Type

Log

Span 56.60 MHz Sweep 134.9 ms (1000 pts)



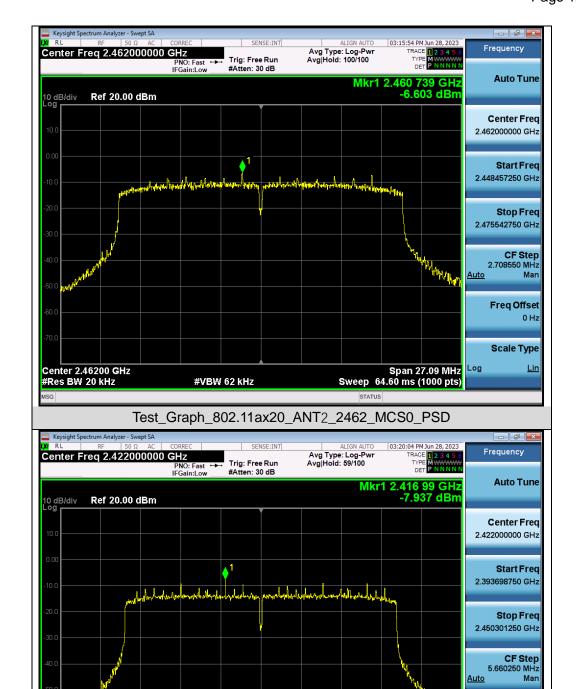


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ax40_ANT2_2422_MCS0_PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz



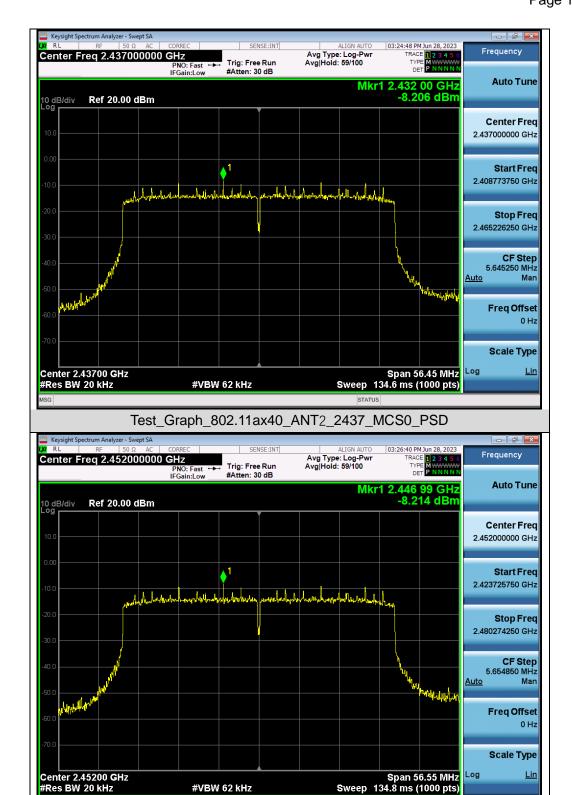

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ax40_ANT2_2452_MCS0_PSD



Report No.: AGC13525230201FE05

Page 126 of 162

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

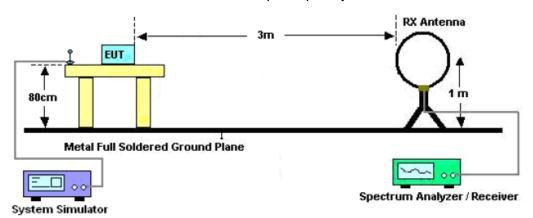

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

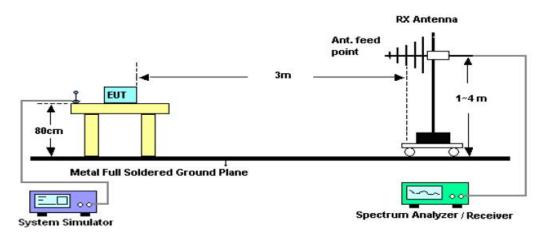

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

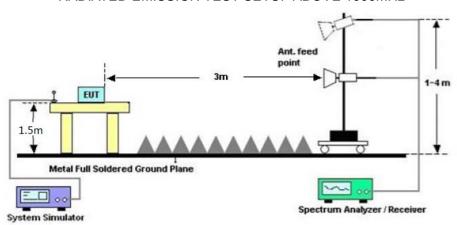

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC13525230201FE05

Page 128 of 162

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

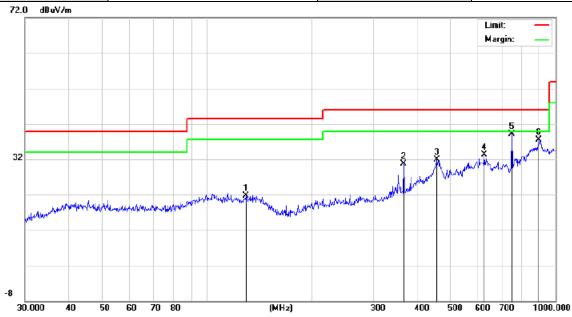


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	1	129.0146	6.46	15.31	21.77	43.50	-21.73	peak
2	3	366.8231	12.94	17.80	30.74	46.00	-15.26	peak
3	4	157.5073	6.04	25.86	31.90	46.00	-14.10	peak
4	6	625.0780	8.07	25.23	33.30	46.00	-12.70	peak
5	* 1	750.1083	14.96	24.06	39.02	46.00	-6.98	peak
6	8	396.9965	6.10	31.42	37.52	46.00	-8.48	peak

RESULT: PASS



EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

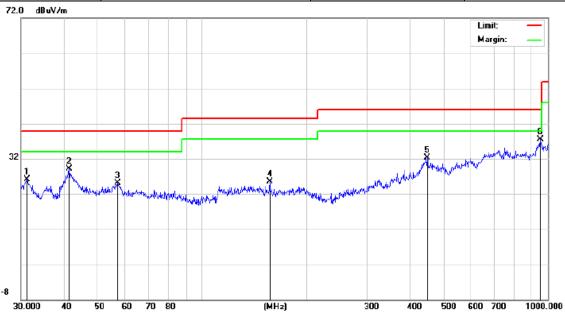

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		31.1798	12.02	13.99	26.01	40.00	-13.99	peak
2		41.2765	12.29	16.91	29.20	40.00	-10.80	peak
3		56.9912	8.11	17.07	25.18	40.00	-14.82	peak
4		157.0074	7.28	18.20	25.48	43.50	-18.02	peak
5		447.9822	6.53	25.74	32.27	46.00	-13.73	peak
6	*	952.0937	6.94	30.52	37.46	46.00	-8.54	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The antenna 1 of 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC13525230201FE05

Page 131 of 162

Radiated emission above 1GHz

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal


Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
56.23	0.08	56.31	74	-17.69	peak
46.91	0.08	46.99	54	-7.01	AVG
50.27	2.21	52.48	74	-21.52	peak
41.66	2.21	43.87	54	-10.13	AVG
	(dBµV) 56.23 46.91 50.27	(dBµV) (dB) 56.23 0.08 46.91 0.08 50.27 2.21	(dBμV) (dB) (dBμV/m) 56.23 0.08 56.31 46.91 0.08 46.99 50.27 2.21 52.48	(dBμV) (dB) (dBμV/m) (dBμV/m) 56.23 0.08 56.31 74 46.91 0.08 46.99 54 50.27 2.21 52.48 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 56.23 0.08 56.31 74 -17.69 46.91 0.08 46.99 54 -7.01 50.27 2.21 52.48 74 -21.52

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.29	0.08	56.37	74	-17.63	peak
4824.000	46.34	80.0	46.42	54	-7.58	AVG
7236.000	51.27	2.21	53.48	74	-20.52	peak
7236.000	42.34	2.21	44.55	54	-9.45	AVG
Remark:	Remark:					

Factor = Antenna Factor + Cable Loss – Pre-amplifier.





EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.37	0.14	56.51	74	-17.49	peak
4874.000	46.25	0.14	46.39	54	-7.61	AVG
7311.000	51.34	2.36	53.7	74	-20.3	peak
7311.000	42.49	2.36	44.85	54	-9.15	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.34	0.14	56.48	74	-17.52	peak
4874.000	46.24	0.14	46.38	54	-7.62	AVG
7311.000	50.27	2.36	52.63	74	-21.37	peak
7311.000	41.09	2.36	43.45	54	-10.55	AVG
emark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			



Report No.: AGC13525230201FE05

Page 133 of 162

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	56.38	0.22	56.6	74	-17.4	peak
4924.000	46.28	0.22	46.5	54	-7.5	AVG
7386.000	50.27	2.64	52.91	74	-21.09	peak
7386.000	41.08	2.64	43.72	54	-10.28	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	-amplifier.			

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	58.64	0.22	58.86	74	-15.14	peak
4924.000	48.52	0.22	48.74	54	-5.26	AVG
7386.000	50.24	2.64	52.88	74	-21.12	peak
7386.000	42.19	2.64	44.83	54	-9.17	AVG
lemark:						
actor = Anter	actor = Antenna Factor + Cable Loss – Pre-amplifier.					

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The antenna 1 of 802.11b mode is the worst case and recorded in the




Test result for band edge emission at restricted bands

EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement

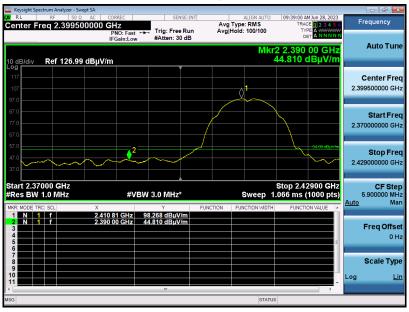


RESULT: PASS







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

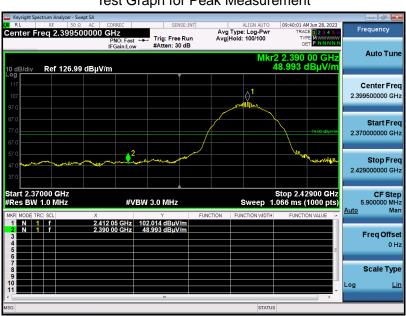

Test Graph for Average Measurement

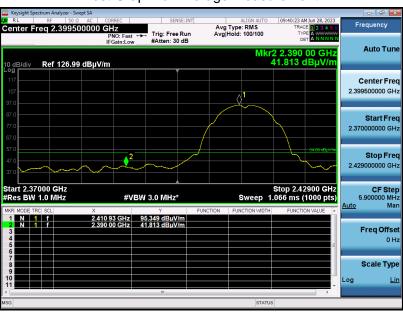






EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

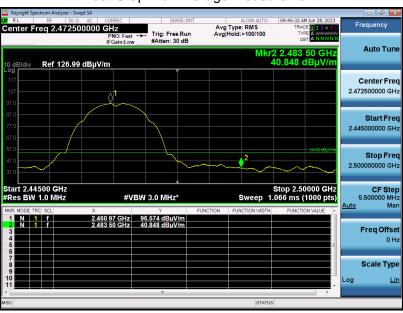







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

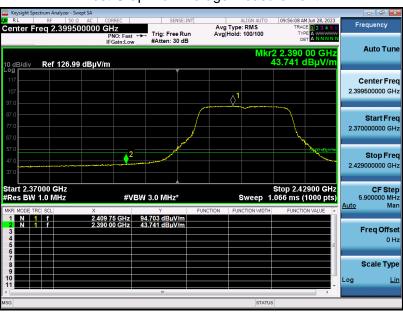







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

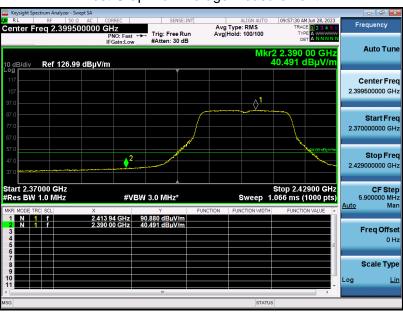






EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

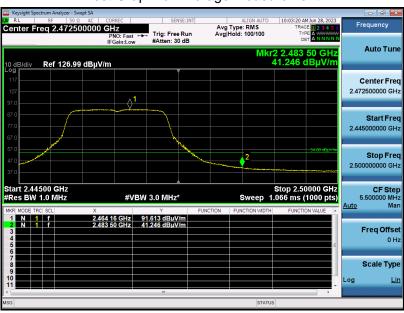






EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

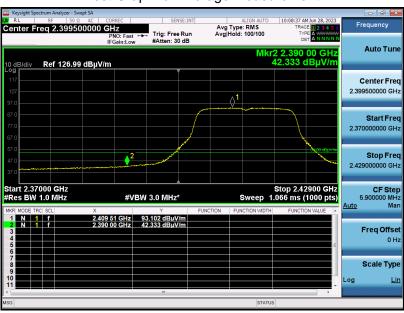







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

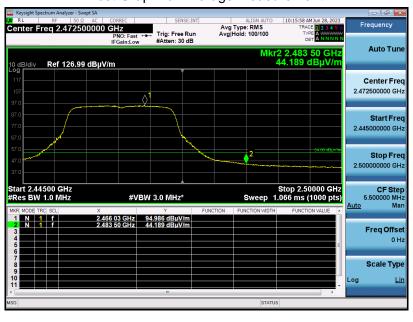






EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

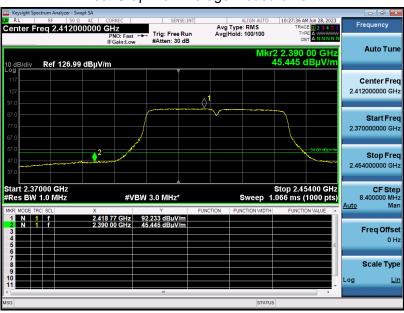







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

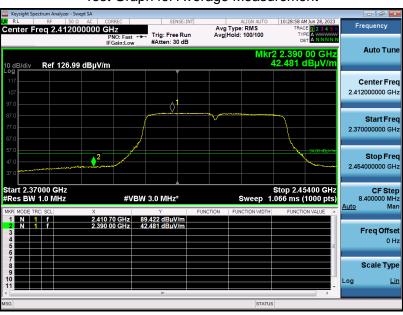







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

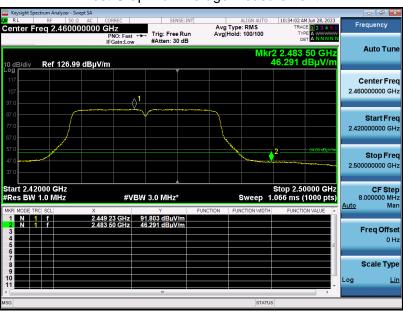







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

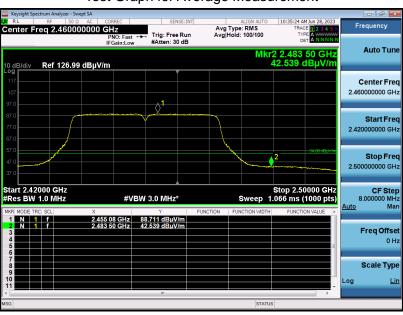







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

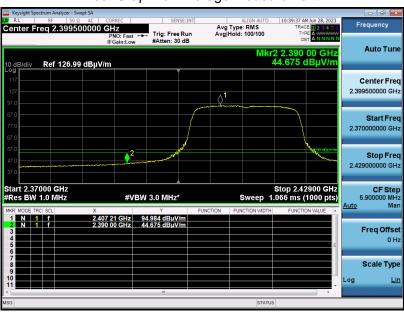







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

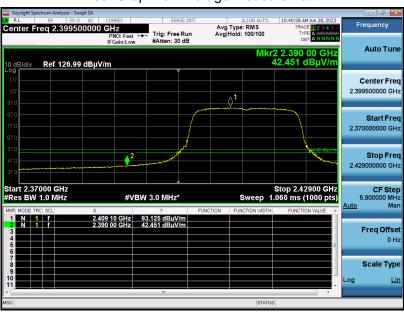







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

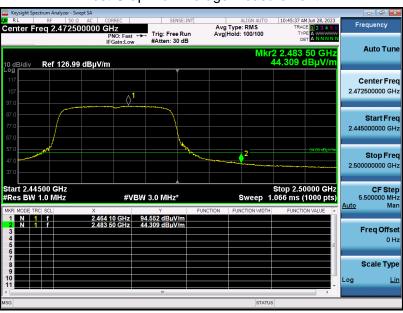







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 with data rate 3.6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

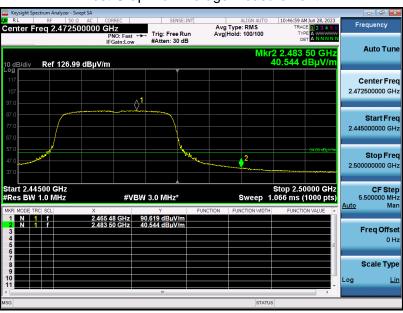








EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement

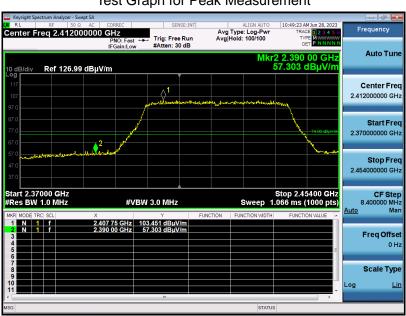

Test Graph for Average Measurement

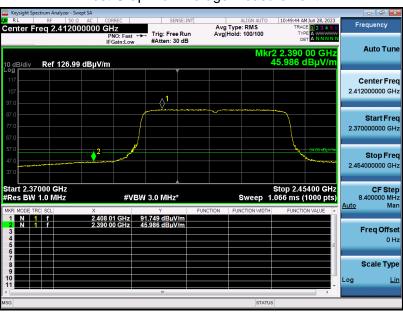








EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement

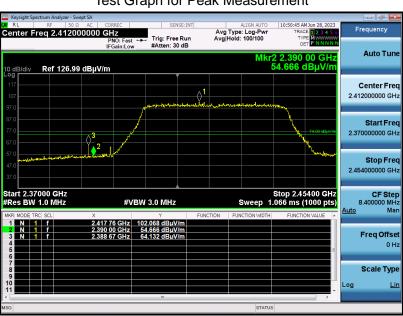

Test Graph for Average Measurement

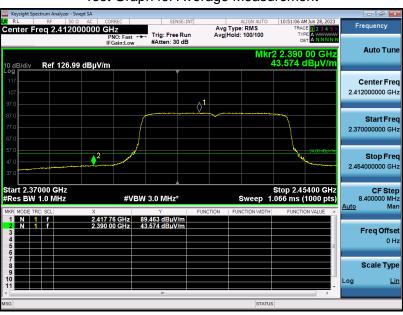







EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

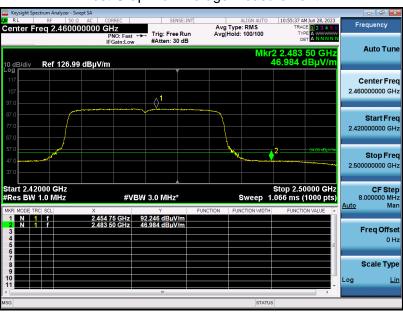






EUT	WiFi/BT module	Model Name	K265B-PR
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax40 with data rate 7.3 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

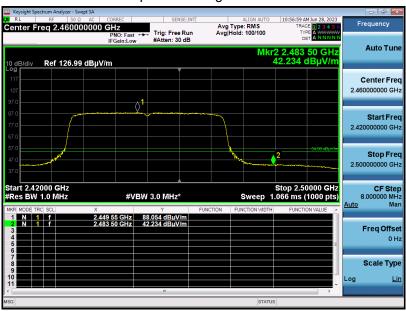

Note: All test modes had been pre-tested. The antenna 1 of 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC13525230201FE05

Page 158 of 162

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage			
Frequency	Q.P (dBµV)	Average (dBμV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

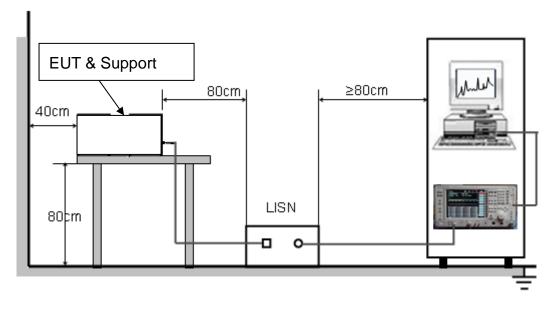



Report No.: AGC13525230201FE05

Page 159 of 162

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

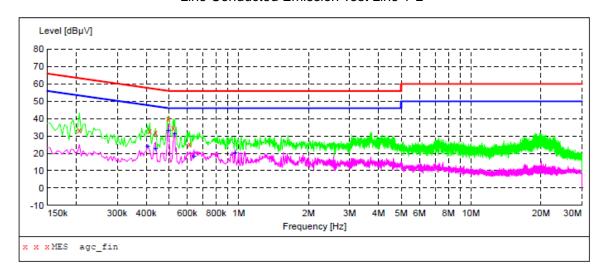

MEASUREMENT RESULT: "agc_fin"

2023/5/26 9: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.206000 0.414000 0.438000 0.498000 0.522000 0.614000	33.30 32.90 31.70 39.80 34.80 25.00	6.2 6.2 6.2 6.2 6.2	63 58 57 56 56	25.4 16.2	QP QP	L1 L1 L1 L1 L1


MEASUREMENT RESULT: "agc_fin2"

2023/5/26 9:41 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.406000	24.40	6.2	48	23.3	AV	L1
0.438000	22.80	6.2	47	24.3	AV	L1
0.498000	33.50	6.2	46	12.5	AV	L1
0.530000	31.20	6.2	46	14.8	AV	L1
0.642000	18.50	6.3	46	27.5	AV	L1
0.966000	20.50	6.3	46	25.5	AV	L1

RESULT: PASS



Line Conducted Emission Test Line 2-N

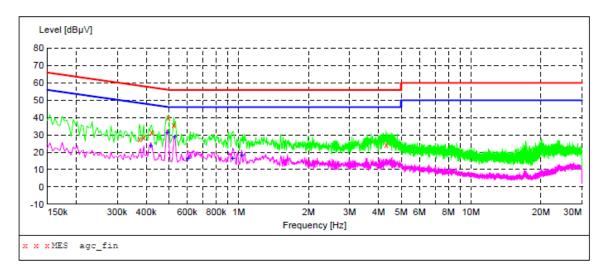

MEASUREMENT RESULT: "agc_fin"

-		Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.3740 0.3900 0.4220 0.4980 0.5260 4.3100	00 00 00	27.60 28.60 31.50 39.80 35.70 24.10	6.2 6.2 6.2 6.2 6.2 6.4	58 58 57 56 56	25.9 16.2 20.3	QP QP QP QP	N N N N N

MEASUREMENT RESULT: "agc fin2"

2023/5/26 9:3 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.418000	23.70	6.2	48	23.8	AV	N
0.494000	31.60	6.2	46	14.5	AV	N
0.530000	29.10	6.2	46	16.9	AV	N
0.606000	16.40	6.2	46	29.6	AV	N
0.942000	16.50	6.3	46	29.5	AV	N
1.030000	18.60	6.3	46	27.4	AV	N

RESULT: PASS

Note: All test modes had been pre-tested. The antenna 1 of 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC13525230201FE05

Page 162 of 162

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13525230201AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC13525230201AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.