

FCC TEST REPORT

For

Shenzhen Toplink Technology Development Co.,Ltd

WIFI Module

Model No.: TOP-AP01

Prepared for
Address

: Shenzhen Toplink Technology Development Co.,Ltd
: Room 321, 3/F, Jindu Building .No,1-4. Banxuegang Avenue.
Bantian Street. Longgang District. Shenzhen, Guangdong,China

Prepared by
Address

: Shenzhen LCS Compliance Testing Laboratory Ltd.
: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Tel

: (+86)755-82591330

Fax

: (+86)755-82591332

Web

: www.LCS-cert.com

Mail

: webmaster@LCS-cert.com

Date of receipt of test sample

: April 02, 2015

Number of tested samples

: 1

Date of Test

: April 02, 2015- April 17, 2015

Date of Report

: April 17, 2015

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247): 2014****Report Reference No. : LCS1503090287E**

Date of Issue..... : April 17, 2015

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name : Shenzhen Toplink Technology Development Co.,Ltd**Address..... : Room 321, 3/F, Jindu Building .No,1-4. Banxuegang Avenue.
Bantian Street. Longgang District. Shenzhen, Guangdong,China**Test Specification**

Standard..... : FCC CFR 47 PART 15 C(15.247): 2014

Test Report Form No. : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : WIFI Module


Trade Mark..... : N/A

Model/ Type reference : TOP-AP01


Ratings..... : DC 3.3V 1.5A&1.8V 1.5A

Result : **Positive****Compiled by:**

Dick Su / File administrators

Supervised by:

Andy Hu / Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1503090287E

April 17, 2015

Date of issue

Type / Model.....	: WIFI Module
EUT.....	: TOP-AP01
Applicant.....	: Shenzhen Toplink Technology Development Co.,Ltd
Address.....	: Room 321, 3/F, Jindu Building .No,1-4. Banxuegang Avenue. Bantian Street. Longgang District. Shenzhen, Guangdong,China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen Toplink Technology Development Co.,Ltd
Address.....	: Room 321, 3/F, Jindu Building .No,1-4. Banxuegang Avenue. Bantian Street. Longgang District. Shenzhen, Guangdong,China
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Toplink Technology Development Co.,Ltd
Address.....	: Room 321, 3/F, Jindu Building .No,1-4. Banxuegang Avenue. Bantian Street. Longgang District. Shenzhen, Guangdong,China
Telephone.....	: /
Fax.....	: /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. DESCRIPTION OF DEVICE (EUT)	5
1.2. SUPPORT EQUIPMENT LIST	5
1.3. EXTERNAL I/O CABLE	5
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.6. MEASUREMENT UNCERTAINTY	6
1.7. DESCRIPTION OF TEST MODES	7
2. TEST METHODOLOGY	8
2.1 EUT CONFIGURATION	8
2.2 EUT EXERCISE	8
2.3 GENERAL TEST PROCEDURES	8
3. SYSTEM TEST CONFIGURATION	9
3.1. JUSTIFICATION	9
3.2. EUT EXERCISE SOFTWARE	9
3.3. SPECIAL ACCESSORIES	9
3.4. BLOCK DIAGRAM/SCHEMATICS	9
3.5. EQUIPMENT MODIFICATIONS	9
3.6. TEST SETUP	9
4. SUMMARY OF TEST RESULTS.....	10
5. SUMMARY OF TEST EQUIPMENT	11
6. TEST RESULT	12
6.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	12
6.2. POWER SPECTRAL DENSITY MEASUREMENT	14
6.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT	22
6.4. OCCUPIED BANDWIDTH	30
6.5. RADIATED EMISSIONS MEASUREMENT	38
6.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST	51
6.7. POWER LINE CONDUCTED EMISSIONS	62
7. ANTENNA REQUIREMENT	64
7.1 STANDARD APPLICABLE	64
7.2 ANTENNA CONNECTED CONSTRUCTION	64

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : WIFI Module
Model Number : TOP-AP01
Power Supply : DC 3.3V 1.5A&1.8V 1.5A
WIFI
Frequency Range : 2412.00-2462.00MHz
Channel Spacing : 5MHz
Channel Number : 11 Channels for 20MHz Bandwidth
: 7 Channels for 40MHz Bandwidth
Modulation Technology : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
: IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
Data Rates : IEEE 802.11b: 1-11Mbps
: IEEE 802.11g: 6-54Mbps
IEEE 802.11n: MCS0-MCS7
Antenna Description : The WIFI modular without permanently attached antenna while
contain a unique antenna connector as external photo, test lab
: provide a external antenna with maximum antenna gain is 2dBi
as test setup photo show

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	Notebook	B470	WB05067151	CE

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
--	--	--

1.4. Description of Test Facility

Site Description	
EMC Lab.	: CNAS Registration Number. is L4595. FCC Registration Number. is 899208. Industry Canada Registration Number. is 9642A-1. VCCI Registration Number. is C-4260 and R-3804. ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492. TUV SUD Registration Number. is SCN1081. TUV RH Registration Number. is UA 50296516-001
Name of Firm	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Site Location	: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	: 9KHz~30MHz	3.10dB	(1)	
	: 30MHz~200MHz	2.96dB	(1)	
	: 200MHz~1000MHz	3.10dB	(1)	
	: 1GHz~26.5GHz	3.80dB	(1)	
	: 26.5GHz~40GHz	3.90dB	(1)	
Conduction Uncertainty	: 150kHz~30MHz	1.63dB	(1)	
Power disturbance	: 30MHz~300MHz	1.60dB	(1)	

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description Of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode : 1 Mbps, DSSS.

802.11g Mode : 6 Mbps, OFDM.

802.11n Mode HT20:.MCS0, OFDM.

802.11n Mode HT40:.MCS0, OFDM.

Channel List & Frequency

802.11b/g/n(HT20)

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2412~2462MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	--	--

802.11n(HT40)

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2422~2452MHz	1	--	7	2442
	2	--	8	2447
	3	2422	9	2452
	4	2427	10	--
	5	2432	11	--
	6	2437	--	--

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, RSS-210, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C and RSS-210.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(a)	Occupied Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Sensor	R&S	NRV-Z51	100458	2014-06-18	2015-06-17
2	Power Sensor	R&S	NRV-Z32	10057	2014-06-18	2015-06-17
3	Power Meter	R&S	NRVS	100444	2014-06-18	2015-06-17
4	DC Filter	MPE	23872C	N/A	2014-06-18	2015-06-17
5	RF Cable	Harbour Industries	1452	N/A	2014-06-18	2015-06-17
6	SMA Connector	Harbour Industries	9625	N/A	2014-06-18	2015-06-17
7	Spectrum Analyzer	Agilent	N9020A	MY50510140	2014-10-27	2015-10-26
8	Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	2014-06-16	2015-06-15
9	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2014-06-18	2015-06-17
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2014-06-18	2015-06-17
11	Amplifier	SCHAFFNER	COA9231A	18667	2014-06-18	2015-06-17
12	Amplifier	Agilent	8449B	3008A02120	2014-06-16	2015-06-15
13	Amplifier	MITEQ	AMF-6F-2604 00	9121372	2014-06-16	2015-06-15
14	Loop Antenna	R&S	HFH2-Z2	860004/001	2014-06-18	2015-06-17
15	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2014-06-10	2015-06-09
16	Horn Antenna	EMCO	3115	6741	2014-06-10	2015-06-09
17	Horn Antenna	SCHWARZBEC K	BBHA9170	BBHA9170154	2014-06-10	2015-06-09
18	RF Cable-R03m	Jye Bao	RG142	CB021	2014-06-18	2015-06-17
19	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2014-06-18	2015-06-17
20	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2014-06-18	2015-06-17
21	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2014-06-18	2015-06-17
22	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2014-06-18	2015-06-17
23	EMI Test Software	AUDIX	E3	N/A	2014-06-18	2015-06-17

6. TEST RESULT

6.1. Maximum Conducted Output Power Measurement

6.1.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


6.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

6.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

6.1.4. Test Setup Layout

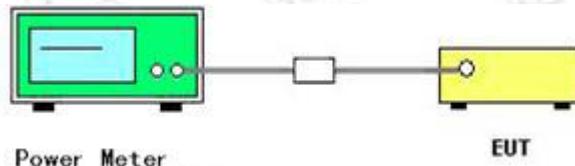

6.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.1.6. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

802.11b

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	15.27	30	Complies
6	2437	15.48	30	Complies
11	2462	15.29	30	Complies

802.11g

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	13.89	30	Complies
6	2437	13.76	30	Complies
11	2462	13.64	30	Complies

802.11n HT20

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	11.80	30	Complies
6	2437	11.73	30	Complies
11	2462	11.83	30	Complies

802.11n HT40

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
3	2422	10.21	30	Complies
6	2437	10.43	30	Complies
9	2452	10.54	30	Complies

Note: The relevant measured result has the offset with cable loss already.

6.2. Power Spectral Density Measurement

5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


5.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.2.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz.
4. Set the VBW $\geq 3 \times \text{RBW}$
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.2.4. Test Setup Layout

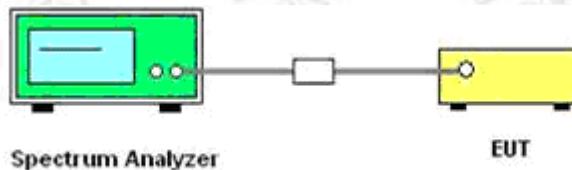

6.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.2.6. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

802.11b

Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
1	2412	-7.671	8	Complies
6	2437	-8.367	8	Complies
11	2462	-5.964	8	Complies

802.11g

Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
1	2412	-6.678	8	Complies
6	2437	-7.074	8	Complies
11	2462	-9.809	8	Complies

802.11n HT20



Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
1	2412	-6.697	8	Complies
6	2437	-6.096	8	Complies
11	2462	-6.049	8	Complies


802.11n HT40

Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
3	2422	-10.004	8	Complies
6	2437	-9.406	8	Complies
9	2452	-9.600	8	Complies


Note: The measured power density (dBm) has the offset with cable loss already.



802.11b power density

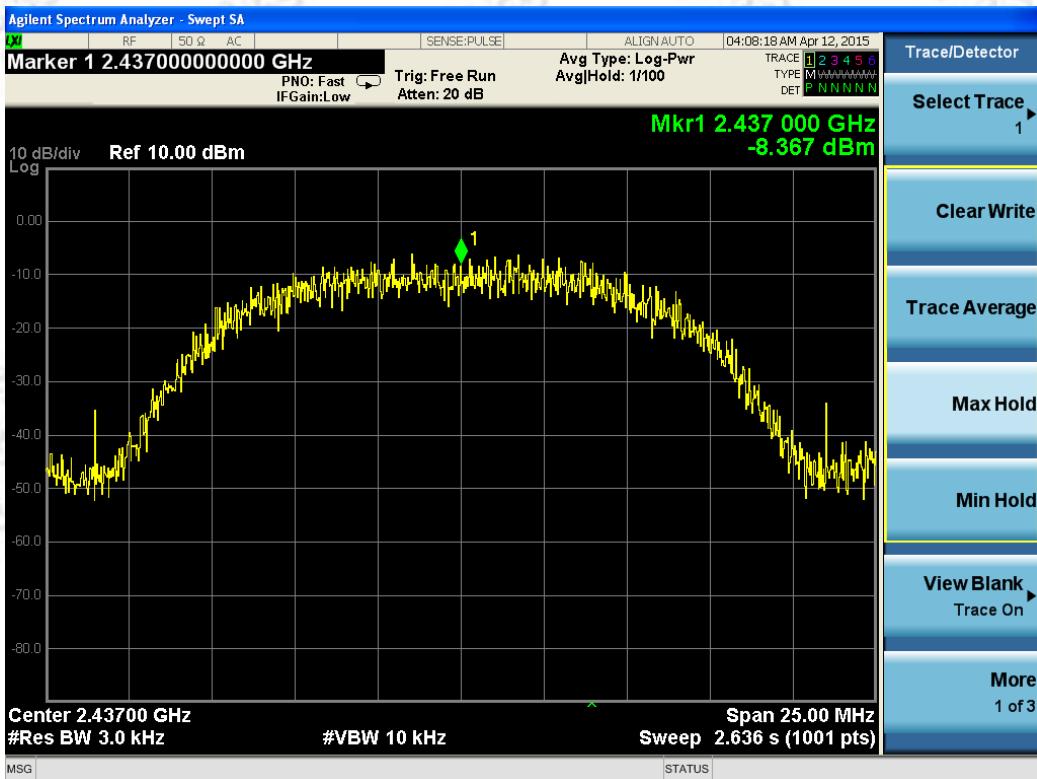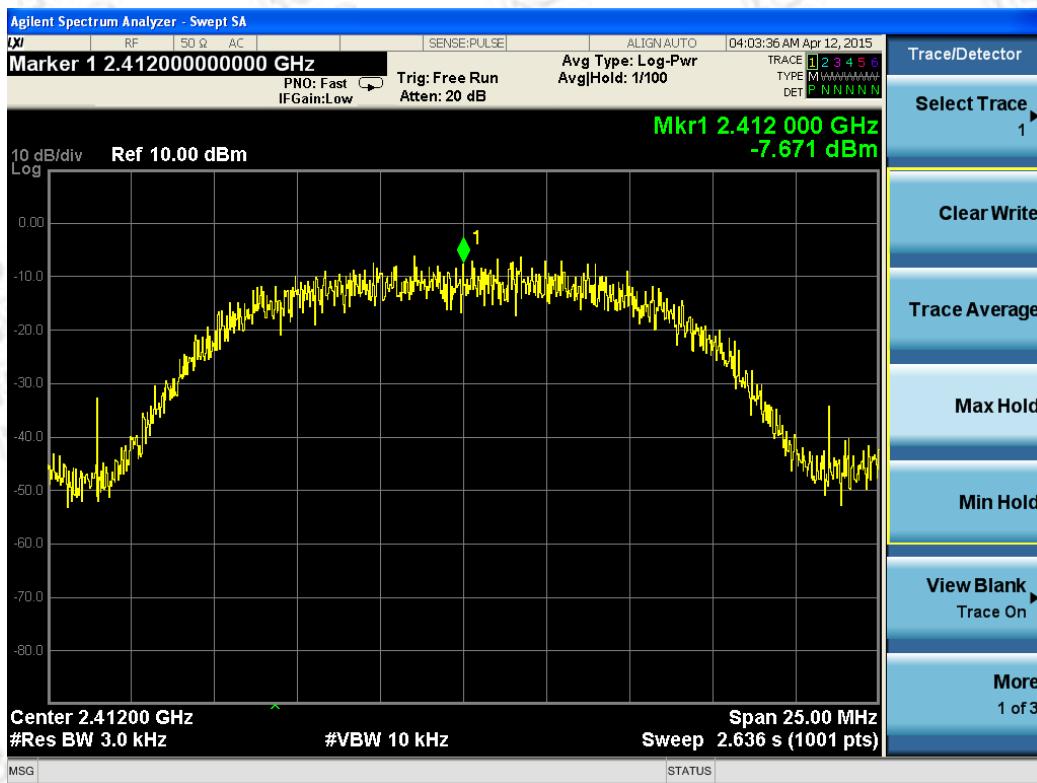


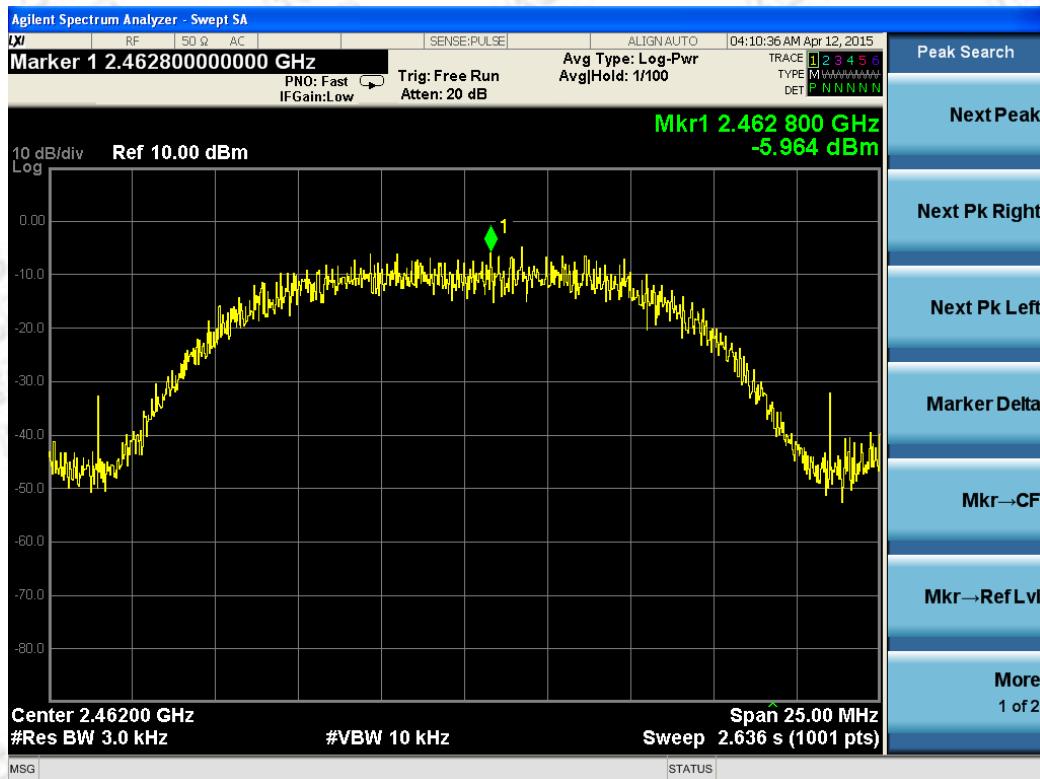



802.11g power density

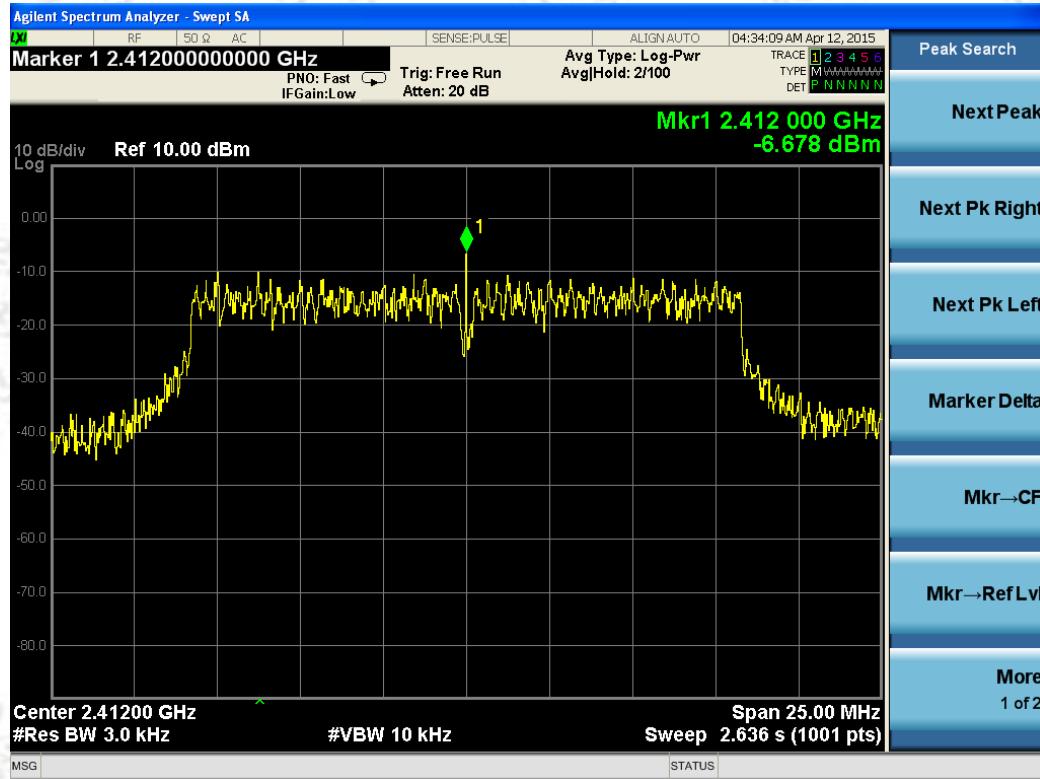

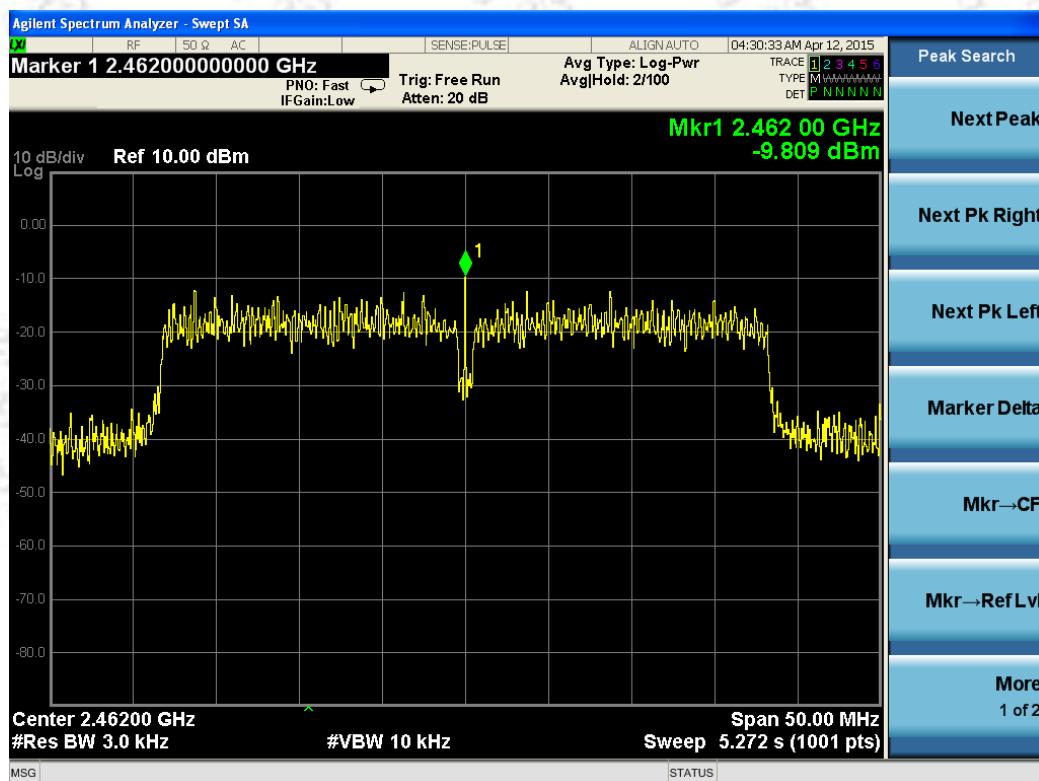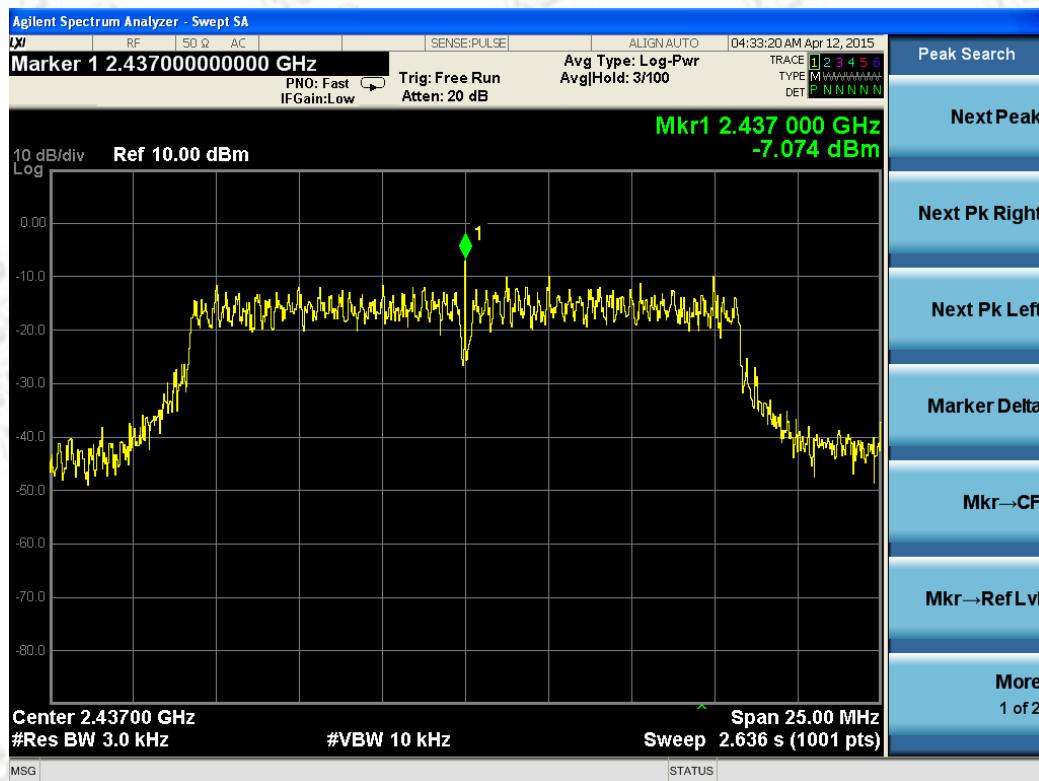


802.11n HT20 power density

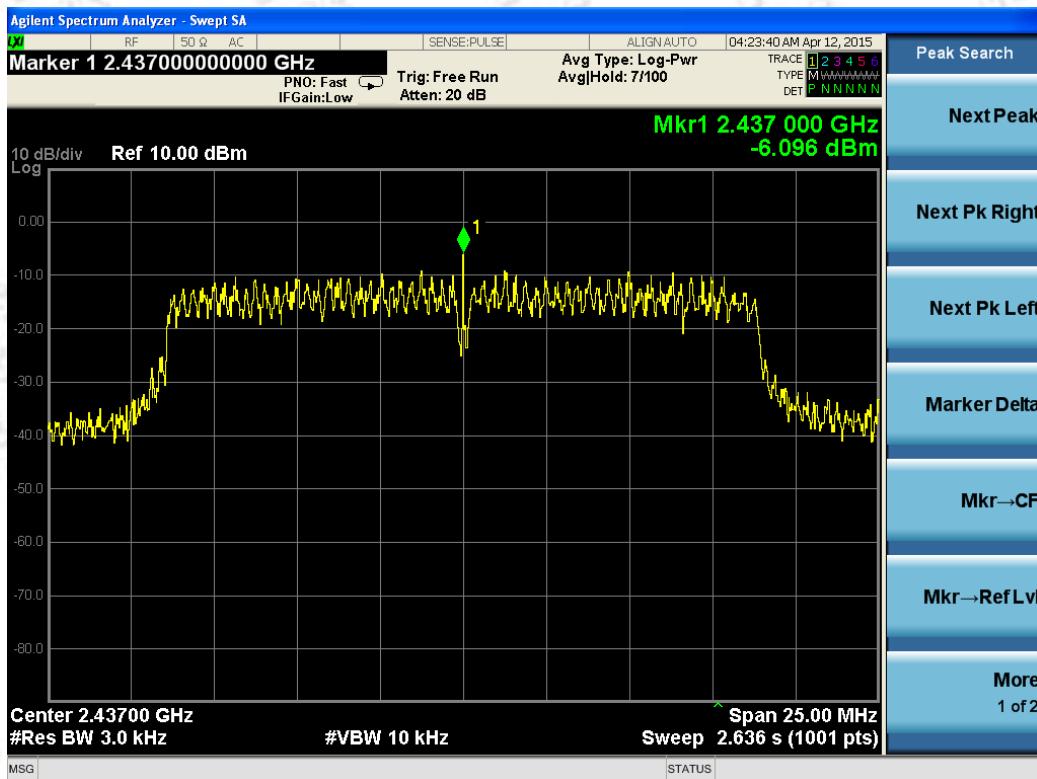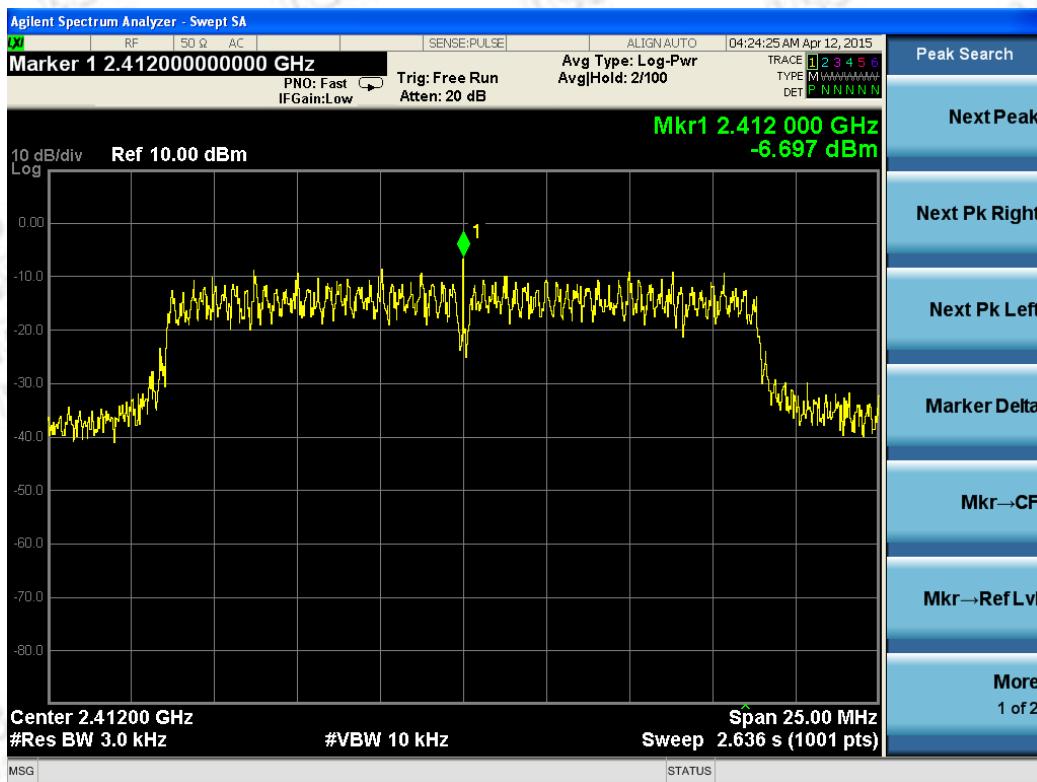

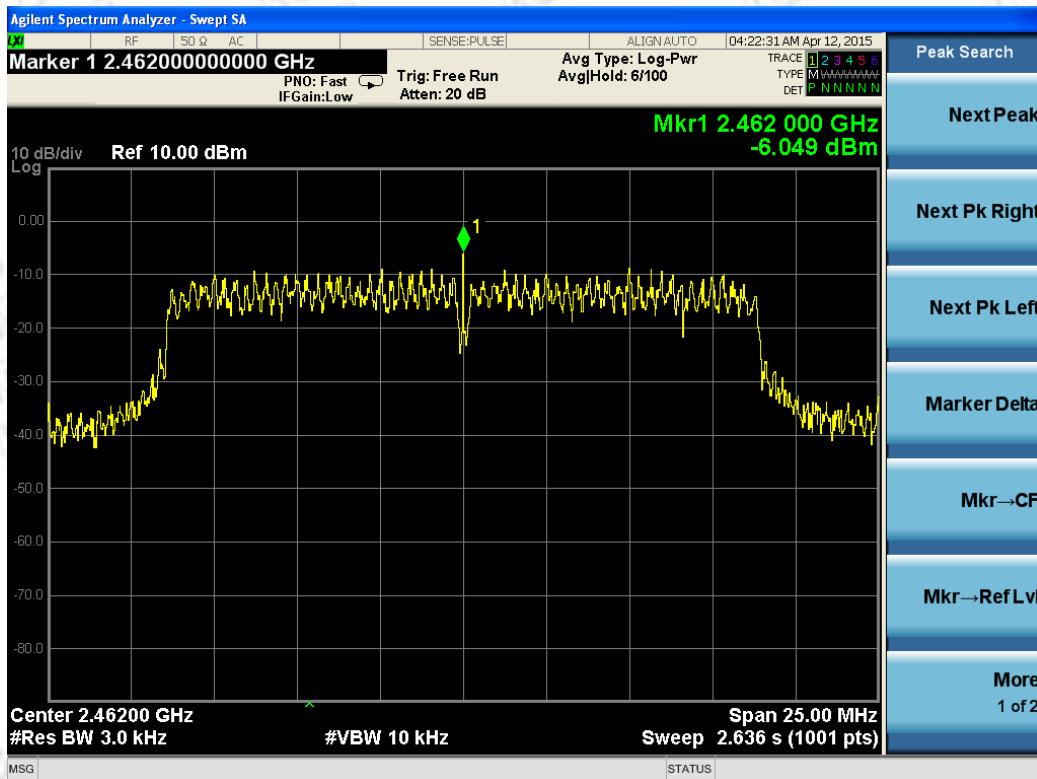

802.11n HT40 power density



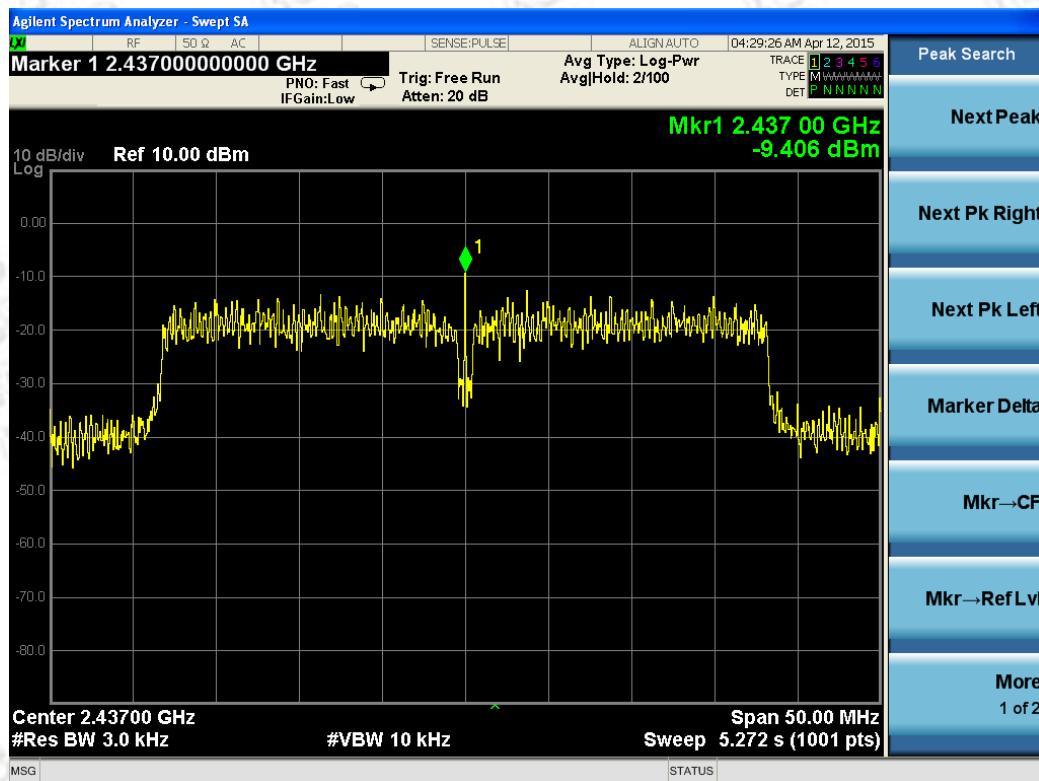

6.3. 6 dB Spectrum Bandwidth Measurement

6.3.1. Standard Applicable

According to §15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

6.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

6.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

6.3.4. Test Setup Layout

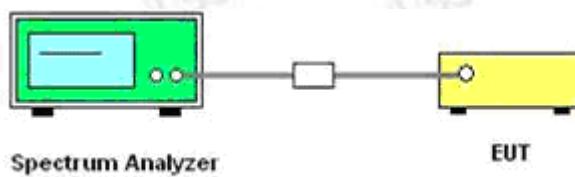

6.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.3.6. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

802.11b

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	9.647	500	Complies
6	2437	9.303	500	Complies
11	2462	9.300	500	Complies

802.11g

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	16.42	500	Complies
6	2437	16.43	500	Complies
11	2462	16.42	500	Complies

802.11n HT20


Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	17.61	500	Complies
6	2437	17.61	500	Complies
11	2462	17.55	500	Complies

802.11n HT40


Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
3	2422	36.08	500	Complies
6	2437	35.73	500	Complies
9	2452	35.79	500	Complies



802.11b channel, 6dB bandwidth




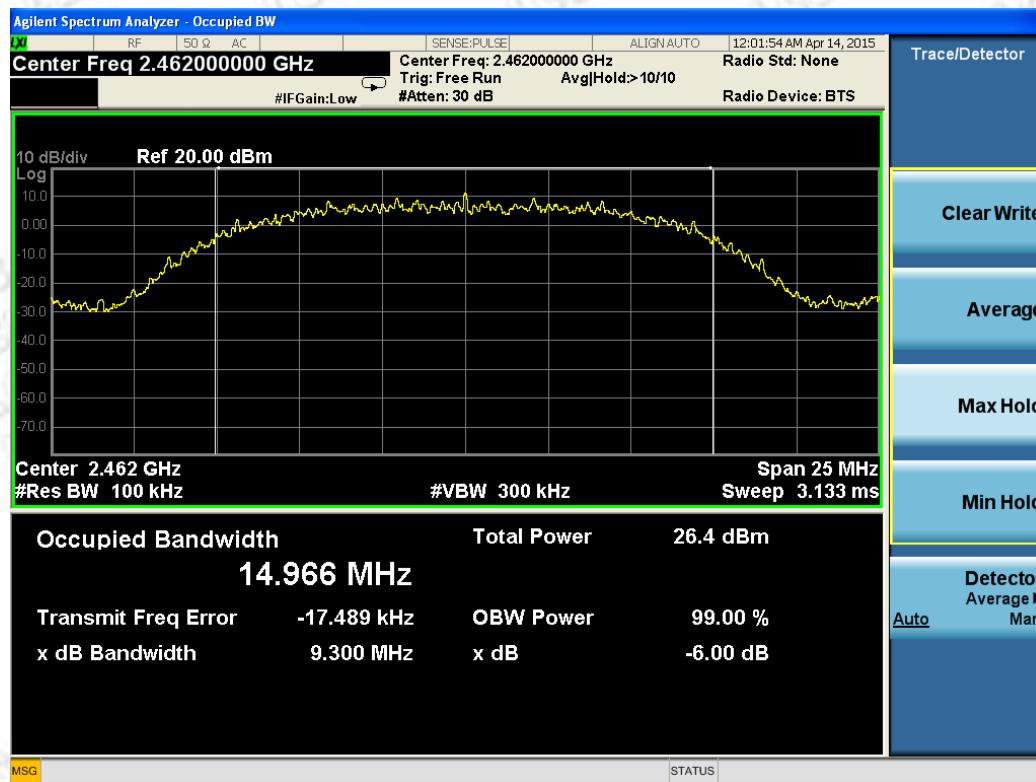



802.11g channel, 6dB bandwidth

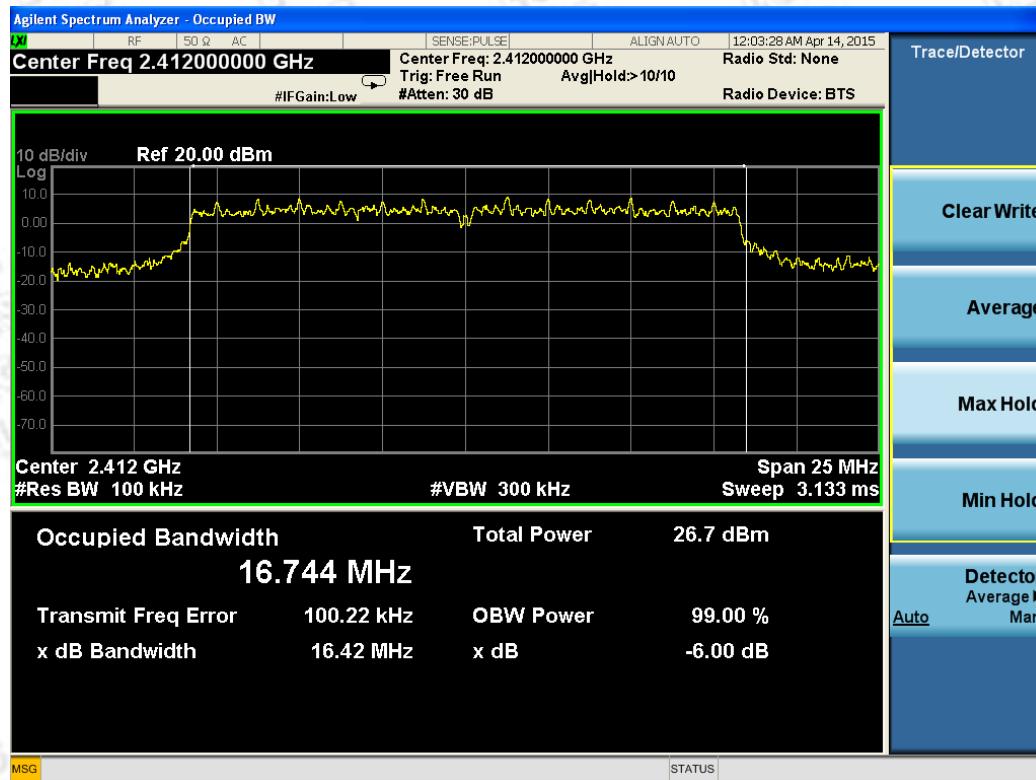

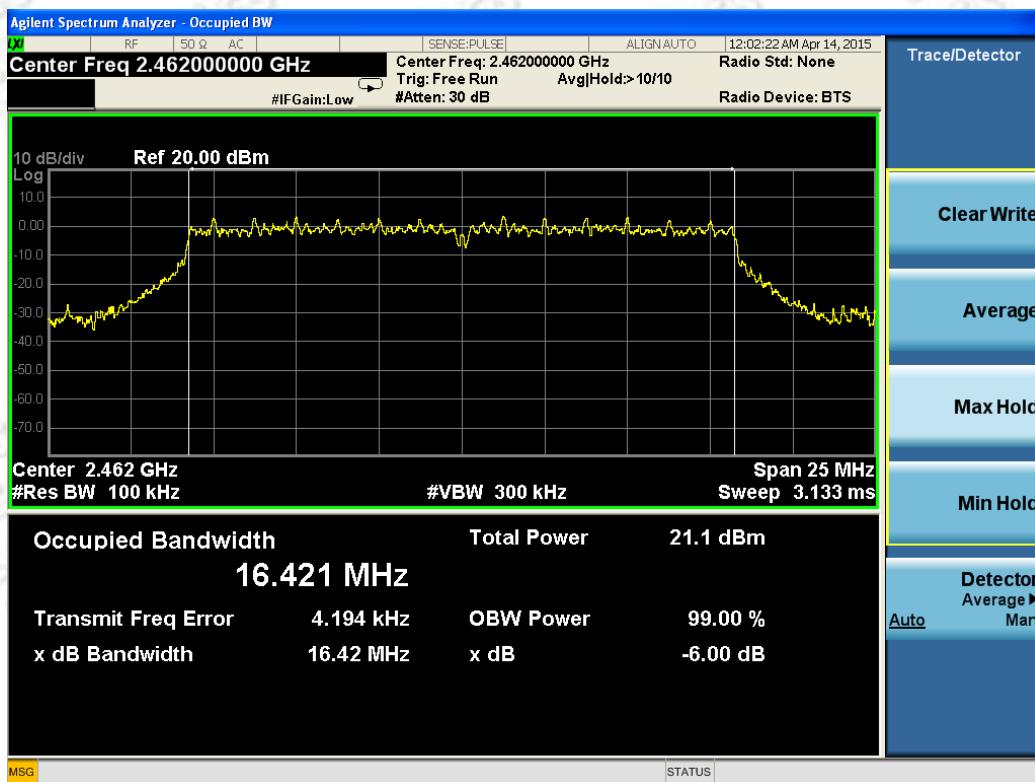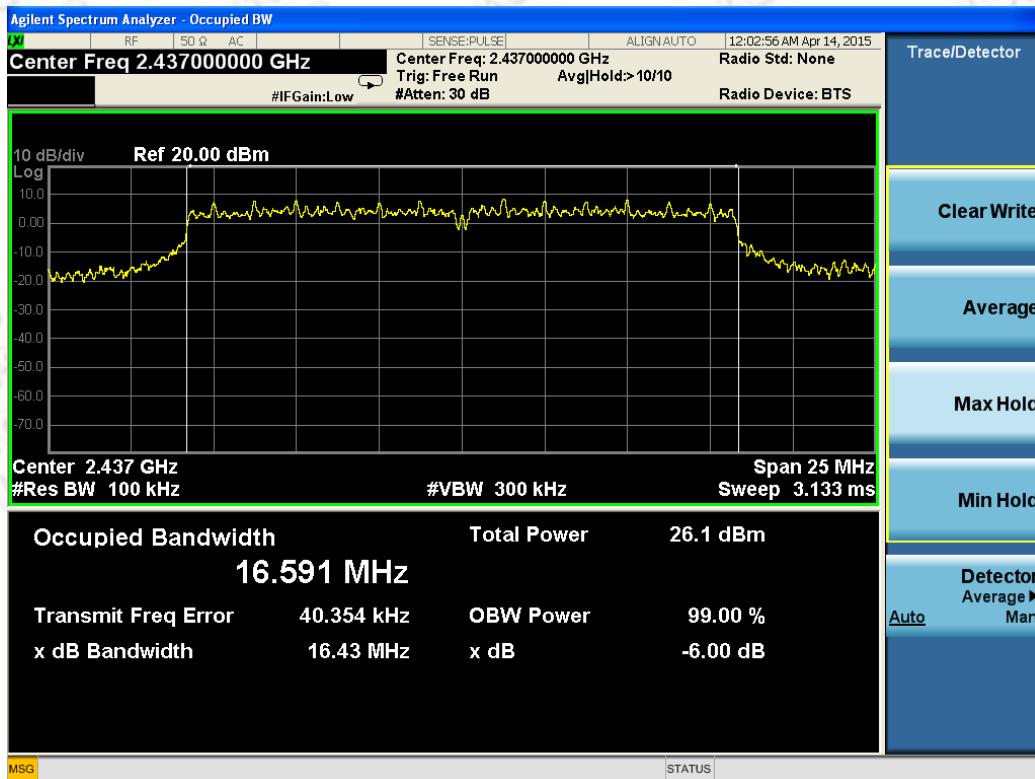




802.11n HT20 channel, 6dB bandwidth

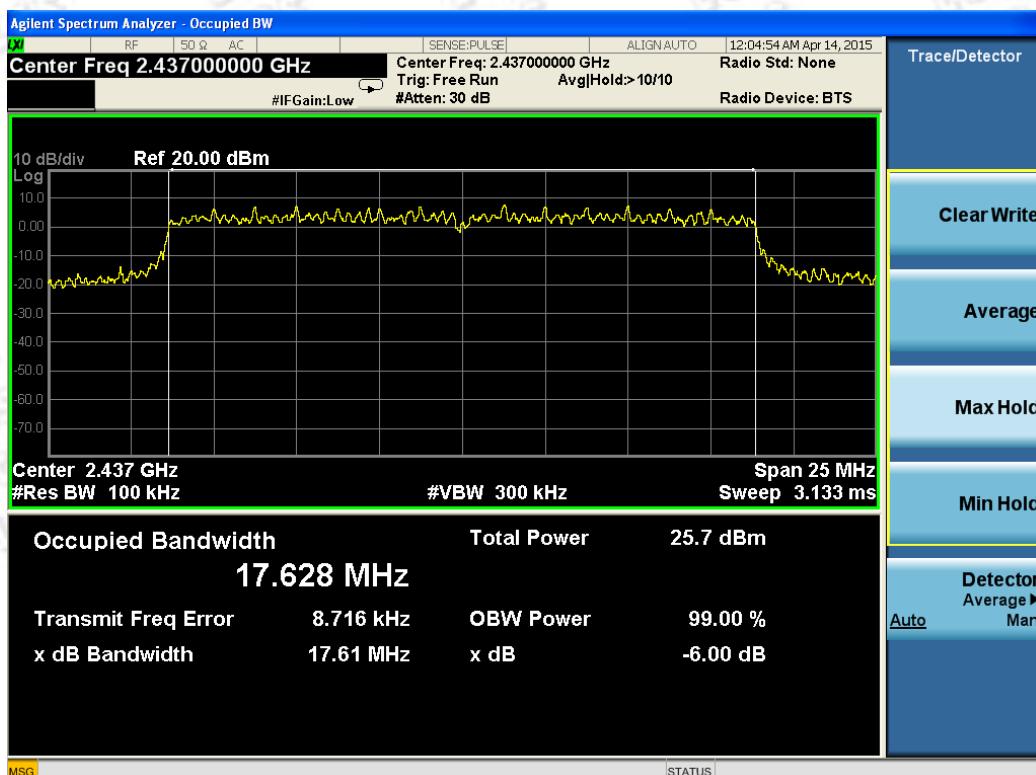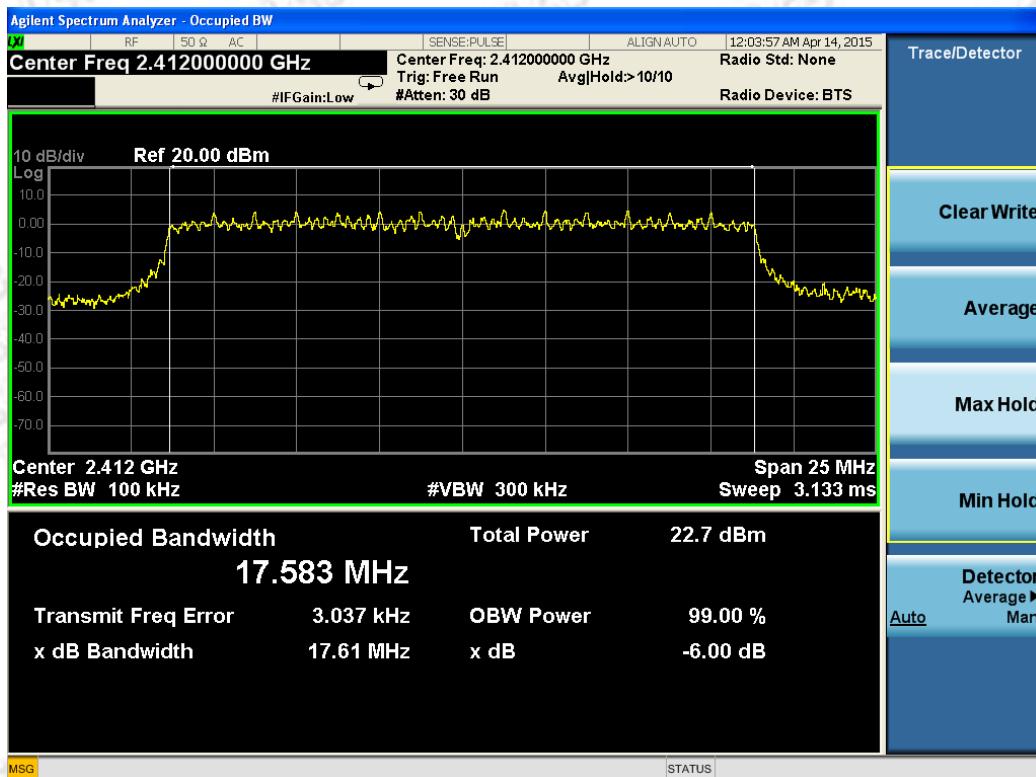

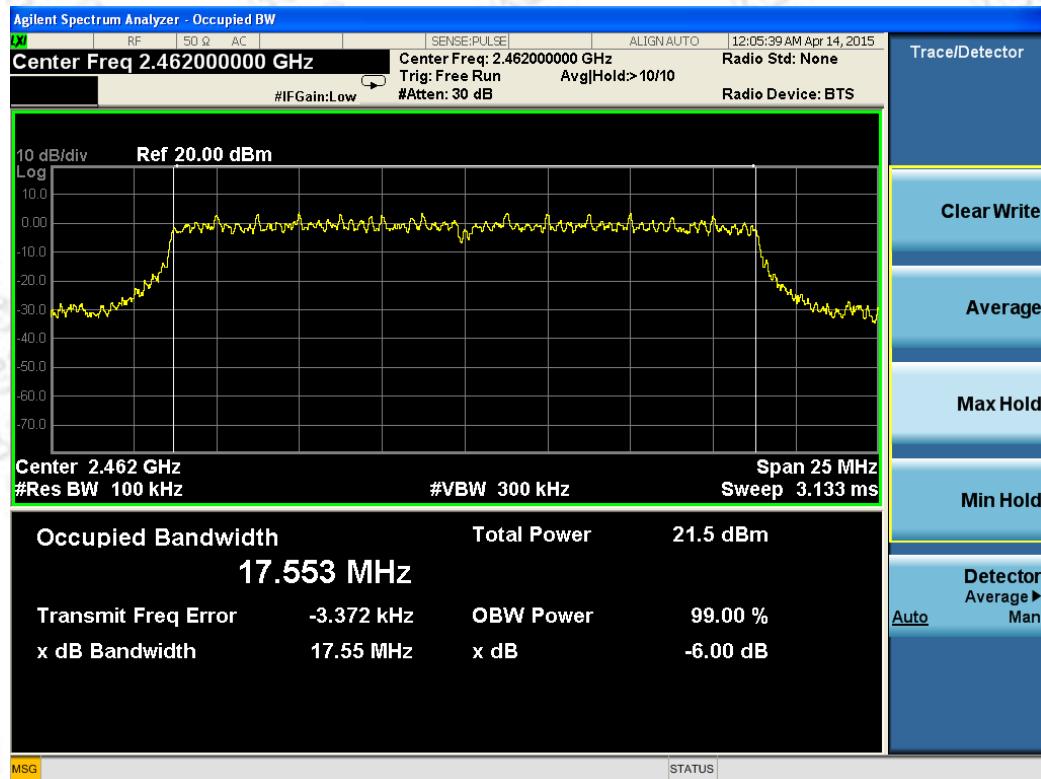

802.11n HT40 channel, 6dB bandwidth

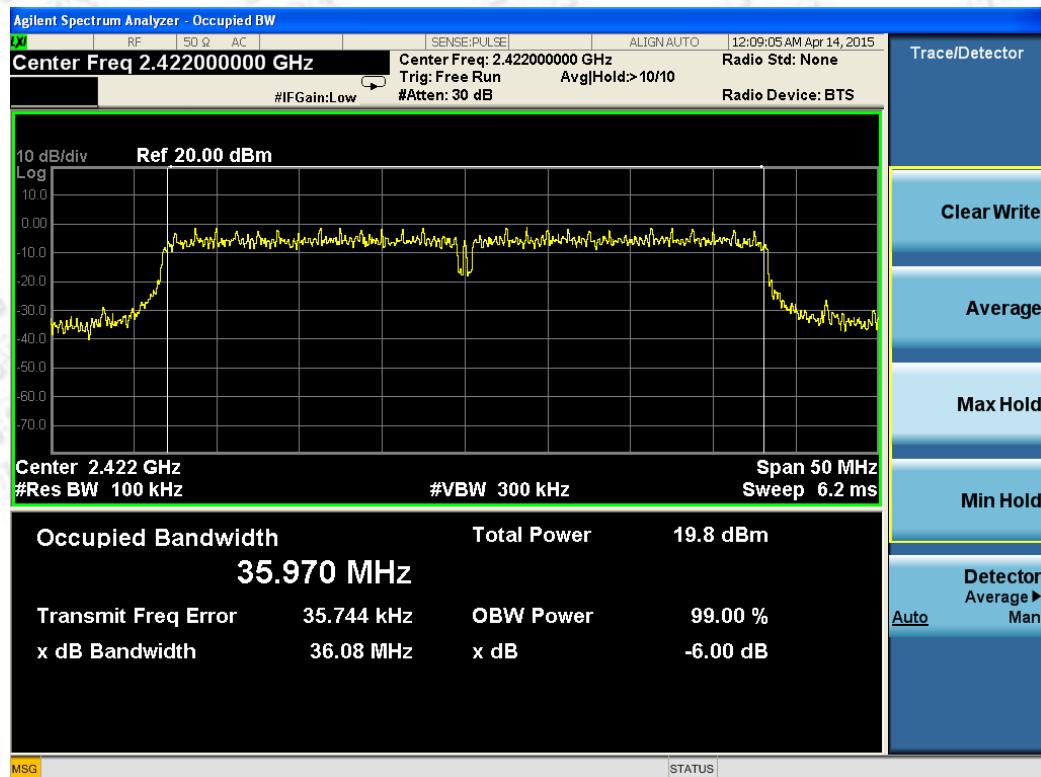

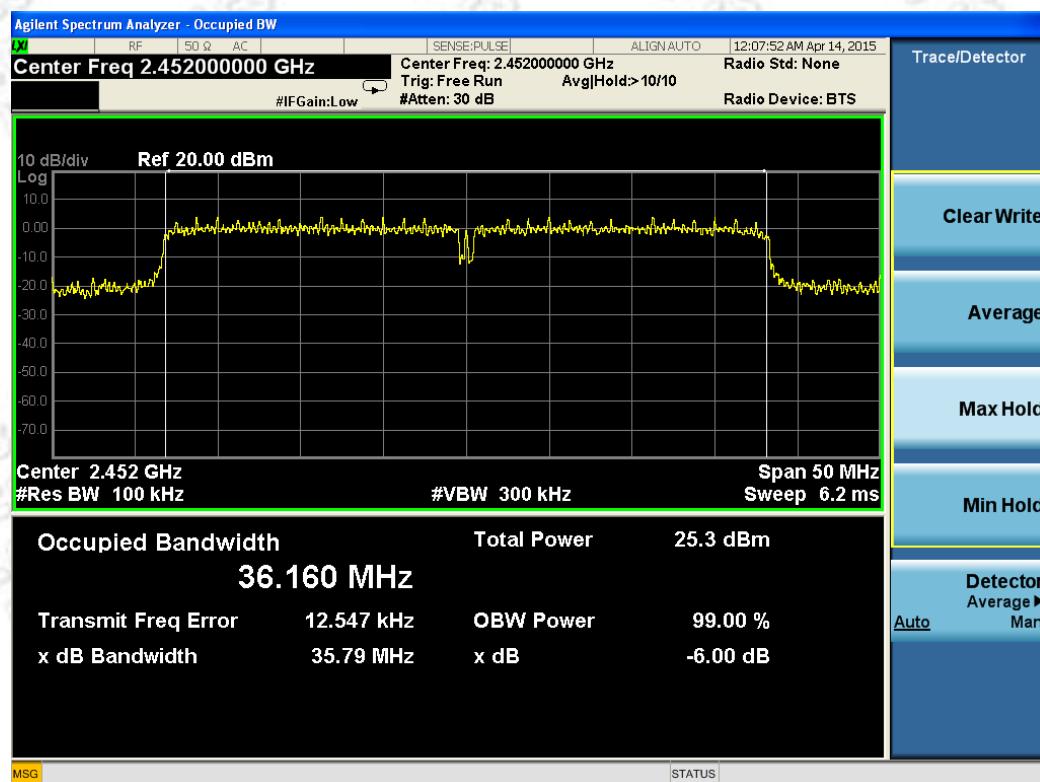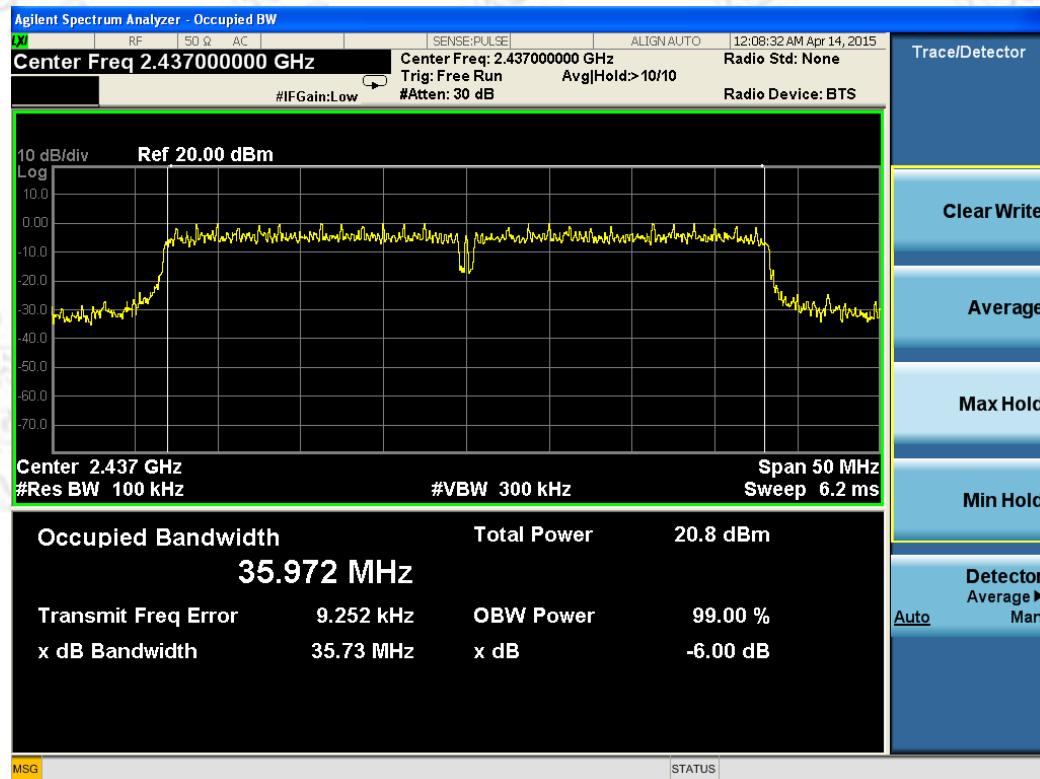

6.4. Occupied Bandwidth

6.4.1. Standard Applicable

According to §15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

6.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
RBW	1% to 3% of the band
VBW	3 times the RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5

6.4.3. Test Procedures

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth measurement function is utilized.

6.4.4. Test Setup Layout

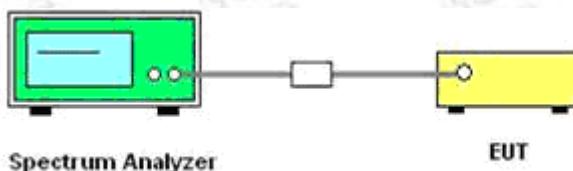

6.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.4.6. Test Result of 99% Occupied Bandwidth.

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

802.11b

Channel	Frequency (MHz)	99% OBW (MHz)
1	2412	14.946
6	2437	14.890
11	2462	14.894

802.11g

Channel	Frequency (MHz)	99% OBW (MHz)
1	2412	16.443
6	2437	16.580
11	2462	16.426


802.11n HT20

Channel	Frequency (MHz)	99% OBW (MHz)
1	2412	17.620
6	2437	17.551
11	2462	19.834

802.11n HT40


Channel	Frequency (MHz)	99% OBW (MHz)
3	2422	36.193
6	2437	36.203
9	2452	36.217



802.11b channel, 99% Occupied Bandwidth

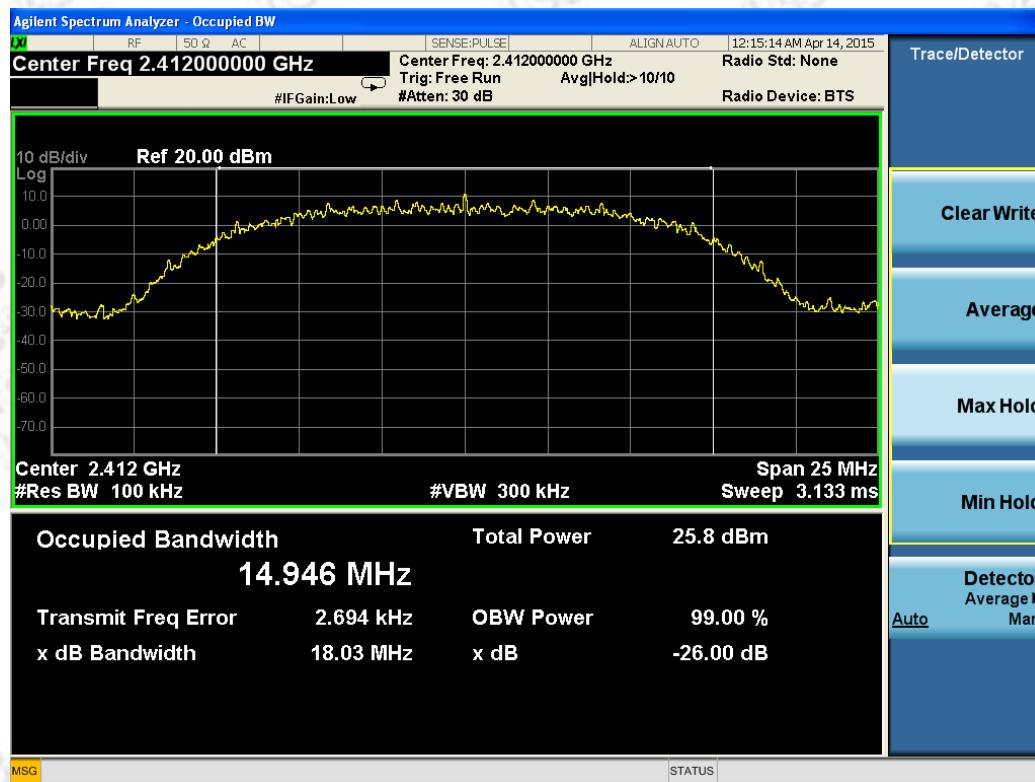






802.11g channel, 99% Occupied Bandwidth

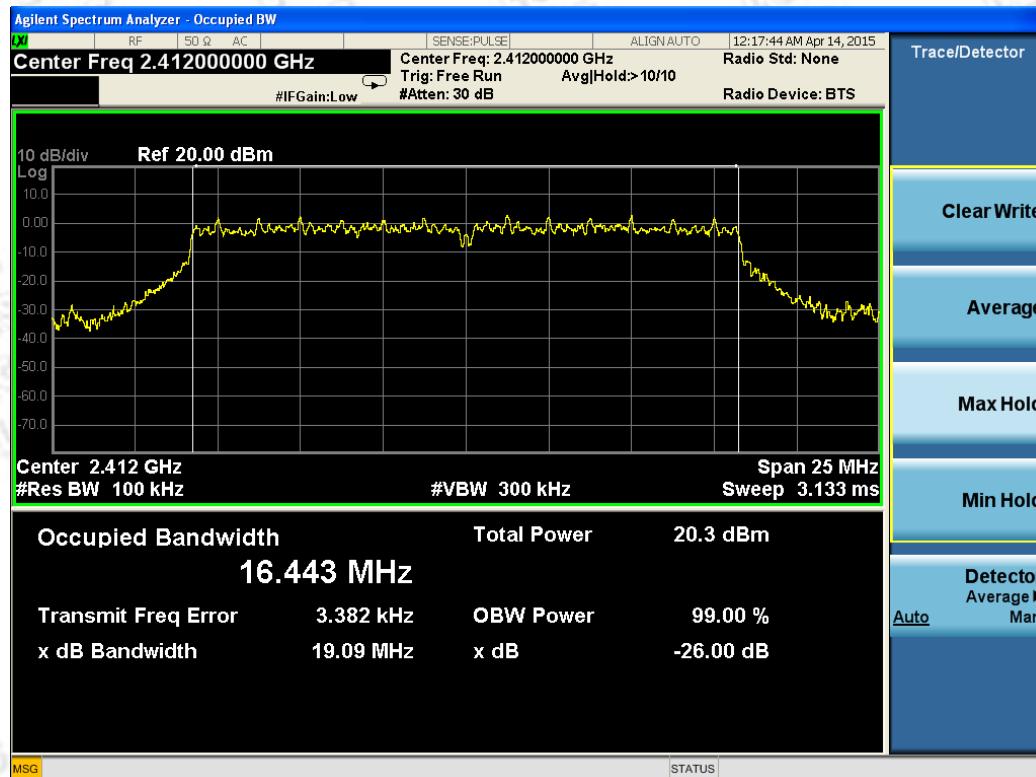

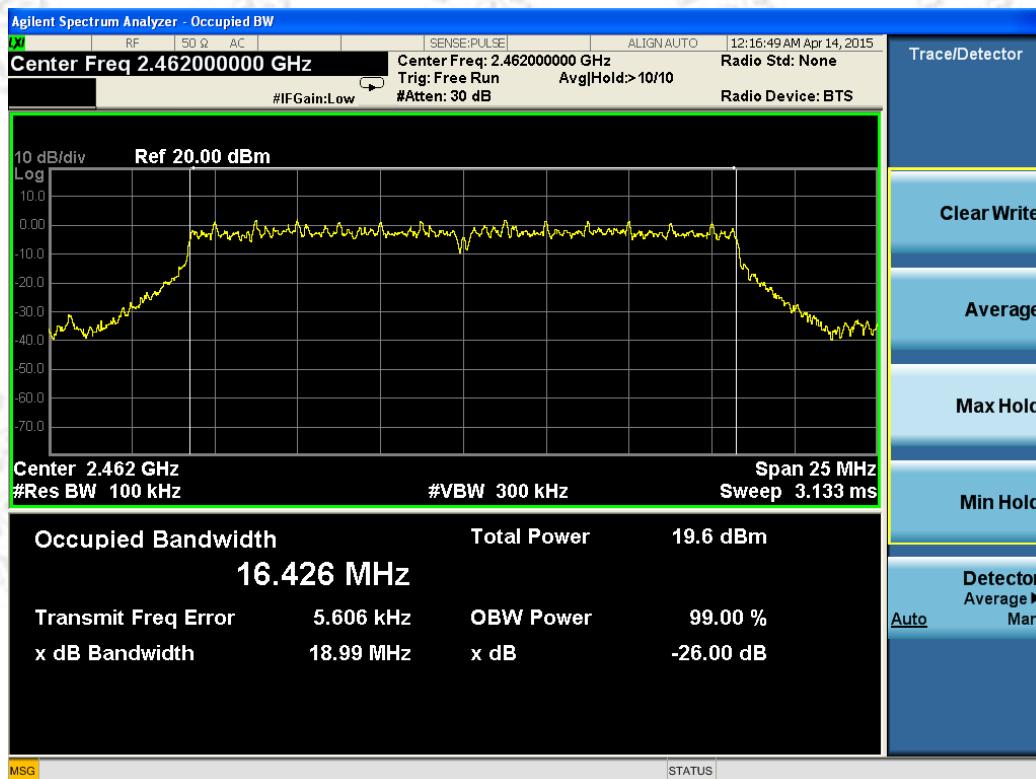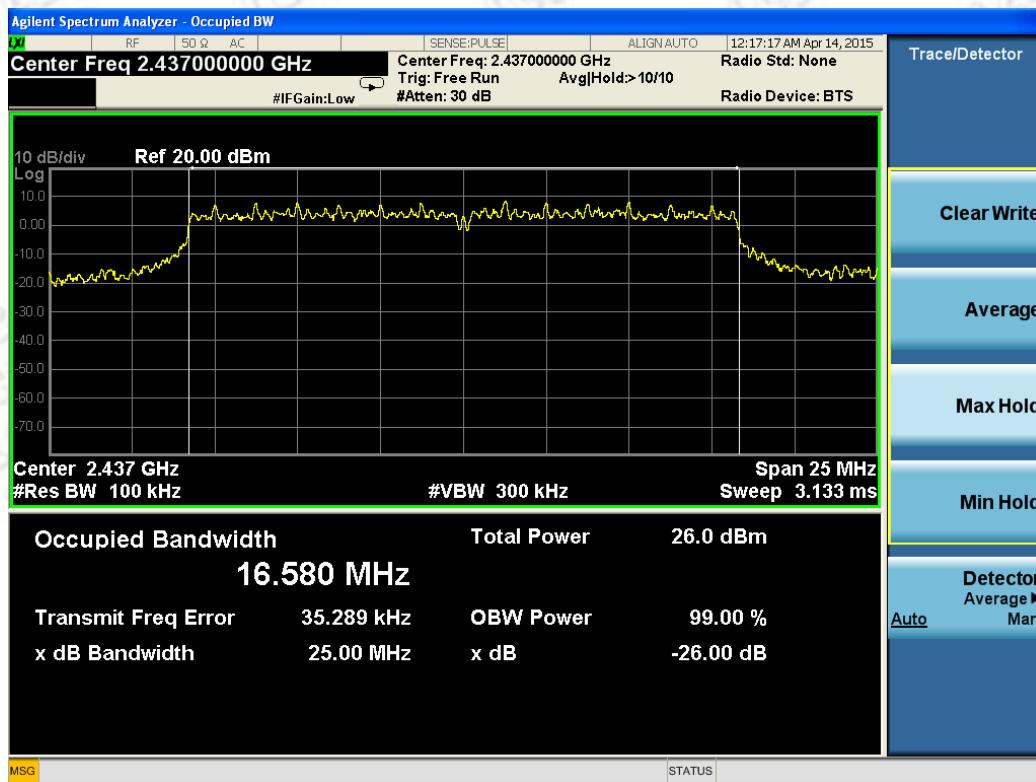




802.11n HT20 channel, 99% Occupied Bandwidth

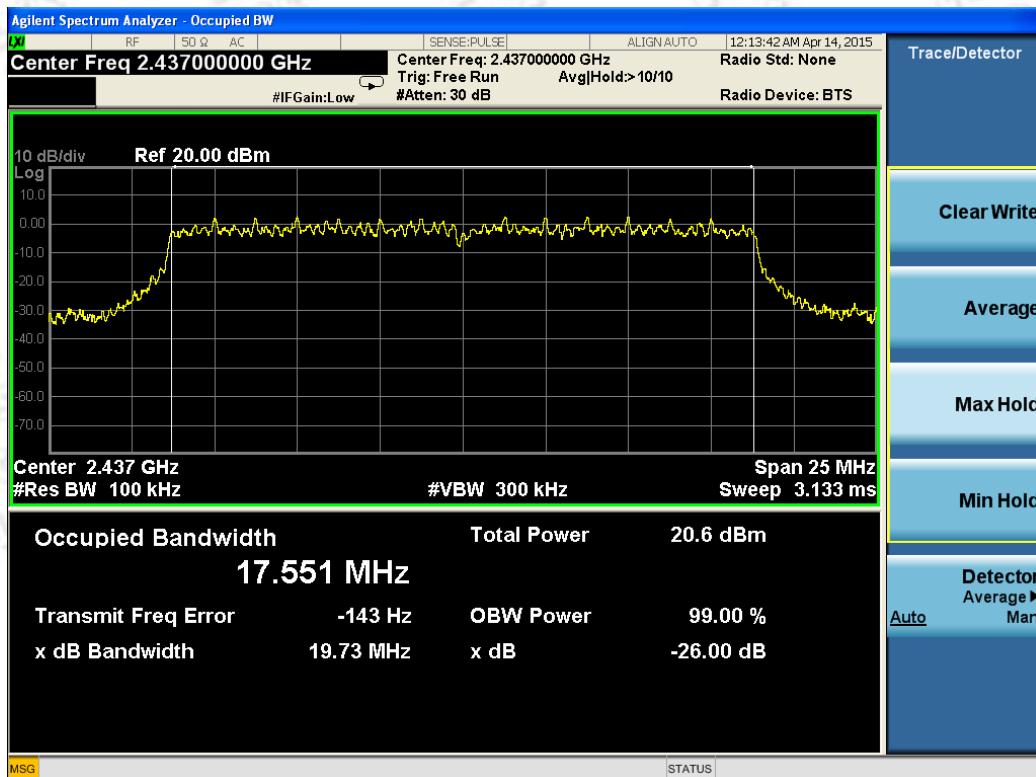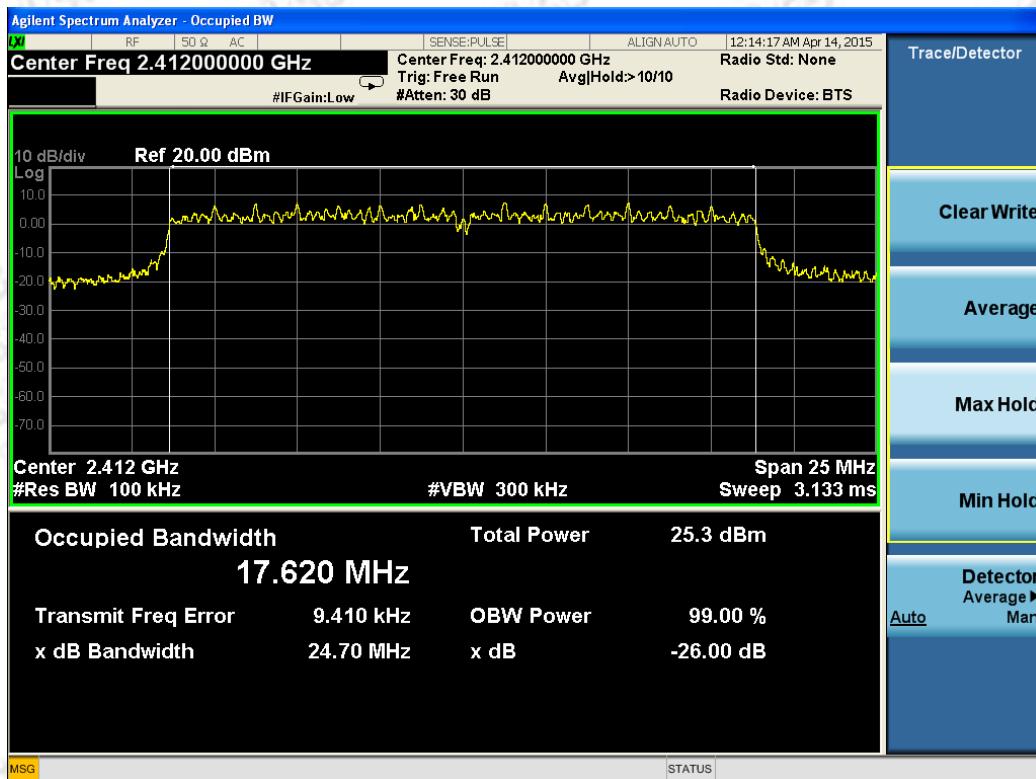

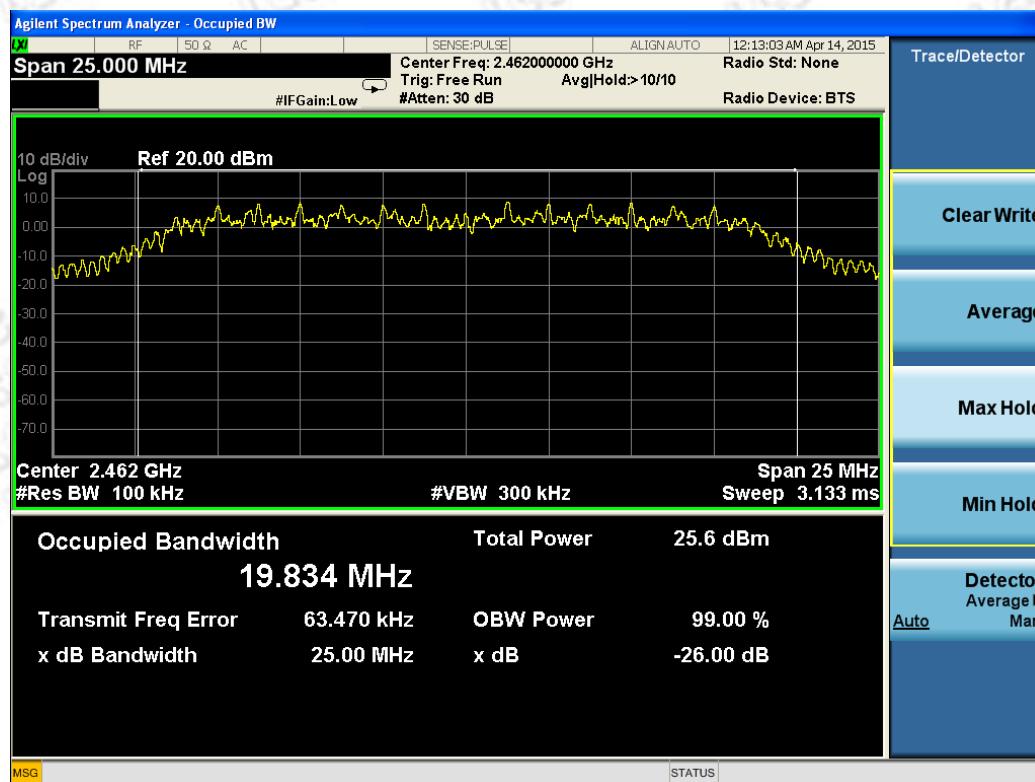

802.11n HT40 channel, 99% Occupied Bandwidth

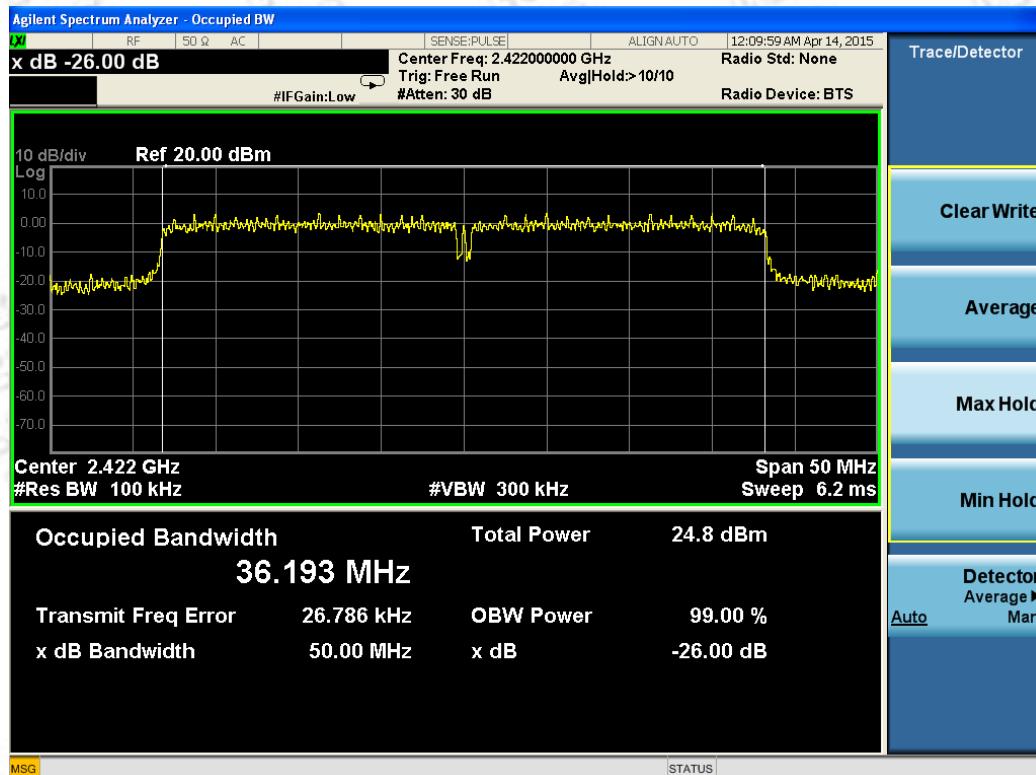

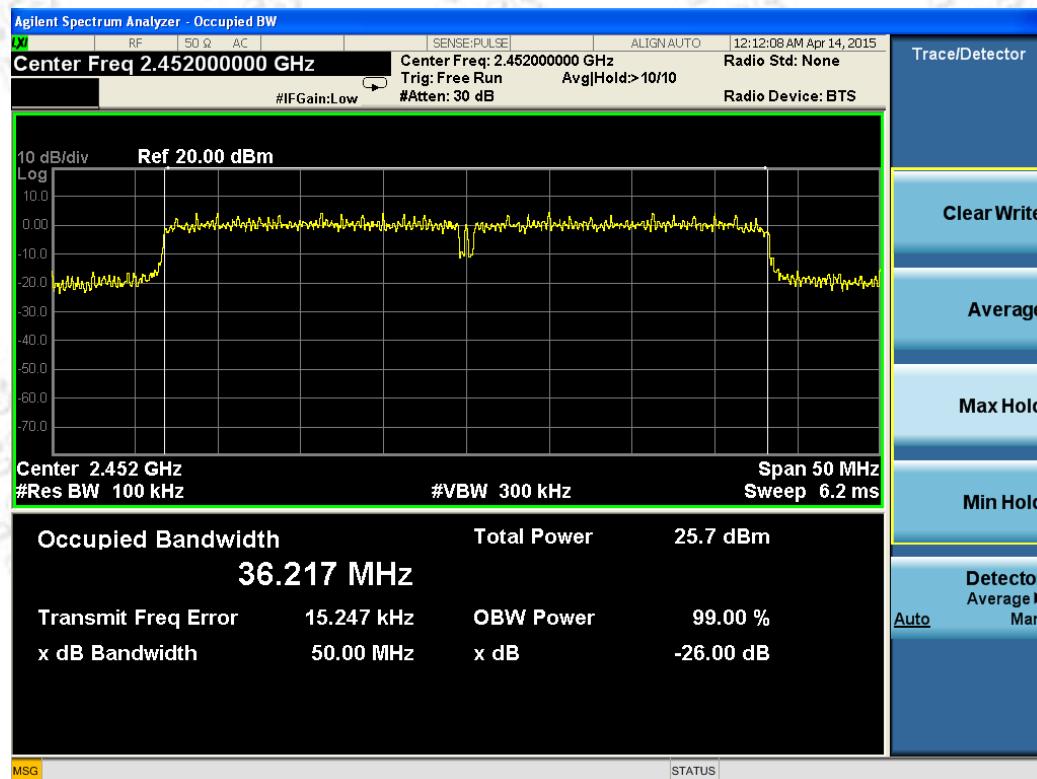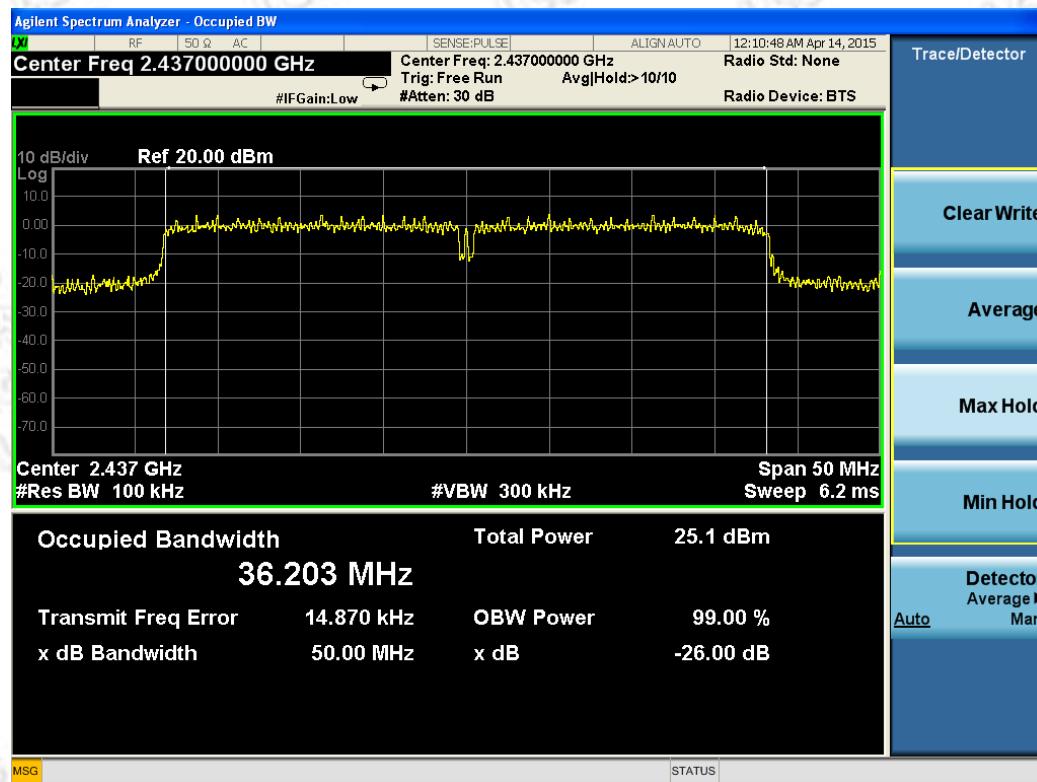

6.5. Radiated Emissions Measurement

6.5.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP


6.5.3. Test Procedures

- Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz and ground with absorber material. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.


4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

6.5.4. Test Setup Layout

For radiated emissions below 30MHz

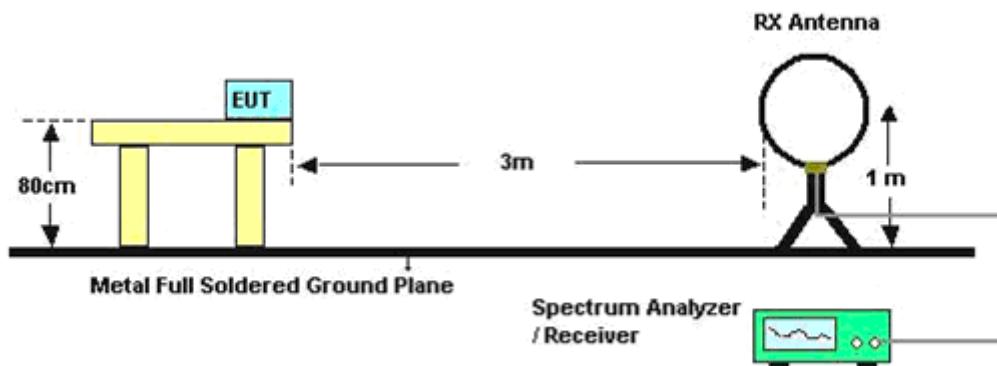

For radiated emissions above 30MHz

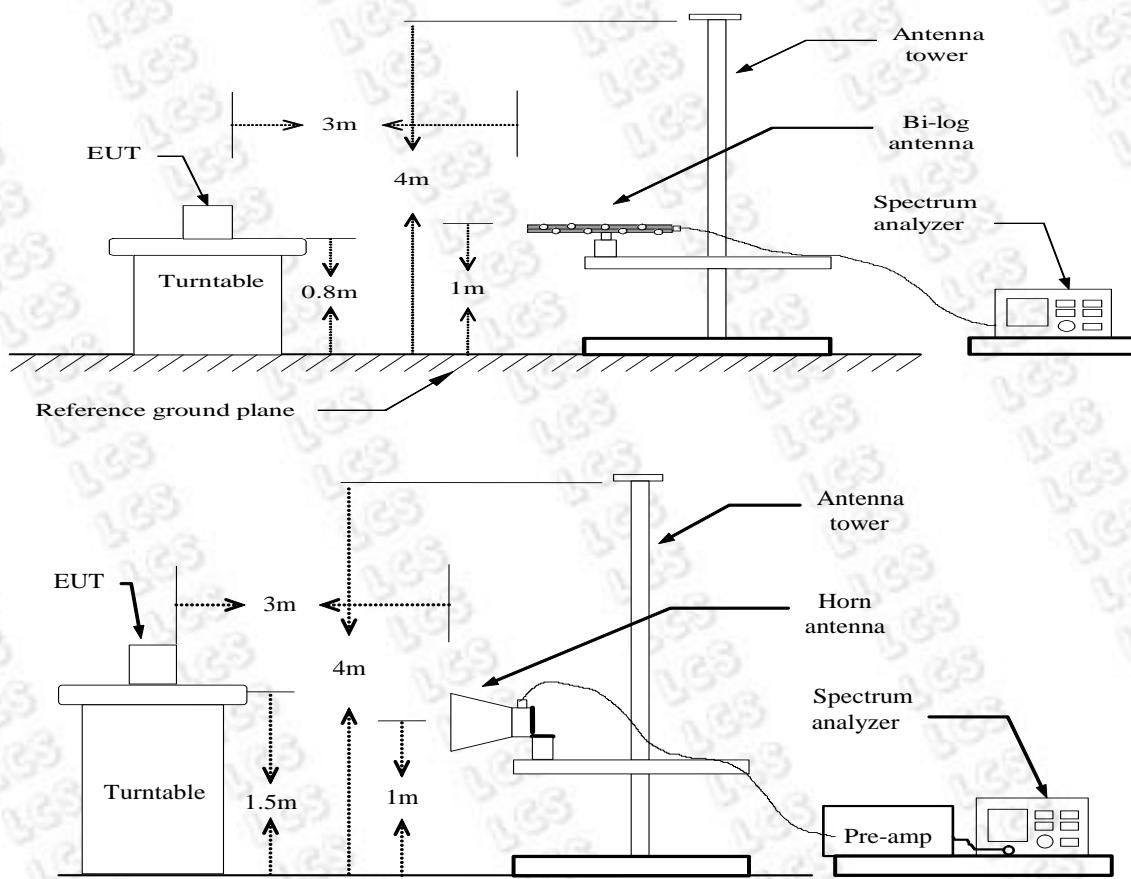

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.5.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

6.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b (Low CH)

Test result for 802.11b (Low Channel)

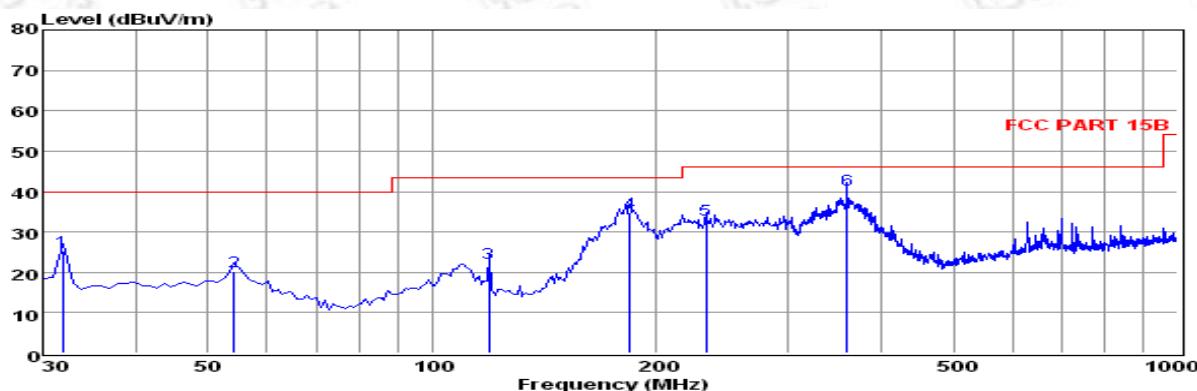

Env. / Ins:

24 °C / 56%

EUT:

wifi Module

M/N:

TOP-AP01

Power Rating:

DC 3.3V

Test Mode:

TX-Low Channel

Operator:

Dick

Memo:


HORIZONTAL

Freq MHz	Reading dBuV	CabLoss dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark	
							dB	dBuV/m
1 31.94	12.48	0.37	12.32	25.17	40.00	-14.83	QP	
2 54.25	6.72	0.46	13.05	20.23	40.00	-19.77	QP	
3 119.24	11.01	0.64	10.61	22.26	43.50	-21.24	QP	
4 184.23	23.98	0.70	10.05	34.73	43.50	-8.77	QP	
5 232.73	20.14	0.98	11.77	32.89	46.00	-13.11	QP	
6 359.80	24.70	1.18	14.43	40.31	46.00	-5.69	QP	

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

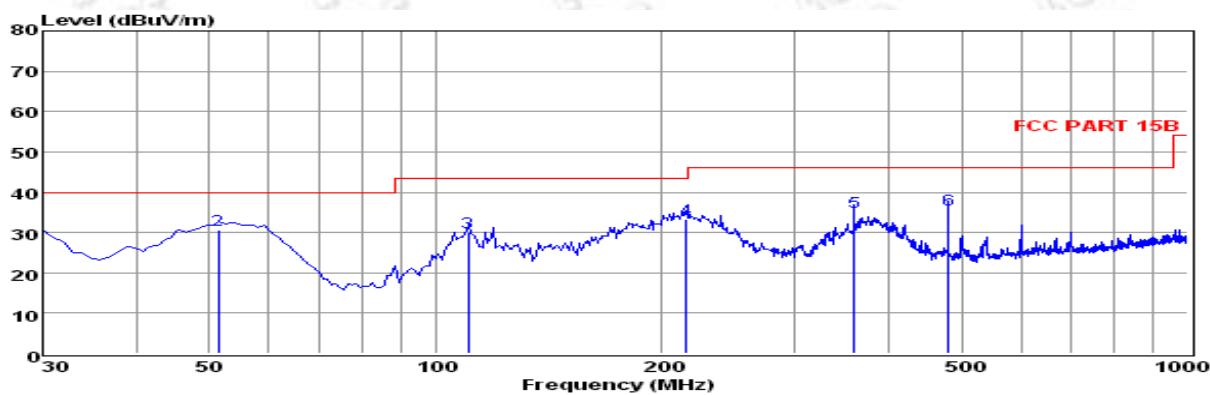

Env. / Ins: 24 °C / 56%
 EUT: Wifi Module
 M/N: TOP-AP01
 Power Rating: DC 3.3V
 Test Mode: TX-Low Channel
 Operator: Dick
 Memo:
 pol: VERTICAL

Freq	Reading	CabLoss	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	
1	30.00	15.76	0.39	12.33	28.48	40.00	-11.52	QP
2	51.34	16.88	0.54	13.19	30.61	40.00	-9.39	QP
3	110.51	17.29	0.61	12.16	30.06	43.50	-13.44	QP
4	215.27	21.30	0.95	11.05	33.30	43.50	-10.20	QP
5	359.80	19.40	1.18	14.43	35.01	46.00	-10.99	QP
6	480.08	18.32	1.31	16.07	35.70	46.00	-10.30	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Note:

Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

6.5.8. Results for Radiated Emissions (Above 1GHz) 802.11b

Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	52.01	33.06	35.04	3.94	53.97	74	-20.03	Peak	Horizontal
4824.00	39.41	33.06	35.04	3.94	41.37	54	-12.63	Average	Horizontal
4824.00	52.55	33.06	35.04	3.94	54.51	74	-19.49	Peak	Vertical
4824.00	40.40	33.06	35.04	3.94	42.36	54	-11.64	Average	Vertical

Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	52.41	33.16	35.15	3.96	54.38	74	-19.62	Peak	Horizontal
4874.00	41.09	33.16	35.15	3.96	43.06	54	-10.94	Average	Horizontal
4874.00	53.48	33.16	35.15	3.96	55.45	74	-18.55	Peak	Vertical
4874.00	46.04	33.16	35.15	3.96	48.01	54	-5.99	Average	Vertical

Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	54.66	33.26	35.14	3.98	56.76	74	-17.24	Peak	Horizontal
4924.00	41.86	33.26	35.14	3.98	43.96	54	-10.04	Average	Horizontal
4924.00	54.88	33.26	35.14	3.98	56.98	74	-17.02	Peak	Vertical
4924.00	41.13	33.26	35.14	3.98	43.23	54	-10.77	Average	Vertical

802.11g

Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	51.62	33.06	35.04	3.94	53.58	74	-20.42	Peak	Horizontal
4824.00	38.56	33.06	35.04	3.94	40.52	54	-13.48	Average	Horizontal
4824.00	53.90	33.06	35.04	3.94	55.86	74	-18.14	Peak	Vertical
4824.00	40.44	33.06	35.04	3.94	42.40	54	-11.60	Average	Vertical

Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	54.28	33.16	35.15	3.96	56.25	74	-17.75	Peak	Horizontal
4874.00	39.84	33.16	35.15	3.96	41.81	54	-12.19	Average	Horizontal
4874.00	51.36	33.16	35.15	3.96	53.33	74	-20.67	Peak	Vertical
4874.00	39.20	33.16	35.15	3.96	41.17	54	-12.83	Average	Vertical

Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	54.58	33.26	35.14	3.98	56.68	74	-17.32	Peak	Horizontal
4924.00	36.74	33.26	35.14	3.98	38.84	54	-15.16	Average	Horizontal
4924.00	51.45	33.26	35.14	3.98	53.55	74	-20.45	Peak	Vertical
4924.00	38.44	33.26	35.14	3.98	40.54	54	-13.46	Average	Vertical

802.11n HT20

Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	51.58	33.06	35.04	3.94	53.54	74	-20.46	Peak	Horizontal
4824.00	36.34	33.06	35.04	3.94	38.30	54	-15.70	Average	Horizontal
4824.00	51.59	33.06	35.04	3.94	53.55	74	-20.45	Peak	Vertical
4824.00	40.65	33.06	35.04	3.94	42.61	54	-11.39	Average	Vertical

Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	52.19	33.16	35.15	3.96	54.16	74	-19.84	Peak	Horizontal
4874.00	38.98	33.16	35.15	3.96	40.95	54	-13.05	Average	Horizontal
4874.00	51.68	33.16	35.15	3.96	53.65	74	-20.35	Peak	Vertical
4874.00	39.56	33.16	35.15	3.96	41.53	54	-12.47	Average	Vertical

Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	51.06	33.26	35.14	3.98	53.16	74	-20.84	Peak	Horizontal
4924.00	38.69	33.26	35.14	3.98	40.79	54	-13.21	Average	Horizontal
4924.00	51.13	33.26	35.14	3.98	53.23	74	-20.77	Peak	Vertical
4924.00	38.48	33.26	35.14	3.98	40.58	54	-13.42	Average	Vertical

802.11n HT40

Channel 3

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4844.00	46.72	33.06	35.04	3.94	48.68	74	-25.32	Peak	Horizontal
4844.00	37.45	33.06	35.04	3.94	39.41	54	-14.59	Average	Horizontal
4844.00	46.03	33.06	35.04	3.94	47.99	74	-26.01	Peak	Vertical
4844.00	37.64	33.06	35.04	3.94	39.60	54	-14.40	Average	Vertical

Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	47.44	33.16	35.15	3.96	49.41	74	-24.59	Peak	Horizontal
4874.00	37.31	33.16	35.15	3.96	39.28	54	-14.72	Average	Horizontal
4874.00	47.78	33.16	35.15	3.96	49.75	74	-24.25	Peak	Vertical
4874.00	37.21	33.16	35.15	3.96	39.18	54	-14.82	Average	Vertical

Channel 9

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4904.00	43.53	33.26	35.14	48.20	45.63	74	-28.37	Peak	Horizontal
4904.00	38.21	33.26	35.14	40.06	40.31	54	-13.69	Average	Horizontal
4904.00	46.36	33.26	35.14	48.22	48.46	74	-25.54	Peak	Vertical
4904.00	35.78	33.26	35.14	37.33	37.88	54	-16.12	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic or 40GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6.5.9. Results of Band Edges Test (Radiated)

802.11b

Tx-2412

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2373.42	44.52	32.89	35.16	3.51	45.76	74	-28.24	Peak	Horizontal
2373.52	37.09	32.90	35.16	3.51	38.34	54	-15.66	Average	Horizontal
2400.00	51.16	32.92	35.16	3.54	52.46	74	-21.54	Peak	Horizontal
2400.00	41.87	32.92	35.16	3.54	43.17	54	-10.83	Average	Horizontal
2381.48	48.53	32.89	35.16	3.51	49.77	74	-24.23	Peak	Vertical
2381.29	36.40	32.90	35.16	3.51	37.65	54	-16.35	Average	Vertical
2400.00	52.10	32.92	35.16	3.54	53.40	74	-20.60	Peak	Vertical
2400.00	42.53	32.92	35.16	3.54	43.83	54	-10.17	Average	Vertical

Tx-2462

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2483.50	46.03	33.06	35.18	3.60	47.51	74	-26.49	Peak	Horizontal
2483.50	37.90	33.08	35.18	3.60	39.40	54	-14.60	Average	Horizontal
2487.89	44.65	33.08	35.18	3.62	46.17	74	-27.83	Peak	Horizontal
2487.97	34.93	33.08	35.18	3.62	36.45	54	-17.55	Average	Horizontal
2483.50	46.21	33.06	35.18	3.60	47.69	74	-26.31	Peak	Vertical
2483.50	35.35	33.08	35.18	3.60	36.85	54	-17.15	Average	Vertical
2493.06	41.36	33.08	35.18	3.62	42.88	74	-31.12	Peak	Vertical
2493.06	32.70	33.08	35.18	3.62	34.22	54	-19.78	Average	Vertical

802.11g

Tx-2412

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2373.23	40.93	32.89	35.16	3.51	42.17	74	-31.83	Peak	Horizontal
2373.20	36.61	32.90	35.16	3.51	37.86	54	-16.14	Average	Horizontal
2400.00	49.37	32.92	35.16	3.54	50.67	74	-23.33	Peak	Horizontal
2400.00	32.07	32.92	35.16	3.54	33.37	54	-20.63	Average	Horizontal
2381.37	42.51	32.89	35.16	3.51	43.75	74	-30.25	Peak	Vertical
2381.36	33.79	32.90	35.16	3.51	35.04	54	-18.96	Average	Vertical
2400.00	45.45	32.92	35.16	3.54	46.75	74	-27.25	Peak	Vertical
2400.00	34.82	32.92	35.16	3.54	36.12	54	-17.88	Average	Vertical

Tx-2462

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2483.50	45.73	33.06	35.18	3.60	47.21	74	-26.79	Peak	Horizontal
2483.50	36.63	33.08	35.18	3.60	38.13	54	-15.87	Average	Horizontal
2488.89	43.40	33.08	35.18	3.62	44.92	74	-29.08	Peak	Horizontal
2488.81	31.53	33.08	35.18	3.62	33.05	54	-20.95	Average	Horizontal
2483.50	47.05	33.06	35.18	3.60	48.53	74	-25.47	Peak	Vertical
2483.50	35.87	33.08	35.18	3.60	37.37	54	-16.63	Average	Vertical
2493.18	46.09	33.08	35.18	3.62	47.61	74	-26.39	Peak	Vertical
2493.09	34.51	33.08	35.18	3.62	36.03	54	-17.97	Average	Vertical

802.11n(HT20)

Tx-2412

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2373.06	44.45	32.89	35.16	3.51	45.69	74	-28.31	Peak	Horizontal
2372.97	33.49	32.90	35.16	3.51	34.74	54	-19.26	Average	Horizontal
2400.00	48.64	32.92	35.16	3.54	49.94	74	-24.06	Peak	Horizontal
2400.00	36.36	32.92	35.16	3.54	37.66	54	-16.34	Average	Horizontal
2381.88	43.07	32.89	35.16	3.51	44.31	74	-29.69	Peak	Vertical
2381.99	35.94	32.90	35.16	3.51	37.19	54	-16.81	Average	Vertical
2400.00	46.75	32.92	35.16	3.54	48.05	74	-25.95	Peak	Vertical
2400.00	36.99	32.92	35.16	3.54	38.29	54	-15.71	Average	Vertical

Tx-2462

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2483.50	46.89	33.06	35.18	3.60	48.37	74	-25.63	Peak	Horizontal
2483.50	34.32	33.08	35.18	3.60	35.82	54	-18.18	Average	Horizontal
2488.57	43.95	33.08	35.18	3.62	45.47	74	-28.53	Peak	Horizontal
2488.55	31.92	33.08	35.18	3.62	33.44	54	-20.56	Average	Horizontal
2483.50	45.72	33.06	35.18	3.60	47.20	74	-26.80	Peak	Vertical
2483.50	36.59	33.08	35.18	3.60	38.09	54	-15.91	Average	Vertical
2493.96	46.36	33.08	35.18	3.62	47.88	74	-26.12	Peak	Vertical
2494.02	34.57	33.08	35.18	3.62	36.09	54	-17.91	Average	Vertical

802.11n(HT40)

Tx-2422

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2374.17	44.98	32.89	35.16	3.51	46.22	74	-28.48	Peak	Horizontal
2374.07	33.00	32.90	35.16	3.51	34.25	54	-19.01	Average	Horizontal
2400.00	44.94	32.92	35.16	3.54	46.24	74	-27.19	Peak	Horizontal
2400.00	35.44	32.92	35.16	3.54	36.74	54	-16.44	Average	Horizontal
2381.94	42.14	32.89	35.16	3.51	43.38	74	-30.83	Peak	Vertical
2381.85	33.45	32.90	35.16	3.51	34.70	54	-18.97	Average	Vertical
2400.00	46.29	32.92	35.16	3.54	47.59	74	-27.27	Peak	Vertical
2400.00	34.71	32.92	35.16	3.54	36.01	54	-18.38	Average	Vertical

Tx-2452

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
2483.50	46.76	33.06	35.18	3.60	48.24	74	-25.76	Peak	Horizontal
2483.50	35.86	33.08	35.18	3.60	37.36	54	-16.64	Average	Horizontal
2488.42	43.49	33.08	35.18	3.62	45.01	74	-28.99	Peak	Horizontal
2488.54	32.64	33.08	35.18	3.62	34.16	54	-19.84	Average	Horizontal
2483.50	46.40	33.06	35.18	3.60	47.88	74	-26.12	Peak	Vertical
2483.50	34.46	33.08	35.18	3.60	35.96	54	-18.04	Average	Vertical
2492.97	43.35	33.08	35.18	3.62	44.87	74	-29.13	Peak	Vertical
2492.93	32.83	33.08	35.18	3.62	34.35	54	-19.65	Average	Vertical

6.6. Conducted Spurious Emissions and Band Edges Test

6.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

6.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9kHz to 40GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

Preliminary tests on individual chains. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.

6.6.4. Test Setup Layout



This test setup layout is the same as that shown in section 5.4.4.


6.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


6.6.6. Test Results of Conducted Spurious Emissions



802.11b

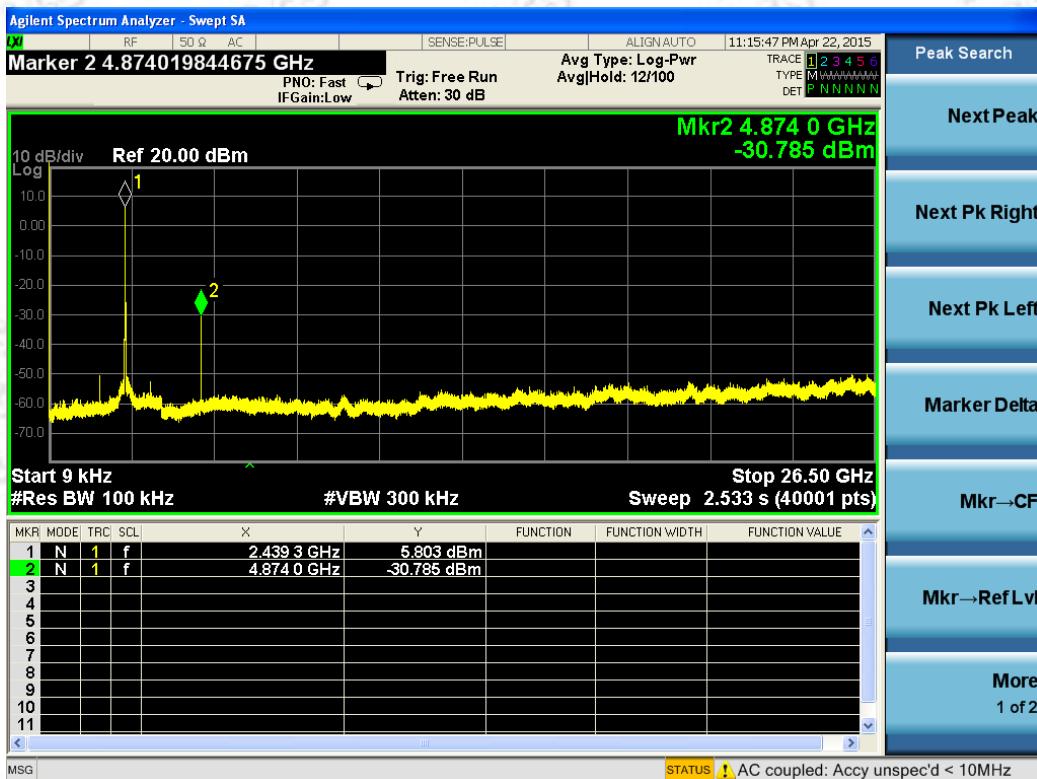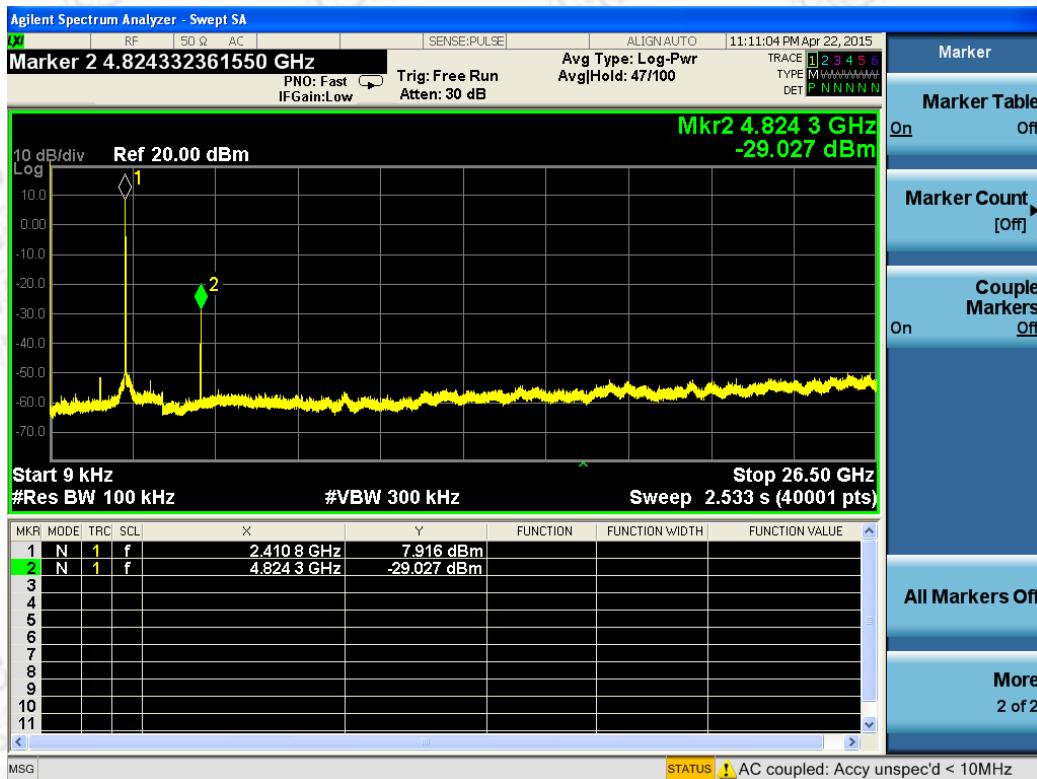


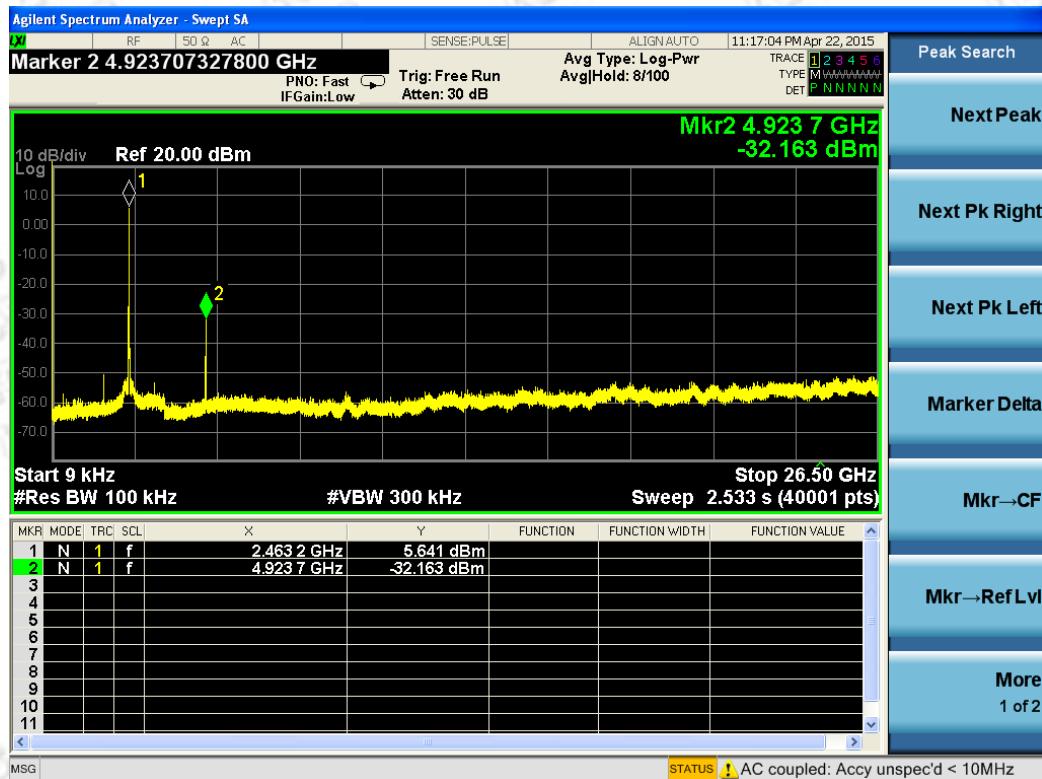



802.11g

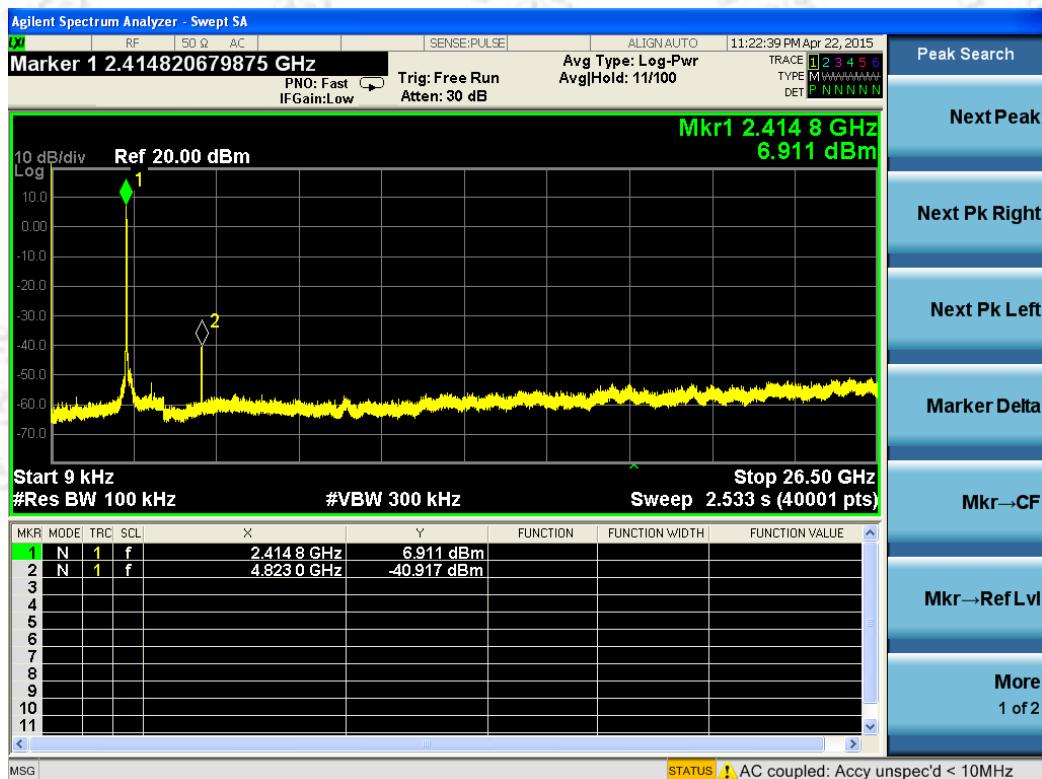

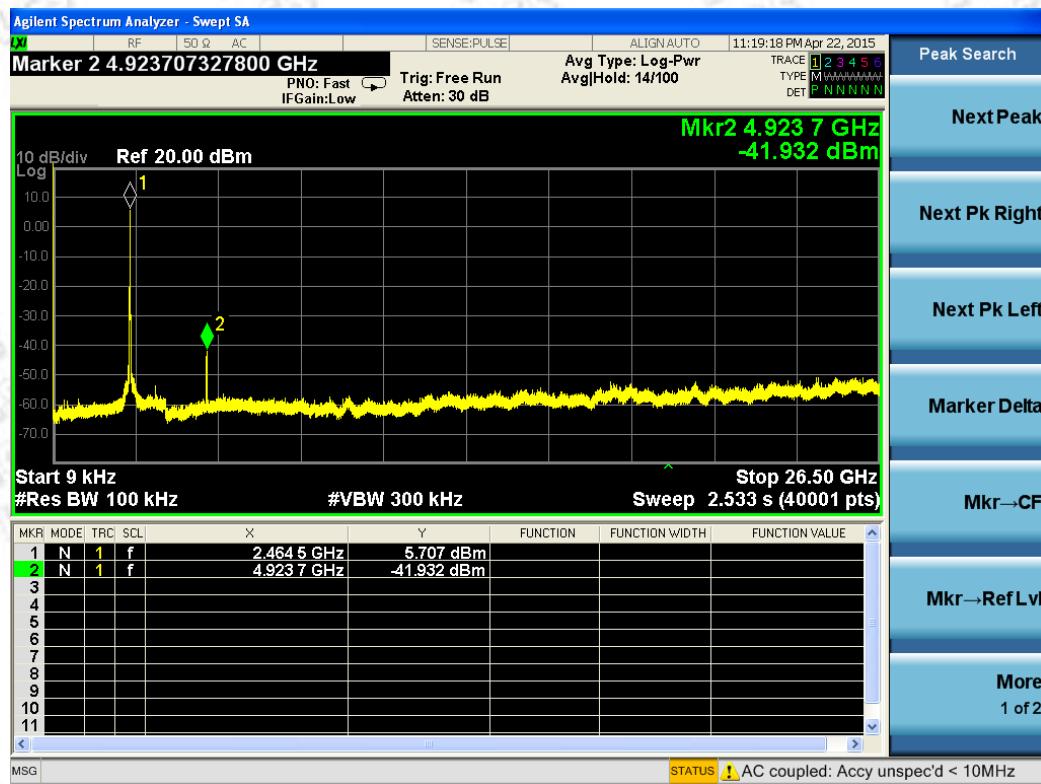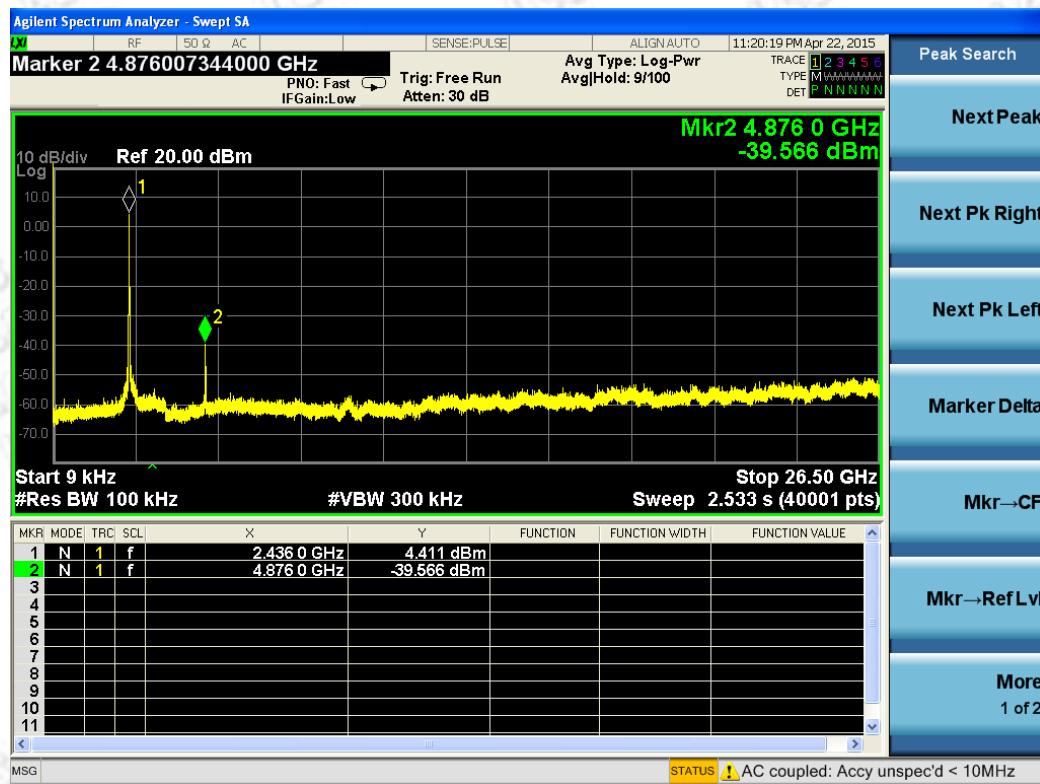




802.11n HT20

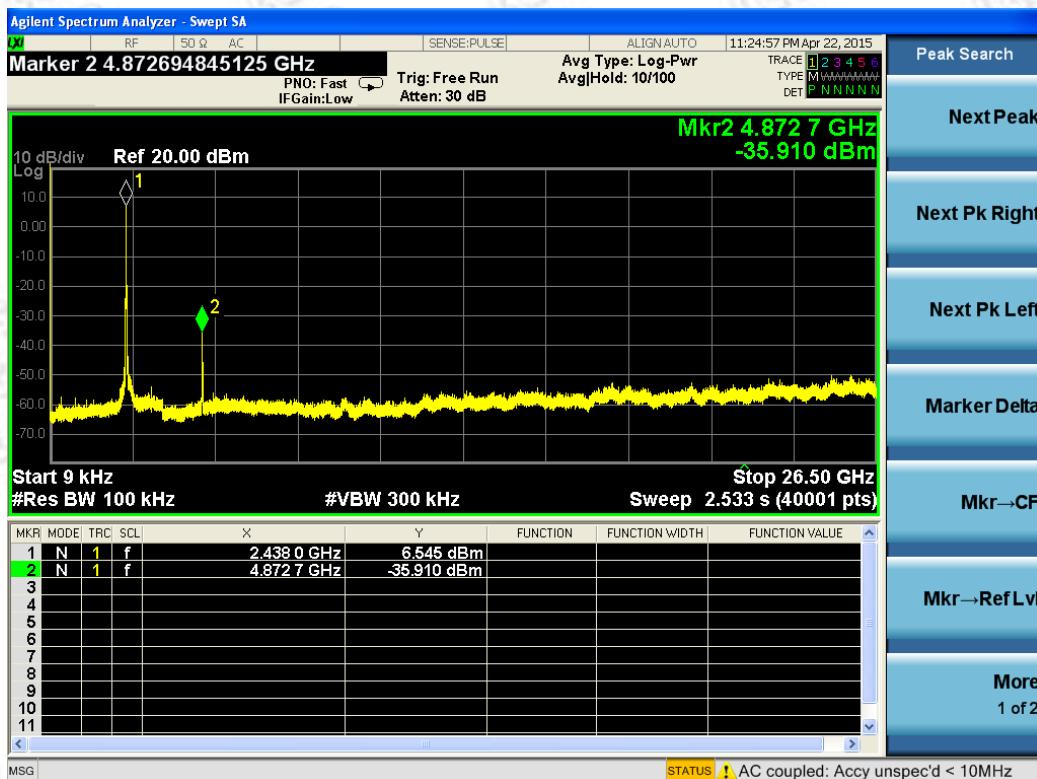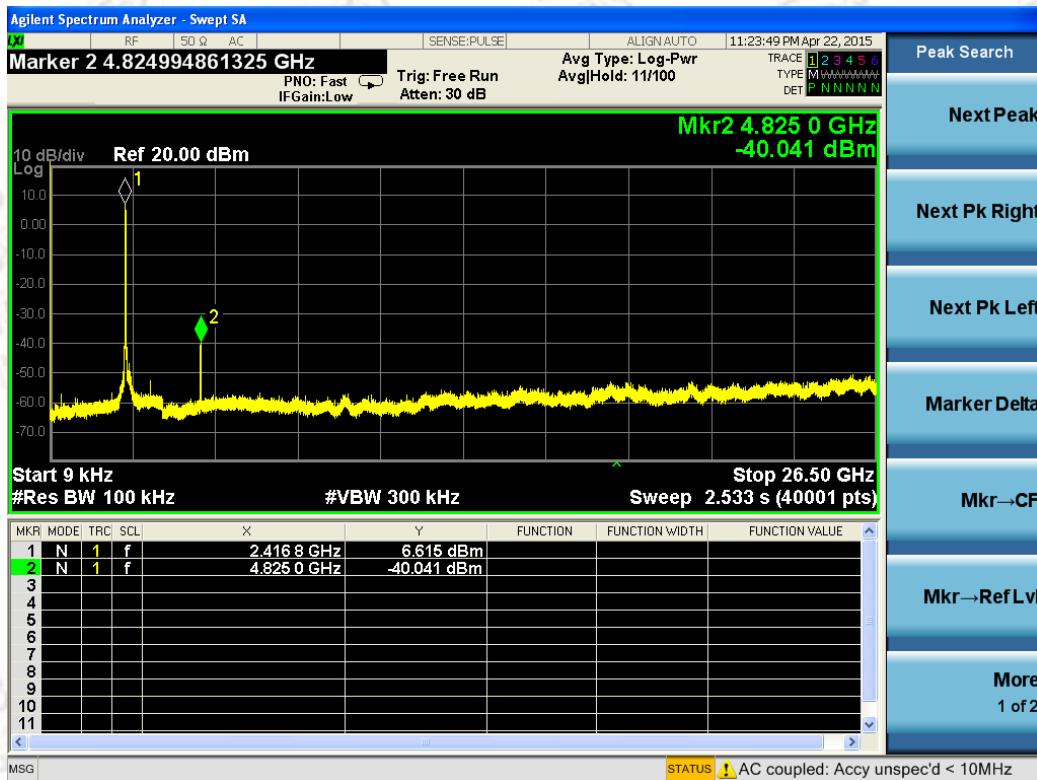

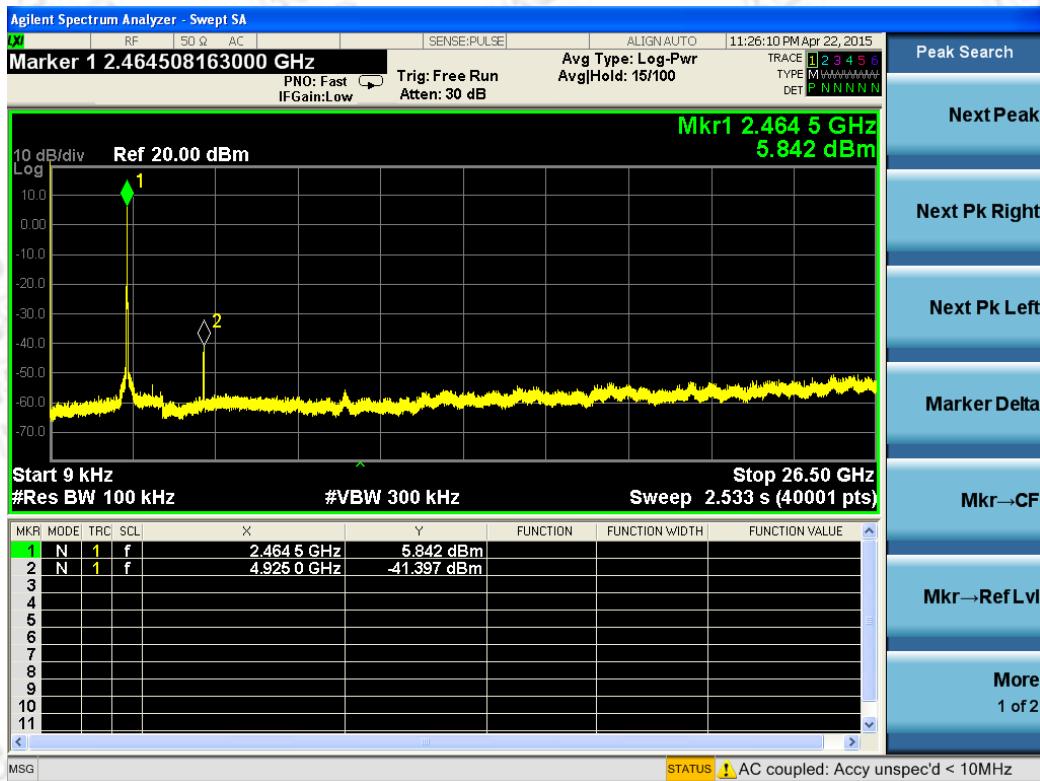

802.11n HT40

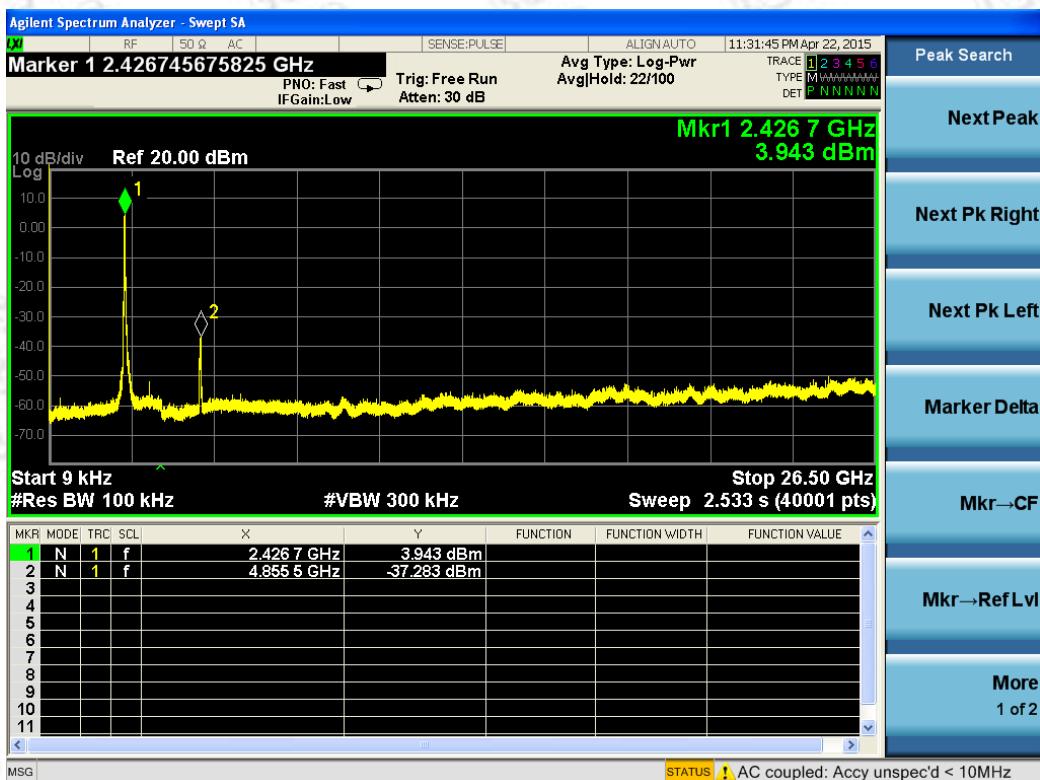

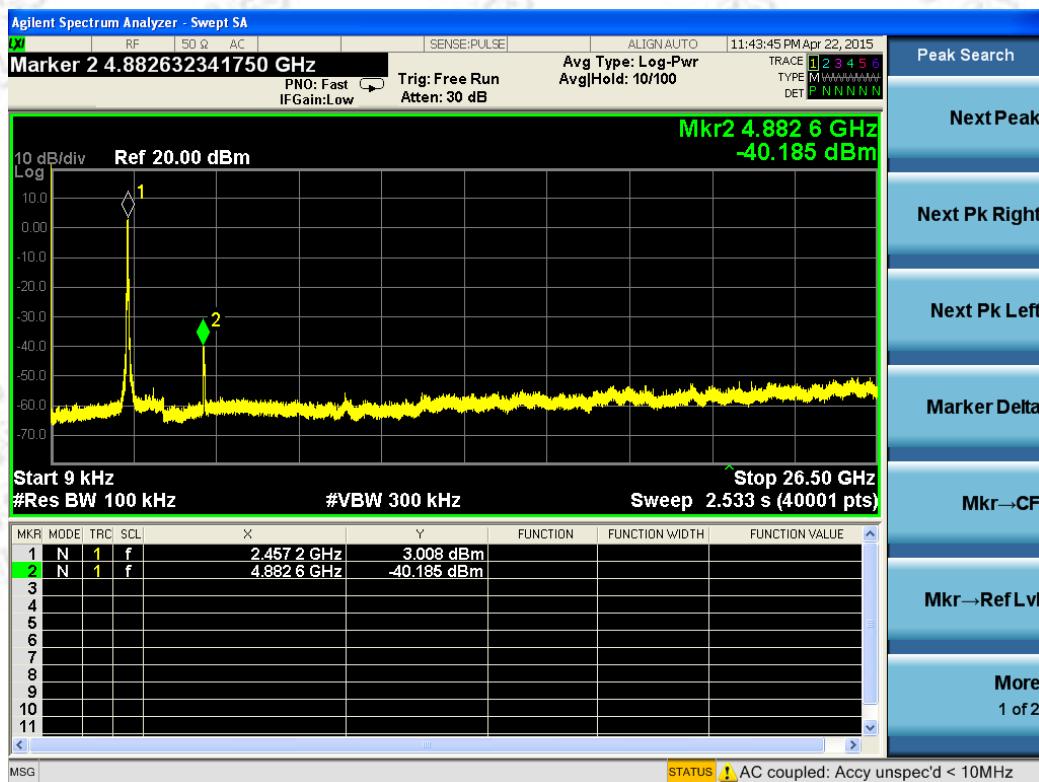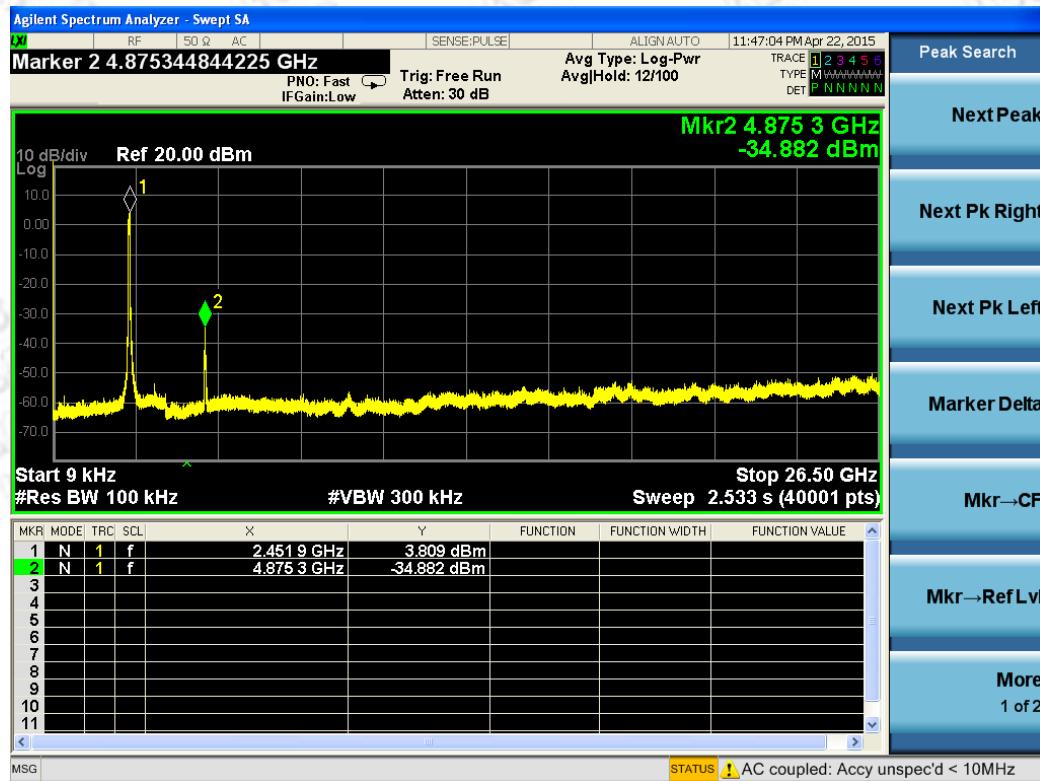


6.6.7. Test Results of Band Edges Test


802.11b





802.11g

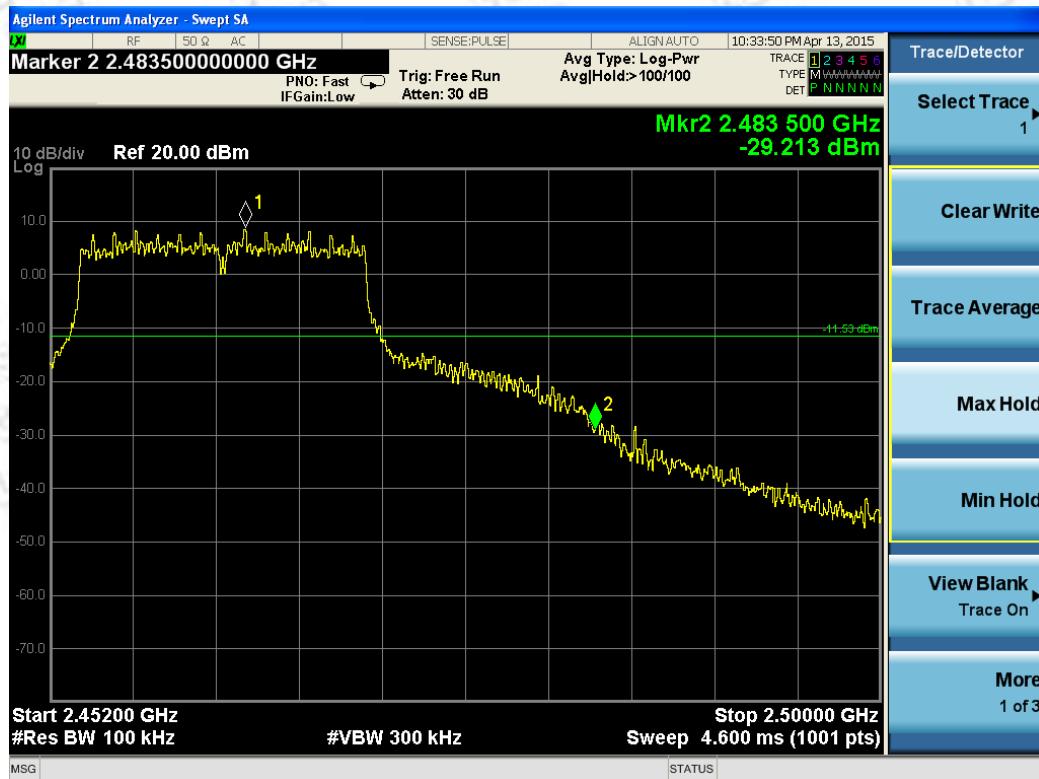

802.11n HT20

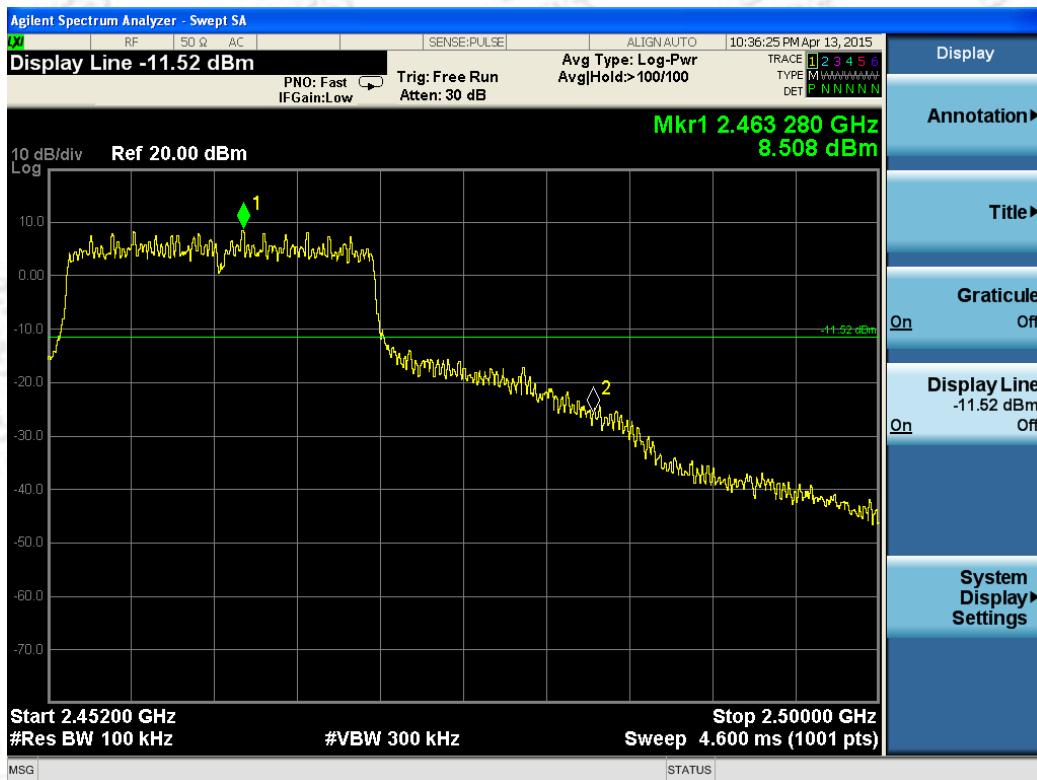

802.11n HT40

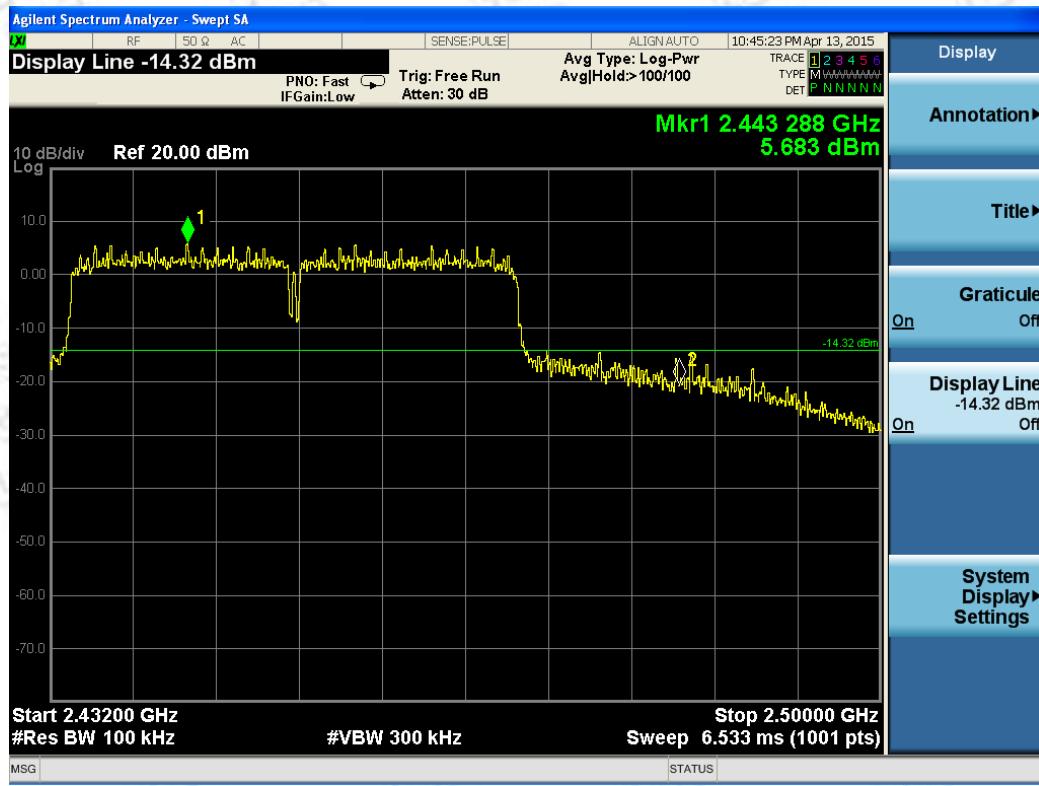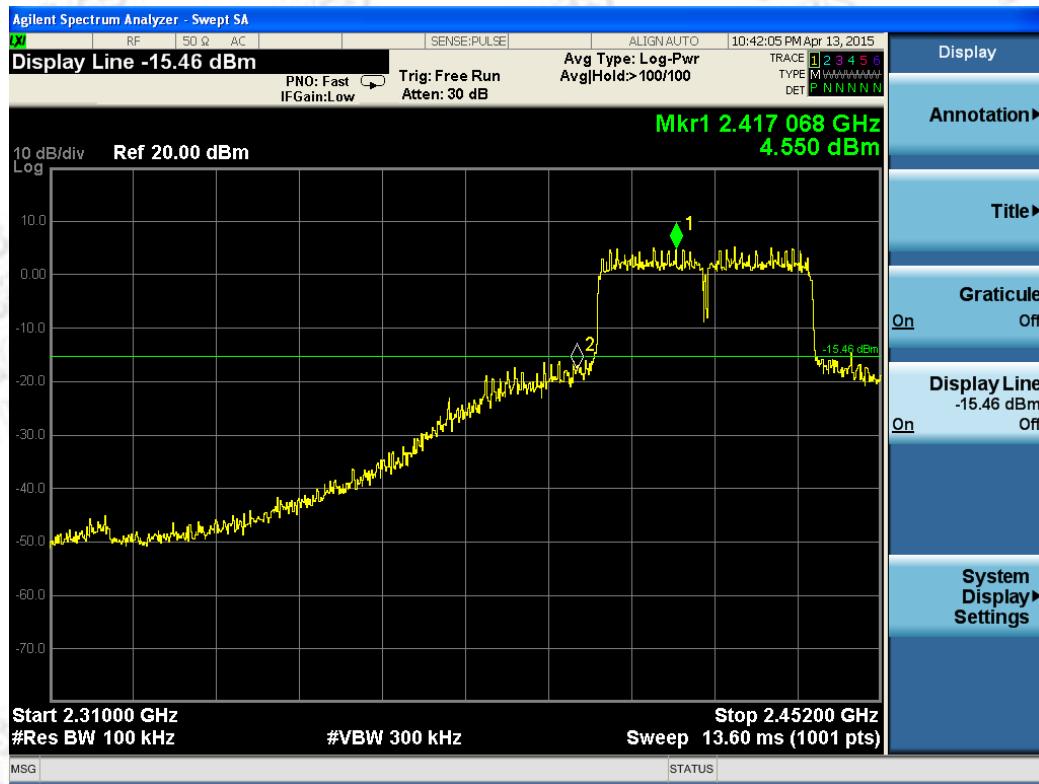


6.7. Power line conducted emissions

6.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

6.7.2 Block Diagram of Test Setup


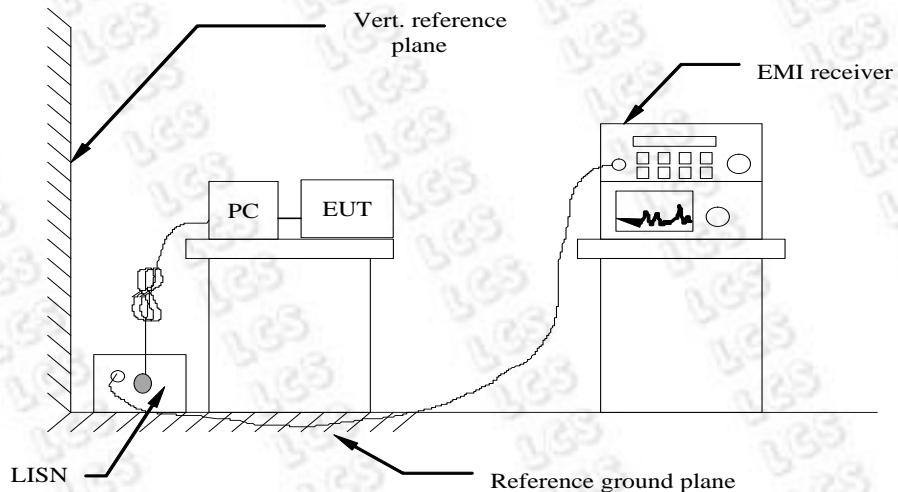


6.7.3 Test Results

PASS.

The test data please refer to following page.

Test result for 802.11b (Low Channel)

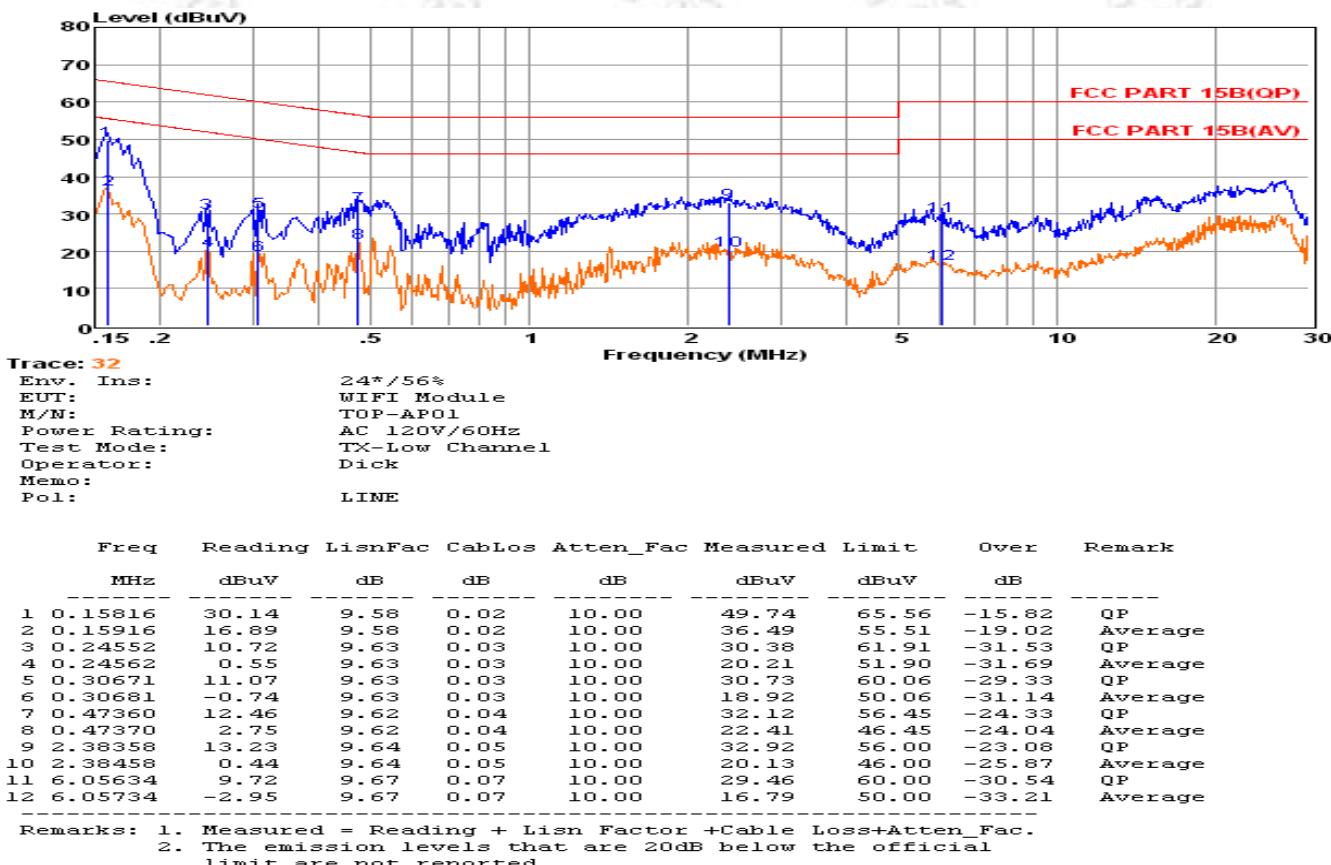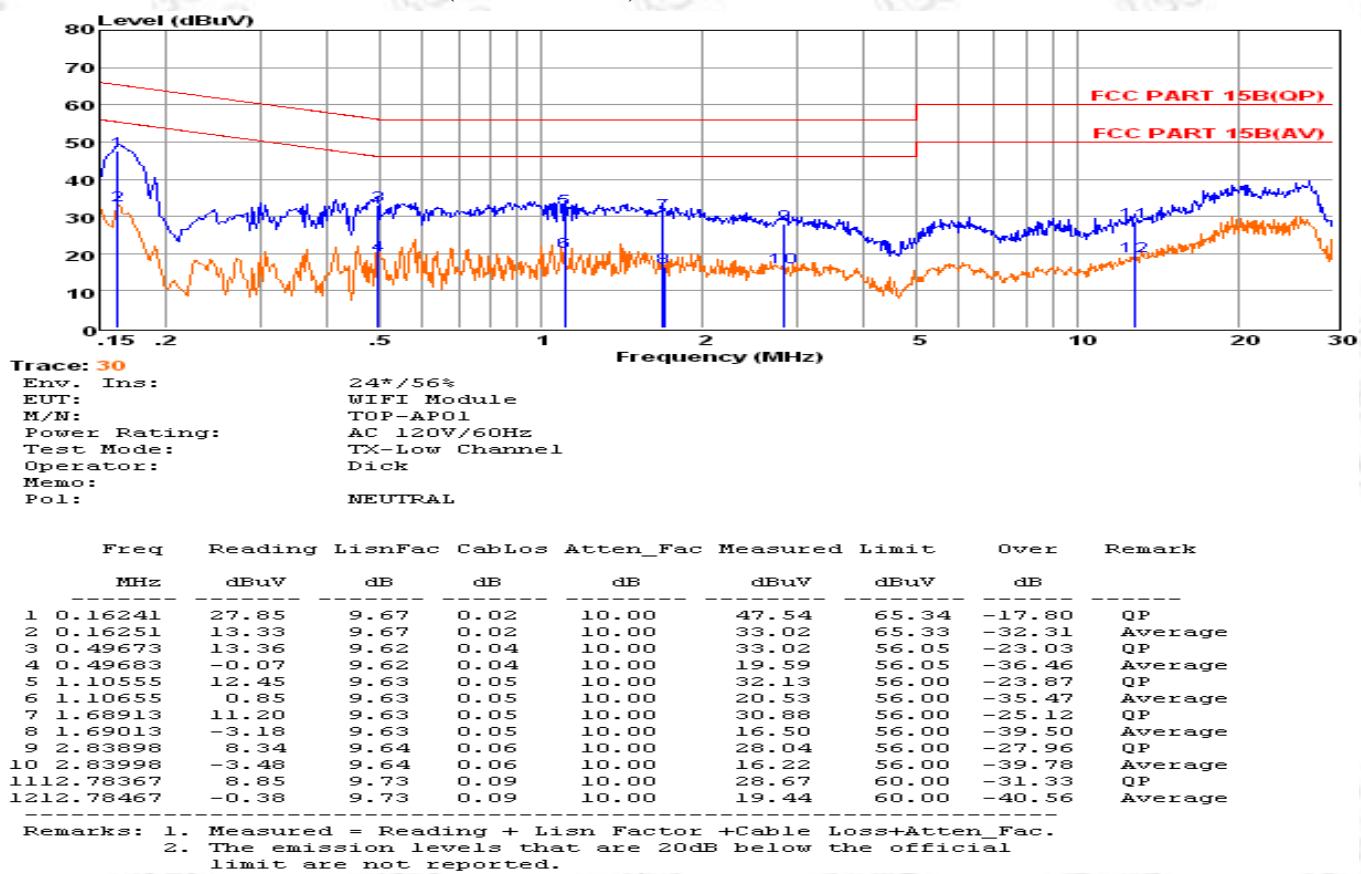

***Note: Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)).

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

7.2 Antenna Connected Construction

7.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.0dBi, and the antenna is connect to PCB board and no consideration of replacement. Please see EUT photo for details.

7.2.3. Results: Compliance.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the DSSS mode is used.

Limits:

FCC	IC
Antenna Gain	
6dBi	

T _{nom}	V _{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS		14.26	14.31	14.17
Radiated power [dBm] Measured with DSSS		16.22	16.20	16.04
Gain [dBi] Calculated		1.96	1.89	1.87
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

Result: -/-

-----THE END OF TEST REPORT-----