

FCC TEST REPORT  
FOR  
SHENZHEN ECARE ELECTRONICS CO.,LTD.  
Remote Pet Training Collar for Multi-dogs  
Test Model: PET619S  
Additional Model No. : PET619, PET619N

Prepared for : SHENZHEN ECARE ELECTRONICS CO.,LTD.  
Address : 5-6/F., Block B, Huali Industrial Building District 28, Bao An,  
Shenzhen Guangdong 518133, China.

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Mar 27, 2017  
Number of tested samples : 1  
Sample number : Prototype  
Date of Test : Mar 27, 2017~Apr 20, 2017  
Date of Report : Apr 20, 2017

**FCC TEST REPORT  
FCC CFR 47 PART 15 C(15.249)**

**Report Reference No.** ..... : **LCS170327246AE**

**Date of Issue**..... : Apr 20, 2017

**Testing Laboratory Name** ..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

**Address**..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

**Testing Location/ Procedure** ..... : Full application of Harmonised standards   
 Partial application of Harmonised standards   
 Other standard testing method

**Applicant's Name** ..... : **SHENZHEN ECARE ELECTRONICS CO.,LTD.**

**Address**..... : 5-6/F., Block B, Huali Industrial Building District 28, Bao An, Shenzhen Guangdong 518133, China.

**Test Specification**

**Standard**..... : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013

**Test Report Form No.**..... : LCSEMC-1.0

**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

**Master TRF** ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description**..... : **Remote Pet Training Collar for Multi-dogs**

**Trade Mark**..... : N/A

**Test Model**..... : PET619S

**Ratings**..... : DC 3.7V by li-ion battery(500mAh)  
 Recharge input: 5V/300mA by adapter

**Result** ..... : **Positive**


**Compiled by:**



**Supervised by:**



**Approved by:**



Calvin Weng/ Administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

## FCC -- TEST REPORT

<b>Test Report No. : LCS170327246AE</b>	<u>Apr 20, 2017</u> Date of issue
---	--------------------------------------

Test Model.....	: PET619S
EUT.....	: Remote Pet Training Collar for Multi-dogs
<b>Applicant.....</b>	<b>: SHENZHEN ECARE ELECTRONICS CO.,LTD.</b>
Address.....	: 5-6/F., Block B, Huali Industrial Building District 28, Bao An, Shenzhen Guangdong 518133, China.
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: SHENZHEN ECARE ELECTRONICS CO.,LTD.</b>
Address.....	: 5-6/F., Block B, Huali Industrial Building District 28, Bao An, Shenzhen Guangdong 518133, China.
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: SHENZHEN ECARE ELECTRONICS CO.,LTD.</b>
Address.....	: 5-6/F., Block B, Huali Industrial Building District 28, Bao An, Shenzhen Guangdong 518133, China.
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
00	Apr 20, 2017	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>6</b>
1.1 Description of Device (EUT).....	6
1.2 Support equipment List.....	6
1.3 External I/O .....	6
1.4 Description of Test Facility .....	6
1.5 List of Measuring Equipment .....	7
1.6 Statement of the Measurement Uncertainty.....	8
1.7 Measurement Uncertainty.....	8
1.8 Description of Test Modes.....	9
<b>2. TEST METHODOLOGY</b> .....	<b>10</b>
2.1 EUT Configuration .....	10
2.2 EUT Exercise.....	10
2.3 General Test Procedures .....	10
<b>3. SYSTEM TEST CONFIGURATION</b> .....	<b>11</b>
3.1 Justification.....	11
3.2 EUT Exercise Software .....	11
3.3 Special Accessories .....	11
3.4 Block Diagram/Schematics .....	11
3.5 Equipment Modifications .....	11
3.6 Test Setup .....	11
<b>4. SUMMARY OF TEST RESULTS</b> .....	<b>12</b>
<b>5. ANTENNA PORT MEASUREMENT</b> .....	<b>13</b>
5.1 20 dB Bandwidth .....	13
<b>6. RADIATED MEASUREMENT</b> .....	<b>15</b>
6.1 Standard Applicable.....	15
6.2 Instruments Setting .....	15
6.3 Test Procedures.....	16
6.4 Test Setup Layout.....	20
6.5 EUT Operation during Test .....	21
6.6 Results for Radiated Emissions .....	21
6.7 Results for Band edge Testing (Radiated) .....	25
<b>7. LINE CONDUCTED EMISSIONS</b> .....	<b>27</b>
7.1 Standard Applicable.....	27
7.2 Block Diagram of Test Setup .....	27
7.3 Test Results.....	27
<b>8. ANTENNA REQUIREMENT</b> .....	<b>30</b>
8.1 Standard Applicable.....	30
8.2 Antenna Connected Construction .....	30
<b>9. PHOTOGRAPHS OF TEST SETUP</b> .....	<b>31</b>
<b>10. PHOTOGRAPHS OF EUT</b> .....	<b>32</b>

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT	: Remote Pet Training Collar for Multi-dogs
Model Number	: PET619S
Additional Model Number	: PET619, PET619N
Model Declaration	: PCB board, structure and internal of the related model(s) are the same, So no additional models were tested.
Power Supply	: DC 3.7V by li-ion battery(500mAh) Recharge input: 5V/300mA by adapter
Frequency Range	: 915 MHz
Modulation	: FSK
Technology	
Channel Number	: 1 channel
Antenna Gain	: Integral Antenna, 0dBi(Max.)

### 1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN SUNSHINE TECHNOLOGI CAL CO.,LTD	Power Adapter	XS-0500300U	--	---

### 1.3 External I/O

I/O Port Description	Quantity	Cable
DC in Port	1	1m unshielded cable

### 1.4 Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2016	June 17,2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz-40GHz	July 16,2016	July 15,2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2016	June 17,2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2016	June 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2016	June 17,2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2016	June 17,2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2016	June 17,2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2016	June 17,2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2016	July 15,2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2016	July 15,2017
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2016	July 15,2017
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27,2016	Oct. 26,2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2016	June 17,2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2016	June 09,2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2016	June 09,2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2016	June 09,2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2016	June 17,2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2016	June 17,2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2016	June 17,2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2016	June 17,2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2016	June 17,2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2016	June 17,2017
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2016	June 17,2017

Note: --

## 1.6 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.7 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 1.8 Description of Test Modes

The following operating modes were applied for the related test items.

All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)
FSK	915
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX-915MHz.

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be TX-915MHz.

\*\*\*Note: Using a temporary antenna connector for the EUT when conducted measurements are performed.

For AC conducted emission pre-testing, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz powered for power adapter were used. Only recorded the worst case in this report.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013, FCC CFR PART 15C 15.207, 15.209, 15.249.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

### **3. SYSTEM TEST CONFIGURATION**

#### **3.1 Justification**

The system was configured for testing in a continuous transmits condition.

#### **3.2 EUT Exercise Software**

N/A.

#### **3.3 Special Accessories**

N/A.

#### **3.4 Block Diagram/Schematics**

Please refer to the related document.

#### **3.5 Equipment Modifications**

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### **3.6 Test Setup**

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

<b>Applied Standard: FCC Part 15 Subpart C</b>		
<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.215	20dB bandwidth	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.205, §15.249(d)	Emissions at Restricted Band	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

*Note: This is a DXX test report for Remote Pet Training Collar for Multi-dogs (PET619S)*


## 5. ANTENNA PORT MEASUREMENT

### 5.1 20 dB Bandwidth

#### 5.1.1 Limit

No limits

#### 5.2.2 Block Diagram of Test Setup

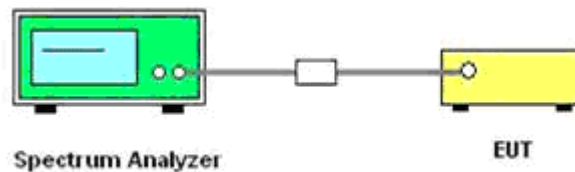


#### 5.2.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set to the maximum power setting and enable the EUT transmit continuously.
- D. For 20dB bandwidth measurement, use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW/VBW=30 KHz/ 100KHz; Sweep = auto; Detector function = peak;  
Trace = max hold.

5.2.4 Test Results

Channel	20dB Bandwidth (KHz)	99% OBW(KHz)	Limit
915MHz	129.2	109.28	Non-specified

The test data refer to the following page.

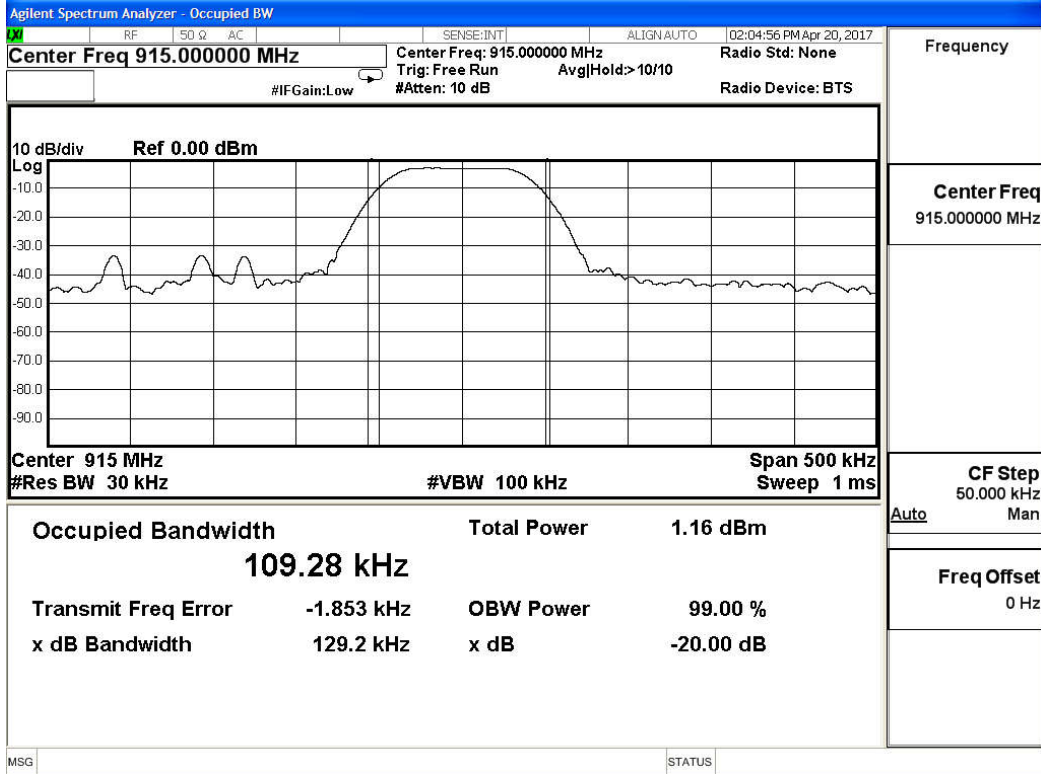

## 6. RADIATED MEASUREMENT

### 6.1 Standard Applicable

1. According to §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

2. According to §15.249 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	millivolts/meter	dBuV/m	microvolts/meter	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth

### 6.2 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

## 6.3 Test Procedures

### 1) Sequence of testing 9 kHz to 30 MHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

#### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


### 6.4 Test Setup Layout

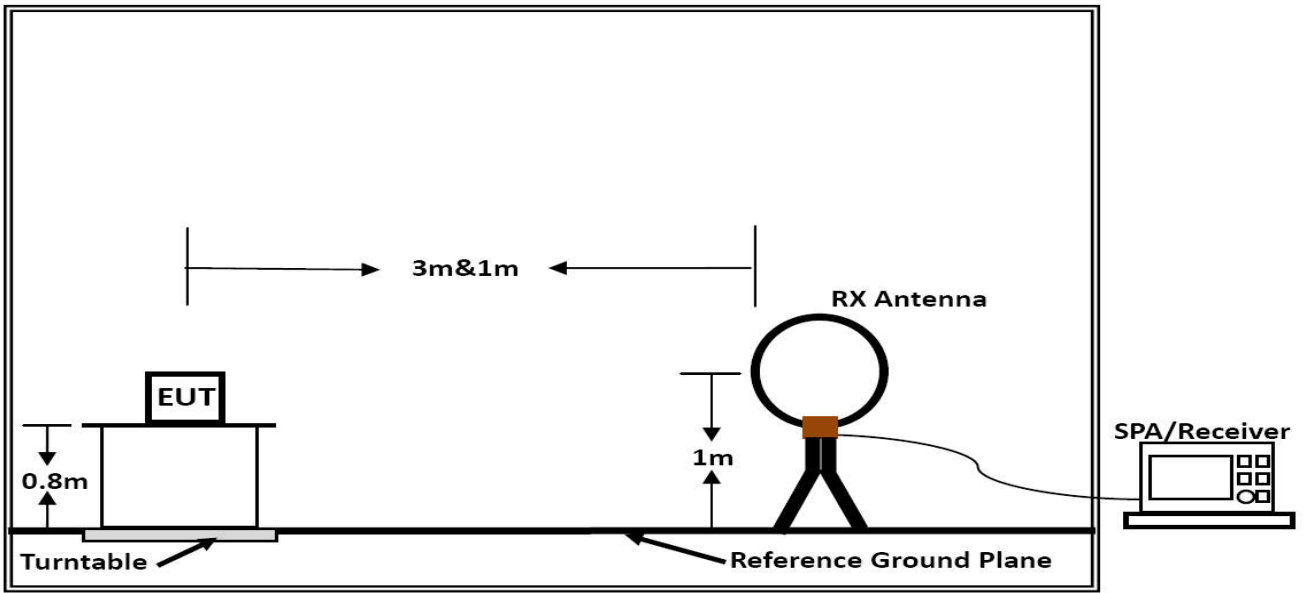

**Below 30MHz**

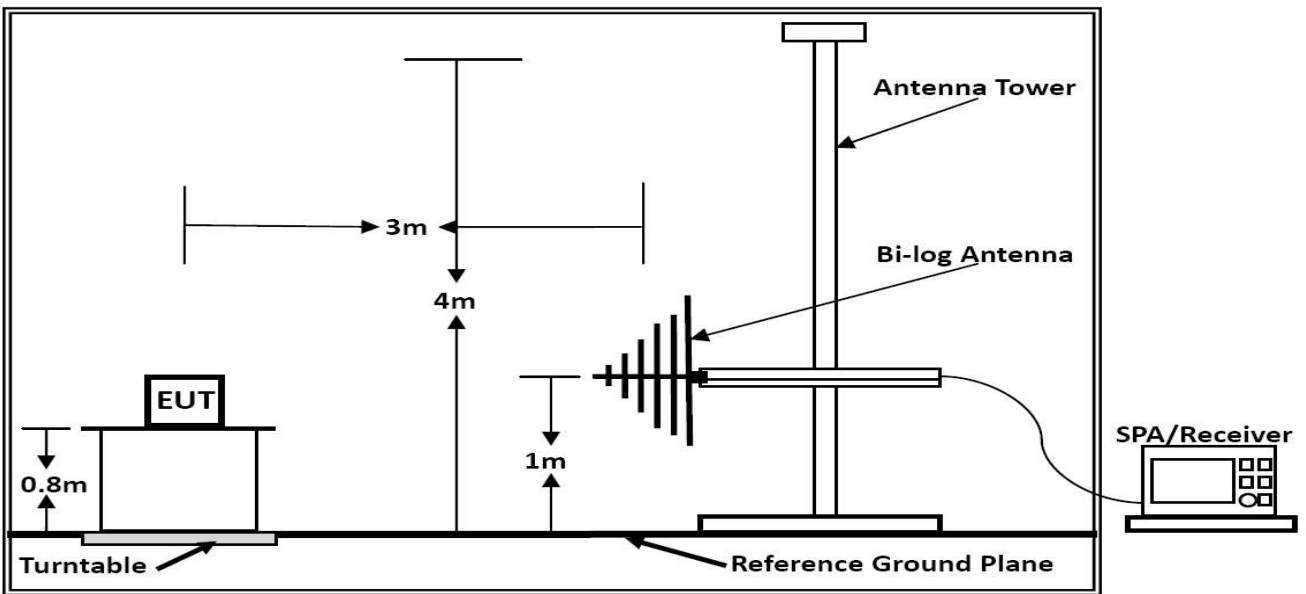

**Below 1GHz**

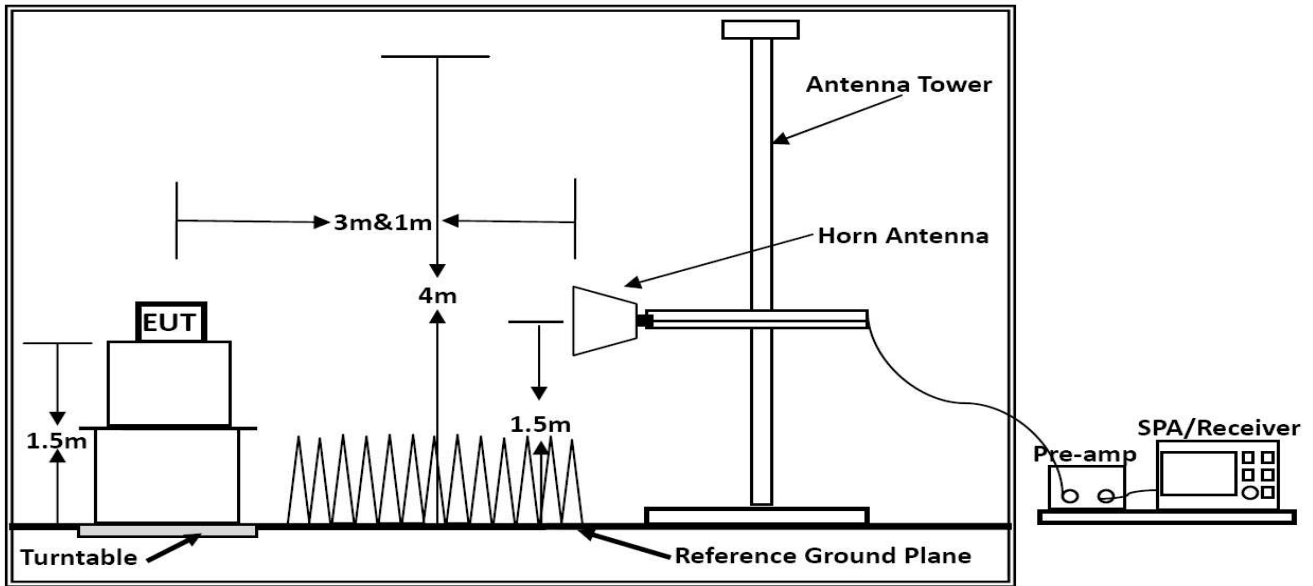

**Above 1GHz**

## 6.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 6.6 Results for Radiated Emissions

### **PASS.**

*Only record the worst test result in this report.*


*The radiated emissions from 9 kHz to 30MHz are at least 20dB below the official limit and no need to report.*

*The test data please refer to following page:*

**Below 1GHz**

Temperature	24.8°C	Humidity	51%
Test Engineer	Chaz Liu	Configurations	TX-915MHz


**Horizontal:**

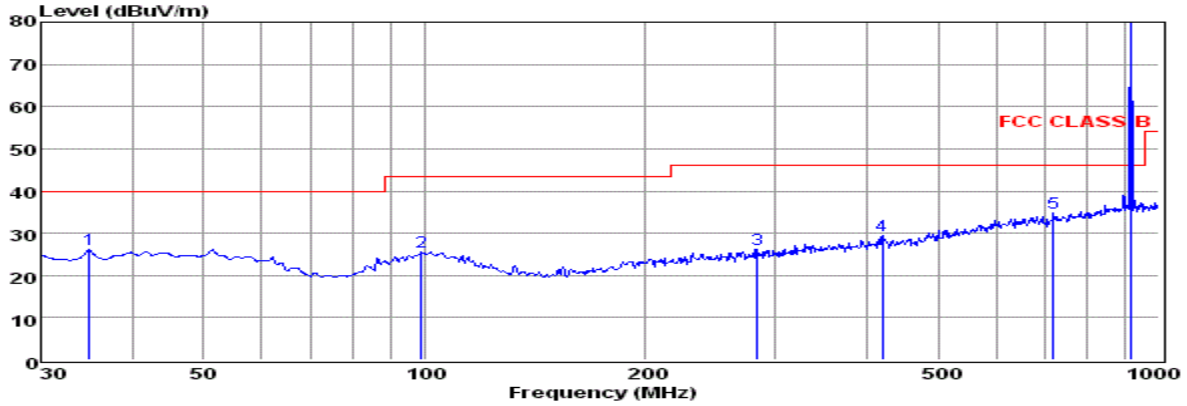

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.88	13.41	0.41	12.30	26.12	40.00	-13.88	QP
2	98.83	11.78	0.61	13.09	25.48	43.50	-18.02	QP
3	283.98	12.57	1.00	12.75	26.32	46.00	-19.68	QP
4	420.58	12.49	1.33	15.47	29.29	46.00	-16.71	QP
5	719.20	14.04	1.75	19.05	34.84	46.00	-11.16	QP
6	915.00	63.05	2.04	21.19	86.28	46.00	40.28	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

**Vertical:**

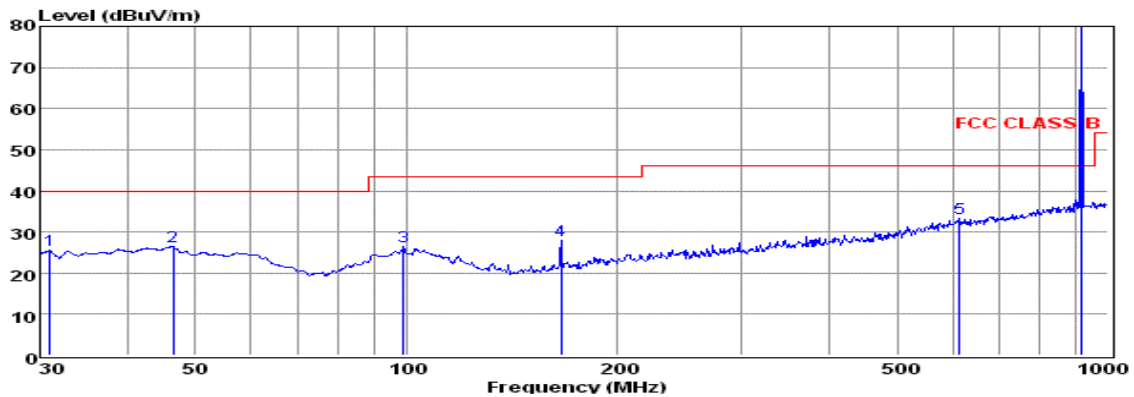

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.96	12.76	0.39	12.32	25.47	40.00	-14.53	QP
2	46.50	12.62	0.35	13.46	26.43	40.00	-13.57	QP
3	98.83	12.79	0.61	13.09	26.49	43.50	-17.01	QP
4	166.07	18.21	0.77	8.85	27.83	43.50	-15.67	QP
5	614.21	13.33	1.48	18.50	33.31	46.00	-12.69	QP
6	915.00	69.30	2.04	21.19	92.53	46.00	46.53	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

\*\*\*Note:


Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For the fundamental emission limit at 915MHz, please refer to following page.

Horizontal:

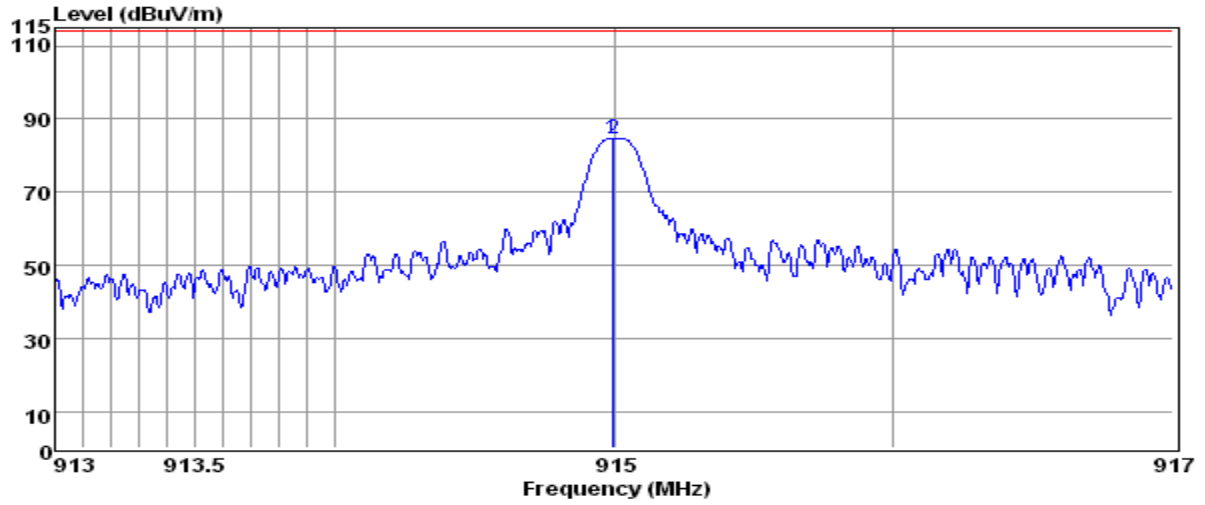

Vertical:

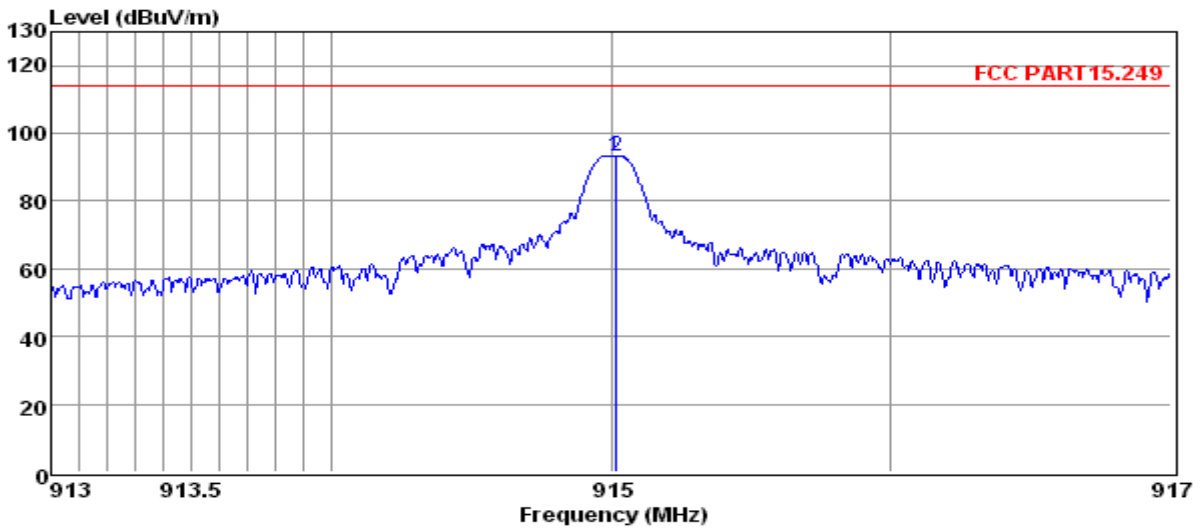

Frequency (MHz)	Pol.	Measure Result (QP, dBuV/m)	QP Limit (dBuV/m)	Margin (dBuV/m)	Result
915	H	86.28	94	-7.72	Pass
915	V	92.53	94	-1.47	Pass

**Above 1GHz**

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1830.00	48.18	33.06	35.04	2.14	49.14	74.00	-24.06	Peak	Horizontal
1830.00	44.13	33.06	35.04	2.14	45.09	54.00	-8.11	Average	Horizontal
1830.00	50.77	33.06	35.04	2.14	51.73	74.00	-21.47	Peak	Vertical
1830.00	46.02	33.06	35.04	2.14	46.98	54.00	-6.22	Average	Vertical
2745.00	54.65	33.11	35.09	2.72	55.39	74.00	-18.61	Peak	Horizontal
2745.00	39.99	33.11	35.09	2.72	40.73	54.00	-13.27	Average	Horizontal
2745.00	59.03	33.11	35.09	2.72	59.77	74.00	-14.23	Peak	Vertical
2745.00	42.18	33.11	35.09	2.72	42.92	54.00	-11.08	Average	Vertical
3660.00	54.62	33.03	35.07	3.12	55.70	74.00	-18.30	Peak	Horizontal
3660.00	40.23	33.03	35.07	3.12	41.31	54.00	-12.69	Average	Horizontal
3660.00	58.81	33.03	35.07	3.12	59.89	74.00	-14.11	Peak	Vertical
3660.00	41.91	33.03	35.07	3.12	42.99	54.00	-11.01	Average	Vertical
9150.00	49.70	33.26	35.14	3.98	51.80	74.00	-22.20	Peak	Horizontal
9150.00	45.32	33.26	35.14	3.98	47.42	54.00	-6.58	Average	Horizontal
9150.00	52.85	33.26	35.14	3.98	54.95	74.00	-19.05	Peak	Vertical
9150.00	46.67	33.26	35.14	3.98	48.77	54.00	-5.23	Average	Vertical

**Notes:**


1. Measuring frequencies from 9k~10th harmonic (ex. 10GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 10GHz) were made with an instrument using Peak detector mode.




### 6.7 Results for Band edge Testing (Radiated)

Note: Only recorded the worst test result.


Horizontal:

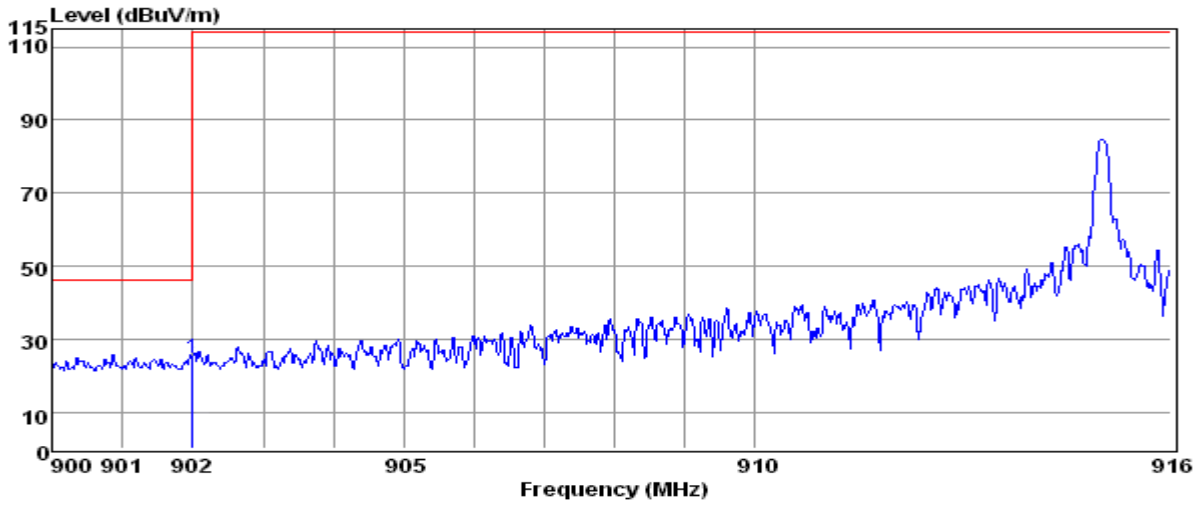


Vertical:

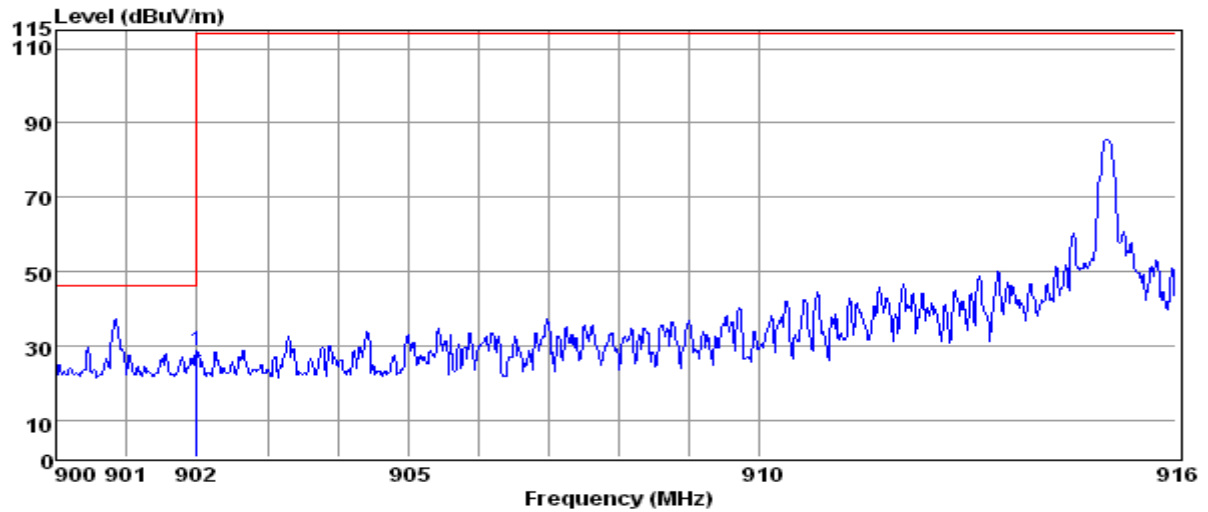

Horizontal:

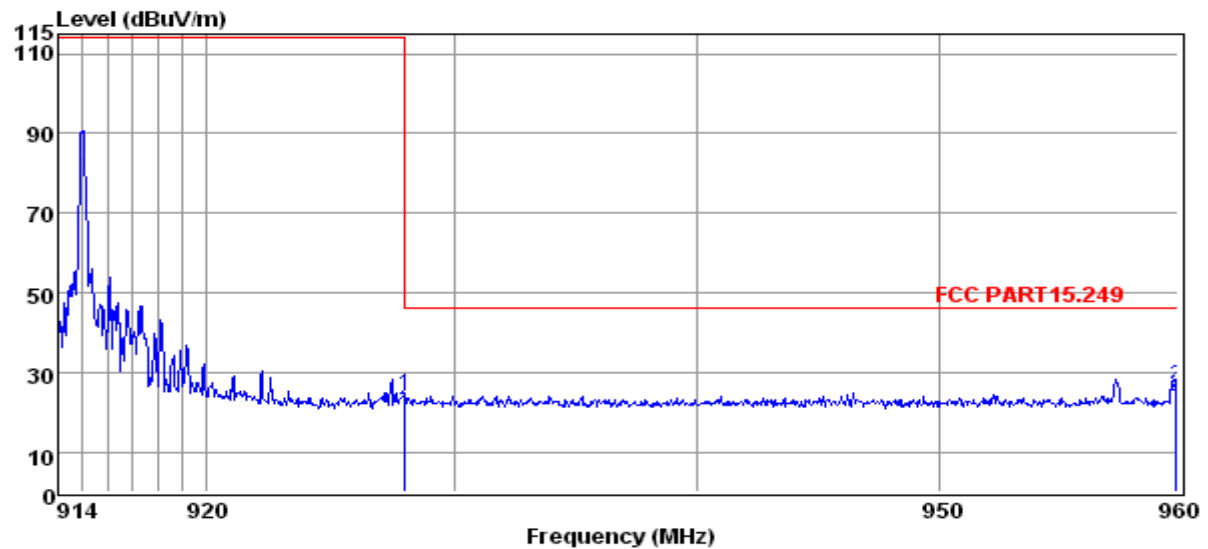

Vertical:

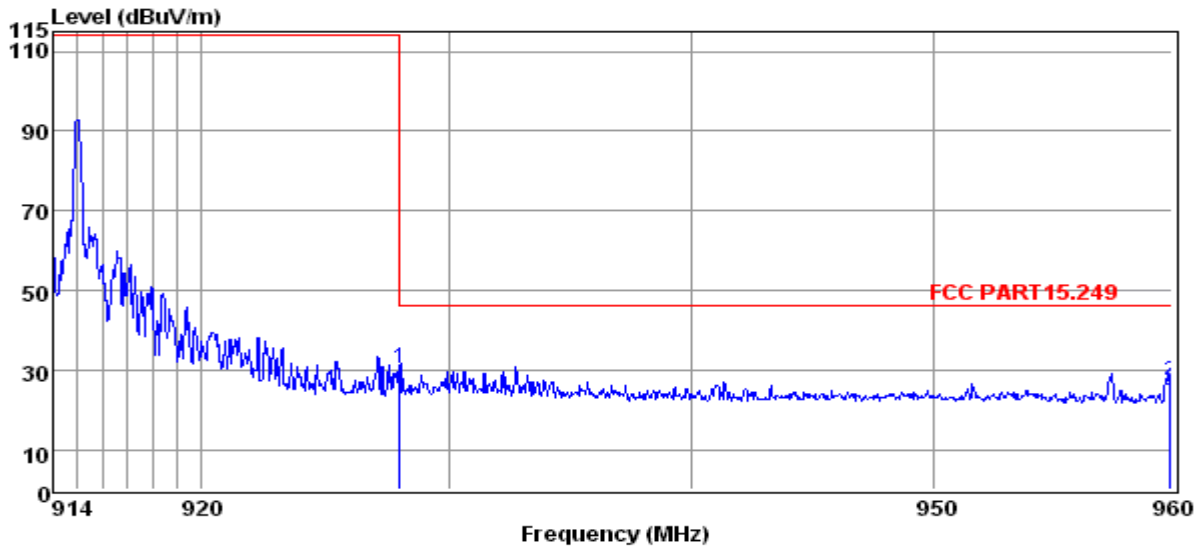

TX-915MHz

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
902	4.24	21.13	1.98	27.35	46.00	-18.65	QP	Horizontal
928	3.37	21.32	2.07	26.76	46.00	-19.24	QP	Horizontal
960	5.27	21.47	2.11	28.85	46.00	-17.15	QP	Horizontal
902	5.33	21.13	1.98	28.44	46.00	-17.56	QP	Vertical
928	6.29	21.32	2.07	29.68	46.00	-16.32	QP	Vertical
960	5.35	21.47	2.11	28.93	46.00	-17.07	QP	Vertical


## 7. LINE CONDUCTED EMISSIONS

### 7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range(MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 7.2 Block Diagram of Test Setup

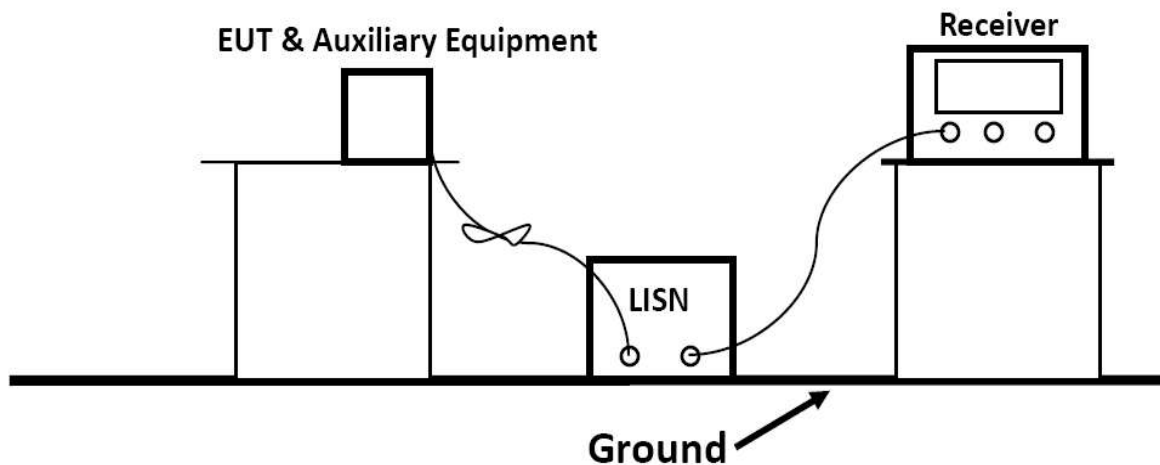


### 7.3 Test Results

PASS.

*The test data please refer to following page.*


**Result @120VAC:**  
**Line:**

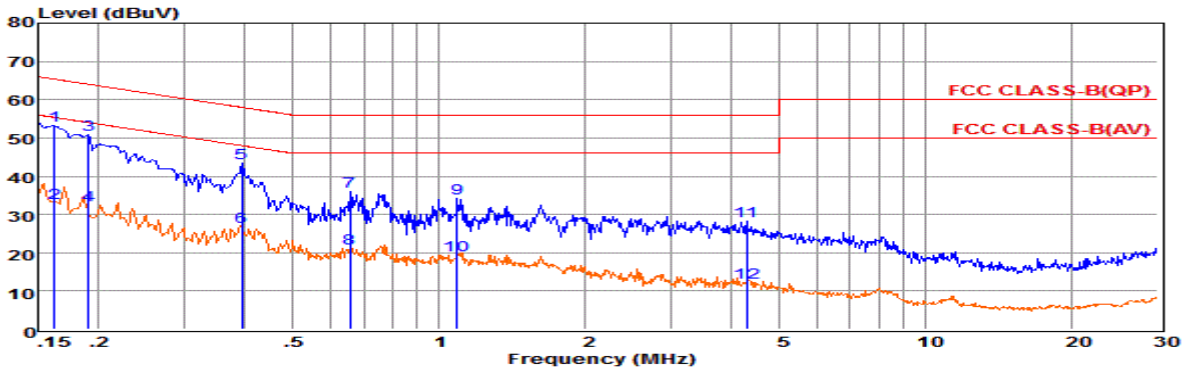

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	33.68	9.59	0.02	10.00	53.29	65.34	-12.05	QP
2	0.16	13.31	9.59	0.02	10.00	32.92	55.33	-22.41	Average
3	0.19	31.36	9.62	0.02	10.00	51.00	64.02	-13.02	QP
4	0.19	12.81	9.62	0.02	10.00	32.45	54.02	-21.57	Average
5	0.39	23.63	9.62	0.04	10.00	43.29	57.99	-14.70	QP
6	0.39	7.11	9.62	0.04	10.00	26.77	47.99	-21.22	Average
7	0.66	16.34	9.64	0.04	10.00	36.02	56.00	-19.98	QP
8	0.66	1.51	9.64	0.04	10.00	21.19	46.00	-24.81	Average
9	1.09	14.50	9.63	0.05	10.00	34.18	56.00	-21.82	QP
10	1.09	-0.31	9.63	0.05	10.00	19.37	46.00	-26.63	Average
11	4.29	8.54	9.65	0.06	10.00	28.25	56.00	-27.75	QP
12	4.29	-7.62	9.65	0.06	10.00	12.09	46.00	-33.91	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

**Neutral:**

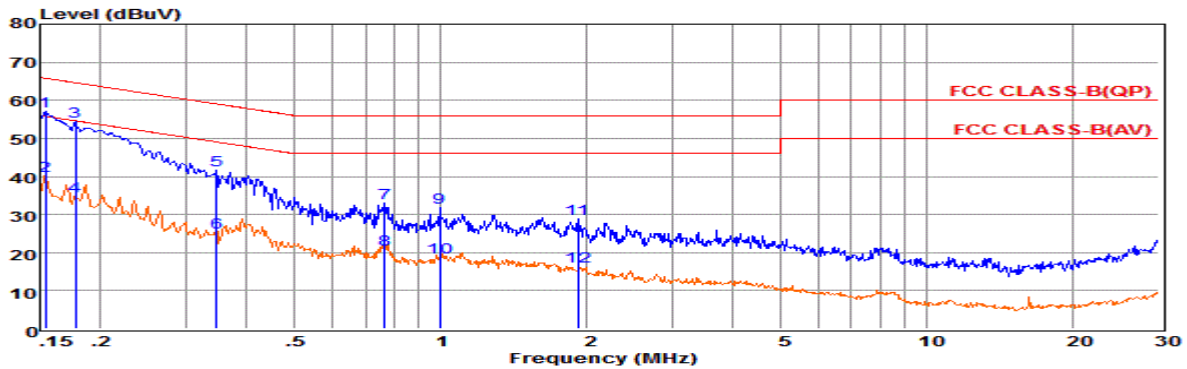


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.15	37.34	9.69	0.02	10.00	57.05	65.78	-8.73	QP
2	0.15	20.38	9.69	0.02	10.00	40.09	55.77	-15.68	Average
3	0.18	34.65	9.64	0.02	10.00	54.31	64.59	-10.28	QP
4	0.18	15.07	9.63	0.02	10.00	34.72	54.59	-19.87	Average
5	0.35	22.05	9.61	0.03	10.00	41.69	59.05	-17.36	QP
6	0.35	5.73	9.61	0.03	10.00	25.37	49.04	-23.67	Average
7	0.77	13.40	9.63	0.04	10.00	33.07	56.00	-22.93	QP
8	0.77	1.05	9.63	0.04	10.00	20.72	46.00	-25.28	Average
9	0.99	12.18	9.63	0.05	10.00	31.86	56.00	-24.14	QP
10	0.99	-0.90	9.63	0.05	10.00	18.78	46.00	-27.22	Average
11	1.92	9.26	9.63	0.05	10.00	28.94	56.00	-27.06	QP
12	1.92	-3.44	9.63	0.05	10.00	16.24	46.00	-29.76	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

**Result @240VAC:**


**Line:**

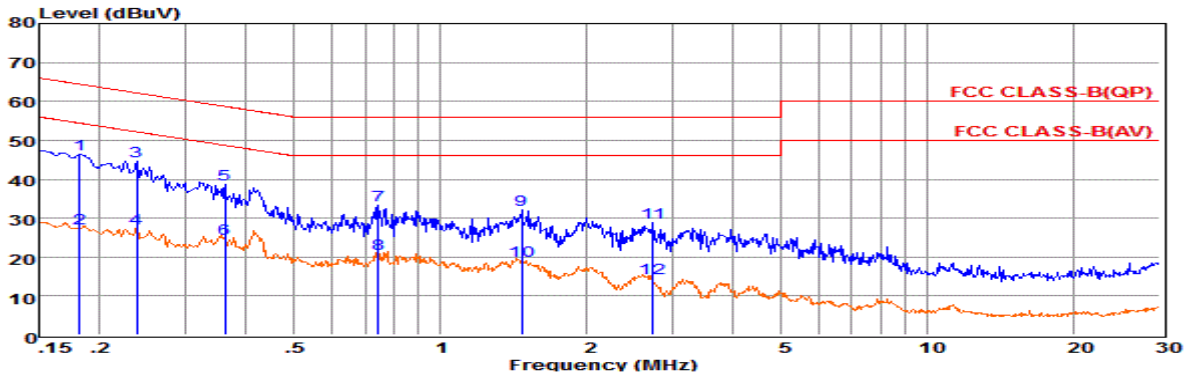

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.18	26.90	9.61	0.02	10.00	46.53	64.42	-17.89	QP
2	0.18	7.80	9.61	0.02	10.00	27.43	54.41	-26.98	Average
3	0.24	24.93	9.63	0.03	10.00	44.59	62.17	-17.58	QP
4	0.24	7.58	9.63	0.03	10.00	27.24	52.17	-24.93	Average
5	0.36	18.88	9.62	0.03	10.00	38.53	58.69	-20.16	QP
6	0.36	5.14	9.62	0.03	10.00	24.79	48.69	-23.90	Average
7	0.75	13.61	9.64	0.04	10.00	33.29	56.00	-22.71	QP
8	0.75	1.20	9.64	0.04	10.00	20.88	46.00	-25.12	Average
9	1.47	12.44	9.64	0.05	10.00	32.13	56.00	-23.87	QP
10	1.47	-0.80	9.64	0.05	10.00	18.89	46.00	-27.11	Average
11	2.74	9.10	9.64	0.05	10.00	28.79	56.00	-27.21	QP
12	2.74	-5.13	9.64	0.05	10.00	14.56	46.00	-31.44	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

**Neutral:**

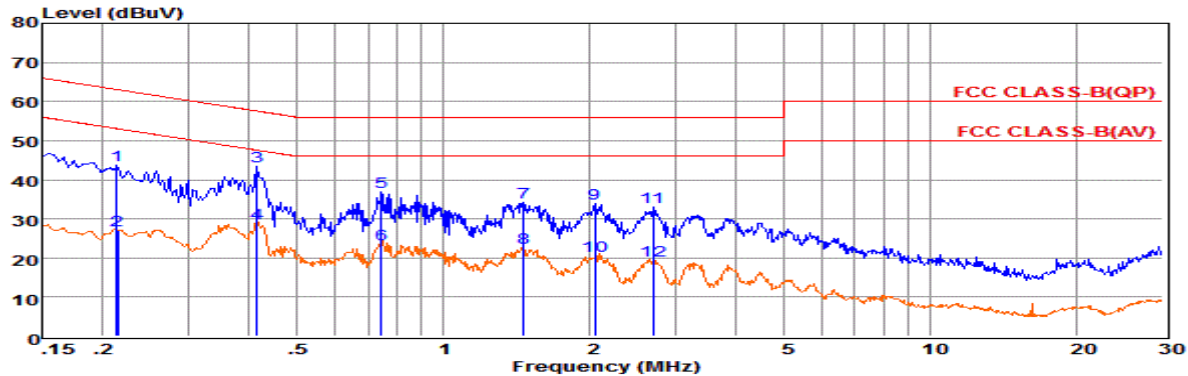

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.21	24.02	9.59	0.03	10.00	43.64	63.05	-19.41	QP
2	0.21	7.38	9.59	0.03	10.00	27.00	53.05	-26.05	Average
3	0.41	23.73	9.61	0.04	10.00	43.38	57.55	-14.17	QP
4	0.41	9.28	9.61	0.04	10.00	28.93	47.55	-18.62	Average
5	0.75	17.06	9.63	0.04	10.00	36.73	56.00	-19.27	QP
6	0.75	3.82	9.63	0.04	10.00	23.49	46.00	-22.51	Average
7	1.46	14.46	9.63	0.05	10.00	34.14	56.00	-21.86	QP
8	1.46	2.97	9.63	0.05	10.00	22.65	46.00	-23.35	Average
9	2.04	14.09	9.63	0.05	10.00	33.77	56.00	-22.23	QP
10	2.05	0.93	9.63	0.05	10.00	20.61	46.00	-25.39	Average
11	2.69	13.19	9.64	0.05	10.00	32.88	56.00	-23.12	QP
12	2.69	-0.23	9.64	0.05	10.00	19.46	46.00	-26.54	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 8. ANTENNA REQUIREMENT

### 8.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 8.2 Antenna Connected Construction

#### 8.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 8.2.2. Antenna Connector Construction

The antenna gain of antenna used for transmitting is 0dBi, and the antenna is integrate connected to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 8.2.3. Results: Compliance.

## **9. PHOTOGRAPHS OF TEST SETUP**

Please refer to a separate document for photographs.

## **10. PHOTOGRAPHS OF EUT**

Please refer to a separate document for photographs.

-----THE END OF REPORT-----