

FCC TEST REPORT

For

SHENZHEN ECARE ELECTRONICS CO., LTD

Wireless Indoor/Outdoor Humidity and Temperature Monitor

Test Model: TX-4

Additional Model No.: TP-63A, TP-65A, TP-67A

Prepared for : SHENZHEN ECARE ELECTRONICS CO., LTD
Address : 5-6/F, B Building, Fuali Industrial Zone, District 28, Baoan, Shenzhen Guangdong, China. P.C: 518101

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test : January 03, 2019
sample

Number of tested samples : 1

Serial number : Prototype

Date of Test : January 03, 2019 ~ January 14, 2019

Date of Report : January 17, 2019

**FCC/IC TEST REPORT
FCC CFR 47 PART 15C(15.231)**

Report Reference No. : LCS181220148AEA

Date of Issue : January 17, 2019

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure.... : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name : SHENZHEN ECARE ELECTRONICS CO., LTD

Address : 5-6/F, B Building, Fuali Industrial Zone, District 28, Baoan, Shenzhen Guangdong, China. P.C: 518101

Test Specification

Standard..... : FCC CFR 47 PART 15 Subpart C

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Wireless Indoor/Outdoor Humidity and Temperature Monitor


Trade Mark : N/A

Test Model..... : TX-4

Ratings : DC 3.7V by Rechargeable Li-ion Battery (1200mAh)
 For AC Adapter Input: 100-240V~, 50/60Hz, 0.3A Max
 Output: DC 5V/500mA

Result : **Positive**

Compiled by:




Ryan Hu / File administrators

Supervised by:



Calvin Weng / Technique principal

Approved by:

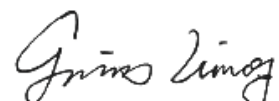

Gavin Liang/ Manager

FCC/IC TEST REPORT

| | |
|--|--|
| Test Report No. : LCS181220148AEA | <u>January 17, 2019</u> Date of issue |
|--|--|

| |
|---|
| Test Mode..... : TX-4 |
| EUT..... : Wireless Indoor/Outdoor Humidity and Temperature Monitor |
| Applicant..... : SHENZHEN ECARE ELECTRONICS CO., LTD Address..... : 5-6/F, B Building, Fuali Industrial Zone, District 28, Baoan, Shenzhen Guangdong, China. P.C: 518101 Telephone..... : / Fax..... : / |
| Manufacturer..... : SHENZHEN ECARE ELECTRONICS CO., LTD Address..... : 5-6/F, B Building, Fuali Industrial Zone, District 28, Baoan, Shenzhen Guangdong, China. P.C: 518101 Telephone..... : / Fax..... : / |
| Factory..... : / Address..... : / Telephone..... : / Fax..... : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|------------------|---------------|-------------|
| 000 | January 17, 2019 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

- 1. GENERAL INFORMATION 6**
 - 1.1. DESCRIPTION OF DEVICE (EUT) 6
 - 1.2. OBJECTIVE 7
 - 1.3. ENVIRONMENTAL CONDITIONS 7
 - 1.4. HOST SYSTEM CONFIGURATION LIST AND DETAILS 7
 - 1.5. EXTERNAL I/O PORT 7
 - 1.6. DESCRIPTION OF TEST FACILITY 8
 - 1.7. STATEMENT OF THE MEASUREMENT UNCERTAINTY 8
- 2. TEST METHODOLOGY 9**
 - 2.1. EUT CONFIGURATION 9
 - 2.2. EUT EXERCISE 9
 - 2.3. GENERAL TEST PROCEDURES 9
 - 2.4. INSTRUMENT CALIBRATION..... 9
 - 2.5. TEST MODE..... 10
- 3. SYSTEM TEST CONFIGURATION..... 11**
 - 3.1. JUSTIFICATION 11
 - 3.2. EUT EXERCISE SOFTWARE..... 11
 - 3.3. SPECIAL ACCESSORIES 11
 - 3.4. BLOCK DIAGRAM/SCHEMATICS..... 11
 - 3.5. EQUIPMENT MODIFICATIONS 11
 - 3.6. TEST SETUP 11
- 4. SUMMARY OF TEST RESULTS..... 12**
- 5. TEST ITEMS AND RESULTS 13**
 - 5.1. DURATION OF EACH TRANSMISSION AND THE SILENT PERIOD 13
 - 5.2. TRANSMITTER FIELD STRENGTH OF EMISSIONS..... 15
 - 5.3. AC POWER LINE CONDUCTED EMISSIONS 25
 - 5.4. 20DB BANDWIDTH EMISSIONS 27
 - 5.5. DUTY CYCLE 28
 - 5.6. ANTENNA REQUIREMENT 30
- 6. LIST OF MEASURING EQUIPMENTS 31**
- 7. TEST SETUP PHOTOGRAPHS OF EUT..... 32**
- 8. EXTERIOR PHOTOGRAPHS OF THE EUT..... 32**
- 9. INTERIOR PHOTOGRAPHS OF THE EUT 32**

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Wireless Indoor/Outdoor Humidity and Temperature Monitor

Test Model : TX-4

Additional Model : TP-63A, TP-65A, TP-67A

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested

Power Supply : DC 3.7V by Rechargeable Li-ion Battery (1200mAh)
For AC Adapter Input: 100-240V~, 50/60Hz, 0.3A Max
Output: DC 5V/500mA

Hardware Version : TX-4V0

Software Version : XCT1802(7591)

Transmit Frequency : 433.92MHz

Number of Channels : 1

Modulation Type : ASK

Antenna Description : Spring antenna, 0dBi(Max.)

1.2. Objective

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators and Industry Canada RSS-210 for Low Power, License-Exempt Radio Communication Devices. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 of the FCC Rules and Industry Canada Radio Standards Procedure RSP-100.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

1.3. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106kPa

1.4. Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|------------------------------|-------------|--------------------------|---------------|-------------|
| HUAXU Electronics Factory | Adapter | HX06B-0500500 -AU-001 | -- | FCC SDOC |

1.5. External I/O Port

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| -- | -- | -- |

1.6. Description of Test Facility

FCC Registration Number. is 254912.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001
 NVLAP Registration Code is 600167-0

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.7. Statement of The Measurement Uncertainty

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

| Test Item | Frequency Range | Uncertainty | Note |
|--------------------------|-----------------|-------------|------|
| Radiation Uncertainty : | 9KHz~30MHz | 3.10dB | (1) |
| | 30MHz~200MHz | 2.96dB | (1) |
| | 200MHz~1000MHz | 3.10dB | (1) |
| | 1GHz~26.5GHz | 3.80dB | (1) |
| Conduction Uncertainty : | 150kHz~30MHz | 1.63dB | (1) |
| Power disturbance : | 30MHz~300MHz | 1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the normal operating mode. The TX frequency that was fixed which was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C and RSS-210.

2.3. General Test Procedures

2.3.1 Conducted Emissions(N/A)

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

2.4. Instrument Calibration

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

2.5. Test Mode

The EUT has been tested under engineering mode. The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The worst case of Y axis was reported.

AC power line conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case.

The EUT transmits signal as soon as it is powered on, and recorded the result in this report.

***Note: Using a temporary antenna connector for the EUT when conducted measurements are performed.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.203 | Antenna Requirement | Compliant |
| §15.205 | Restricted Bands Of Operation | Compliant |
| §15.209 | Radiated Emission Limits, General Requirements. | Compliant |
| §15.231 (e) | Field Strength Of Fundamental And Harmonics | Compliant |
| §15.231 (c) | 20dB Bandwidth | Compliant |
| §15. 231(e) | Duration of each Transmission and the silent period | Compliant |
| §15.231 | Duty cycle Factor | Compliant |
| §15.207 | Conducted Emissions | Compliant |

5. TEST ITEMS AND RESULTS

5.1. Duration of each Transmission and the silent period

FCC 15.231 (e)

5.1.1. Limit

devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

5.1.2. Test Procedure


Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. The antenna was all opened.

5.1.3. Test Results

| | | | |
|---------------|------------|----------|-------|
| Temperature | 24.1 °C | Humidity | 53.7% |
| Test Engineer | Diamond Lu | | |

| Frequency (MHz) | Duration of each Transmission Time (s) | Limit: not more than 1 seconds (s) | Conclusion |
|-----------------|--|------------------------------------|------------|
| 433.92 | 0.90 | 1 | PASS |

| Frequency (MHz) | the silent period (s) | Limit: At least 30 times the duration of the transmission but in no case less than 10s | Conclusion |
|-----------------|-----------------------|--|------------|
| 433.92 | 35.70 | >10s | PASS |

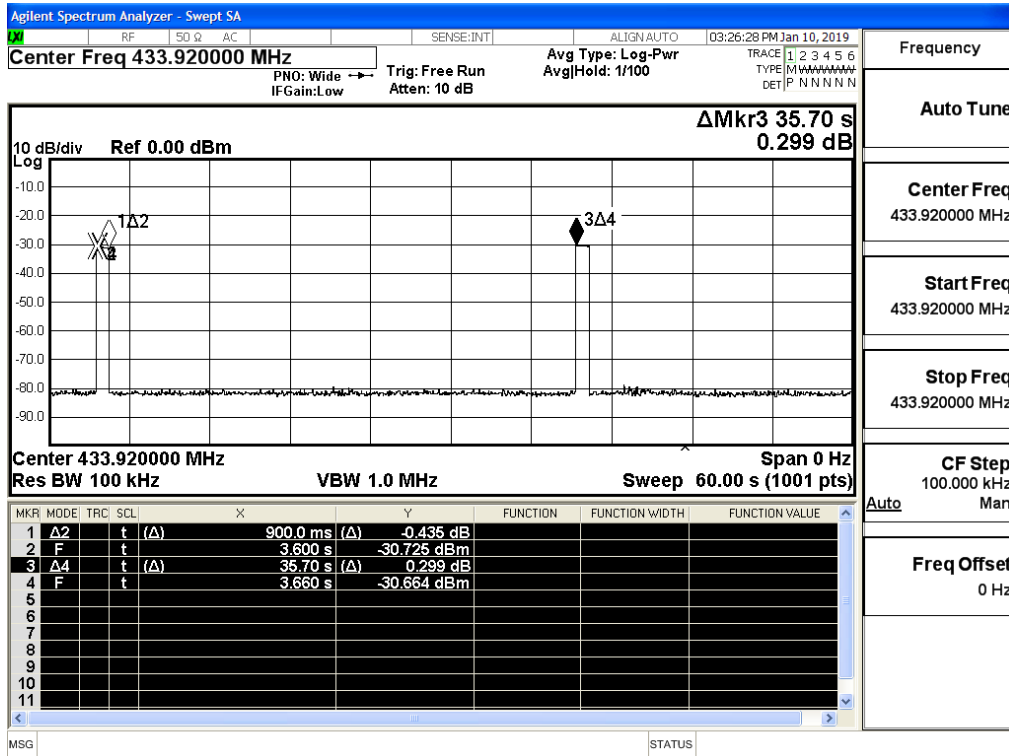

5.2. Transmitter Field Strength of Emissions

5.2.1. Limit

FCC §15.231 (e) /15.209

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz) | Field Strength of Fundamental (microvolt/meter) | Field Strength of spurious emissions (microvolt/meter) |
|-----------------------------|---|--|
| 40.66-40.70 | 1,000 | 100 |
| 70-130 | 500 | 50 |
| 130-174 | 500 to 1,500 | 50 to 150 |
| 174-260 | 1,500 | 150 |
| 260-470 | 1,500 to 5,000 | 150 to 500 |
| Above 470 | 5,000 | 500 |

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $16.66667(F) - 2833.333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30–88 | 100** | 3 |
| 88–216 | 150** | 3 |
| 216–960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

5.2.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Spectrum Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

5.2.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 12.75 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.


Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.


Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum found antenna polarisation and turntable position of the premeasurement the software maximizes the peaks by rotating the turntable position (0° to 360°). This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps). This procedure is repeated for both antenna polarisations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.


5.2.4. Test Setup Layout

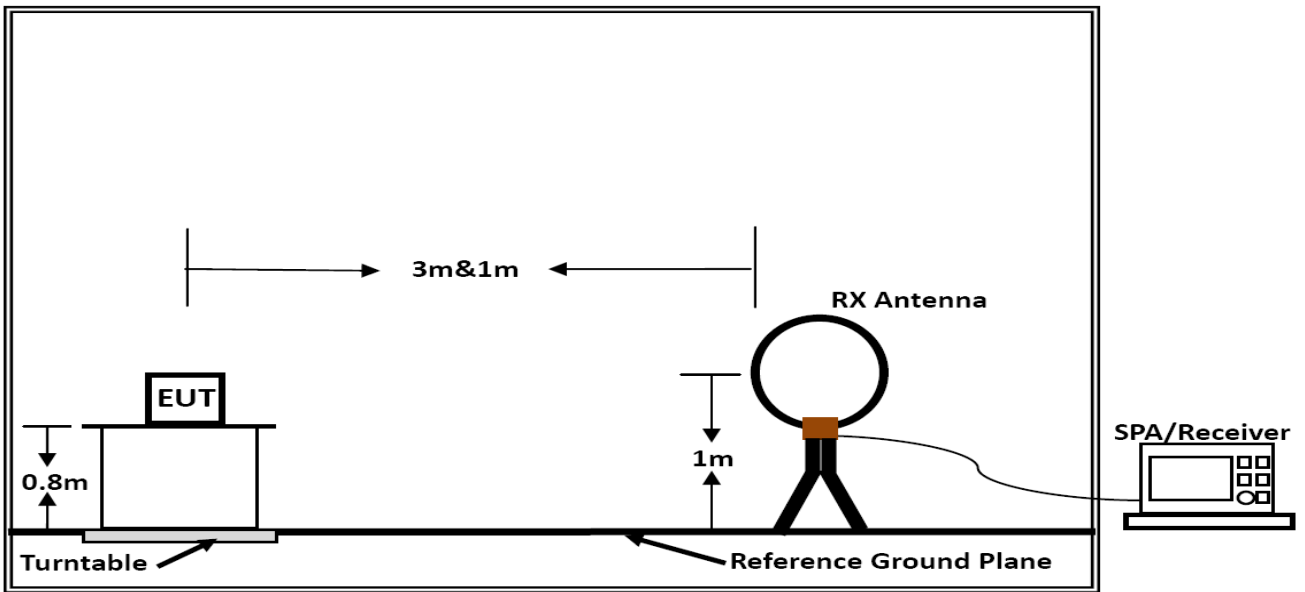

Below 30MHz

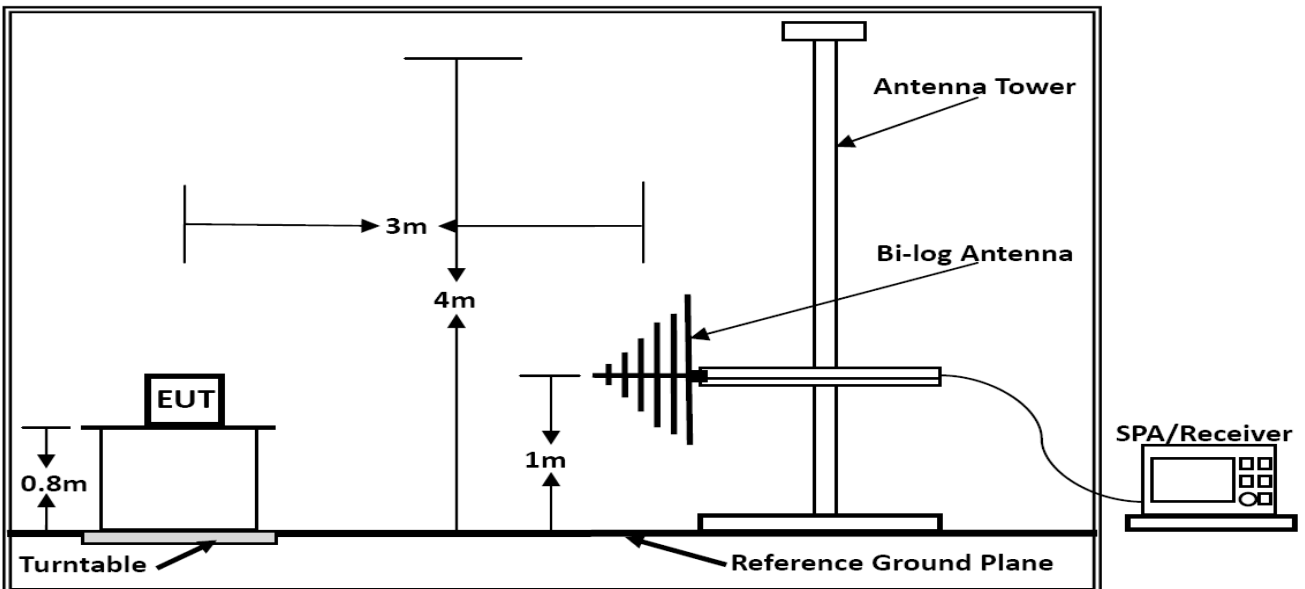

Below 1GHz

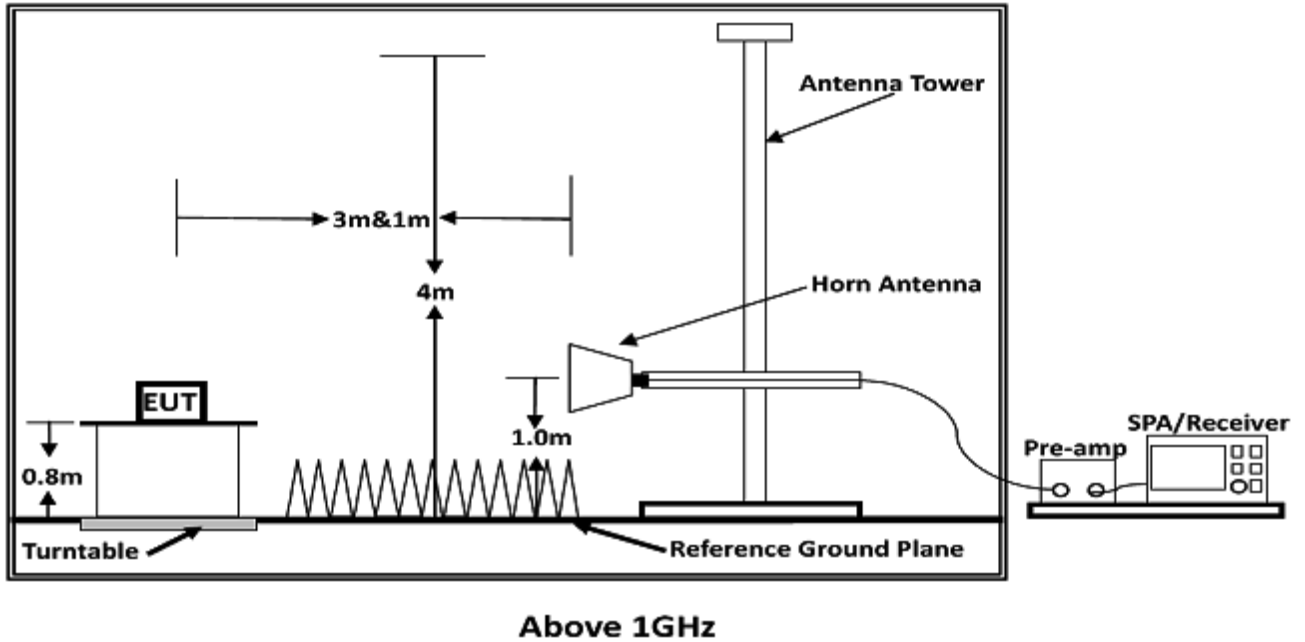

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Results of Radiated Emissions (9kHz~30MHz)


The low frequency, which started from 9KHz to 30MHz, was pre-scan and the result was 20dB lower than the limit line per 15.31(o) was not reported.

Note: Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.2.7. Results of Radiated Emissions (30MHz~1GHz)

| | | | |
|---------------|------------|----------|------------|
| Temperature | 23.5°C | Humidity | 53.3% |
| Test Engineer | Diamond Lu | Pol | Horizontal |
| Test Mode | Tx | | |

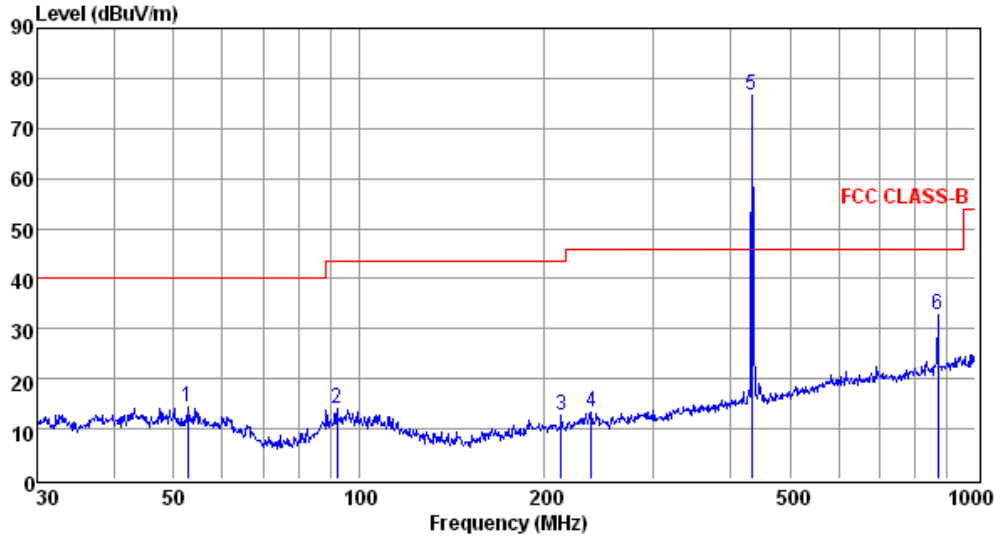


Env./Ins: 23.5°C/53.3%
 pol: HORIZONTAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 52.76 | 0.74 | 0.46 | 13.12 | 14.32 | 40.00 | -25.68 | QP |
| 2 | 92.14 | 1.08 | 0.56 | 12.30 | 13.94 | 43.50 | -29.56 | QP |
| 3 | 213.02 | 0.64 | 0.95 | 10.98 | 12.57 | 43.50 | -30.93 | QP |
| 4 | 238.31 | 0.35 | 0.96 | 12.01 | 13.32 | 46.00 | -32.68 | QP |
| 5 | 434.07 | 60.00 | 1.18 | 15.53 | 76.71 | 46.00 | 30.71 | Peak |
| 6 | 869.13 | 10.09 | 1.87 | 20.77 | 32.73 | 46.00 | -13.27 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

| Fundamental and Harmonics Average Result | | | | | | |
|--|---------------------|-------------------------------------|------------------------|-------------------------|------------|------------|
| Frequency (MHz) | Peak Level (dBμV/m) | AV Factor(dBμV/m) (see Section 5.4) | Average Level (dBμV/m) | Limit(dBμV/m) (average) | Margin(dB) | Conclusion |
| 433.92 | 76.71 | -10.001 | 66.709 | 80.82 | -14.111 | PASS |
| 869.13 | 32.73 | -10.001 | 22.729 | 60.82 | -38.091 | PASS |

| | | | |
|---------------|------------|----------|----------|
| Temperature | 23.5°C | Humidity | 53.5% |
| Test Engineer | Diamond Lu | Pol | Vertical |
| Test Mode | Tx | | |

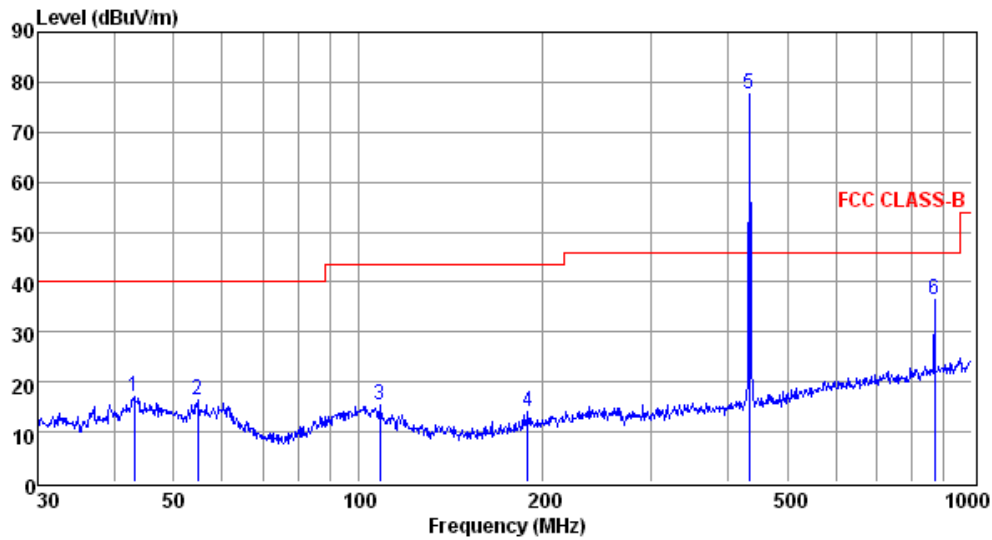

Env./Ins: 23.5°C/53.3%
 pol: VERTICAL

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 43.05 | 2.84 | 0.50 | 13.56 | 16.90 | 40.00 | -23.10 | QP |
| 2 | 54.64 | 2.93 | 0.46 | 13.04 | 16.43 | 40.00 | -23.57 | QP |
| 3 | 108.27 | 2.18 | 0.68 | 12.41 | 15.27 | 43.50 | -28.23 | QP |
| 4 | 189.07 | 2.87 | 0.86 | 10.48 | 14.21 | 43.50 | -29.29 | QP |
| 5 | 434.07 | 60.87 | 1.18 | 15.53 | 77.58 | 46.00 | 31.58 | Peak |
| 6 | 869.13 | 13.78 | 1.87 | 20.77 | 36.42 | 46.00 | -9.58 | QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

| Fundamental and Harmonics Average Result | | | | | | |
|--|---------------------|--------------------------------------|------------------------|--------------------------|-------------|------------|
| Frequency (MHz) | Peak Level (dBμV/m) | AV Factor (dBμV/m) (see Section 5.4) | Average Level (dBμV/m) | Limit (dBμV/m) (average) | Margin (dB) | Conclusion |
| 433.92 | 77.58 | -10.001 | 67.579 | 80.82 | -13.241 | PASS |
| 869.13 | 36.42 | -10.001 | 26.419 | 60.82 | -34.401 | PASS |

5.2.8. Results of Radiated Emissions (1-5GHz)

| | | | |
|---------------|------------|-----------|-------|
| Temperature | 24.1°C | Humidity | 53.7% |
| Test Engineer | Diamond Lu | Test Mode | Tx |

| Peak Value: | | | | |
|-----------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dBuV/m) | Polarization |
| 1303.39 | 48.63 | 74 | -25.37 | Horizontal |
| 1738.22 | 49.28 | 74 | -24.72 | Horizontal |
| 2169.95 | 45.37 | 74 | -28.63 | Horizontal |
| 1302.68 | 42.27 | 74 | -31.73 | Vertical |
| 1737.39 | 41.63 | 74 | -32.37 | Vertical |
| 2169.80 | 41.65 | 74 | -32.35 | Vertical |

| Average Value: | | | | | | |
|-----------------|----------------|-------------------|------------------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Level (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Margin (dBuV/m) | Polarization |
| 1303.59 | 48.63 | -6.38 | 42.25 | 54 | -11.75 | Horizontal |
| 1738.43 | 49.28 | -6.38 | 42.90 | 54 | -11.10 | Horizontal |
| 2170.15 | 45.37 | -6.38 | 38.99 | 54 | -15.01 | Horizontal |
| 1302.89 | 42.27 | -6.38 | 35.89 | 54 | -18.11 | Vertical |
| 1737.59 | 41.63 | -6.38 | 35.25 | 54 | -18.75 | Vertical |
| 2169.98 | 41.65 | -6.38 | 35.27 | 54 | -18.73 | Vertical |

1. Measuring frequencies from 9k~10th harmonic (ex. 5GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 5GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.3. AC Power line conducted emissions


5.3.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

5.3.2 Block Diagram of Test Setup

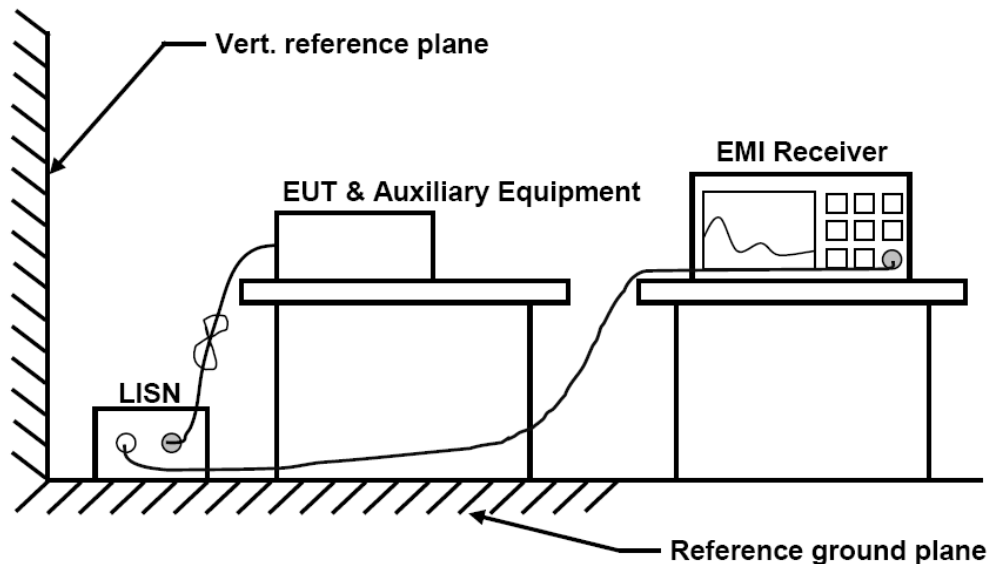


5.3.3 Test Results

PASS

The test data please refer to following page.

Line

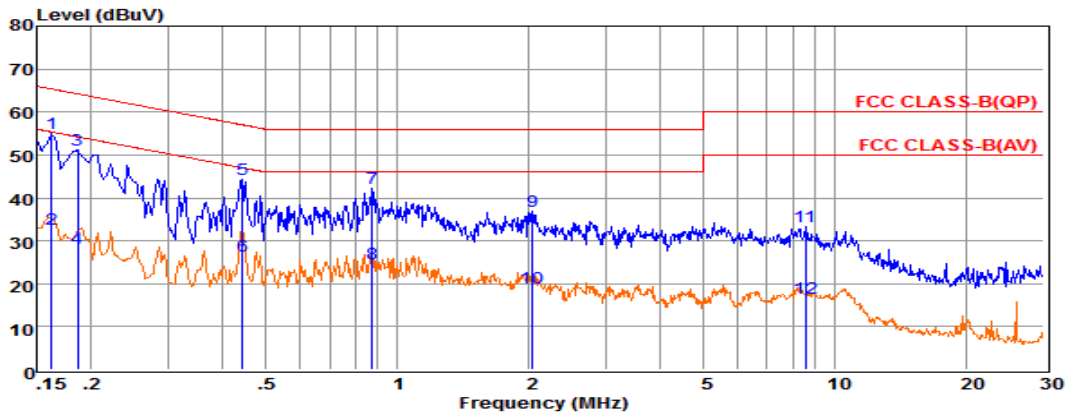


Env. Ins: 23.5*/52.9%
 Pol: LINE

| | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.16 | 35.36 | 9.59 | 0.02 | 10.00 | 54.97 | 65.34 | -10.37 | QP |
| 2 | 0.16 | 13.07 | 9.59 | 0.02 | 10.00 | 32.68 | 55.33 | -22.65 | Average |
| 3 | 0.19 | 31.42 | 9.62 | 0.02 | 10.00 | 51.06 | 64.20 | -13.14 | QP |
| 4 | 0.19 | 8.53 | 9.62 | 0.02 | 10.00 | 28.17 | 54.19 | -26.02 | Average |
| 5 | 0.44 | 24.71 | 9.62 | 0.04 | 10.00 | 44.37 | 57.02 | -12.65 | QP |
| 6 | 0.44 | 6.89 | 9.62 | 0.04 | 10.00 | 26.55 | 47.02 | -20.47 | Average |
| 7 | 0.88 | 22.46 | 9.63 | 0.04 | 10.00 | 42.13 | 56.00 | -13.87 | QP |
| 8 | 0.88 | 4.91 | 9.63 | 0.04 | 10.00 | 24.58 | 46.00 | -21.42 | Average |
| 9 | 2.03 | 17.22 | 9.64 | 0.05 | 10.00 | 36.91 | 56.00 | -19.09 | QP |
| 10 | 2.03 | -0.56 | 9.64 | 0.05 | 10.00 | 19.13 | 46.00 | -26.87 | Average |
| 11 | 8.55 | 13.55 | 9.69 | 0.08 | 10.00 | 33.32 | 60.00 | -26.68 | QP |
| 12 | 8.55 | -3.00 | 9.69 | 0.08 | 10.00 | 16.77 | 50.00 | -33.23 | Average |

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral

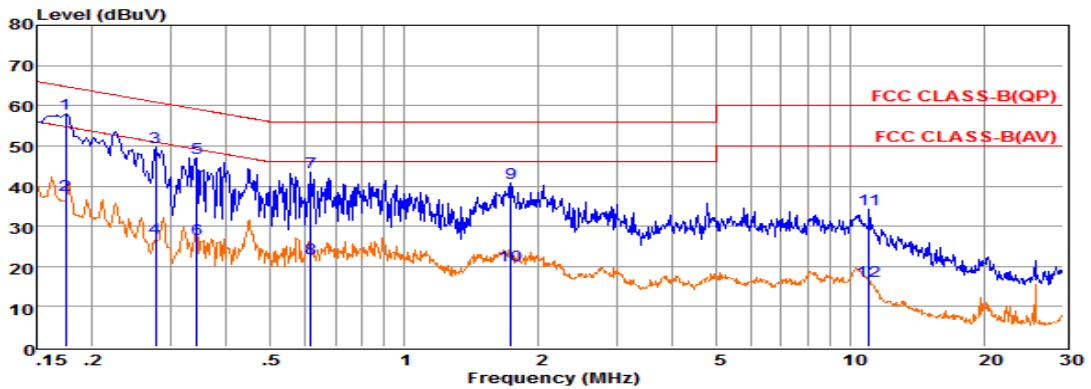

Env. Ins: 23.5*/52.9%
 Pol: NEUTRAL

| | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark |
|----|-------|---------|---------|--------|---------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.17 | 38.32 | 9.64 | 0.02 | 10.00 | 57.98 | 64.77 | -6.79 | QP |
| 2 | 0.17 | 18.11 | 9.64 | 0.02 | 10.00 | 37.77 | 54.76 | -16.99 | Average |
| 3 | 0.28 | 30.08 | 9.60 | 0.03 | 10.00 | 49.71 | 60.90 | -11.19 | QP |
| 4 | 0.28 | 7.35 | 9.60 | 0.03 | 10.00 | 26.98 | 50.89 | -23.91 | Average |
| 5 | 0.34 | 27.34 | 9.61 | 0.03 | 10.00 | 46.98 | 59.13 | -12.15 | QP |
| 6 | 0.34 | 7.03 | 9.61 | 0.03 | 10.00 | 26.67 | 49.13 | -22.46 | Average |
| 7 | 0.62 | 23.80 | 9.63 | 0.04 | 10.00 | 43.47 | 56.00 | -12.53 | QP |
| 8 | 0.62 | 2.20 | 9.63 | 0.04 | 10.00 | 21.87 | 46.00 | -24.13 | Average |
| 9 | 1.73 | 21.06 | 9.63 | 0.05 | 10.00 | 40.74 | 56.00 | -15.26 | QP |
| 10 | 1.74 | 0.68 | 9.63 | 0.05 | 10.00 | 20.36 | 46.00 | -25.64 | Average |
| 11 | 11.02 | 14.27 | 9.73 | 0.09 | 10.00 | 34.09 | 60.00 | -25.91 | QP |
| 12 | 11.02 | -3.38 | 9.73 | 0.09 | 10.00 | 16.44 | 50.00 | -33.56 | Average |

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report

5.4. 20dB Bandwidth Emissions

FCC 15.231 (c)

5.4.1. Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.


5.4.2. Test Procedure

With the EUT’s antenna attached, the EUT’s 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT’s operation band.

5.4.3. Test Data

| | | | |
|---------------|------------|-----------|-------|
| Temperature | 24.1°C | Humidity | 53.7% |
| Test Engineer | Diamond Lu | Test Mode | Tx |

| Transmit Frequency (MHz) | Limit (kHz) | 20dB Bandwidth (kHz) | Result |
|-----------------------------------|--|----------------------|--------|
| 433.92 | 1084.8 | 197.70 | PASS |
| Maximum allowed bandwidth: | <input checked="" type="checkbox"/> 0.25% of the centre operating frequency <input type="checkbox"/> 0.5% of the centre operating frequency | | |
| RBW: | <input checked="" type="checkbox"/> 10kHz <input type="checkbox"/> 100kHz <input type="checkbox"/> other kHz | | |
| VBW: | <input checked="" type="checkbox"/> 30kHz <input type="checkbox"/> 300kHz <input type="checkbox"/> other kHz | | |

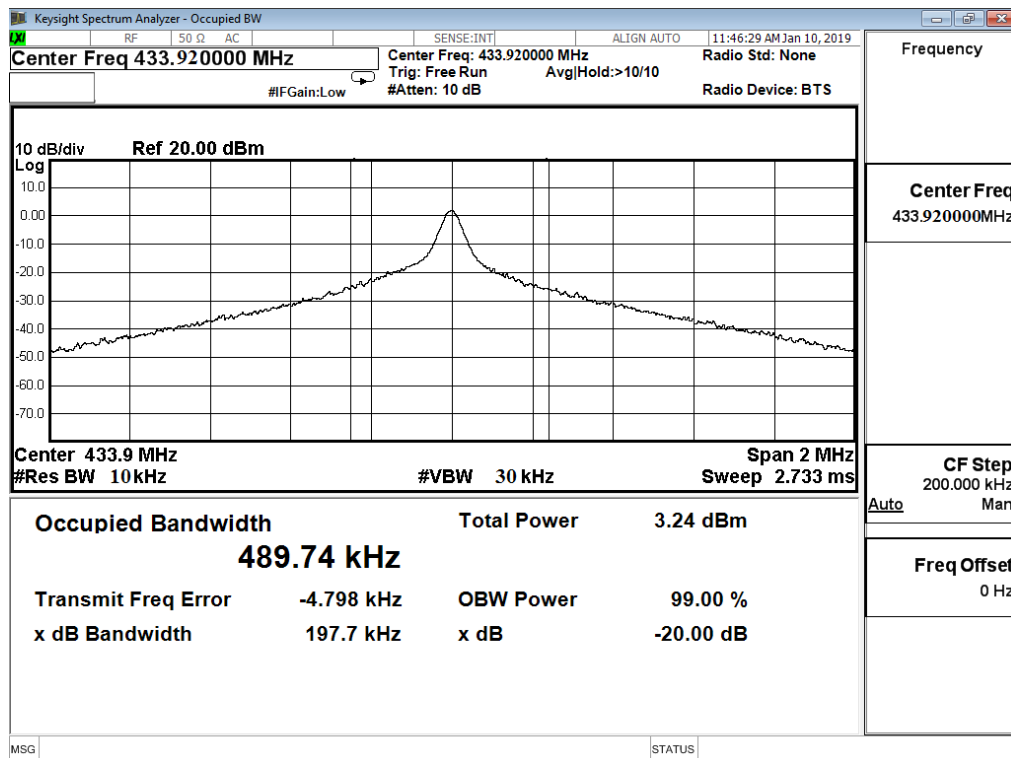

5.5. Duty cycle

5.5.1. Limit

No dedicated limit specified in the Rules.

5.5.2. Test Procedure

5.5.2.1. Place the EUT on the table and set it in transmitting mode.

5.5.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.5.2.3. Set centre frequency of spectrum analyzer=operating frequency.

5.5.2.4. Set the spectrum analyzer as RBW=100kHz, VBW=100KHz, Span=0Hz, Adjust Sweep=100ms to obtain the “worst-case” pulse on time

5.5.2.5. Repeat above procedures until all frequency measured was complete.

5.5.3. Test Data


$Ton = 1.19 \times 8 + 0.39 \times 17 \text{ (ms)} = 16.15 \text{ (ms)}$

$Tp = 51.1 \text{ (ms)}$

The duty cycle = $16.15 / 51.1 = 31.6\%$

Average Correction Factory = $20 \log (Ton/Tp) = 20 \log 0.316 = -10.01 \text{ dB}$

Note: The signal bandwidth was measured and less than 100kHz RBW so PDCF factor is not required to correct the fundamental signal peak result.

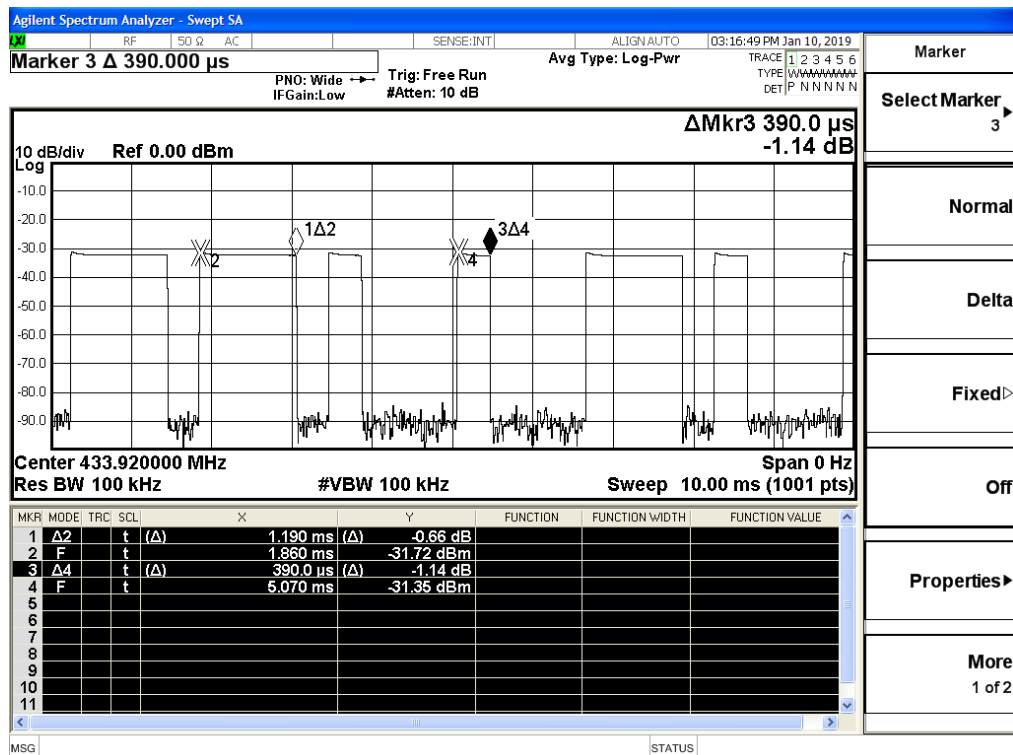

Pulse length of each type

5.6. Antenna Requirement

FCC 15.203

5.6.1. Standard Applicable

According to § 15.203 & RSS-Gen, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

5.6.2. Result

Compliant.

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

6. LIST OF MEASURING EQUIPMENTS

| Item | Equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|--------------------------------|-------------------|--------------|-------------|------------|------------|
| 1 | MXA Signal Analyzer | Agilent | N9020A | MY49100060 | 2018-11-15 | 2019-11-14 |
| 2 | DC Power Supply | Agilent | E3642A | N/A | 2018-11-15 | 2019-11-14 |
| 3 | Temperature & Humidity Chamber | GUANGZHOU GOGNWEN | GDS-100 | 70932 | 2018-10-10 | 2019-10-09 |
| 4 | EMI Test Software | AUDIX | E3 | / | / | / |
| 5 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2018-06-16 | 2019-06-15 |
| 6 | Positioning Controller | MF | MF-7082 | / | 2018-06-16 | 2019-06-15 |
| 7 | Active Loop Antenna | SCHWARZBECK | FMZB 1519B | 00005 | 2018-07-26 | 2019-07-25 |
| 8 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2018-07-26 | 2019-07-25 |
| 9 | Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-1925 | 2018-07-02 | 2019-07-01 |
| 10 | EMI Test Receiver | R&S | ESR 7 | 101181 | 2018-06-16 | 2019-06-15 |
| 11 | RS SPECTRUM ANALYZER | R&S | FSP40 | 100503 | 2018-11-15 | 2019-11-14 |
| 12 | AMPLIFIER | QuieTek | QTK | CHM/0809065 | 2018-11-15 | 2019-11-14 |
| 13 | RF Cable-R03m | Jye Bao | RG142 | CB021 | 2018-06-16 | 2019-06-15 |
| 14 | RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 2018-06-16 | 2019-06-15 |

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----