# SGS

## SGS-CSTC Standards Technical Services Ltd.

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM140500265601 Page: 1 of 116

## **FCC REPORT**

Application No:	SZEM1405002656RF
Applicant:	Flyingvoice Technology Co.,Ltd.
Manufacturer:	Flyingvoice Technology Co.,Ltd.
Factory:	Flyingvoice Technology Co.,Ltd.
Product Name:	Wireless router
Model No.(EUT):	G201N4
Add Model No.:	G201NW
FCC ID:	2AATVG201N4
Standards:	47 CFR Part 15, Subpart C (2013)
Date of Receipt:	2014-06-10
Date of Test:	2014-06-26 To 2014-07-02
Date of Issue:	2014-07-14
Test Result:	PASS *

.\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



### Jack Zhang

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140500265601 Page: 2 of 116

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r01	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: G201N4, G201NW

Only the model G201N4 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on model no. and lan port.



Report No.: SZEM140500265601 Page: 3 of 116

## 3 Contents

			Page
1	COV	ER PAGE	1
2	TES	T SUMMARY	2
3	CON	ITENTS	3
4	GEN	IERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT AND MODE	
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	6
	4.6	TEST FACILITY	•••••
	4.7	DEVIATION FROM STANDARDS	
	4.8	Abnormalities from Standard Conditions	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER.	
	4.10	EQUIPMENT LIST	8
5	TES	T RESULTS AND MEASUREMENT DATA	11
	5.1	ANTENNA REQUIREMENT	11
	5.2	CONDUCTED EMISSIONS	12
	5.3	CONDUCTED PEAK OUTPUT POWER	16
	5.4	6DB OCCUPY BANDWIDTH	25
	5.5	Power Spectral Density	
	5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.7	RF CONDUCTED SPURIOUS EMISSIONS	
	5.8	RADIATED SPURIOUS EMISSIONS	
	5.8.1		
	5.8.2		
	5.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	3-116



Report No.: SZEM140500265601 Page: 4 of 116

## 4 General Information

## 4.1 Client Information

Applicant:	Flyingvoice Technology Co.,Ltd.					
Address of Applicant:	Room 202, Chuangxin Bldg A#, No.12 Hongda North Rd, BDA, Beijing, China					
Manufacturer:	Flyingvoice Technology Co.,Ltd.					
Address of Manufacturer:	Room 202, Chuangxin Bldg A#, No.12 Hongda North Rd, BDA, Beijing, China					
Factory:	Flyingvoice Technology Co.,Ltd.					
Address of Factory:	Room 202, Chuangxin Bldg A#, No.12 Hongda North Rd, BDA, Beijing, China					

## 4.2 General Description of EUT

	1				
Product Name:	Wireless router				
Model No.:	G201N4, G201NW				
Operation Frequency:	IEEE 802.11b/g/	n(HT20): 2412MHz to 2462MHz			
	IEEE 802.11n(H	T40): 2422MHz to 2452MHz			
Channel Numbers:	-	IEEE 802.11n HT20: 11 Channels			
	IEEE 802.11n H	T40: 7 Channels			
Channel Separation:	5MHz				
Type of Modulation:	IEEE for 802.11	b: DSSS(CCK,DQPSK,DBPSK)			
	IEEE for 802.11	g : OFDM(64QAM, 16QAM, QPSK, BPSK)			
	IEEE for 802.11	n(HT20 and HT40) : OFDM (64QAM, 16QAM,			
	QPSK,BPSK)				
Sample Type:	Fixed production	1			
EUT Function:	Wireless router				
Test Software of EUT:	art.exe (manufa	cturer declare )			
Antenna Type:	Integral				
Antenna Gain:	2dBi				
Power Supply:	AC Adapter: MODEL:F12W-050200SPAU				
	INPUT:AC 100-240V 50/60Hz 0.5A				
	OUTPUT:DC 5.0V 2.0A				
Test Voltage:	AC 120V~60Hz				



Report No.: SZEM140500265601 Page: 5 of 116

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	Frequency	Channel	Fre	quency	Chanr	nel	Frequency
1	24	412MHz	4	2427MHz	7	244	42MHz	10		2457MHz
2	24	417MHz	5	2432MHz	8	244	47MHz	11		2462MHz
3	24	422MHz	6	2437MHz	9	245	2452MHz			
Operation F	Frequ	ency each	of channe	el(802.11n HT40	)					
Channe	I	Frequ	ency	Channel	Frequen	су	Chan	nel		requency
1	2422MHz 4 2437MHz		7			2452MHz				
2		2427	ИНz	5	2442MF	z				
3		24321	ИНz	6	2447MF	z				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500265601 Page: 6 of 116

## 4.3 Test Environment and Mode

Operating Environment:	Operating Environment:					
Temperature:	20.0 °C					
Humidity:	55% RH					
Atmospheric Pressure:	1005mbar					
Test mode:						
Transmitting mode:	Keep the EUT transmitting with modulation.					

## 4.4 Description of Support Units

The EUT has been tested independent unit.

## 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM140500265601 Page: 7 of 116

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.





Report No.: SZEM140500265601 Page: 8 of 116

## 4.10Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)				
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10				
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24				
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16				
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10				
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10				
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10				
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16				
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29				
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24				
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24				
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16				



Report No.: SZEM140500265601 Page: 9 of 116

RE in Chamber								
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10			
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16			
3	EMI Test software	AUDIX	E3	SEL0050	N/A			
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24			
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24			
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24			
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16			
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24			
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29			
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29			
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29			
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29			
13	Band filter	Amindeon	82346	SEL0094	2015-05-16			
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16			
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24			
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24			
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16			
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24			
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500265601 Page: 10 of 116

	RF connected test							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24			
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24			
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24			
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29			
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29			
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16			
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16			
8	Band filter	amideon	82346	SEL0094	2015-05-16			
9	POWER METER	R & S	NRVS	SEL0144	2014-10-24			
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16			
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24			

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500265601 Page: 11 of 116

## 5 Test results and Measurement Data

## 5.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)


#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## EUT Antenna:

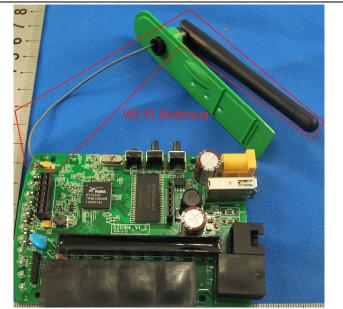

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.




Report No.: SZEM140500265601 Page: 12 of 116

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range	150kHz to 30MHz			
Limit:	- (111)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithr	n of the frequency.		_
Test Procedure:	<ol> <li>The mains terminal disturbution.</li> <li>The EUT was connected to Impedance Stabilization linear impedance. The power connected to a second reference plane in the semeasured. A multiple soor power cables to a single exceeded.</li> <li>The tabletop EUT was placed on the horizon 4. The test was performed with of the EUT shall be 0.4 m vertical ground reference plane. The LISN unit under test and bonded mounted on top of the gro between the closest points the EUT and associated events and all of the implement and all of t</li></ol>	o AC power source thro Network) which provi- wer cables of all other u- LISN 2, which was same way as the LIS cket outlet strip was u- LISN provided the rat ced upon a non-metalli And for floor-standing tal ground reference pl ith a vertical ground ref from the vertical ground from the vertical ground blane was bonded to the I 1 was placed 0.8 m fr d to a ground reference und reference plane. T is of the LISN 1 and the quipment was at least of um emission, the relation	bugh a LISN 1 (Line des a 50Ω/50µH – units of the EUT wer bonded to the gr SN 1 for the unit b used to connect mu ing of the LISN was to table 0.8m above g arrangement, the ane, ference plane. The r and reference plane. The nd reference plane. The be horizontal ground om the boundary of plane for LISNs his distance was EUT. All other units 0.8 m from the LISN ve positions of e changed according	$+ 5\Omega$ e ound being litiple s not the EUT ear The the the 2.

## 5.2 Conducted Emissions



Report No.: SZEM140500265601 Page: 13 of 116

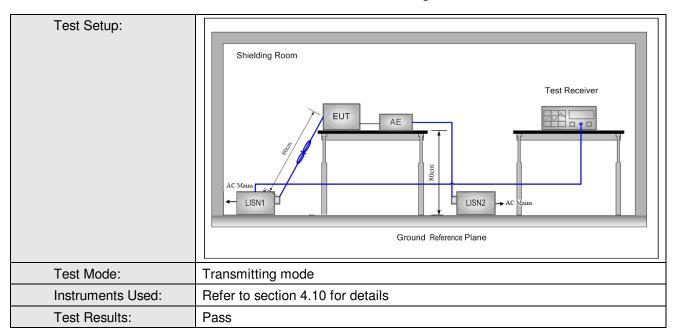




Report No.: SZEM140500265601 Page: 14 of 116

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

#### Live Line:

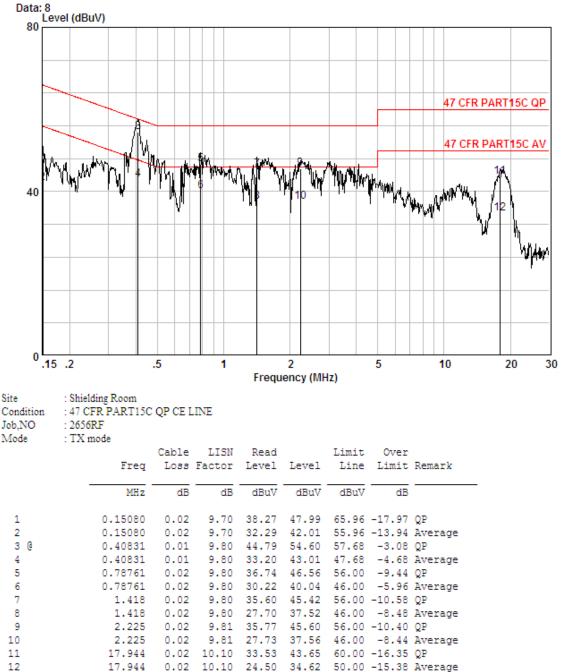



Report No.: SZEM140500265601 Page: 15 of 116

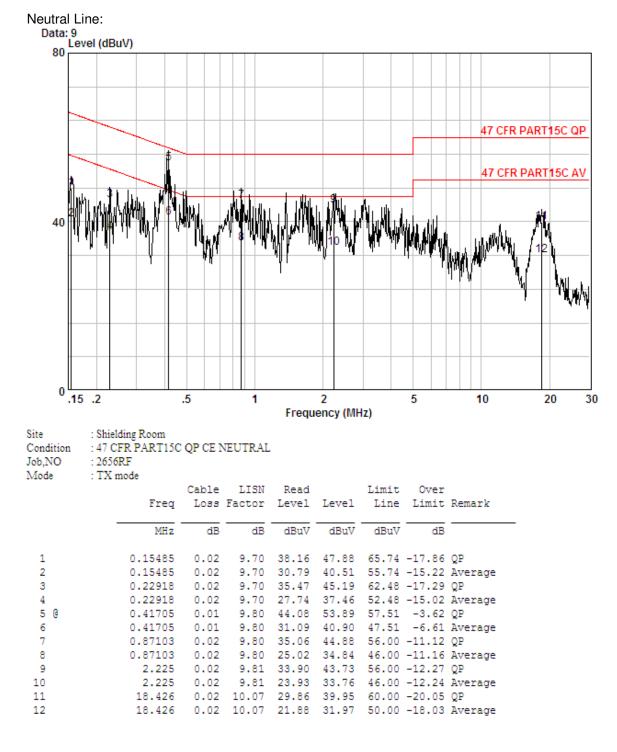

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140500265601 Page: 16 of 116

## 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)	
Test Method:	KDB558074 D01 v03r01	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:	
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 4.10 for details	
Exploratory Test Mode:	Transmitting mode	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)	
Limit:	30dBm	
Test Results:	Pass	



Report No.: SZEM140500265601 Page: 17 of 116

Pre-scan under all rate at lowest channel 1								
Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	16.12	16.04	15.96	15.93				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	13.75	13.72	13.70	13.65	13.68	13.63	13.61	13.58
Mode	802.11n(HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	11.69	11.63	11.62	11.58	11.54	11.51	11.46	11.43
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	11.62	11.57	11.52	11.44	11.41	11.36	11.32	11.31
-	Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).							





Report No.: SZEM140500265601 Page: 18 of 116


Measurement Data					
	802.11b mode				
Test channel	Peak Output Power (dBm) Limit (dBm) Result				
Lowest	16.12	30.00	Pass		
Middle	15.72	30.00	Pass		
Highest	15.18	30.00	Pass		
	802.11g mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	13.75	30.00	Pass		
Middle	13.37	30.00	Pass		
Highest	13.06	30.00	Pass		
	802.11n(HT20)mode				
Test channel	Peak Output Power (dBm) Limit (dBm)		Result		
Lowest	11.69	30.00	Pass		
Middle	11.52	30.00	Pass		
Highest	11.03	30.00	Pass		
802.11n(HT40)mode					
Test channel	Peak Output Power (dBm) Limit (dBm) R		Result		
Lowest	11.62	30.00	Pass		
Middle	11.49	30.00	Pass		
Highest	11.17	30.00	Pass		

#### Measurement Data




Report No.: SZEM140500265601 Page: 19 of 116

#### Test plot as follows:

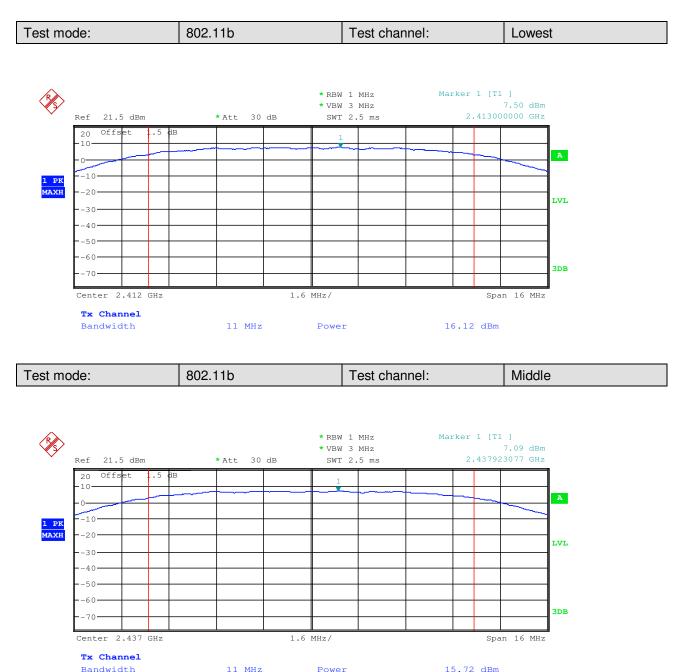





Report No.: SZEM140500265601 Page: 20 of 116

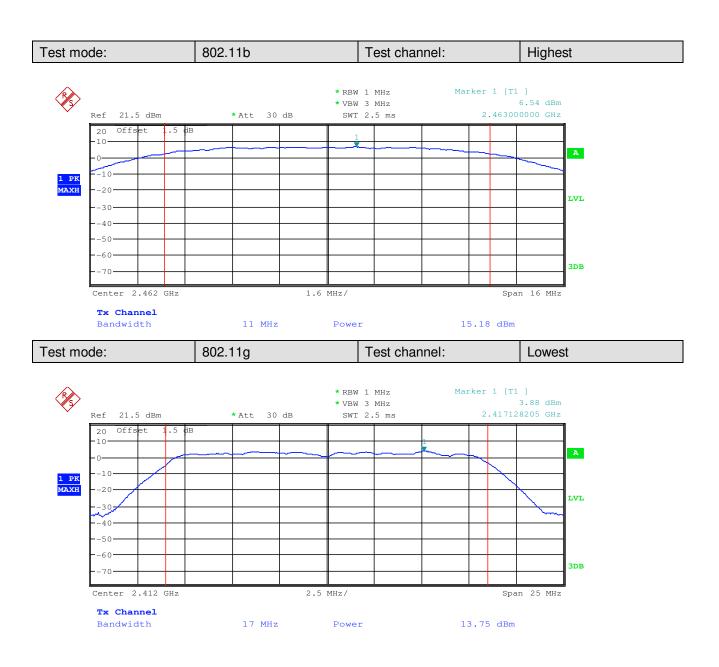




Report No.: SZEM140500265601 Page: 21 of 116

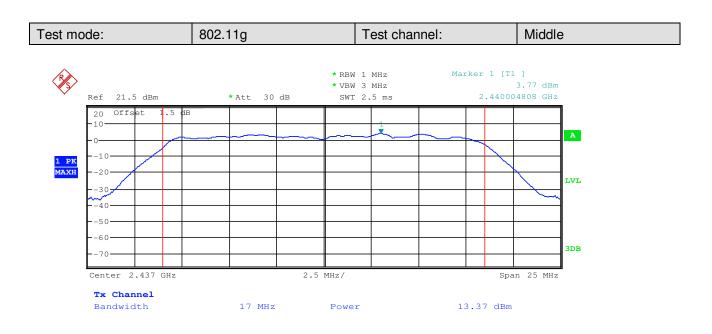


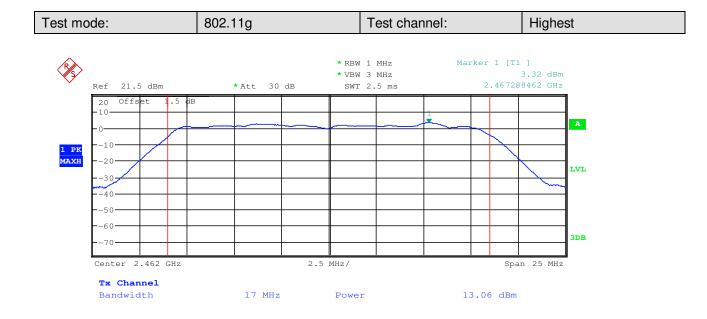




Report No.: SZEM140500265601 Page: 22 of 116

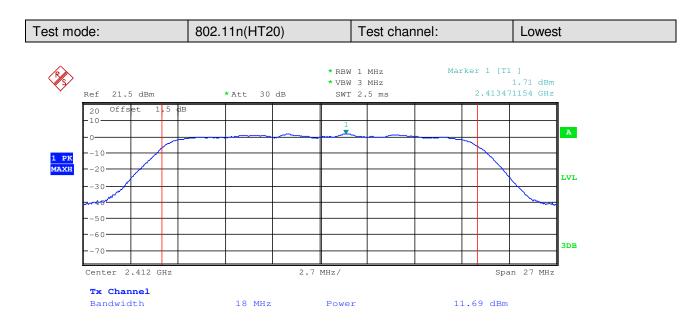


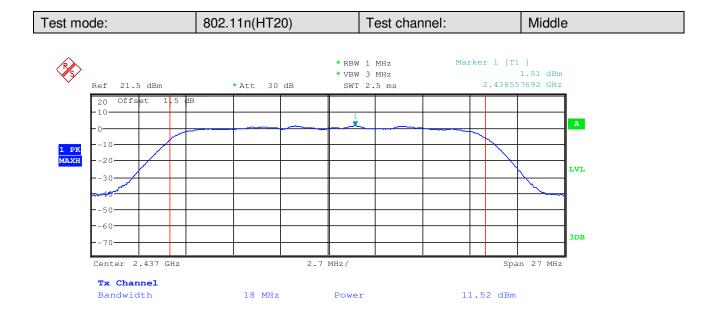




Report No.: SZEM140500265601 Page: 23 of 116

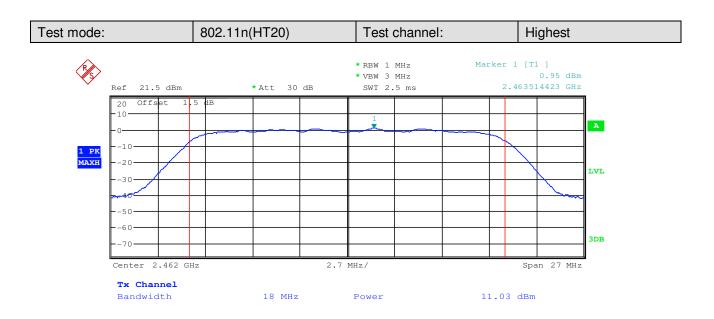

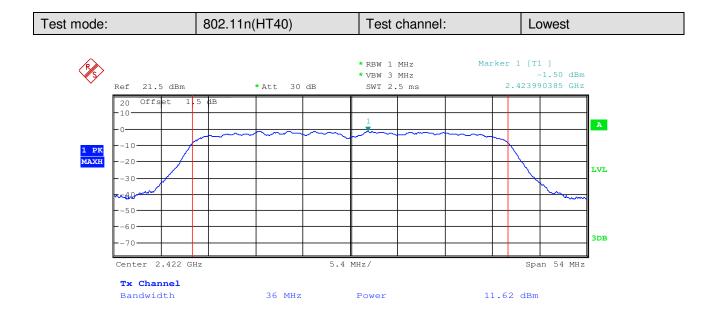



Report No.: SZEM140500265601 Page: 24 of 116

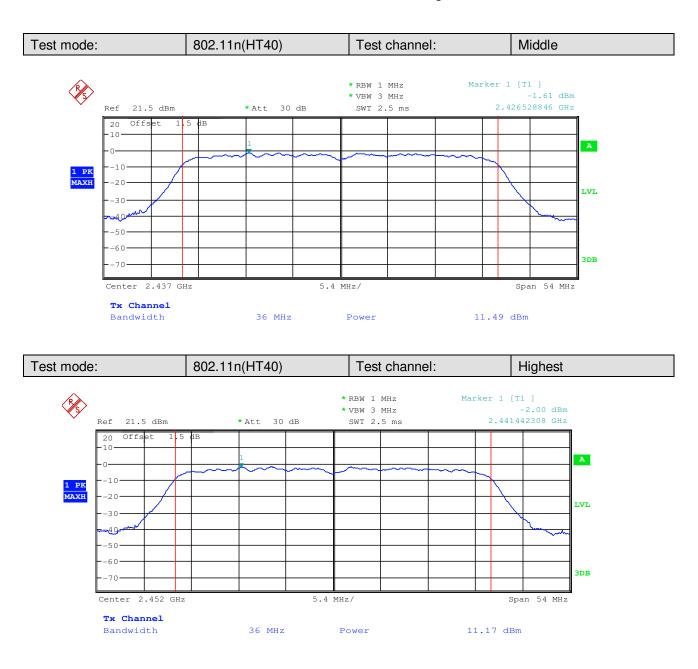



Report No.: SZEM140500265601 Page: 25 of 116

## 5.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)	
Test Method:	KDB558074 D01 v03r01	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Instruments Used:	Refer to section 4.10 for details	
Exploratory Test Mode:	Transmitting mode	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)	
Limit:	≥ 500 kHz	
Test Results:	Pass	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140500265601 Page: 26 of 116

#### **Measurement Data** 802.11b mode Limit (kHz) Test channel 6dB Occupy Bandwidth (MHz) Result Lowest 10.615384615 ≥500 Pass Middle 10.625000000 ≥500 Pass Highest 10.673076923 ≥500 Pass 802.11g mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 16.594551282 ≥500 Pass Middle 16.538461538 ≥500 Pass Highest 16.586538462 ≥500 Pass 802.11n(HT20) mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 17.740384615 ≥500 Pass Middle 17.740384615 ≥500 Pass Highest 17.740384615 ≥500 Pass 802.11n(HT40)mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 35.576923077 ≥500 Pass Middle 35.560897436 ≥500 Pass Highest ≥500 Pass 35.560897436




Report No.: SZEM140500265601 Page: 27 of 116

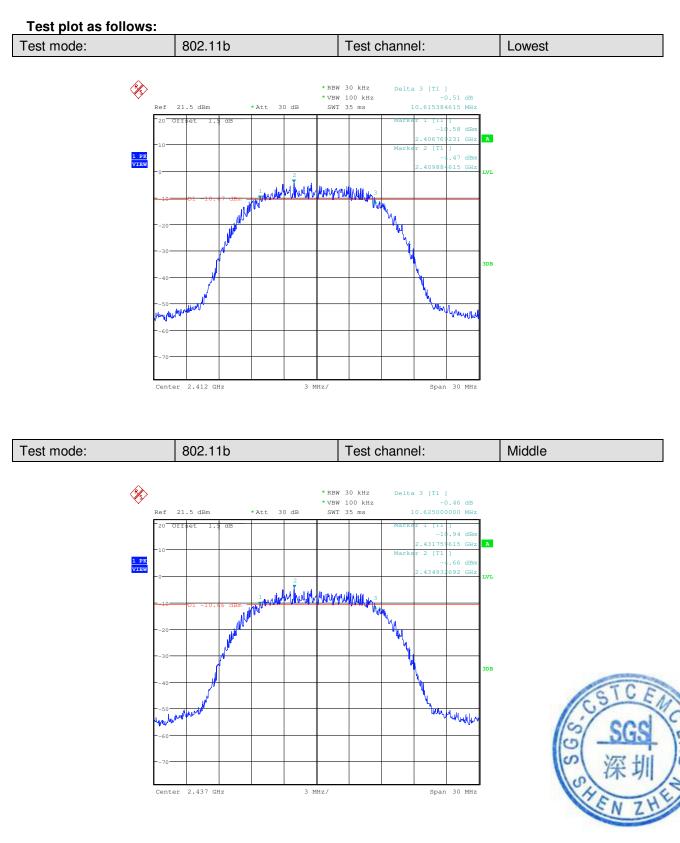




Report No.: SZEM140500265601 Page: 28 of 116

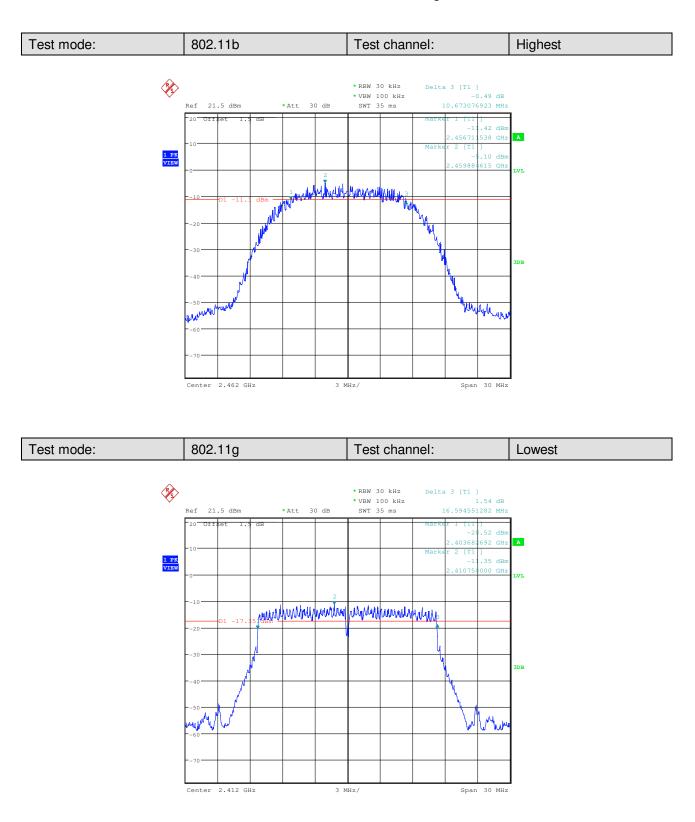




Report No.: SZEM140500265601 Page: 29 of 116

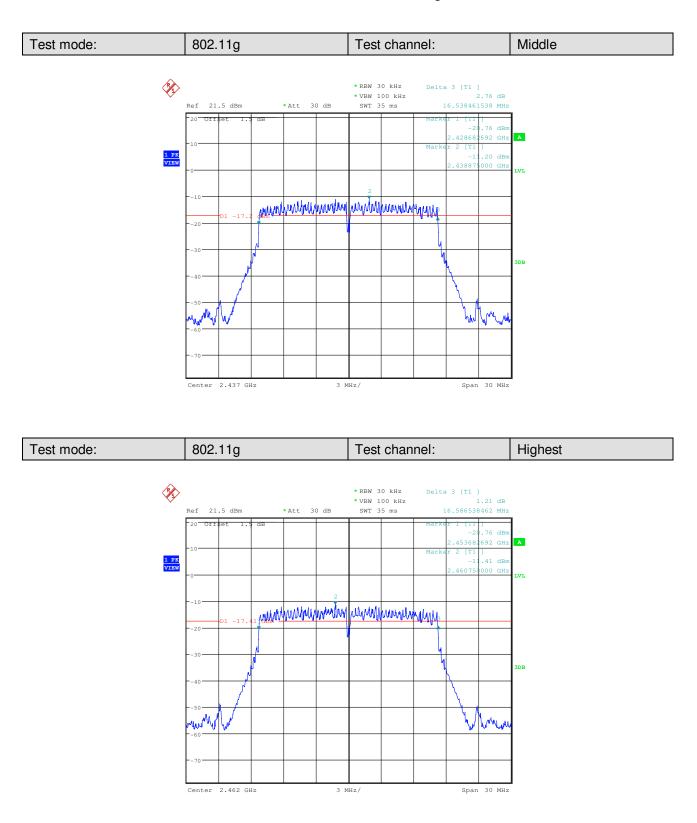




Report No.: SZEM140500265601 Page: 30 of 116

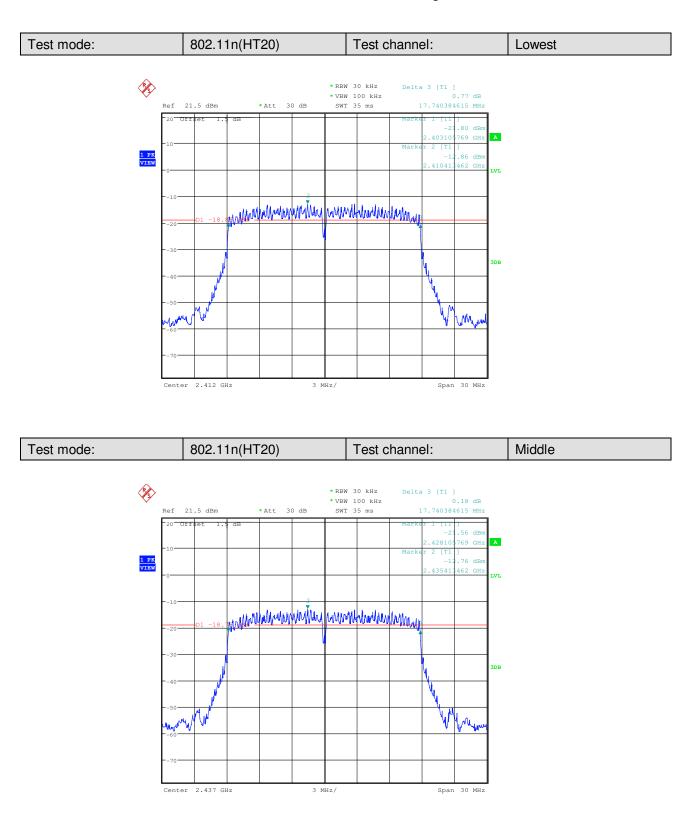



Report No.: SZEM140500265601 Page: 31 of 116

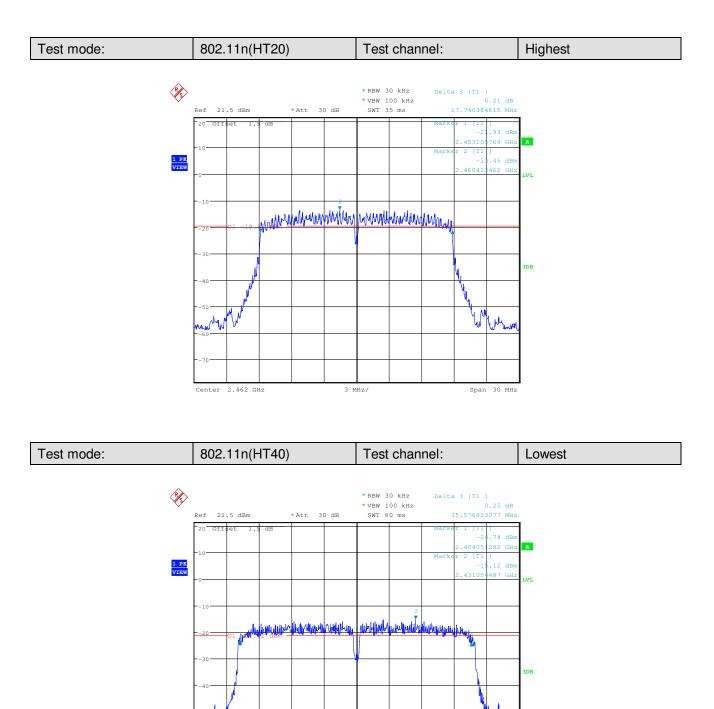

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5 MHz/

Span 50 MHz


May

Center

2.422 GHz



Report No.: SZEM140500265601 Page: 32 of 116

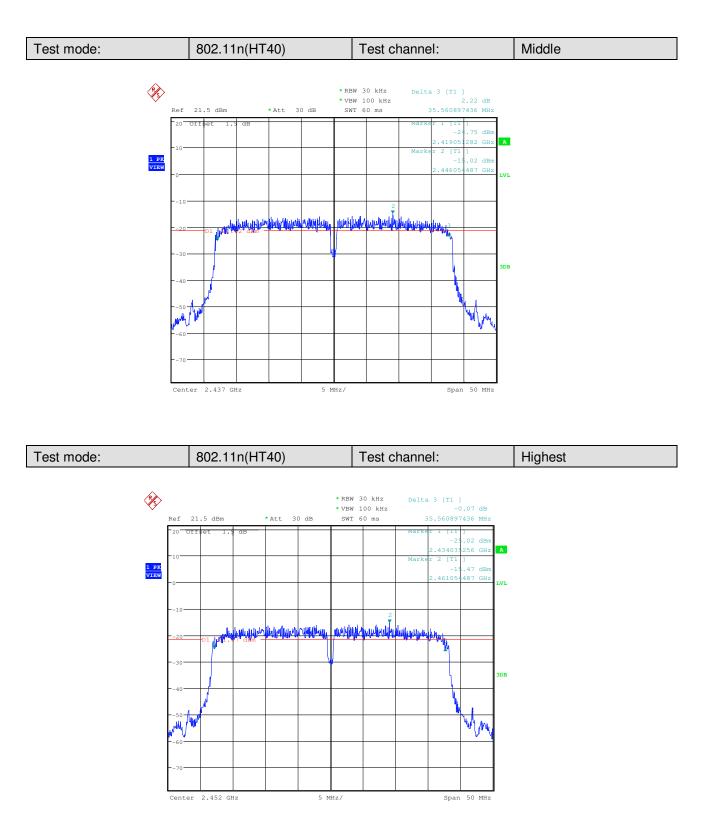



Report No.: SZEM140500265601 Page: 33 of 116

## 5.5 Power Spectral Density

case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm	_		
Test Setup:       Spectrum Analyzer         Image: Spectrum Analyzer       Image: Spectrum Analyzer         Image: Spectrum Analyzer       Image: Spectrum Analyzer         Image: Spectrum Analyzer       Image: Spectrum Analyzer         Non-Conducted Table       Image: Spectrum Analyzer         Image: Spectrum Analyzer       Image: Spectrum Analyzer         Ground Reference Plane       Remark:         Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.         Test Instruments:       Refer to section 4.10 for details         Exploratory Test Mode:       Transmitting mode         Final Test Mode:       Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;         6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm	Test Requirement:	47 CFR Part 15C Section 15.247 (e)	
Spectrum AnalyzerImage: Spectrum AnalyzerImage: Spectrum AnalyzerImage: Spectrum AnalyzerNon-Conducted TableNon-Conducted TableGround Reference PlaneRemark:Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.Test Instruments:Refer to section 4.10 for detailsExploratory Test Mode:Final Test Mode:Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11p; 6Mbps of rate is the worst case of 802.11p; 6Mbps of rate is the worst case of 802.11n; (HT40)Limit:\$8.00dBm	Test Method:	KDB558074 D01 v03r01	
Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.Test Instruments:Refer to section 4.10 for detailsExploratory Test Mode:Transmitting modeFinal Test Mode:Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)Limit:≤8.00dBm	Test Setup:	E.U.T Non-Conducted Table	
Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.         Test Instruments:       Refer to section 4.10 for details         Exploratory Test Mode:       Transmitting mode         Final Test Mode:       Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm			
Test Instruments:       Refer to section 4.10 for details         Exploratory Test Mode:       Transmitting mode         Final Test Mode:       Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;         6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm			
Exploratory Test Mode:Transmitting modeFinal Test Mode:Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)Limit:≤8.00dBm		Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Final Test Mode:       Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;         6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm	Test Instruments:	Refer to section 4.10 for details	
6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm	Exploratory Test Mode:	Transmitting mode	
case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40)         Limit:       ≤8.00dBm	Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
Test Results: Pass	Limit:	≤8.00dBm	
	Test Results:	Pass	




Report No.: SZEM140500265601 Page: 34 of 116

#### **Measurement Data** 802.11b mode Test channel Power Spectral Density (dBm) Limit (dBm) Result -13.45 Lowest ≤8.00 Pass Middle -13.85 ≤8.00 Pass -14.42 Highest ≤8.00 Pass 802.11g mode Test channel Power Spectral Density (dBm) Limit (dBm) Result Lowest -20.28 ≤8.00 Pass Middle -20.46 ≤8.00 Pass Highest -21.00 ≤8.00 Pass 802.11n(HT20) mode Test channel Power Spectral Density (dBm) Limit (dBm) Result -22.88 Lowest ≤8.00 Pass Middle -23.04 ≤8.00 Pass Highest -23.39 ≤8.00 Pass 802.11n(HT40) mode Test channel Power Spectral Density (dBm) Limit (dBm) Result Lowest -25.20 ≤8.00 Pass Middle -25.63 ≤8.00 Pass Highest ≤8.00 Pass -25.80




Report No.: SZEM140500265601 Page: 35 of 116

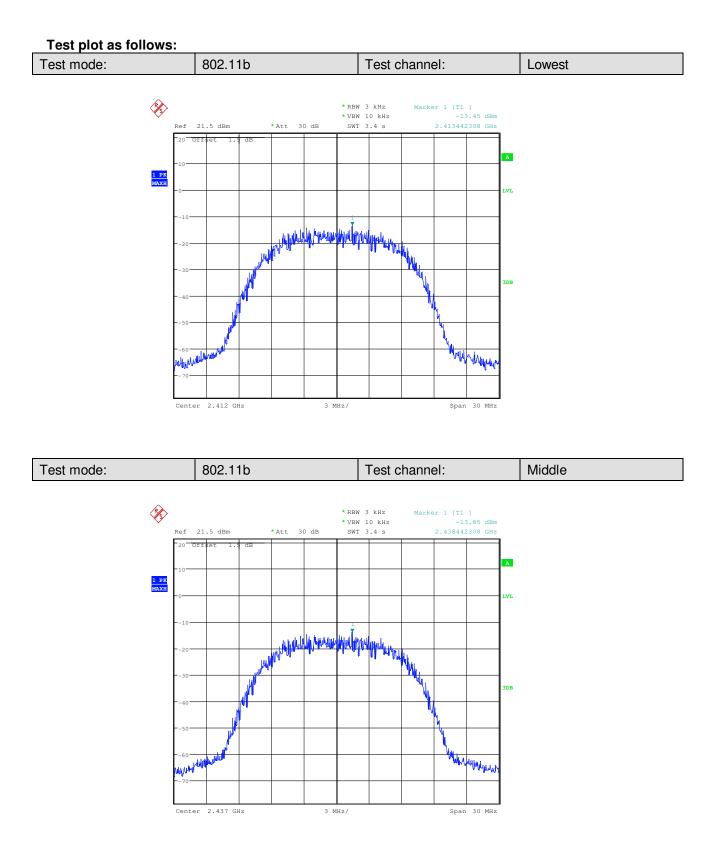




Report No.: SZEM140500265601 Page: 36 of 116

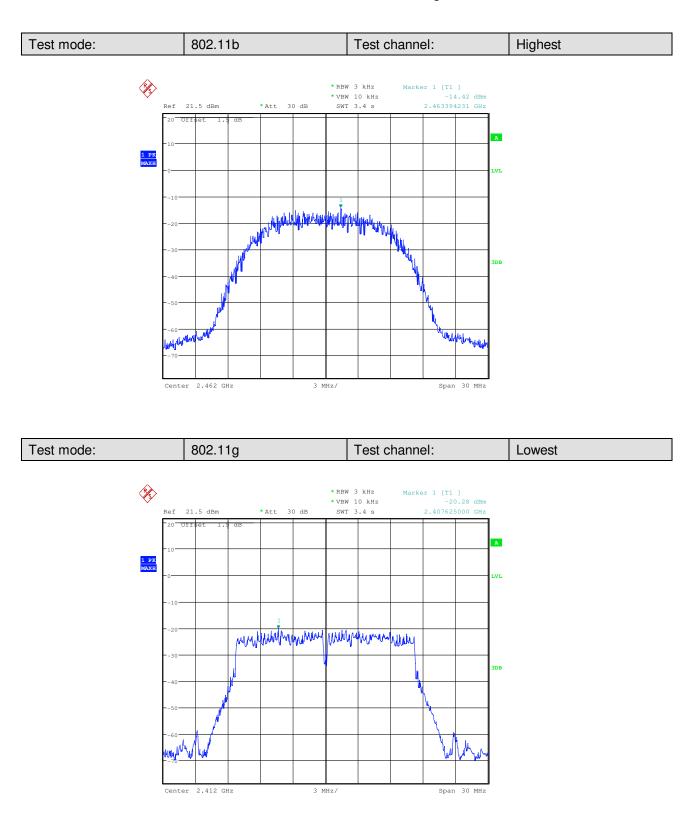




Report No.: SZEM140500265601 Page: 37 of 116

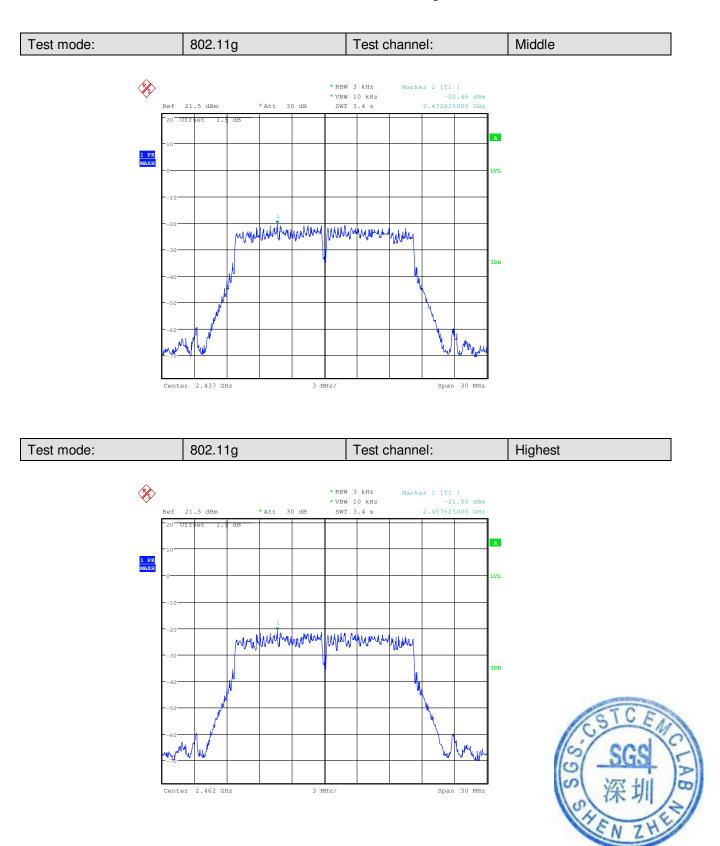




Report No.: SZEM140500265601 Page: 38 of 116

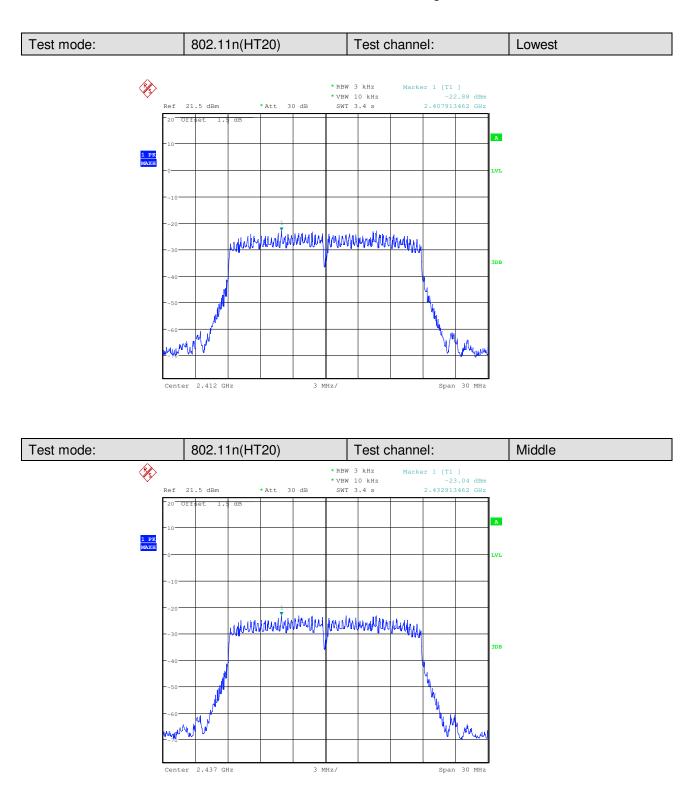




Report No.: SZEM140500265601 Page: 39 of 116

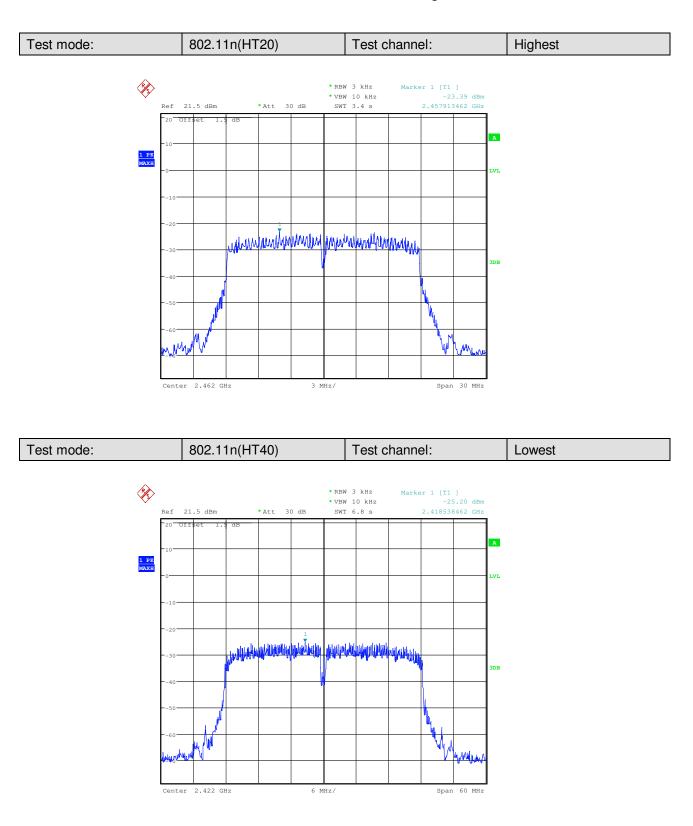



Report No.: SZEM140500265601 Page: 40 of 116

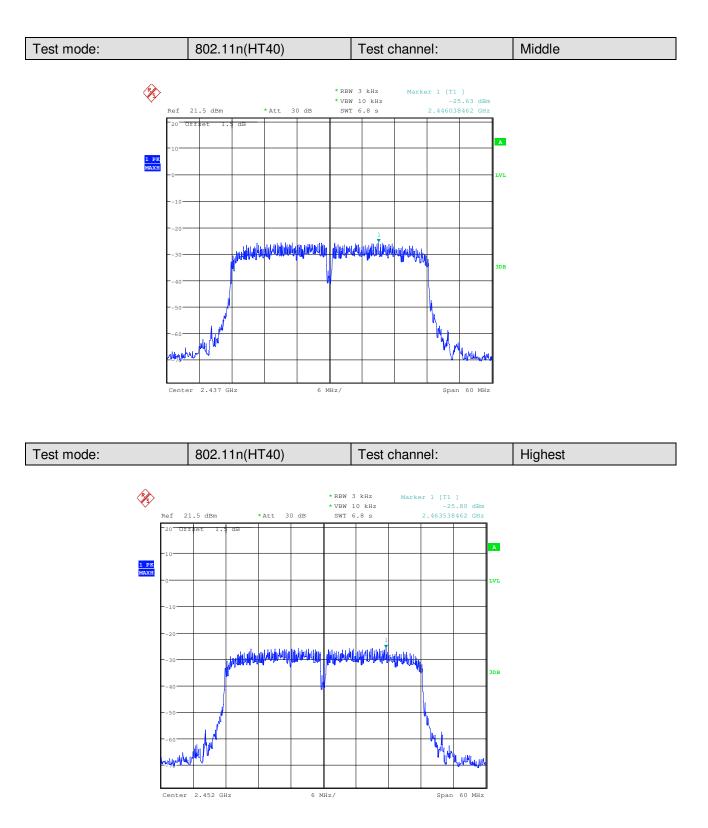



Report No.: SZEM140500265601 Page: 41 of 116


#### 5.6 Band-edge for RF Conducted Emissions

r					
47 CFR Part 15C Section 15.247 (d)					
KDB558074 D01 v03r01					
Spectrum Analyzer E.U.T Non-Conducted Table					
Ground Reference Plane					
Remark:					
Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Transmitting mode					
Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40).					
In any 100 kHz bandwidth outside the frequency band in which the spread					
spectrum intentional radiator is operating, the radio frequency power that is					
produced by the intentional radiator shall be at least 20 dB below that in the					
100 kHz bandwidth within the band that contains the highest level of the					
desired power, based on either an RF conducted or a radiated					
measurement.					
Refer to section 4.10 for details					
Pass					

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500265601 Page: 42 of 116

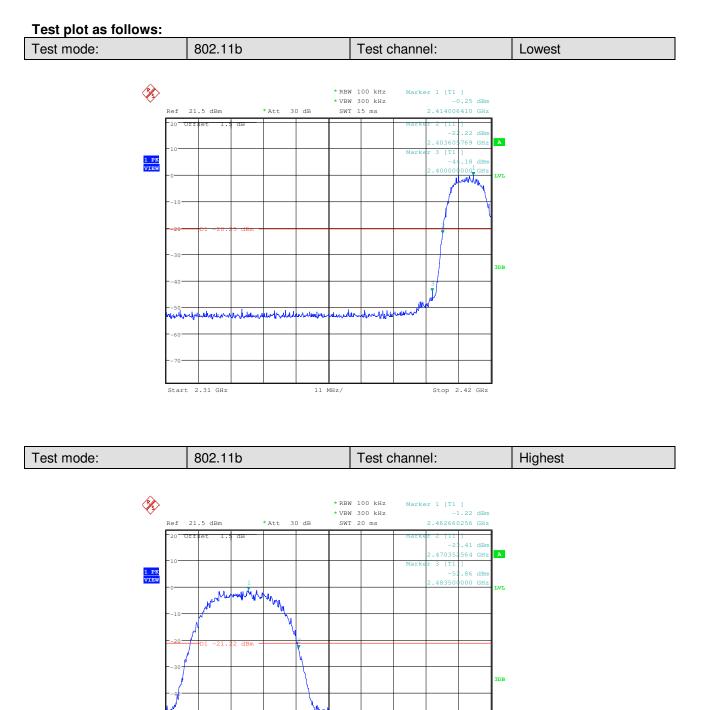

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5 MHz/

Start 2.45 GHz

Ward will a


Winn

Mh

Stop 2.5 GHz




Report No.: SZEM140500265601 Page: 43 of 116

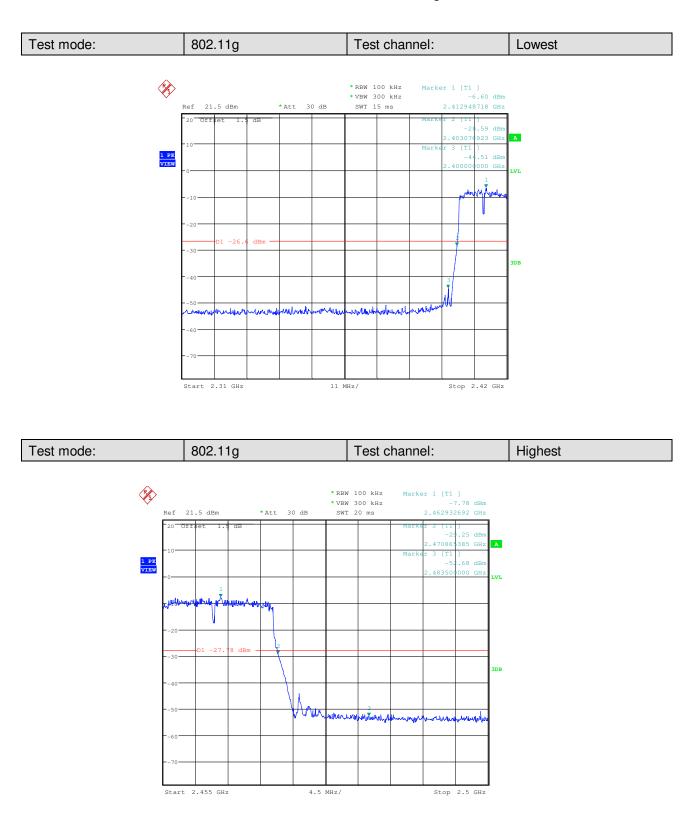





Report No.: SZEM140500265601 Page: 44 of 116

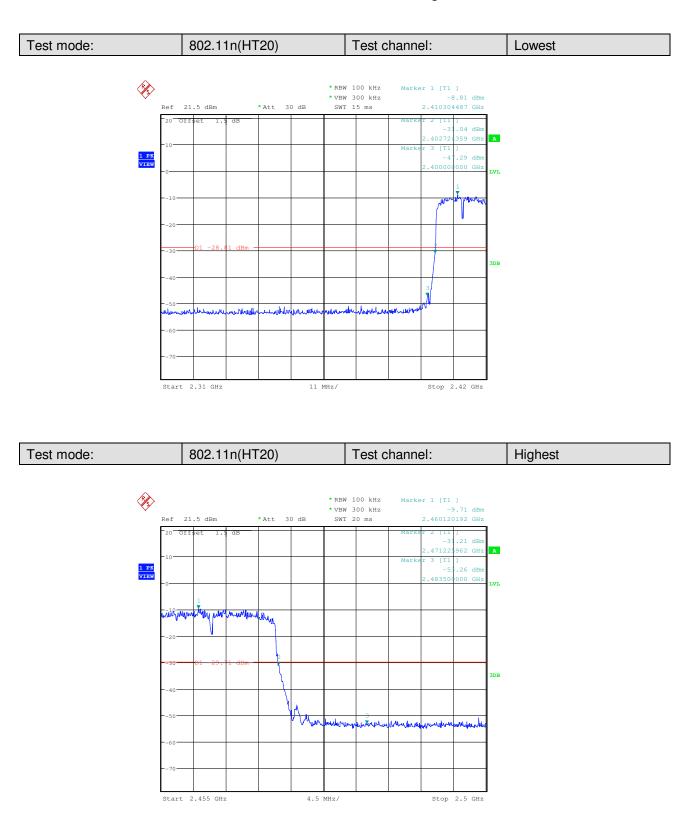



Report No.: SZEM140500265601 Page: 45 of 116

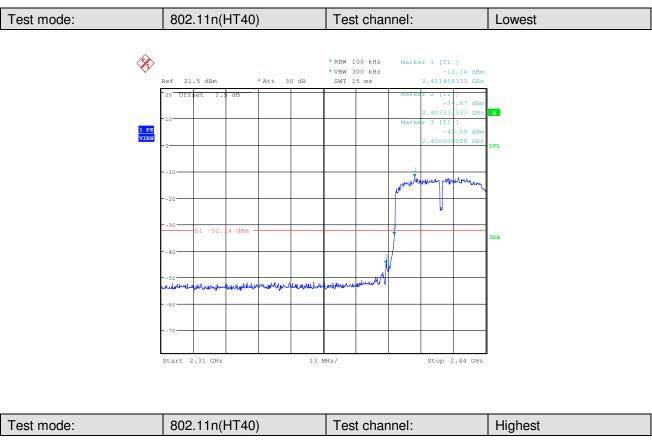

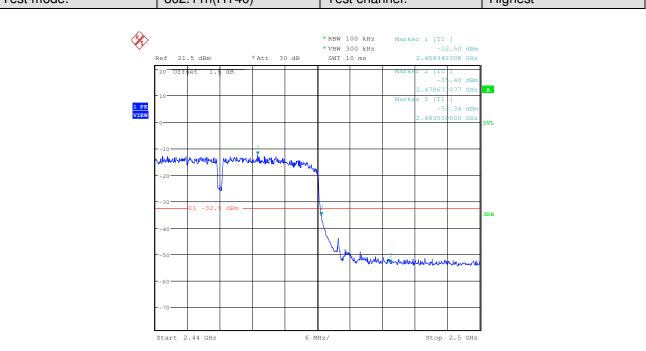




Report No.: SZEM140500265601 Page: 46 of 116

# 5.7 **RF Conducted Spurious Emissions**

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01 v03r01					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
	Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Exploratory Test Mode:	Transmitting mode					
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread					
	spectrum intentional radiator is operating, the radio frequency power that is					
	produced by the intentional radiator shall be at least 20 dB below that in the					
	100 kHz bandwidth within the band that contains the highest level of the					
	desired power, based on either an RF conducted or a radiated					
	measurement.					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					




Report No.: SZEM140500265601 Page: 47 of 116

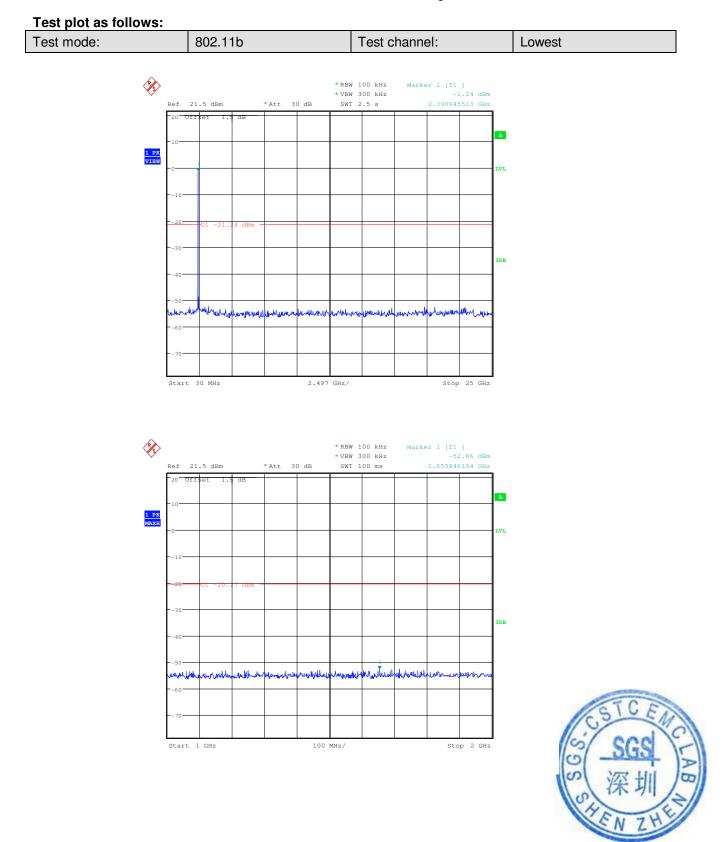




Report No.: SZEM140500265601 Page: 48 of 116

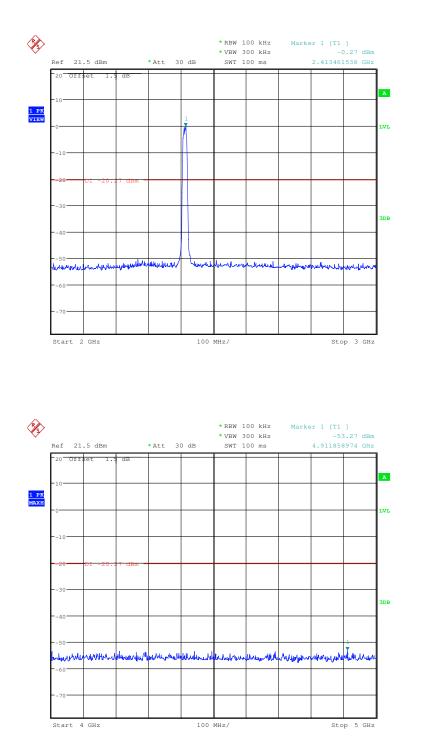




Report No.: SZEM140500265601 Page: 49 of 116

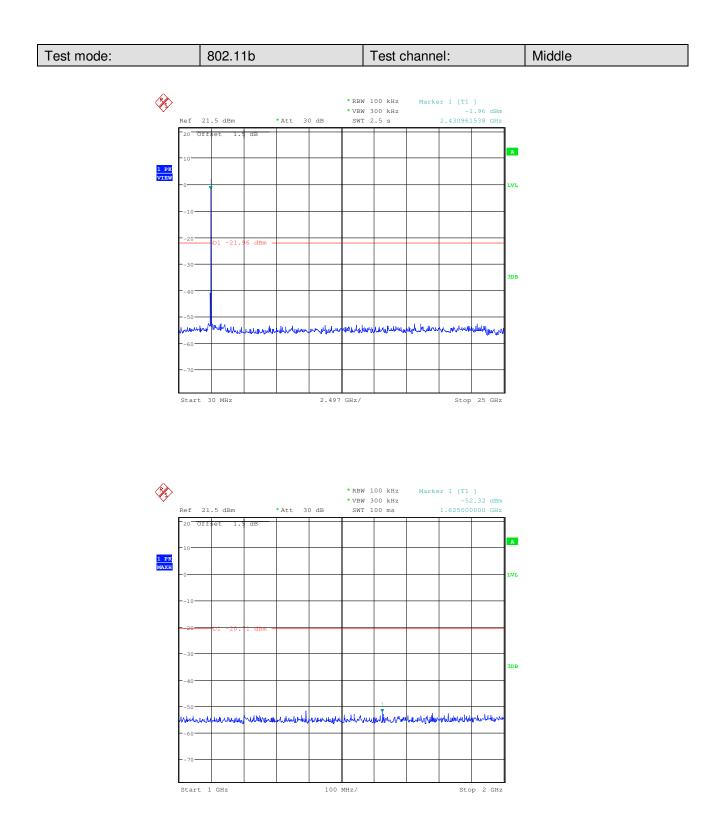



Report No.: SZEM140500265601 Page: 50 of 116

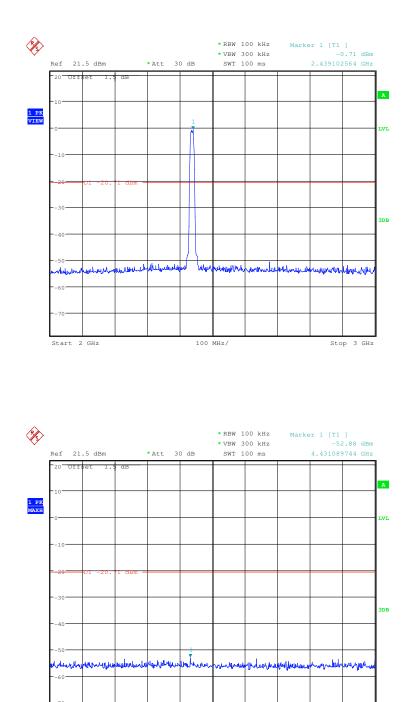


Start 4 GHz 100 MHz/

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Stop 5 GHz




Report No.: SZEM140500265601 Page: 51 of 116

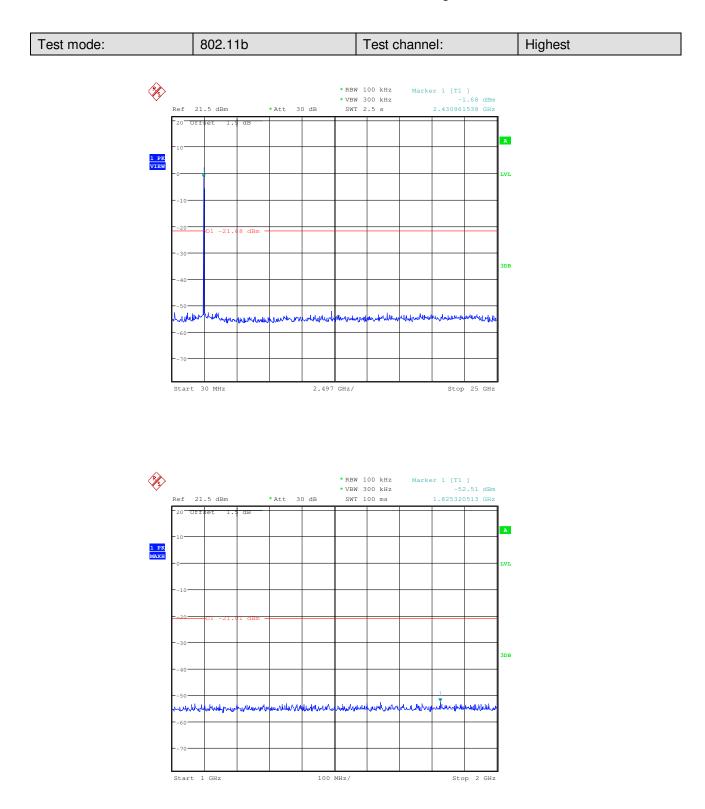



Report No.: SZEM140500265601 Page: 52 of 116

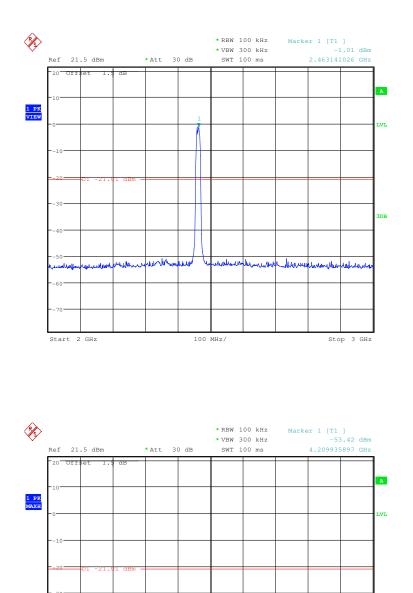

Mahankit

Ant

Start 4 GHz

ANIMA

diample

mer

100 MHz/

A10 010


the Autom

holds on the basel when

Stop 5 GHz




Report No.: SZEM140500265601 Page: 53 of 116

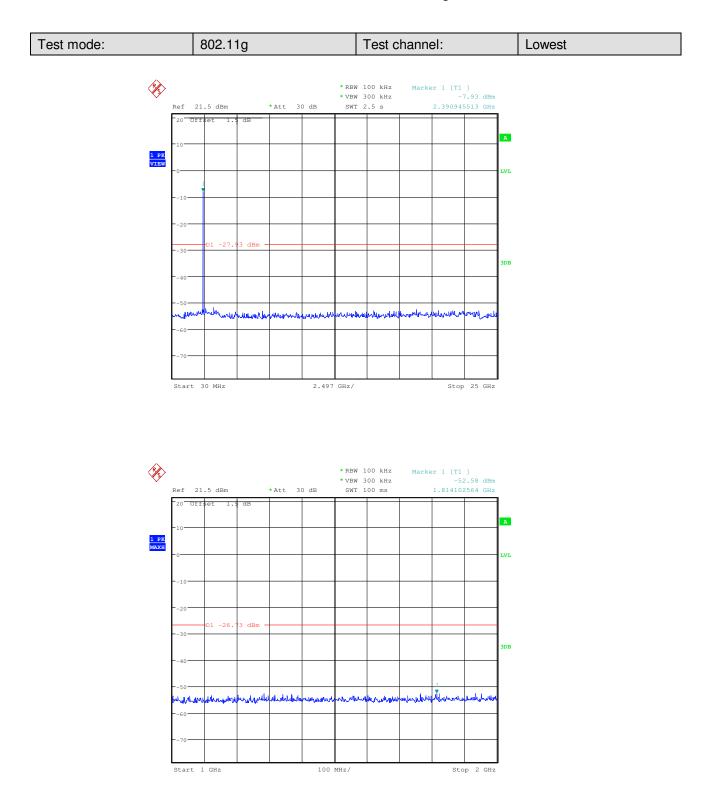




Report No.: SZEM140500265601 Page: 54 of 116

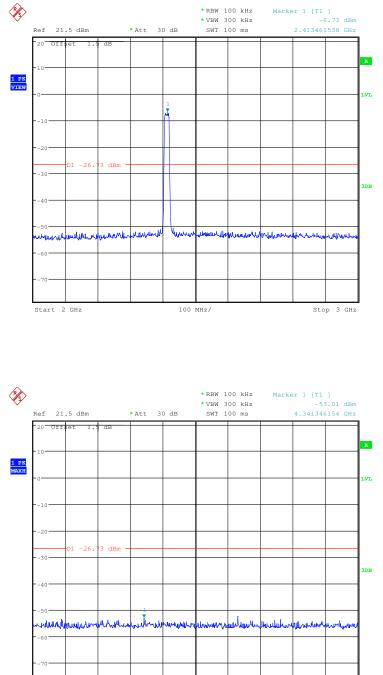

Start 4 GHz 100 MHz/ Stop 5 GHz




Report No.: SZEM140500265601 Page: 55 of 116

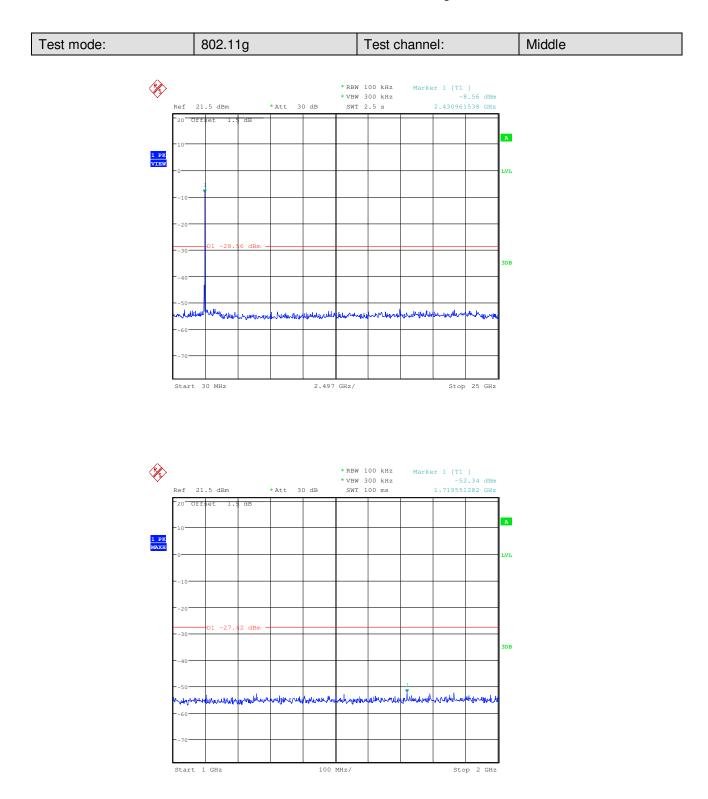




Report No.: SZEM140500265601 Page: 56 of 116

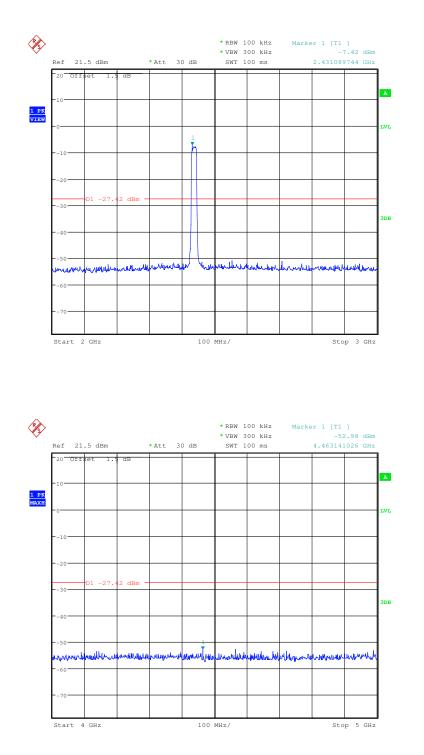




Report No.: SZEM140500265601 Page: 57 of 116

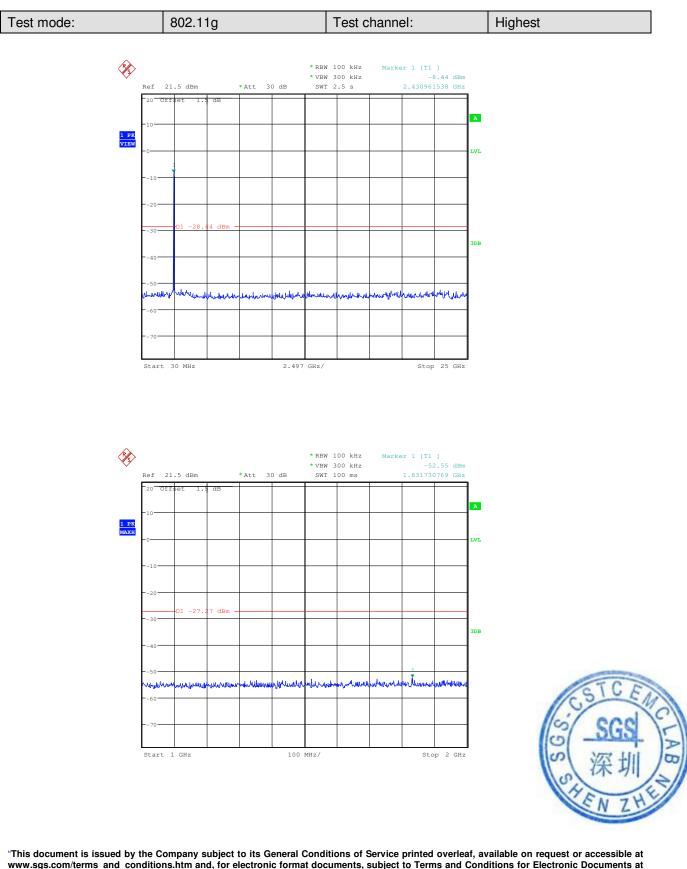



Report No.: SZEM140500265601 Page: 58 of 116

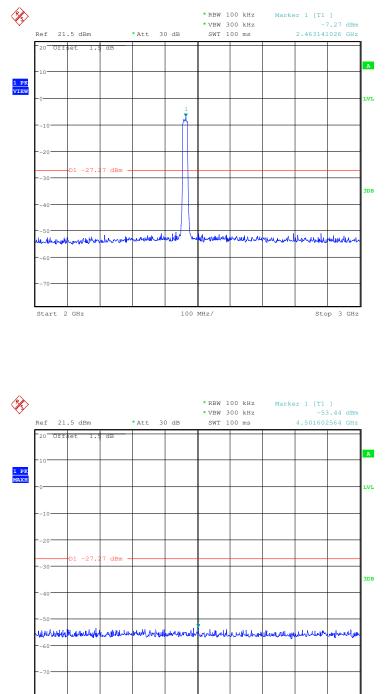

Start 4 GHz


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/

Stop 5 GHz




Report No.: SZEM140500265601 Page: 59 of 116

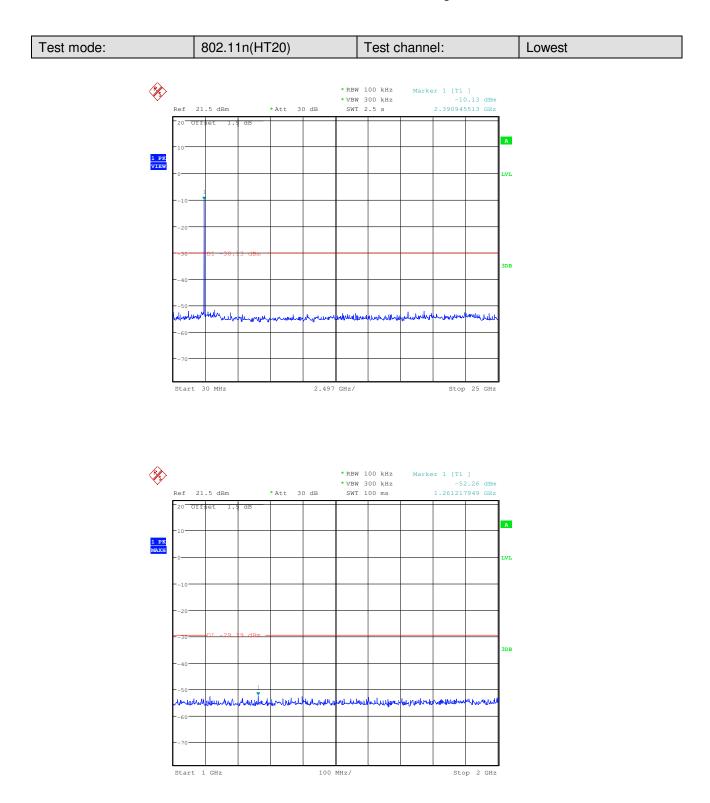




Report No.: SZEM140500265601 Page: 60 of 116

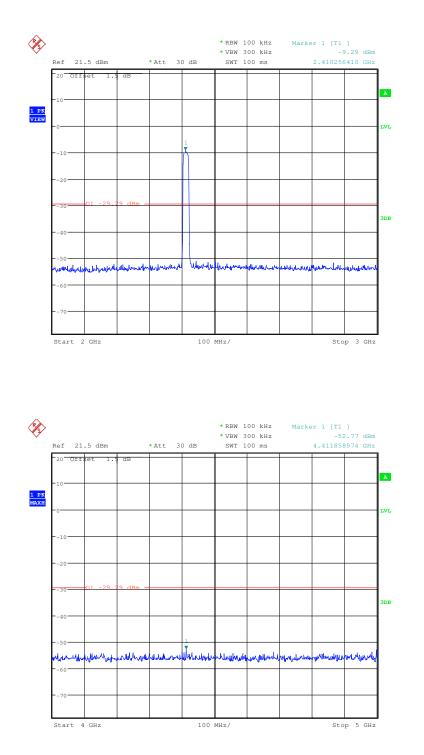




Report No.: SZEM140500265601 Page: 61 of 116

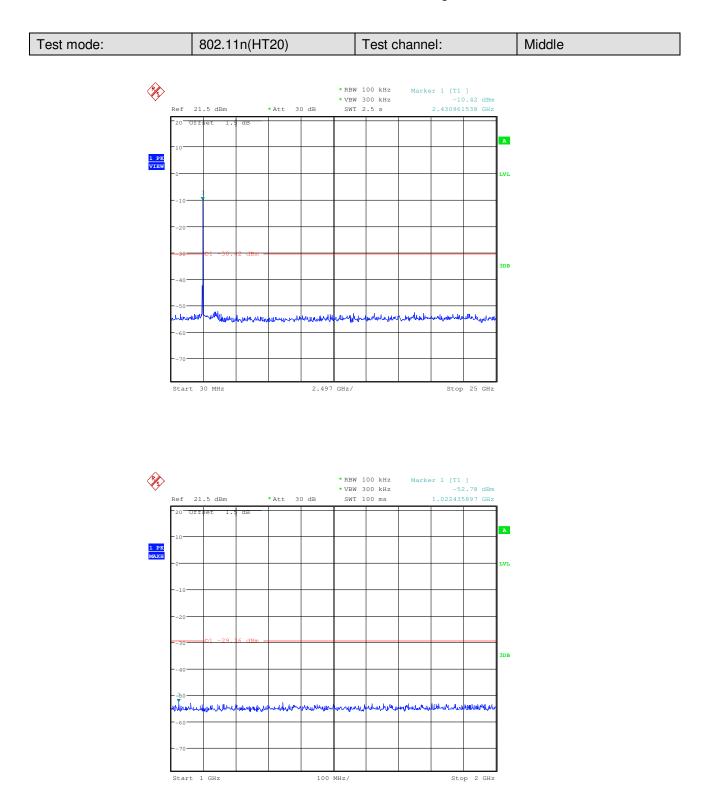




Report No.: SZEM140500265601 Page: 62 of 116

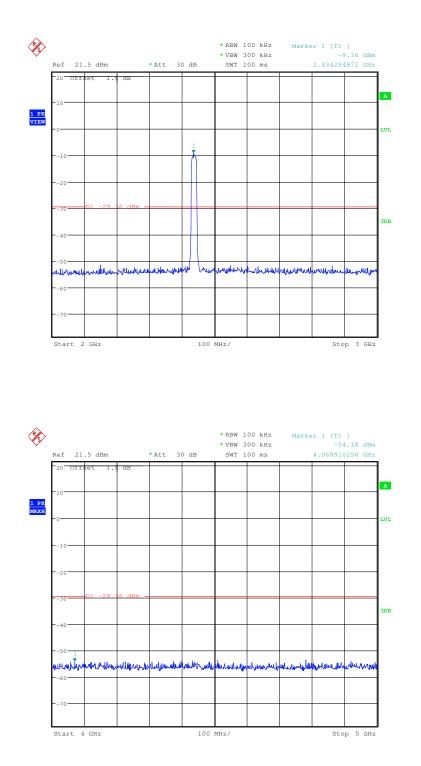




Report No.: SZEM140500265601 Page: 63 of 116

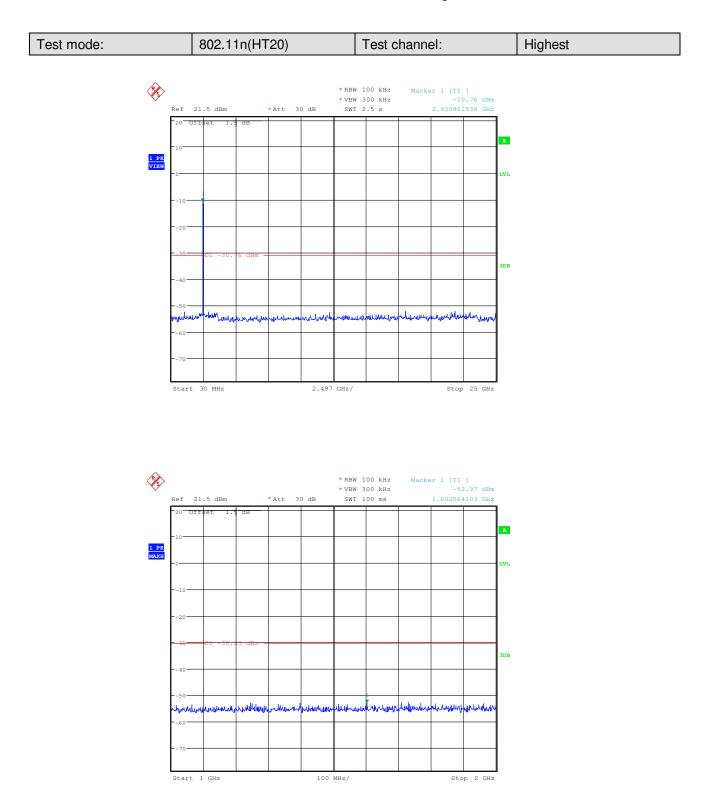



Report No.: SZEM140500265601 Page: 64 of 116

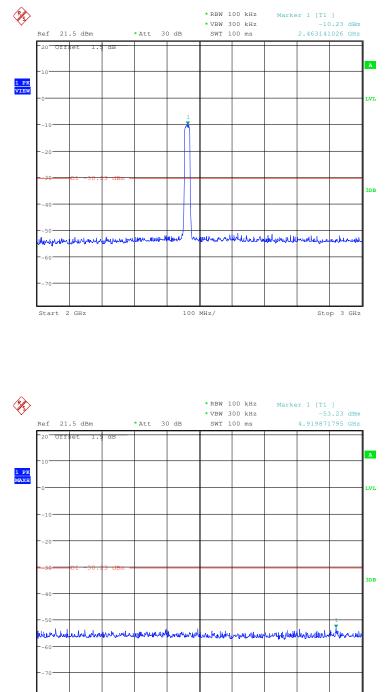

Start 4 GHz


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/

Stop 5 GHz




Report No.: SZEM140500265601 Page: 65 of 116

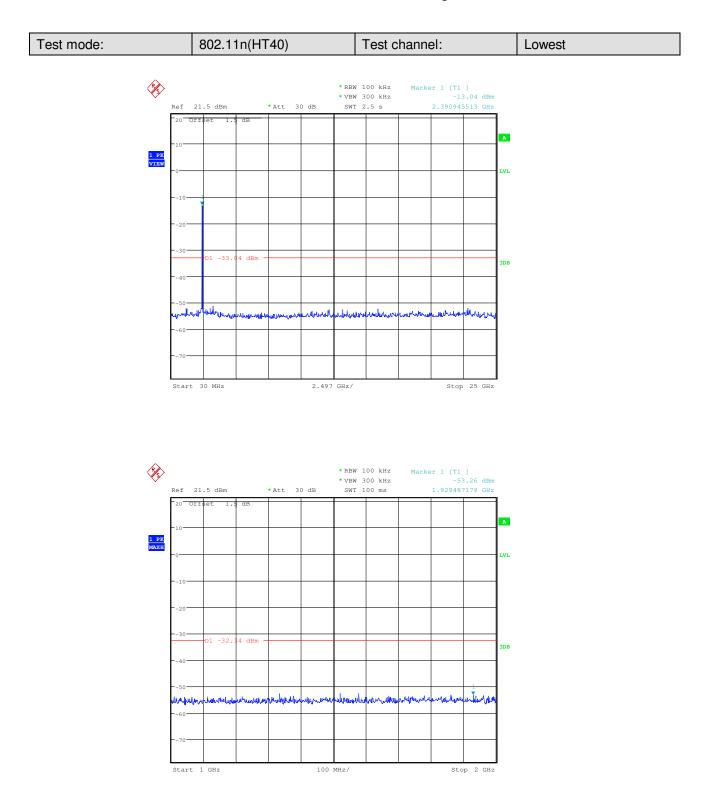




Report No.: SZEM140500265601 Page: 66 of 116

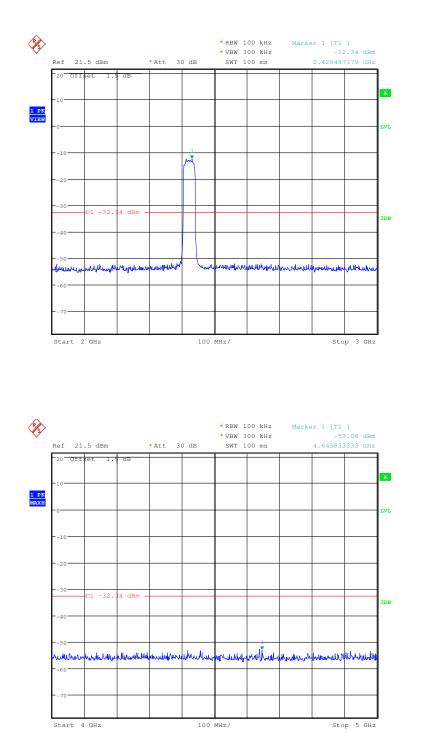




Report No.: SZEM140500265601 Page: 67 of 116

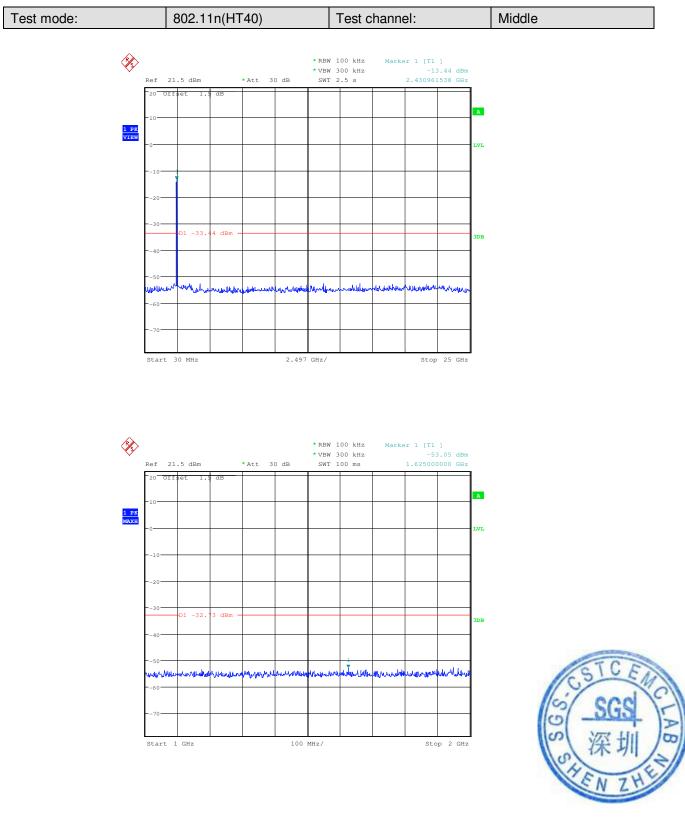




Report No.: SZEM140500265601 Page: 68 of 116

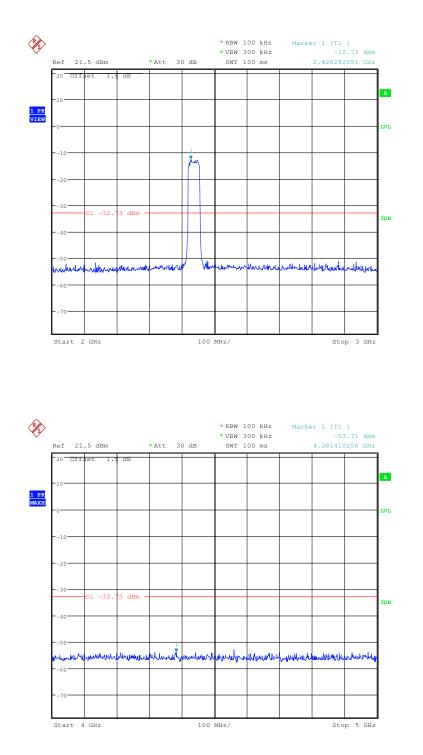




Report No.: SZEM140500265601 Page: 69 of 116

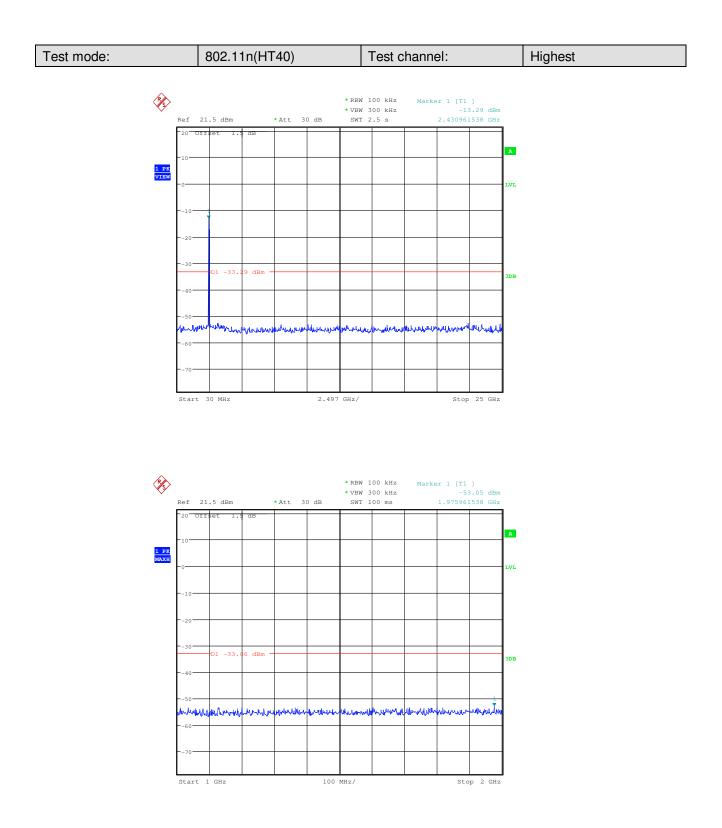



Report No.: SZEM140500265601 Page: 70 of 116

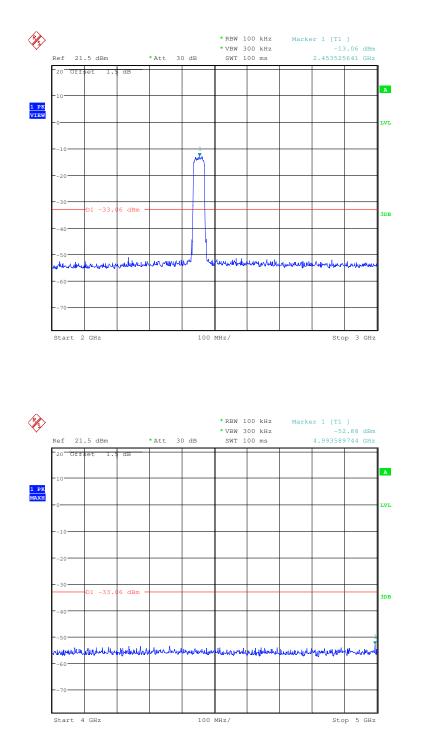

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.




Report No.: SZEM140500265601 Page: 71 of 116

# 5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 2009						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Receiver Setup:	Frequency Detector RBW VBW						
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak		
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average		
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
	Above TGH2	Peak	1MHz	10Hz	Average		
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30		
	1.705MHz-30MHz	30	-	-	30		
	30MHz-88MHz	100	40.0	Quasi-peak	3		
	88MHz-216MHz	150	43.5	Quasi-peak	3		
	216MHz-960MHz	200	46.0	Quasi-peak	3		
	960MHz-1GHz	500	54.0	Quasi-peak	3		
	Above 1GHz	500	54.0	Average	3		
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							



Report No.: SZEM140500265601 Page: 72 of 116

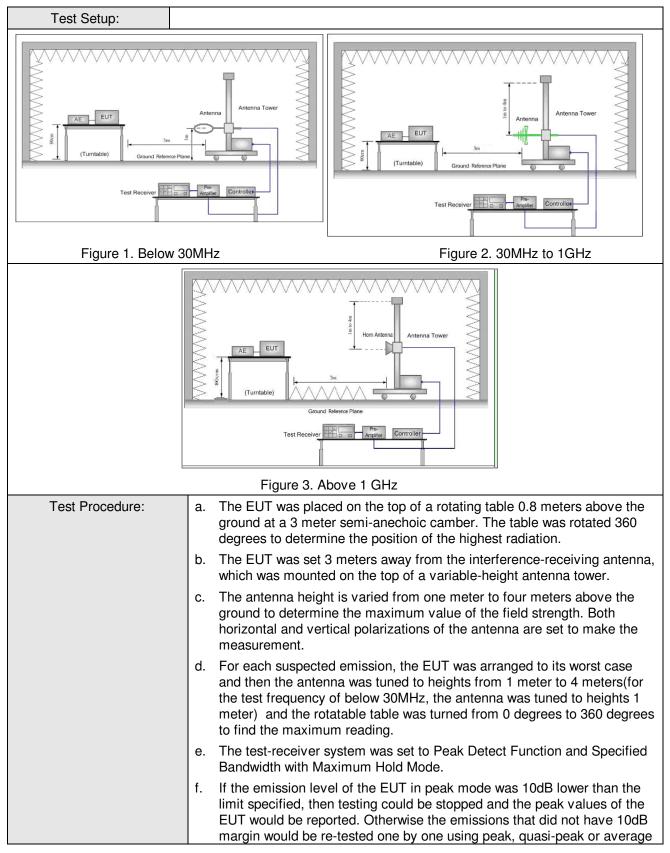



Report No.: SZEM140500265601 Page: 73 of 116


	<ul> <li>method as specified and then reported in a data sheet.</li> <li>g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</li> <li>b. Report above precedures until all frequencies measured was complete.</li> </ul>
Exploratory Test	h. Repeat above procedures until all frequencies measured was complete. Transmitting mode
Mode:	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbp of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of
	802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM140500265601 Page: 74 of 116

#### 5.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

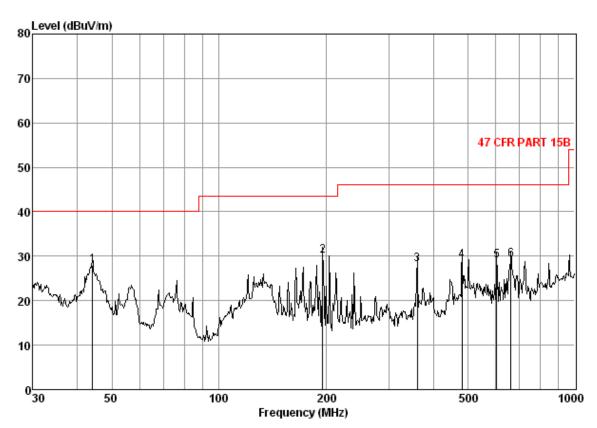


Condition: 47 CFR PART 15B 3m 3142C VERTICAL Job No. : 2656RF Mode : TX

ouc	. rr Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	44.12 195.82 360.45 482.22 603.54 661.15	0.69 1.39 2.09 2.54 2.71 2.83	10.13 7.04 10.40 13.42 15.27 16.17	27.31 26.71 26.87 27.62 27.54 27.46	44.50 48.29 42.51 40.73 38.57 37.65	28.01 30.01 28.13 29.07 29.01 29.19	43.50 46.00 46.00 46.00	-11.99 -13.49 -17.87 -16.93 -16.99 -16.81



Report No.: SZEM140500265601 Page: 75 of 116

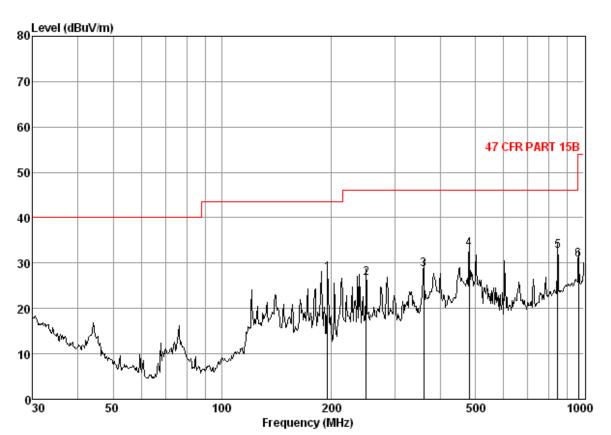

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL Job No. : 2656RF Mode : TX

	 Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	195.82 250.30 360.45 482.22 845.09 965.54	1.39 1.68 2.09 2.54 3.39 3.67	7.04 8.57 10.40 13.42 19.17 21.13	26.71 26.54 26.87 27.62 27.06 26.47	45.91 43.03 43.02 44.72 37.05 32.48	27.63 26.74 28.64 33.06 32.55 30.81	46.00 46.00 46.00 46.00	-15.87 -19.26 -17.36 -12.94 -13.45 -23.19



Report No.: SZEM140500265601 Page: 76 of 116

Test mode:	802	.11b	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1659.574	4.04	29.33	39.42	54.26	48.21	74	-25.79	Vertical
3216.838	5.37	33.32	40.47	48.57	46.79	74	-27.21	Vertical
4824.000	7.45	34.68	41.64	48.87	49.36	74	-24.64	Vertical
7236.000	8.76	35.90	39.85	48.05	52.86	74	-21.14	Vertical
9648.000	9.69	37.36	37.76	44.15	53.44	74	-20.56	Vertical
11027.980	10.59	38.49	37.88	40.89	52.09	74	-21.91	Vertical
1913.838	4.26	31.18	39.53	51.86	47.77	74	-26.23	Horizontal
3776.385	6.16	33.53	40.87	49.72	48.54	74	-25.46	Horizontal
4824.000	7.45	34.68	41.64	46.76	47.25	74	-26.75	Horizontal
7236.000	8.76	35.90	39.85	46.79	51.60	74	-22.40	Horizontal
9648.000	9.69	37.36	37.76	43.59	52.88	74	-21.12	Horizontal
11341.140	10.81	38.43	38.00	42.09	53.33	74	-20.67	Horizontal

#### 5.8.2 Transmitter emission above 1GHz

Test mode:	802	.11b	Test ch	annel:	Middle	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	50.51	46.42	74	-27.58	Vertical
3634.910	5.95	33.37	40.77	47.16	45.71	74	-28.29	Vertical
4874.000	7.48	34.59	41.68	48.11	48.50	74	-25.50	Vertical
7311.000	8.85	35.92	39.79	47.15	52.13	74	-21.87	Vertical
9748.000	9.74	37.46	37.68	44.15	53.67	74	-20.33	Vertical
10999.950	10.56	38.50	37.86	42.48	53.68	74	-20.32	Vertical
1913.838	4.26	31.18	39.53	49.18	45.09	74	-28.91	Horizontal
3625.669	5.93	33.34	40.76	47.16	45.67	74	-28.33	Horizontal
4874.000	7.48	34.59	41.68	46.38	46.77	74	-27.23	Horizontal
7311.000	8.85	35.92	39.79	47.13	52.11	74	-21.89	Horizontal
9748.000	9.74	37.46	37.68	43.48	53.00	74	-21.00	Horizontal
10916.260	10.50	38.47	37.83	42.69	53.83	74	-20.17	Horizontal



Report No.: SZEM140500265601 Page: 77 of 116

Test mode:	802	.11b	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	48.50	44.41	74	-29.59	Vertical
3588.939	5.88	33.30	40.73	45.61	44.06	74	-29.94	Vertical
4924.000	7.51	34.51	41.72	46.40	46.70	74	-27.30	Vertical
7426.000	9.01	35.97	39.69	47.28	52.57	74	-21.43	Vertical
9888.000	9.80	37.60	37.55	42.51	52.36	74	-21.64	Vertical
11112.520	10.64	38.48	37.91	42.38	53.59	74	-20.41	Vertical
1913.838	4.26	31.18	39.53	50.29	46.20	74	-27.80	Horizontal
3662.775	5.98	33.41	40.79	46.89	45.49	74	-28.51	Horizontal
4924.000	7.51	34.51	41.72	47.82	48.12	74	-25.88	Horizontal
7426.000	9.01	35.97	39.69	47.78	53.07	74	-20.93	Horizontal
9888.000	9.80	37.60	37.55	43.40	53.25	74	-20.75	Horizontal
10888.510	10.49	38.46	37.81	41.94	53.08	74	-20.92	Horizontal

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1923.606	4.27	31.18	39.54	45.52	41.43	74	-32.57	Vertical
3579.815	5.88	33.30	40.73	45.69	44.14	74	-29.86	Vertical
4824.000	7.45	34.68	41.64	47.76	48.25	74	-25.75	Vertical
7236.000	8.76	35.90	39.85	45.79	50.60	74	-23.40	Vertical
9648.000	9.69	37.36	37.76	41.59	50.88	74	-23.12	Vertical
10860.830	10.46	38.44	37.80	40.92	52.02	74	-21.98	Vertical
1541.476	3.94	28.47	39.37	53.84	46.88	74	-27.12	Horizontal
3480.968	5.73	33.21	40.66	47.74	46.02	74	-27.98	Horizontal
4824.000	7.45	34.68	41.64	48.87	49.36	74	-24.64	Horizontal
7236.000	8.76	35.90	39.85	48.05	52.86	74	-21.14	Horizontal
9648.000	9.69	37.36	37.76	44.15	53.44	74	-20.56	Horizontal
11027.980	10.59	38.49	37.88	40.89	52.09	74	-21.91	Horizontal
							10.	4 E SE



Report No.: SZEM140500265601 Page: 78 of 116

Test mode:	802	2.11g	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1889.633	4.24	30.94	39.52	48.94	44.60	74	-29.40	Vertical
3410.797	5.62	33.23	40.61	47.67	45.91	74	-28.09	Vertical
4874.000	7.48	34.59	41.68	47.53	47.92	74	-26.08	Vertical
7311.000	8.85	35.92	39.79	48.11	53.09	74	-20.91	Vertical
9748.000	9.74	37.46	37.68	43.09	52.61	74	-21.39	Vertical
10999.950	10.56	38.50	37.86	42.49	53.69	74	-20.31	Vertical
1913.838	4.26	31.18	39.53	47.88	43.79	74	-30.21	Horizontal
3700.260	6.05	33.45	40.81	45.94	44.63	74	-29.37	Horizontal
4874.000	7.48	34.59	41.68	45.43	45.82	74	-28.18	Horizontal
7311.000	8.85	35.92	39.79	45.92	50.90	74	-23.10	Horizontal
9748.000	9.74	37.46	37.68	43.16	52.68	74	-21.32	Horizontal
11428.080	10.87	38.42	38.04	41.63	52.88	74	-21.12	Horizontal

Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	48.19	44.10	74	-29.90	Vertical
3625.669	5.93	33.34	40.76	46.76	45.27	74	-28.73	Vertical
4924.000	7.51	34.51	41.72	47.86	48.16	74	-25.84	Vertical
7426.000	9.01	35.97	39.69	47.00	52.29	74	-21.71	Vertical
9888.000	9.80	37.60	37.55	43.89	53.74	74	-20.26	Vertical
11603.960	11.00	38.50	38.11	42.40	53.79	74	-20.21	Vertical
1913.838	4.26	31.18	39.53	49.96	45.87	74	-28.13	Horizontal
3588.939	5.88	33.30	40.73	47.90	46.35	74	-27.65	Horizontal
4924.000	7.51	34.51	41.72	46.55	46.85	74	-27.15	Horizontal
7426.000	9.01	35.97	39.69	46.43	51.72	74	-22.28	Horizontal
9888.000	9.80	37.60	37.55	42.44	52.29	74	-21.71	Horizontal
11140.850	10.67	38.47	37.92	42.28	53.50	74	-20.50	Horizontal



Report No.: SZEM140500265601 Page: 79 of 116

Test mode:	802	2.11n(HT20)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	48.68	44.59	74	-29.41	Vertical
3384.850	5.60	33.25	40.59	47.10	45.36	74	-28.64	Vertical
4824.000	7.45	34.68	41.64	46.34	46.83	74	-27.17	Vertical
7236.000	8.76	35.90	39.85	47.44	52.25	74	-21.75	Vertical
9648.000	9.69	37.36	37.76	44.28	53.57	74	-20.43	Vertical
11027.980	10.59	38.49	37.88	41.97	53.17	74	-20.83	Vertical
1913.838	4.26	31.18	39.53	48.10	44.01	74	-29.99	Horizontal
3525.555	5.80	33.24	40.69	45.99	44.34	74	-29.66	Horizontal
4824.000	7.45	34.68	41.64	46.52	47.01	74	-26.99	Horizontal
7236.000	8.76	35.90	39.85	47.87	52.68	74	-21.32	Horizontal
9648.000	9.69	37.36	37.76	44.05	53.34	74	-20.66	Horizontal
10999.950	10.56	38.50	37.86	41.96	53.16	74	-20.84	Horizontal

Test mode:	802	2.11n(HT20)	Test ch	annel:	Middle	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	50.06	45.97	74	-28.03	Vertical
3552.582	5.83	33.26	40.70	47.53	45.92	74	-28.08	Vertical
4874.000	7.48	34.59	41.68	48.24	48.63	74	-25.37	Vertical
7311.000	8.85	35.92	39.79	47.75	52.73	74	-21.27	Vertical
9748.000	9.74	37.46	37.68	42.92	52.44	74	-21.56	Vertical
11027.980	10.59	38.49	37.88	42.60	53.80	74	-20.20	Vertical
1913.838	4.26	31.18	39.53	49.17	45.08	74	-28.92	Horizontal
3598.087	5.90	33.32	40.74	46.78	45.26	74	-28.74	Horizontal
4874.000	7.48	34.59	41.68	47.61	48.00	74	-26.00	Horizontal
7311.000	8.85	35.92	39.79	47.24	52.22	74	-21.78	Horizontal
9748.000	9.74	37.46	37.68	44.29	53.81	74	-20.19	Horizontal
10999.950	10.56	38.50	37.86	42.05	53.25	74	-20.75	Horizontal



Report No.: SZEM140500265601 Page: 80 of 116

Test mode:	8	02.11n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	_	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	48.86	44.77	74	-29.23	Vertical
3489.840	5.75	33.21	40.66	48.77	47.07	74	-26.93	Vertical
4924.000	7.51	34.51	41.72	47.08	47.38	74	-26.62	Vertical
7426.000	9.01	35.97	39.69	46.91	52.20	74	-21.80	Vertical
9888.000	9.80	37.60	37.55	44.03	53.88	74	-20.12	Vertical
11027.980	10.59	38.49	37.88	42.28	54.48	74	-20.52	Vertical
1913.838	4.26	31.18	39.53	48.35	44.26	74	-29.74	Horizontal
3634.910	5.95	33.37	40.77	47.65	46.20	74	-27.80	Horizontal
4924.000	7.51	34.51	41.72	47.41	47.71	74	-26.29	Horizontal
7426.000	9.01	35.97	39.69	46.04	51.33	74	-22.67	Horizontal
9888.000	9.80	37.60	37.55	42.55	52.40	74	-21.60	Horizontal
11341.140	10.81	38.43	38.00	42.43	53.67	74	-20.33	Horizontal

Test mode:	80	2.11n(HT40)	Test ch	annel:	Lowest	Remark	•	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1809.605	4.18	30.44	39.49	44.72	39.85	74.00	-34.15	Vertical
3738.129	6.11	33.49	40.84	45.99	44.75	74.00	-29.25	Vertical
4844.000	7.46	34.65	41.65	46.23	46.69	74.00	-27.31	Vertical
7266.000	8.81	35.91	39.82	46.86	51.76	74.00	-22.24	Vertical
9688.000	9.71	37.39	37.73	43.11	52.48	74.00	-21.52	Vertical
11056.090	10.60	38.49	37.88	42.58	53.79	74.00	-20.21	Vertical
1913.838	4.26	31.18	39.53	50.08	45.99	74.00	-28.01	Horizontal
3738.129	6.11	33.49	40.84	47.15	45.91	74.00	-28.09	Horizontal
4844.000	7.46	34.65	41.65	47.01	47.47	74.00	-26.53	Horizontal
7266.000	8.81	35.91	39.82	47.34	52.24	74.00	-21.76	Horizontal
9688.000	9.71	37.39	37.73	42.80	52.17	74.00	-21.83	Horizontal
11574.460	10.98	38.47	38.10	42.17	53.52	74.00	-20.48	Horizontal



Report No.: SZEM140500265601 Page: 81 of 116

Test mode:	80	2.11n(HT40)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1913.838	4.26	31.18	39.53	48.95	44.86	74	-29.14	Vertical
3454.486	5.70	33.22	40.63	46.33	44.62	74	-29.38	Vertical
4874.000	7.48	34.59	41.68	48.03	48.42	74	-25.58	Vertical
7311.000	8.85	35.92	39.79	46.62	51.60	74	-22.40	Vertical
9748.000	9.74	37.46	37.68	42.78	52.30	74	-21.70	Vertical
11112.520	10.64	38.48	37.91	42.09	53.30	74	-20.70	Vertical
1913.838	4.26	31.18	39.53	48.26	44.17	74	-29.83	Horizontal
3625.669	5.93	33.34	40.76	45.84	44.35	74	-29.65	Horizontal
4874.000	7.48	34.59	41.68	46.62	47.01	74	-26.99	Horizontal
7311.000	8.85	35.92	39.79	46.35	51.33	74	-22.67	Horizontal
9748.000	9.74	37.46	37.68	44.28	53.80	74	-20.20	Horizontal
11370.050	10.84	38.43	38.02	42.37	53.62	74	-20.38	Horizontal

Test mode:	80	2.11n(HT40)	Test ch	annel:	Highest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1676.558	4.05	29.46	39.43	47.15	41.23	74	-32.77	Vertical
3700.260	6.05	33.45	40.81	47.50	46.19	74	-27.81	Vertical
4904.000	7.49	34.54	41.70	47.43	47.76	74	-26.24	Vertical
7356.000	8.92	35.94	39.74	46.55	51.67	74	-22.33	Vertical
9808.000	9.76	37.51	37.61	42.61	52.27	74	-21.73	Vertical
11812.580	11.15	38.71	38.20	42.08	53.74	74	-20.26	Vertical
1823.477	4.18	30.44	39.49	45.46	40.59	74	-33.41	Horizontal
3681.469	6.03	33.43	40.80	46.27	44.93	74	-29.07	Horizontal
4904.000	7.49	34.54	41.70	46.03	46.36	74	-27.64	Horizontal
7356.000	8.92	35.94	39.74	46.33	51.45	74	-22.55	Horizontal
9808.000	9.76	37.51	37.61	42.92	52.58	74	-21.42	Horizontal
10833.220	10.45	38.43	37.80	41.92	53.00	74	-21.00	Horizontal





Report No.: SZEM140500265601 Page: 82 of 116

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor


- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



Report No.: SZEM140500265601 Page: 83 of 116

#### 5.9 Restricted bands around fundamental frequency

		= =								
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2009									
Test Site:	Measurement Distance: 3r	leasurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
		54.0	Average Value							
		Above 1GHz 74.0 Peak Value								
Test Setup:		·								

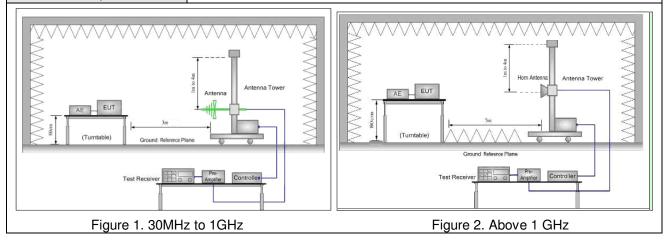




Report No.: SZEM140500265601 Page: 84 of 116

Test Procedure:	<ul> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> </ul>
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	<ul> <li>Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140500265601 Page: 85 of 116

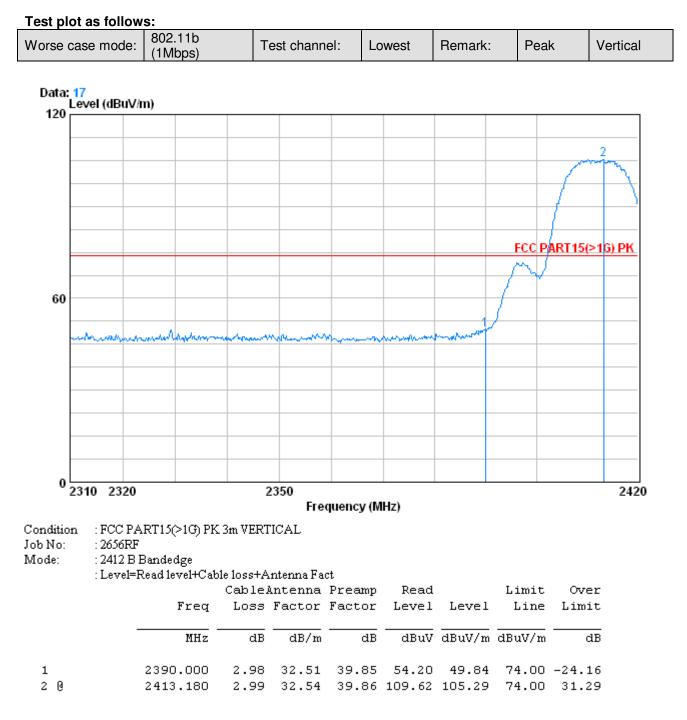




Report No.: SZEM140500265601 Page: 86 of 116

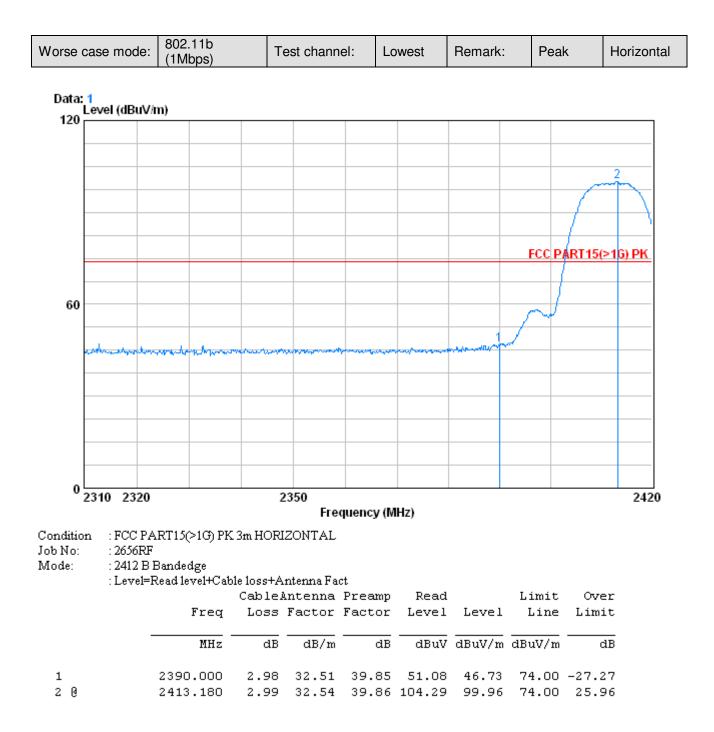




Report No.: SZEM140500265601 Page: 87 of 116

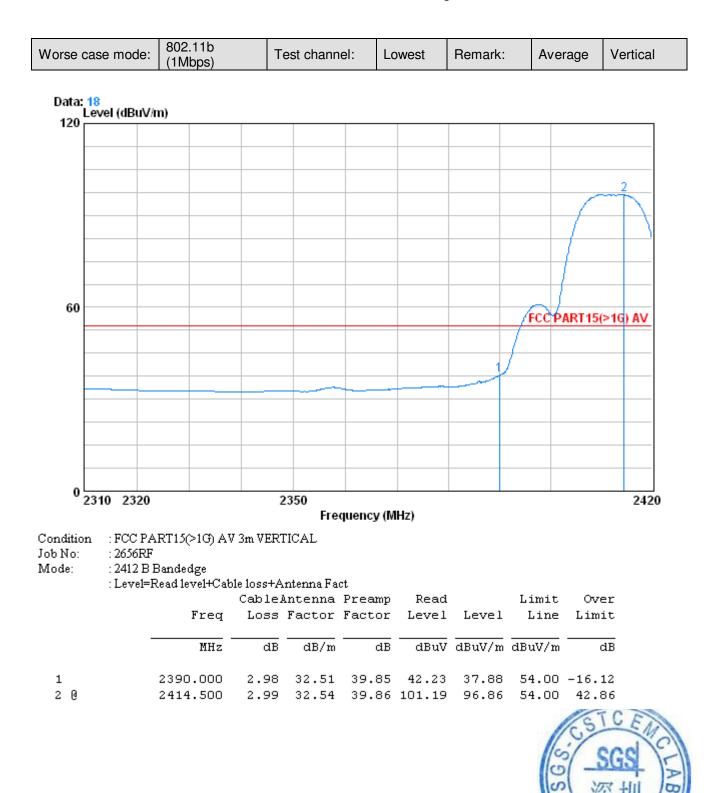




Report No.: SZEM140500265601 Page: 88 of 116

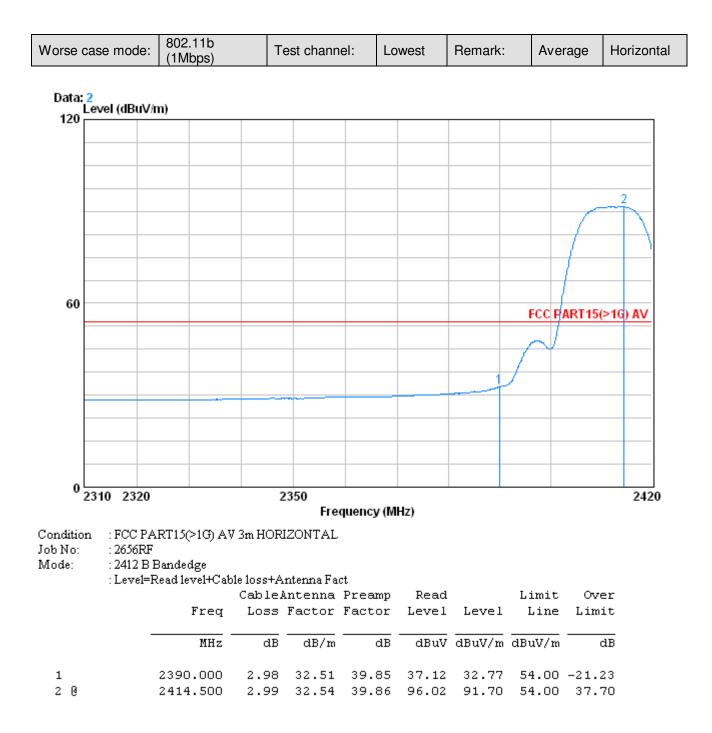



Report No.: SZEM140500265601 Page: 89 of 116

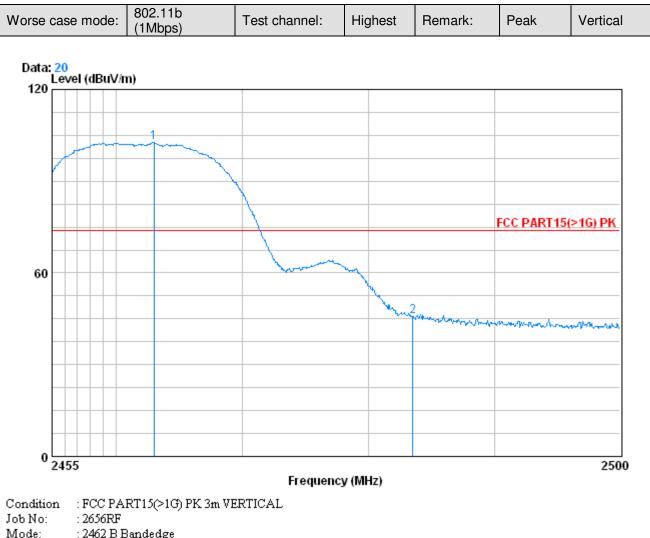


: 2462 B Bandedge

: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	-			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2463.010 2483.500		32.64 32.67					



Report No.: SZEM140500265601 Page: 90 of 116

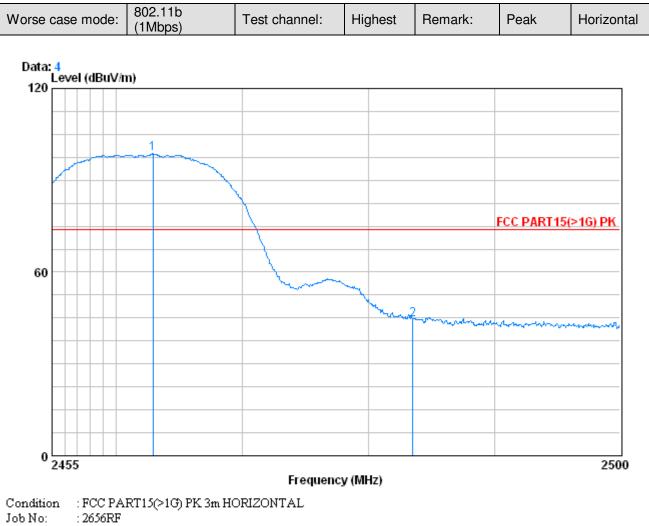


Mode: : 2462 B Bandedge

: Level=Read level+Cable loss+Antenna Fact

	Freq	Cablei	Antenna Factor	Preamp			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2462.950 2483.500		32.64 32.67					



Report No.: SZEM140500265601 Page: 91 of 116

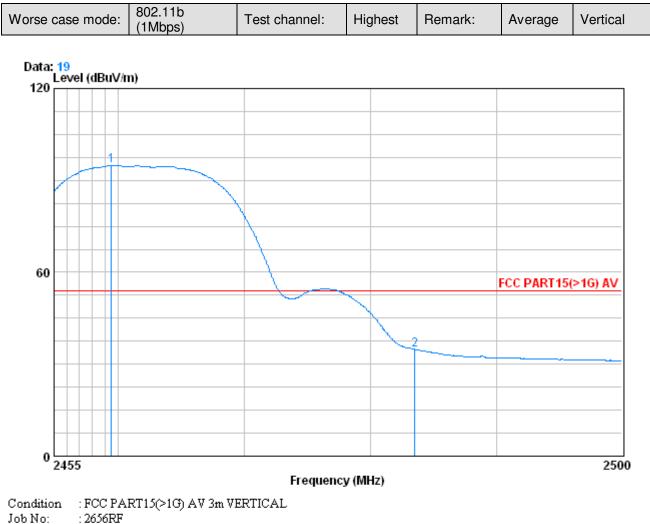


Mode: : 2462 B Bandedge

Level=Read level+Cable loss+Antenna Fact

: Level=Read level+Cable loss+Antenna Pact										
				Cablei	Antenna	Preamp	Read		Limit	Over
			Freq	Loss	Factor	Factor	Level	Level	Line	Limit
			MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	1	0	2459.500	3.02	32.64	39.91	99.08	94.84	54.00	40.84
	2		2483.500	3.03	32.67	39.92	39.03	34.81	54.00	-19.19




Report No.: SZEM140500265601 Page: 92 of 116

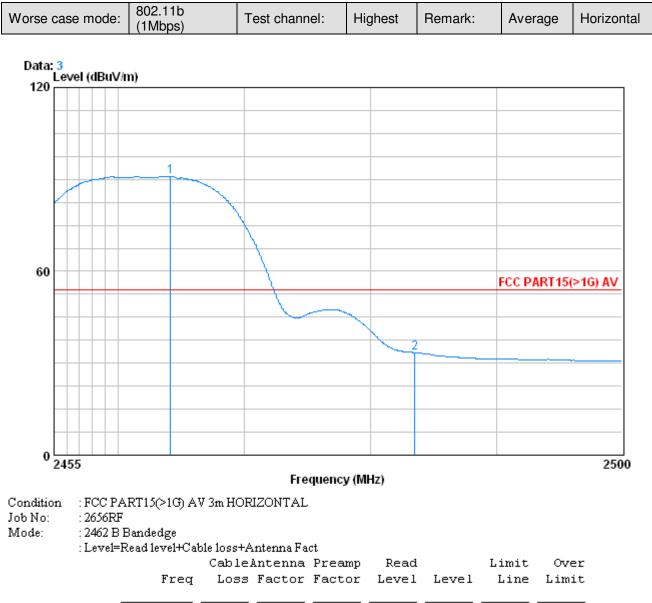

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2464.150 2483.500							




Report No.: SZEM140500265601 Page: 93 of 116

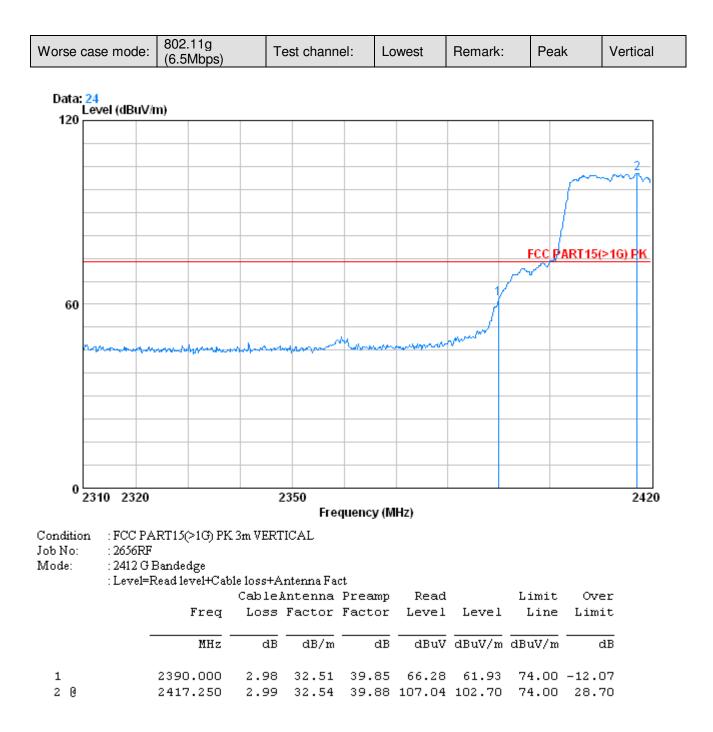




Report No.: SZEM140500265601 Page: 94 of 116

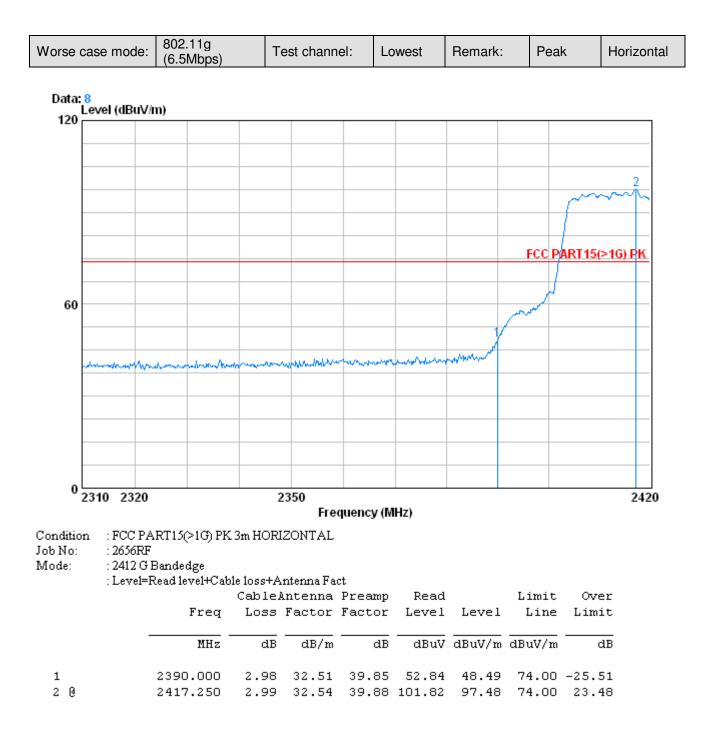




Report No.: SZEM140500265601 Page: 95 of 116

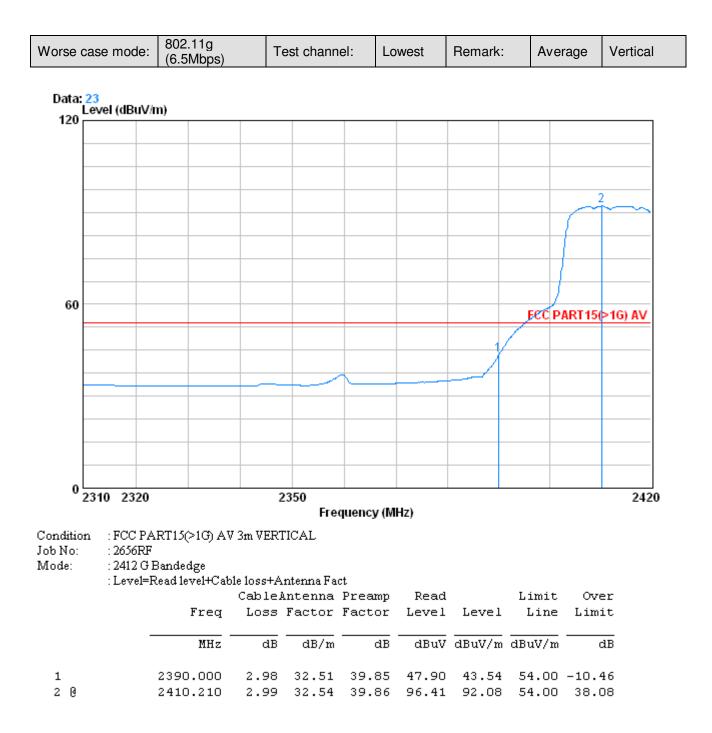




Report No.: SZEM140500265601 Page: 96 of 116

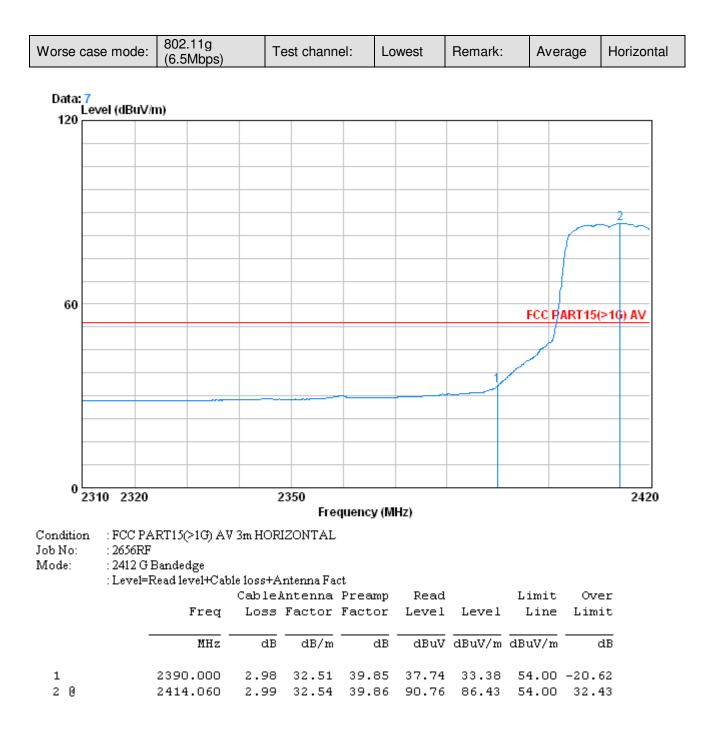



Report No.: SZEM140500265601 Page: 97 of 116

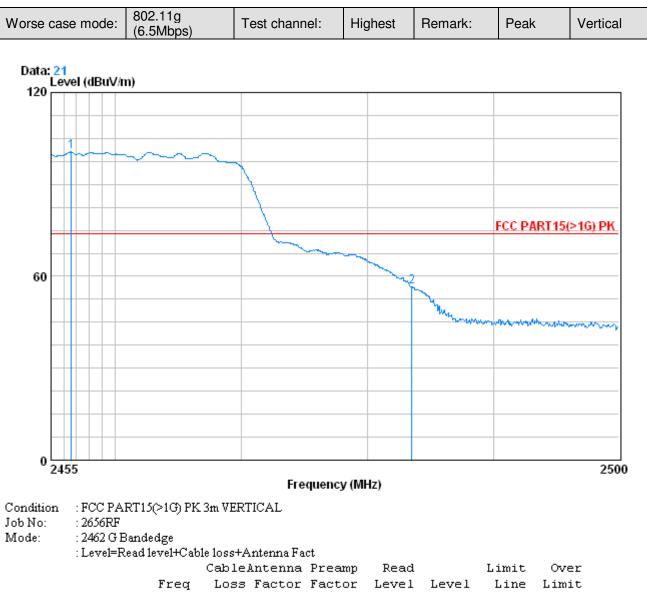


	rred	1022	ractor	ractor	PEAGT	PEAGT	LINE	LIMIC
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2456.575 2483.500							






Report No.: SZEM140500265601 Page: 98 of 116

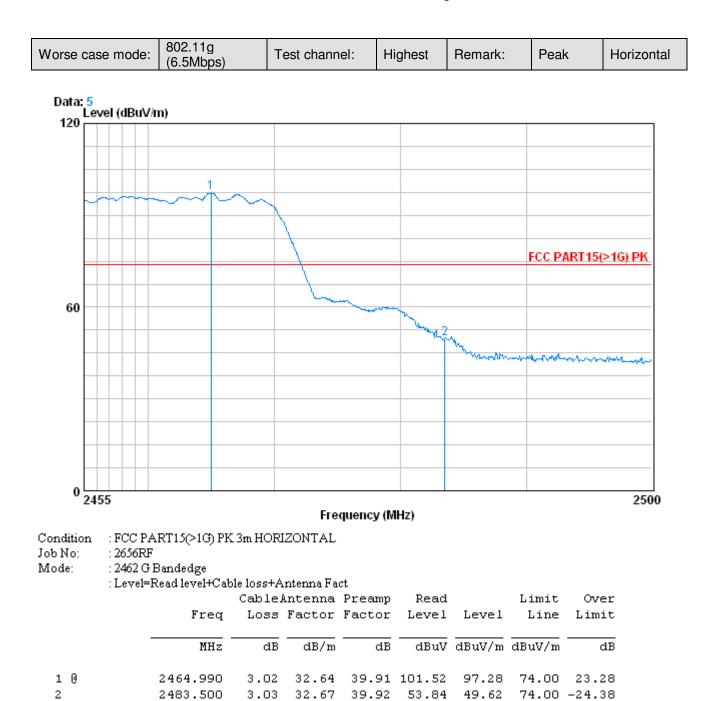



Report No.: SZEM140500265601 Page: 99 of 116

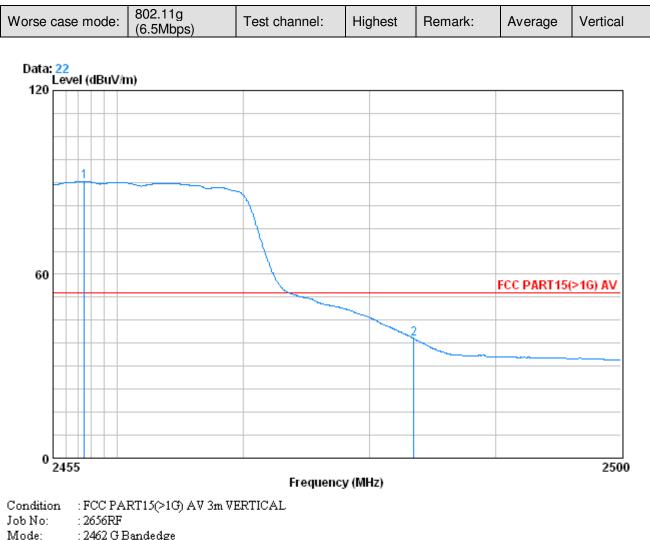

: 2462 G Bandedge

: Level=Read level+Cable loss+Antenna Fact

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2457.475 2483.500			39.91 39.92				




2

2483.500

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140500265601 Page: 100 of 116

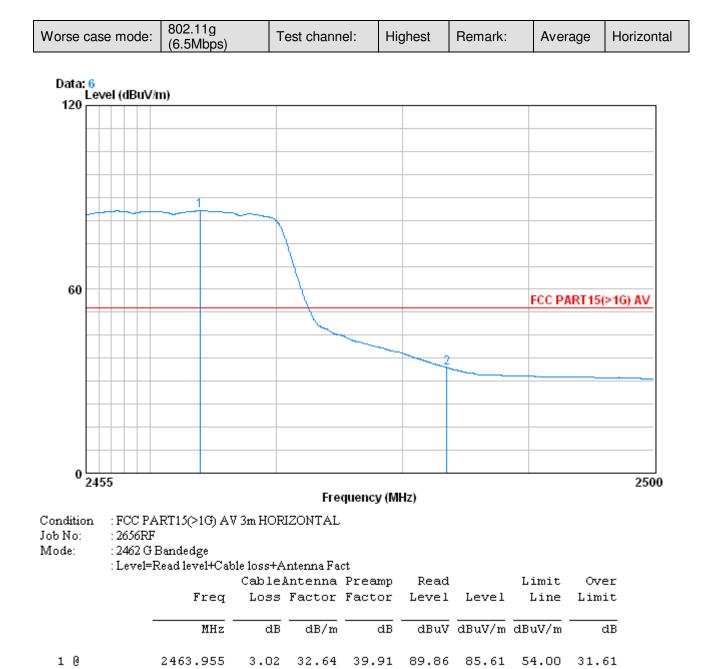


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

3.03 32.67 39.92 38.67 34.45 54.00 -19.55



Report No.: SZEM140500265601 Page: 101 of 116

Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------------	---------------	--------	---------	------	----------

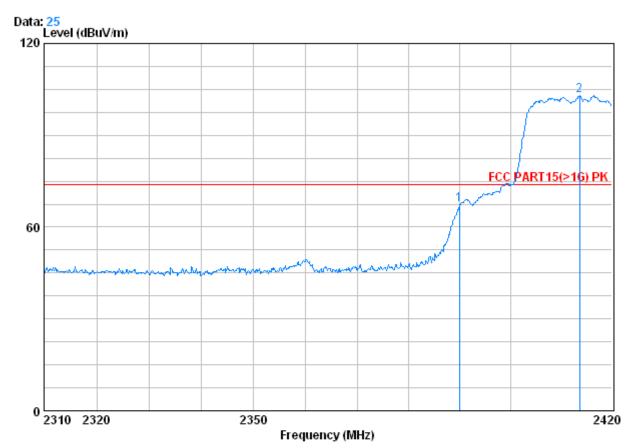

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No: : 2656RF

Mode: : 2412 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	-	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2413.620						74.00 74.00	-6.68 28.85



Report No.: SZEM140500265601 Page: 102 of 116

Worse case mode: 802.11n(HT2	)) Test channel:	Lowest	Remark:	Peak	Horizontal
------------------------------	------------------	--------	---------	------	------------

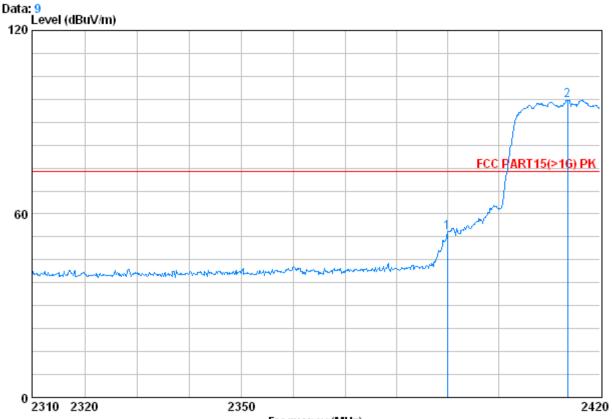

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No: : 2656RF

```
Mode: : 2412 N20 Bandedge
```


: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2413.620			39.85 39.86				



Report No.: SZEM140500265601 Page: 103 of 116

Worse case mode: 802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Vertical
--------------------------------	---------------	--------	---------	---------	----------

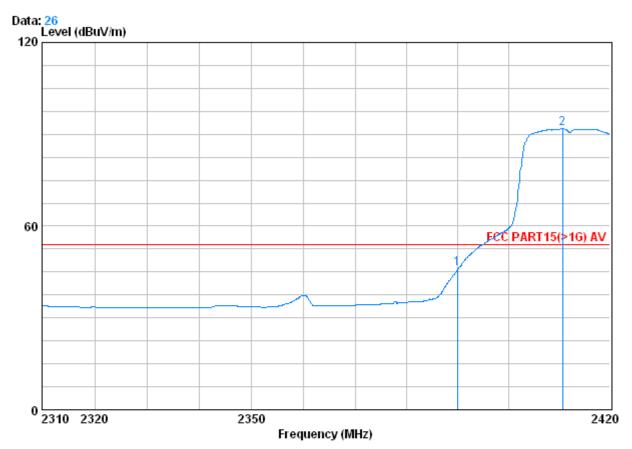

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No: : 2656RF

Mode: : 2412 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq	Cable	Antenna		Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 20	2390.000 2410.650			39.85 39.86				-8.00 37.78



Report No.: SZEM140500265601 Page: 104 of 116

Worse case mode: 802.11n(HT2	) Test channel:	Lowest	Remark:	Average	Horizontal
------------------------------	-----------------	--------	---------	---------	------------

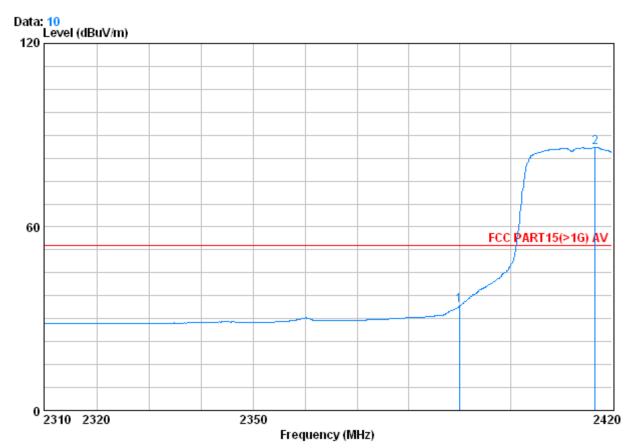

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No: : 2656RF

```
Mode: : 2412 N20 Bandedge
```


: Level=Read level+Cable loss+Antenna Fact

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2416.700			39.85 39.88				



Report No.: SZEM140500265601 Page: 105 of 116

Worse case mode: 802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Vertical
--------------------------------	---------------	---------	---------	------	----------

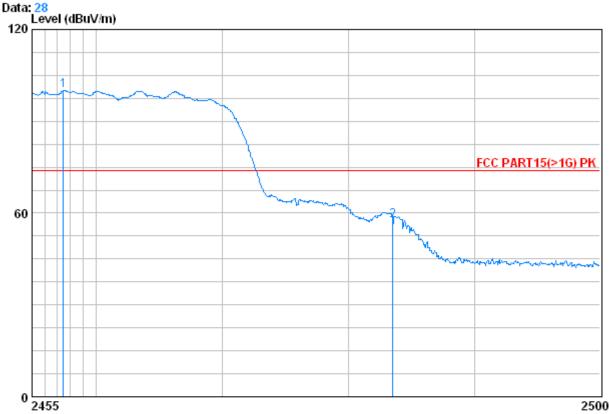

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No: : 2656RF

Mode: : 2462 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2457.475 2483.500			39.91 39.92				



Report No.: SZEM140500265601 Page: 106 of 116

Worse case mode: 802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Horizontal
--------------------------------	---------------	---------	---------	------	------------

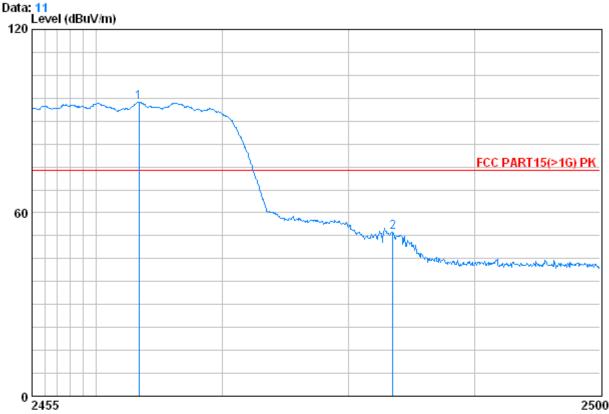

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No: : 2656RF

Mode: : 2462 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	-		Limit Line	Over Limit
	MHz	dB			dBuV	 	
10 2	2463.415 2483.500		32.64 32.67				



Report No.: SZEM140500265601 Page: 107 of 116

Worse case mode: 802.11n(HT20)	Test channel:	Highest	Remark:	Average	Vertical
--------------------------------	---------------	---------	---------	---------	----------

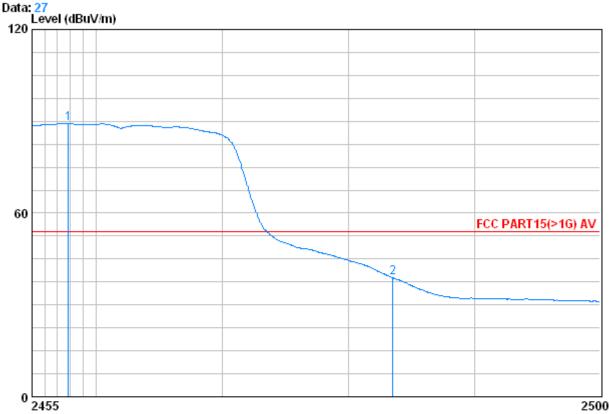

Frequency (MHz)

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No: : 2656RF

Mode: : 2462 N20 Bandedge

: Level=Read level+Cable loss+Antenna Fact


		Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	0	2457.835 2483.500			39.91 39.92				





Report No.: SZEM140500265601 Page: 108 of 116

Worse case mode: 802.11n(HT20)	Test channel:	Highest	Remark:	Average	Horizontal
--------------------------------	---------------	---------	---------	---------	------------

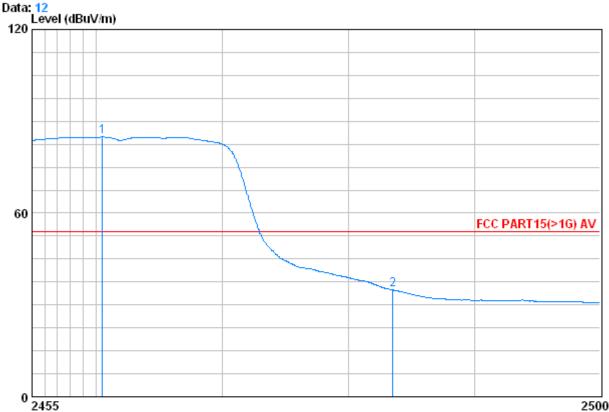

#### Frequency (MHz)

Job No: : 2656RF

Mode: : 2462 N20 Bandedge

: Level=Read level+Cable loss+Antenna Fact


	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2460.535 2483.485			39.91 39.92				

Condition : FCC PART15(>1G) AV 3m HORIZONTAL



Report No.: SZEM140500265601 Page: 109 of 116

Worse case mode: 802.11n(HT	0) Test channel:	est channel: Low	est Remark:	Peak	Vertical
-----------------------------	------------------	------------------	-------------	------	----------

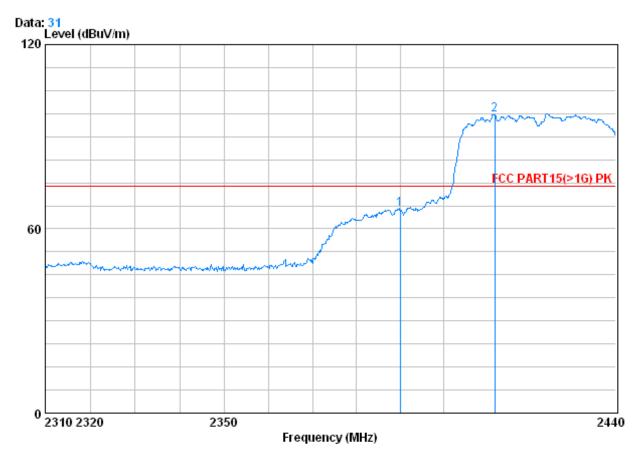

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No: : 2656RF

Mode: : 2422 N40 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	-	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2411.790						74.00 74.00	



Report No.: SZEM140500265601 Page: 110 of 116

Worse case mode: 8	802.11n (HT40)	Test channel:	Lowest	Remark:	Peak	Horizontal
--------------------	----------------	---------------	--------	---------	------	------------

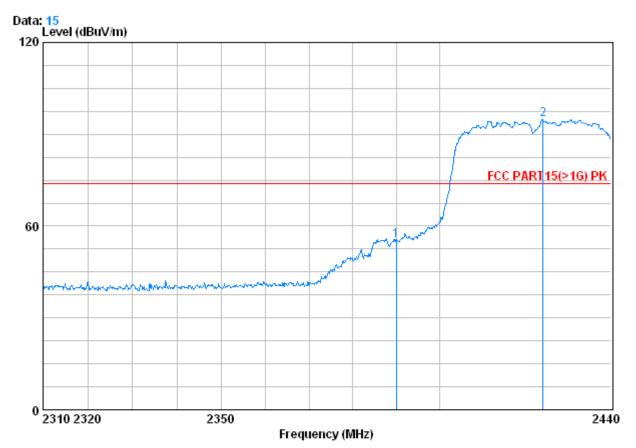

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No: : 2656RF

Mode: : 2422 N40 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2424.140			39.85 39.88				



Report No.: SZEM140500265601 Page: 111 of 116

Worse case mode:	802.11n (HT40)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	----------------	---------------	--------	---------	---------	----------

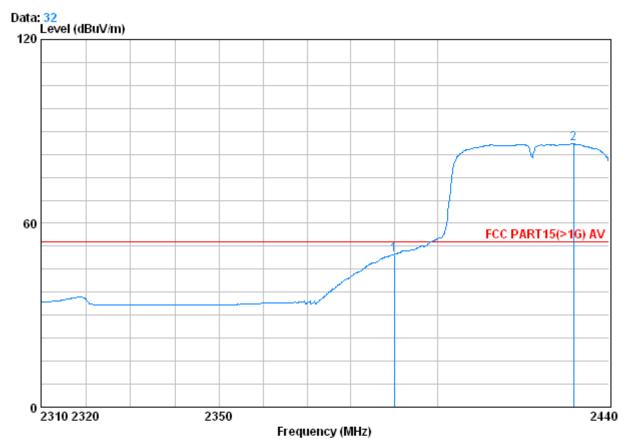

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No: : 2656RF

Mode: : 2462 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @	2390.000 2431.680			39.85 39.88				



Report No.: SZEM140500265601 Page: 112 of 116

Worse case mode: 80	302.11n (HT40)	Test channel:	Lowest	Remark:	Average	Horizontal
---------------------	----------------	---------------	--------	---------	---------	------------

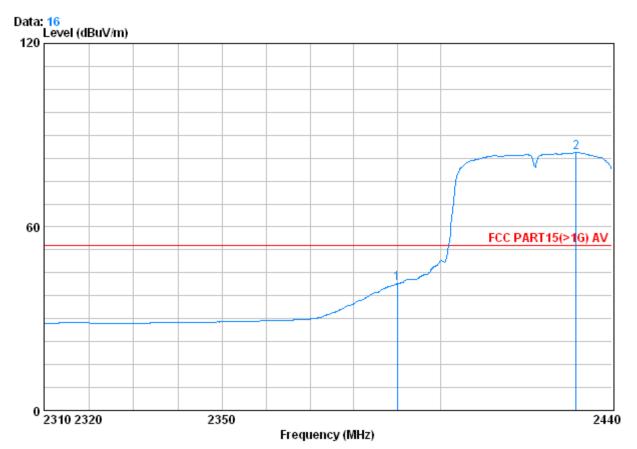

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No: : 2656RF

Mode: : 2422 N40 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq	CableAntenna Preamp Loss Factor Factor		Read Level Level		Limit Line	Over Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2431.550			39.85 39.88				



Report No.: SZEM140500265601 Page: 113 of 116

Worse case mode: 802.11	n (HT40) Test channel:	Highest	Remark:	Peak	Vertical
-------------------------	------------------------	---------	---------	------	----------

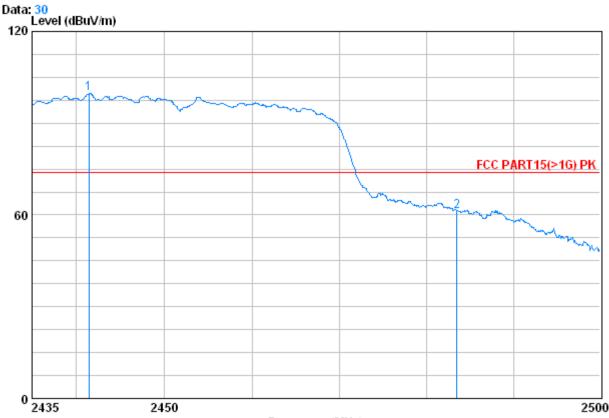

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No: : 2656RF

Mode: : 2462 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	_	CableAntenna l		-					
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
10	2441.435	3.01	32.61	39.89	103.98	99.70	74.00	25.70	
2	2483.500	3.03	32.67	39.92	65.34	61.12	74.00	-12.88	



Report No.: SZEM140500265601 Page: 114 of 116

Worse case mode: 8	302.11n (HT40)	Test channel:	Highest	Remark:	Peak	Horizontal
--------------------	----------------	---------------	---------	---------	------	------------

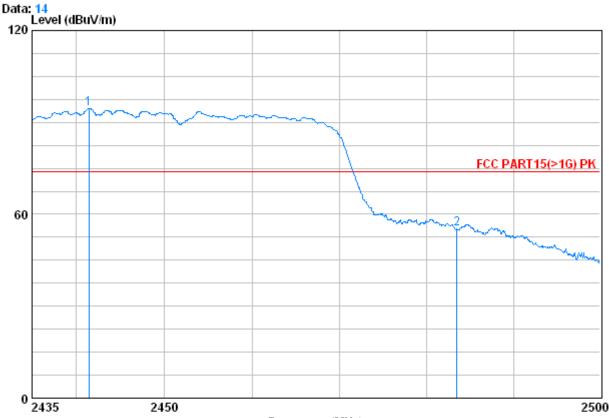

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No: : 2656RF

Mode: : 2452 N40 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq	CableAntenna Preamp Loss Factor Factor		-	Read Level Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2441.435 2483.500			39.89 39.92				



Report No.: SZEM140500265601 Page: 115 of 116

Worse case mode:	802.11n (HT40)	Test channel:	Highest	Remark:	Average	Vertical	
------------------	----------------	---------------	---------	---------	---------	----------	--

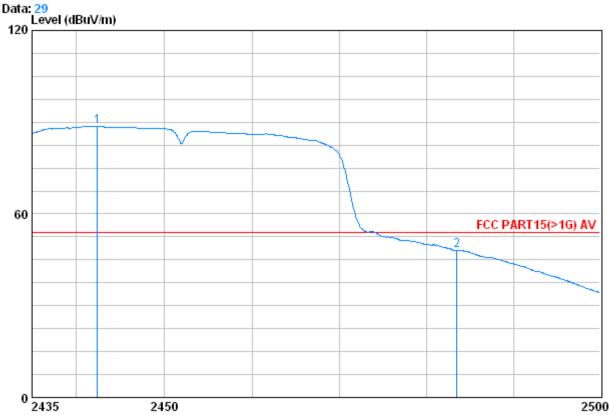

Frequency (MHz)

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No: : 2656RF

Mode: : 2452 N20 Bandedge


: Level=Read level+Cable loss+Antenna Fact

	Freq			-	reamp Read actor Level Lev			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2442.410 2483.500			39.89 39.92				



Report No.: SZEM140500265601 Page: 116 of 116

Worse case mode:	802.11n (HT40)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	----------------	---------------	---------	---------	---------	------------

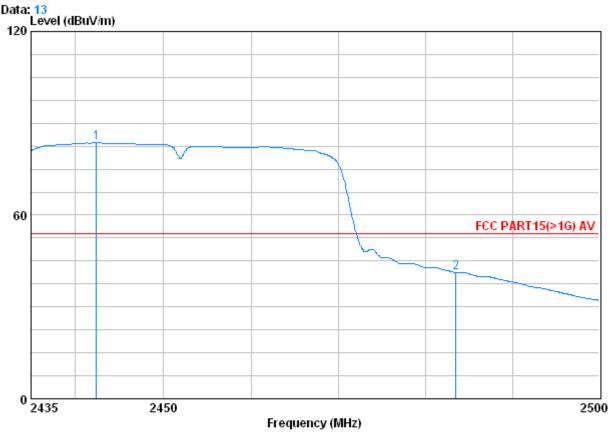

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No: 2656RF

Mode: : 2452 N40 Bandedge

: Level=Read level+Cable loss+Antenna Fact

		. 20101	CableAntenna Preamp				Read		Limit	Over
			Freq	Loss	Factor	Factor	Level	Level	Line	Limit
			MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	-		2442.410 2483.500			39.89 39.92				

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor