

RADIO TEST REPORT

FCC ID: 2AAU7-ZT2

Product : Zipatile2 / Alloy Fusion

Trade Mark : Zipatile

Model Name : af2c,zf2+,zf2.gbs.zweu.ule,zf2.hbs.zwus.ule

Family Model : See page 2

Report No. : S19100904804001

Prepared for

Tri plus grupa d.o.o.

Banjavčičeva 11, 10000 Zagreb, Croatia

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Tri plus grupa d.o.o.

Address : Banjavčičeva 11, 10000 Zagreb, Croatia

Manufacturer's Name : Tri plus grupa d.o.o.

Address : Banjavčičeva 11, 10000 Zagreb, Croatia

Product description

Product name..... : Zipatile2 / Alloy Fusion

Model and/or type reference : af2c,zt2+,zt2.gbs.zweu.ule,zt2.hbs.zwus.ule

Family Model af2c.gbs.zwus.ule, af2c.hwg.zwus.ule, af2c.hws.zwus.ule
 zt2+.gbg.zwau.ule, zt2+.gbs.zwkr.ule,zt2+.gbs.zwus.ule,
 zt2+.gwg.zwau.ule,zt2+.gws.zweu.ule,zt2+.gws.zwkr.ule,
 zt2+.hbg.zwau.ule,zt2+.hbg.zwkr.ule,zt2+.hbs.zweu.ule,
 zt2+.hwg.zwau.ule,zt2+.hwg.zwkr.ule,zt2+.hwg.zwus.ule,
 zt2+.hws.zweu.ule,zt2+.hws.zwus.ule

Rating(s)..... : AC 100-240V, 50/60Hz, 0.35A

Standards : FCC Part15.249

Test procedure..... ANSI C63.10-2013

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests..... : 11 Oct. 2019 ~ 12 Mar. 2020

Date of Issue..... : 12 Mar. 2020

Test Result..... : **Pass**

Testing Engineer :

Allen Liu

(Allen liu)

Technical Manager :

Jason Chen

(Jason Chen)

Authorized Signatory :

Sam. Chen

(Sam Chen)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	13
3.1 STANDARD REQUIREMENT	13
3.2 EUT ANTENNA	13
3.3 CONDUCTED EMISSION MEASUREMENT	14
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.3.2 TEST PROCEDURE	15
3.3.3 DEVIATION FROM TEST STANDARD	15
3.3.4 TEST SETUP	15
3.2.5 TEST RESULT	16
3.4 RADIATED EMISSION MEASUREMENT	18
3.4.1 RADIATED EMISSION LIMITS	18
3.4.2 TEST PROCEDURE	19
3.4.3 DEVIATION FROM TEST STANDARD	19
3.4.4 TEST RESULTS (BELOW 30MHZ)	21
3.4.5 TEST RESULTS (BELOW 1000 MHZ)	22
3.4.6 TEST RESULTS (ABOVE 1000 MHZ)	26
3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	30
4 . FREQUENCY TOLERANCE	34
4.1 FREQUENCY TOLERANCE LIMITS	34
4.2TEST PROCEDURE	34
4.3 TEST SETUP	34
4.4 TEST RESULTS	34
5. BANDWIDTH TEST	35
5.1 TEST PROCEDURE	35
5.1 DEVIATION FROM STANDARD	35
5.1 TEST SETUP	35
6. TEST RESULTS	36

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.249)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249 15.209	Radiated Spurious Emission	Pass	
15.249(2)	Frequency Tolerance	Pass	
15.249(a)	Fundamental Measurement	Pass	
15.205	Band Edge Emission	Pass	
15.215	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Zipatile2 / Alloy Fusion	
Trade Mark	Zipatile	
Model Name	af2c,zt2+,zt2.gbs.zweu.ule,zt2.hbs.zwus.ule	
Family Model	af2c.gbs.zwus.ule, af2c.hwg.zwus.ule, af2c.hws.zwus.ulezt2+.gbg.zwau.ule, zt2+.gbs.zwkr.ule,zt2+.gbs.zwus.ule, zt2+.gwg.zwau.ule,zt2+.gws.zweu.ule, zt2+.gws.zwkr.ule,zt2+.hbg.zwau.ule,zt2+.hbg.zwkr.ule,zt 2+.hbs.zweu.ule,zt2+.hwg.zwau.ule,zt2+.hwg.zwkr.ule,zt2 +.hwg.zwus.ule,zt2+.hws.zweu.ule,zt2+.hws.zwus.ule	
Model Difference	All models are the same circuit and RF module, except the model name, appearance and color.	
Product Description	The EUT is a Zipatile2 / Alloy Fusion	
	Operation Frequency:	902-928MHz
	Modulation Type:	FSK
	Antenna Designation:	PCB Antenna
	Antenna Gain(Peak)	2dBi
Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.		
Channel List	Please refer to the Note 2.	
Adapter	Model:KA23-0502DES	
	Input:AC 100-240V, 50/60Hz, 0.35A	
	Output:5V 2000mA	
Battery	3.7V 3500 mAh (12.95Wh)	
Hardware version	1.6	
Firmware version	393	
Software version	1.3.96	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency(MHz)
01	908.4
02	916

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	2	Antenna

Note:The device does not support simultaneous transmission

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH02
Mode 3	Normal link

For Radiated Spurious Emission	
Pretest Mode	Description
Mode 1	CH01
Mode 2	CH02


For Conducted Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH02
Mode 3	Normal link

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Mode

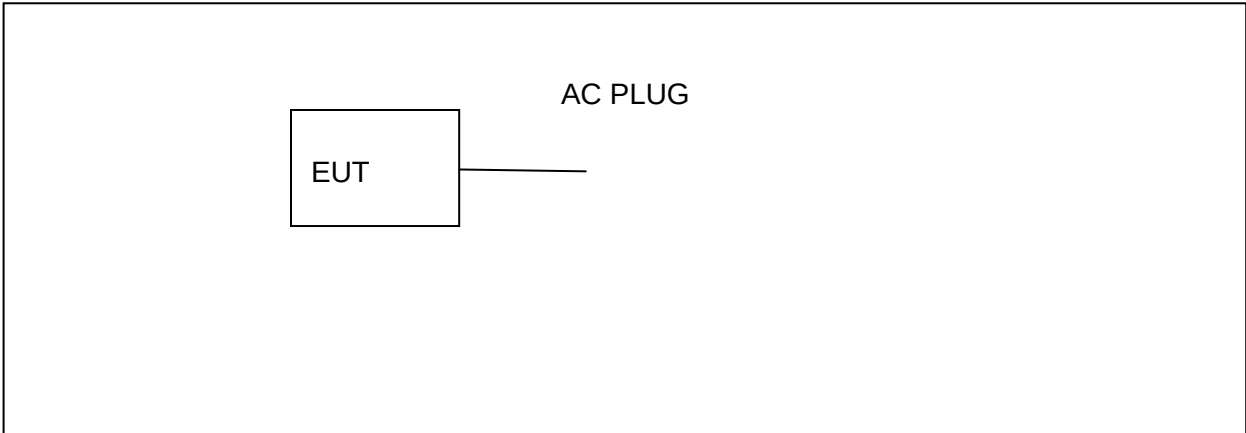

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2019.08.28	2020.08.27	1 year
4	Test Receiver	R&S	ESPI	101318	2019.05.13	2020.05.12	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2019.04.15	2020.04.14	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2018.05.19	2020.05.18	2 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2019.04.15	2020.04.14	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2018.12.11	2019.12.10	1 year
9	Amplifier	EMC	EMC051835SE	980246	2019.08.04	2020.08.03	1 year
10	Amplifier	MITEQ	TTA1840-35-HG	177156	2018.12.11	2019.12.10	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2019.08.04	2020.08.03	1 year
12	Power Meter	DARE	RPR3006W	15I00041SN084	2017.04.21	2020.04.20	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.19	2020.04.18	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the Multilayer Ceramic Chip board) When conducted test

And this temporary antenna connector is listed within the instrument list

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2019.05.13	2020.05.12	1 year
2	LISN	R&S	ENV216	101313	2019.04.15	2020.04.14	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2019.05.13	2020.05.12	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2018.05.19	2020.05.18	2 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is permanent attached PCB Antenna (Gain: 2dBi). It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

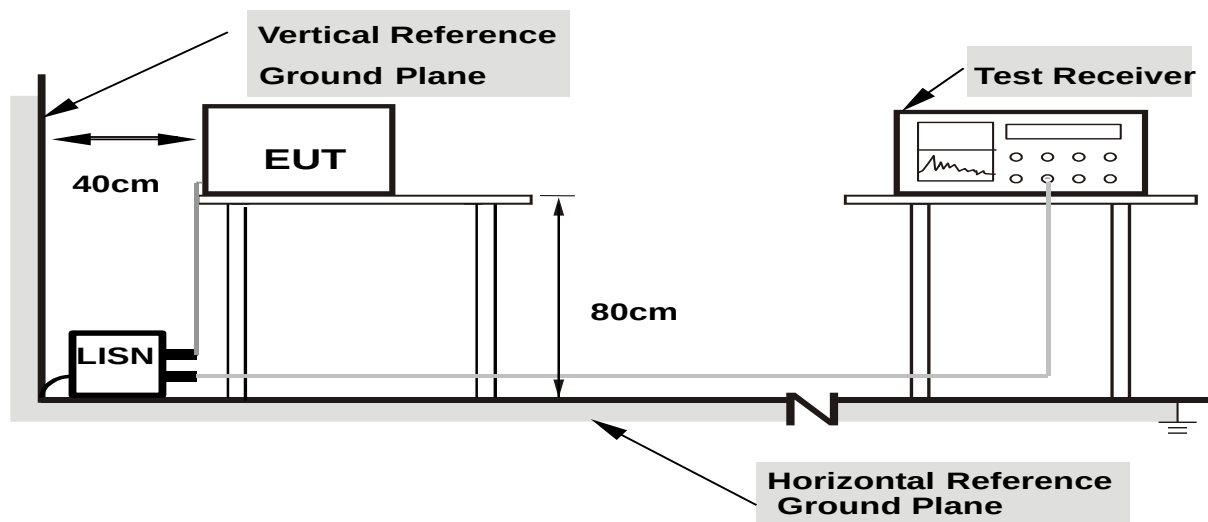

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.2.5 TEST RESULT

EUT :	Zipatile2 / Alloy Fusion	Model Name. :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1739	47.31	9.76	57.07	64.77	-7.70	QP
0.1739	37.57	9.76	47.33	54.77	-7.44	AVG
0.2620	43.39	9.76	53.15	61.36	-8.21	QP
0.2620	33.49	9.76	43.25	51.36	-8.11	AVG
0.4699	40.79	9.74	50.53	56.52	-5.99	QP
0.4699	30.28	9.74	40.02	46.52	-6.50	AVG
0.8579	39.73	9.74	49.47	56.00	-6.53	QP
0.8579	30.41	9.74	40.15	46.00	-5.85	AVG
18.2419	41.56	10.17	51.73	60.00	-8.27	QP
18.2419	31.06	10.17	41.23	50.00	-8.77	AVG
23.1299	41.41	10.53	51.94	60.00	-8.06	QP
23.1299	30.05	10.53	40.58	50.00	-9.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

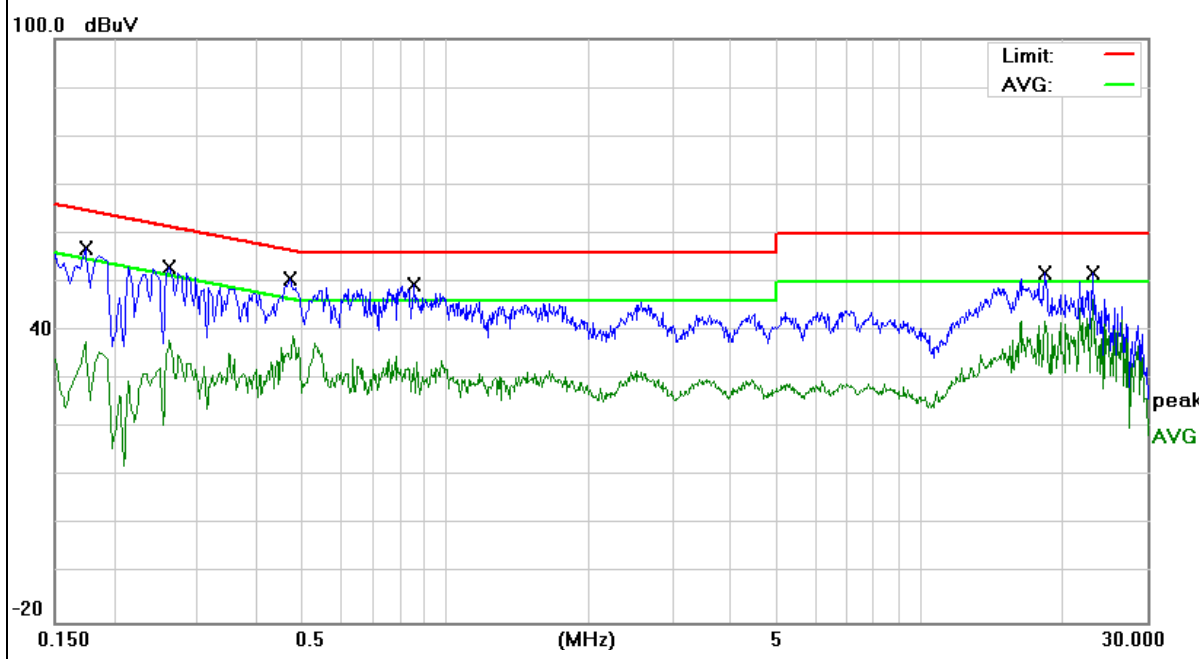


EUT :	Zipatile2 / Alloy Fusion	Model Name. :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	48.67	9.74	58.41	65.99	-7.58	QP
0.1500	28.61	9.74	38.35	55.99	-17.64	AVG
0.1900	43.43	9.73	53.16	64.03	-10.87	QP
0.1900	33.52	9.73	43.25	54.03	-10.78	AVG
0.4860	39.27	9.75	49.02	56.24	-7.22	QP
0.4860	29.70	9.75	39.45	46.24	-6.79	AVG
0.5460	39.53	9.75	49.28	56.00	-6.72	QP
0.5460	25.42	9.75	35.17	46.00	-10.83	AVG
0.9460	37.83	9.75	47.58	56.00	-8.42	QP
0.9460	27.40	9.75	37.15	46.00	-8.85	AVG
18.2420	43.39	10.16	53.55	60.00	-6.45	QP
18.242	33.67	10.16	43.83	50.00	-6.17	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

100.0 dBμV

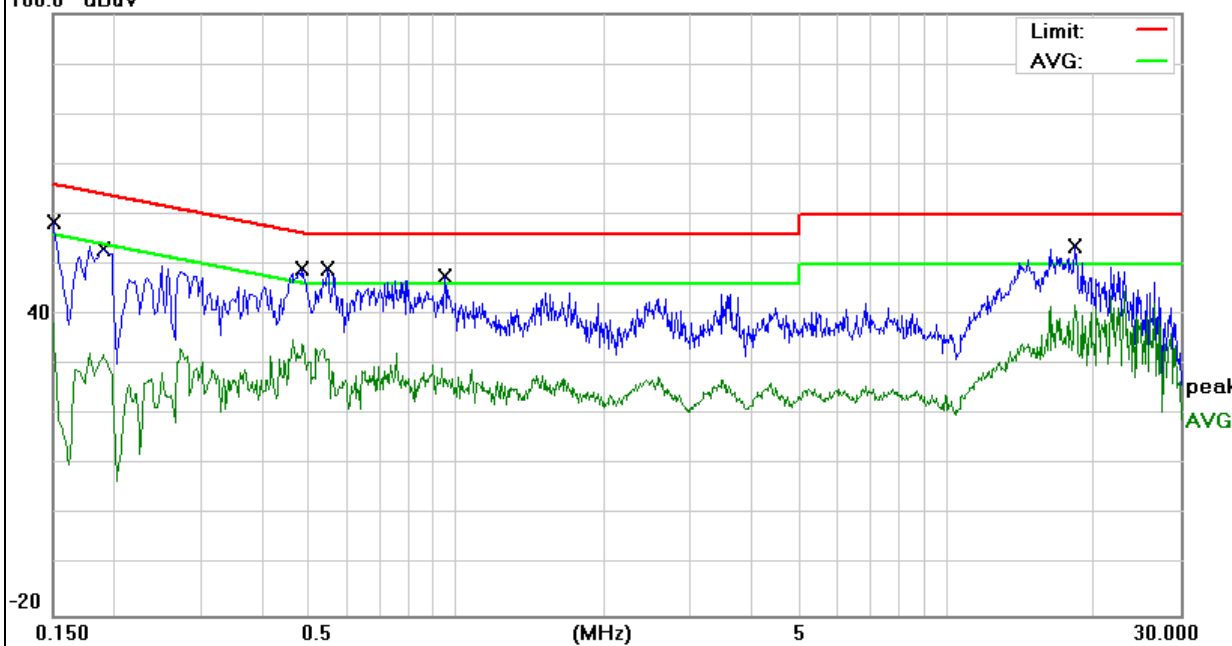

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
Frequency (MHz)	Limit (dBuV)	
30~88	40	3
88~216	43.5	3
216~960	46	3
960 -10000	54.00	3
902-928	94	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) *Note: This is the limit for the fundamental frequency.

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
902-928	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.4.3 DEVIATION FROM TEST STANDARD

No deviation


(A) Radiated Emission Test-Up Frequency Below 30MHz

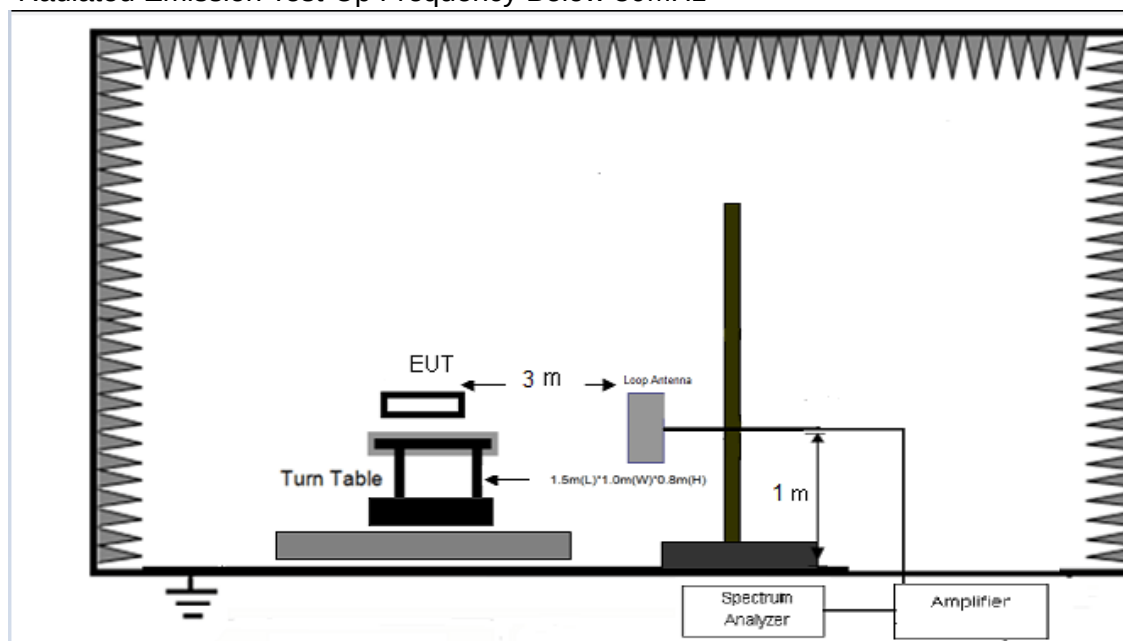

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

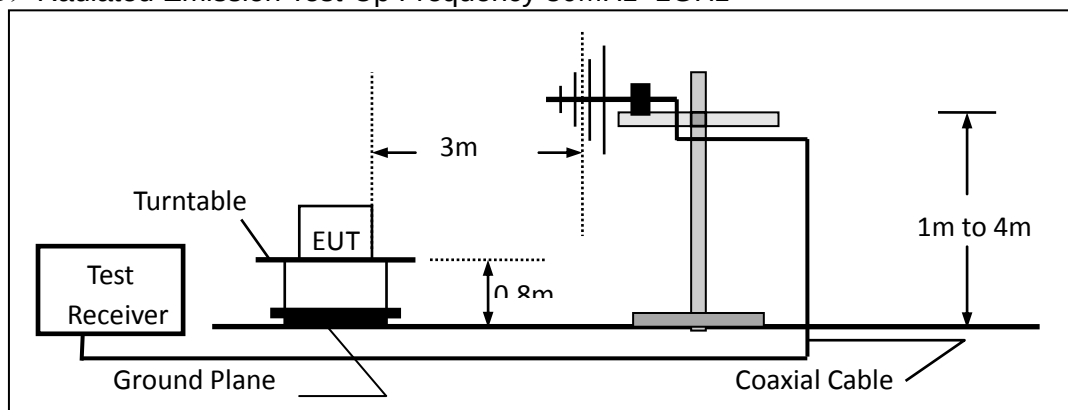

(C) Radiated Emission Test-Up Frequency Above 1GHz

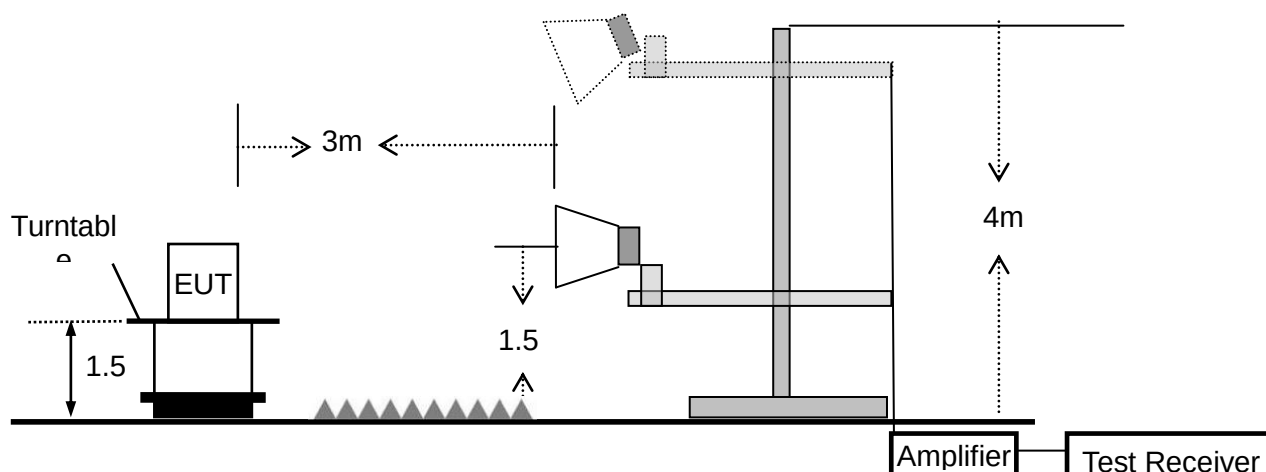

3.4.4 TEST RESULTS (BELOW 30MHz)

EUT :	Zipatile2 / Alloy Fusion	Model Name. :	af2c,zt2+,zt2.gbs.zweu .ule,zt2.hbs.zwus.ule
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.4.5 TEST RESULTS (BELOW 1000 MHz)

EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zf2+,zf2.gbs.zweu.ule zf2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
31.1798	6.75	18.48	25.23	40.00	-14.77	QP
56.7916	12.78	6.84	19.62	40.00	-20.38	QP
122.8340	11.10	13.26	24.36	43.50	-19.14	QP
233.3487	12.93	12.27	25.20	46.00	-20.80	QP
324.4560	9.80	16.63	26.43	46.00	-19.57	QP
909.6666	58.24	29.53	87.77	114.0	-26.23	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

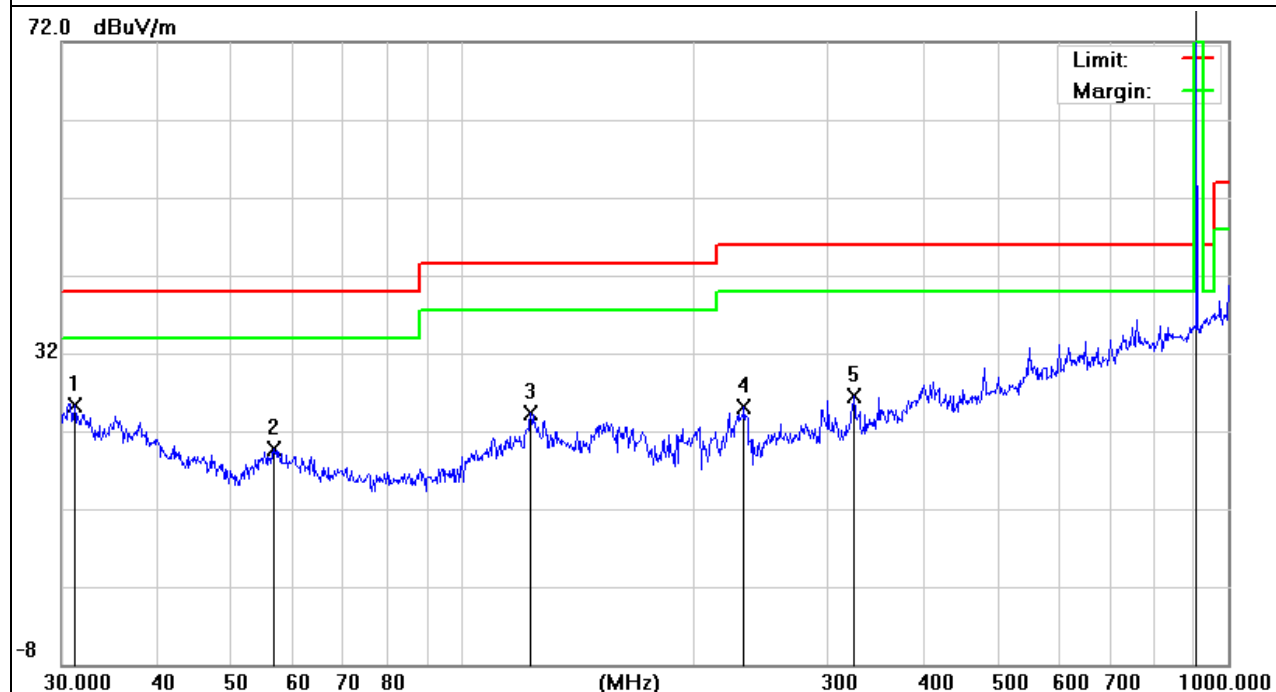


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
49.8813	10.57	9.34	19.91	40.00	-20.09	QP
141.8262	11.39	13.24	24.63	43.50	-18.87	QP
260.1444	12.76	16.35	29.11	46.00	-16.89	QP
400.4318	13.19	19.64	32.83	46.00	-13.17	QP
601.4265	10.72	23.95	34.67	46.00	-11.33	QP
909.6666	68.57	29.53	98.10	114.0	-15.90	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

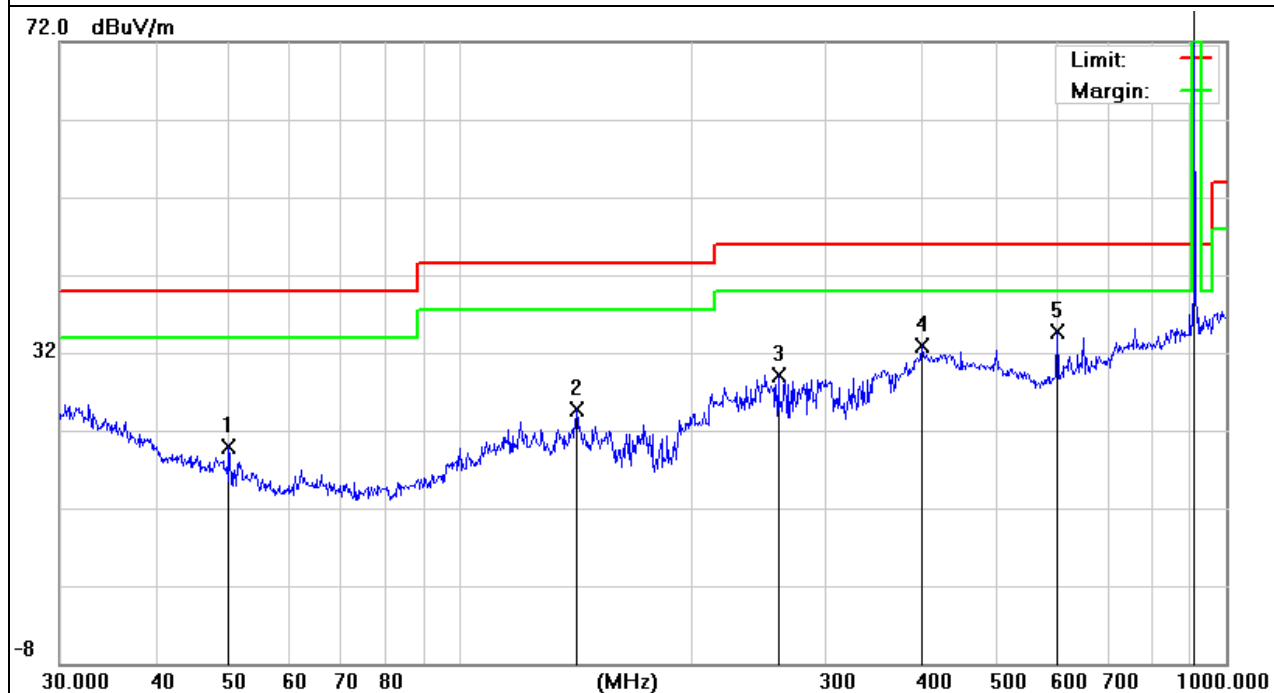


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
31.1798	9.29	18.48	27.77	40.00	-12.23	QP
59.0251	11.76	6.61	18.37	40.00	-21.63	QP
110.1816	10.56	12.32	22.88	43.50	-20.62	QP
201.3930	13.49	9.99	23.48	43.50	-20.02	QP
350.4768	9.40	17.62	27.02	46.00	-18.98	QP
916.0687	53.41	29.82	83.23	114.0	-30.77	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

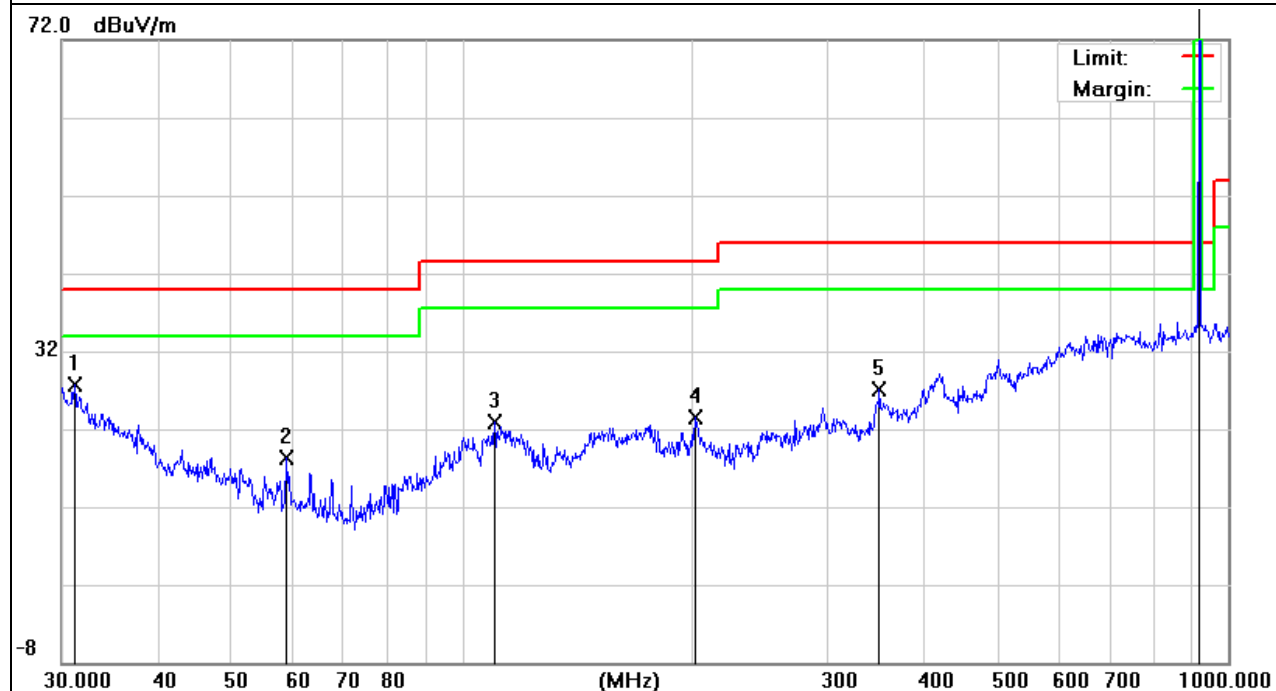


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
32.2924	7.47	18.04	25.51	40.00	-14.49	QP
119.4360	14.02	13.18	27.20	43.50	-16.30	QP
199.9856	16.21	9.76	25.97	43.50	-17.53	QP
250.3009	13.25	14.95	28.20	46.00	-17.80	QP
400.4318	14.86	19.64	34.50	46.00	-11.50	QP
916.0687	53.41	29.82	83.23	114.0	-30.77	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

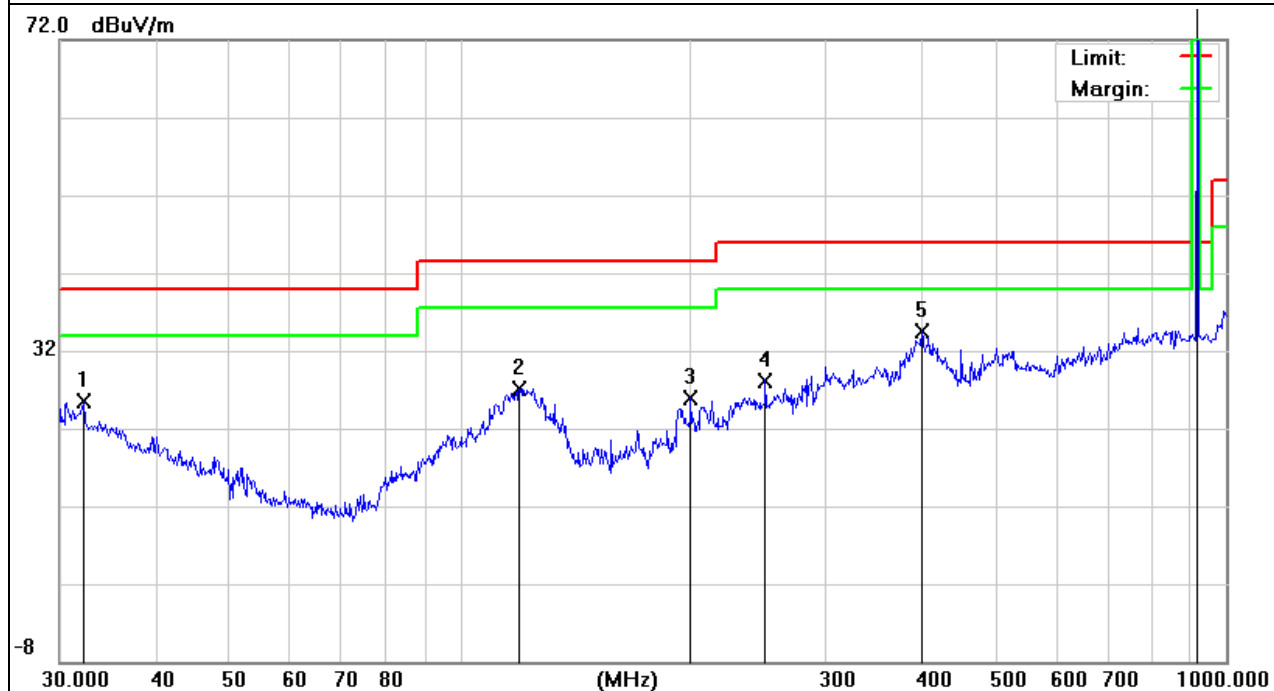

3.4.6 TEST RESULTS (ABOVE 1000 MHZ)


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
881.4497	6.00	28.36	34.36	46.00	-11.64	QP
902.0000	5.58	29.04	34.62	46.00	-11.38	QP
928	5.04	30.51	35.55	46.00	-10.45	QP
938.7848	3.99	30.85	34.84	46.00	-11.16	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz.

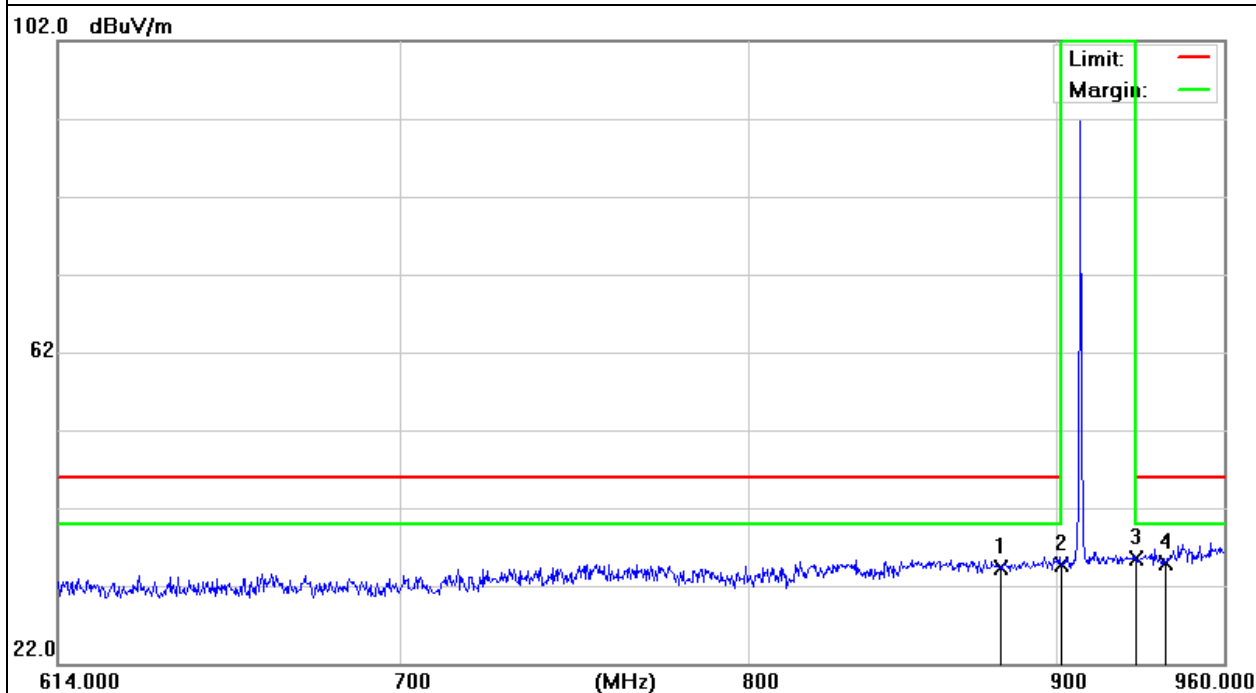


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
878.6964	6.67	28.39	35.06	46.00	-10.94	QP
902.0000	5.17	29.04	34.21	46.00	-11.79	QP
928.0000	5.15	30.51	35.66	46.00	-10.34	QP
937.527	5.66	30.82	36.48	46.00	-9.52	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz.

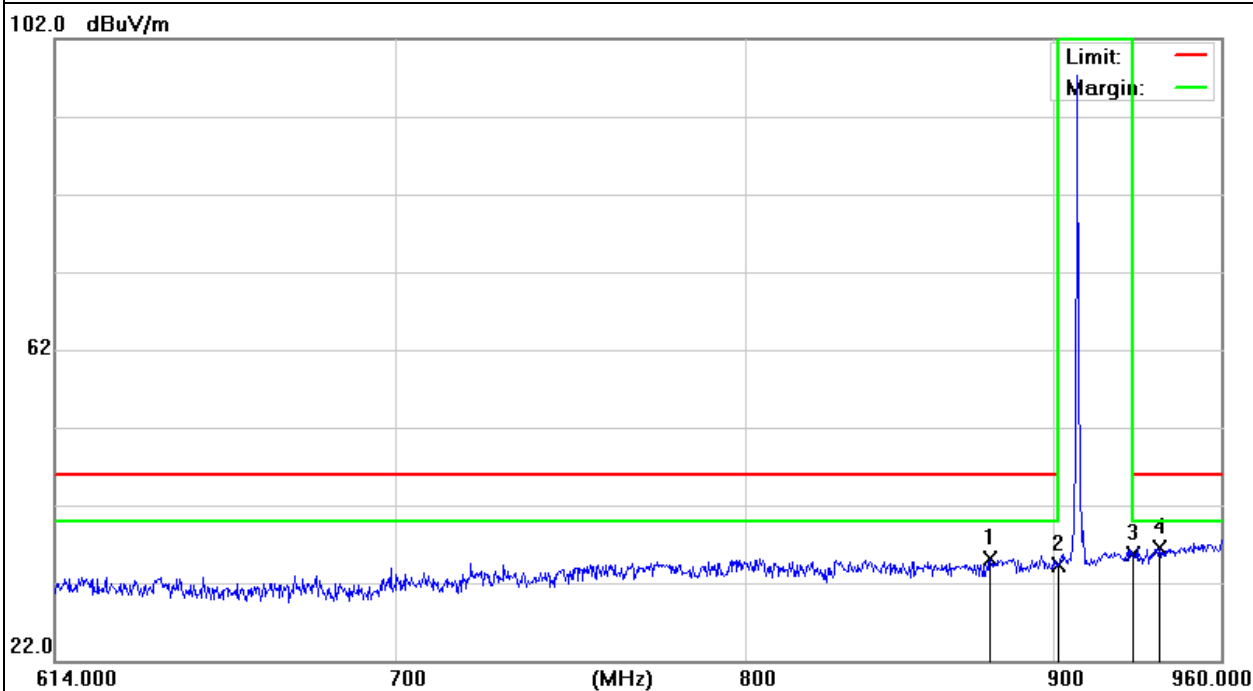

Note: EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
875.5602	6.55	28.47	35.02	46.00	-10.98	QP
902.0000	6.56	29.04	35.60	46.00	-10.40	QP
928.0000	5.67	30.51	36.18	46.00	-9.82	QP
949.3332	6.38	31.11	37.49	46.00	-8.51	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz.

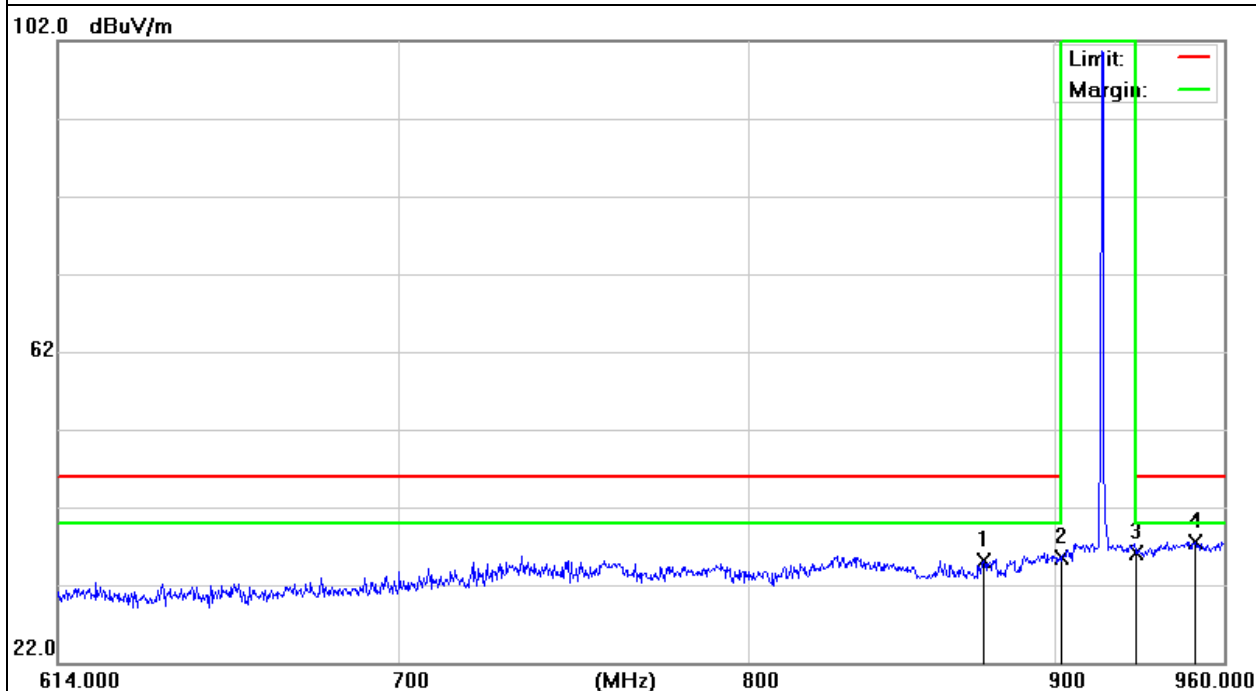


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
896.1471	7.44	28.75	36.19	46.00	-9.81	QP
902.0000	7.46	29.04	36.50	46.00	-9.50	QP
928.0000	5.59	30.51	36.10	46.00	-9.90	QP
945.0996	6.02	31.00	37.02	46.00	-8.98	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz.

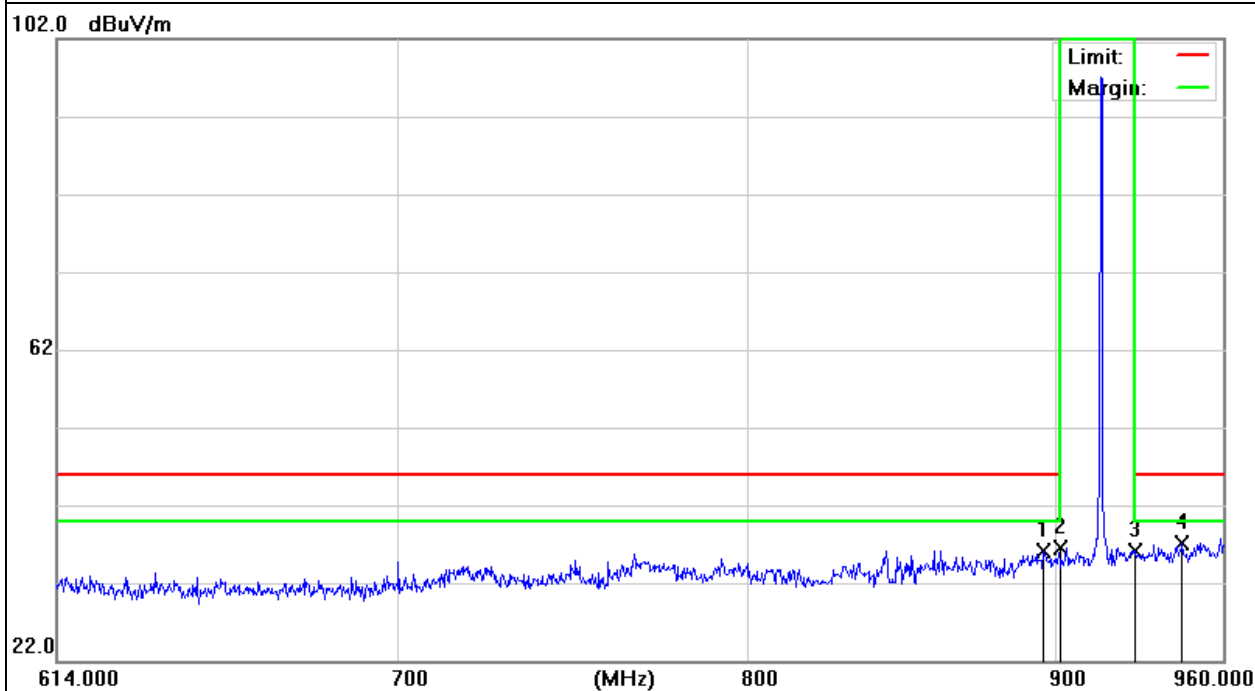

Note: EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).


3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zf2+,zf2.gbs.zweu.ule zf2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2956.155	43.28	-2.44	40.84	74.00	-33.16	peak
2956.155	32.46	-2.44	30.02	54.00	-23.98	AVG
3805.000	38.31	3.06	41.37	74.00	-32.63	peak
3805.000	28.09	3.06	31.15	54.00	-22.85	AVG
14685.00	-10.84	61.67	50.83	74.00	-23.17	peak
14685	-23.45	61.67	38.22	54.00	-15.78	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

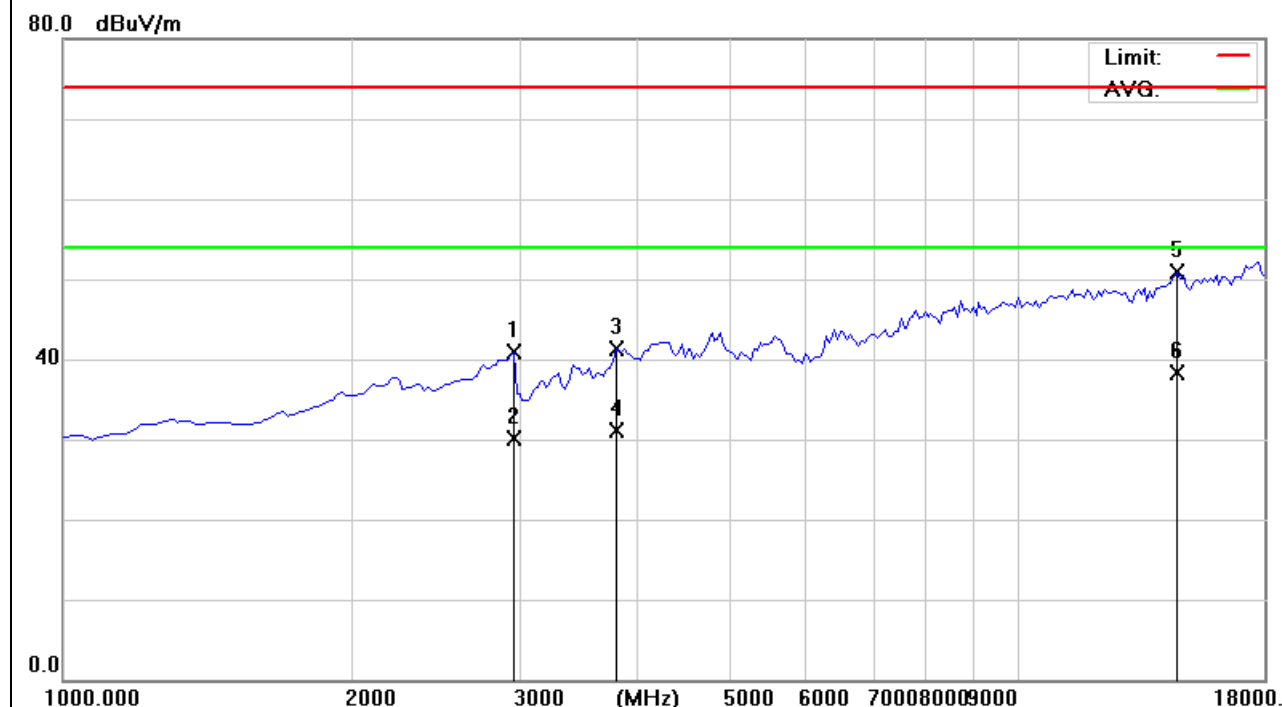


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2295.572	45.44	-4.34	41.10	74.00	-32.90	peak
2295.572	33.59	-4.34	29.25	54.00	-24.75	AVG
4151.659	37.15	3.68	40.83	74.00	-33.17	peak
4151.659	24.76	3.68	28.44	54.00	-25.56	AVG
5420.000	34.67	7.37	42.04	74.00	-31.96	peak
5420.000	20.32	7.37	27.69	54.00	-26.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

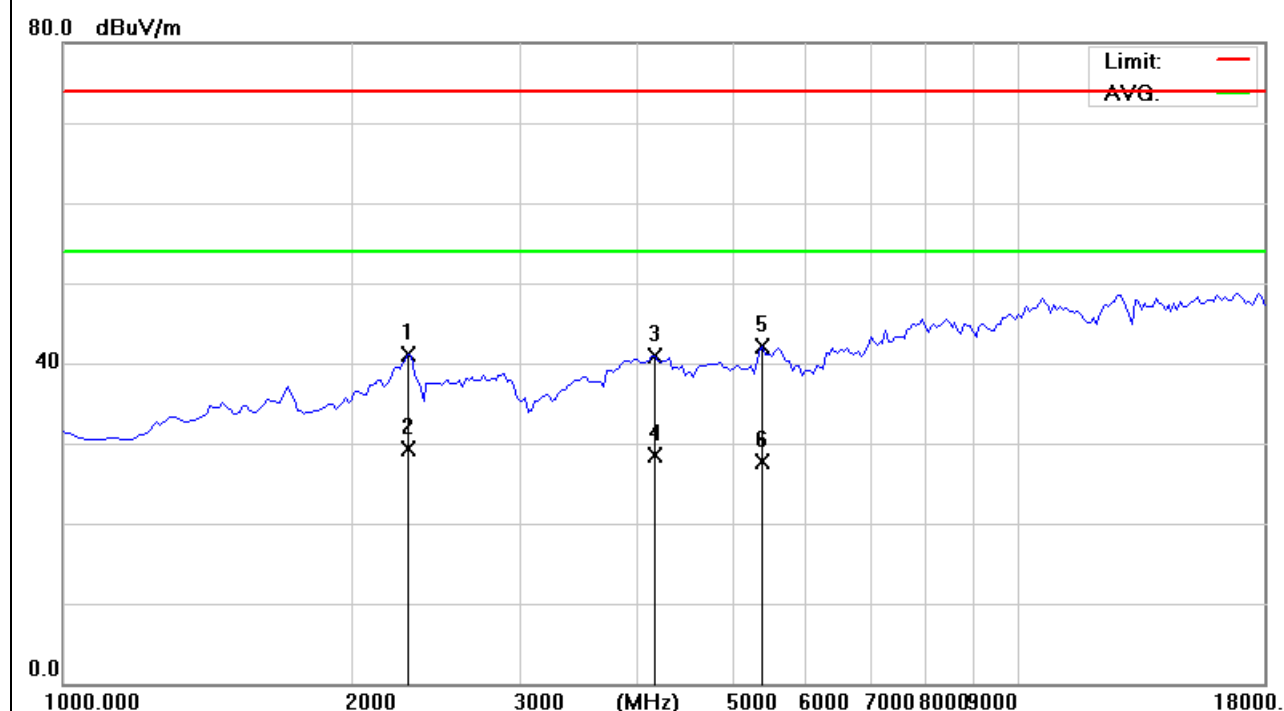


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2785.000	43.11	-2.80	40.31	74.00	-33.69	peak
2785	33.82	-2.80	31.02	54.00	-22.98	AVG
3890.000	37.12	3.82	40.94	74.00	-33.06	peak
3890.000	26.43	3.82	30.25	54.00	-23.75	AVG
5420.000	34.65	7.37	42.02	74.00	-31.98	peak
5420.000	22.11	7.37	29.48	54.00	-24.52	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

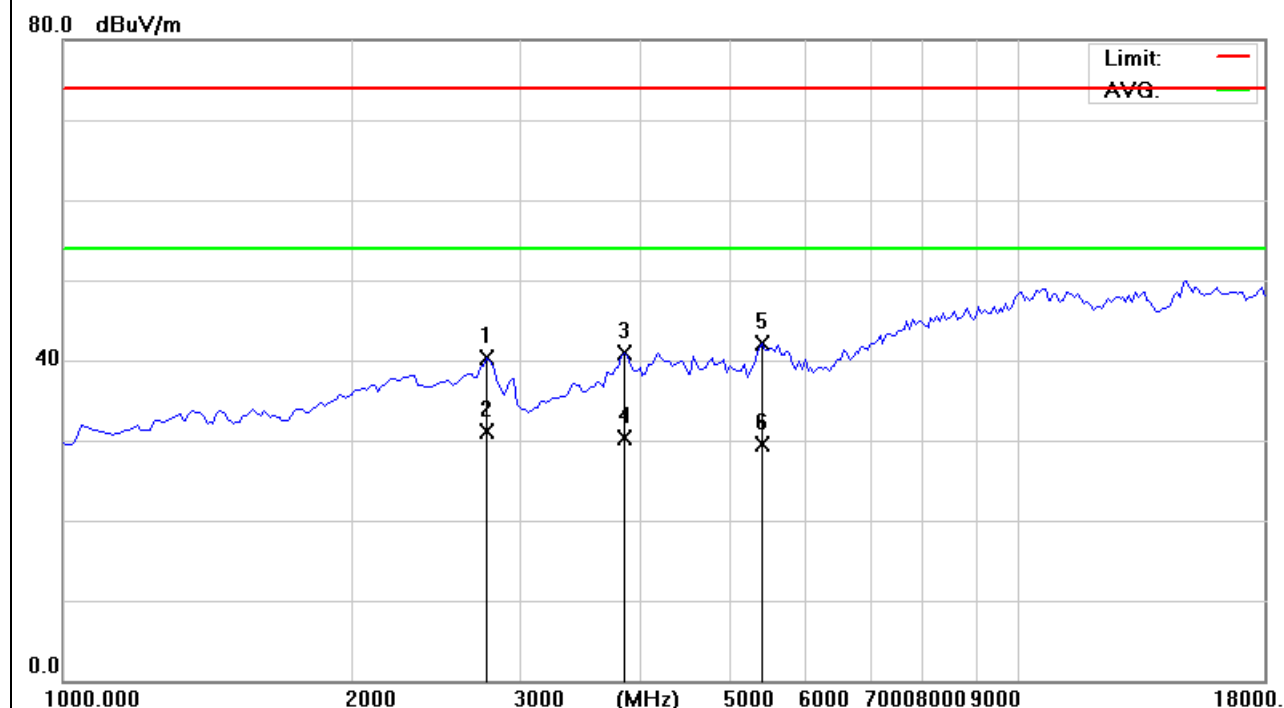


EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2956.155	44.16	-2.44	41.72	74.00	-32.28	peak
2956.155	31.02	-2.44	28.58	54.00	-25.42	AVG
3380.000	40.47	-0.41	40.06	74.00	-33.94	peak
3380	31.74	-0.41	31.33	54.00	-22.67	AVG
4230.000	38.62	3.60	42.22	74.00	-31.78	peak
4230.000	26.42	3.60	30.02	54.00	-23.98	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

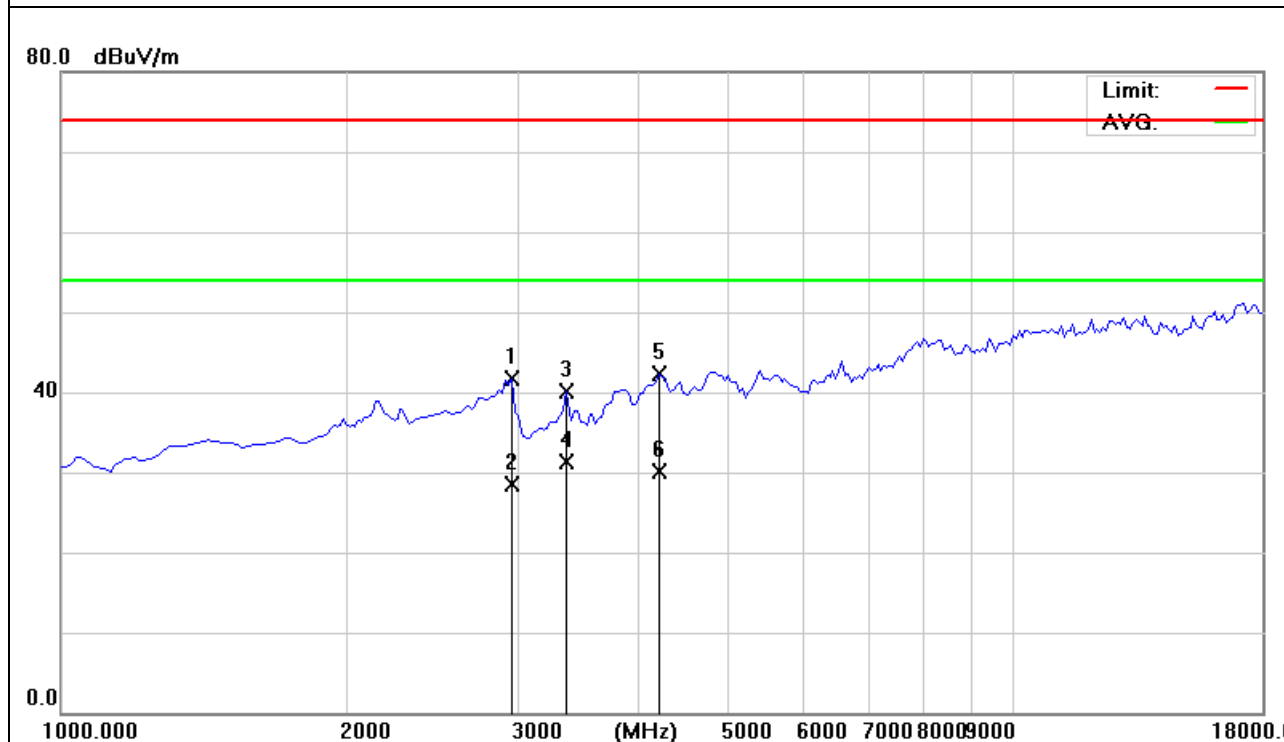

4. FREQUENCY TOLERANCE

4.1 FREQUENCY TOLERANCE LIMITS

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.001\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 10KHz, VBW $\geq$ RBW, Sweep time = Auto.

4.3 TEST SETUP



4.4 TEST RESULTS

EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	Mode 1		

Voltage (V)	Frequency(MHz)	Reading(MHz)	Frequency Tolerance	LIMIT
3.15	908.4	908.4078	0.000859%	$\pm 0.001\%$
3.7	908.4	908.4026	0.000286%	$\pm 0.001\%$
4.25	908.4	908.4032	0.000352%	$\pm 0.001\%$

Temperature (°C)	Frequency(MHz)	Reading(MHz)	Frequency Tolerance	LIMIT
-20	908.4	908.4015	0.000165%	$\pm 0.001\%$
-10	908.4	908.4012	0.000132%	$\pm 0.001\%$
0	908.4	908.4045	0.000495%	$\pm 0.001\%$
10	908.4	908.4032	0.000352%	$\pm 0.001\%$
20	908.4	908.4036	0.000396%	$\pm 0.001\%$
30	908.4	908.4041	0.000451%	$\pm 0.001\%$
40	908.4	908.4019	0.000209%	$\pm 0.001\%$
50	908.4	908.4023	0.000253%	$\pm 0.001\%$

EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule ,zt2.hbs.zwus.ule
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	Mode 2		

Voltage (V)	Frequency(MHz)	Reading(MHz)	Frequency Tolerance	LIMIT
3.15	916	916.005	0.000546%	±0.001%
3.7	916	916.009	0.000983%	±0.001%
4.25	916	916.001	0.000109%	±0.001%

Temperature (°C)	Frequency(MHz)	Reading(MHz)	Frequency Tolerance	LIMIT
-20	916	916.003	0.000328%	±0.001%
-10	916	916.002	0.000218%	±0.001%
0	916	916.005	0.000546%	±0.001%
10	916	916.008	0.000873%	±0.001%
20	916	916.006	0.000655%	±0.001%
30	916	916.003	0.000328%	±0.001%
40	916	916.004	0.000437%	±0.001%
50	916	916.007	0.000764%	±0.001%

5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value., Sweep time = Auto.

5.1 DEVIATION FROM STANDARD

No deviation.


5.1 TEST SETUP




6. TEST RESULTS

EUT :	Zipatile2 / Alloy Fusion	Model Name :	af2c,zt2+,zt2.gbs.zweu.ule zt2.hbs.zwus.ule
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	Mode 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)
CH01	908.4	0.095
CH02	915	0.115

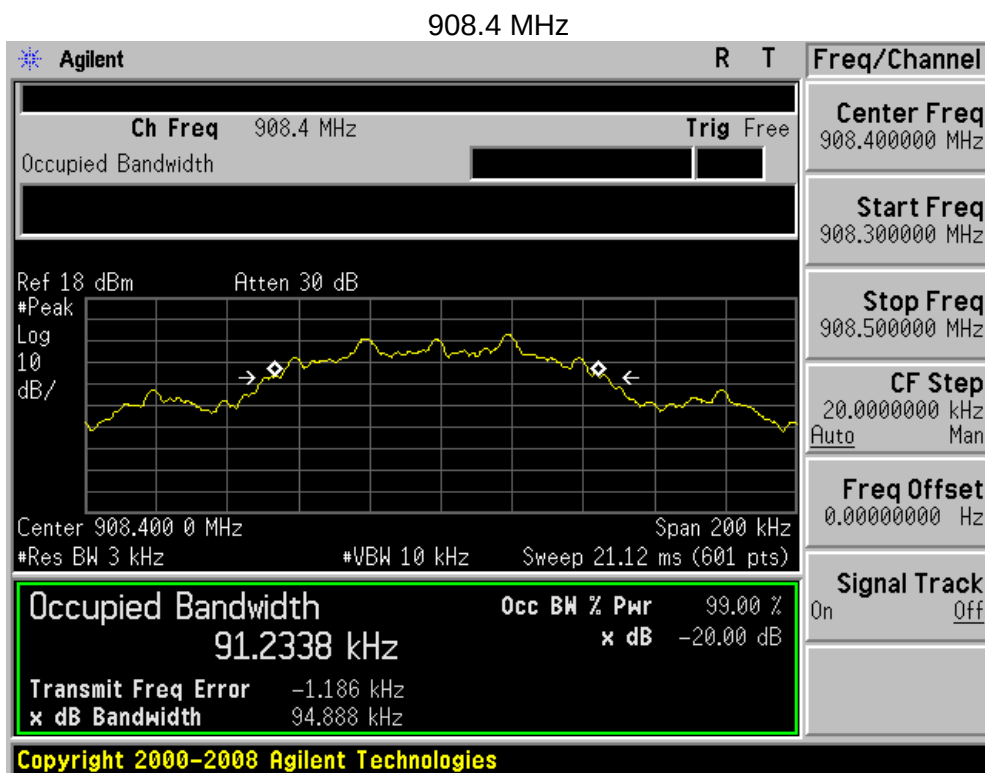

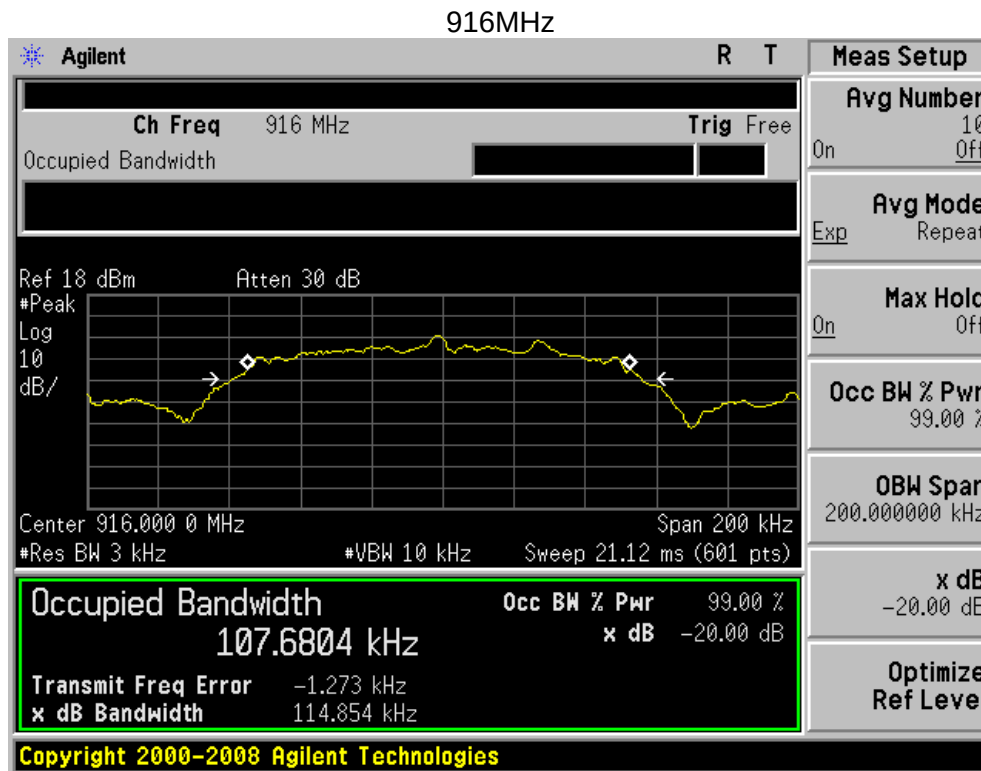

END OF REPORT