

**FCC PART 15 SUBPART C / IC RSS-210 TEST REPORT**

**for**

**Contour**

**Model No.: MG-BLK-APBBBK-01**

**FCC ID: 2AAUCMGBLKAPBBBK**

**IC: 12645A-MGBLKAPBBBK**

**of**

**Applicant: Thermaltake Technology Co., Ltd.**

**Address: 5F., No.185, Sec.2, Tiding Blvd Neihu Dist., Taipei City 114,  
Taiwan**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1**

**A2LA Accredited No.: 2732.01**



**Report No.: W6M21412-14665-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

## **TABLE OF CONTENTS**

1	GENERAL INFORMATION .....	2
1.1	Notes .....	2
1.2	Testing laboratory .....	3
1.2.1	Location .....	3
1.2.2	Details of accreditation status .....	3
1.3	Details of approval holder .....	3
1.4	Application details .....	4
1.5	General information of Test item.....	4
1.6	Test standards .....	5
2	TECHNICAL TEST .....	6
2.1	Summary of test results .....	6
2.2	Test environment .....	6
2.3	Test Equipment List .....	7
2.4	General Test Procedure .....	9
3	TEST RESULTS (ENCLOSURE) .....	11
3.1	Peak Output Power (transmitter) .....	12
3.2	RF Exposure Compliance Requirements .....	16
3.3	Out of Band Radiated Emissions .....	16
3.4	Transmitter Radiated Emissions in restricted Bands .....	17
3.5	Spurious emissions (tx) .....	18
3.6	Carrier Frequency Separation .....	20
3.7	Number of Hopping Frequencies.....	23
3.7.1	Pseudorandom Frequency Hopping Sequence.....	25
3.7.2	Coordination of hopping sequences to other transmitters .....	25
3.7.3	System Receiver Hopping Capability .....	25
3.8	Time of Occupancy (Dwell Time).....	26
3.9	20dB Bandwidth .....	32
3.9.1	System Receiver Input Bandwidth .....	35
3.10	Band-edge Compliance of RF Emissions .....	36
3.11	Radiated Emissions from Receiver part .....	41
3.12	Power Line Conducted Emission.....	42
	Appendix.....	45



Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: **930600**.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### **Tester:**

January 29, 2015

Robert Ren

Date

WTS-Lab.

Name

Signature

### **Technical responsibility for area of testing:**

January 29, 2015

Kevin Wang

Date

WTS

Name

Signature



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS

No.5-1, Lishui, Shuang Sing Village,  
Wanli Dist., New Taipei City 207,  
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1




**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.  
Accredited number: ./.  
Street: ./.  
Town: ./.  
Country: ./.  
Telephone: ./.  
Fax: ./.

### **1.3 Details of approval holder**

Name: Thermaltake Technology Co., Ltd.  
Street: 5F.,No.185,Sec.2, Tiding Blvd Neihu Dist.,  
City: Taipei City 114,  
Country: Taiwan  
Telephone: 886-2-8797-5788  
Fax: 886-2-8797-8055



Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## 1.4 Application details

Date of receipt of test item: January 14, 2015

Date of test: from January 15, 2015 to January 29, 2015

## 1.5 General information of Test item

Type of test item: Contour

Model Number: MG-BLK-APBBBK-01

Multi-listing model number: ./.

Photos: see Annex

### Technical data

Frequency band: 2402 - 2480 MHz

Frequency ( ch A): 2402 MHz

Frequency ( ch B): 2441 MHz

Frequency ( ch C): 2480 MHz

### Transmitter

### Unom

Normal Mode

Power ( ch 0): Conducted: 2.75 dBm

Power ( ch 39): Conducted: 2.24 dBm

Power ( ch 78): Conducted: 1.58 dBm

EDR Mode

Power ( ch 0): Conducted: 2.84 dBm

Power ( ch 39): Conducted: 2.35 dBm

Power ( ch 78): Conducted: 1.68 dBm


Power supply: Battery 3.7 Vd.c., USB 5Vd.c. (Power from PC)

Operation modes: duplex

Modulation Type: GFSK、 $\pi/4$ DQPSK、8DPSK

Antenna Type: PCB antenna

Antenna gain: -2.23 dBi



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK  
Host device: none

Classification:

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input checked="" type="checkbox"/>
Modular Radio Device	<input type="checkbox"/>

## **Manufacturer: (if applicable)**

Name: Dexin Corporation  
Street: ShiTan Pu Industrial,  
Town: Tangxia Town, Dongguan, Guangdong ,  
Country: China


Additional information: ./.

## **1.6 Test standards**

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2013-10)

CANADA RSS-210 Issue 8: December 2010

CANADA RSS-Gen Issue 4: November 2014



Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

**or**

The deviations as specified in 3 were ascertained in the course of the tests performed.

### **2.2 Test environment**

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply: Battery 3.7 Vd.c., USB 5Vd.c. (power from PC)

Extreme conditions parameters: test voltage : -- extreme  
min : -- V  
max : -- V





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2014/9/2	2015/9/1
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2014/7/8	2015/7/7
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2014/10/13	2015/10/12
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2014/9/2	2015/9/1
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2014/9/2	2015/9/1
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2014/10/15	2015/10/14
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2014/7/01	2015/6/30
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2014/2/25	2015/2/24
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2014/2/18	2015/2/17
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2014/6/05	2015/6/04
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2014/3/3	2015/3/2
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2014/11/26	2015/11/25
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2014/10/9	2015/10/8
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2014/9/22	2015/9/21
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2014/11/7	2015/11/6
ETSTW-RE 111	TRILOG Super Broadband test Antenna	VULB 9160	9160-3309	Schwarz beck	2014/12/5	2015/12/4
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	None	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2015/1/7	2016/1/6
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2014/6/11	2015/6/10



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2014/8/12	2015/8/11
ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2014/8/12	2015/8/11
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2014/3/3	2015/3/2
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2014/8/12	2015/8/11
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2014/8/12	2015/8/11
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2014/10/20	2015/10/19
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2015/1/7	2016/1/6
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2015/1/7	2016/1/6
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2015/1/7	2016/1/6
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2015/1/7	2016/1/6
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2014/9/17	2015/9/16
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2014/10/15	2015/10/14
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2014/10/15	2015/10/14
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2014/2/19	2015/2/18
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2014/3/3	2015/3/2
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2014/3/3	2015/3/2
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2015/1/16	2016/1/15
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2014/9/22	2015/9/21
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2014/3/3	2015/3/2
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2014/11/26	2015/11/25
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2014/11/26	2015/11/25
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2014/11/26	2015/11/25
ETSTW-Cable 053	N TYPE To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2014/2/19	2015/2/18
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2014/2/19	2015/2/18
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: **930600**.



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor =  $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## **3 Test results (enclosure)**

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b) IC RSS-210 A8.4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent radiated Power	15.247(b) IC RSS-210 A8.4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c) IC RSS-210 A8.5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.247 IC RSS-210 A8.5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Carrier Frequency Separation	15.247(a) (1) IC RSS-210 A8.1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequencies	15.247(a) (1)(i) IC RSS-210 A8.1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	15.247(a) (1)(i) IC RSS-210 A8.1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20 dB Bandwidth	15.247(a) (1)(i) IC RSS-210 A8.1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band-edge Compliance of RF Emission	15.247(c) IC RSS-210 A8.1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	15.109 IC RSS-210 2.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207(a) IC RSS-Gen	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.



Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK


## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.


The power was measured with modulation (declared by the applicant).

Normal mode

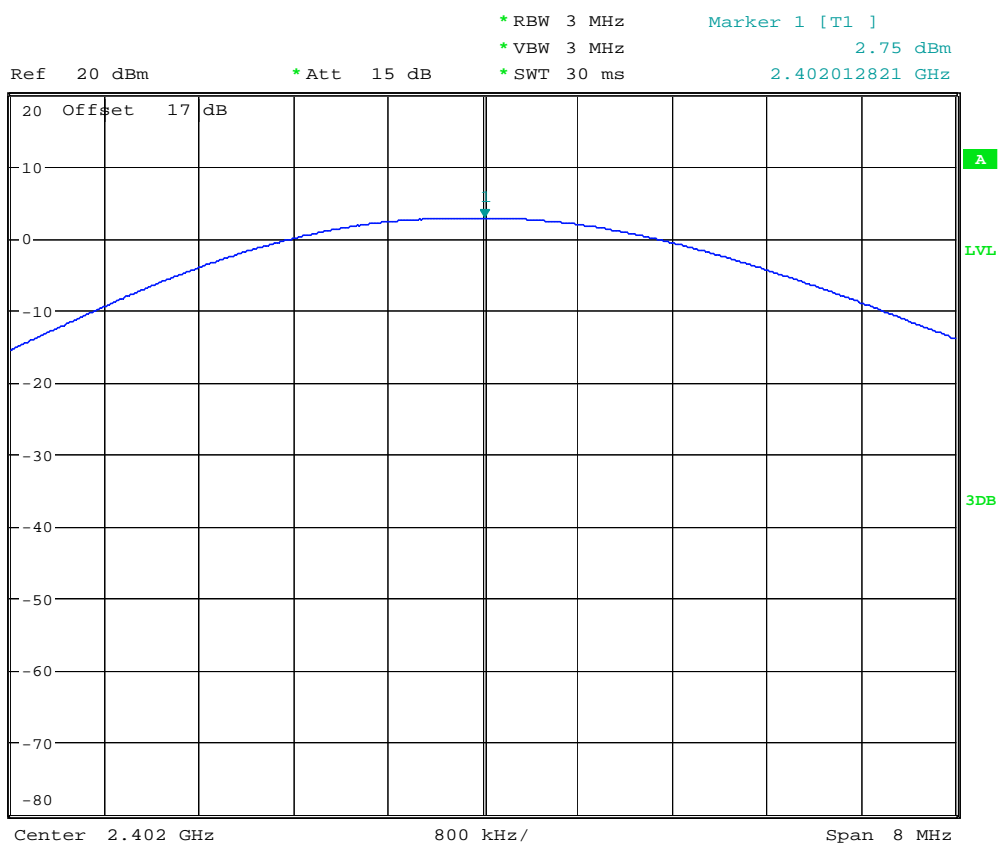


MAX OUTPUT POWER CH0

Date: 15.JAN.2015 19:38:42




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

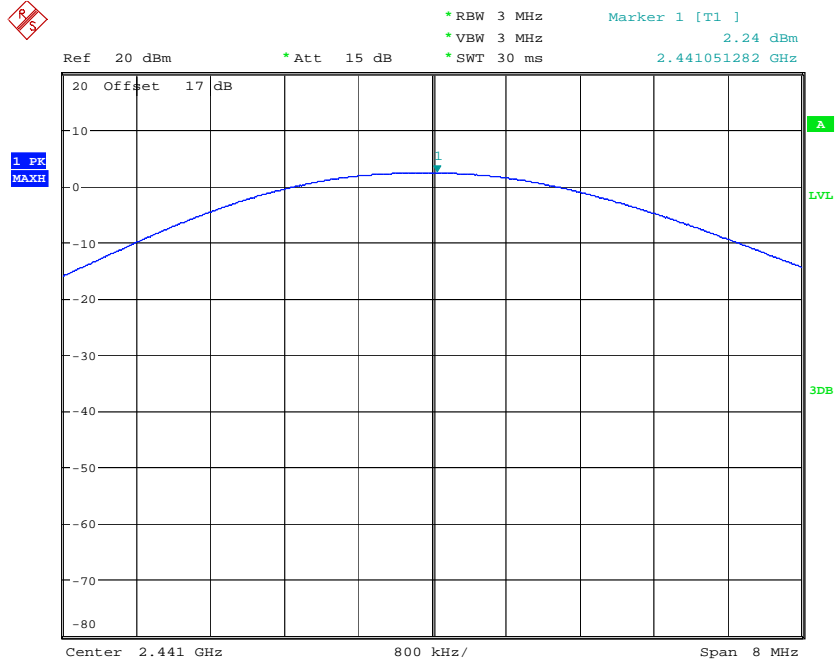

MAX OUTPUT POWER CH39  
Date: 15.JAN.2015 19:39:30

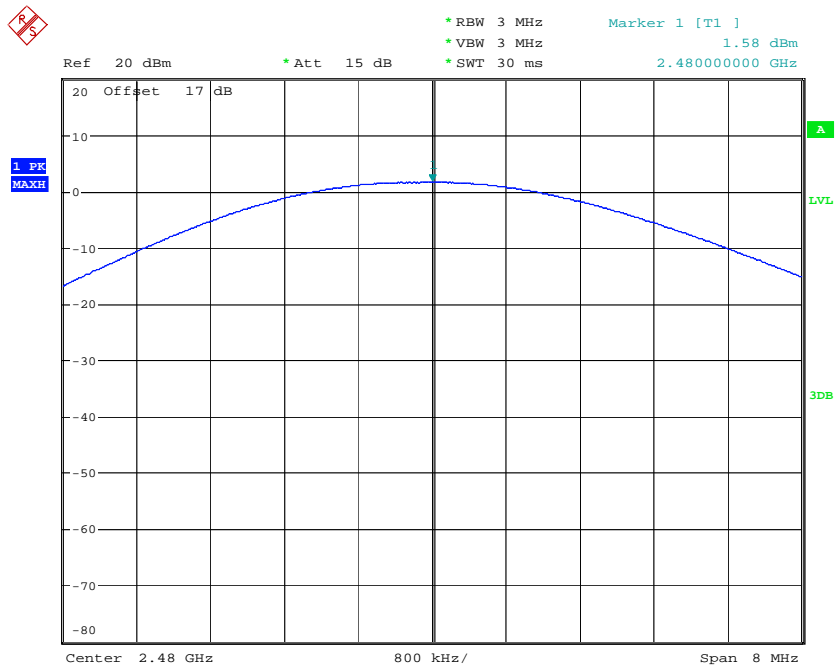

MAX OUTPUT POWER CH78  
Date: 15.JAN.2015 19:40:06




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK


IC: 12645A-MGBLKAPBBBK

EDR mode

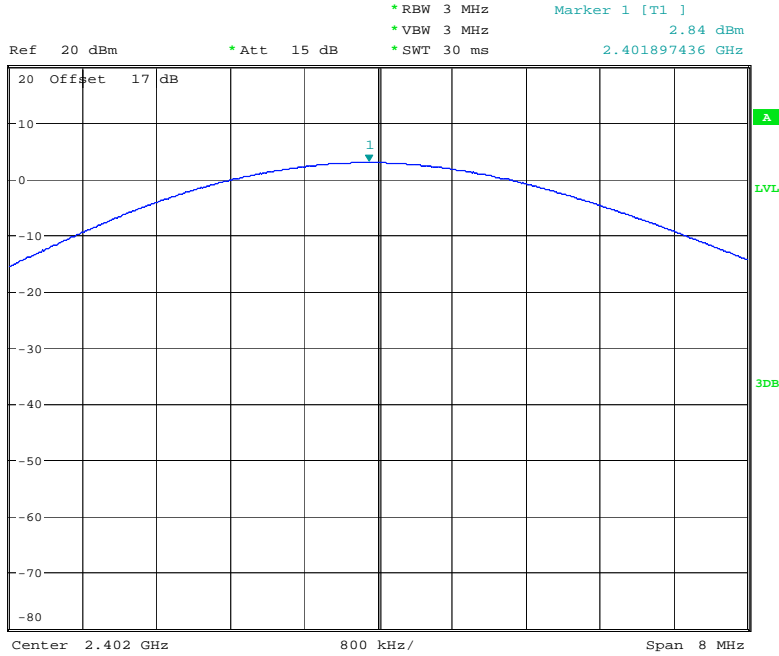

MAX OUTPUT POWER CH0 EDR MODE

Date: 15.JAN.2015 19:46:06

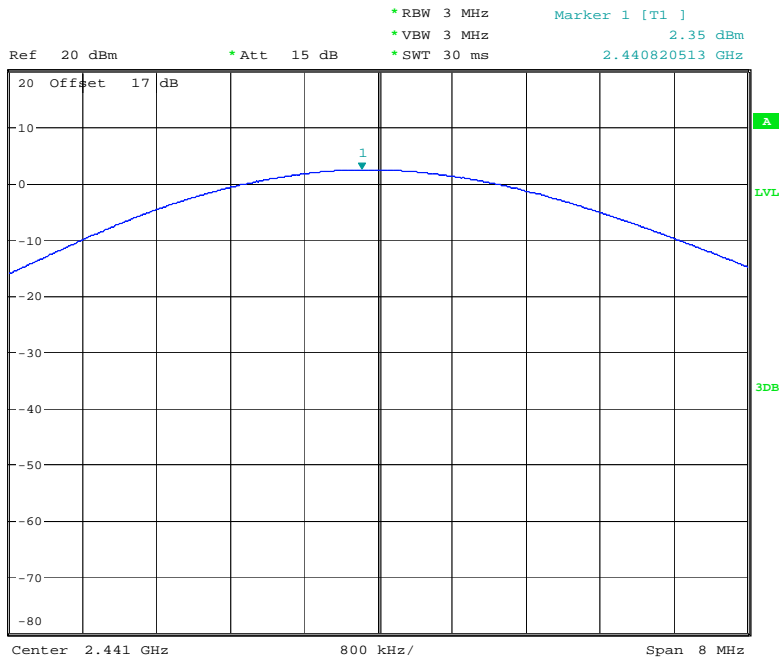


MAX OUTPUT POWER CH39 EDR MODE

Date: 15.JAN.2015 19:46:50





Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

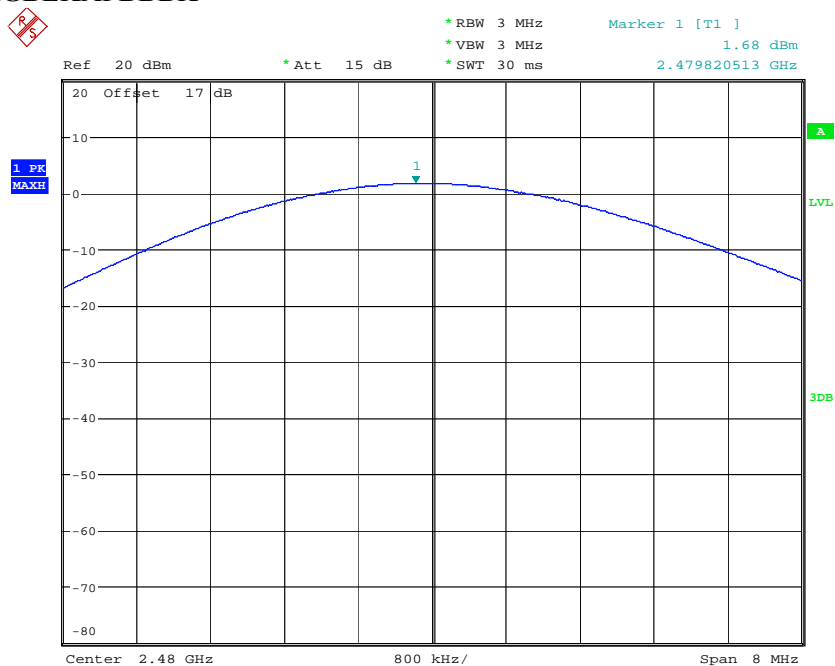

MAX OUTPUT POWER CH78 EDR MODE  
 Date: 15.JAN.2015 19:47:22


## Maximum Peak Output Power

Limits:

Frequency MHz	Number of hopping channels			
	$\geq 75$	$\geq 50$	$49 \geq 25$	$74 \geq 15$
902-928	--	30 dBm	24 dBm	--
2400-2483.5 MHz	30 dBm	--	--	21 dBm
5725-5850 MHz	30 dBm	--	--	--

In case of employing transmitter antennas having antenna gain >dBi and using fixed point-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

### **3.2 RF Exposure Compliance Requirements**

According to Supplement C, Edition 01-01 to OET Bulletin 65, Edition 97-01 this spread spectrum transmitter is categorically excluded from routine environmental evaluation because of the low power level, where there is a high likelihood of compliance with RF exposure standards.

The antenna used for this Bluetooth transceiver module must not be co-located or operating in conjunction with any other antenna or transmitter.

### **3.3 Out of Band Radiated Emissions**

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 111, ETSTW-RE 030, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

**3.4 Transmitter Radiated Emissions in restricted Bands**

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.

54.0dB $\mu$ V/m


For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dB $\mu$ V/m + 20 dB= 74 dB $\mu$ V/m

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

### 3.5 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

### Summary table with radiated data of the test plots

Model: -- Date: --  
 Mode: -- Temperature: -- °C Engineer: --  
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Reading + Correction Factor
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. Measurement uncertainty above 1GHz: 30-1000 MHz = ± 4.32 dB, 1-18 GHz = ± 4.95 dB, 18-40 GHz = ± 2.94 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
  6. See attached diagrams in appendix.

All other not noted test plots do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111,ETSTW-RE 064  
 ETSTW-RE 088, ETSTW-RE 018




Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

### 3.6 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

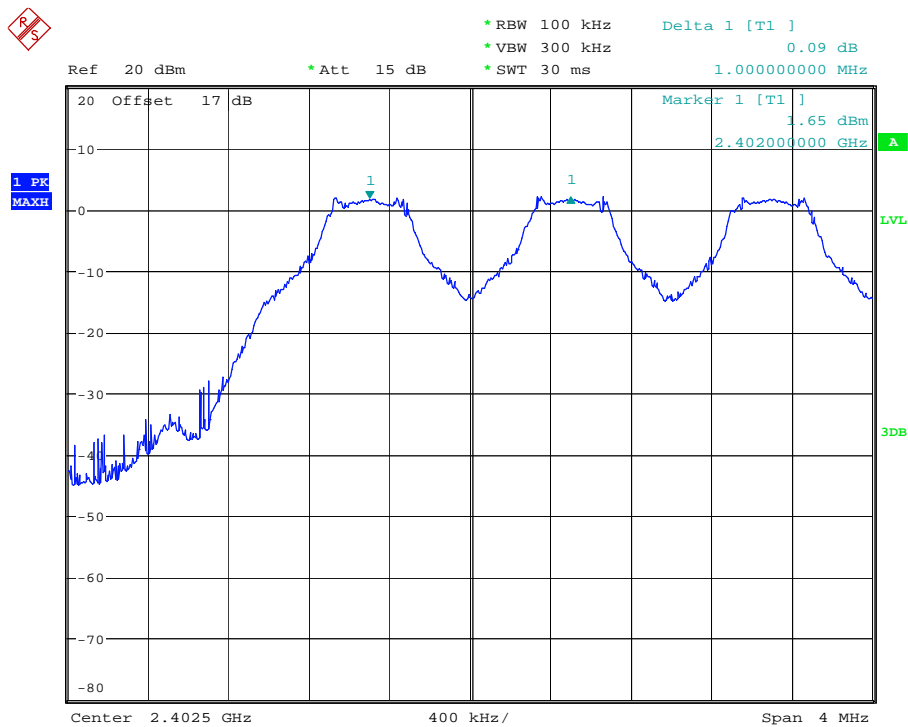

FREQUENCY SEPARATION CH0  
Date: 15.JAN.2015 19:43:54




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

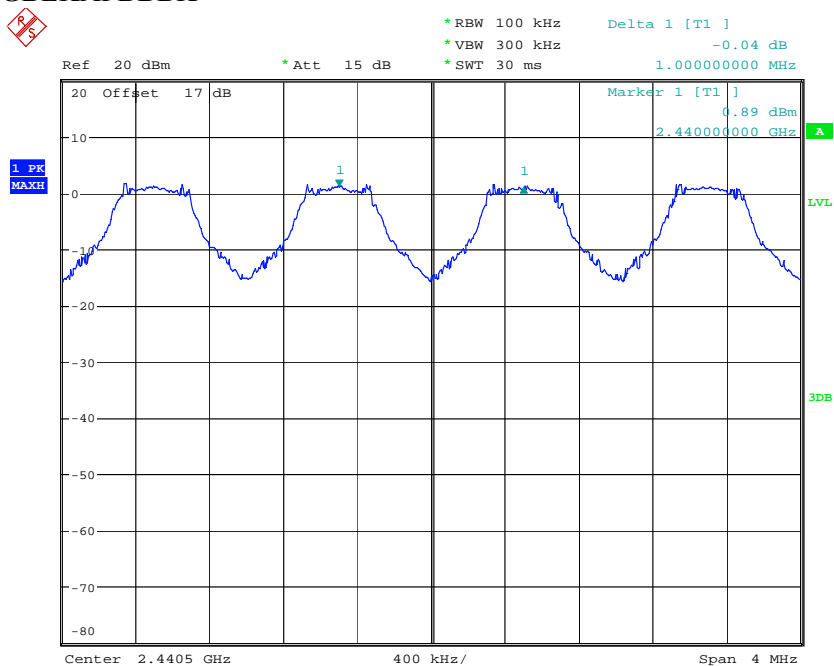

FREQUENCY SEPARATION CH39  
Date: 15.JAN.2015 19:44:38

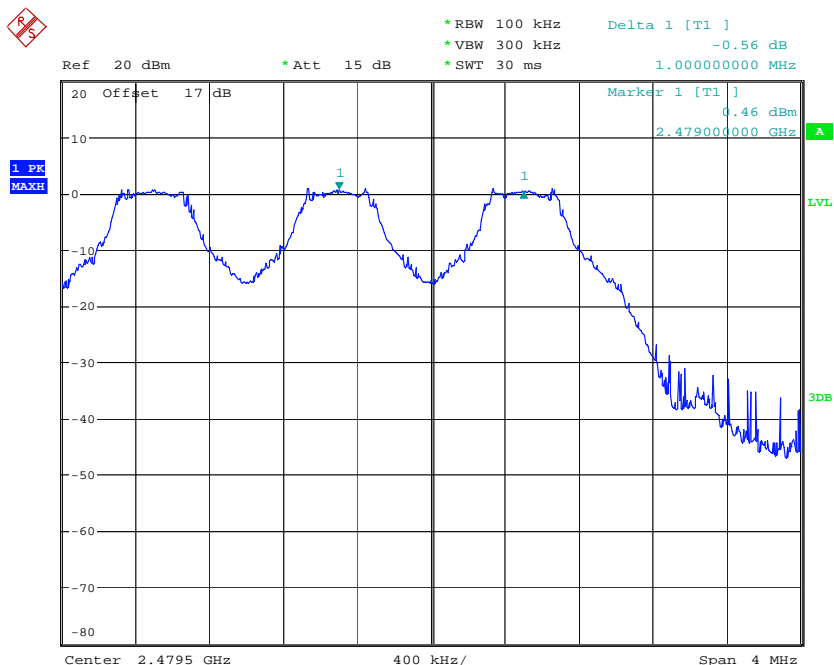

FREQUENCY SEPARATION CH78  
Date: 15.JAN.2015 19:45:26



# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## **Limits:**

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064






Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

## 3.7 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

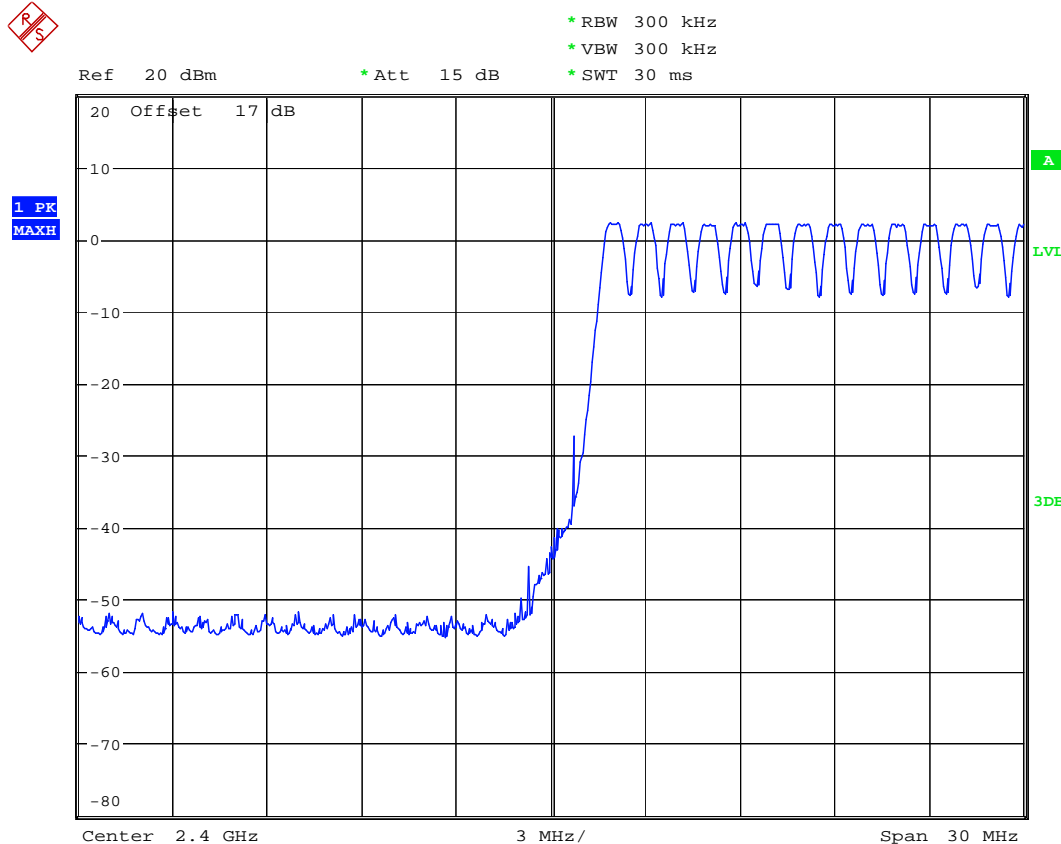


NUMBER OF HOPPING CH0-13

Date: 15.JAN.2015 19:41:14




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

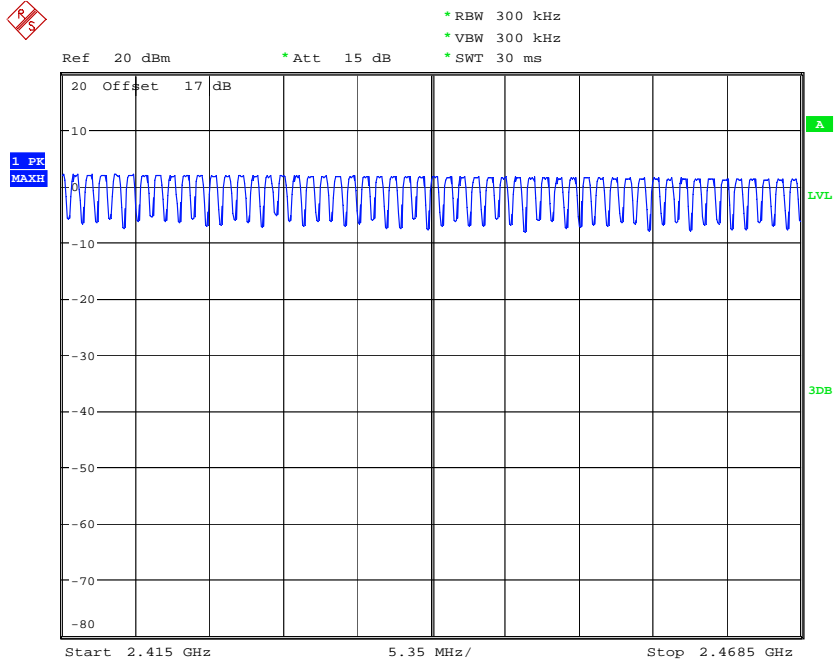

NUMBER OF HOPPING CH14-66  
Date: 15.JAN.2015 19:43:02

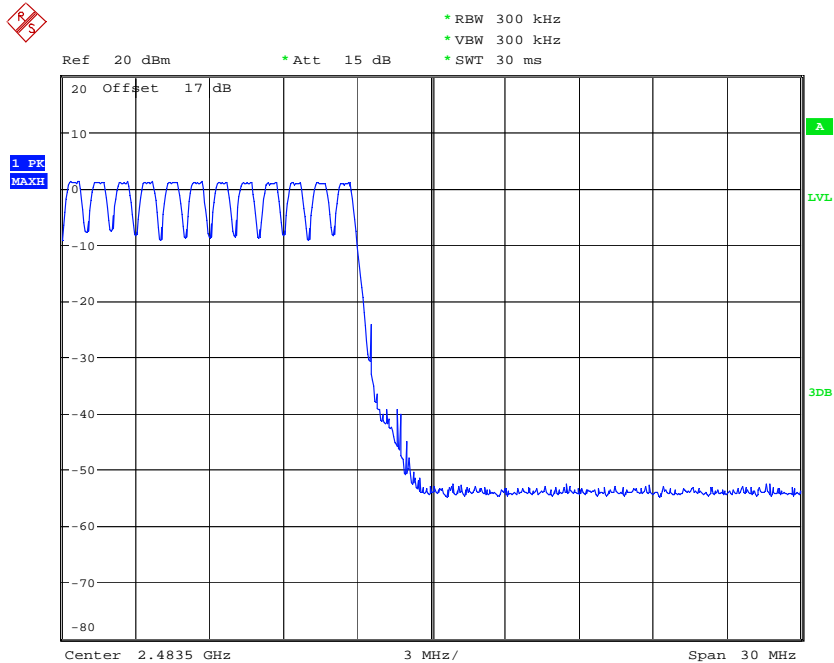

NUMBER OF HOPPING CH67-78  
Date: 15.JAN.2015 19:41:54



Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

**Limits:**

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

**3.7.1 Pseudorandom Frequency Hopping Sequence**

The generation of the hopping sequence is determined by the Bluetooth core specification and complies with the FCC requirements.

**3.7.2 Coordination of hopping sequences to other transmitters**

According to the Bluetooth core specification such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

**3.7.3 System Receiver Hopping Capability**

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.




Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

## 3.8 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

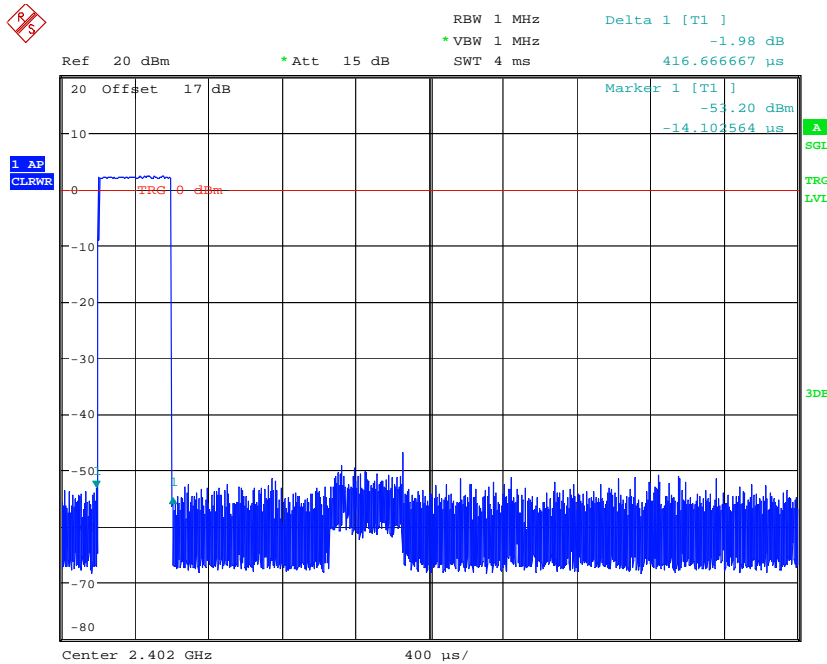


DWELL TIME DH1 CH0(0.416ms \* 320event = 133.12ms)  
Date: 15.JAN.2015 19:59:24




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

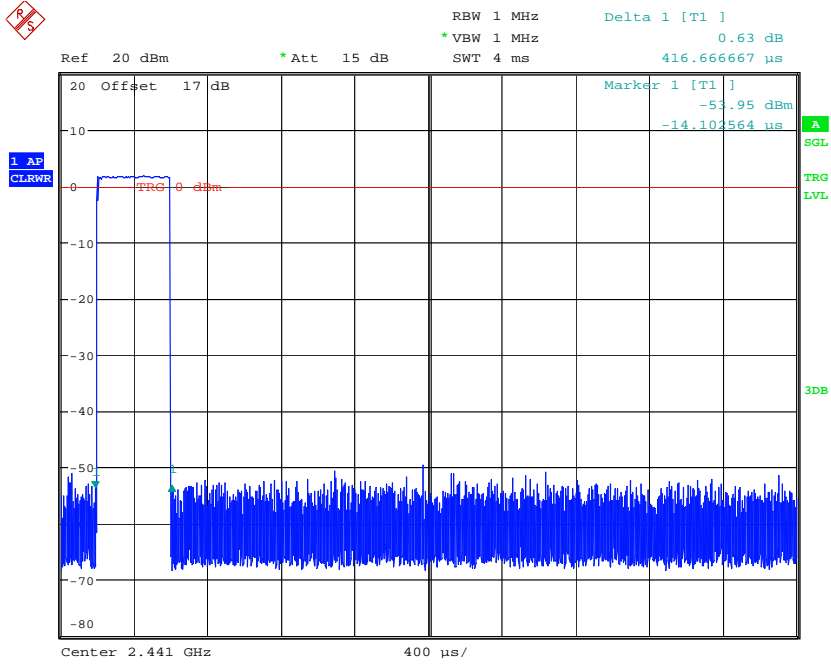

DWELL TIME DH1 CH39(0.416ms \* 320event = 133.12ms)  
 Date: 15.JAN.2015 19:59:43

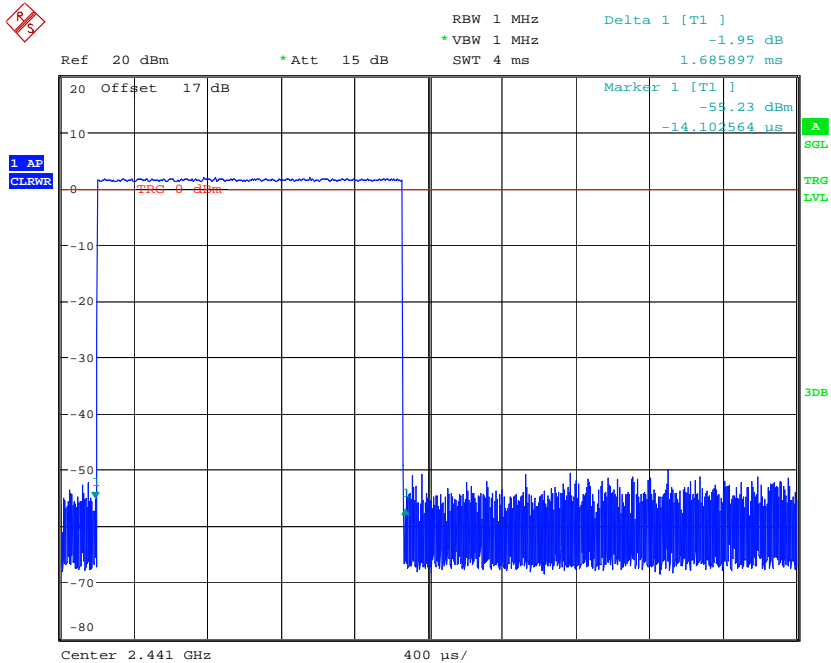


DWELL TIME DH3 CH39(1.685ms \* 160event = 269.6ms)  
 Date: 15.JAN.2015 19:58:16




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

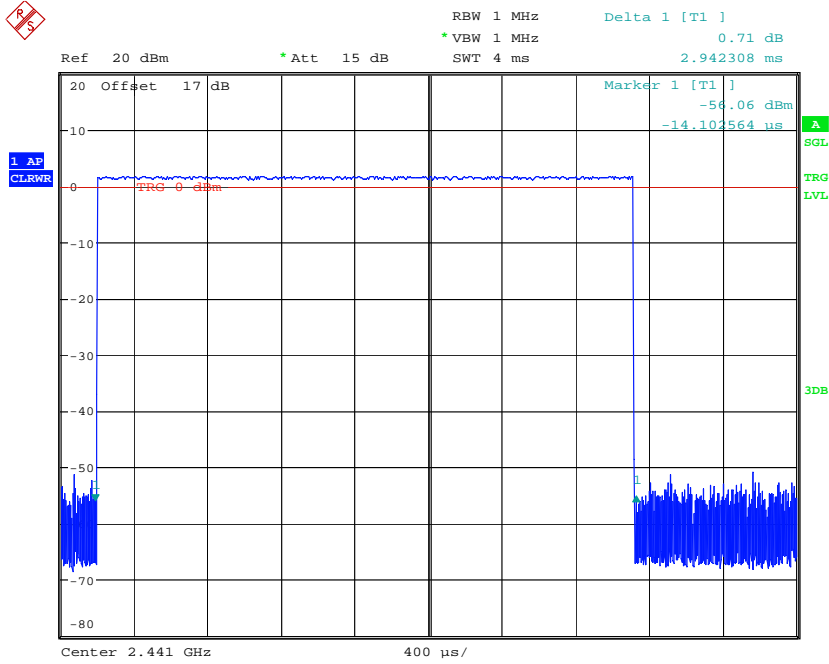

DWELL TIME DH5 CH39(2.943ms \* 106event = 311.852ms)  
Date: 15.JAN.2015 19:56:27

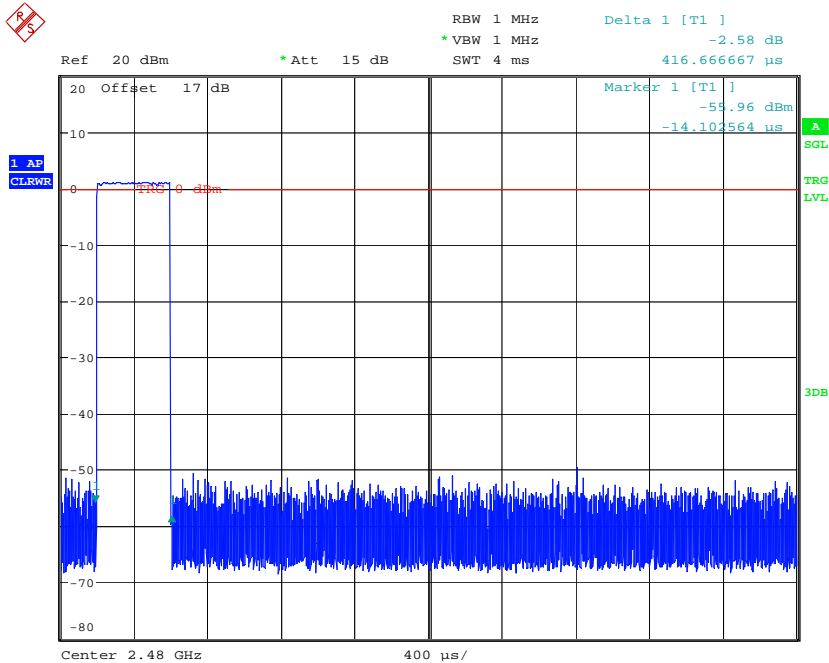


DWELL TIME DH1 CH78(0.416ms \* 320event = 133.12ms)  
Date: 15.JAN.2015 20:00:00




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

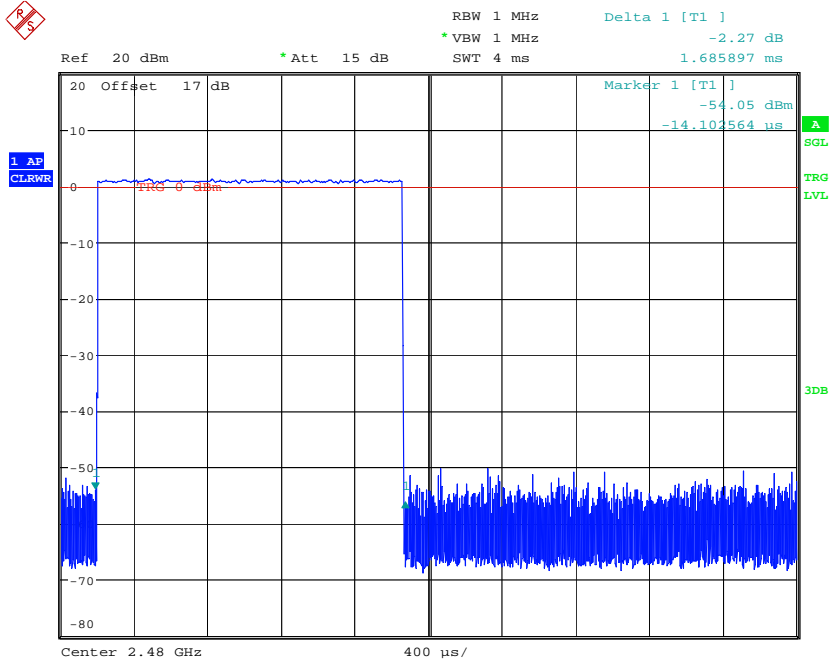

DWELL TIME DH3 CH78(1.685ms \* 160event = 269.6ms)  
 Date: 15.JAN.2015 19:57:57

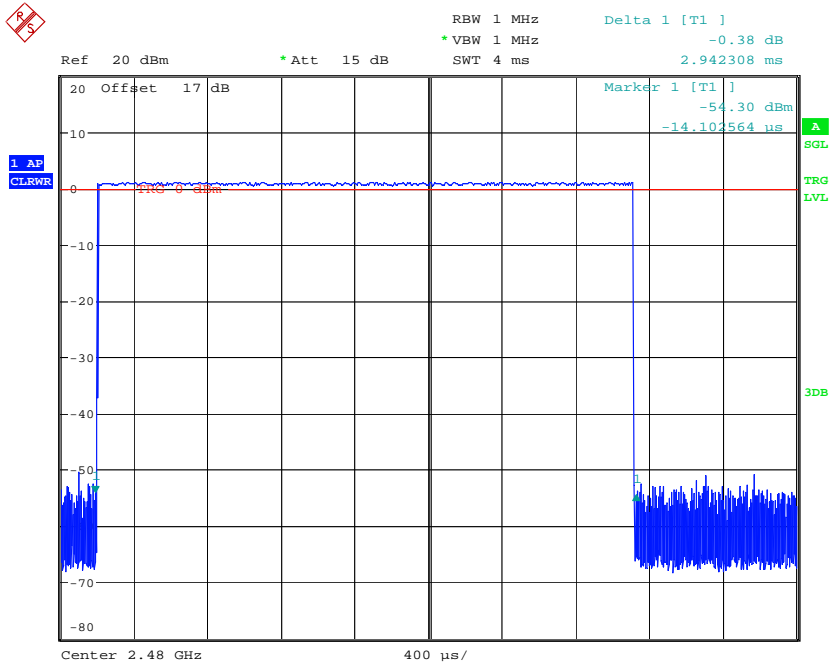

DWELL TIME DH5 CH78(2.943ms \* 106event = 311.852ms)  
 Date: 15.JAN.2015 19:56:49



Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

**Limits and measurement periods:**

Frequency MHz	Number of channels	Measurement Periode	Limit
902 – 928	$\geq 50$	20 s	0.4 s
	$49 \geq 25$	10 s	0.4 s
2400 – 2483.5	$\geq 15$	0.4 s * number of used channels	0.4 s
5725- 5850	$\geq 75$	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064





Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK


## 3.9 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

### Normal Mode

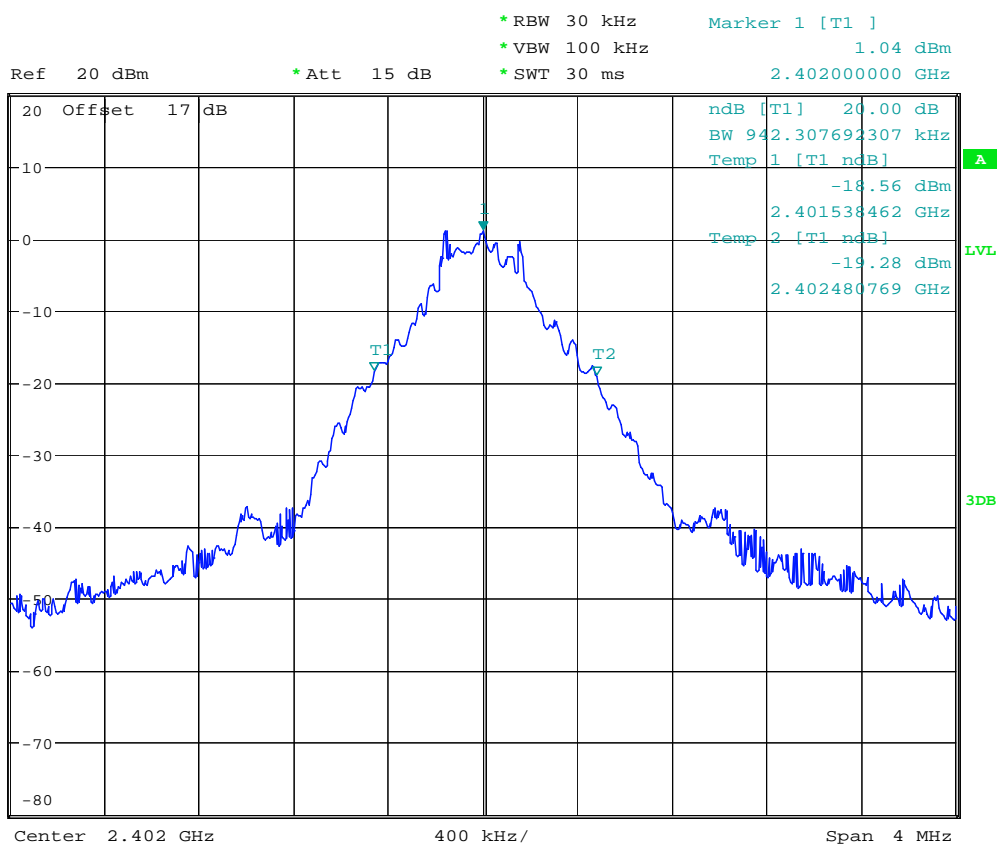

20DB BANDWIDTH CHO


Date: 15.JAN.2015 19:38:50







Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

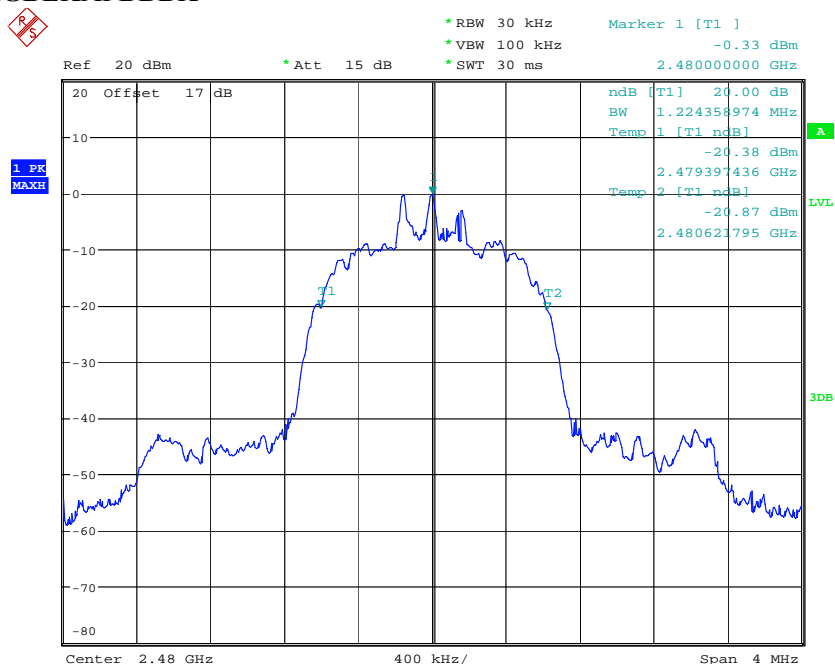

20DB BANDWIDTH CH78 EDR MODE  
 Date: 15.JAN.2015 19:47:31

### Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064


### 3.9.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

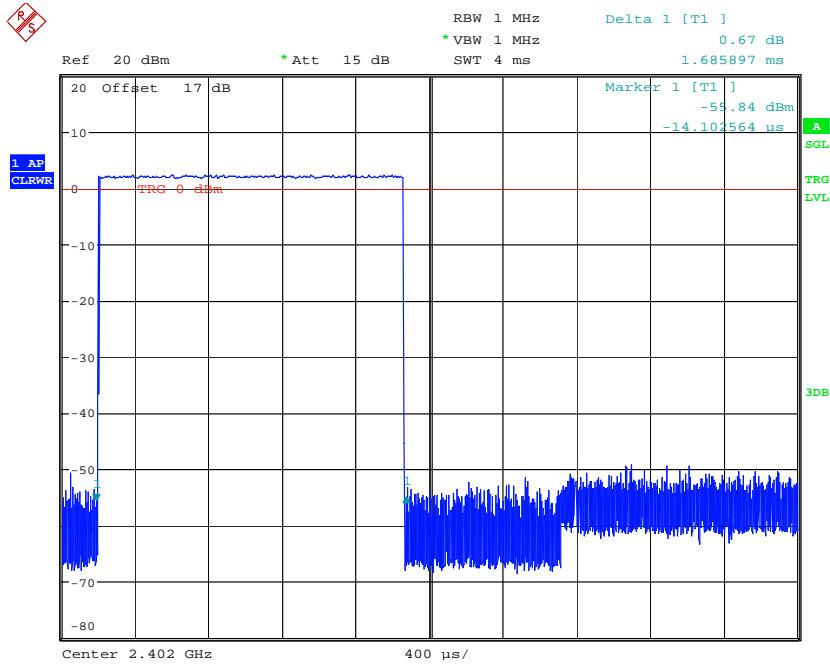

DWELL TIME DH3 CH0(1.685ms \* 160event = 269.6ms)  
Date: 15.JAN.2015 19:58:33

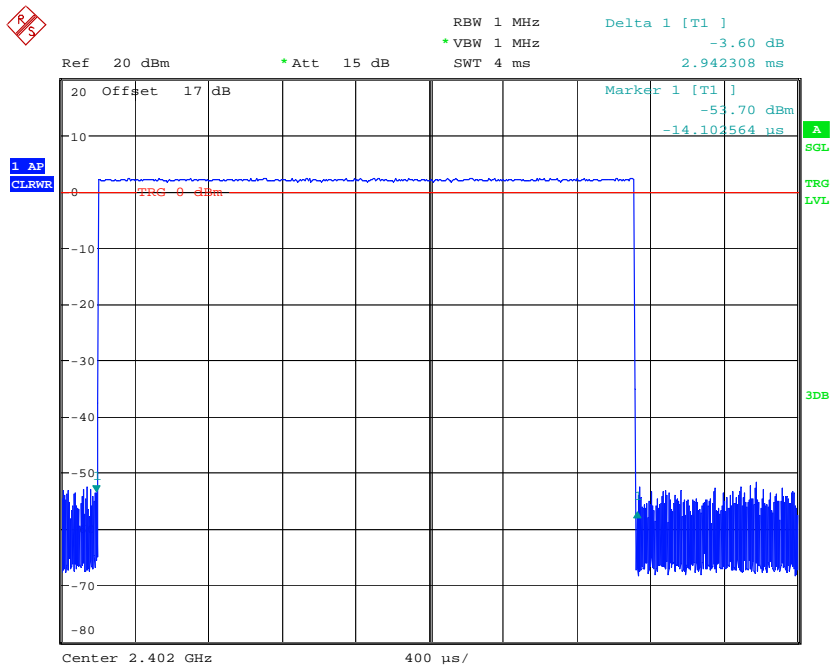

DWELL TIME DH5 CH0(2.943ms \* 106event = 311.852ms)  
Date: 15.JAN.2015 19:56:02




Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

## 3.10 Band-edge Compliance of RF Emissions

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

Normal mode

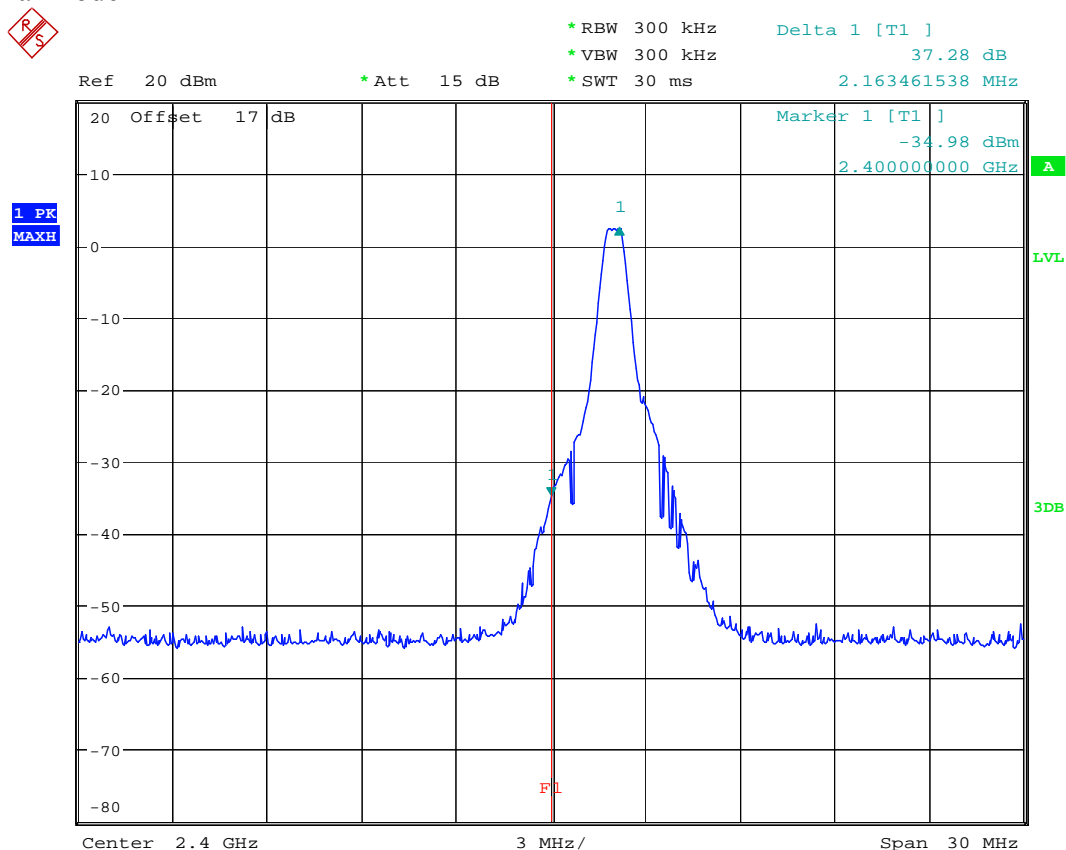


BANDEGE CH0

Date: 15.JAN.2015 19:39:02




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

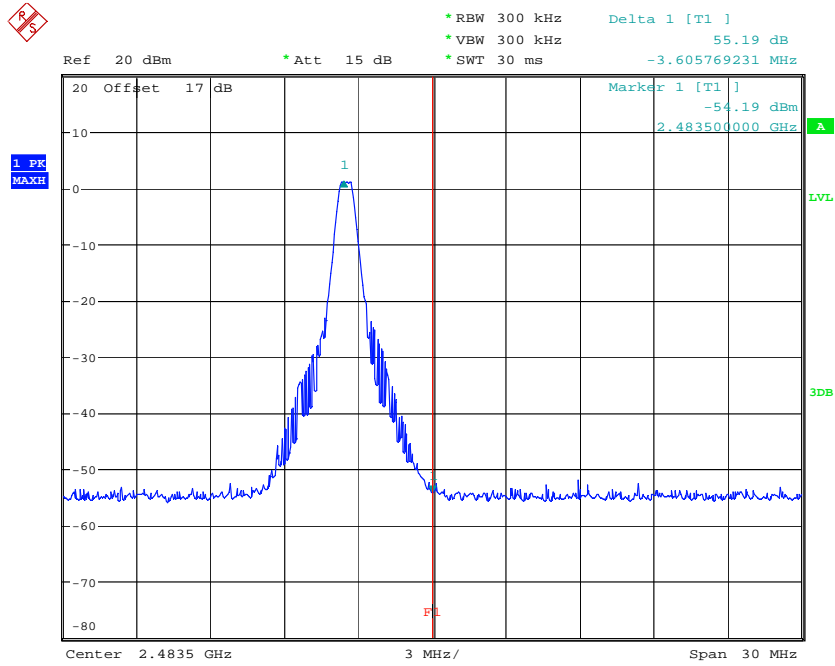

BANDEDGE CH78  
Date: 15.JAN.2015 19:40:22

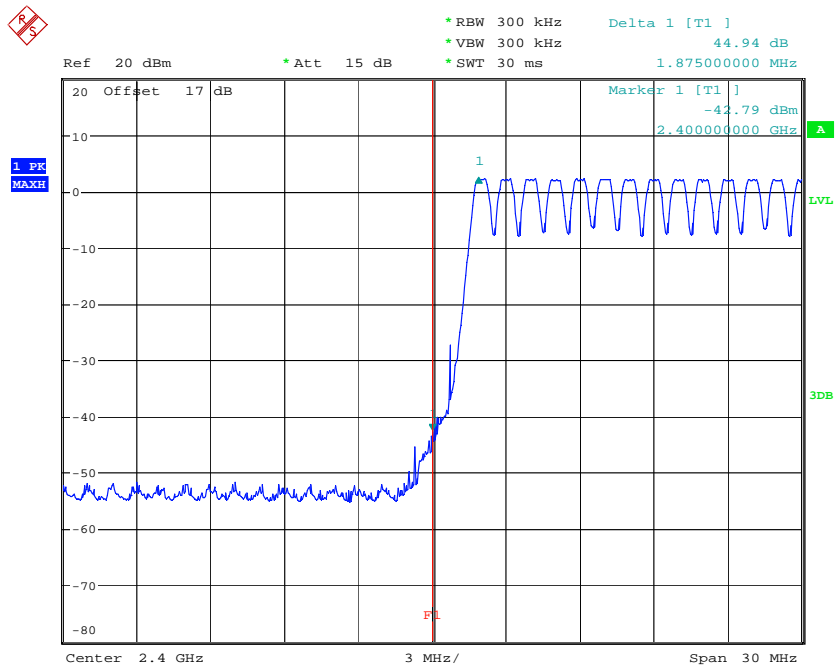


BANDEDGE CH0 HOPPING MODE  
Date: 15.JAN.2015 19:41:15




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

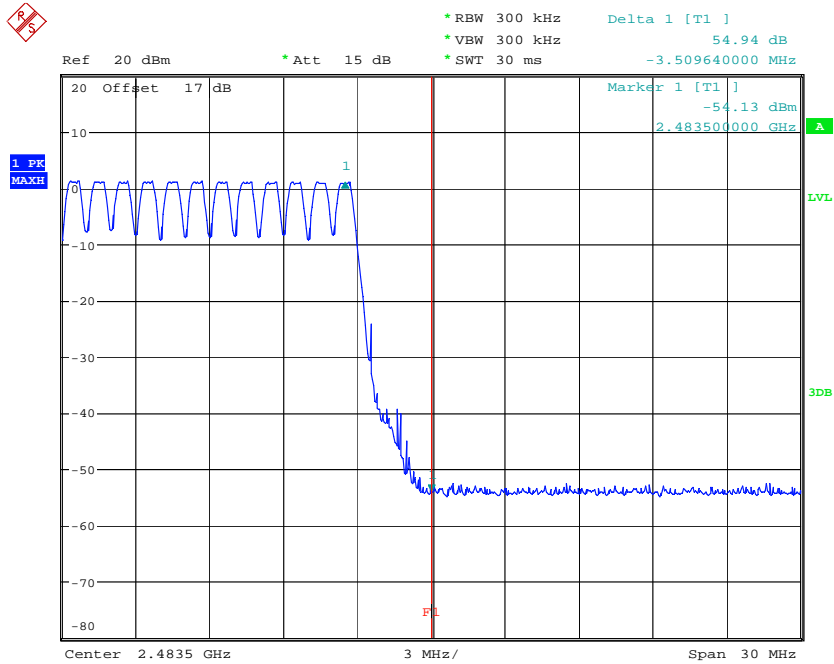

BANDEDGE CH78 HOPPING MODE  
Date: 15.JAN.2015 19:41:54

## EDR mode

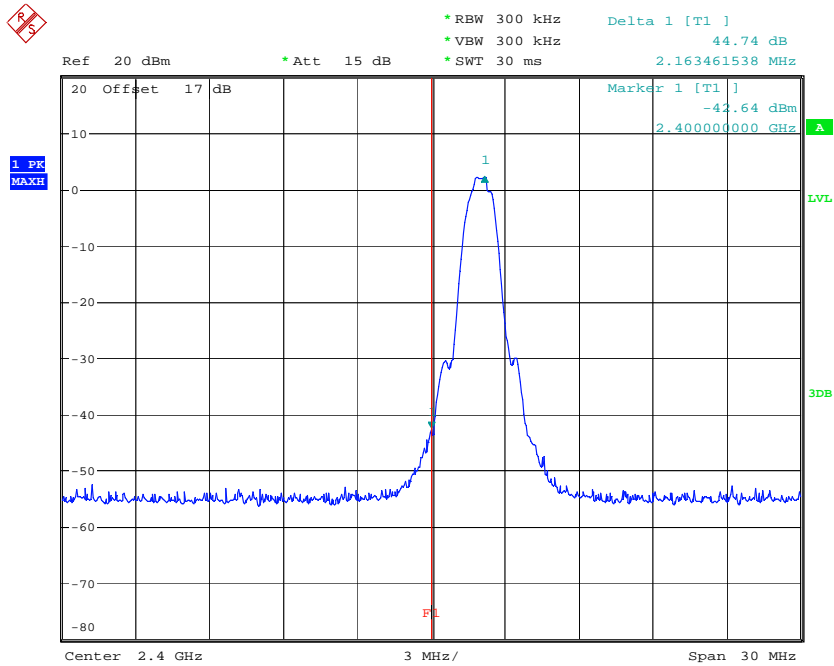


BANDEDGE CH0 EDR MODE  
Date: 15.JAN.2015 19:46:22






# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

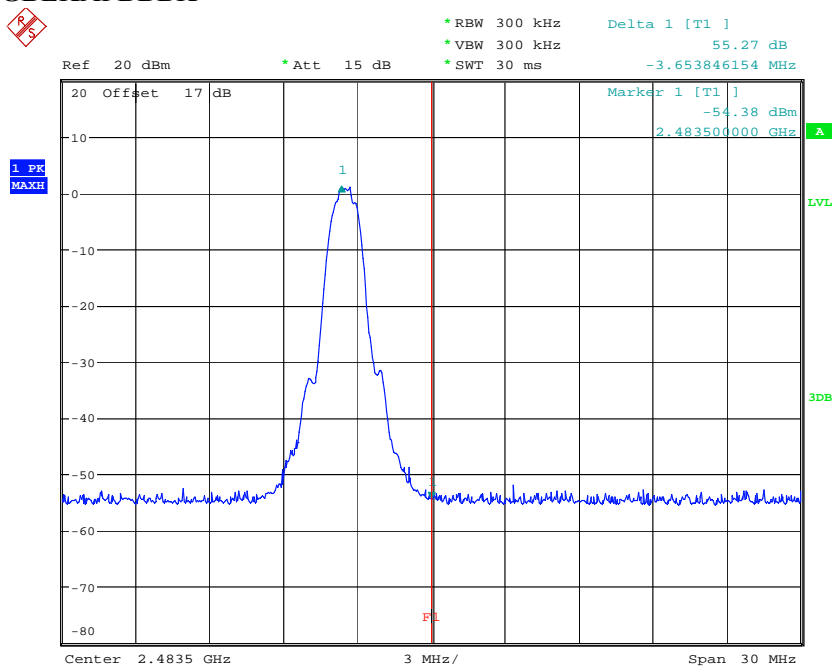

BANDEDGE CH78 EDR MODE  
Date: 15.JAN.2015 19:47:42

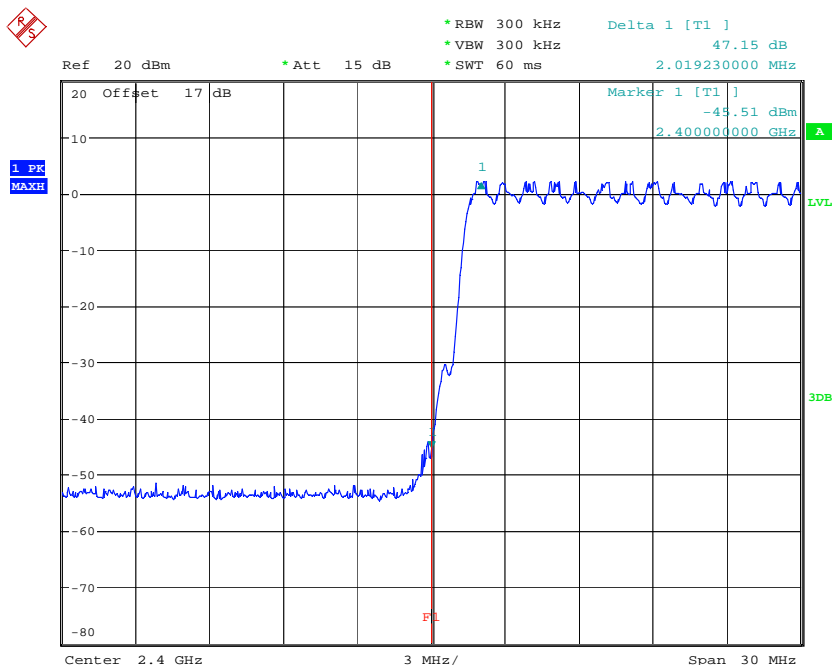


BANDEDGE CH0 EDR HOPPING MODE  
Date: 15.JAN.2015 19:49:46



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

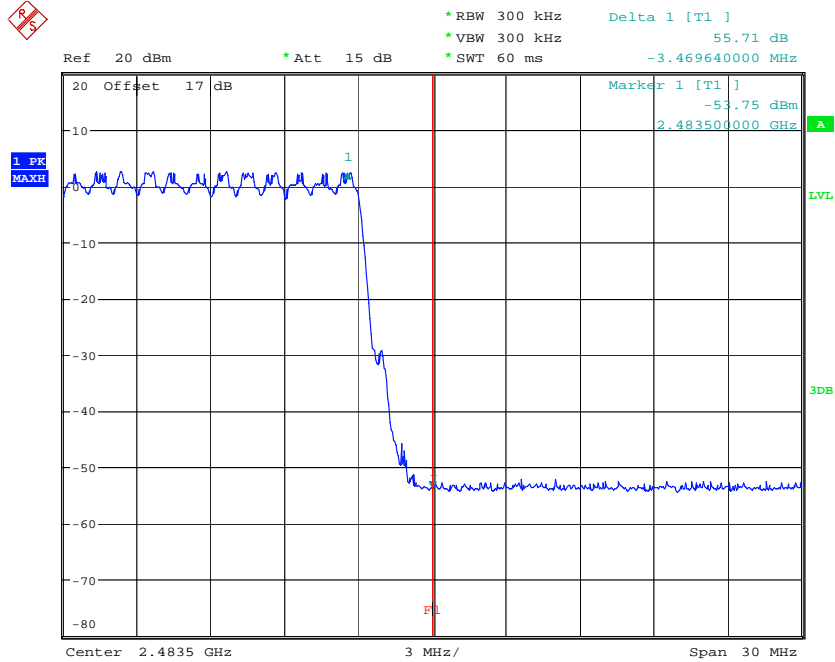

BANDEDGE CH78 EDR HOPPING MODE  
 Date: 15.JAN.2015 19:51:30

### Limits:

Frequency Range / MHz	Limit
902 - 928	- 20 dB
2400 - 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

**3.11 Radiated Emissions from Receiver Part**

FCC Rule: 15.109


**Summary table with radiated data of the test plots**

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Explanation: The test results of digital part data are listed in the separated test report no.: W6M21412-14665-P-15B. For receiver part data, see attached diagrams in appendix.

Test equipment used: ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030  
ETSTW-RE 111




Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

## 3.12 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

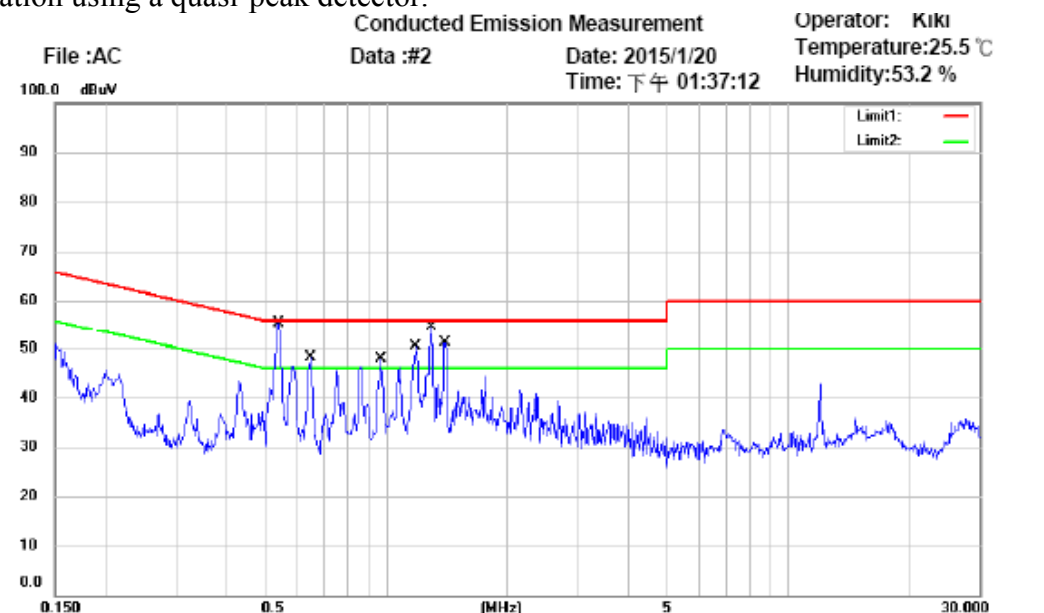

Site : Chamber\_03  
 Condition : LP0002 Conduction(QP)      Phase: N  
 EUT : W6M21412-14665      Power : 110 Va.c.  
 M/N:  
 Test Mode :  
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
*	0.5382	42.93	QP	9.77	52.70	56.00	-3.30	
	0.5382	28.46	AVG	9.77	38.23	46.00	-7.77	
	0.6485	34.38	QP	9.78	44.16	56.00	-11.84	
	0.6485	21.32	AVG	9.78	31.10	46.00	-14.90	
	0.9680	36.64	QP	9.80	46.44	56.00	-9.56	
	0.9680	30.84	AVG	9.80	40.64	46.00	-5.36	
	1.1840	35.41	QP	9.80	45.21	56.00	-10.79	
	1.1840	21.76	AVG	9.80	31.56	46.00	-14.44	
	1.2920	38.86	QP	9.81	48.67	56.00	-7.33	
	1.2920	28.78	AVG	9.81	38.59	46.00	-7.41	
	1.3977	37.06	QP	9.81	46.87	56.00	-9.13	
	1.3977	28.37	AVG	9.81	38.18	46.00	-7.82	




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21412-14665-C-1  
 FCC ID: 2AAUCMGBLKAPBBBK  
 IC: 12645A-MGBLKAPBBBK

Conducted Emission Measurement  
 Data :#1  
 Date: 2015/1/20  
 Time: 下午 01:35:08

Operator: Kiki  
 Temperature:25.5 °C  
 Humidity:53.2 %

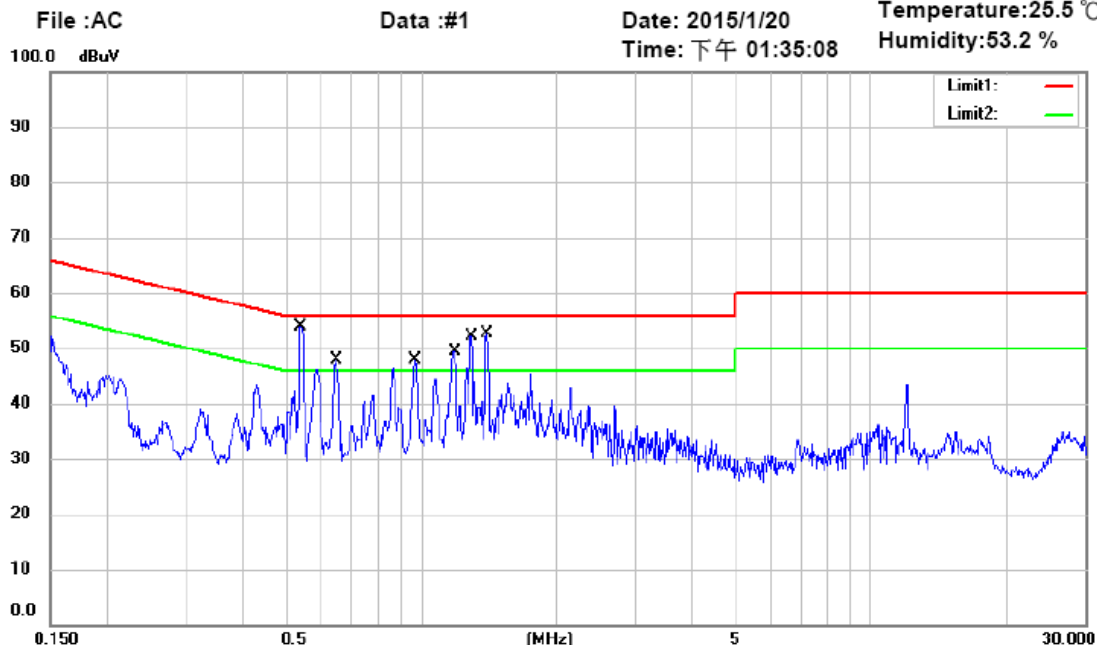

Site : Chamber\_03

Condition : LP0002 Conduction(QP)

Phase: L1

EUT : W6M21412-14665


Power : 110 Va.c.

M/N:

Test Mode :

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
*	0.5382	42.59	QP	9.70	52.29	56.00	-3.71	
	0.5382	28.77	AVG	9.70	38.47	46.00	-7.53	
	0.6485	33.86	QP	9.71	43.57	56.00	-12.43	
	0.6485	22.99	AVG	9.71	32.70	46.00	-13.30	
	0.9725	34.78	QP	9.72	44.50	56.00	-11.50	
	0.9725	29.90	AVG	9.72	39.62	46.00	-6.38	
	1.1863	37.33	QP	9.73	47.06	56.00	-8.94	
	1.1863	23.87	AVG	9.73	33.60	46.00	-12.40	
	1.2898	40.86	QP	9.73	50.59	56.00	-5.41	
	1.2898	31.20	AVG	9.73	40.93	46.00	-5.07	
	1.4000	40.28	QP	9.73	50.01	56.00	-5.99	
	1.4000	30.99	AVG	9.73	40.72	46.00	-5.28	



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M21412-14665-C-1

FCC ID: 2AAUCMGBLKAPBBBK

IC: 12645A-MGBLKAPBBBK

## **Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**Note: 1.The formula of measured value as: Test Result = Reading + Correction Factor**

**2.The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**


**3.Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**

**4.All not in the table noted test results are more than 20 dB below the relevant limits.**

**5.Measurement uncertainty =  $\pm 1.67$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .**

**6.Up Line: QP Limit Line, Down Line: Ave Limit Line.**

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 006, ETSTW-RE 064




Registration number: W6M21412-14665-C-1  
FCC ID: 2AAUCMGBLKAPBBBK  
IC: 12645A-MGBLKAPBBBK

## **Appendix**

### **Measurement diagrams**

Spurious Emissions radiated



***Worldwide Testing Services(Taiwan) Co., Ltd.***

---

Measurement diagrams

Spurious Emission Radiated \_TX





Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:29:11

Humidity:60 %

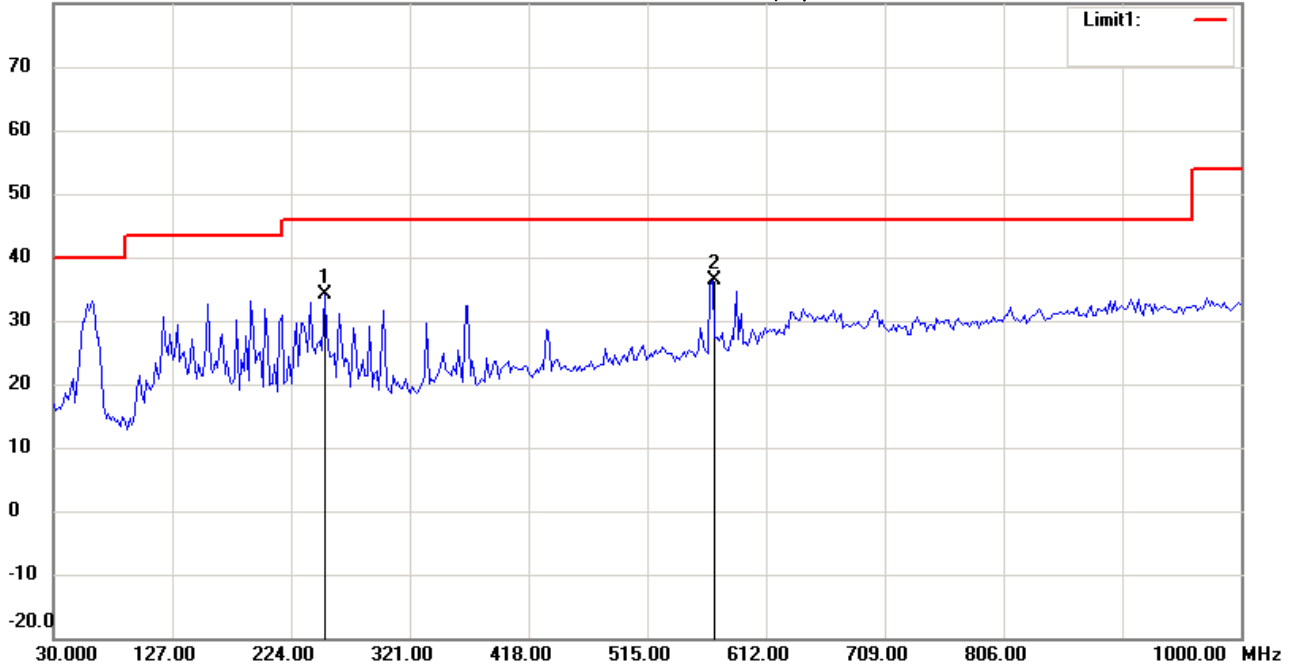

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	251.6032	19.58	peak	14.47	34.05	46.00	100	200	-11.95	
*	568.4570	14.14	peak	22.34	36.48	46.00	100	285	-9.52	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:29:56

Humidity:60 %

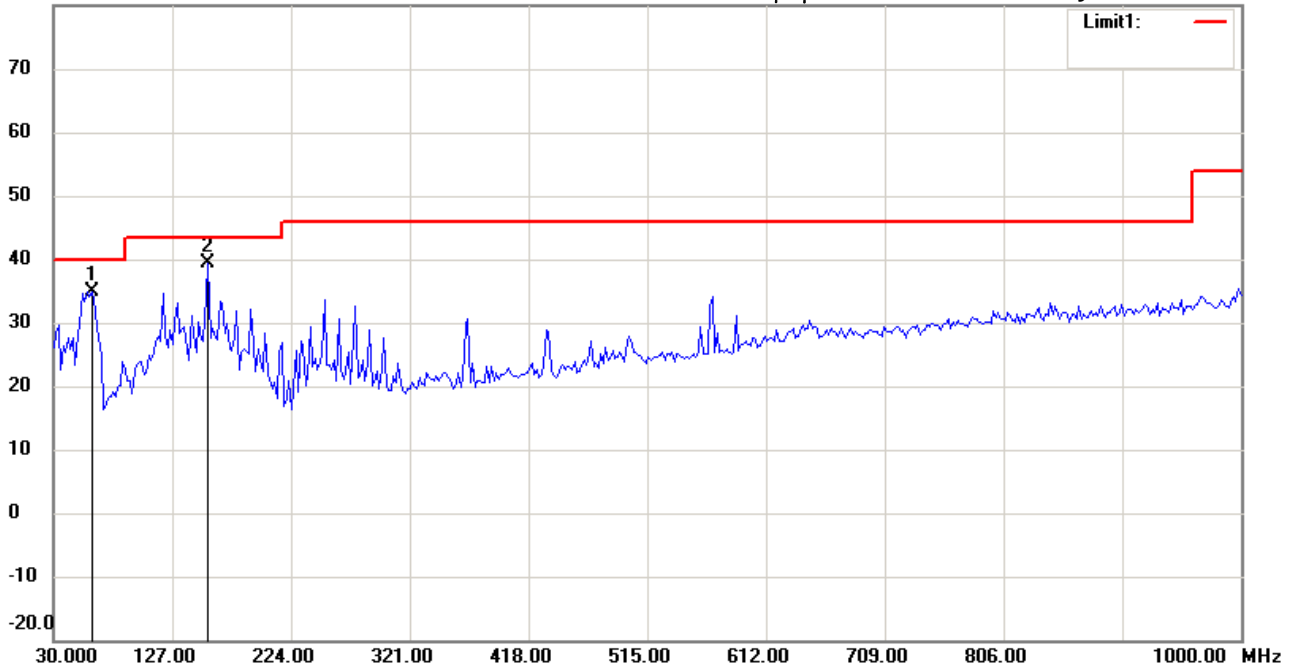

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	61.1022	21.88	peak	12.98	34.86	40.00	100	35	-5.14	
*	156.3527	23.77	peak	15.49	39.26	43.50	100	115	-4.24	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:25:45

Humidity:60 %

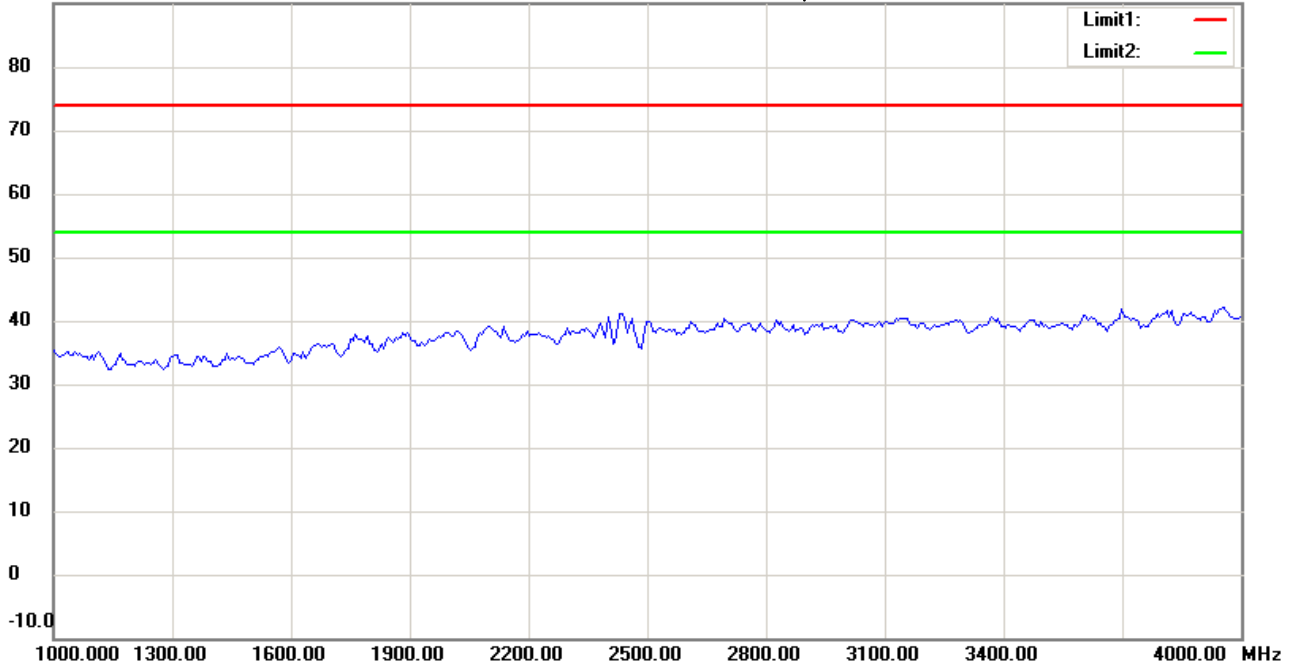

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:28:53

Humidity:60 %

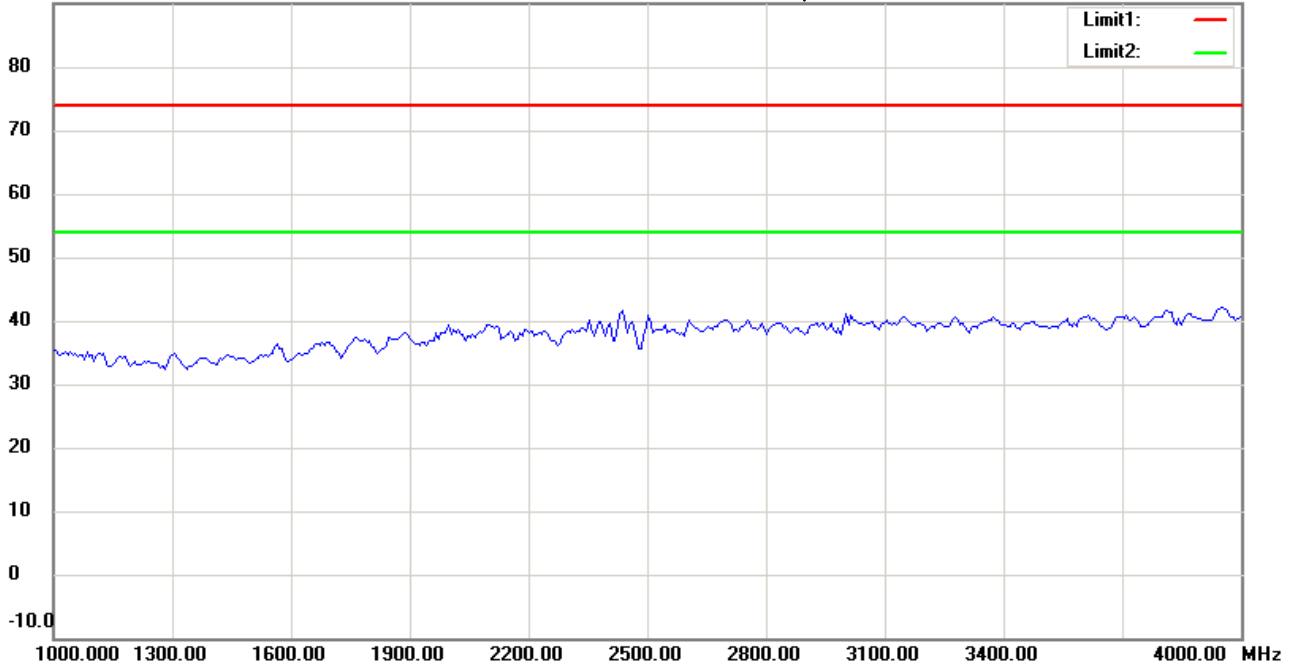

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:26:39

Humidity:60 %

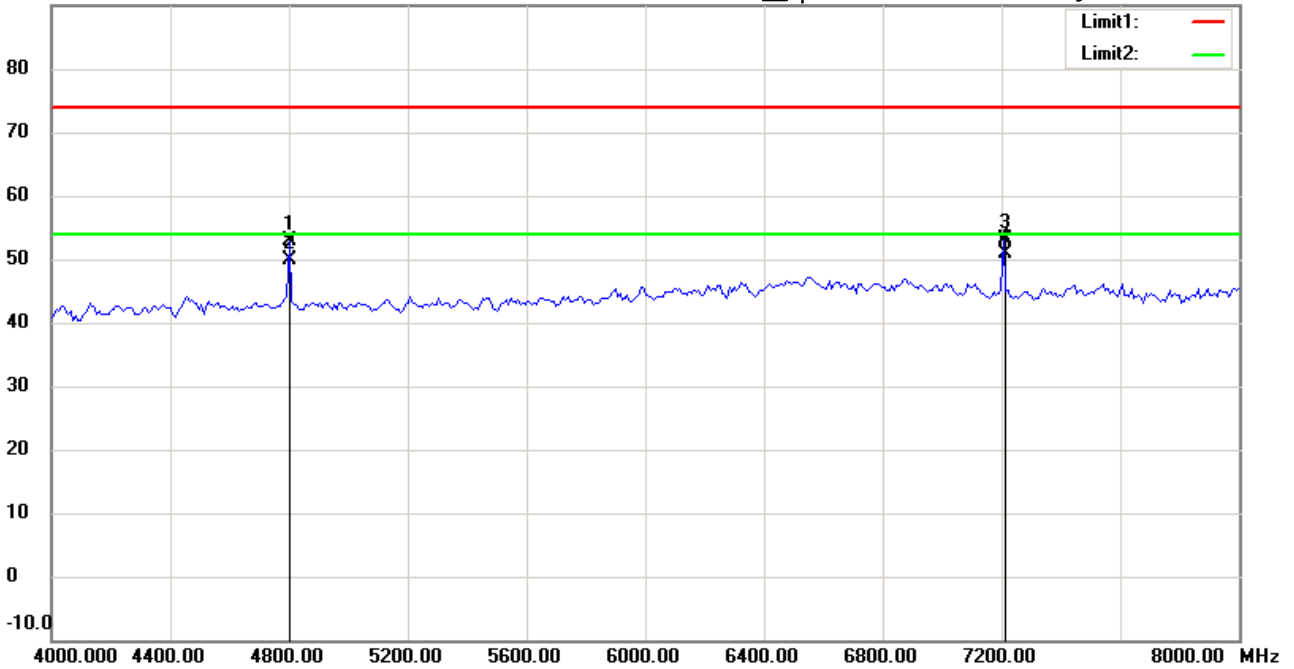

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	52.14	peak	0.66	52.80	74.00	100	115	-21.20	
	4801.603	49.11	AVG	0.66	49.77	54.00	100	115	-4.23	
	7206.413	48.81	peak	4.27	53.08	74.00	100	235	-20.92	
*	7206.413	46.57	AVG	4.27	50.84	54.00	100	235	-3.16	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:29:47

Humidity:60 %

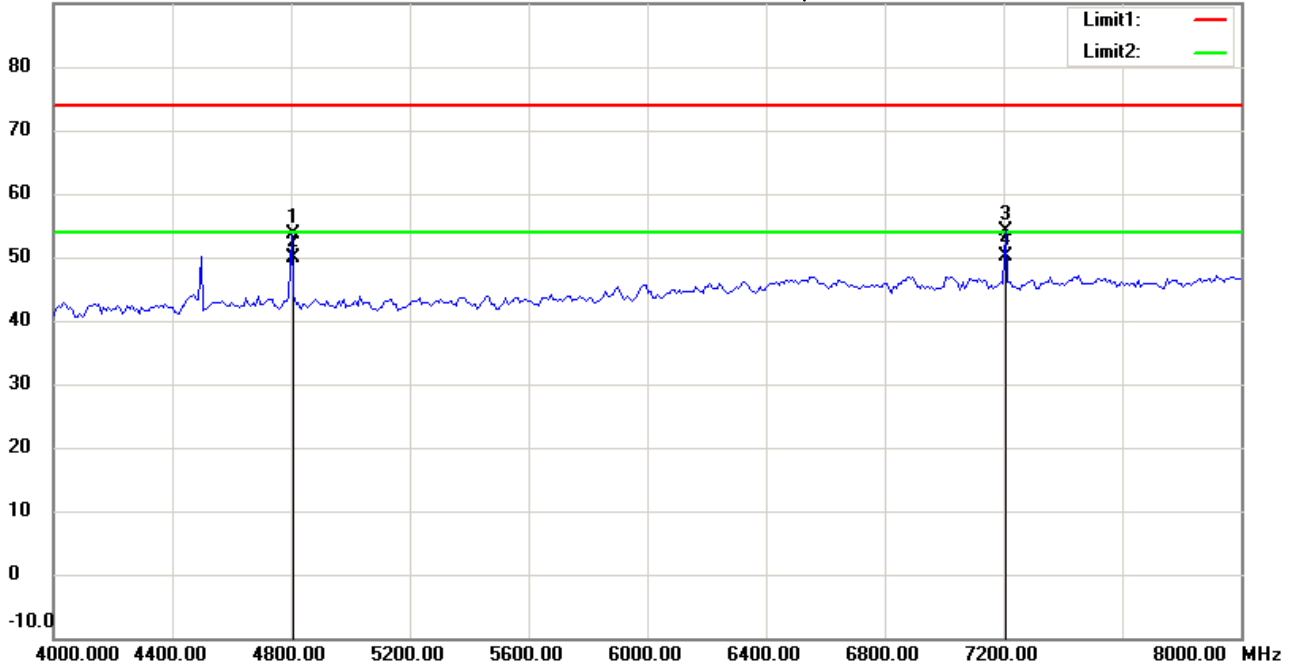

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.080	53.02	peak	0.66	53.68	74.00	100	235	-20.32	
	4804.080	49.33	AVG	0.66	49.99	54.00	100	235	-4.01	
	7206.006	49.87	peak	4.27	54.14	74.00	100	185	-19.86	
*	7206.006	45.94	AVG	4.27	50.21	54.00	100	185	-3.79	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:26:52

Humidity:60 %

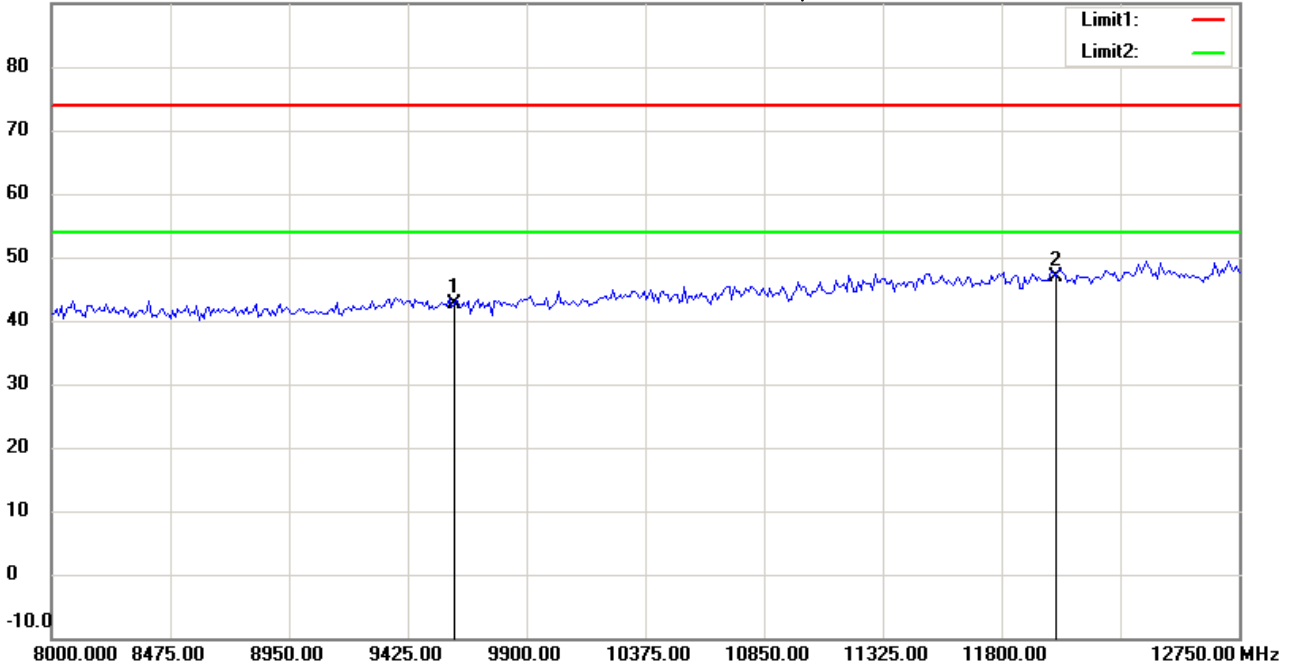

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.98	peak	7.56	42.54	74.00	100	155	-31.46	
*	12010.000	33.92	peak	12.88	46.80	74.00	100	90	-27.20	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:30:00

Humidity:60 %

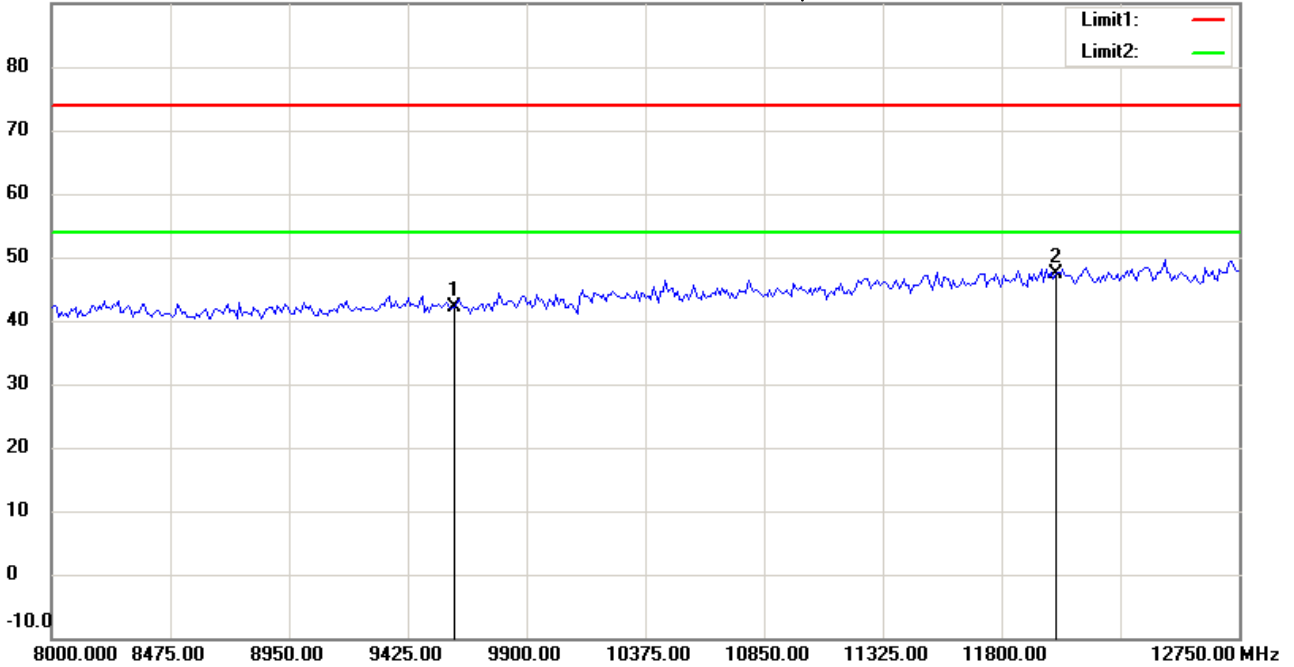

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.62	peak	7.56	42.18	74.00	100	45	-31.82	
*	12010.000	34.56	peak	12.88	47.44	74.00	100	110	-26.56	





Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:27:49

Humidity:60 %

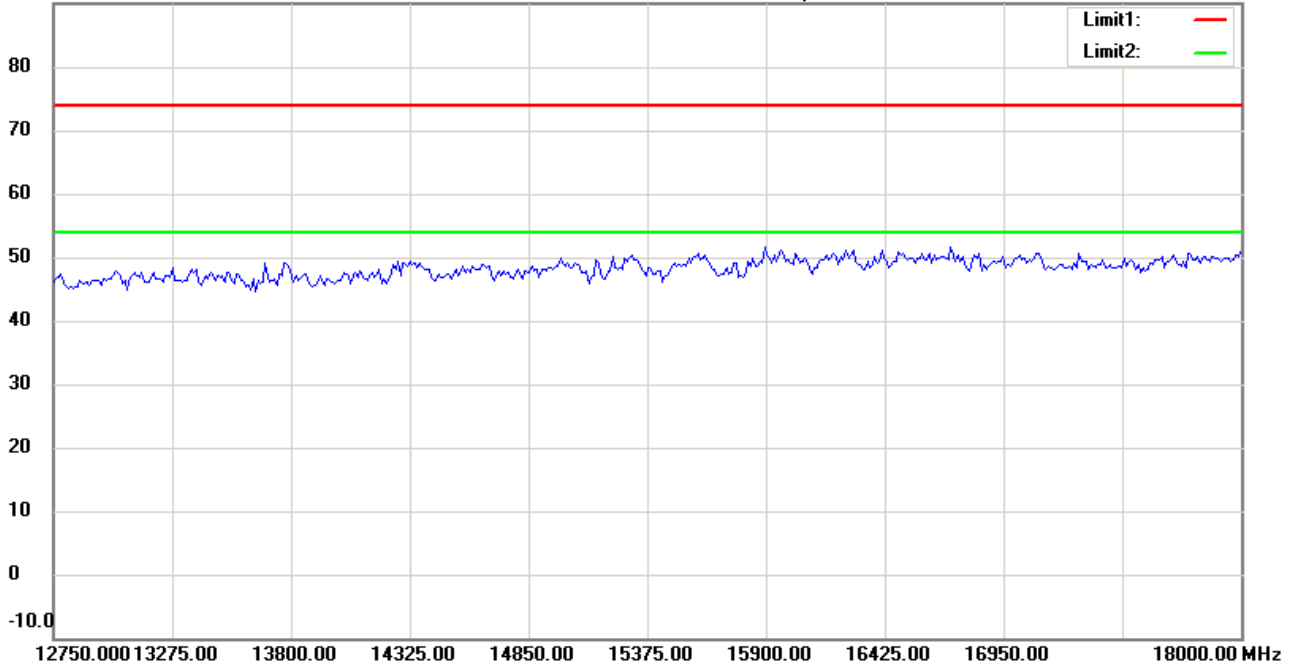

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#9


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:31:01

Humidity:60 %

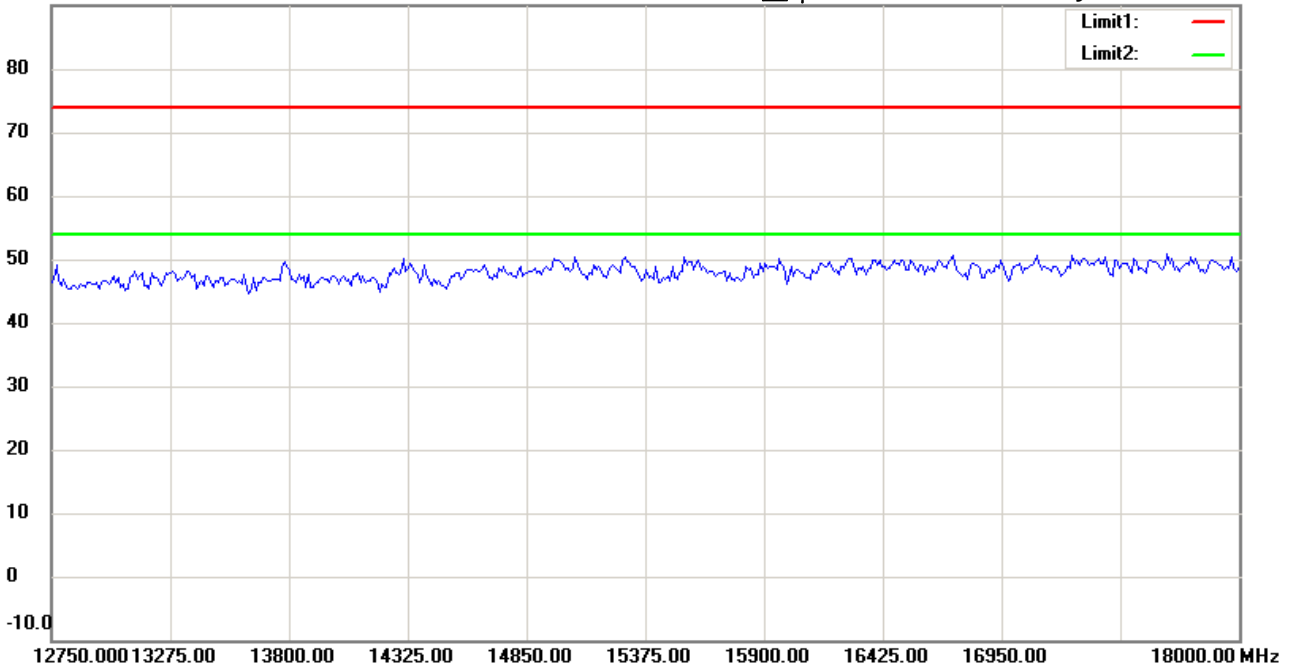

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:27:59

Humidity:60 %

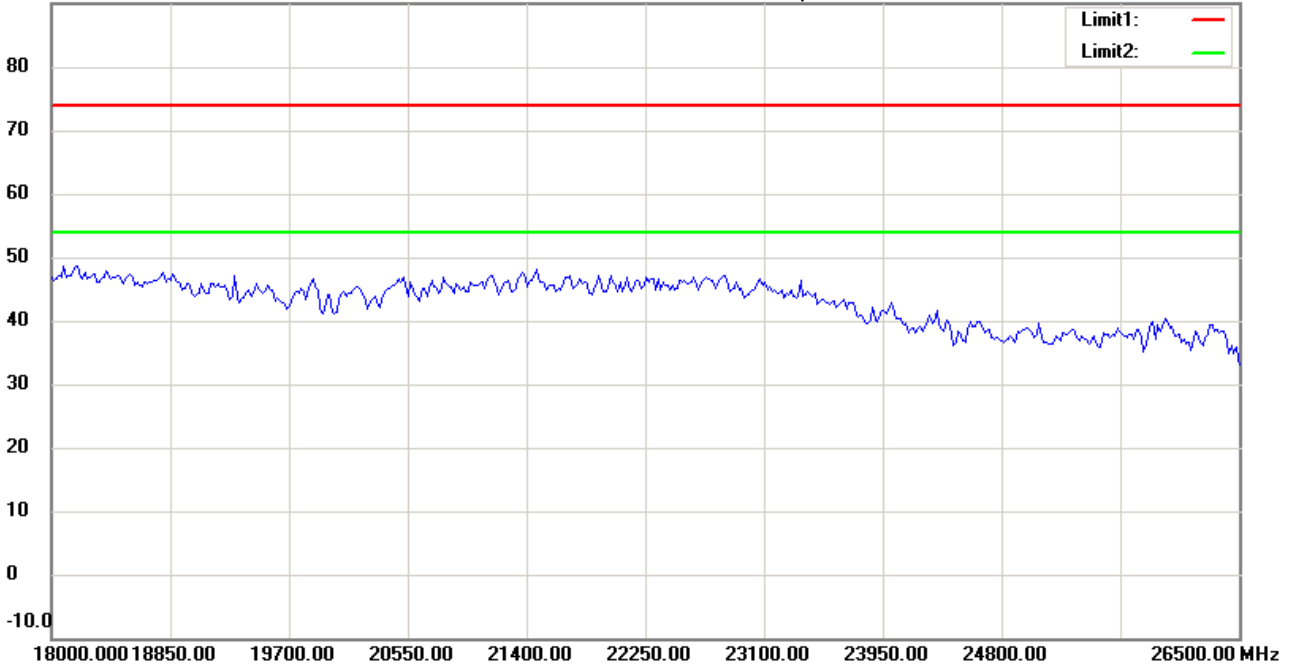

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#10


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 09:31:11

Humidity:60 %

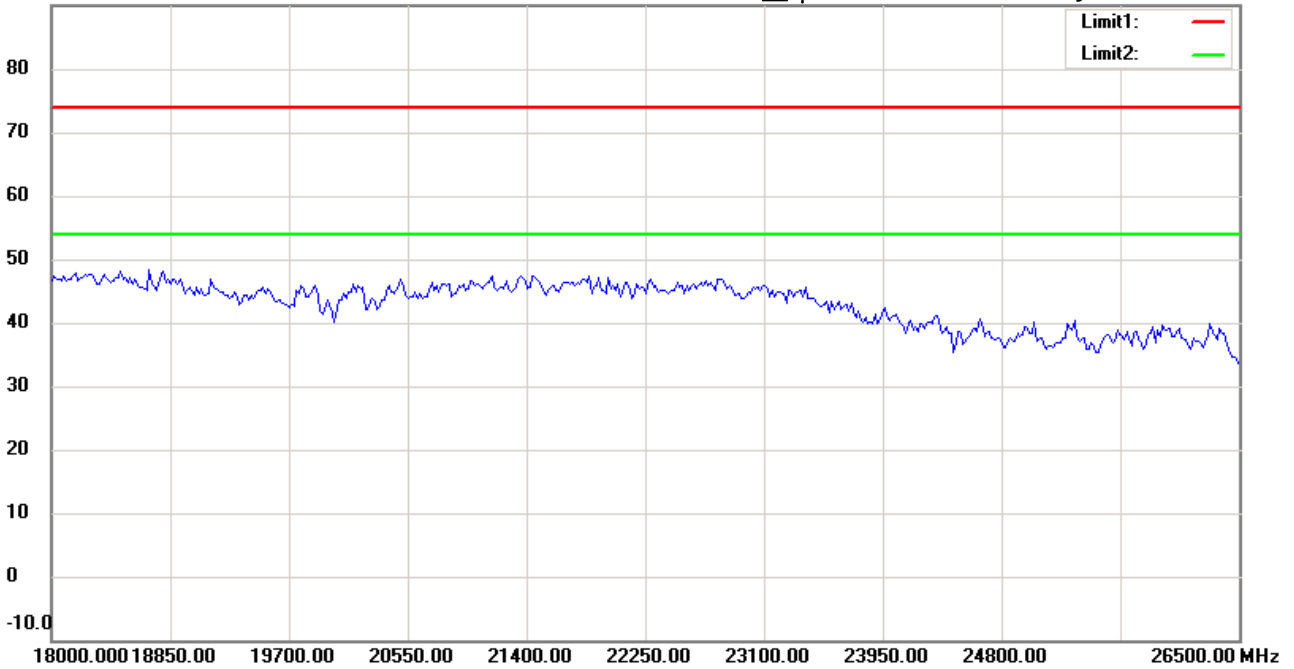

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:31:24

Humidity:60 %

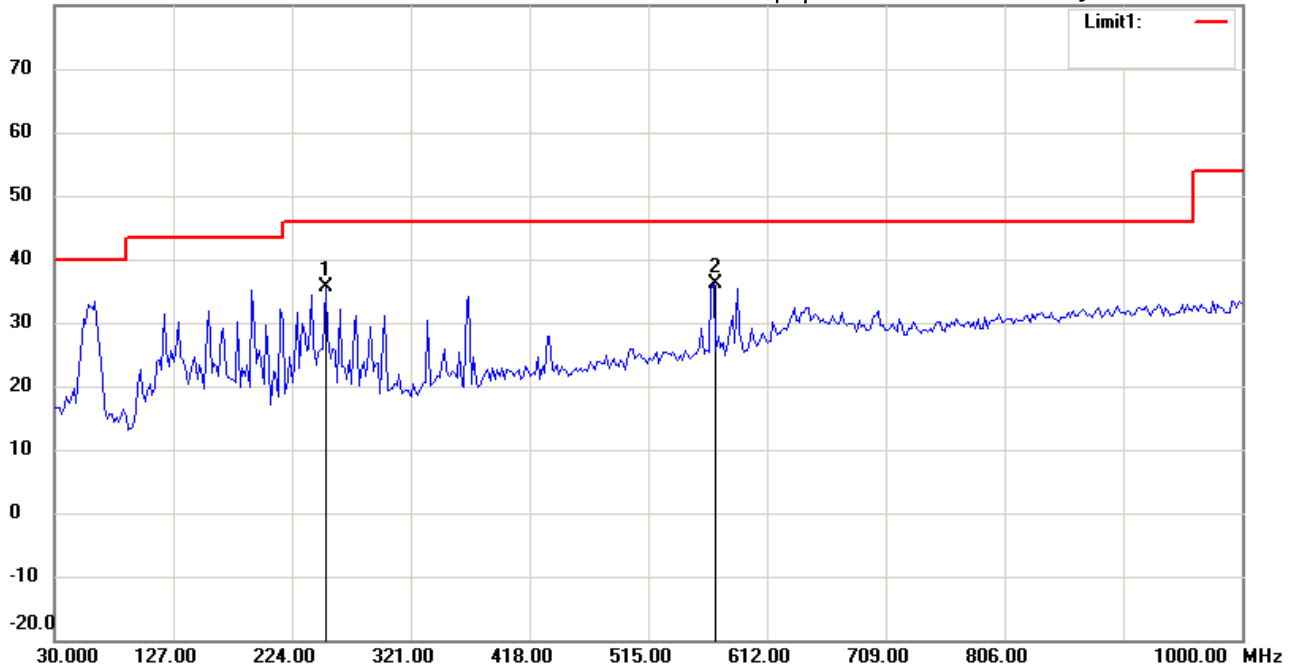

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	251.6032	21.13	peak	14.47	35.60	46.00	100	300	-10.40	
*	568.4570	13.75	peak	22.34	36.09	46.00	100	215	-9.91	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:32:09

Humidity:60 %

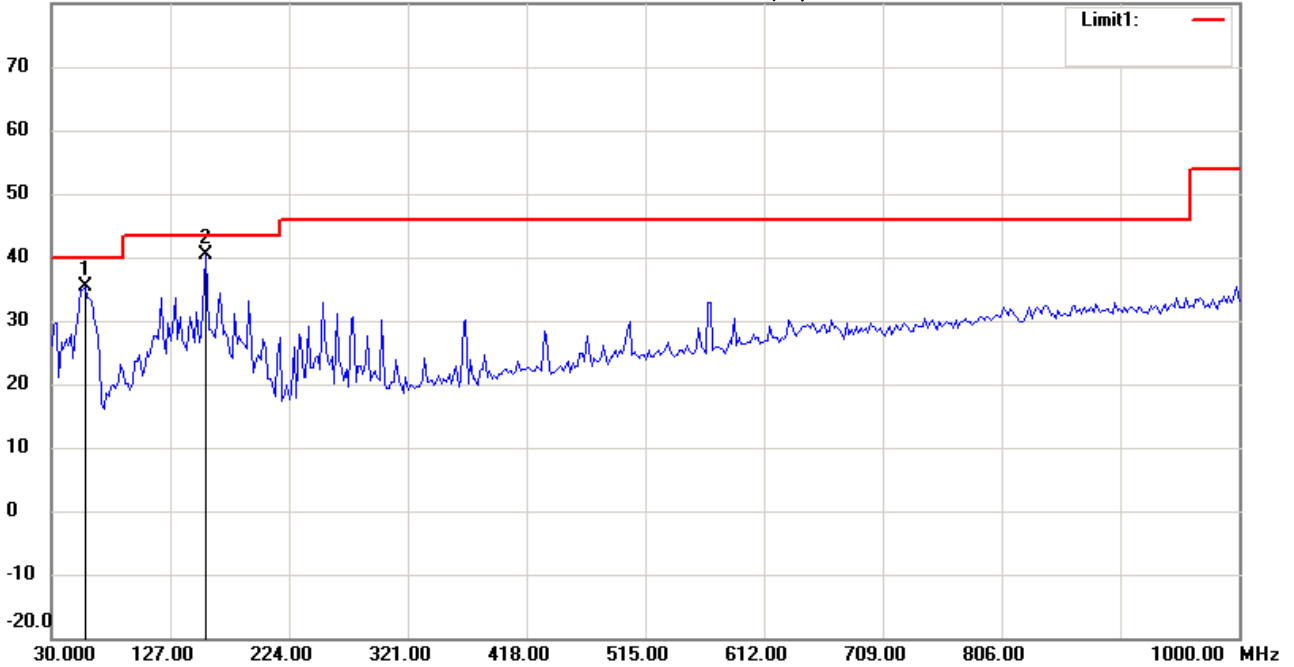

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	57.2144	21.80	peak	13.53	35.33	40.00	100	40	-4.67	
*	156.3527	24.84	peak	15.49	40.33	43.50	100	130	-3.17	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:17:44

Humidity:60 %

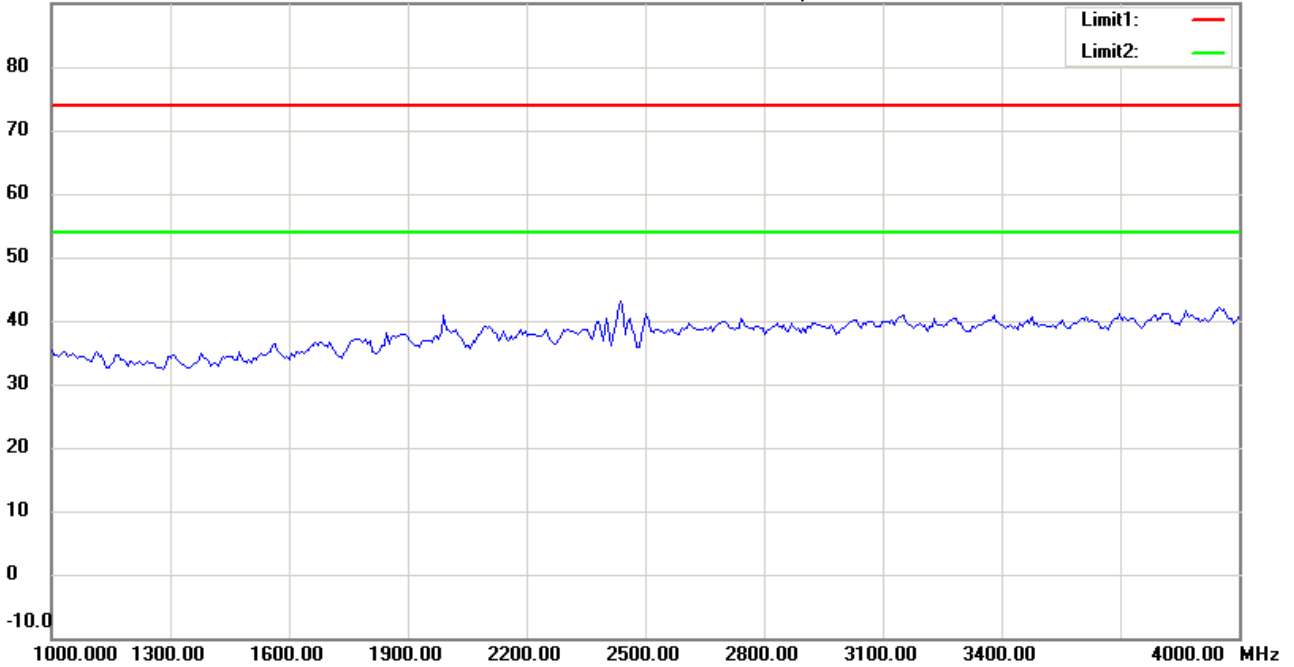

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:20:52

Humidity:60 %

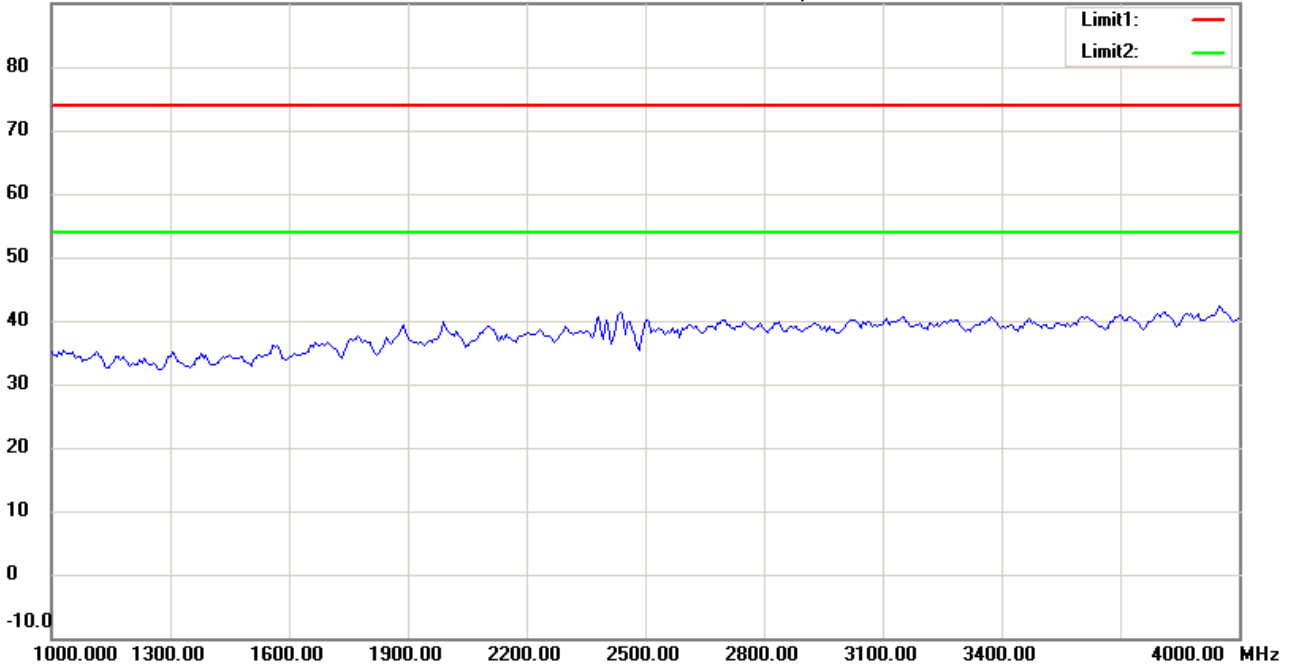

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------





Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:18:38

Humidity:60 %

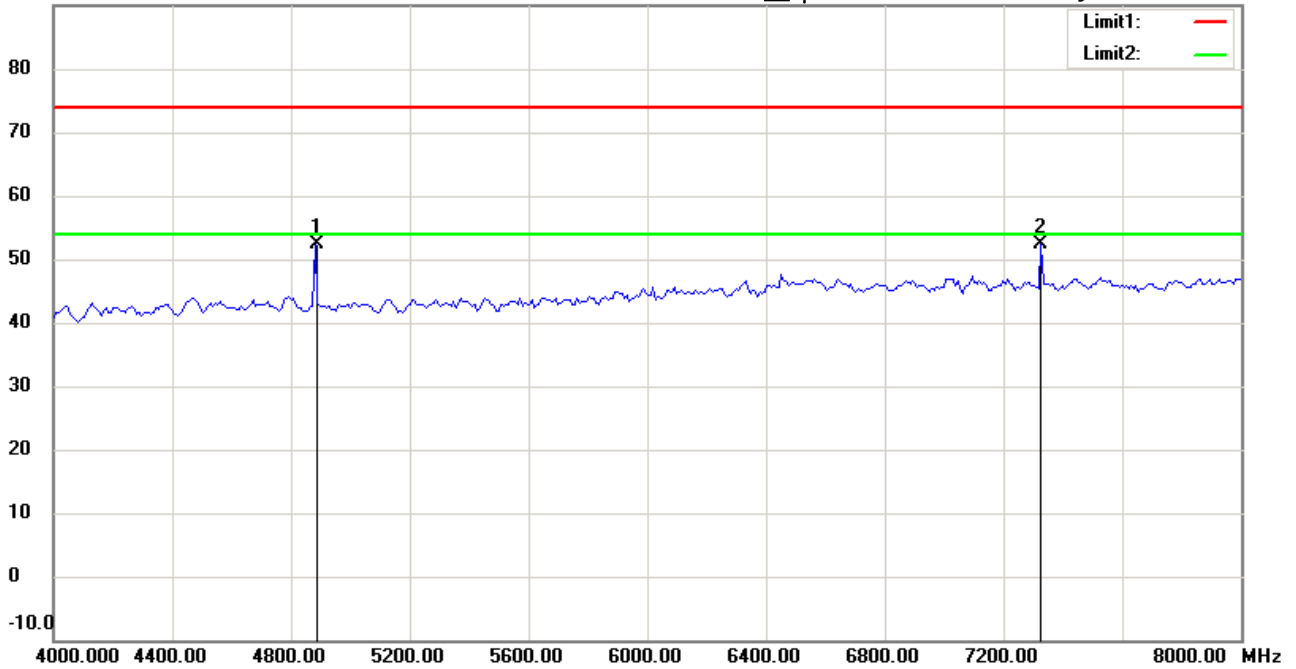

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4881.764	51.70	peak	0.74	52.44	74.00	100	95	-21.56	
	7326.653	47.85	peak	4.45	52.30	74.00	100	220	-21.70	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:21:46

Humidity:60 %

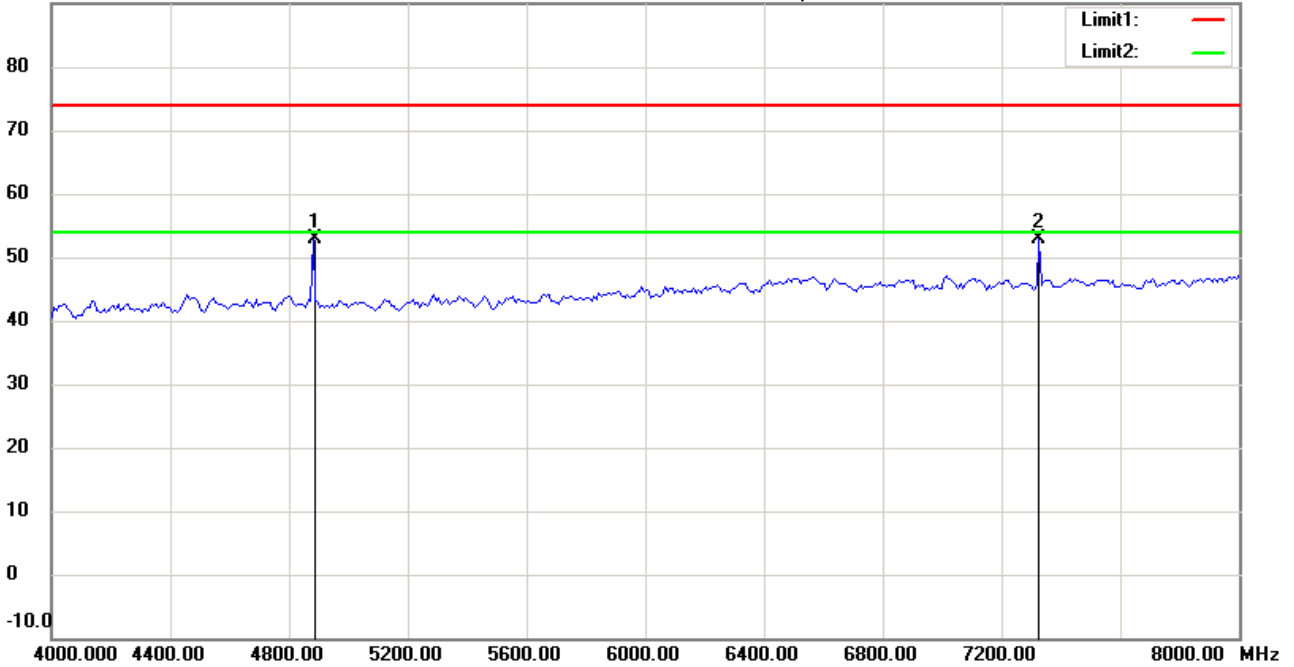

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4881.764	52.20	peak	0.74	52.94	74.00	100	135	-21.06	
	7326.653	48.47	peak	4.45	52.92	74.00	100	240	-21.08	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:18:51

Humidity:60 %

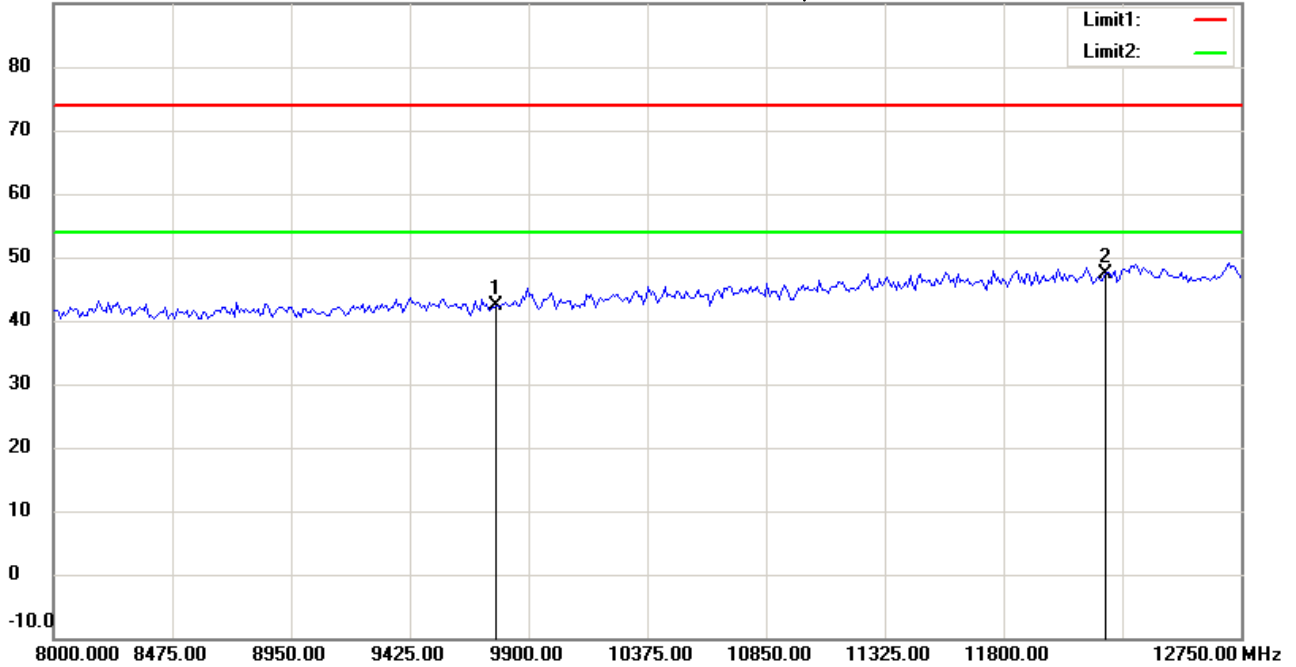

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.68	peak	7.67	42.35	74.00	100	75	-31.65	
*	12205.000	33.58	peak	13.81	47.39	74.00	100	115	-26.61	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:21:59

Humidity:60 %

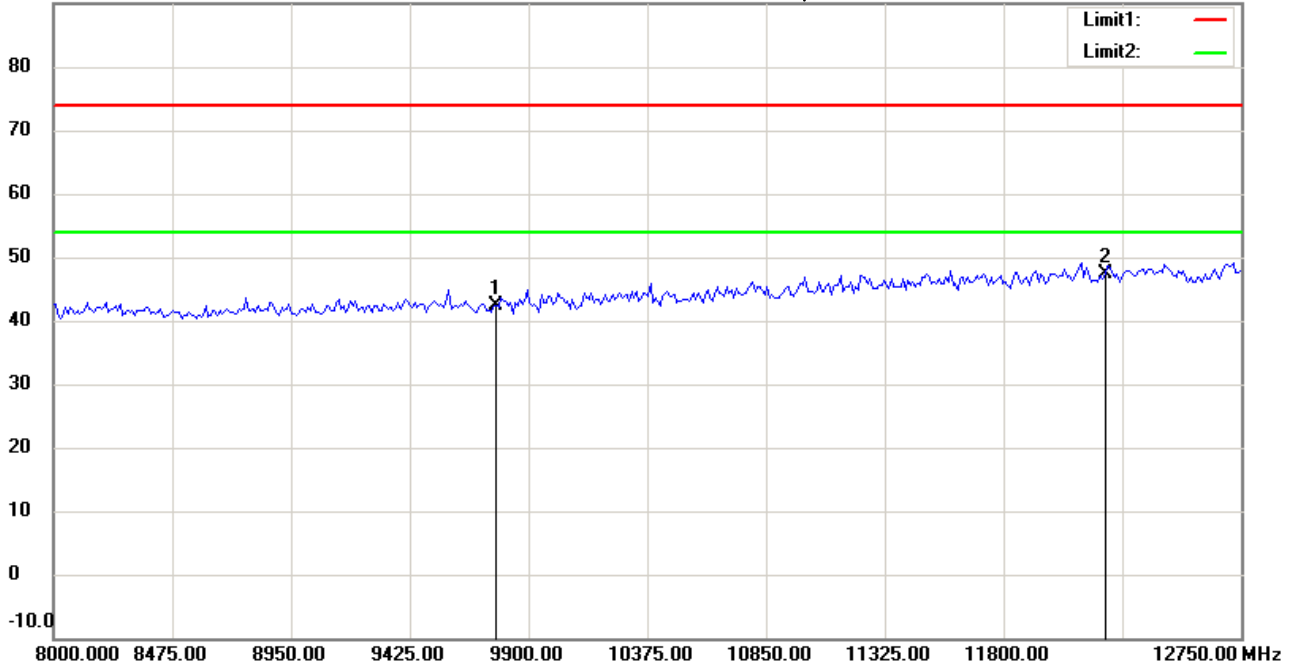

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.75	peak	7.67	42.42	74.00	100	215	-31.58	
*	12205.000	33.46	peak	13.81	47.27	74.00	100	170	-26.73	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:19:48

Humidity:60 %

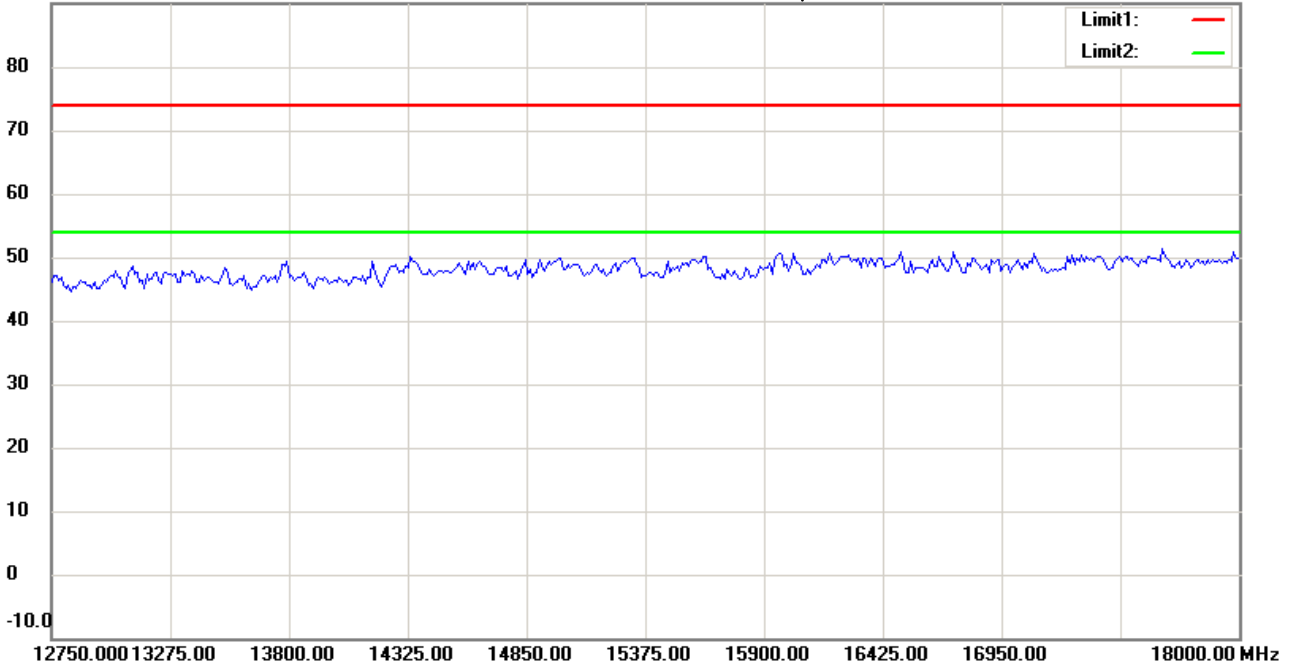

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#9


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:23:00

Humidity:60 %

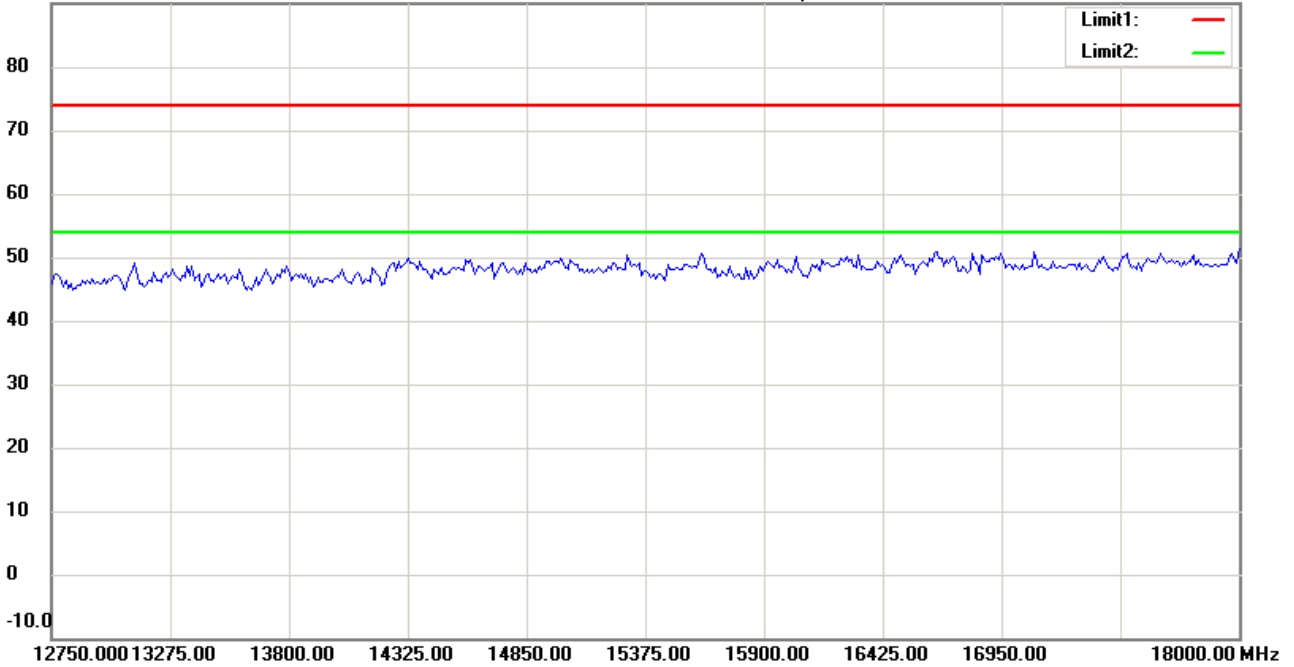

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:19:58

Humidity:60 %

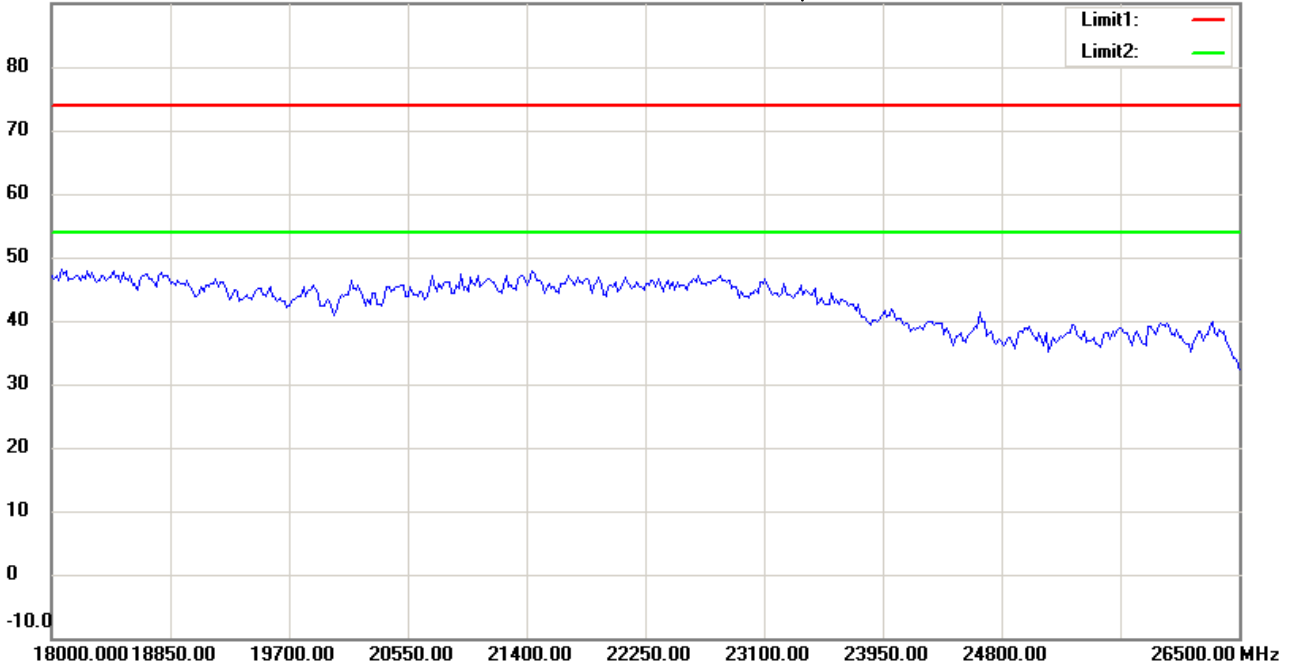

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#10


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:23:10

Humidity:60 %

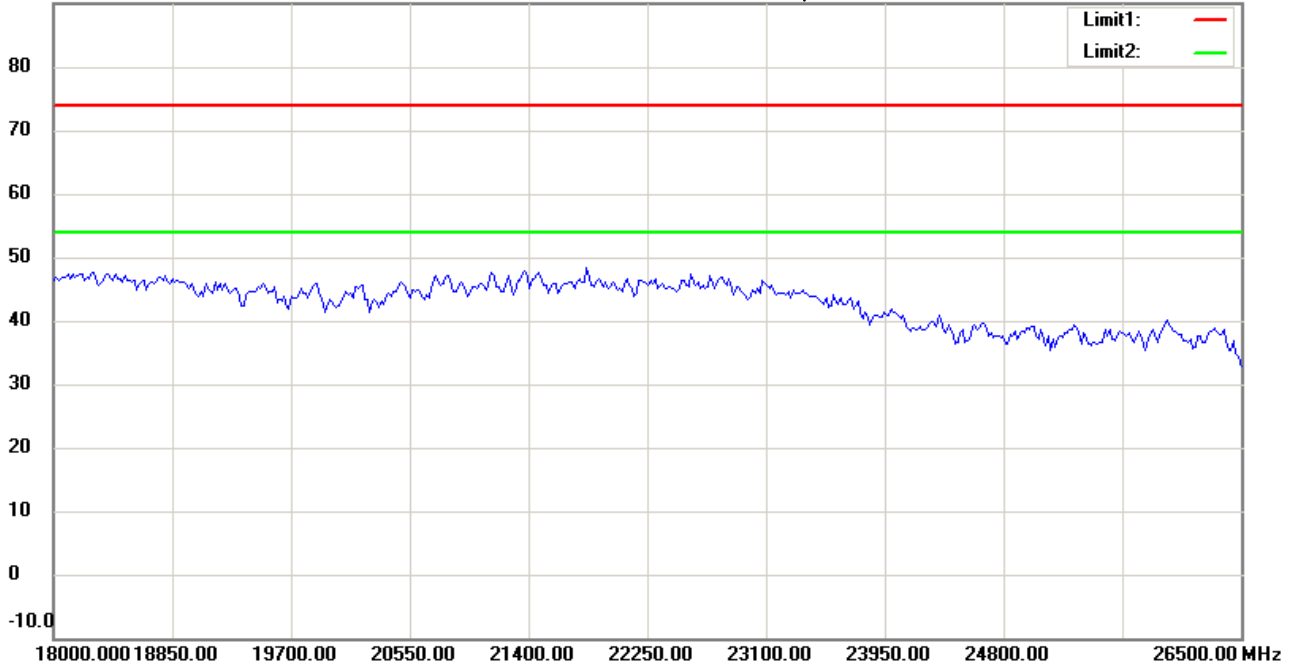

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

EUT : W6M21412-14665

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------





Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:33:27

Humidity:60 %

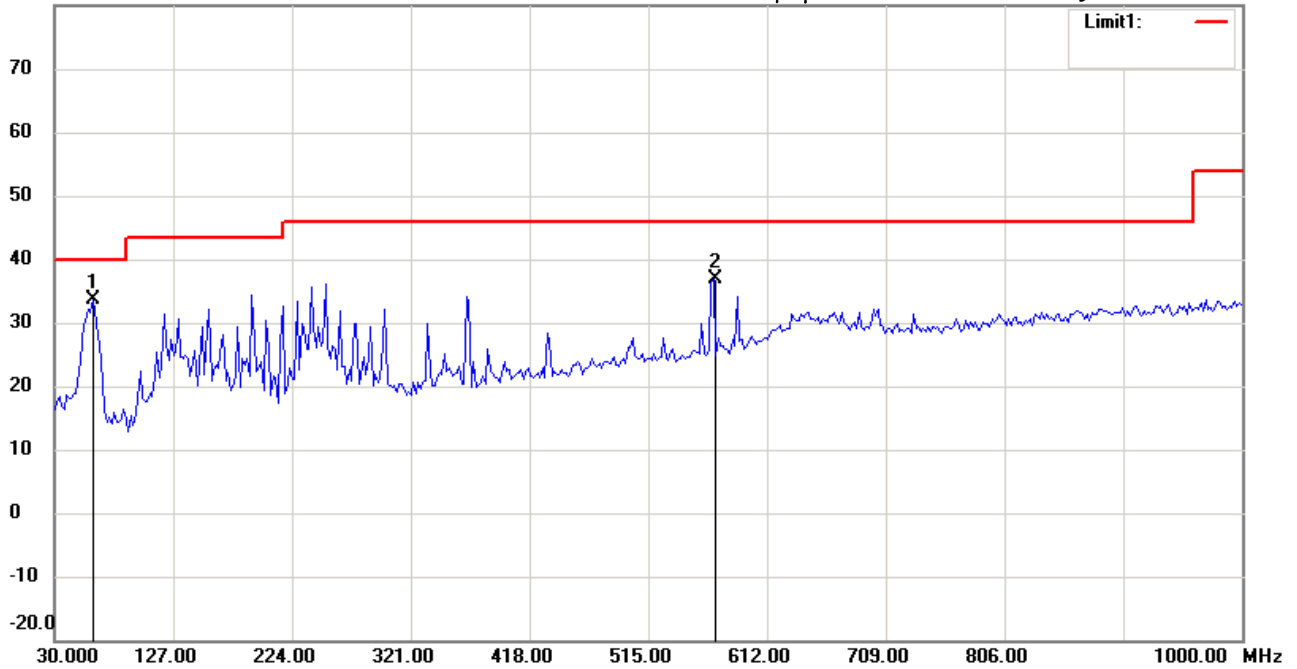

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	61.1022	20.67	peak	12.98	33.65	40.00	100	240	-6.35	
	568.4570	14.63	peak	22.34	36.97	46.00	100	175	-9.03	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:34:12

Humidity:60 %

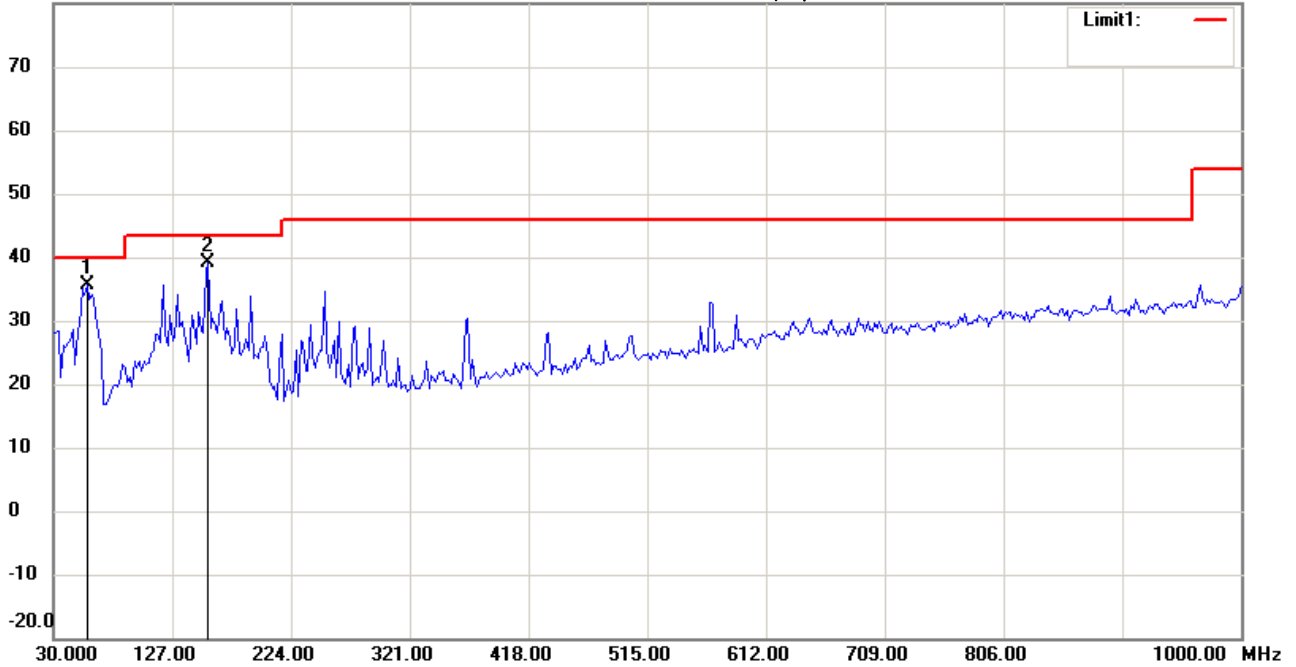

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_30-1000MHz

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	57.2144	22.14	peak	13.53	35.67	40.00	100	60	-4.33	
	156.3527	23.56	peak	15.49	39.05	43.50	100	155	-4.45	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:30:44

Humidity:60 %

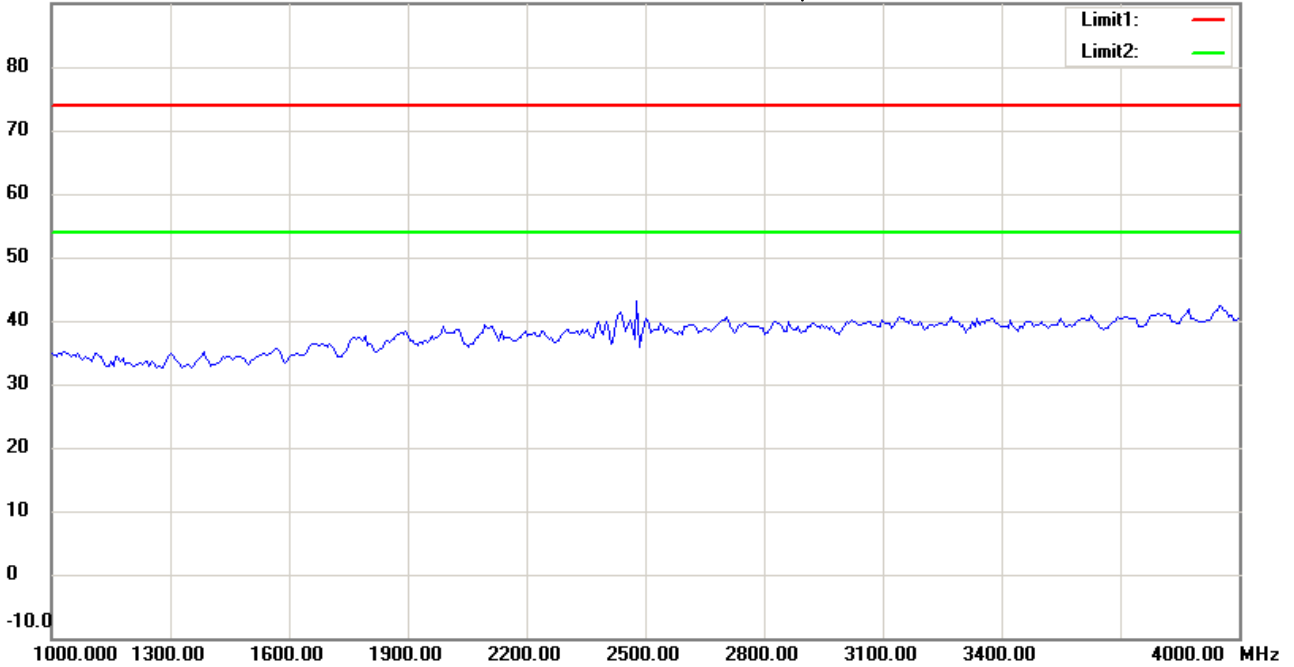

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:33:52

Humidity:60 %

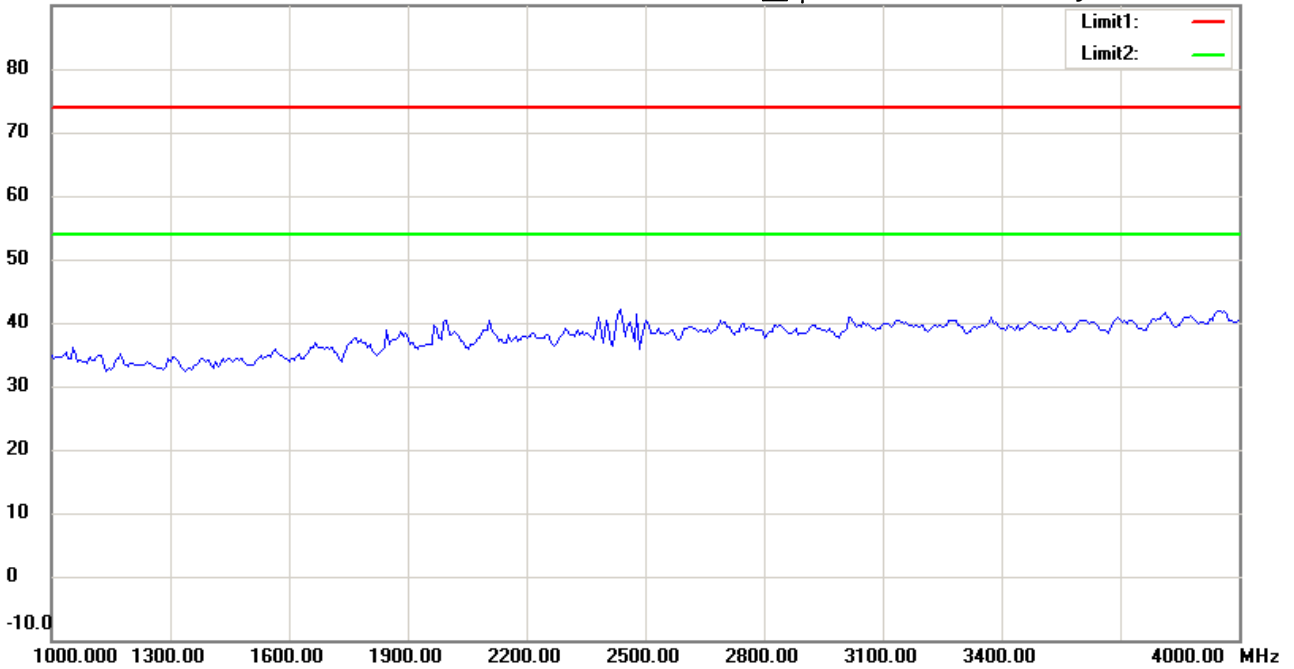

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:31:38

Humidity:60 %

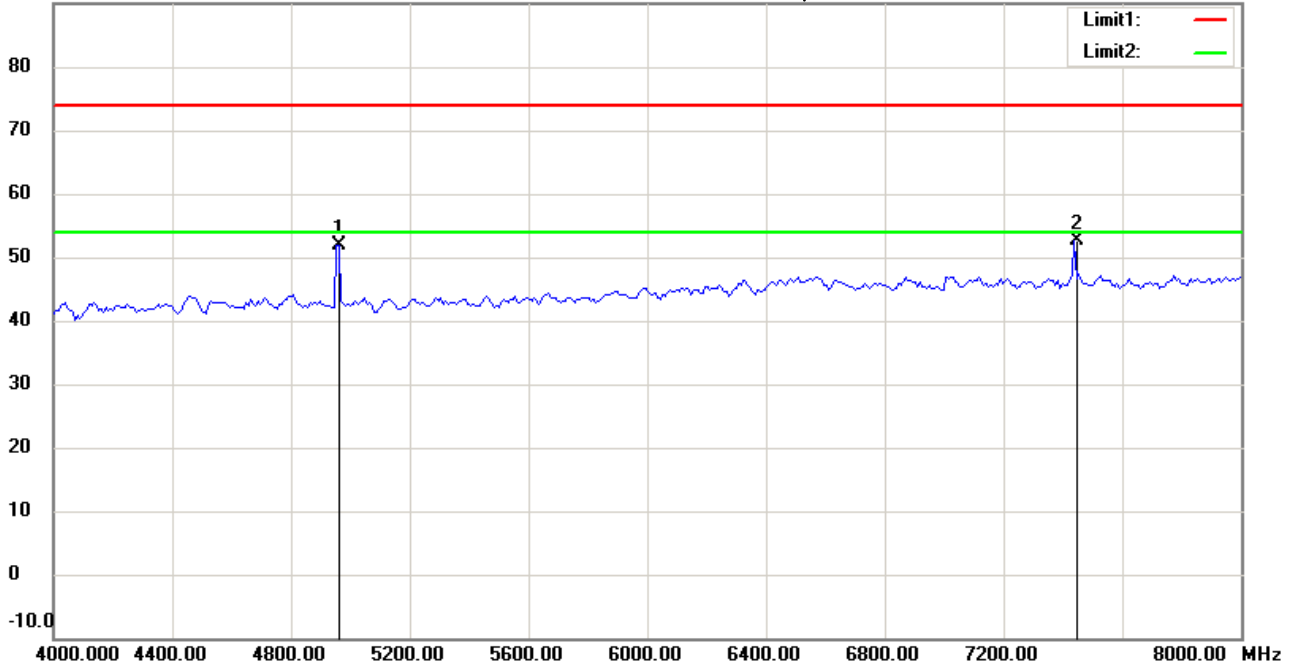

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4953.908	51.12	peak	0.87	51.99	74.00	100	220	-22.01	
*	7438.878	47.83	peak	4.73	52.56	74.00	100	145	-21.44	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:34:46

Humidity:60 %

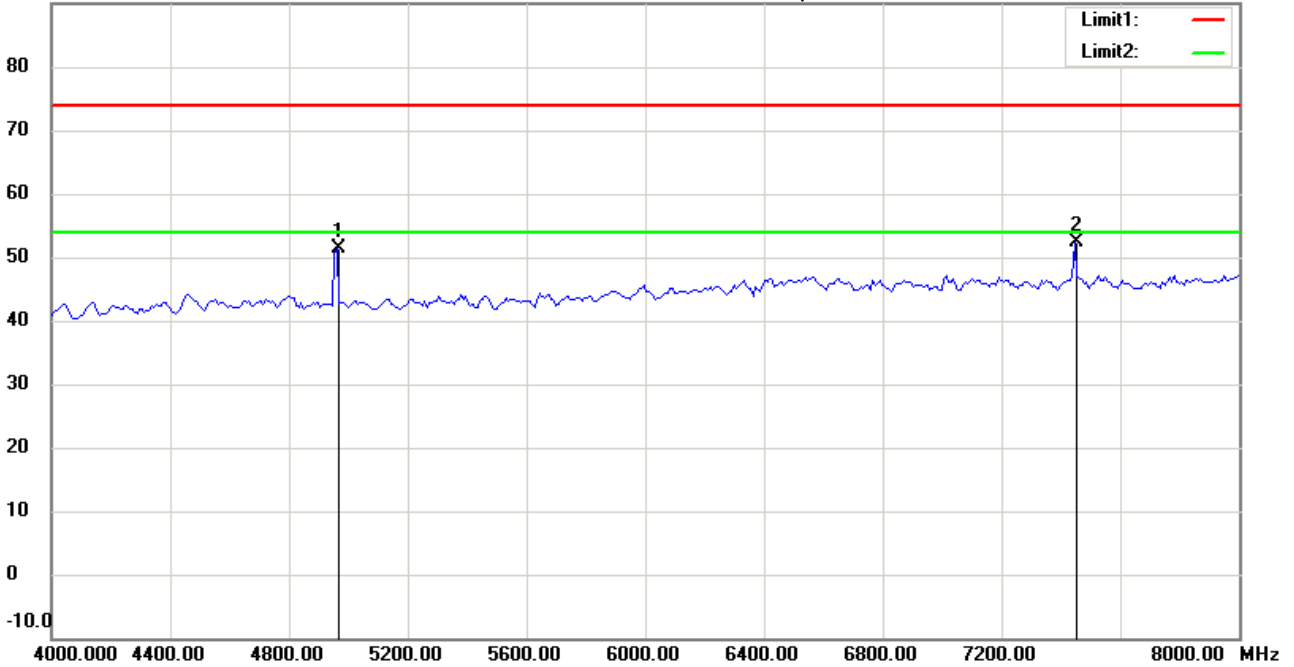

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4961.924	50.53	peak	0.88	51.41	74.00	100	230	-22.59	
*	7446.894	47.67	peak	4.72	52.39	74.00	100	155	-21.61	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:31:51

Humidity:60 %

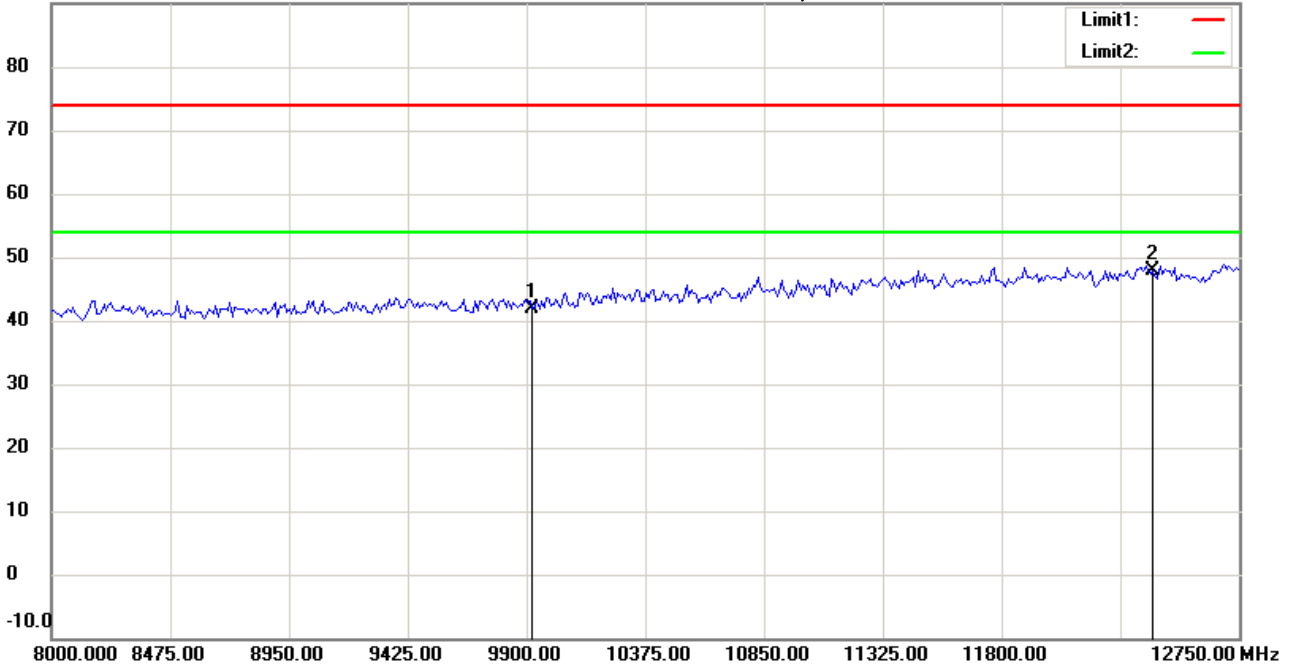

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.92	peak	8.05	41.97	74.00	100	75	-32.03	
*	12400.000	33.63	peak	14.27	47.90	74.00	100	160	-26.10	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:34:59

Humidity:60 %

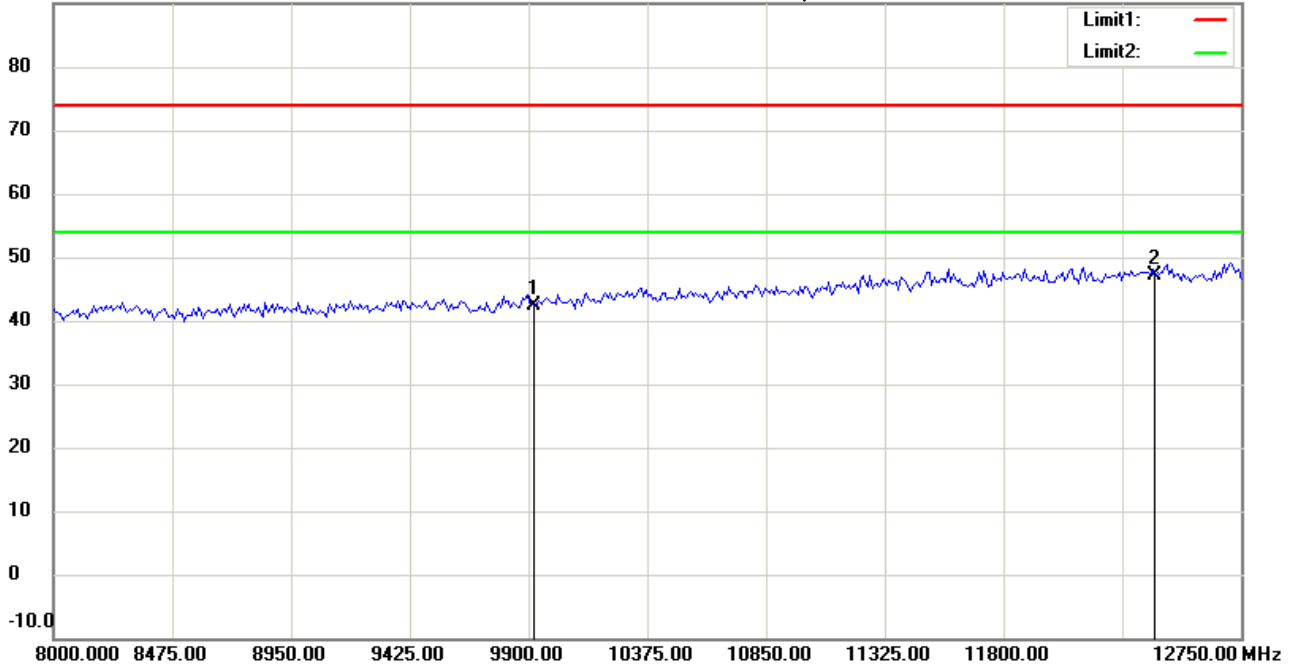

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.23	peak	8.05	42.28	74.00	100	120	-31.72	
*	12400.000	32.90	peak	14.27	47.17	74.00	100	135	-26.83	





Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:32:48

Humidity:60 %

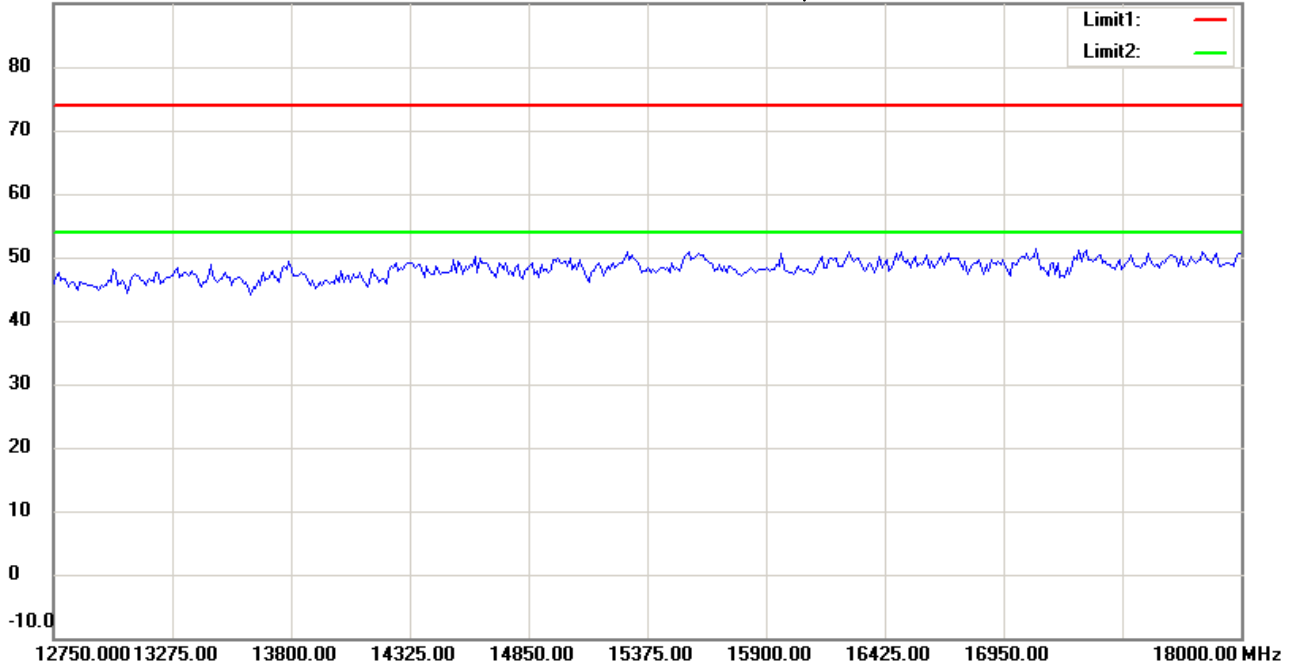

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

EUT : W6M21412-14665

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



**Radiated Emission Measurement**

Operator: Leon

File :3

Data :#9


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:36:00

Humidity:60 %

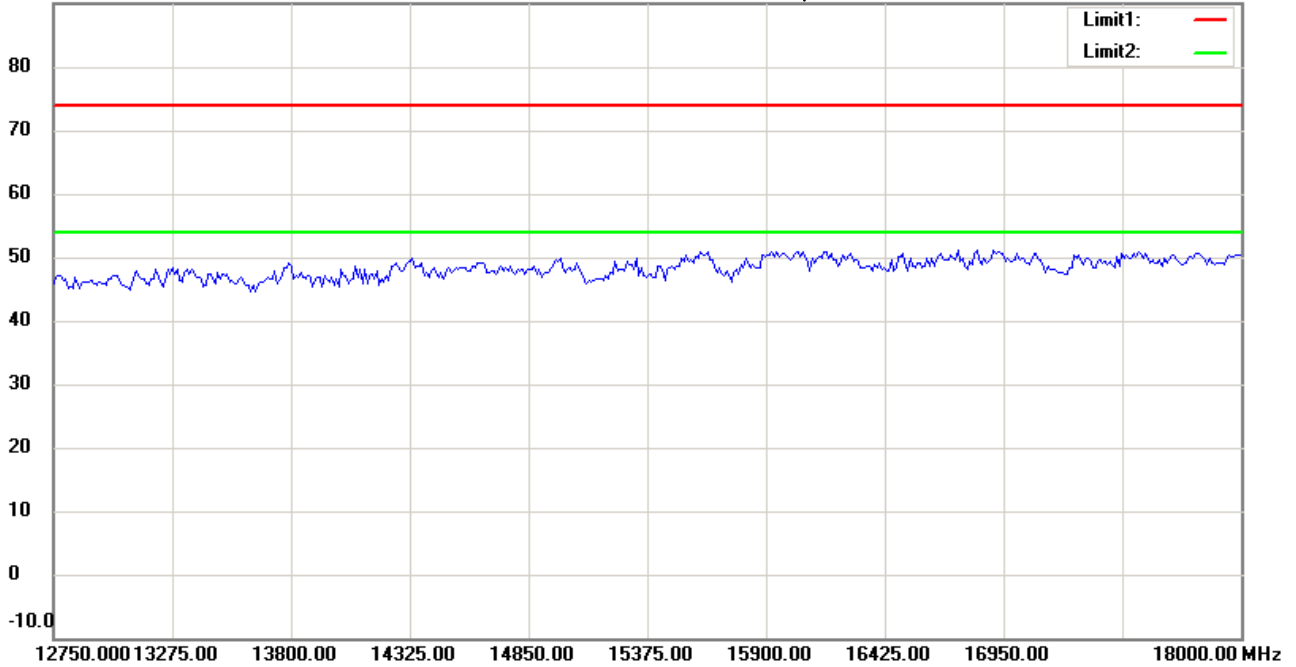

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:32:58

Humidity:60 %

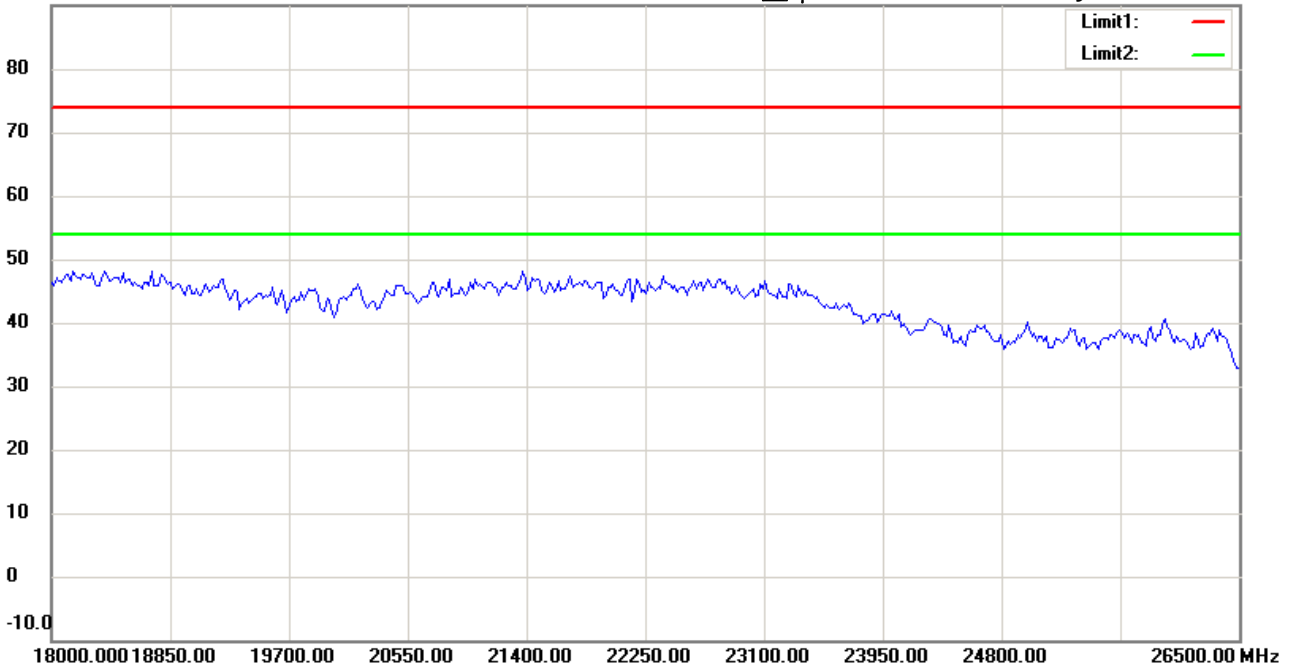

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#10


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:36:10

Humidity:60 %

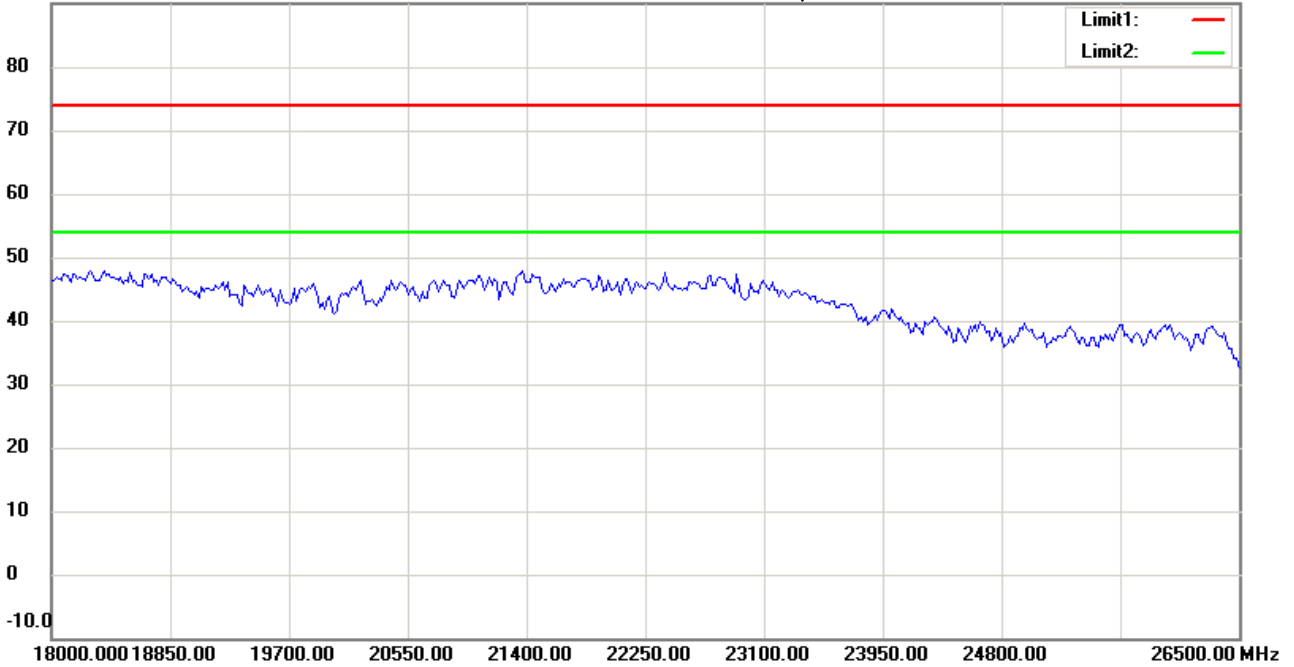

Site : Chamber

Condition : FCC\_part 15 RE-Class C\_Above 1GHz\_PK

EUT : W6M21412-14665

M/N:

Test Mode : TX 2480MHz


Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



***Worldwide Testing Services(Taiwan) Co., Ltd.***

---

Measurement diagrams

Spurious Emission Radiated \_RX



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:41:12

Humidity:60 %

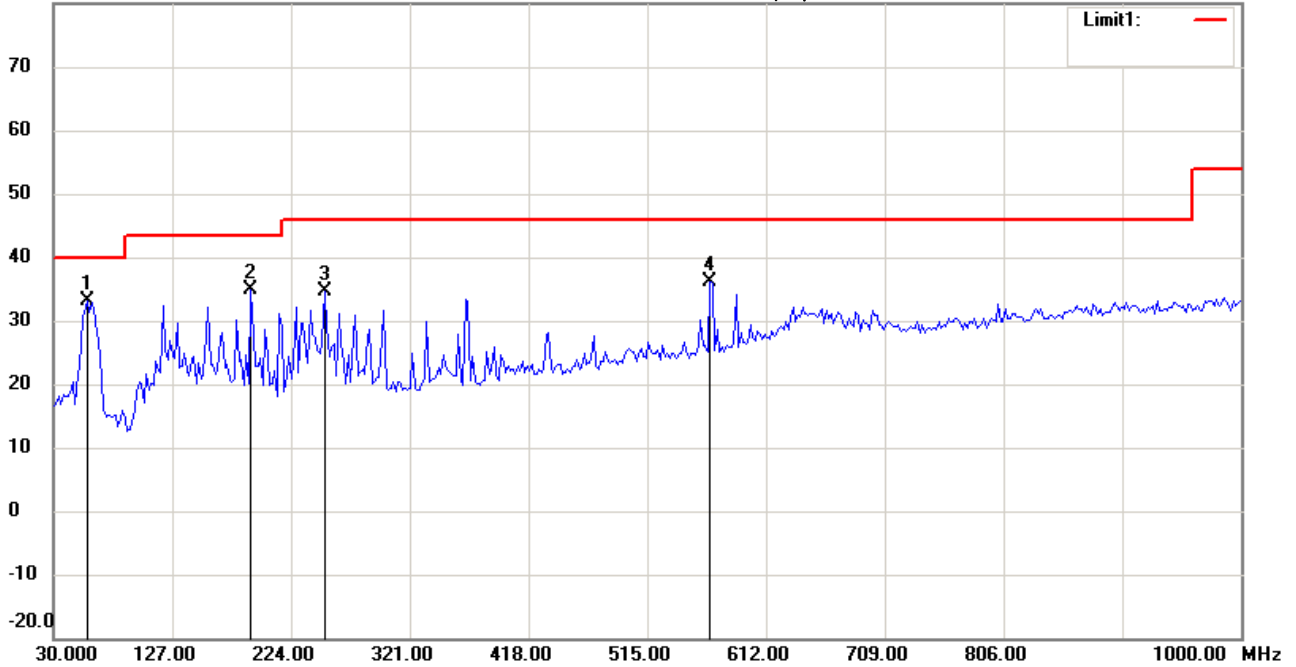

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	57.2144	19.50	peak	13.53	33.03	40.00	100	110	-6.97	
	191.3427	22.39	peak	12.58	34.97	43.50	100	165	-8.53	
	251.6032	20.06	peak	14.47	34.53	46.00	100	240	-11.47	
	566.5130	13.95	peak	22.28	36.23	46.00	100	325	-9.77	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:41:58

Humidity:60 %

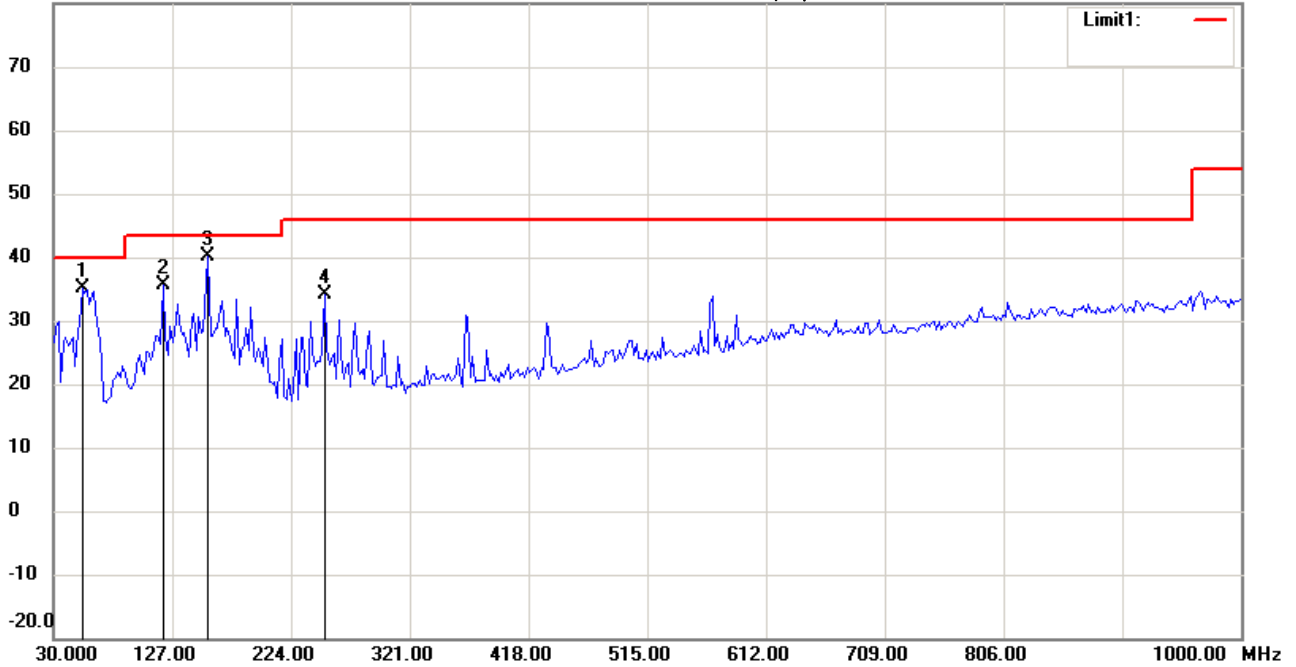

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	53.3267	21.07	peak	14.12	35.19	40.00	100	185	-4.81	
	119.4188	21.78	peak	13.94	35.72	43.50	100	250	-7.78	
*	156.3527	24.68	peak	15.49	40.17	43.50	100	340	-3.33	
	251.6032	19.61	peak	14.47	34.08	46.00	100	305	-11.92	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:49:32

Humidity:60 %

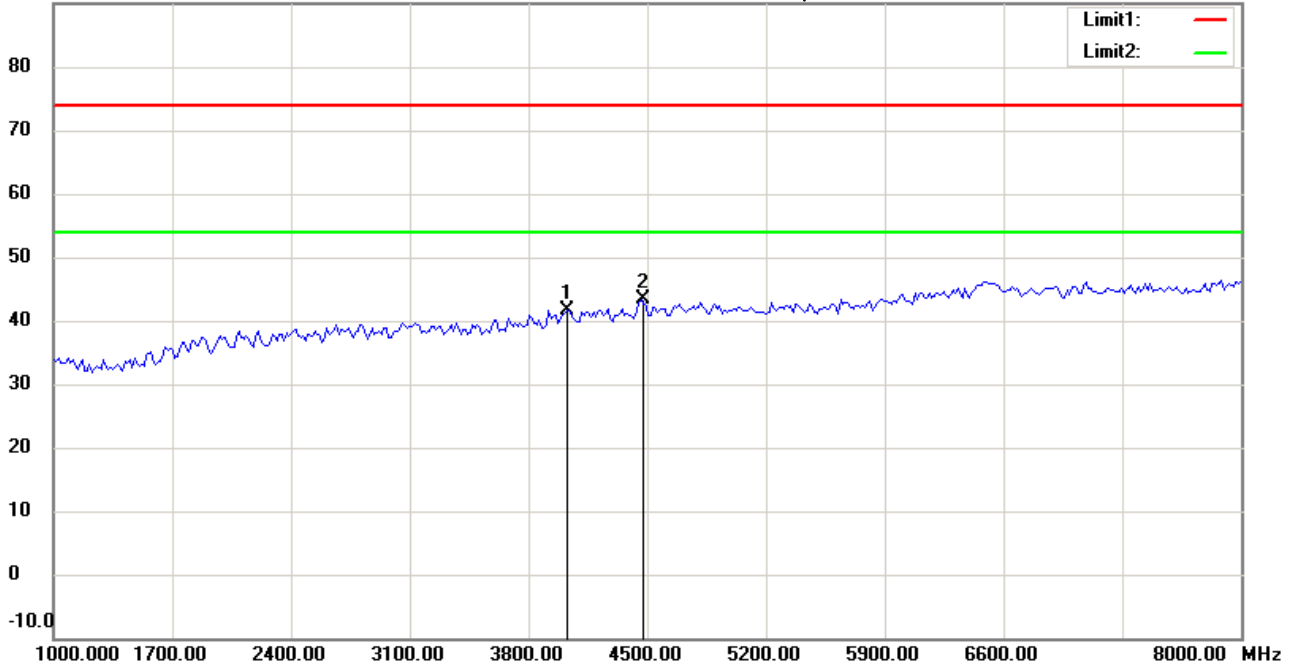

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4030.060	42.42	peak	-0.67	41.75	74.00	100	55	-32.25	
*	4464.930	43.24	peak	0.16	43.40	74.00	100	90	-30.60	





Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:50:25

Humidity:60 %

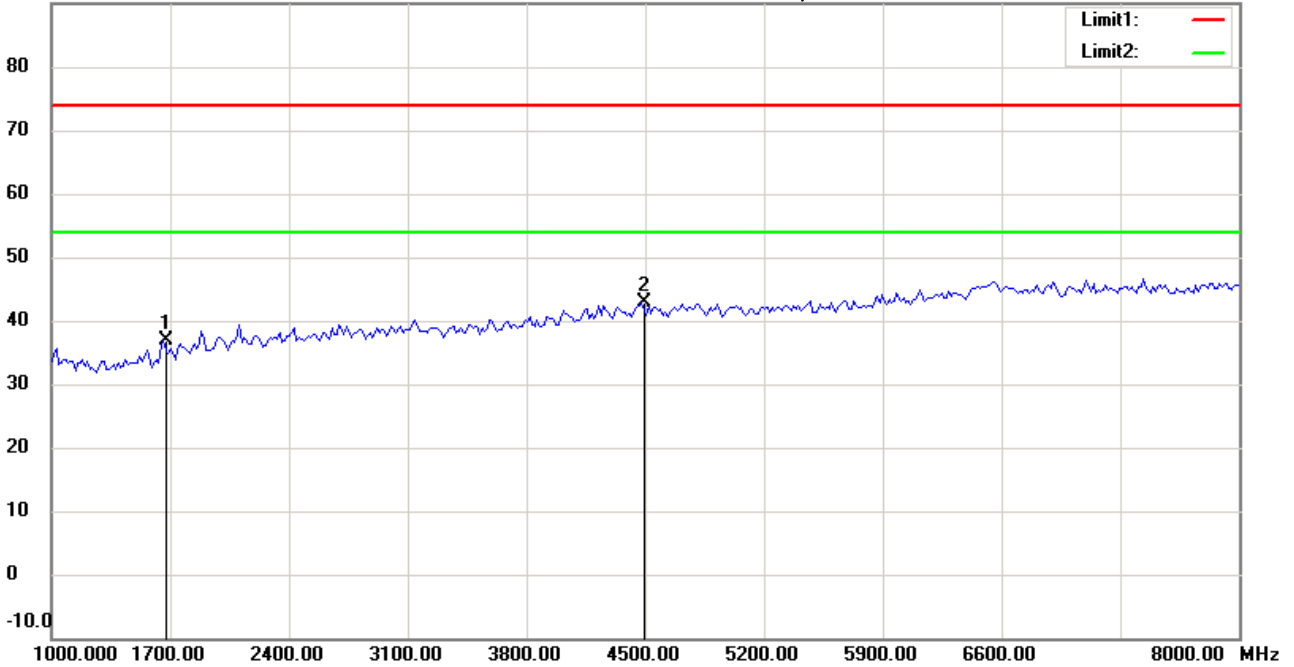

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1659.319	44.85	peak	-7.87	36.98	74.00	100	30	-37.02	
*	4478.958	42.54	peak	0.32	42.86	74.00	100	95	-31.14	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:49:43

Humidity:60 %

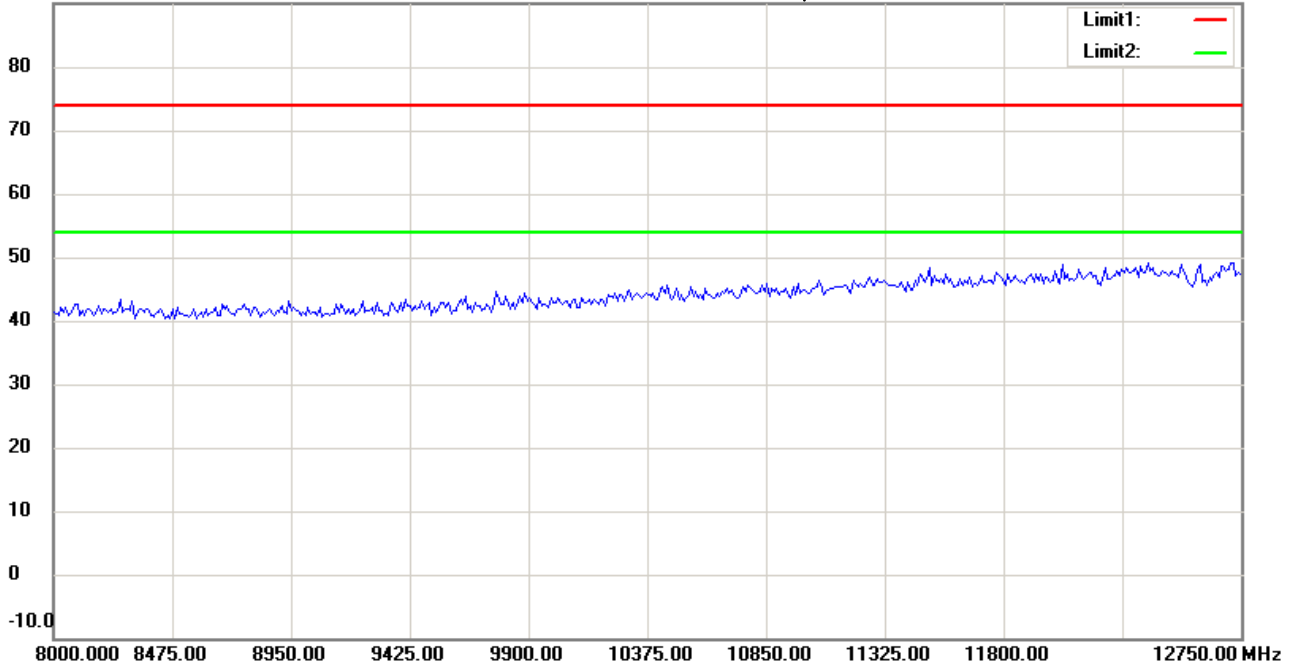

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:50:37

Humidity:60 %

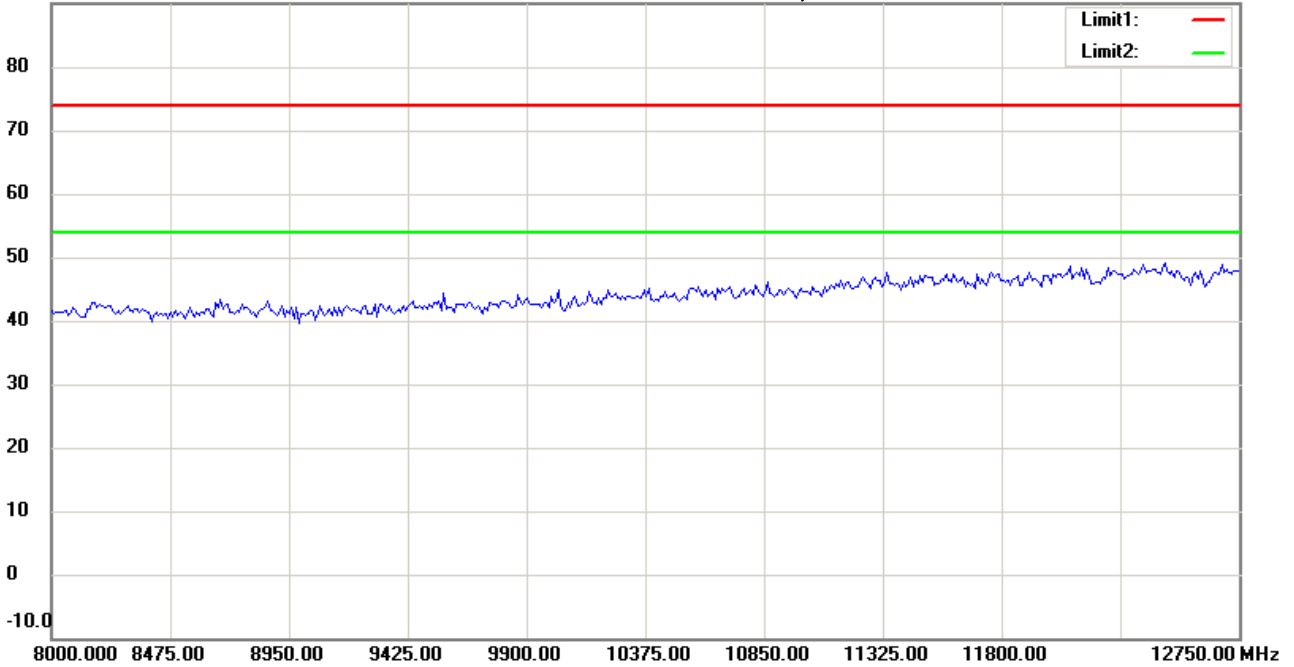

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:50:08

Humidity:60 %

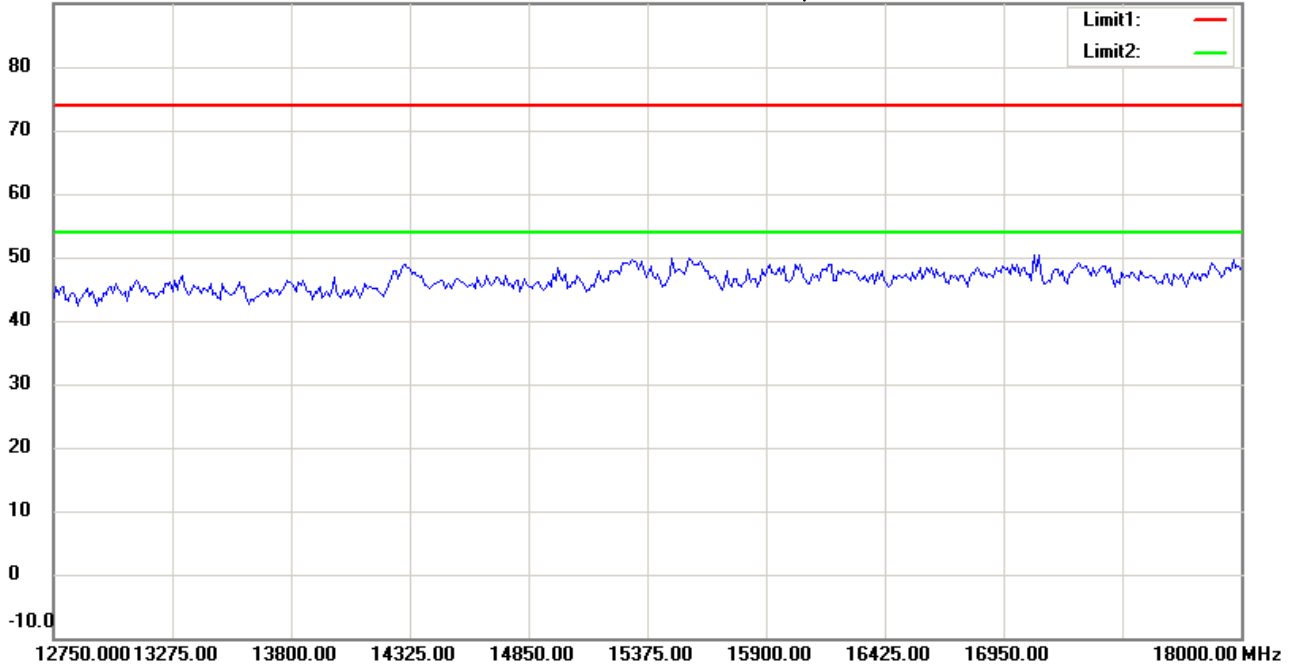

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:51:01

Humidity:60 %

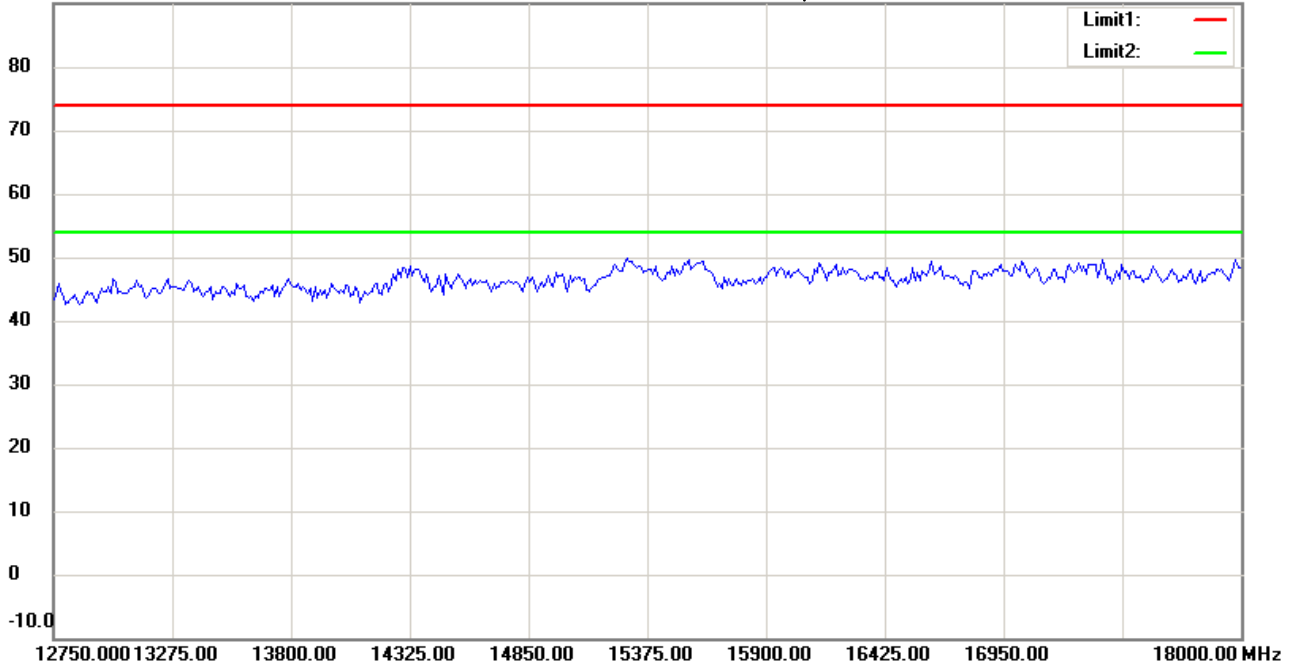

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:50:18

Humidity:60 %

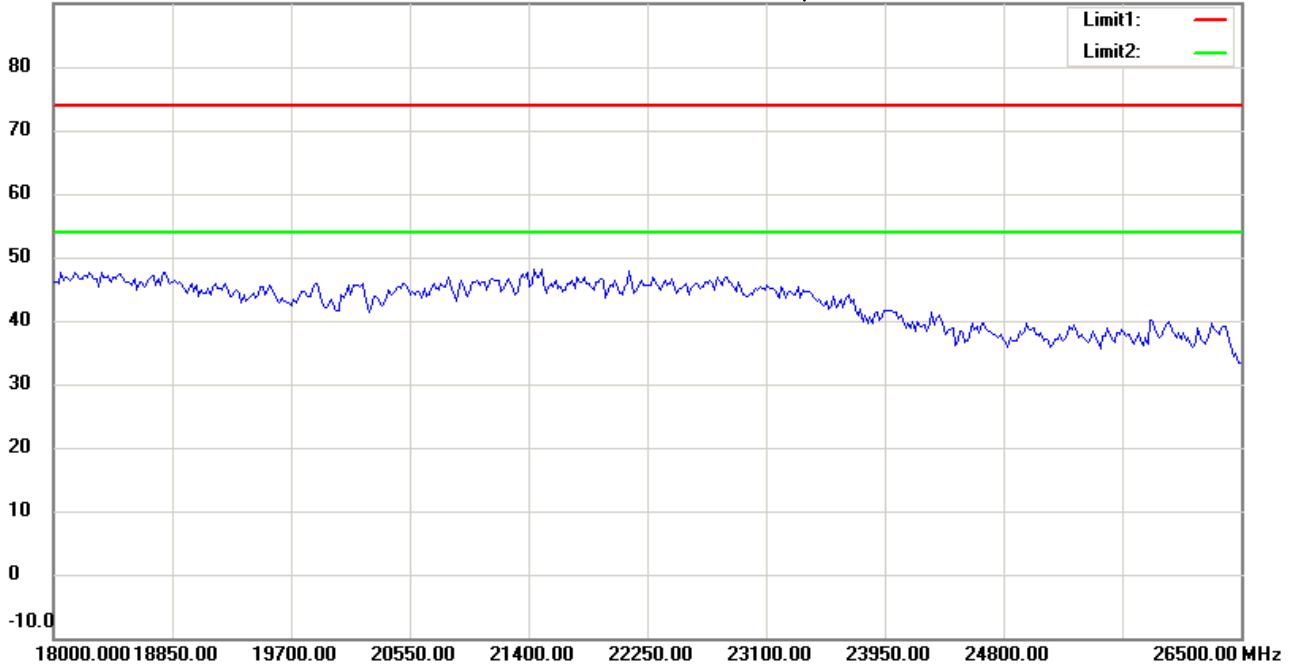

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei  
 Tel:+886-2-6606-8877  
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:51:11

Humidity:60 %

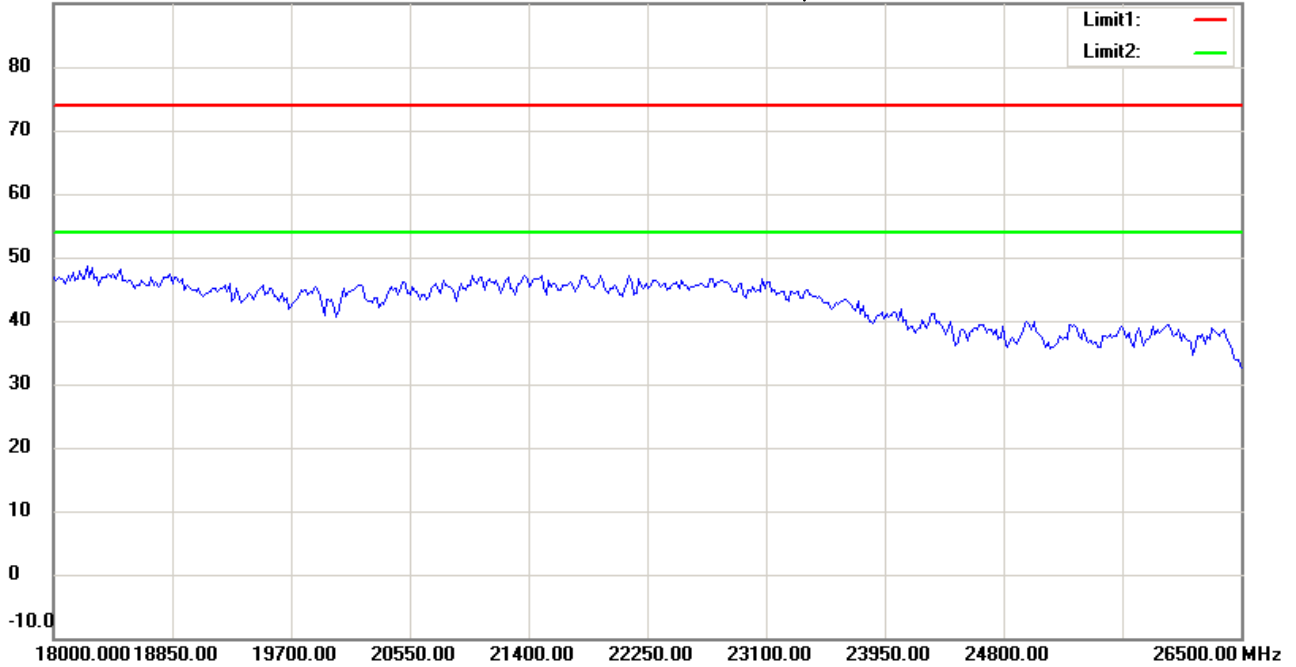

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

\*:Maximum data    x:Over limit    !:over margin



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:38:02

Humidity:60 %

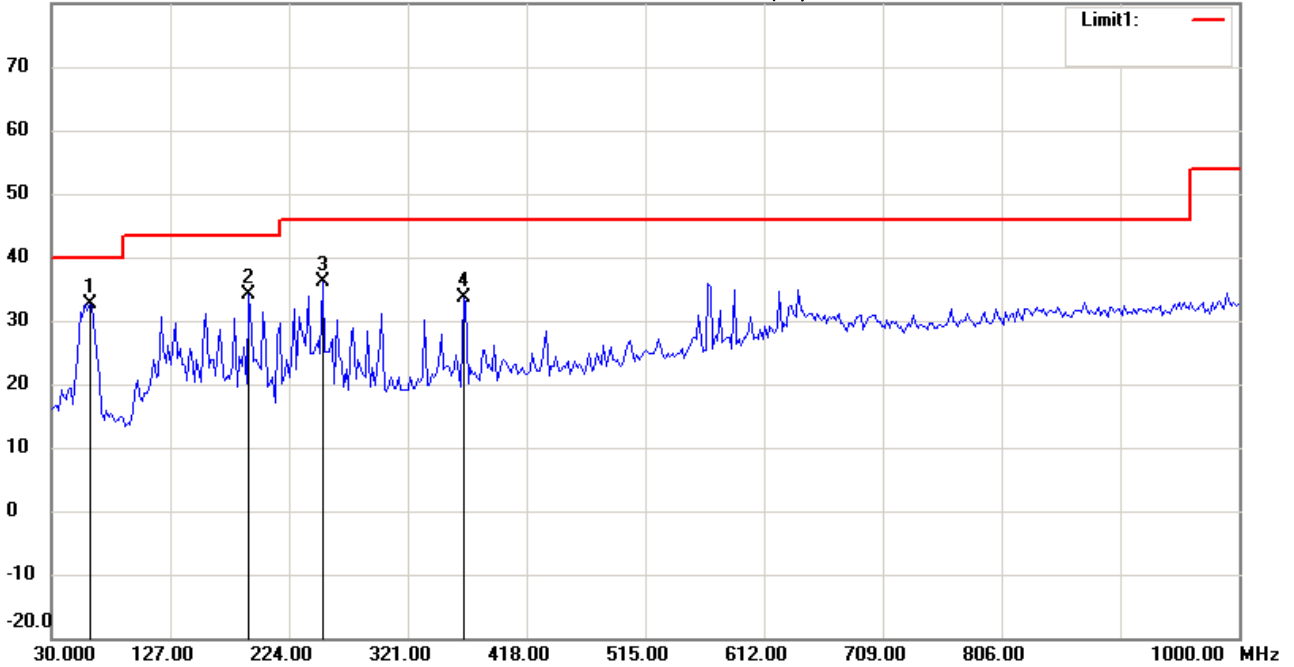

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	61.1022	19.72	peak	12.98	32.70	40.00	100	75	-7.30	
	191.3427	21.47	peak	12.58	34.05	43.50	100	330	-9.45	
	251.6032	21.56	peak	14.47	36.03	46.00	100	225	-9.97	
	366.2926	15.97	peak	17.77	33.74	46.00	100	150	-12.26	





Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:38:48

Humidity:60 %

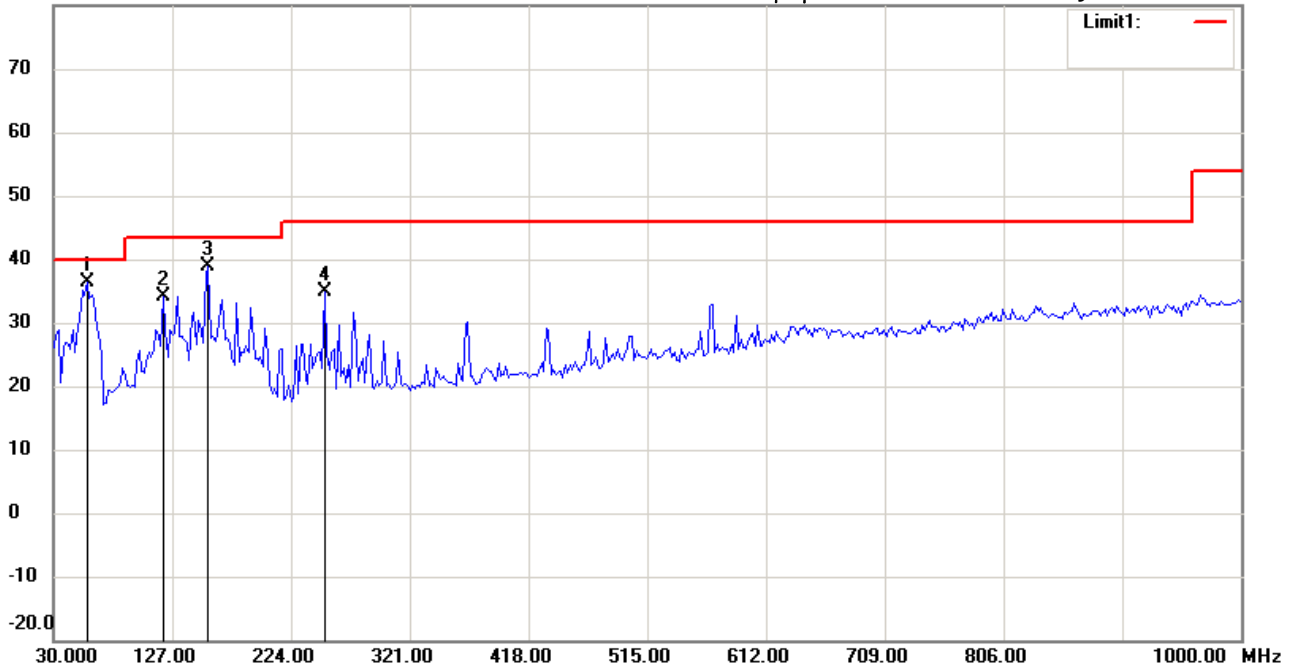

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : RX 2441MHz

Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	57.2144	22.76	peak	13.53	36.29	40.00	100	250	-3.71	
	119.4188	20.15	peak	13.94	34.09	43.50	100	70	-9.41	
	156.3527	23.38	peak	15.49	38.87	43.50	100	295	-4.63	
	251.6032	20.38	peak	14.47	34.85	46.00	100	160	-11.15	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:46:44

Humidity:60 %

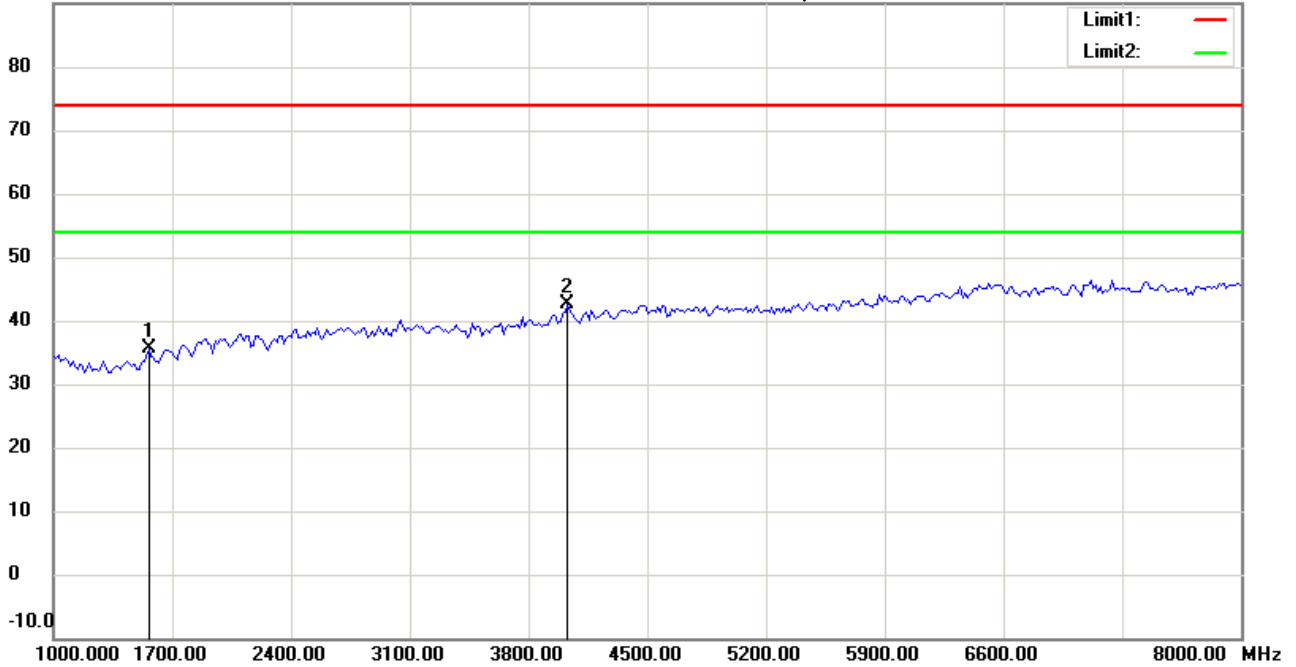

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	44.19	peak	-8.67	35.52	74.00	100	85	-38.48	
*	4030.060	43.24	peak	-0.67	42.57	74.00	100	11	-31.43	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:47:37

Humidity:60 %

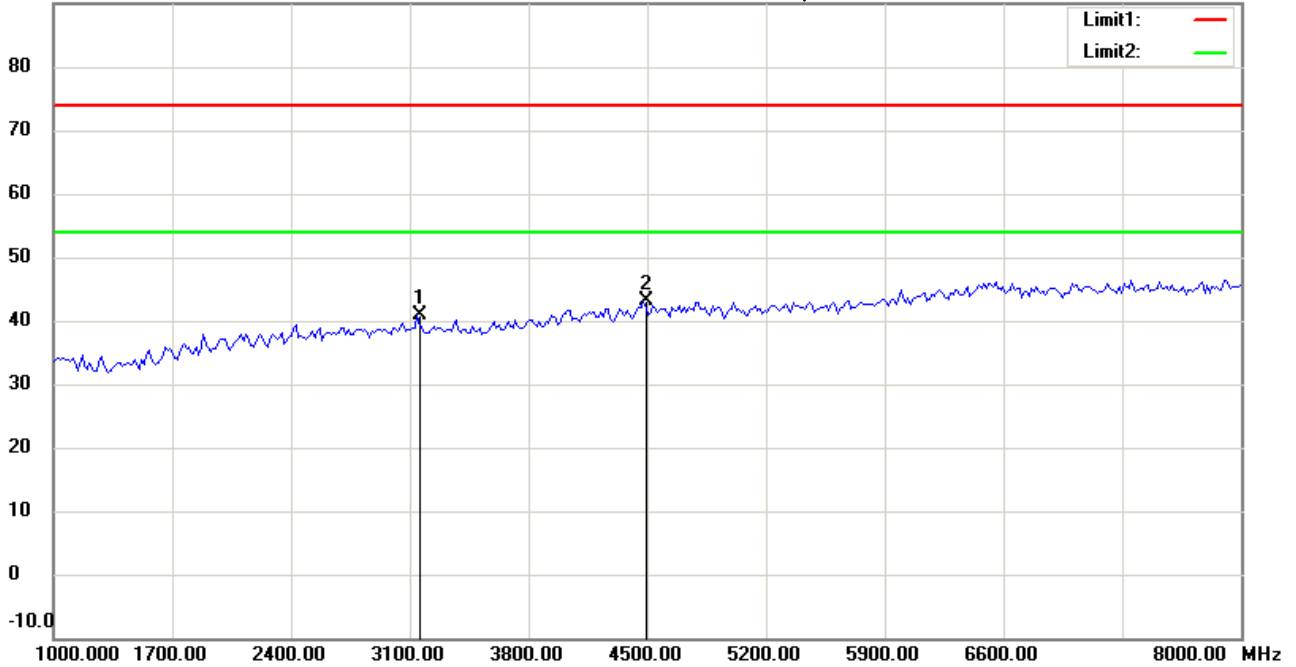

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3146.293	43.60	peak	-2.83	40.77	74.00	100	35	-33.23	
*	4478.958	42.76	peak	0.32	43.08	74.00	100	140	-30.92	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:46:55

Humidity:60 %

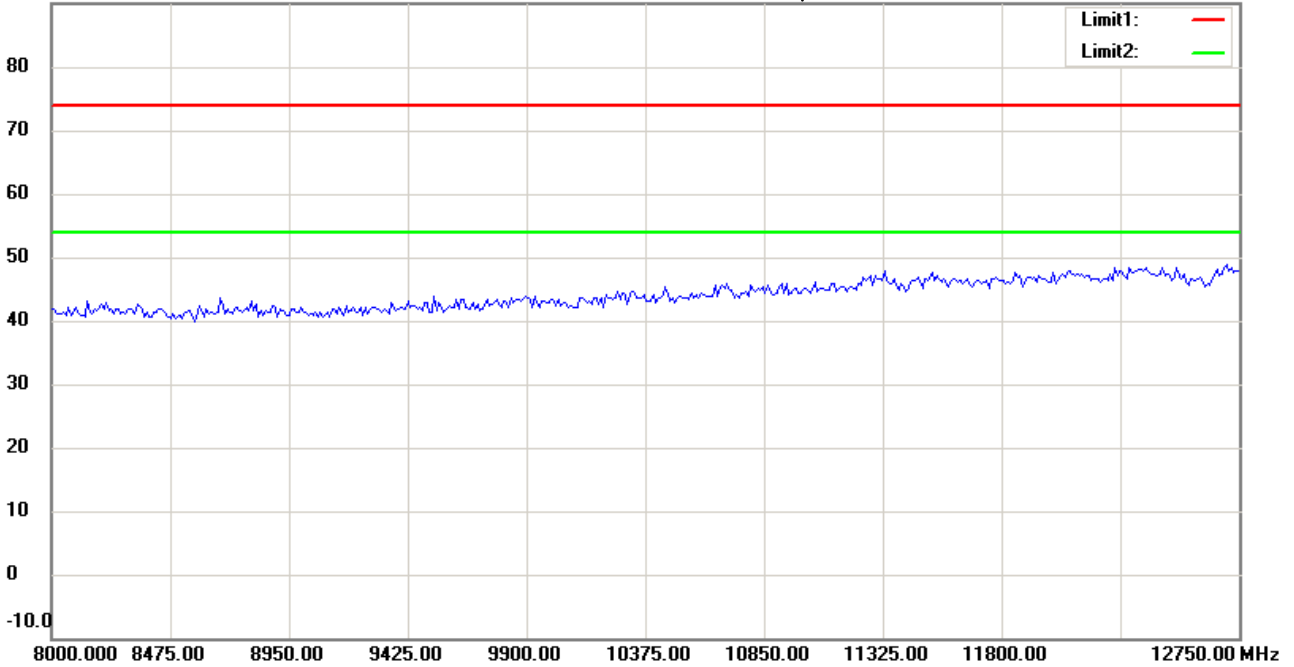

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:47:49

Humidity:60 %

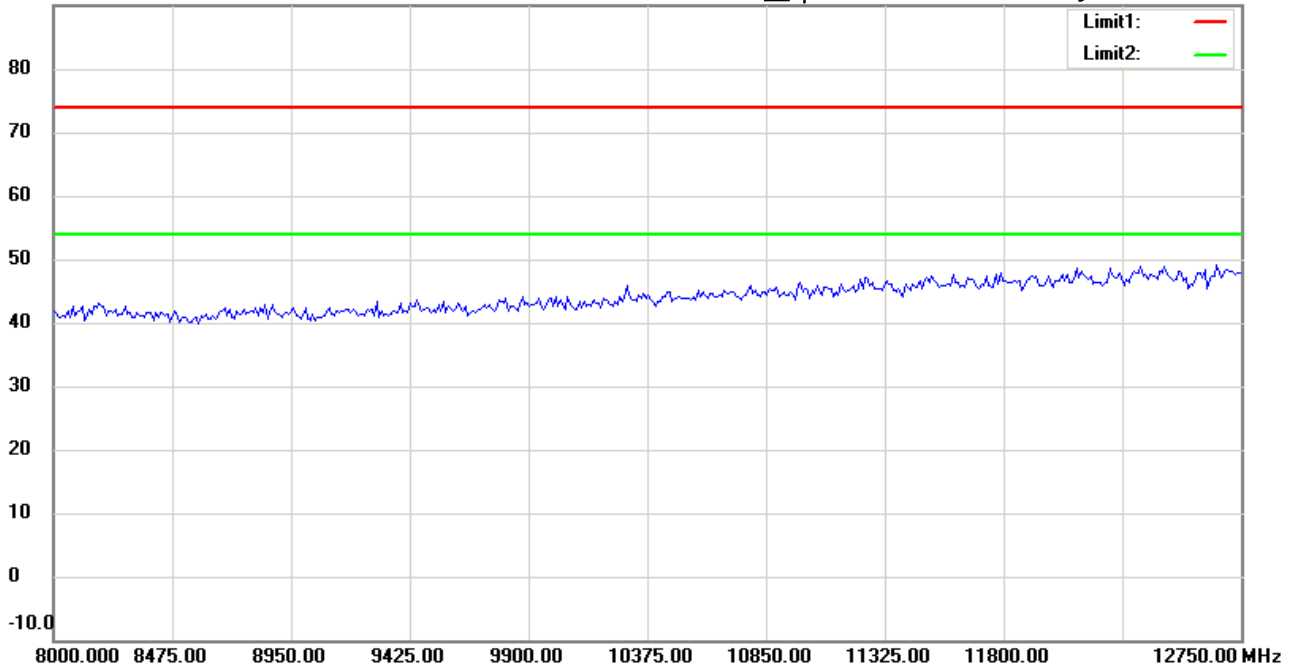

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:47:19

Humidity:60 %

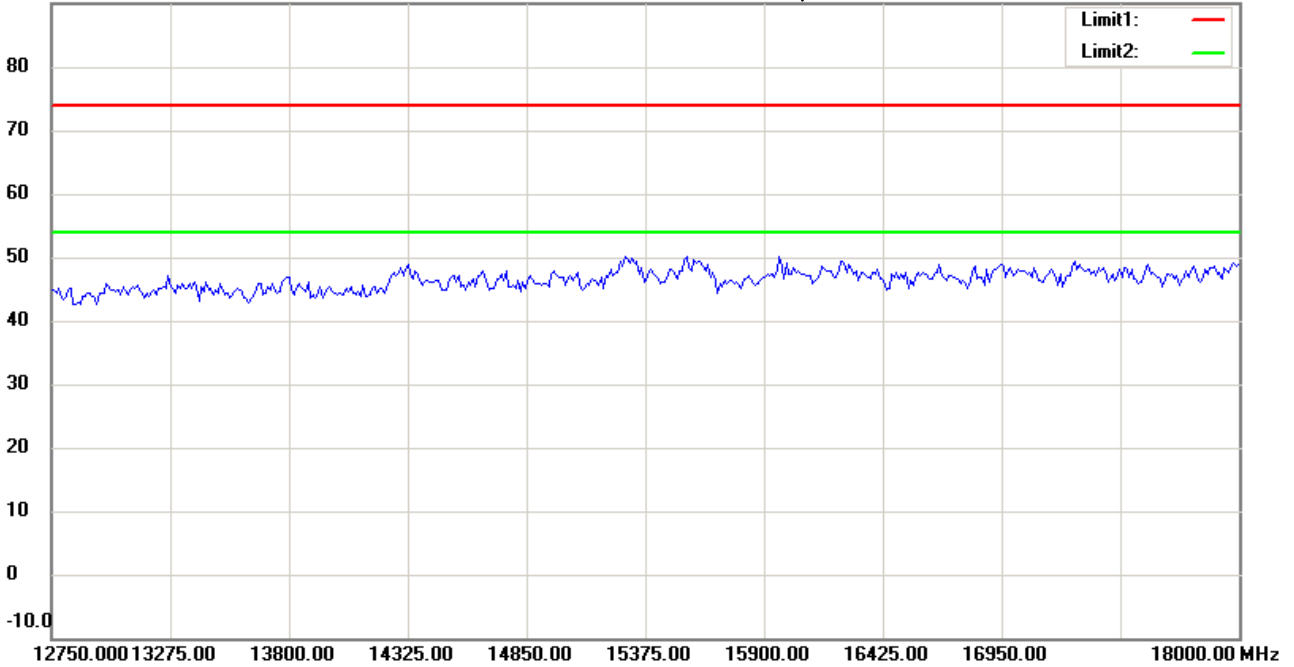

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:48:13

Humidity:60 %

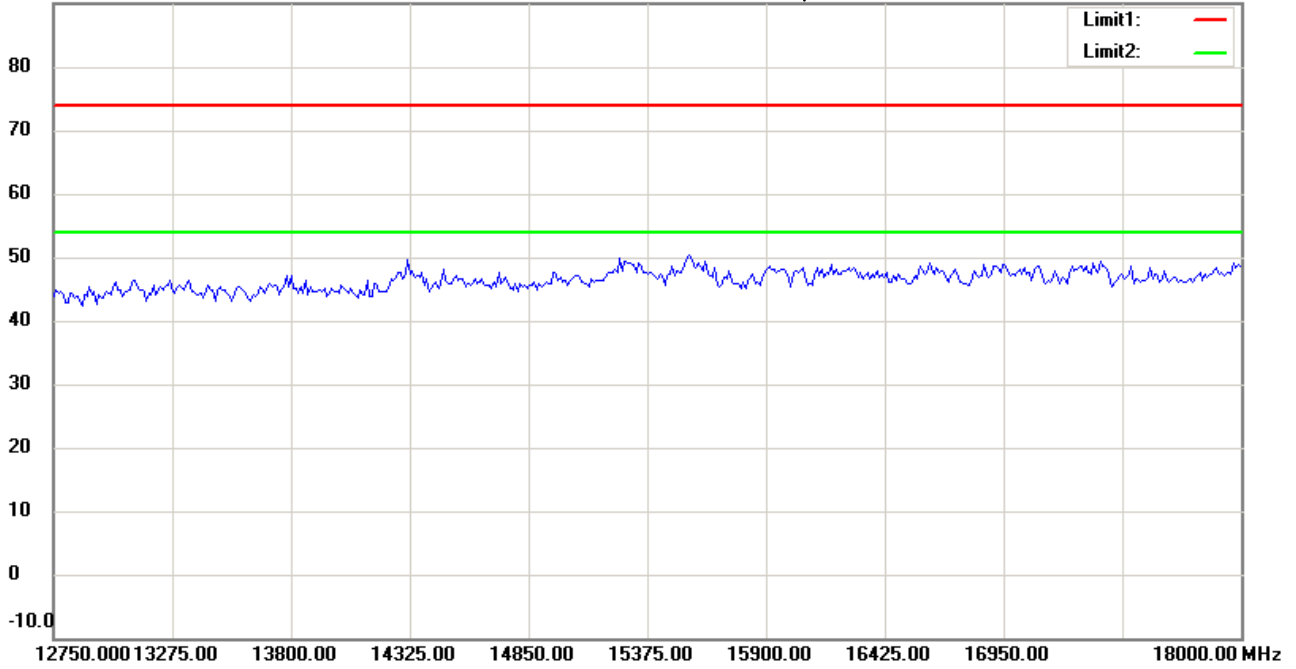

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:47:30

Humidity:60 %

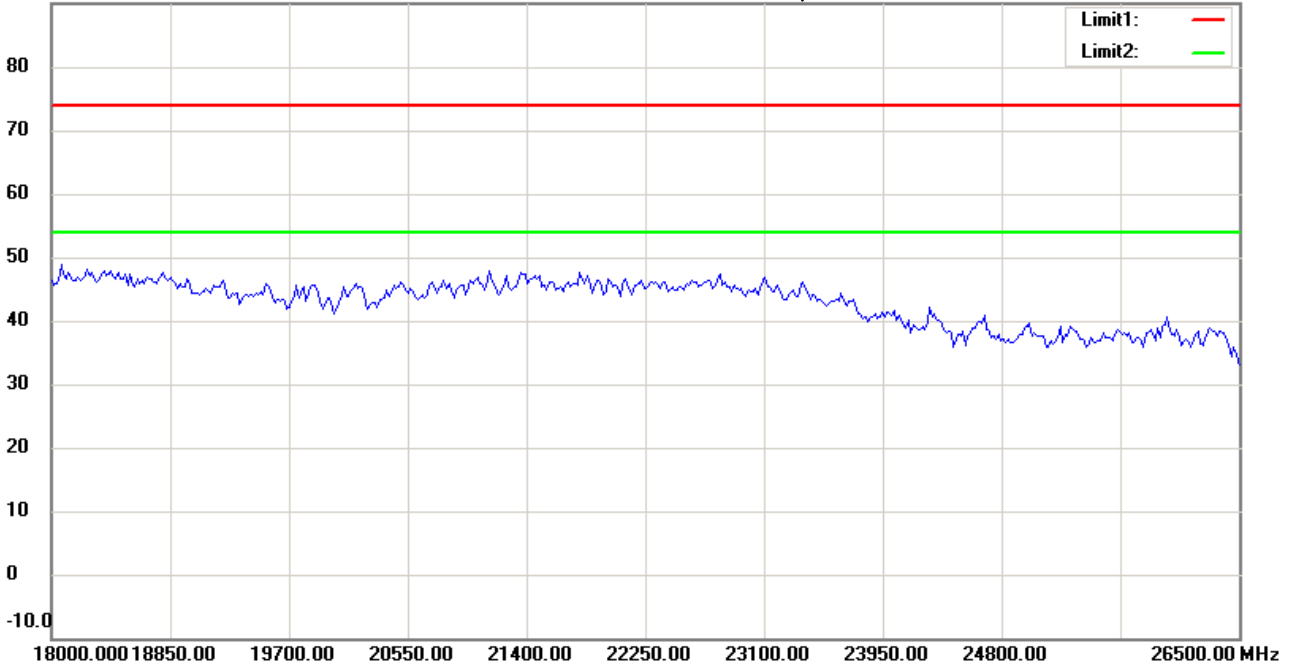

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------





Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:48:23

Humidity:60 %

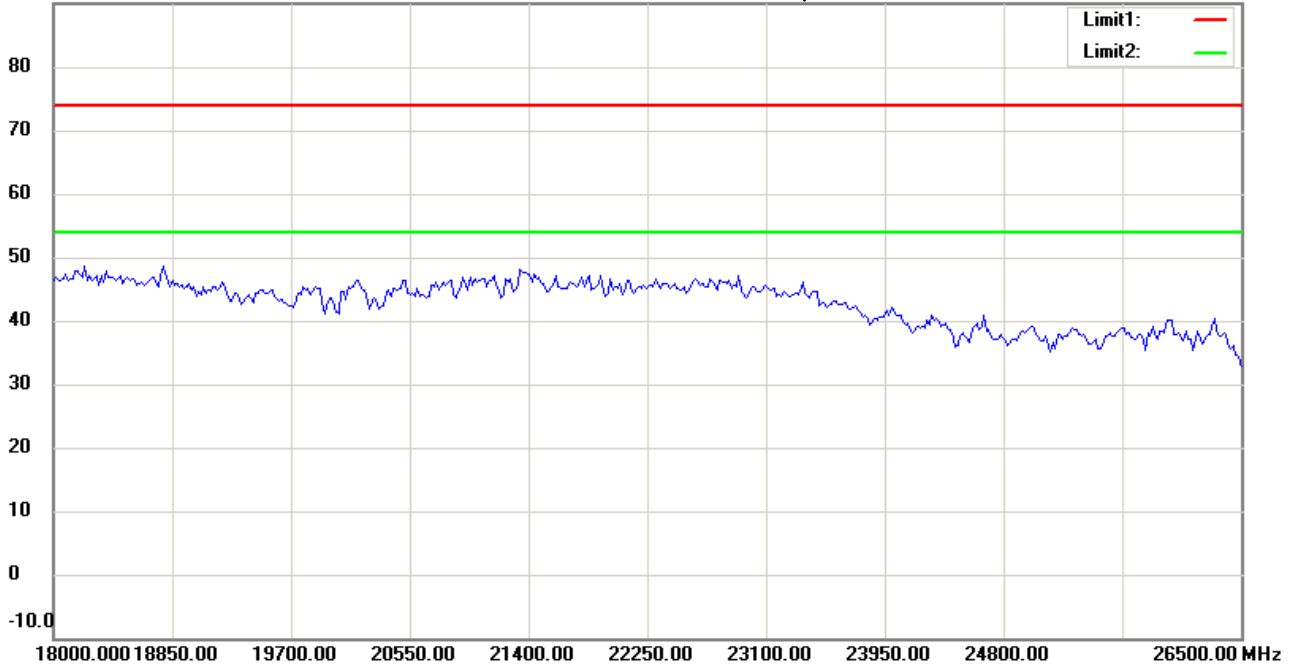

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:35:39

Humidity:60 %

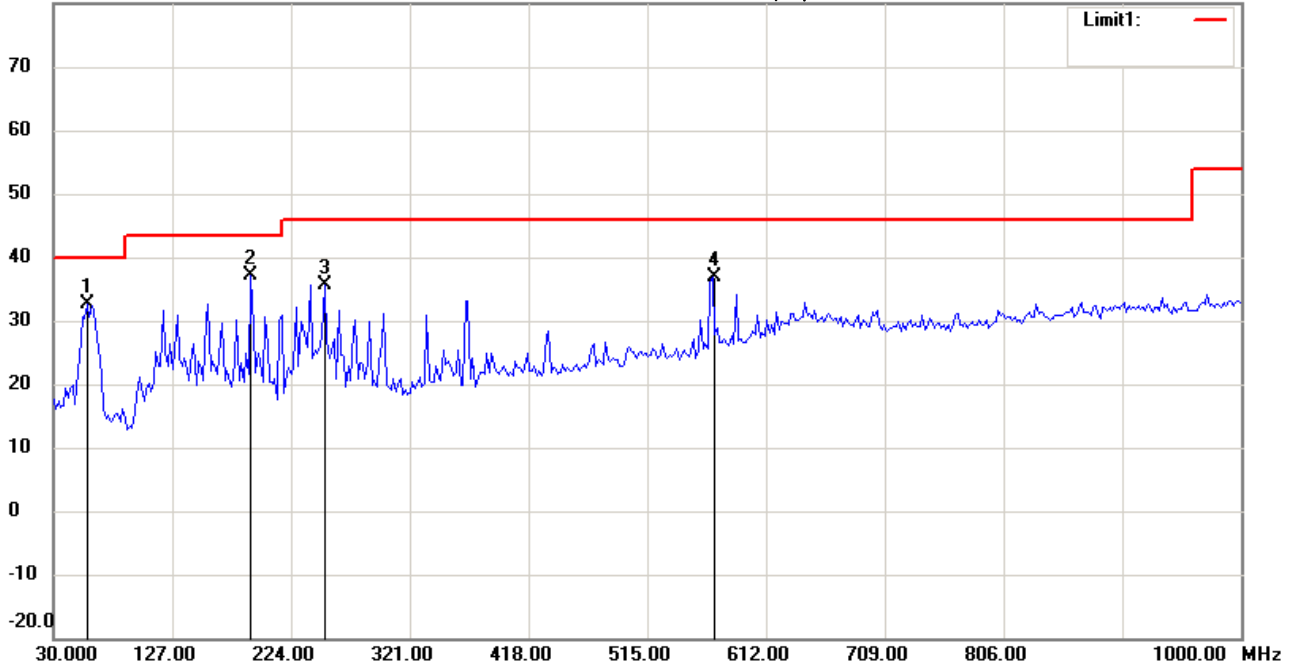

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	57.2144	19.17	peak	13.53	32.70	40.00	100	30	-7.30	
*	191.3427	24.49	peak	12.58	37.07	43.50	100	140	-6.43	
	251.6032	21.25	peak	14.47	35.72	46.00	100	85	-10.28	
	568.4570	14.46	peak	22.34	36.80	46.00	100	235	-9.20	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/1/26

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:36:24

Humidity:60 %

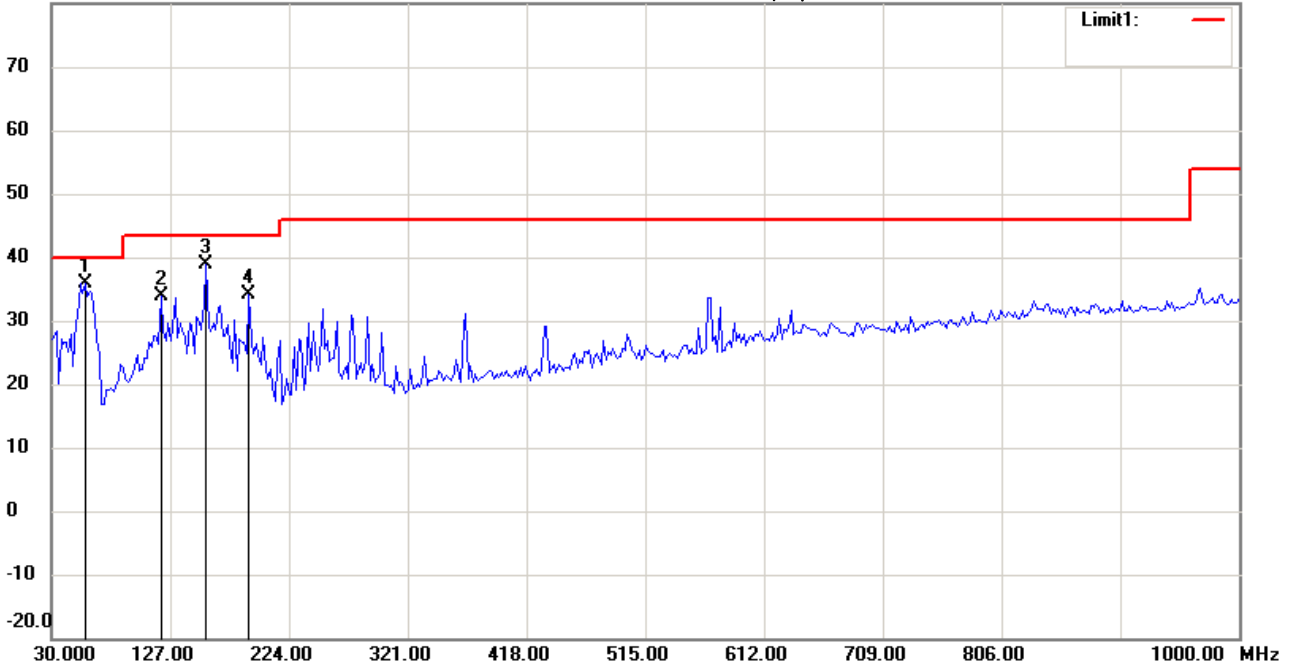

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_30-1000MHz

EUT : W6M21412-14665

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Vertical*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	57.2144	22.43	peak	13.53	35.96	40.00	100	105	-4.04	
	119.4188	19.96	peak	13.94	33.90	43.50	100	315	-9.60	
	156.3527	23.45	peak	15.49	38.94	43.50	100	180	-4.56	
	191.3427	21.51	peak	12.58	34.09	43.50	100	225	-9.41	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:43:34

Humidity:60 %

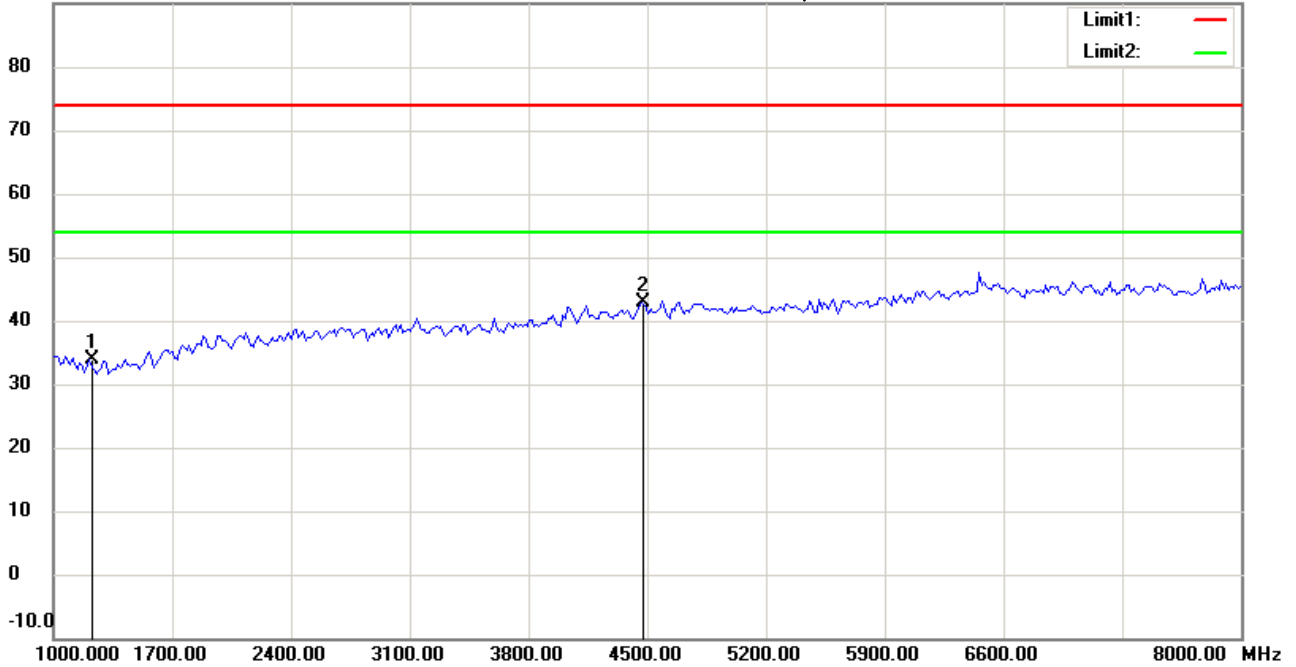

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1210.421	43.40	peak	-9.53	33.87	74.00	100	210	-40.13	
*	4464.930	42.67	peak	0.16	42.83	74.00	100	135	-31.17	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:44:27

Humidity:60 %

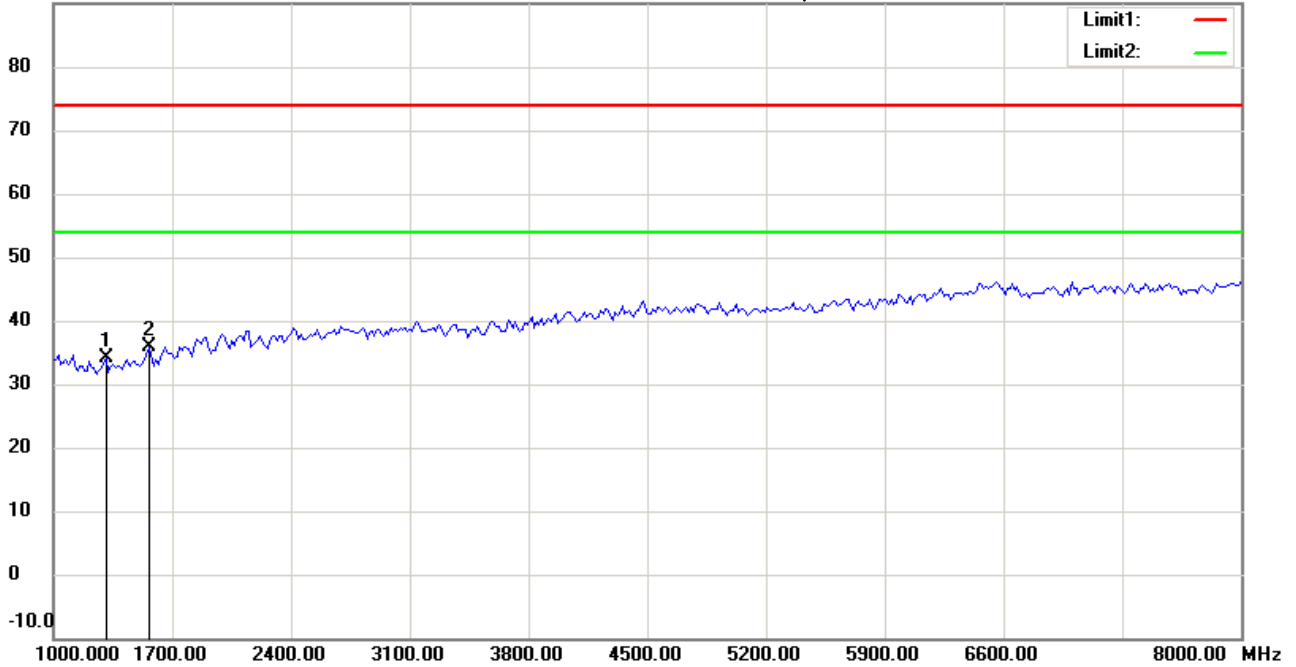

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1308.617	43.46	peak	-9.23	34.23	74.00	100	170	-39.77	
*	1561.122	44.64	peak	-8.67	35.97	74.00	100	55	-38.03	



Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:43:45

Humidity:60 %

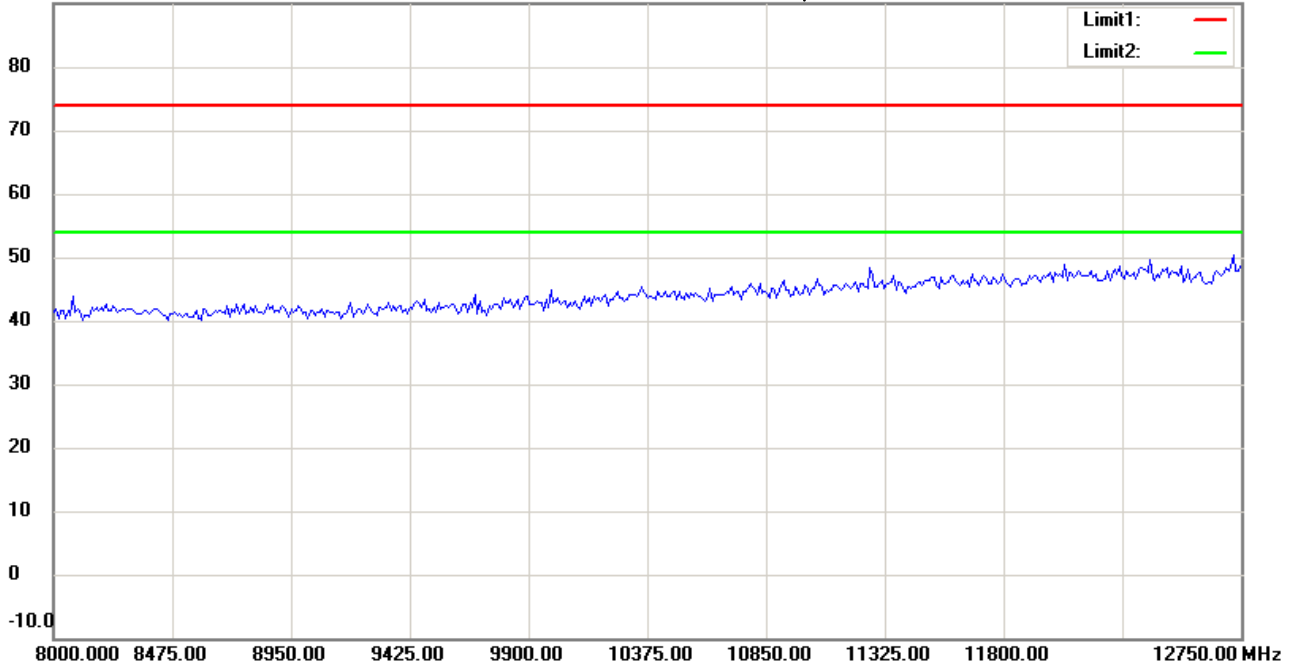

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:44:39

Humidity:60 %

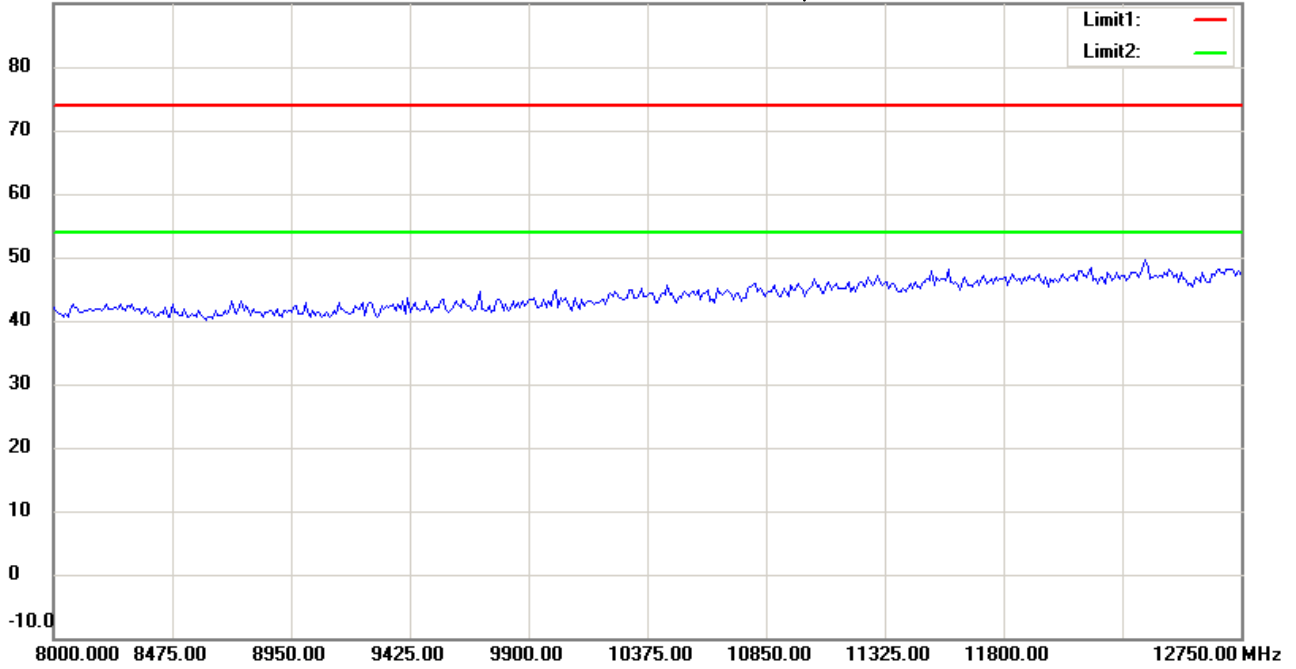

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:44:09

Humidity:60 %

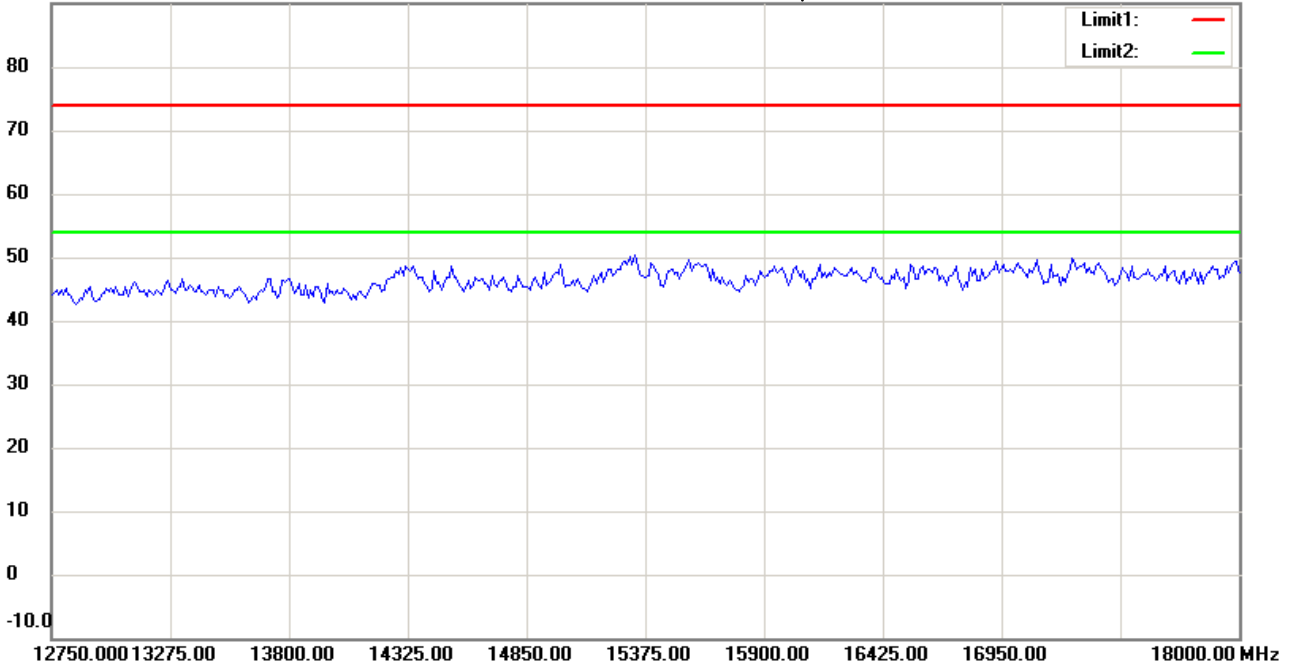

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Horizontal*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------





Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:45:03

Humidity:60 %

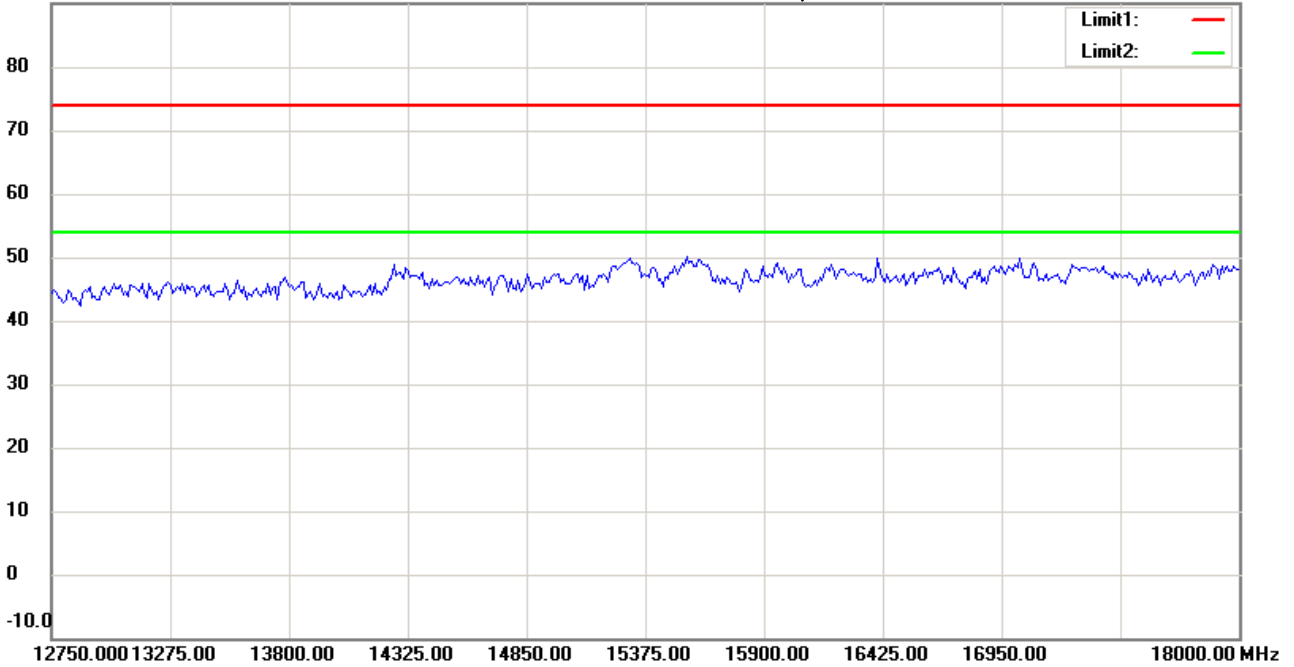

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:44:20

Humidity:60 %

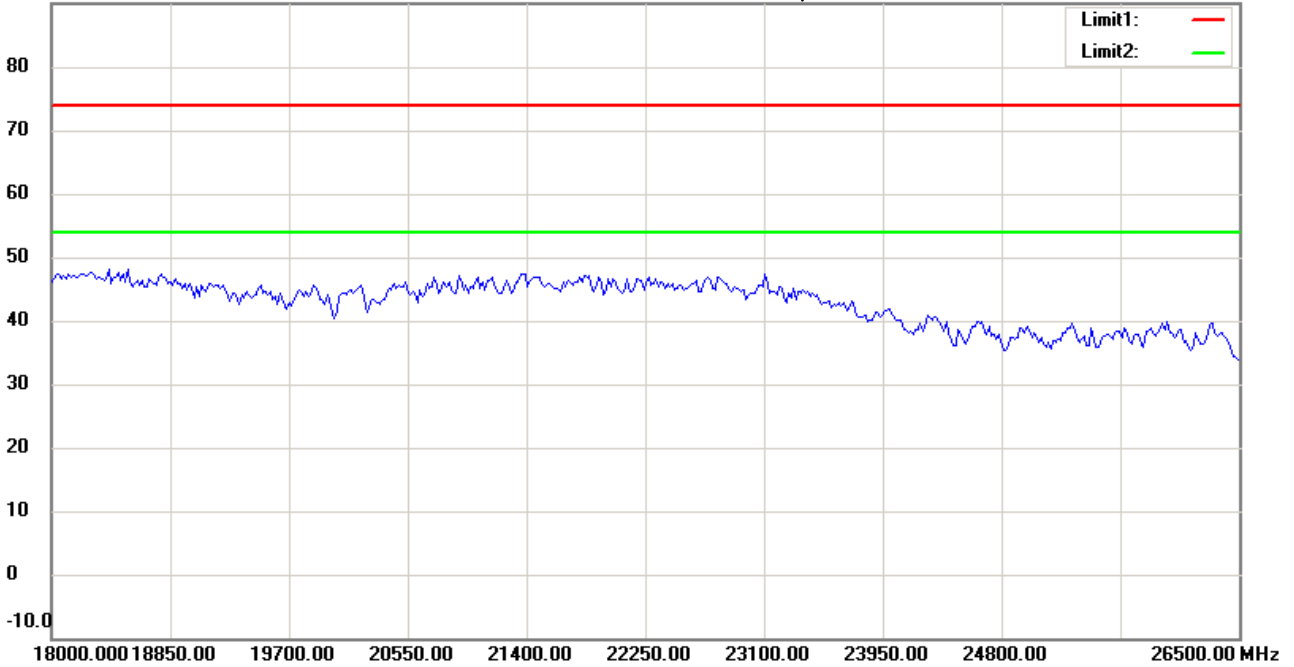

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

EUT : W6M21412-14665

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 5 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/1/18

Temperature:24 °C

90.0 dBuV/m

Time: 上午 10:45:12

Humidity:60 %

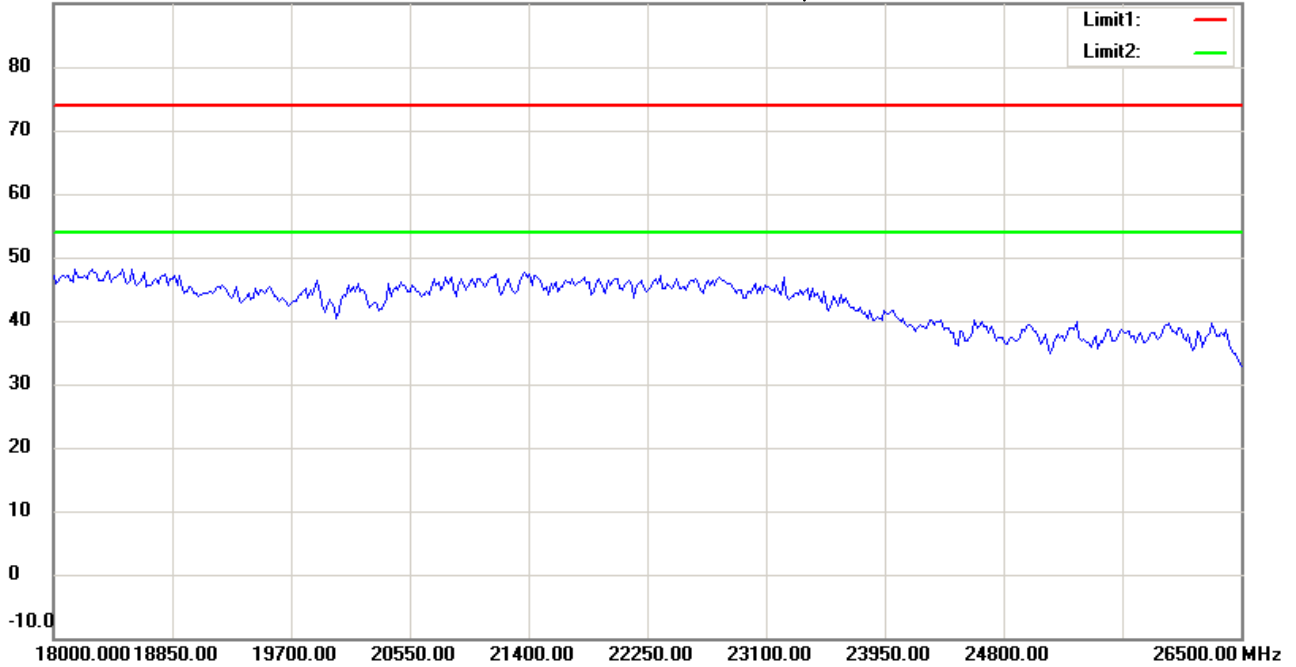

Site : Chamber

Condition : FCC\_part 15 RE-Class B\_Above 1GHz\_PK

Polarization: *Vertical*

EUT : W6M21412-14665

Power : 5 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------