



Product Service

Choose certainty.
Add value.

Report On

FCC and IC Testing of the
Hyperian Global Limited
USB Stick

COMMERCIAL-IN-CONFIDENCE

Document 75923713 Report 01 Issue 1

September 2013



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC and IC Testing of the
Hyperian Global Limited
USB Stick

Document 75923713 Report 01 Issue 1

September 2013

PREPARED FOR


Hyperian Global Limited
9 Devonshire Square
London
United Kingdom
EC2M 4YF

PREPARED BY



P. Joynson
EMC Engineer

APPROVED BY



J. Adams
Authorised Signatory

DATED

05 September 2013

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part B and ICES-003 Issue 5. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s):



J. Tuckwell





CONTENTS

Section	Page No
1 REPORT SUMMARY	3
1.1 Introduction	4
1.2 Brief Summary of Results	5
1.3 Declaration of Build Status	6
1.4 Product Information	7
1.5 Test Conditions	9
1.6 Deviations From the Standard	9
1.7 Modification Record	9
2 TEST DETAILS	10
2.1 Conducted Emissions (AC Power Port)	11
2.2 Radiated Emissions (Enclosure Port)	14
3 TEST EQUIPMENT USED	16
3.1 Test Equipment Used	17
3.2 Measurement Uncertainty	18
4 PHOTOGRAPHS	19
4.1 Photographs of Equipment Under Test (EUT)	20
4.2 Test Set Up Photographs	21
5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT	23
5.1 Accreditation, Disclaimers and Copyright	24



Product Service

SECTION 1

REPORT SUMMARY

FCC and IC Testing of the
Hyperian Global Limited
USB Stick



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Hyperian Global Limited, USB Stick to the requirements of FCC CFR 47 Part 15B and ICES-003.

Objective	To perform FCC and IC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Hyperian Global Limited
Part Number(s)	THNU2EL00PL07
Serial Number(s)	Not Serialised (75923713_TS0001)
Software Version	Not Supplied
Hardware Version	Controller ET6FL6UT2267B
Number of Samples Tested	One
Test Specification/Issue/Date	FCC CFR 47 Part 15B: 2012 ICES-003: Issue 5: 2012
Incoming Release Date	Declaration of Build Status 05 August 2013
Disposal Reference Number	Held Pending Disposal
Date	Not Applicable Not Applicable
Order Number	TV130730
Date	30 July 2013
Start of Test	16 August 2013
Finish of Test	16 August 2013
Name of Engineer(s)	J Tuckwell
Related Document(s)	ANSI 63.4: 2003



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results in accordance with FCC CFR 47 Part 15B and ICES-003 is shown below.

Configuration 1 - USB							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Base Standard
	FCC Pt 15 B	ICES-003					
2.1	15.107	6.1	Conducted Emissions (AC Power Port)	Active	0	Pass	ANSI 63.4
2.2	15.109	6.2	Radiated Emissions (Enclosure Port)	Active	0	Pass	ANSI 63.4

1.3 DECLARATION OF BUILD STATUS

MAIN EUT	
MANUFACTURING DESCRIPTION	USB Stick
MANUFACTURER	Hyperian Global Limited
TYPE	8GB USB 2.0 HIGH SPEED 480Mbit/sec USB compatible
PART NUMBER	THNU2EL00PL07
SERIAL NUMBER	Not supplied
HARDWARE VERSION	Controller ET6FL6UT2267B
SOFTWARE VERSION	Not supplied
HIGHEST INTERNALLY GENERATED FREQUENCY	Not supplied
TECHNICAL DESCRIPTION (a brief description of the intended use and operation)	Flash drive for use with PC. Insertion via USB port.
BATTERY/POWER SUPPLY	
MANUFACTURING DESCRIPTION	Speedform Usb Fitted With Toshiba Flash Drive
MANUFACTURER	TOSHIBA
TYPE	8GB USB 2.0
PART NUMBER	Not supplied
VOLTAGE	Not supplied
COUNTRY OF ORIGIN	CHINA

SignatureHeld on File at TUV SUDDate05 August 2013

Note: This document has been prepared to enable manufacturers with no mechanism for producing their own Declaration of Build Status, to declare the build state of the equipment submitted for test.

No responsibility will be accepted by TÜV SÜD Product Service as to the accuracy of the information declared in this document by the manufacturer.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Hyperian Global Limited, USB Stick as shown in the photograph below. A full technical description can be found in the manufacturer's documentation.



USB Stick

1.4.2 Test Configuration

Configuration 1: USB

The EUT was configured in accordance with FCC CFR 47 Part 15B and ICES-003.

1.4.3 EUT Cable / Port Identification

Port	Max Cable Length specified	Usage	Type	Screened	Configuration and Mode (if different)
None	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Not Applicable

1.4.4 Modes of Operation

Modes of operation of each EUT during testing were as follows:

Mode 1 - The EUT was plugged into to laptop and SDELETE software was used to exercise the EUT by writing data continuously to it.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or an open test area as appropriate.

The EUT was powered by 5V DC via a 110V AC powered Laptop supply.

Without formally knowing the internal clock frequency and having been informed that this device is a USB 2 Device the following assumptions have been made;

That is, construction is typical of a USB 2 Device and thus the device will probably use a Crystal oscillator to produce the device's main 12 MHz clock signal that controls the device's data output through a phase-locked loop. An internal operating frequency of 12MHz will necessitate radiated emissions testing up to 1GHz

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation
IC2932B-1 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.7 MODIFICATION RECORD

No modifications were made to the EUT during testing.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

SECTION 2

TEST DETAILS

FCC and IC Testing of the
Hyperian Global Limited
USB Stick

2.1 CONDUCTED EMISSIONS (AC POWER PORT)

2.1.1 Specification Reference

FCC CFR 47 Part 15B: Clause 15.107
ICES-003: Clause 6.1

2.1.2 Equipment Under Test

USB Stick, S/N: Not Serialised (75923713_TSR0001)

2.1.3 Date of Test and Modification State

16 August 2013 - Modification State 0

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of ANSI 63.4.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1

2.1.6 Environmental Conditions

16 August 2013

Ambient Temperature 20°C

Relative Humidity 56%

Atmospheric Pressure 1012mbar


2.1.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15B and ICES-003 for Conducted Emissions (AC Power Port).


The test results are shown below.

Configuration 1 - Mode 1

Live Line Results

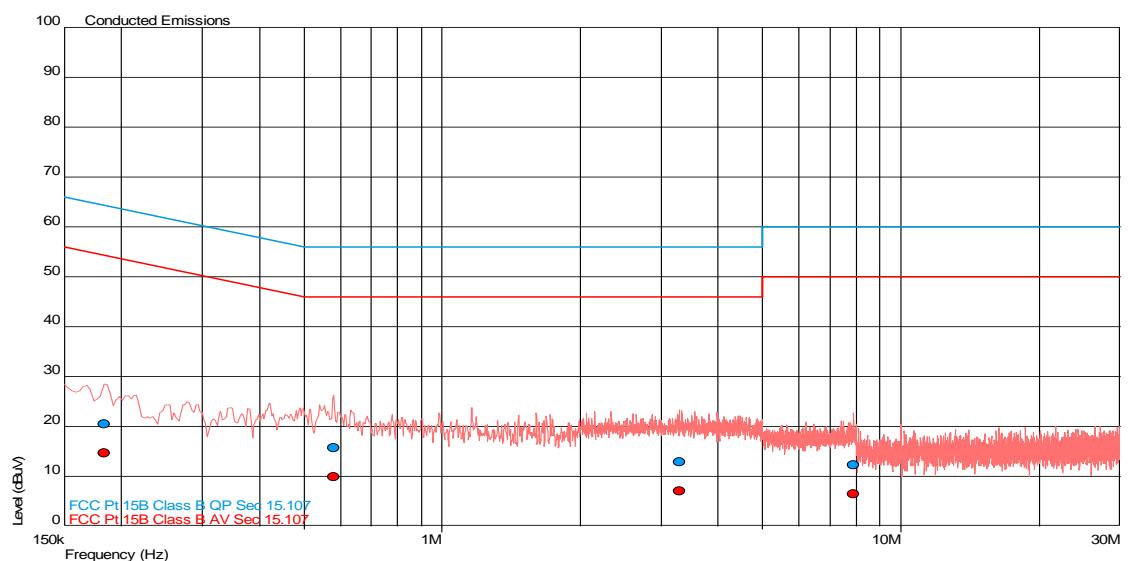

Frequency (MHz)	QP Level (dB μ V)	QP Limit (dB μ V)	QP Margin (dB μ V)	AV Level (dB μ V)	AV Limit (dB μ V)	AV Margin (dB μ V)
0.183	20.5	64.3	-43.9	14.7	54.3	-39.6
0.580	15.8	56.0	-40.2	9.9	46.0	-36.1
3.288	12.9	56.0	-43.1	7.0	46.0	-39.0
7.881	12.3	60.0	-47.7	6.5	50.0	-43.5

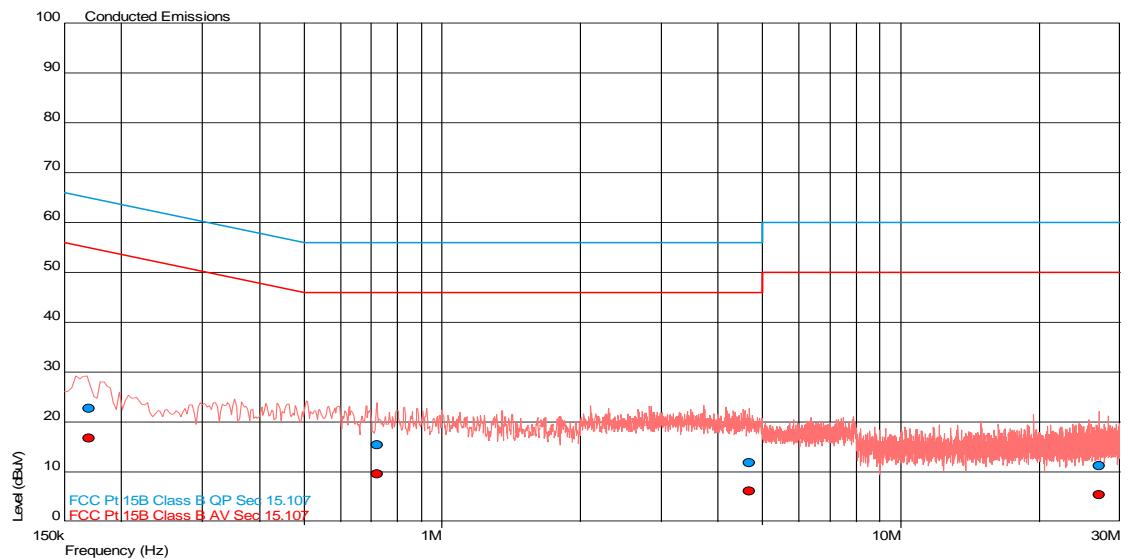Neutral Line Results

Frequency (MHz)	QP Level (dB μ V)	QP Limit (dB μ V)	QP Margin (dB μ V)	AV Level (dB μ V)	AV Limit (dB μ V)	AV Margin (dB μ V)
0.170	22.7	65.0	-42.3	16.8	55.0	-38.2
0.720	15.5	56.0	-40.5	9.6	46.0	-36.4
4.676	11.9	56.0	-44.1	6.2	46.0	-39.8
27.037	11.3	60.0	-48.7	5.4	50.0	-44.6

2.2 RADIATED EMISSIONS (ENCLOSURE PORT)

2.2.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109
ICES-003, Clause 6.2

2.2.2 Equipment Under Test

USB Stick, S/N: Not Serialised (75923713_TSR0001)

2.2.3 Date of Test and Modification State

16 August 2013 - Modification State 0

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of ANSI 63.4.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1

2.2.6 Environmental Conditions

16 August 2013

Ambient Temperature 2.32°C

Relative Humidity 53%


Atmospheric Pressure 1012mbar

2.2.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15B and ICES-003 for Radiated Emissions (Enclosure Port).

The test results are shown below.

Configuration 1 - Mode 1

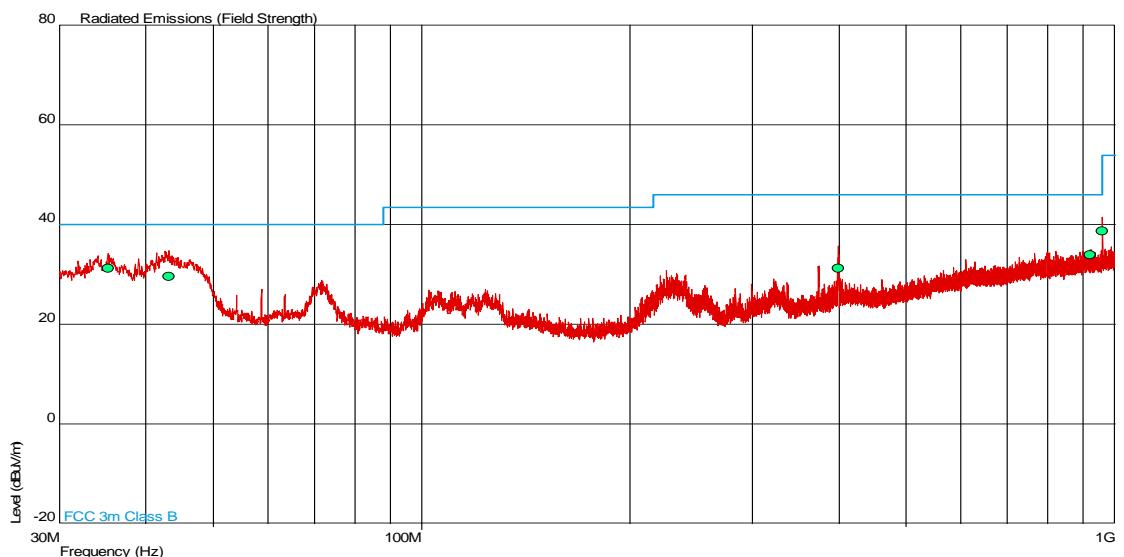

Frequency (MHz)	QP Level (dB μ V/m)	QP Limit (dB μ V/m)	QP Margin (dB μ V/m)	Angle(Deg)	Height(m)	Polarity
35.287	31.3	40.0	-8.7	107	1.00	Vertical
43.241	29.6	40.0	-10.4	17	1.00	Vertical
398.697	31.2	46.0	-14.8	248	1.00	Horizontal
922.449	34.0	46.0	-12.0	264	2.71	Horizontal
959.957	38.7	46.0	-7.3	0	1.00	Horizontal

SECTION 3

TEST EQUIPMENT USED

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 EMC - Conducted Emissions					
LISN	Rohde & Schwarz	ESH2-Z5	17	12	01-Aug-2014
Screened Room (5)	Rainford	Rainford	1545	24	25-Dec-2013
Transient Limiter	Hewlett Packard	11947A	2377	12	13-Feb-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
Section 2.2 EMC - Radiated Emissions					
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Jan-2014
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
Mast Controller	maturo GmbH	NCD	3917	-	TU

TU – Traceability Unscheduled

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.2dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Conducted Emissions, LISN	150kHz to 30MHz Amplitude	3.2dB*
Conducted Emissions, ISN	150kHz to 30MHz Amplitude	2.1dB

Worst case error for both Time and Frequency measurement 12 parts in 10^6 .

* In accordance with CISPR 16-4-2

SECTION 4

PHOTOGRAPHS

4.1 PHOTOGRAPHS OF EQUIPMENT UNDER TEST (EUT)




USB Stick

4.2 TEST SET UP PHOTOGRAPHS



Conducted Emissions (AC Power Port)

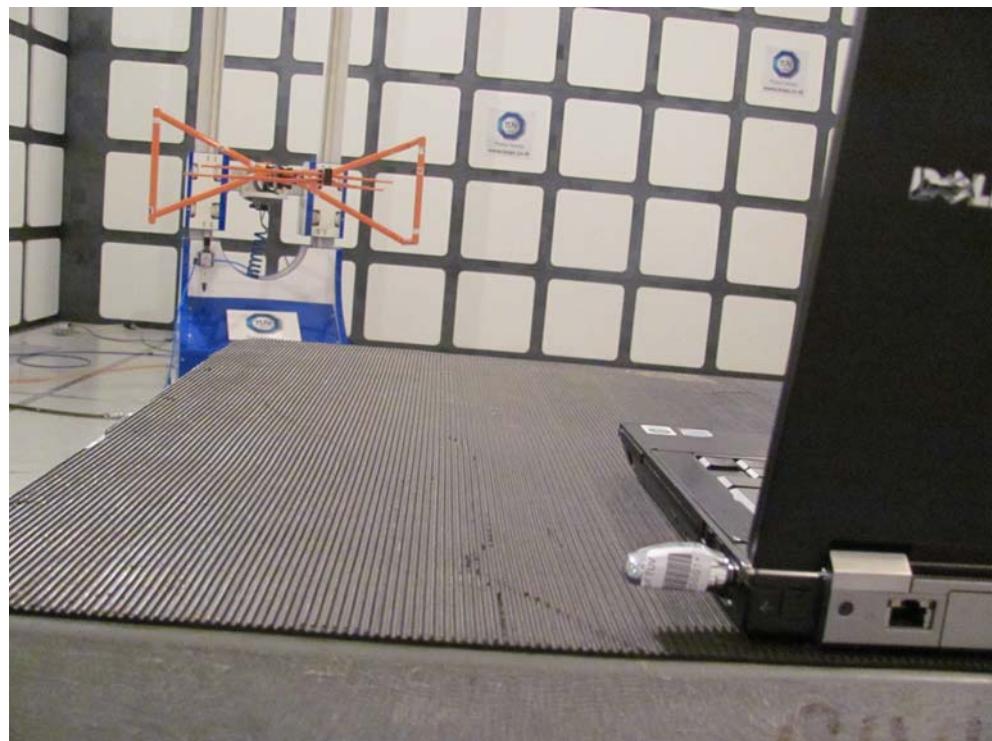

Radiated Emissions (Enclosure Port)

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2013 TÜV SÜD Product Service