



# FCC Test Report

## FCC ID:2AAV8QH-9826A

**Product :** Main unit(receiver)

**Trade Name :** QUHWA

**Model Name :** QH-9826A

**Serial Model :** N/A

**Report No. :** NTEK-2015NT0813492F

### Prepared for

SHENZHEN QIAOHUA INDUSTRIES LIMITED

Qiaohua Industrial Zone, Luo Tian Forestry Center, Song Gang Town,  
Bao An District, Shenzhen, Guangdong, 518105 China

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : SHENZHEN QIAOHUA INDUSTRIES LIMITED  
**Address** ..... : Qiaohua Industrial Zone, Luo Tian Forestry Center, Song Gang  
Town, Bao An District, Shenzhen, Guangdong, 518105 China  
**Manufacture's Name**..... : SHENZHEN QIAOHUA INDUSTRIES LIMITED  
**Address** ..... : Qiaohua Industrial Zone, Luo Tian Forestry Center, Song Gang  
Town, Bao An District, Shenzhen, Guangdong, 518105 China


### Product description

**Product name** ..... : Main unit(receiver)  
**Model and/or type reference** : QH-9826A  
FCC Part15B:01 Oct.2014  
**Standards** ..... : ANSI C63.4:2014


This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : 13 Aug. 2015 ~25 Aug. 2015  
**Date of Issue**..... : 25 Aug. 2015  
**Test Result**..... : **Pass**

Testing Engineer :   
\_\_\_\_\_  
(Allen Liu)

Technical Manager :   
\_\_\_\_\_  
(Brown Lu)

Authorized Signatory :   
\_\_\_\_\_  
(Sam Chen)

<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
3.2.2 TEST PROCEDURE	14
3.2.3 TEST SETUP	15
3.2.4 TEST RESULTS	16
3.2.5 TEST RESULTS(1000~12400MHz)	18
4 . EUT TEST PHOTO	19

## 1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B:2014 ANSI C63.4: 2014	Conducted Emission	Class B	N/A	
	Radiated Emission	Class B	PASS	

**NOTE:**

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration Number:238937; IC Registration Number:9270A-1

CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Main unit(receiver)	
Model Name	QH-9826A	
Additional Model Number(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a Main unit(receiver) .	
	Operation Frequency:	433.92MHz
	Modulation Type:	ASK
Power Source	DC Voltage	
Adapter	N/A	
Battery	1.5V*3 cell "AAA" alkaline battery	

### 2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	normal working Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	normal working Mode

Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worse case.

Only the worst case mode is recorded in the report.

## 2.2 DESCRIPTION OF TEST SETUP

E-1  
EUT



2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Main unit(receiver)	QUHWA	QH-9826A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

## 2.4 MEASUREMENT INSTRUMENTS LIST

### 2.4.1 CONDUCTED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	101313	Jul. 06, 2015	Jul. 05, 2016	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8129245	Dec. 25, 2014	Dec. 24, 2015	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	Dec. 25, 2014	Dec. 24, 2015	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2015	Jul. 05, 2016	1 year
5	Test Cable	N/A	C01	N/A	Jul. 06, 2015	Jul. 05, 2016	1 year
6	Test Cable	N/A	C02	N/A	Jul. 06, 2015	Jul. 05, 2016	1 year
7	Test Cable	N/A	C03	N/A	Jul. 06, 2015	Jul. 05, 2016	1 year
8	EMI Test Receiver	R&S	ESCI	101160	Jul. 06, 2015	Jul. 05, 2016	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2015	Jul. 05, 2016	1 year
10	Absorbing Clamp	R&S	MDS-21	100423	Jul. 08, 2015	Jul. 07, 2016	1 year

### 2.4.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06, 2015	Jul. 05, 2016	1 year
2	Test Cable	N/A	R-01	N/A	Dec. 25, 2014	Dec. 24, 2015	1 year
3	Test Cable	N/A	R-02	N/A	Dec. 25, 2014	Dec. 24, 2015	1 year
4	EMI Test Receiver	R&S	ESCI-7	101318	Jul. 06, 2015	Jul. 05, 2016	1 year
5	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060531	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2015	Jul. 05, 2016	1 year
8	Spectrum Analyzer	Aglient	E4407B	MY45108040	Jul. 06, 2015	Jul. 05, 2016	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06, 2015	Jul. 05, 2016	1 year
10	Amplifier	EM	EM-30180	060538	Jul. 06, 2015	Jul. 05, 2016	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06, 2015	Jul. 05, 2016	1 year

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

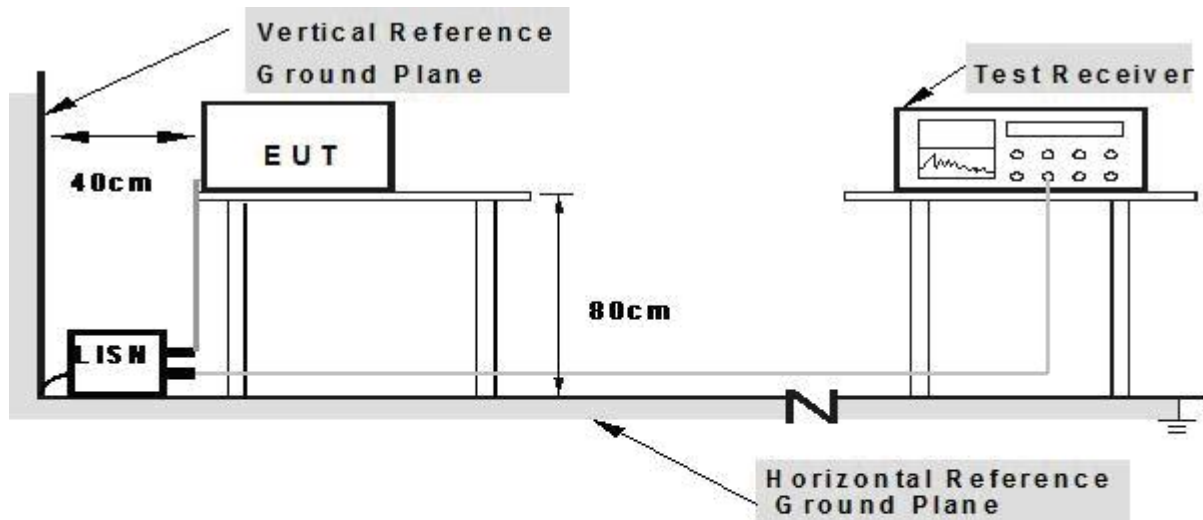

- Note: 1. Support units were connected to second LISN.**  
**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

## 3.1.5 TEST RESULTS

EUT :	Main unit(receiver)	Model Name. :	QH-9826A
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	N/A
Test Mode :	N/A	Phase :	N/A
Test Voltage :	N/A		

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

**Notes:**

- (1) The limit for radiated test was performed according to as following:  
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### 3.2.2 TEST PROCEDURE

**Test Arrangement for Radiated Emissions up to 1 GHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

**Test Arrangement for Radiated Emissions above 1 GHz.**


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength.Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report  
 During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz

3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

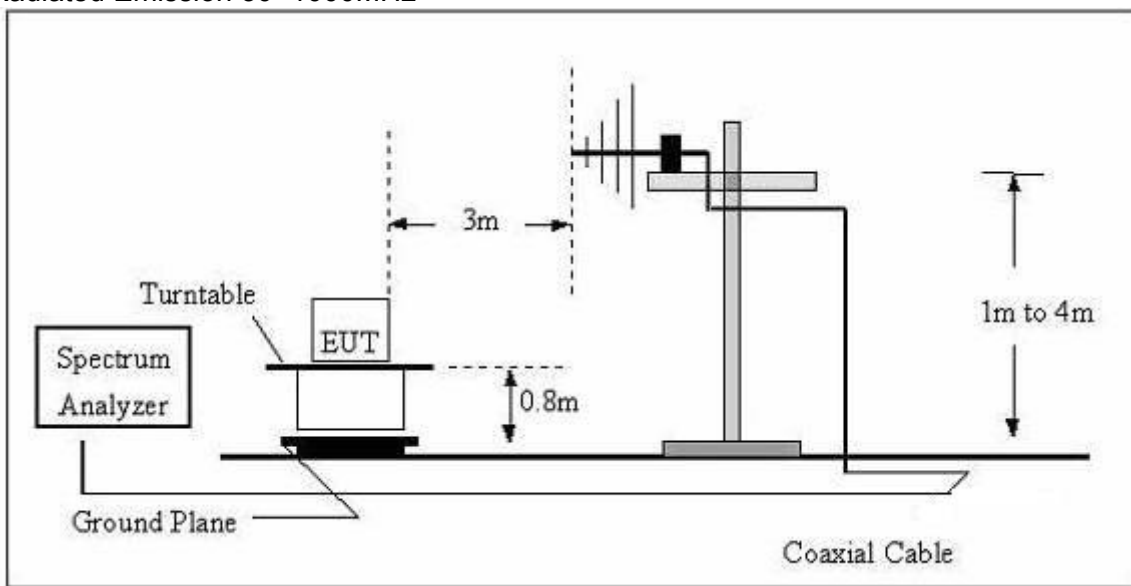

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

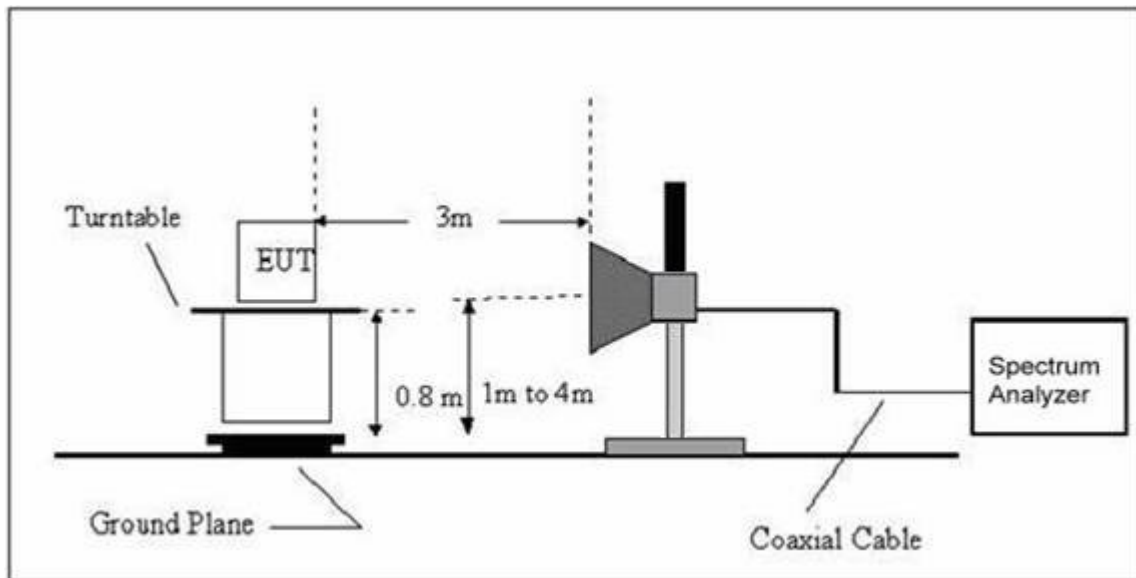

### 3.2.4 TEST RESULTS


#### TEST RESULTS (30~1000 MHz)

EUT :	Main unit(receiver)	Model Name :	QH-9826A
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-08-18
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 4.5V		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
32.2924	5.10	18.66	23.76	40.00	-16.24	QP
66.266	7.44	6.58	14.02	40.00	-25.98	QP
95.427	5.45	10.12	15.57	43.50	-27.93	QP
152.1297	6.19	11.77	17.96	43.50	-25.54	QP
332.5187	6.32	13.72	20.04	46.00	-25.96	QP
435.5898	7.83	15.35	23.18	46.00	-22.82	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

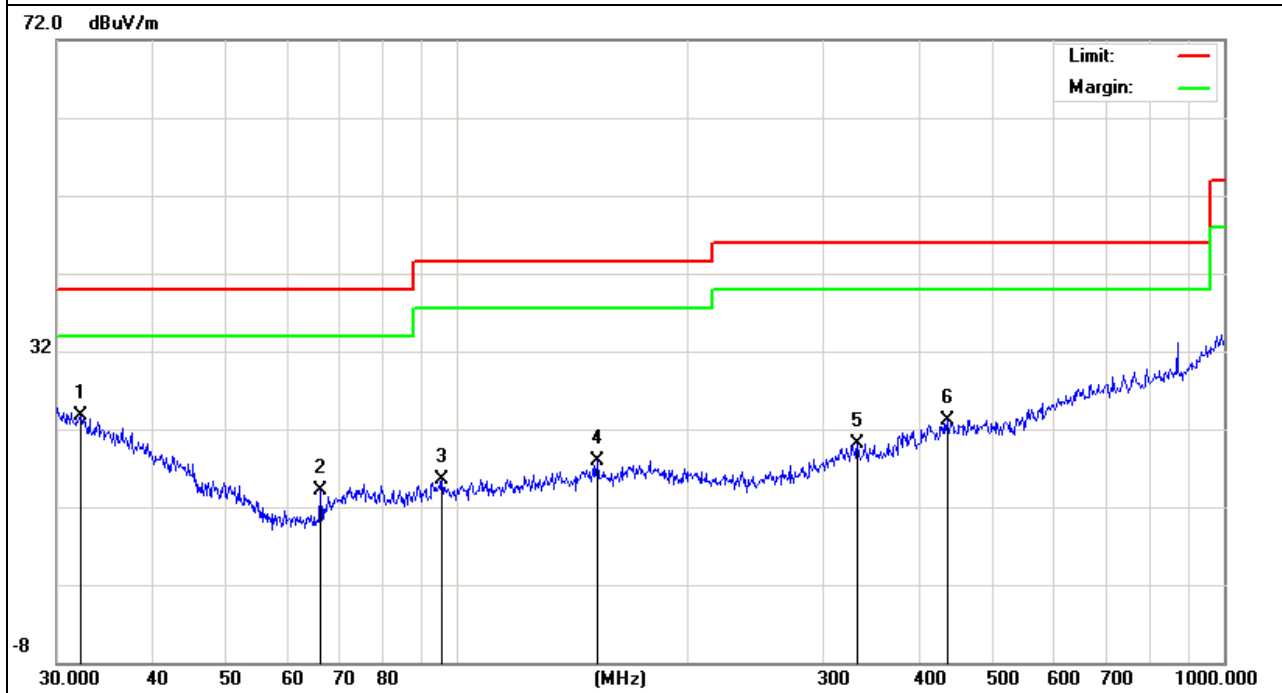




EUT :	Main unit(receiver)	Model Name :	QH-9826A
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-08-18
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 4.5V		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
31.6202	6.89	18.99	25.88	40.00	-14.12	QP
66.4989	9.03	6.79	15.82	40.00	-24.18	QP
101.2883	6.74	10.26	17.00	43.50	-26.50	QP
162.0414	9.04	11.56	20.60	43.50	-22.90	QP
434.0649	8.21	15.21	23.42	46.00	-22.58	QP
734.4913	8.05	21.88	29.93	46.00	-16.07	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

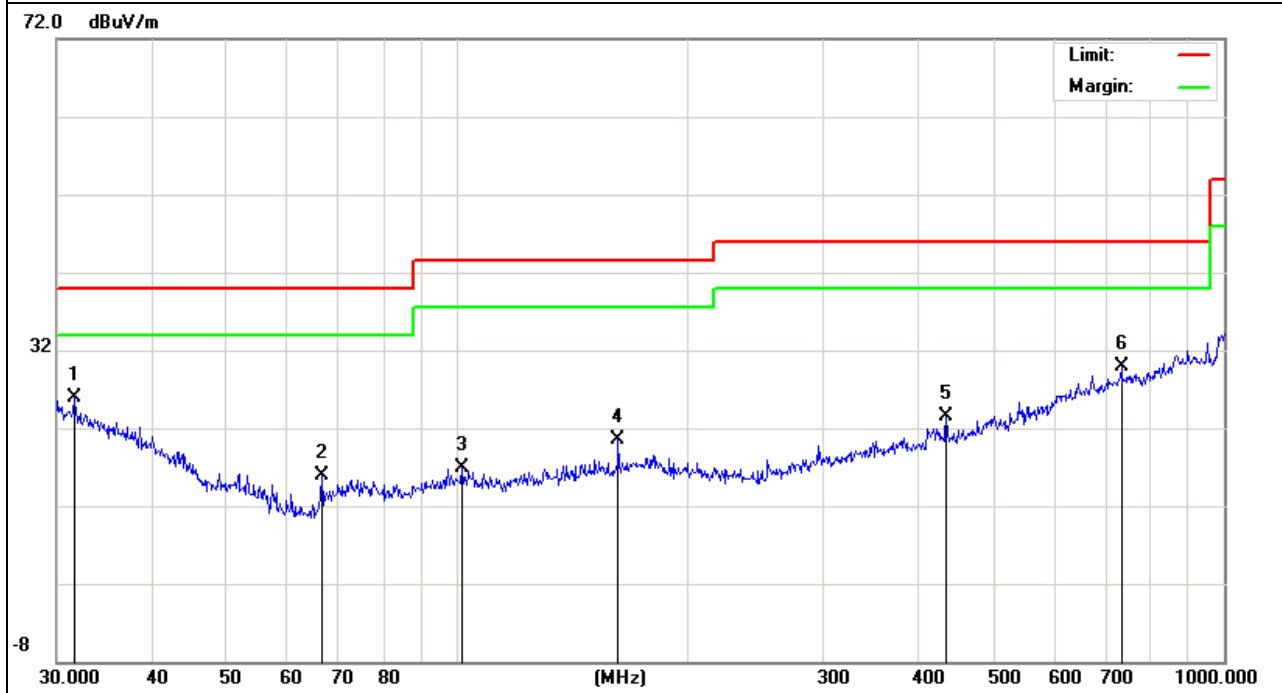

3.2.5 TEST RESULTS(1000~12400MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1340.332	58.84	-12.78	46.06	74.00	-27.94	peak
V	1340.332	46.36	-12.78	33.58	54.00	-20.42	AVG
V	1587.100	62.11	-11.97	50.14	74.00	-23.86	peak
V	1587.100	52.99	-11.97	41.02	54.00	-12.98	AVG
V	2123.821	59.72	-8.28	51.44	74.00	-22.56	peak
V	2123.821	48.86	-8.28	40.58	54.00	-13.42	AVG
H	1197.525	62.77	-12.45	50.32	74.00	-23.68	peak
H	1197.525	52.47	-12.45	40.02	54.00	-13.98	AVG
H	1796.491	61.58	-10.87	50.71	74.00	-23.29	peak
H	1796.491	50.12	-10.87	39.25	54.00	-14.75	AVG
H	2427.350	56.05	-9.17	46.88	74.00	-27.12	peak
H	2427.350	44.53	-9.17	35.36	54.00	-18.64	AVG

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

**4. EUT TEST PHOTO**

**Radiated Measurement Photos**

