

## FCC Report (Bluetooth)

**Applicant:** Soul Electronics Limited

**Address of Applicant:** 6/F, Enterprise Square Three, 39 Wang Chiu Road, Kowloon Bay, Hong Kong, China

**Manufacturer/Factory:** Soul Electronics Limited

**Address of Manufacturer/Factory:** 6/F, Enterprise Square Three, 39 Wang Chiu Road, Kowloon Bay, Hong Kong, China

**Equipment Under Test (EUT)**

Product Name: X-SHOCK - Absolute True Wireless Earphones

Model No.: X-SHOCK, SX15

**FCC ID:** 2AAWE-SX15

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** June 04, 2018

**Date of Test:** June 04, 2018 - June 07, 2018

**Date of report issued:** June 07, 2018

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	June 07, 2018	Original

Prepared By:




**Project Engineer**

Date:

June 07, 2018

Check By:



**Reviewer**

Date:

June 07, 2018

## 3 Contents

1	COVER PAGE .....	1
2	VERSION .....	2
3	CONTENTS .....	3
4	TEST SUMMARY .....	4
5	GENERAL INFORMATION .....	5
5.1	GENERAL DESCRIPTION OF EUT .....	5
5.2	TEST MODE .....	7
5.3	DESCRIPTION OF SUPPORT UNITS .....	7
5.4	TEST FACILITY .....	7
5.5	TEST LOCATION .....	7
5.6	ADDITIONAL INSTRUCTIONS.....	8
6	TEST INSTRUMENTS LIST .....	9
7	TEST RESULTS AND MEASUREMENT DATA .....	10
7.1	ANTENNA REQUIREMENT .....	10
7.2	CONDUCTED EMISSIONS .....	11
7.3	CONDUCTED OUTPUT POWER .....	16
7.4	CHANNEL BANDWIDTH .....	18
7.5	POWER SPECTRAL DENSITY .....	20
7.6	BAND EDGES .....	22
7.6.1	Conducted Emission Method .....	22
7.6.2	Radiated Emission Method .....	23
7.7	SPURIOUS EMISSION .....	25
7.7.1	Conducted Emission Method .....	25
7.7.2	Radiated Emission Method .....	27

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	X-SHOCK - Absolute True Wireless Earphones
Model No.:	X-SHOCK, SX15
Test Model No:	X-SHOCK
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only differences model name for commercial purpose.</i>	
Serial No.:	XXXX
Test sample(s) ID:	GTS201806000119-1
Sample(s) Status	Engineer sample
Hardware:	SMBT-0516-1D/2D
Software:	AB1526C_V021_SMBT-0516-8s_20171008_V1.1.airoflashZ
Operation Frequency:	2402MHz-2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Internal Antenna
Antenna Gain:	2.0dBi
Power Supply:	DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<p><i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	

## 5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
APPLE	USB Charger	A1399	N/A

## 5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.</li> <li>● <b>Industry Canada (IC) —Registration No.: 9079A-2</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.</li> </ul>
--

## 5.5 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>


## 5.6 Additional Instructions

EUT Software Settings:

Mode	Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Name	Airoha		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH01	2402	TX level : default
	CH21	2442	
	CH40	2480	

Run Software

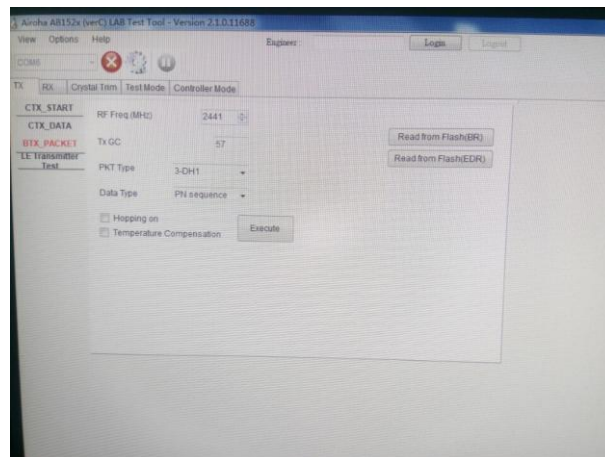



## 6 Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	June 28 2017	June 27 2018

### Conducted Emission:


Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

### General used equipment:

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

## 7 Test results and Measurement Data

### 7.1 Antenna requirement
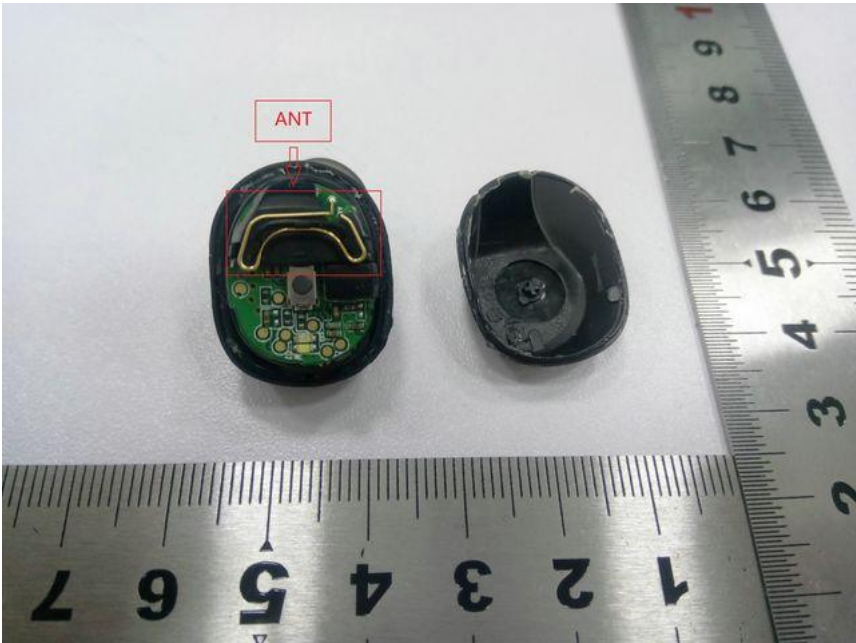
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>E.U.T Antenna:</b>	
<p><i>The antenna is integral antenna, the best case gain of the antenna is 2.0dBi</i></p> 	


## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2009 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

**Measurement data**

Line:


<b>EUT:</b>	<b>X-Shock - Absolute True Wireless Earphones</b>	<b>Probe:</b>	<b>L1</b>
<b>Model:</b>	<b>X-Shock</b>	<b>Power Source:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>BT mode</b>	<b>Test by:</b>	<b>Bill</b>
<b>Temp./Hum.(%RH):</b>	<b>26°C/60%RH</b>		
<b>Note:</b>			

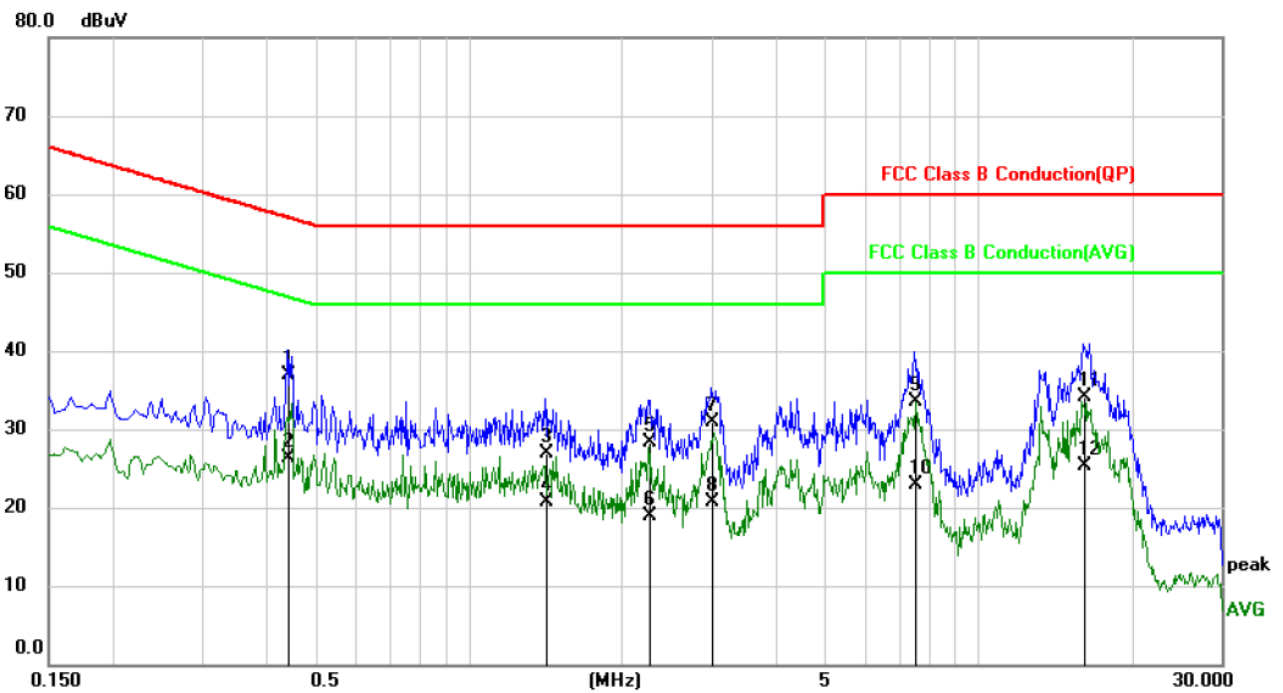

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.4420	26.78	10.03	36.81	57.02	-20.21	QP
2		0.4420	16.36	10.03	26.39	47.02	-20.63	AVG
3		1.4180	17.05	9.84	26.89	56.00	-29.11	QP
4		1.4180	10.84	9.84	20.68	46.00	-25.32	AVG
5		2.2700	18.45	9.81	28.26	56.00	-27.74	QP
6		2.2700	9.03	9.81	18.84	46.00	-27.16	AVG
7		3.0020	21.14	9.79	30.93	56.00	-25.07	QP
8		3.0020	10.82	9.79	20.61	46.00	-25.39	AVG
9		7.5220	23.68	9.76	33.44	60.00	-26.56	QP
10		7.5220	13.07	9.76	22.83	50.00	-27.17	AVG
11		16.1060	24.28	9.82	34.10	60.00	-25.90	QP
12		16.1060	15.51	9.82	25.33	50.00	-24.67	AVG

Neutral:

<b>EUT:</b>	<b>X-Shock - Absolute True Wireless Earphones</b>	<b>Probe:</b>	<b>N</b>
<b>Model:</b>	<b>X-Shock</b>	<b>Power Source:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>BT mode</b>	<b>Test by:</b>	<b>Bill</b>
<b>Temp./Hum.(%RH):</b>	<b>26°C/60%RH</b>		
<b>Note:</b>			

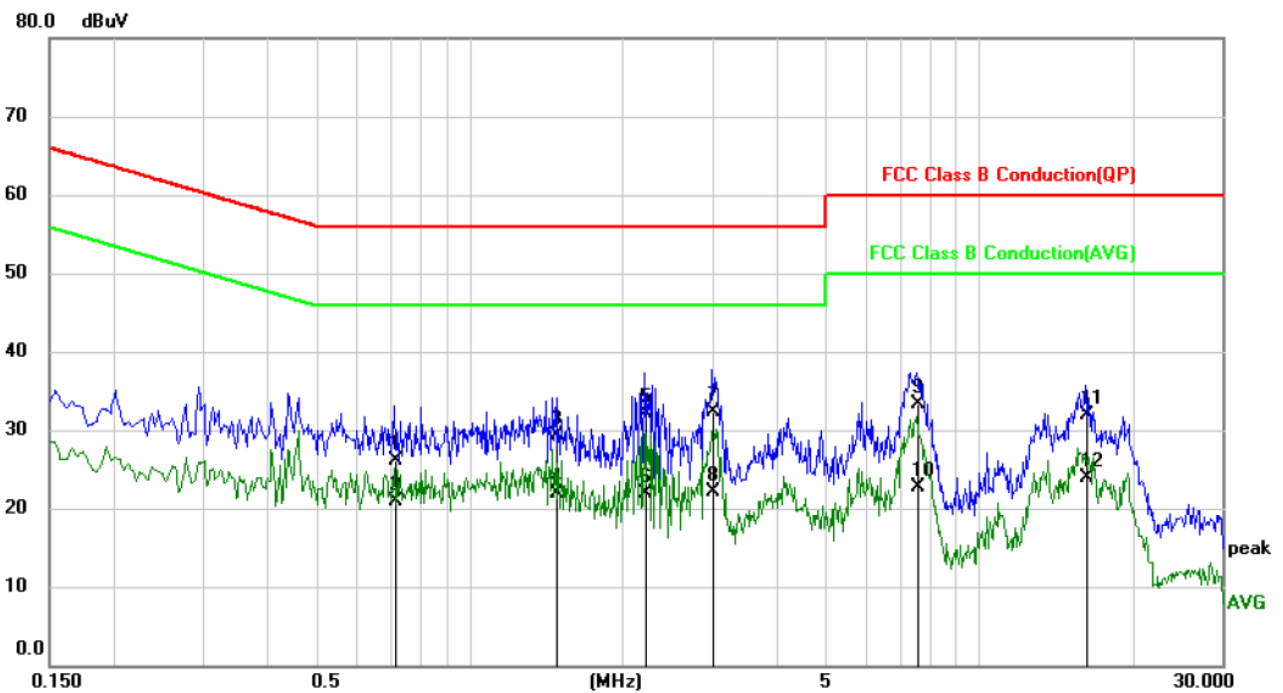


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.7140	16.06	10.13	26.19	56.00	-29.81	QP
2	0.7140	10.87	10.13	21.00	46.00	-25.00	AVG
3	1.4819	19.24	10.00	29.24	56.00	-26.76	QP
4	1.4819	11.82	10.00	21.82	46.00	-24.18	AVG
5	2.2060	22.10	9.99	32.09	56.00	-23.91	QP
6	2.2060	11.86	9.99	21.85	46.00	-24.15	AVG
7 *	3.0020	22.39	9.98	32.37	56.00	-23.63	QP
8	3.0020	12.10	9.98	22.08	46.00	-23.92	AVG
9	7.5260	23.38	9.96	33.34	60.00	-26.66	QP
10	7.5260	12.80	9.96	22.76	50.00	-27.24	AVG
11	16.1780	21.96	10.01	31.97	60.00	-28.03	QP
12	16.1780	13.91	10.01	23.92	50.00	-26.08	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. *Final Level = Receiver Read level + Correct factor*
4. *Correct factor = LISN Factor + Cable Loss*
5. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 7.3 Conducted Output Power

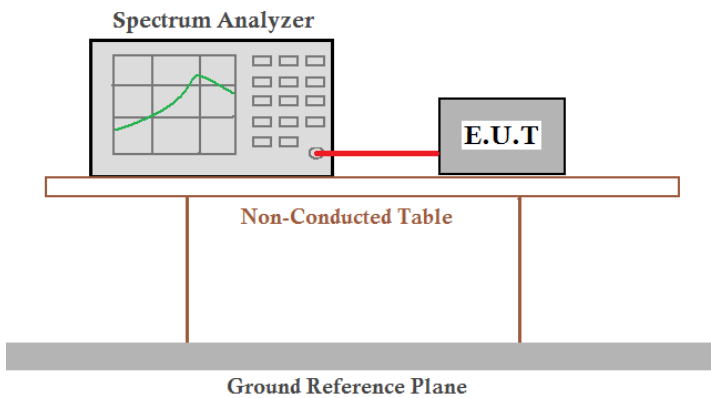
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	0.25	30.00	Pass
Middle	0.75		
Highest	-0.52		




Test plot as follows:

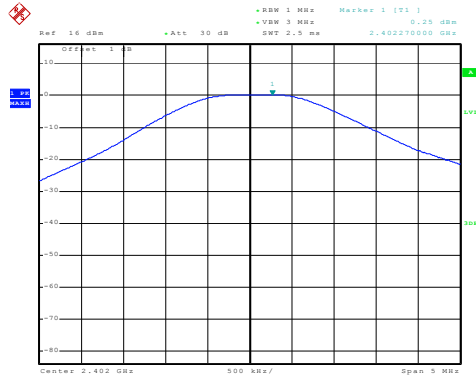


Date: 5 JUN 2018 20:02:23

Lowest channel

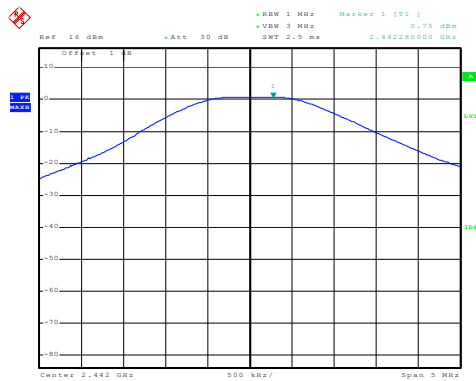

Date: 5 JUN 2018 20:05:08


Middle channel

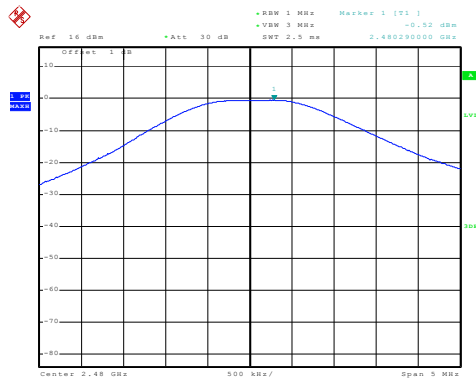

Date: 5 JUN 2018 20:05:40

Highest channel


## 7.4 Channel Bandwidth

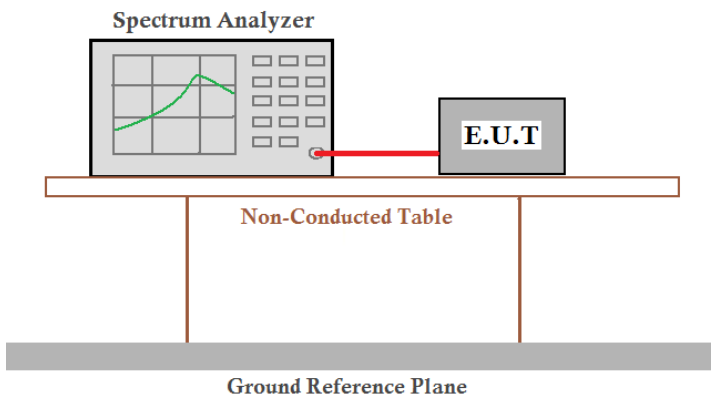Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.696	>500	Pass
Middle	0.708		
Highest	0.702		

Test plot as follows:

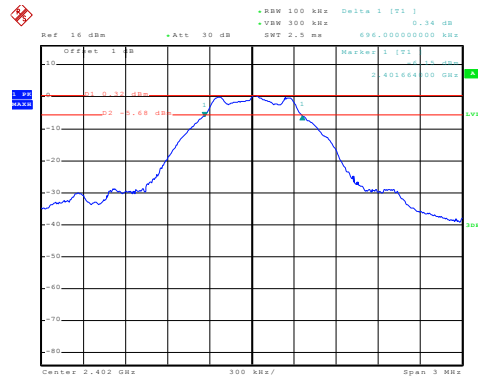


Date: 5.JUN.2018 20:12:28

Lowest channel

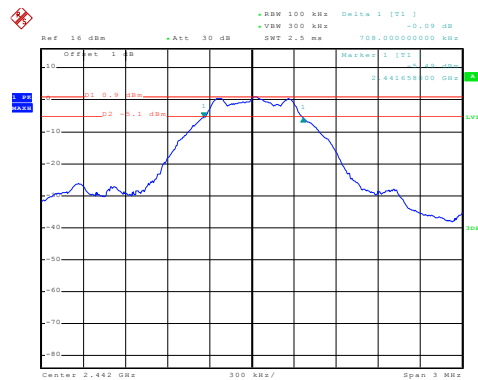

Date: 5.JUN.2018 20:11:35


Middle channel

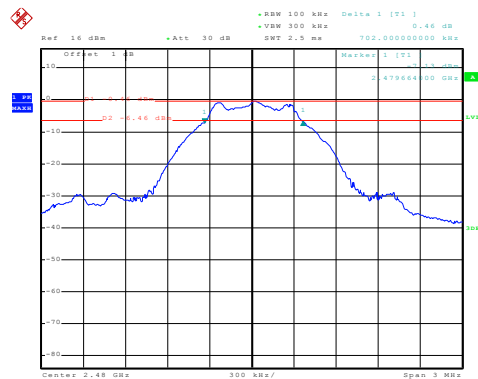

Date: 5.JUN.2018 20:10:45

Highest channel

## 7.5 Power Spectral Density

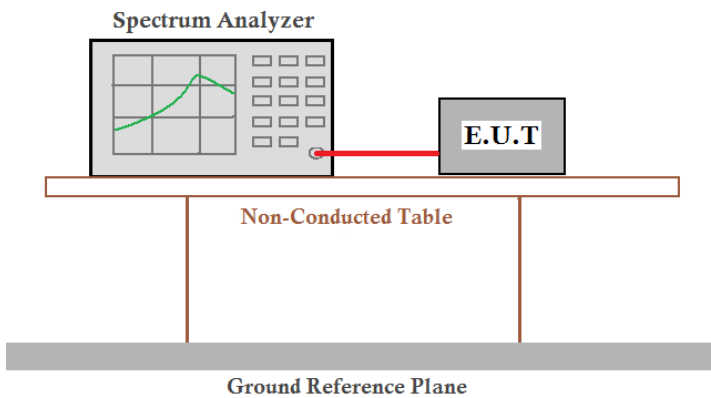Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
Lowest	-15.99	8.00	Pass
Middle	-15.74		
Highest	-17.12		

Remark:


Power Spectral Density (dBm/3kHz)=PSD value(RBW=100kHz)-10log(100kHz/3kHz)

Test plot as follows:

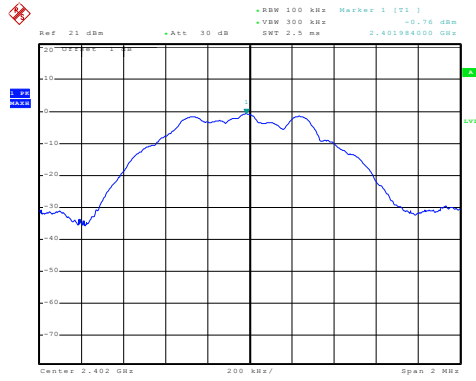


Date: 6.JUN.2018 09:45:08

Lowest channel

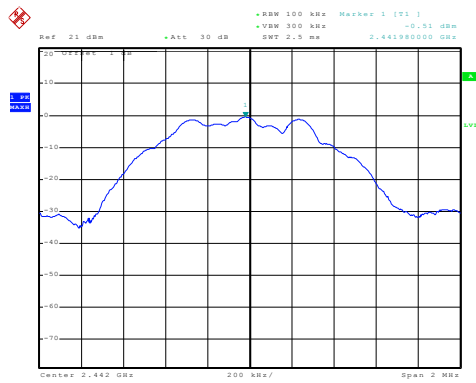

Date: 6.JUN.2018 09:46:15

Middle channel

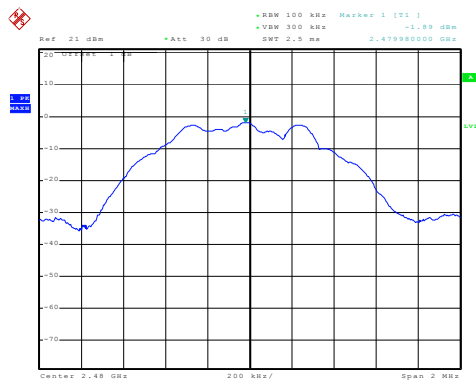


Date: 6.JUN.2018 09:47:24


Highest channel

## 7.6 Band edges


### 7.6.1 Conducted Emission Method

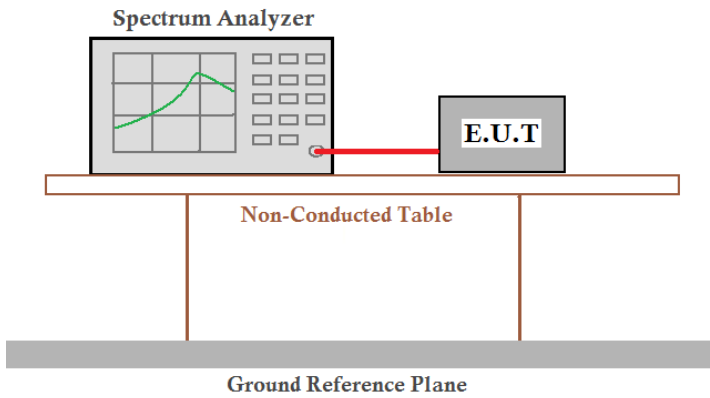Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Test plot as follows:

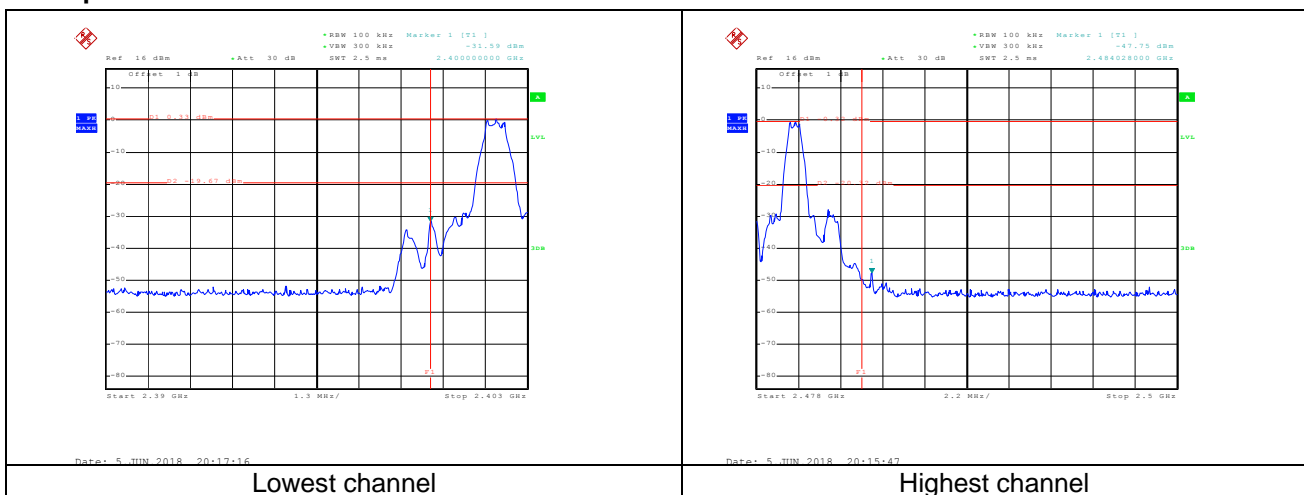

## 7.6.2 Radiated Emission Method

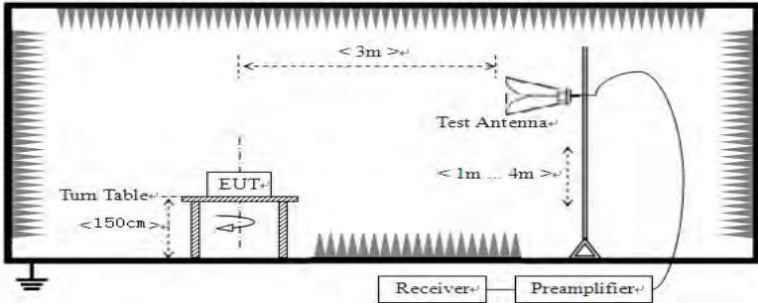Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency	Limit (dBuV/m @3m)		Value	
	Above 1GHz	54.00		Average	
		74.00		Peak	
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	54.13	-15.05	39.08	74.00	-34.92	Horizontal
2400.00	76.87	-15.01	61.86	74.00	-12.14	Horizontal
2390.00	53.45	-15.05	38.40	74.00	-35.60	Vertical
2400.00	71.09	-15.01	56.08	74.00	-17.92	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	42.21	-15.05	27.16	54.00	-26.84	Horizontal
2400.00	53.98	-15.01	38.97	54.00	-15.03	Horizontal
2390.00	43.56	-15.05	28.51	54.00	-25.49	Vertical
2400.00	42.28	-15.01	27.27	54.00	-26.73	Vertical

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	70.34	-14.68	55.66	74.00	-18.34	Horizontal
2500.00	54.52	-14.60	39.92	74.00	-34.08	Horizontal
2483.50	60.75	-14.68	46.07	74.00	-27.93	Vertical
2500.00	53.88	-14.60	39.28	74.00	-34.72	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.76	-14.68	27.08	54.00	-26.92	Horizontal
2500.00	41.48	-14.60	26.88	54.00	-27.12	Horizontal
2483.50	41.52	-14.68	26.84	54.00	-27.16	Vertical
2500.00	42.38	-14.60	27.78	54.00	-26.22	Vertical


Remark:

1. Final Level = Receiver Read level + Correct factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.




## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

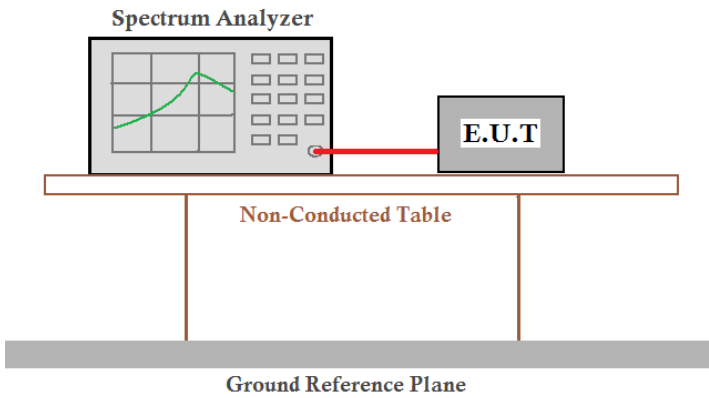Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Test plot as follows:**


Lowest channel

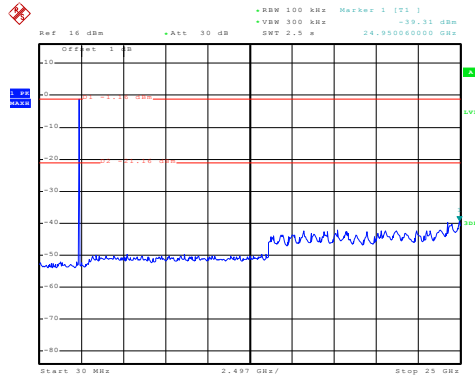

Date: 5 JUN.2018 20:19:35

30MHz~25GHz


Middle channel

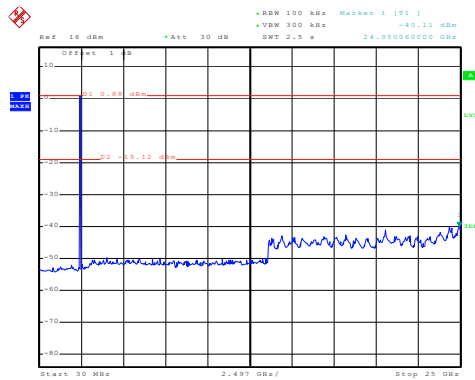

Date: 5 JUN.2018 20:20:56

30MHz~25GHz


Highest channel

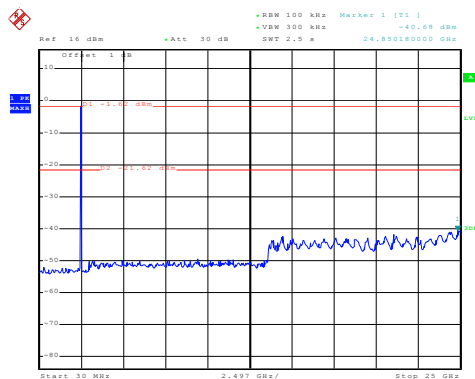


Date: 5 JUN.2018 20:22:42

30MHz~25GHz

## 7.7.2 Radiated Emission Method

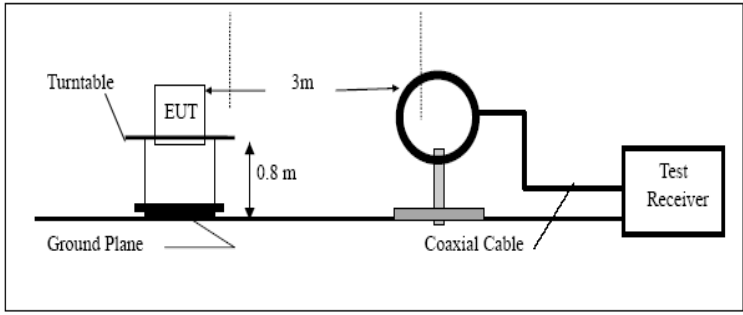Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	Below 30MHz				
					
Below 1GHz					

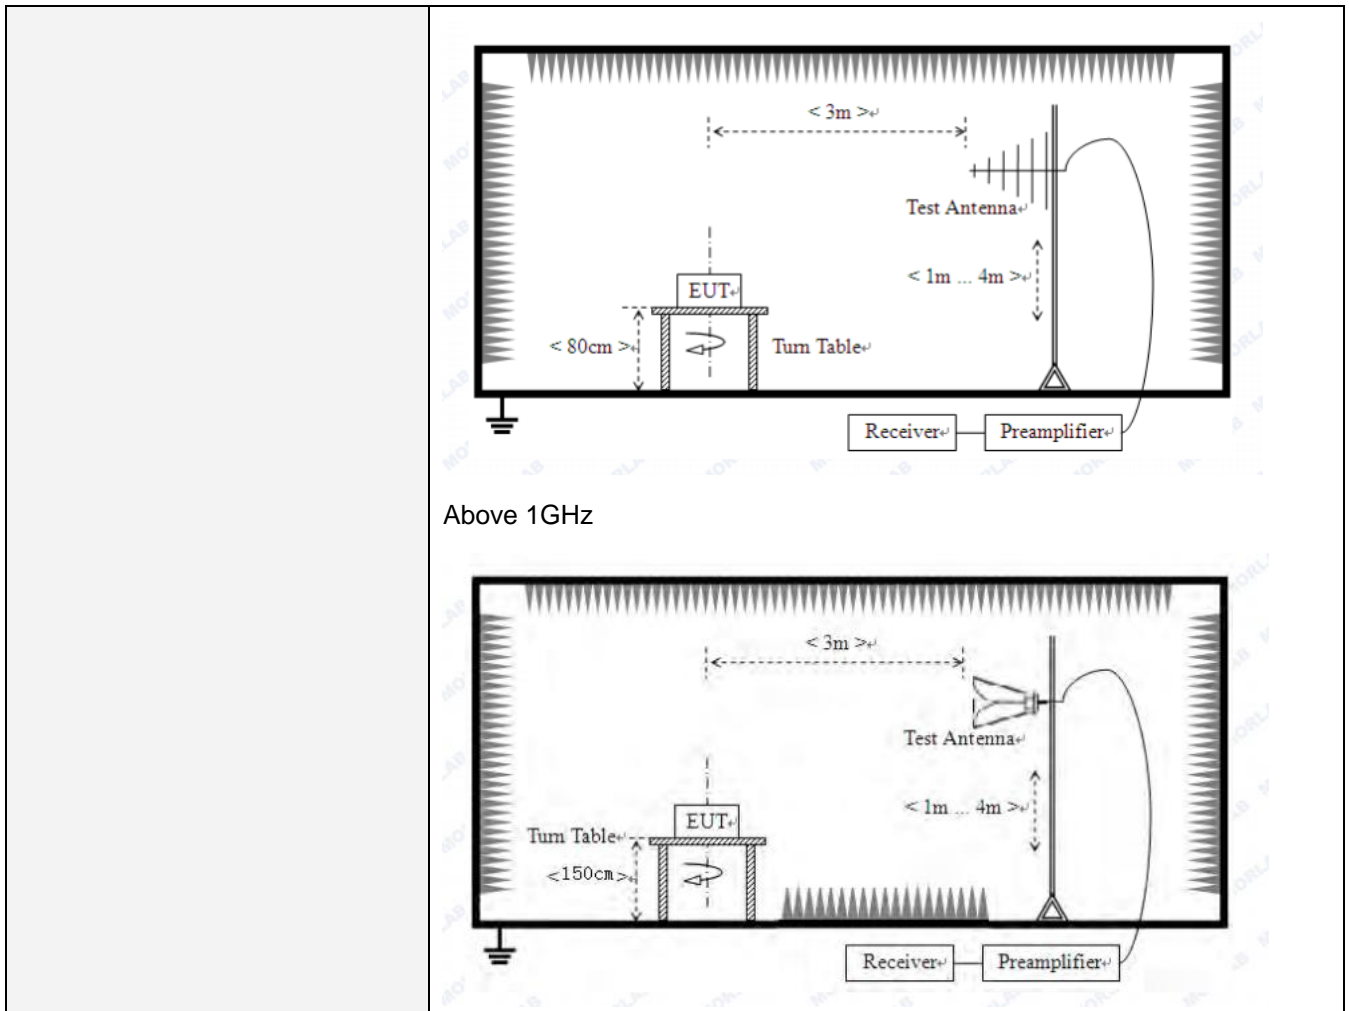

Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement Data

*Remark:*

*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*


### ■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz

Horizontal:


<b>EUT:</b>	<b>X-Shock - Absolute True Wireless Earphones</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Model:</b>	<b>X-Shock</b>	<b>Power Source:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>BLE mode</b>	<b>Test by:</b>	<b>Bill</b>
<b>Temp./Hum.(%RH):</b>	<b>26°C/60%RH</b>		
<b>Note:</b>			

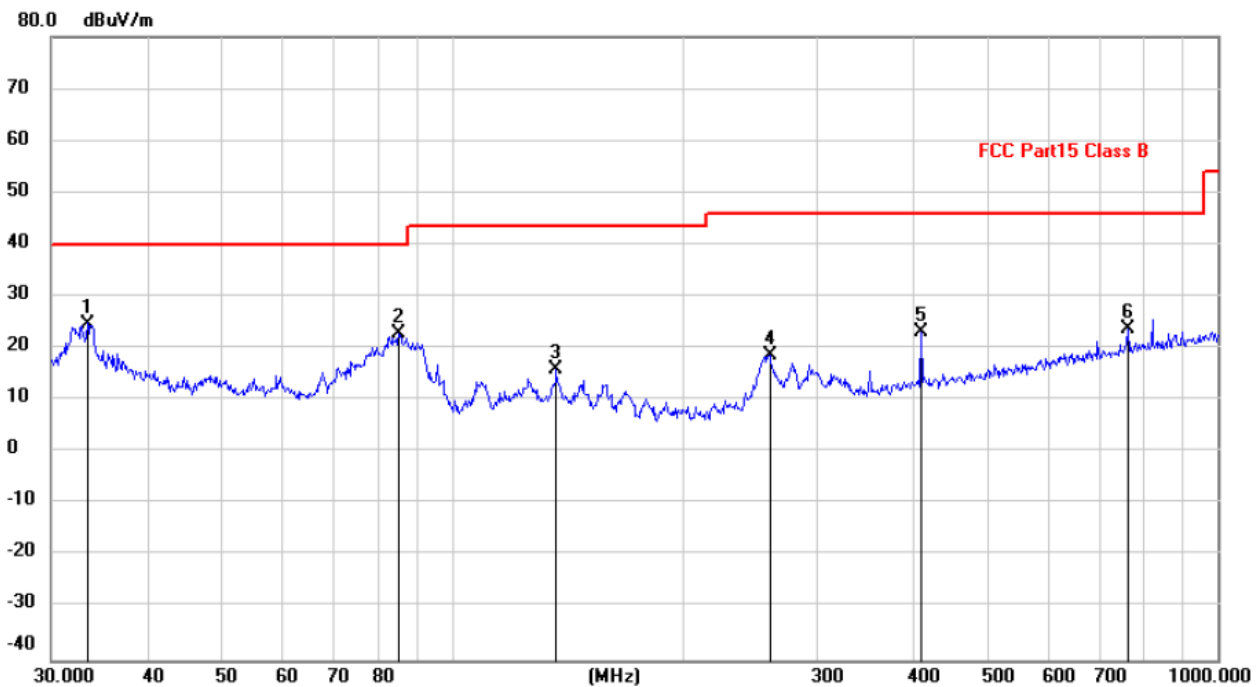

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	33.4448	57.89	-33.09	24.80	40.00	-15.20	QP
2		85.2980	61.98	-39.04	22.94	40.00	-17.06	QP
3		136.9391	51.30	-35.41	15.89	43.50	-27.61	QP
4		260.1444	54.85	-36.09	18.76	46.00	-27.24	QP
5		410.3824	55.47	-32.17	23.30	46.00	-22.70	QP
6		763.3757	49.05	-25.39	23.66	46.00	-22.34	QP

**Vertical:**

<b>EUT:</b>	<b>X-Shock - Absolute True Wireless Earphones</b>	<b>Polarziation:</b>	<b>Vertical</b>
<b>Model:</b>	<b>X-Shock</b>	<b>Power Source:</b>	<b>AC120V/60Hz</b>
<b>Mode:</b>	<b>BLE mode</b>	<b>Test by:</b>	<b>Bill</b>
<b>Temp./Hum.(%H):</b>	<b>26°C/60%RH</b>		
<b>Note:</b>			

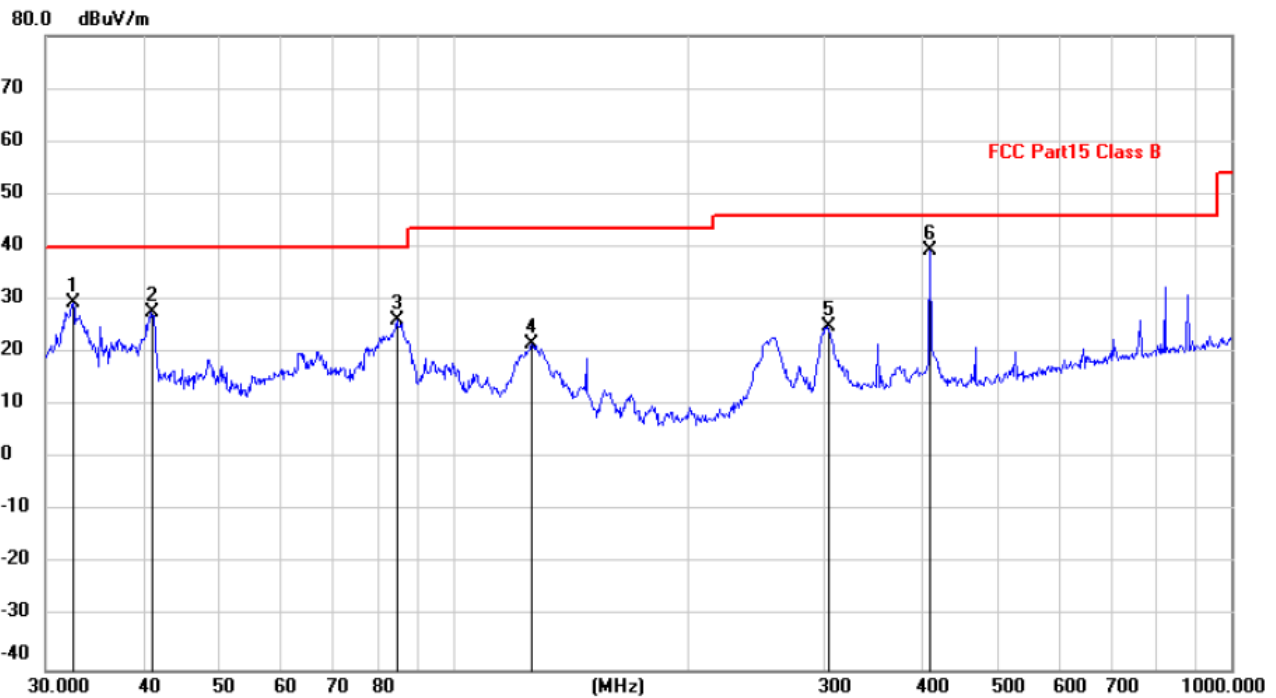

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.5197	62.51	-33.00	29.51	40.00	-10.49	QP
2		40.9881	60.91	-33.27	27.64	40.00	-12.36	QP
3		84.7018	65.26	-39.02	26.24	40.00	-13.76	QP
4		126.3285	57.90	-36.13	21.77	43.50	-21.73	QP
5		302.4812	59.81	-34.90	24.91	46.00	-21.09	QP
6	*	410.3824	71.51	-32.17	39.34	46.00	-6.66	QP

■ Above 1GHz

Test channel:	Lowest
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	57.74	-7.43	50.31	74.00	-23.69	Vertical
7206.00	57.69	-2.42	55.27	74.00	-18.73	Vertical
9608.00	58.03	-2.38	55.65	74.00	-18.35	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	59.65	-7.43	52.22	74.00	-21.78	Horizontal
7206.00	57.71	-2.42	55.29	74.00	-18.71	Horizontal
9608.00	57.48	-2.38	55.10	74.00	-18.90	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	48.56	-7.43	41.13	54.00	-12.87	Vertical
7206.00	47.48	-2.42	45.06	54.00	-8.94	Vertical
9608.00	47.79	-2.38	45.41	54.00	-8.59	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	50.01	-7.43	42.58	54.00	-11.42	Horizontal
7206.00	48.47	-2.42	46.05	54.00	-7.95	Horizontal
9608.00	47.01	-2.38	44.63	54.00	-9.37	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Correct factor*
2. *"\*", means this data is the too weak instrument of signal is unable to test.*
3. *Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor*



Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	59.87	-7.49	52.38	74.00	-21.62	Vertical
7326.00	57.81	-2.40	55.41	74.00	-18.59	Vertical
9768.00	57.93	-2.38	55.55	74.00	-18.45	Vertical
12210.00	*			74.00		Vertical
14652.00	*			74.00		Vertical
4884.00	58.81	-7.49	51.32	74.00	-22.68	Horizontal
7326.00	57.73	-2.40	55.33	74.00	-18.67	Horizontal
9768.00	57.85	-2.38	55.47	74.00	-18.53	Horizontal
12210.00	*			74.00		Horizontal
14652.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	52.01	-7.49	44.52	54.00	-9.48	Vertical
7326.00	49.45	-2.40	47.05	54.00	-6.95	Vertical
9768.00	48.38	-2.38	46.00	54.00	-8.00	Vertical
12210.00	*			54.00		Vertical
14652.00	*			54.00		Vertical
4884.00	49.44	-7.49	41.95	54.00	-12.05	Horizontal
7326.00	47.65	-2.40	45.25	54.00	-8.75	Horizontal
9768.00	49.34	-2.38	46.96	54.00	-7.04	Horizontal
12210.00	*			54.00		Horizontal
14652.00	*			54.00		Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Correct factor*
2. *"\*\*", means this data is the too weak instrument of signal is unable to test.*
3. *Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor*

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	60.02	-7.47	52.55	74.00	-21.45	Vertical
7440.00	59.24	-2.45	56.79	74.00	-17.21	Vertical
9920.00	57.78	-2.37	55.41	74.00	-18.59	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	58.81	-7.47	51.34	74.00	-22.66	Horizontal
7440.00	58.45	-2.45	56.00	74.00	-18.00	Horizontal
9920.00	57.30	-2.37	54.93	74.00	-19.07	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	48.27	-7.47	40.8	54.00	-13.20	Vertical
7440.00	48.63	-2.45	46.18	54.00	-7.82	Vertical
9920.00	48.11	-2.37	45.74	54.00	-8.26	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	50.34	-7.47	42.87	54.00	-11.13	Horizontal
7440.00	48.51	-2.45	46.06	54.00	-7.94	Horizontal
9920.00	47.28	-2.37	44.91	54.00	-9.09	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Correct factor*
2. *"\*\*", means this data is the too weak instrument of signal is unable to test.*
3. *Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor*

-----End-----