



# TEST REPORT

**FCC ID: 2AAWJ-SC628, IC: 11305A-SC628**

Applicant : Jethro Trading Ltd.

Address : 10385 McKinnon Crescent, Langley, BC, V1M 3V2, Canada

Equipment Under Test(EUT):

Name : Jethro Senior Cell Phone

Model : SC628

In Accordance with: FCC PART 2; FCC PART 22H; FCC PART 24E  
RSS-132, Issue 3, January 2013  
RSS-133, Issue 6, January 2013

**Report No** : T1850782 03

**Date of Test** : July 06- July 23, 2015

**Date of Issue** : July 24, 2015

**Test Result** : PASS

In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

A handwritten signature in black ink, appearing to read 'Mark Zhu', is placed above a solid horizontal line.

(Mark Zhu)

General Manager

The manufacturer should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Alpha Product Testing Co., Ltd. Or test done by Shenzhen Alpha Product Testing Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Alpha Product Testing Co., Ltd. Approvals in writing.

**Contents**

<b>1. General Information.....</b>	<b>5</b>
1.1. Description of Device (EUT) .....	5
1.2. Test Lab information .....	6
<b>2. Summary of test .....</b>	<b>7</b>
2.1. Summary of test result .....	7
2.2. Assistant equipment used for test.....	7
2.3. Test mode .....	8
2.4. Test Environment Conditions.....	8
2.5. Measurement Uncertainty (95% confidence levels, k=2) .....	8
2.6. Test Equipment .....	9
<b>3. Conducted Output power.....</b>	<b>10</b>
3.1. Block Diagram of Test Setup .....	10
3.2. Limit.....	10
3.3. Test Procedure.....	10
3.4. Test Result.....	10
<b>4. Radiated Output power.....</b>	<b>11</b>
4.1. Block Diagram of Test Setup .....	11
4.2. Limit.....	11
4.3. Test Procedure.....	11
4.4. Test Result.....	12
<b>5. Peak-to-Average Ratio .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup .....	13
5.2. Limit.....	13
5.3. Test Procedure.....	13
5.4. Test Result.....	13
<b>6. Occupied Bandwidth .....</b>	<b>14</b>
6.1. Block Diagram of Test Setup .....	14
6.2. Limit.....	14
6.3. Test Procedure.....	14
6.4. Test Result.....	15
6.5. Orginal test data .....	15
<b>7. Frequency stability.....</b>	<b>19</b>
7.1. Block Diagram of Test Setup .....	19
7.2. Limit.....	19
7.3. Test Procedure.....	19
7.4. Test Result.....	20
<b>8. Conducted spurious emissions .....</b>	<b>21</b>
8.1. Block Diagram of Test Setup .....	21
8.2. Limit.....	21
8.3. Test Procedure.....	21
8.4. Test Result.....	21
<b>9. Radiated Spurious emissions.....</b>	<b>27</b>
9.1. Block Diagram of Test Setup .....	27

9.2. Limit.....	27
9.3. Test Procedure.....	27
9.4. Test Result.....	28
<b>10. Band Edge Compliance .....</b>	<b>30</b>
10.1. Block Diagram of Test Setup .....	30
10.2. Limit.....	30
10.3. Test Procedure.....	30
10.4. Test Result.....	31
<b>11. Power line conducted emission .....</b>	<b>33</b>
11.1. Block Diagram of Test Setup .....	33
11.2. Limit.....	33
11.3. Test Procedure.....	33
11.4. Test Result.....	34
<b>12. Test setup photo .....</b>	<b>38</b>
<b>13. Photos of EUT .....</b>	<b>40</b>

## TEST REPORT VERIFICATION

Applicant : Jethro Trading Ltd.  
Manufacturer : Jethro Trading Ltd.  
EUT Description : Jethro Senior Cell Phone

(A) Model No. : SC628  
(B) Trademark :   
(C) Ratings Supply : DC 3.7V from battery  
(D) Test Voltage : DC 3.7V from battery

Measurement Standard Used:

FCC Rules and Regulations Part 22H &P22E, RSS-132&RSS-133, ANSI C63.4-2014


The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the Part 22H &P22E, RSS-132&RSS-133 limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Eric Huang  
Test Engineer



Approved by (name + signature).....:

Simple Guan  
Project Manager



Date of issue.....

July 24, 2015

## 1. General Information

### 1.1. Description of Device (EUT)

EUT : Jethro Senior Cell Phone

Trade Name : 

Model No. : SC628

DIFF. : N/A

Power supply : DC 3.7V Supply by battery

Adapter : Manufacturer: NIL

Adapter : Model No.:S050-050-US

Radio Technology : WCDMA BAND II/V

Release Version : Rel-6

Operation frequency : WCDMA BAND II: 1852.4MHz—1907.6MHz

WCDMA BAND V: 826.4MHz—846.6MHz

Modulation : WCDMA: QPSK

Antenna Type : PCB Antenna, max gain 1 dBi for WCDMA850

PCB Antenna, max gain 0.85 dBi for WCDMA1900

Applicant : Jethro Trading Ltd.

Address : 10385 McKinnon Crescent, Langley, BC, V1M 3V2, Canada

Manufacturer : Jethro Trading Ltd.

Address : 10385 McKinnon Crescent, Langley, BC, V1M 3V2, Canada

## 1.2. Test Lab information

Shenzhen Alpha Product Testing Co., Ltd  
Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road,  
Bao'an, Shenzhen, China

August 11, 2014 File on Federal Communication Commission  
Registration Number: 203110

July 18, 2014 Certificated by IC  
Registration Number: 12135A

## 2. Summary of test

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Conducted Output power	FCC PART 2: 2.1046 FCC PART 22H: 22.913 (a) FCC PART 24E: 24.232 (c)	PASS
Radiated Output power(erp/eirp)	FCC PART 22H:22.913 (a) FCC PART 24E:24.232(c)	PASS
Occupied bandwidth	FCC PART 2: 2.1049 FCC PART 22H: 22.917 (b) FCC PART 24E: 24.238 (b)	PASS
Frequency stability	FCC PART 2: 2.1055 FCC PART 22H: 22.355 FCC PART 24E: 24.235	PASS
Conducted spurious emission (Antenna terminal)	FCC PART 2: 2.1051 FCC PART 22H: 22.917 FCC PART 24E: 24.238	PASS
Radiated spurious emissions	FCC PART 2: 2.1053 FCC PART 22H: 22.917 FCC PART 24E: 24.238	PASS
Band edge compliance	FCC PART 22H: 22.917 (b) FCC PART 24E: 24.238 (b)	PASS
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.4: 2003	PASS

### 2.2. Assistant equipment used for test

Description	:	Adapter
Manufacturer	:	NIL
Model No.	:	S050-050-US
Input	:	AC 100-240V, 50-60Hz, 0.2A
Output	:	DC 5.0V, 0.5A

### 2.3. Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level in each test mode and channel as below:

Mode	Channel	Frequency(MHz)
UMTS BAND V	4132	824.2
	4182	836.6
	4233	846.6
UMTS BAND II	9262	1852.4
	9400	1880.0
	9538	1907.6

### 2.4. Test Environment Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

### 2.5. Measurement Uncertainty (95% confidence levels, k=2)


Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	$1 \times 10^{-9}$	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

## 2.6. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2015.01.19	1 Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2015.01.19	1 Year
Receiver	R&S	ESCI	1166.5950K03-1 011	2015.01.19	1 Year
Receiver	R&S	ESCI	101202	2015.01.19	1 Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2015.01.21	1 Year
Horn Antenna	EMCO	3115	640201028-06	2015.01.21	1 Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2015.01.21	1 Year
Cable	Resenberger	N/A	No.1	2015.01.19	1 Year
Cable	SCHWARZBECK	N/A	No.2	2015.01.19	1 Year
Cable	SCHWARZBECK	N/A	No.3	2015.01.19	1 Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2015.01.19	1 Year
Pre-amplifier	R&S	AFS33-18002650 -30-8P-44	SEL0080	2015.01.19	1 Year
Base station	Agilent	E5515C	GB44300243	2015.01.19	1 Year
Temperature controller	Terchy	MHQ	120	2015.01.19	1 Year
Power divider	Anritsu	K240C	020346	2015.01.19	1 Year
Signal Generator	HP	83732B	VS3449051	2015.01.19	1 Year
Power Meter	Anritsu	ML2487A	6K00001491	2015.01.19	1 Year
Power sensor	Anritsu	ML2491A	32516	2015.01.19	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2016.01.19	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2016.01.19	1 Year

### 3. Conducted Output power

#### 3.1. Block Diagram of Test Setup

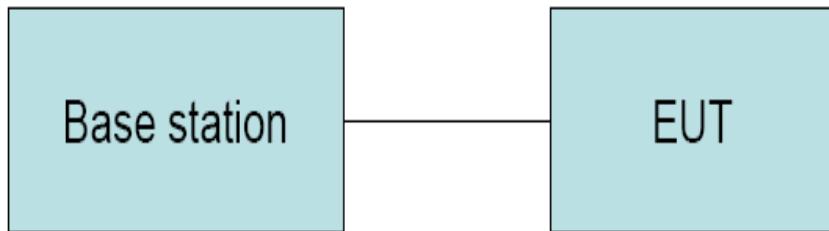

#### 3.2. Limit

Cellular Telephone 850MHz	PCS 1900MHz
38.5dBm(ERP)	33dBm(EIRP)

#### 3.3. Test Procedure


- (1) The EUT's RF output port was connected to base station.
- (2) A call is set up by the SS according to the generic call set up procedure
- (3) Set EUT at maximum power level through base station by power level command
- (4) Measure the maximum output power of EUT at each frequency band and mode by base station.

#### 3.4. Test Result

EUT: Jethro Senior Cell Phone		M/N:SC628		Power: DC 3.7V from battery									
Ambient Temperature:24°C		Relative Humidity: 62%											
Test date: 2015-07-06		Test site: RF site		Tested by: Simple Guan									
Conclusion: PASS													
Mode	Channel	PK Output Power(dBm)								Limit (dBm)			
		WCDMA	HSDPA			HSUPA							
WCDMA 850	4132	22.73	21.89	21.80	22.24	22.18	21.75	19.74	20.66	19.78	21.79	38.5	
	4182	22.74	21.90	21.74	22.21	22.19	21.78	19.76	20.75	19.75	21.79	38.5	
	4233	22.63	21.84	21.79	22.09	22.04	21.71	19.70	20.69	19.63	21.80	38.5	
WCDMA 1900	9262	21.46	20.86	20.75	20.35	20.28	20.73	18.71	19.68	18.75	20.76	33	
	9400	23.19	22.43	22.35	21.91	21.88	22.45	20.42	21.46	20.44	22.48	33	
	9538	22.21	21.32	21.24	21.69	21.67	21.33	19.30	20.29	19.32	21.39	33	

## 4. Radiated Output power

### 4.1. Block Diagram of Test Setup

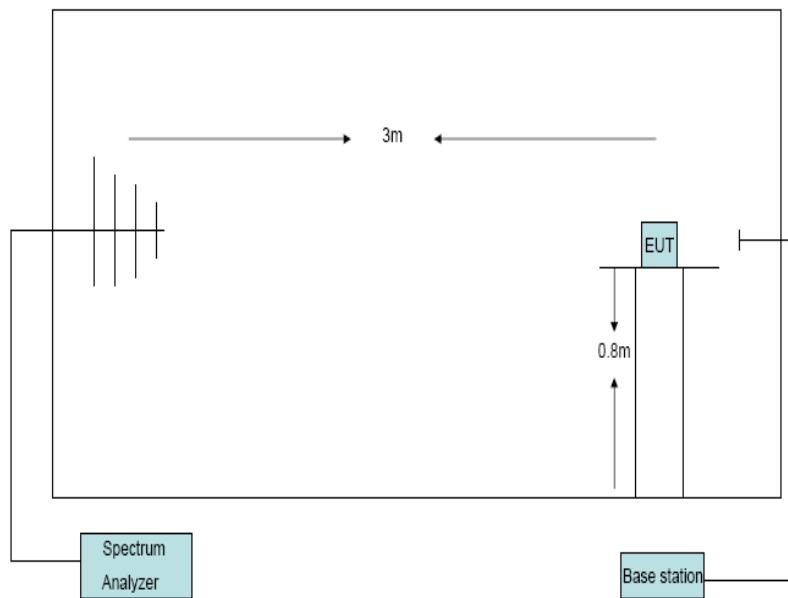

### 4.2. Limit

Cellular Telephone 850MHz	PCS 1900MHz
38.5dBm(ERP)	33dBm(EIRP)

### 4.3. Test Procedure

1. The EUT was placed on a non-conductive rotating platform with 0.8 meter height in an anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz, VBW= 3MHz and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (for frequency below 1GHz) or Horn antenna (for frequency above 1GHz) at same location with same polarize of receiver antenna and then a known power of each measure frequency from


S.G. was applied into the dipole antenna or Horn antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Substitution antenna Loss(only for Dipole antenna) - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$

#### 4.4. Test Result

EUT: Jethro Senior Cell Phone M/N:SC628					
Power: DC 3.7V from battery					
Ambient Temperature: 23°C		Relative Humidity: 60%			
Test date: 2015-07-06		Test site: RF site		Tested by: Simple Guan	
Conclusion: PASS					
Mode	Channel	LVL (dBm)	Correction factor(dB)	ERP (dBm)	EIRP (dBm)
WCDMA BAND V	4132	-6.41	30.27	21.71	/
	4182	-6.45	30.16	21.56	/
	4233	-6.85	30.24	21.24	/
WCDMA BAND II	9262	-25.62	46.83	/	21.21
	9400	-25.64	46.97	/	21.33
	9538	-25.66	46.96	/	21.30
ERP=LVL + Correction factor -2.15					
EIRP=LVL+ Correction factor					

## 5. Peak-to-Average Ratio

### 5.1. Block Diagram of Test Setup

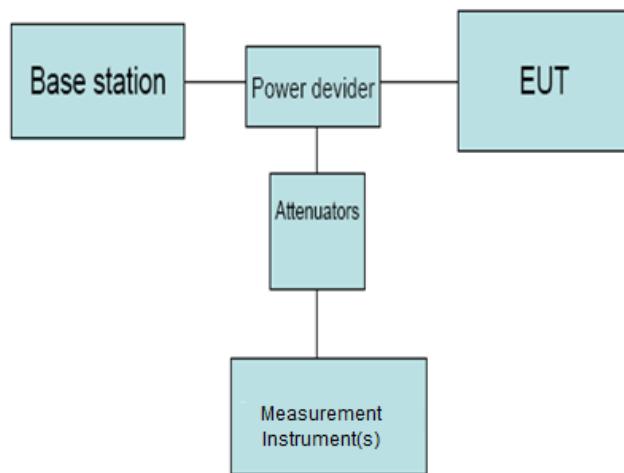

### 5.2. Limit

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 5.3. Test Procedure


The EUT' RF output port was connected to Measurement Instrument(s) and Base Station via power divider, and then measure the test data.

### 5.4. Test Result

Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
WCDMA1900	WCDMA	LCH	2.89	13	PASS
		MCH	3.12	13	PASS
		HCH	2.76	13	PASS

## 6. Occupied Bandwidth

### 6.1. Block Diagram of Test Setup

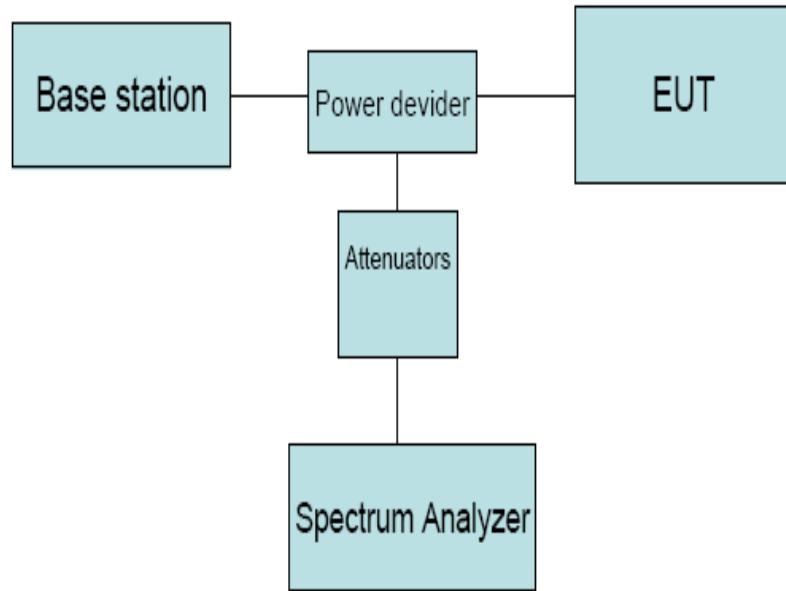

### 6.2. Limit

N/A

### 6.3. Test Procedure


1. The EUT' RF output port was connected to Spectrum Analyzer and Base Station via power divider.
2. Spectrum analyzer's occupied bandwidth measure function was used to measure 99% bandwidth and -26dBc bandwidth
- .

## 6.4. Test Result


EUT: Jethro Senior Cell Phone M/N:SC628			
Power: DC 3.7V from battery			
Ambient Temperature: 23 °C		Relative Humidity: 60%	
Test date: 2015-07-06		Test site: RF site	Tested by: Simple Guan
Mode	Channel	99% bandwidth (MHz)	-26dBc bandwidth (MHz)
WCDMA BAND V	4132	4.1496	4.721
	4182	4.1617	4.739
	4233	4.1517	4.724
WCDMA BAND II	9262	4.1428	4.728
	9400	4.1572	4.728
	9538	4.1541	4.727

## 6.5. Orginal test data


### WCDMA BAND V CH4132

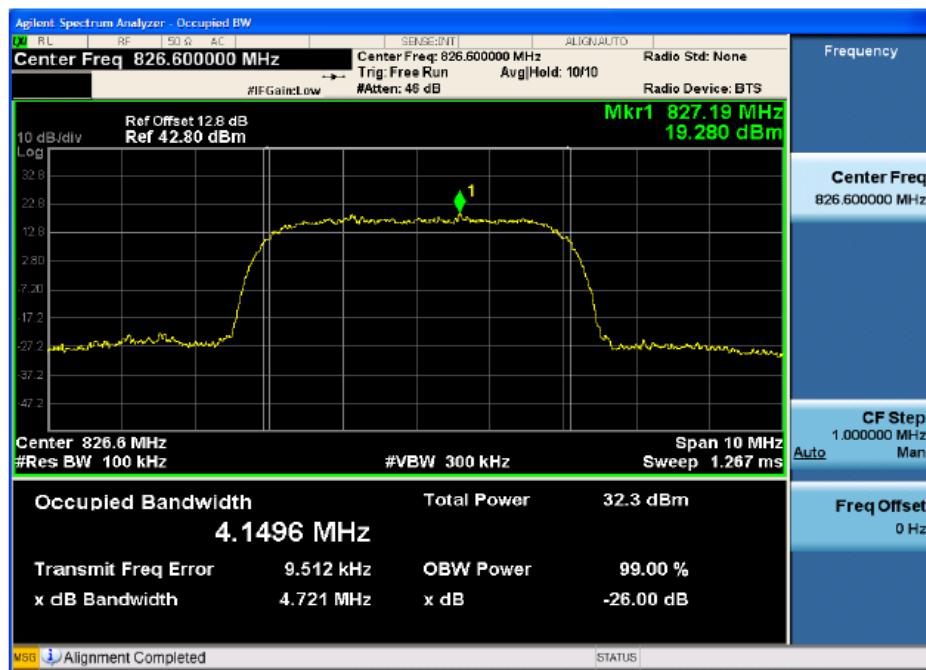


## WCDMA BAND V CH4182

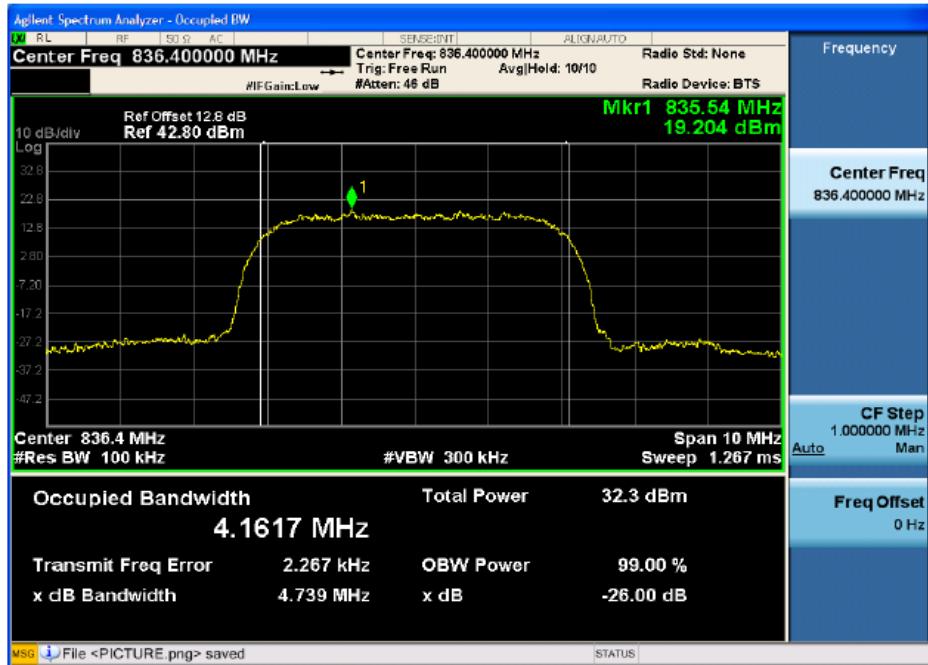


## WCDMA BAND V CH4233

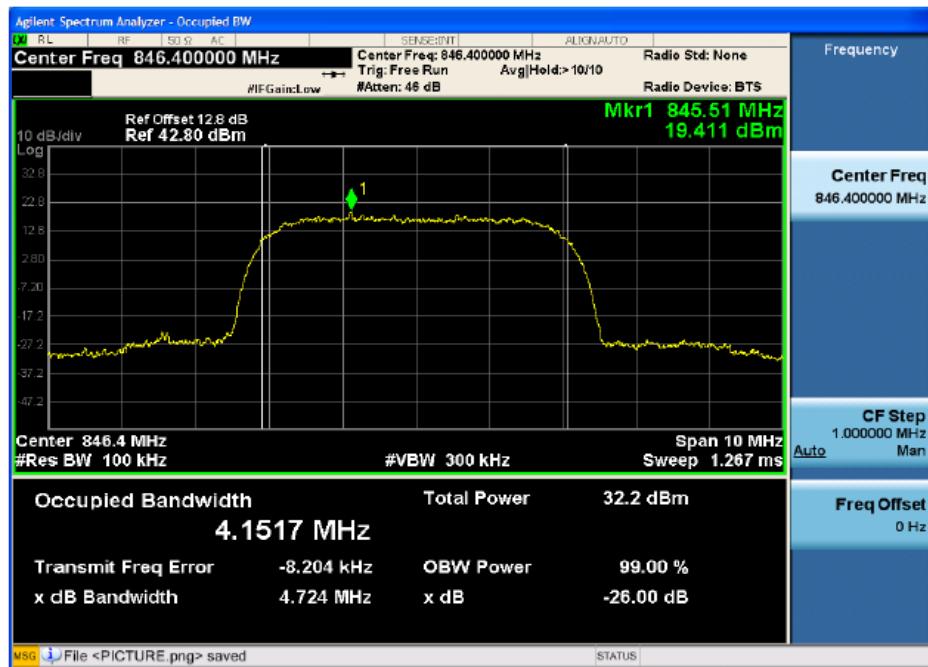


## WCDMA BAND II CH9262

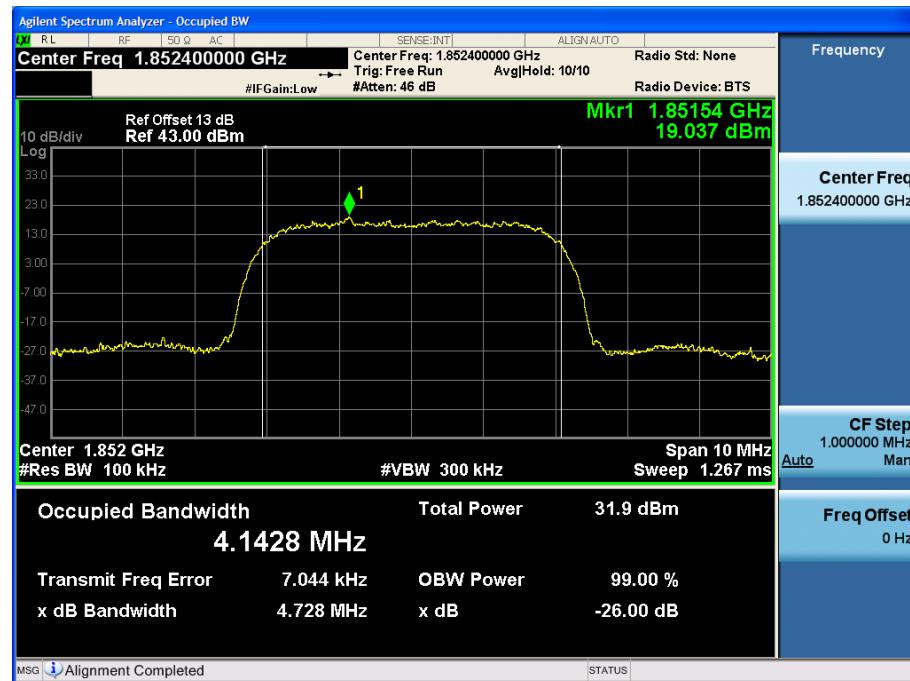

## WCDMA BAND II CH9400

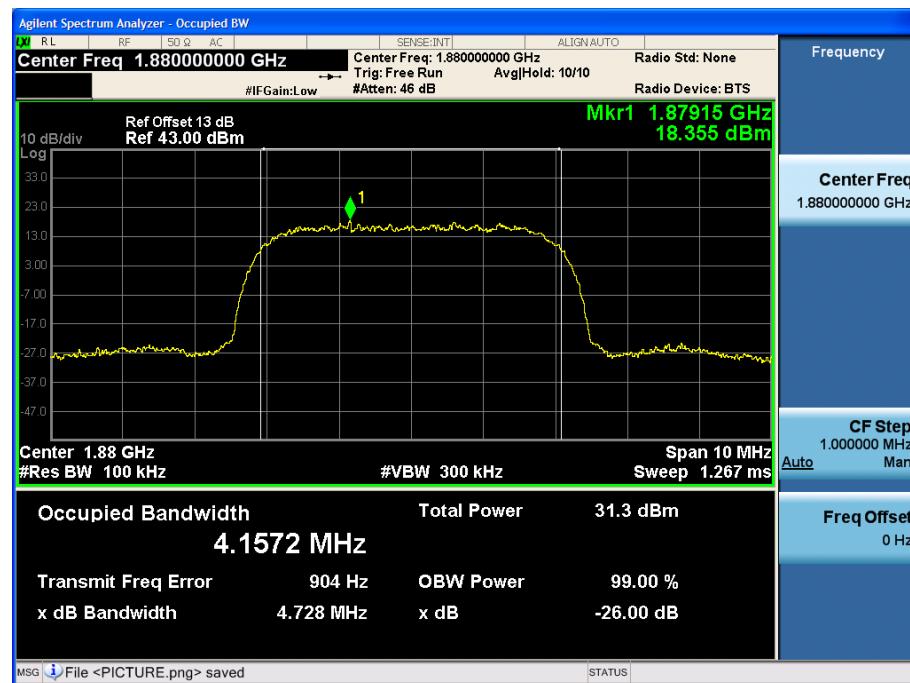


## WCDMA BAND II CH9538

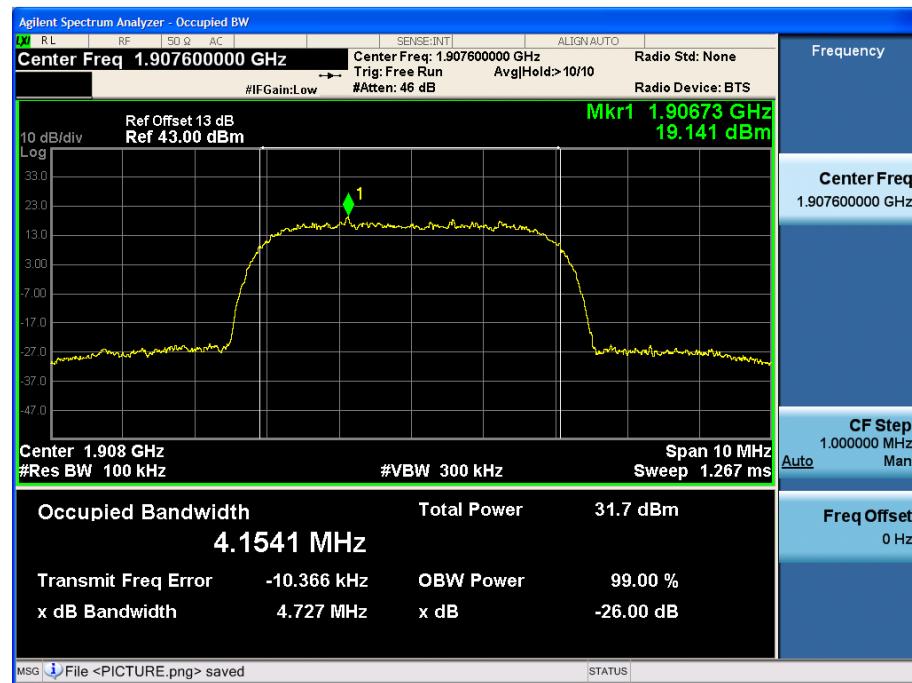

## 7. Frequency stability

### 7.1. Block Diagram of Test Setup

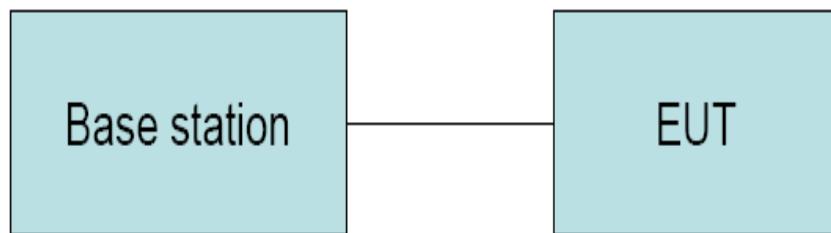

### 7.2. Limit

Cellular Telephone 850MHz	PCS 1900MHz
$\pm 2.5$ ppm	Must stay within the authorized frequency block

### 7.3. Test Procedure

#### Test Procedures for Temperature Variation:

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-10^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $45^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at  $-10^{\circ}\text{C}$ , the testing lowest temperature will be raised in  $10^{\circ}\text{C}$  step until the EUT can be turned on.

#### Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25 \pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from DC 5V to 3.5V
3. The variation in frequency was measured for the worst case.


## 7.4. Test Result

EUT: Jethro Senior Cell Phone M/N:SC628			
Power: DC 3.7V from battery			
Ambient Temperature:23°C		Relative Humidity: 60%	
Test date: 2015-07-06		Test site: RF site	Tested by: Simple Guan
Conclusion: PASS			
Mode	Voltage (V)	Frequency error (Hz)	frequency error (ppm)
WCDMA BAND V CH4182	8.5V	21.38	0.03
	7.5V	-14.82	-0.02
	6.5V	18.84	0.02
	6.4V	-12.75	-0.02
	6.3V	-12.72	-0.02
WCDMA BAND II CH9400	8.5V	-22.75	-0.01
	7.5V	39.92	0.02
	6.5V	-25.58	-0.01
	6.4V	33.95	0.02
	6.3V	-24.76	-0.01

Mode	Temperature (°C)	Frequency error (Hz)	frequency error (ppm)
WCDMA BAND V CH4182	-10	26.18	0.03
	0	-9.92	-0.01
	10	23.74	0.03
	20	-7.55	-0.01
	30	-7.82	-0.01
	40	-17.75	-0.02
	50	44.82	0.02
WCDMA BAND II CH9400	-10	-20.68	-0.01
	0	39.25	0.02
	10	-19.86	-0.01
	20	26.18	0.01
	30	-9.92	-0.01
	40	26.18	0.03
	50	-9.92	-0.01

## 8. Conducted spurious emissions

### 8.1. Block Diagram of Test Setup

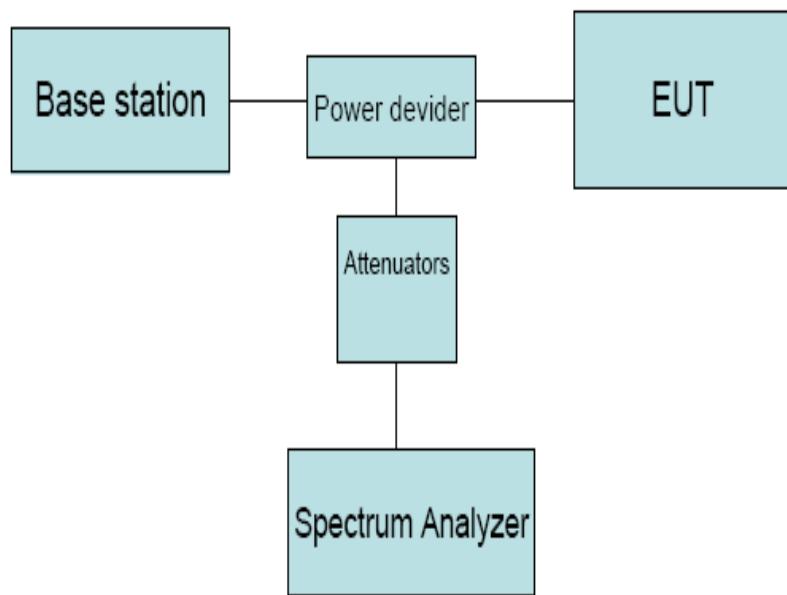

### 8.2. Limit

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency outside the frequency band by at least  $(43 + 10 \log P)$  dB, in this case, -13dBm.



### 8.3. Test Procedure

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The low, middle and high channels of each band and mode's spurious emissions for 30MHz to 10th Harmonic were measured by Spectrum analyzer.



### 8.4. Test Result

**PASS**



## Test Mode: WCDMA BAND V CH4132

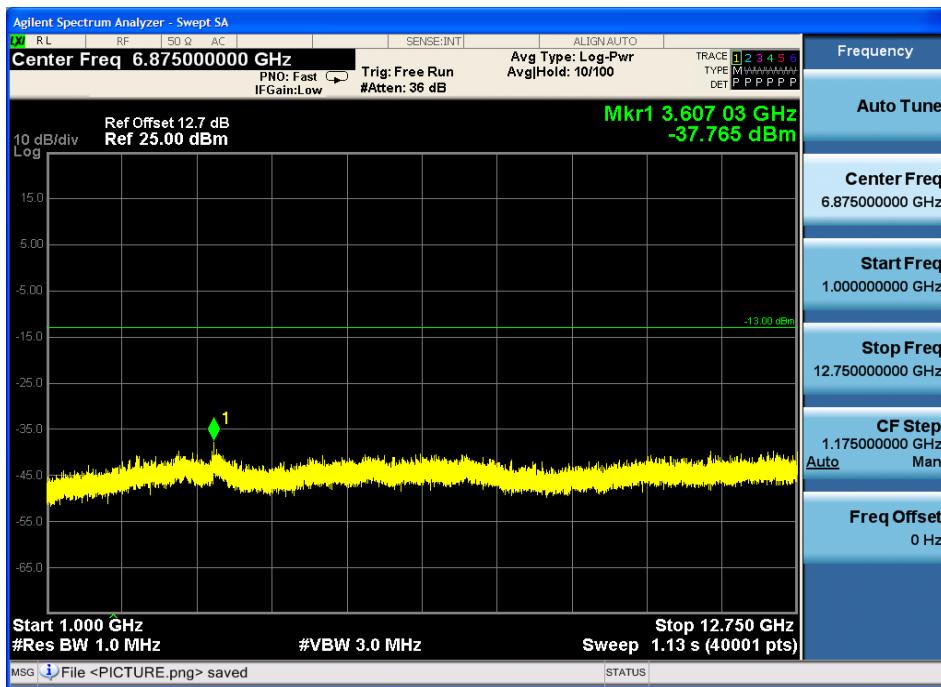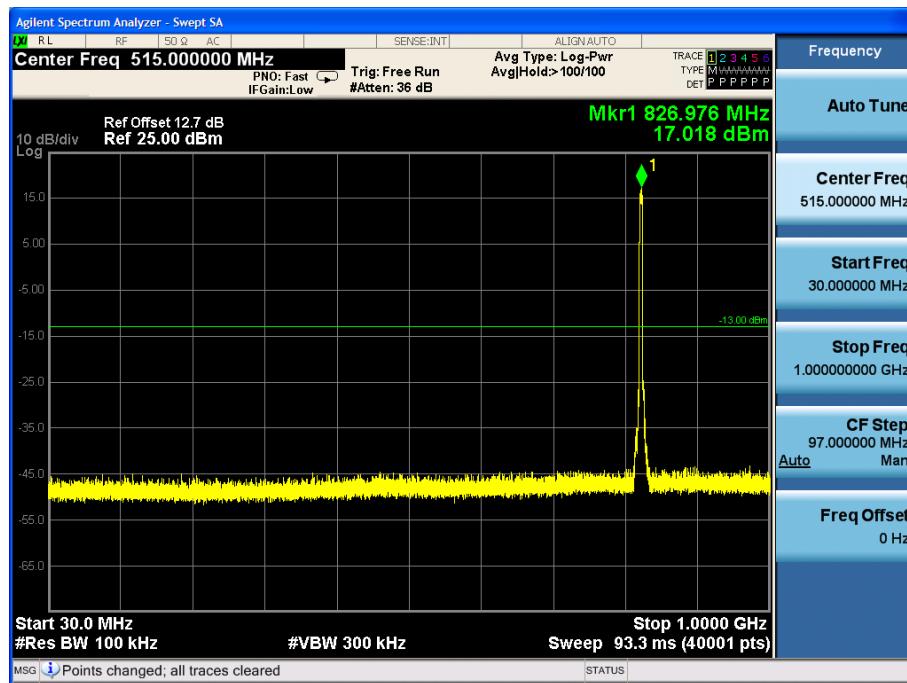


## Test Mode: WCDMA BAND V CH4182

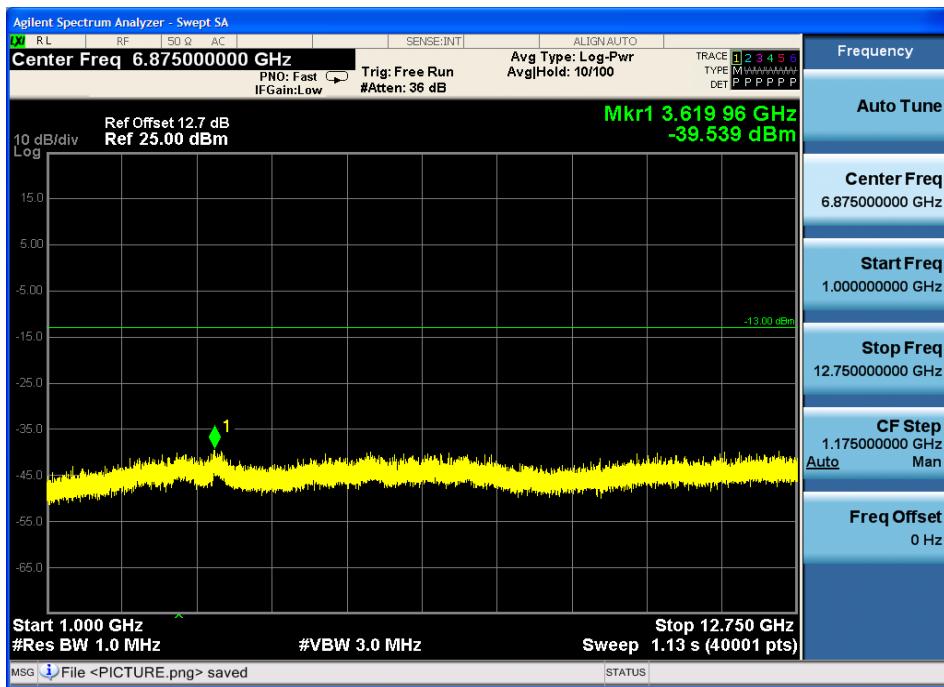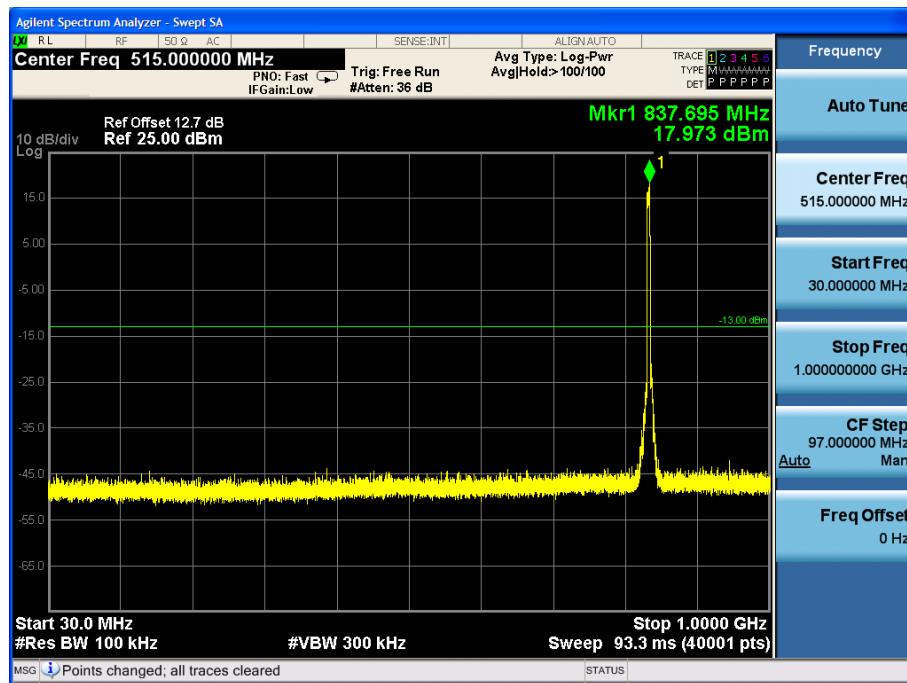


## Test Mode: WCDMA BAND V CH4233

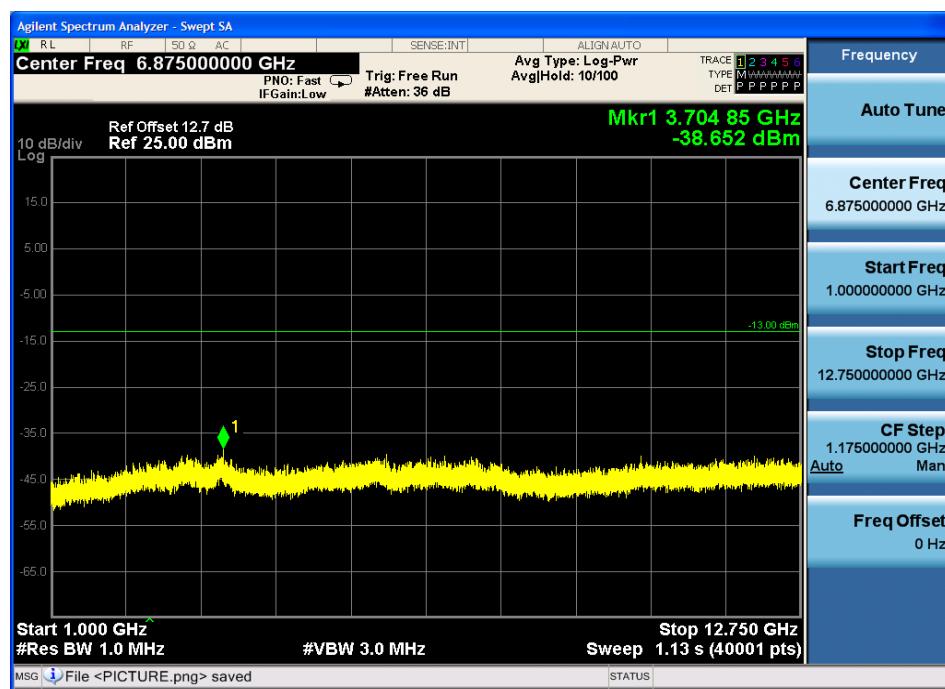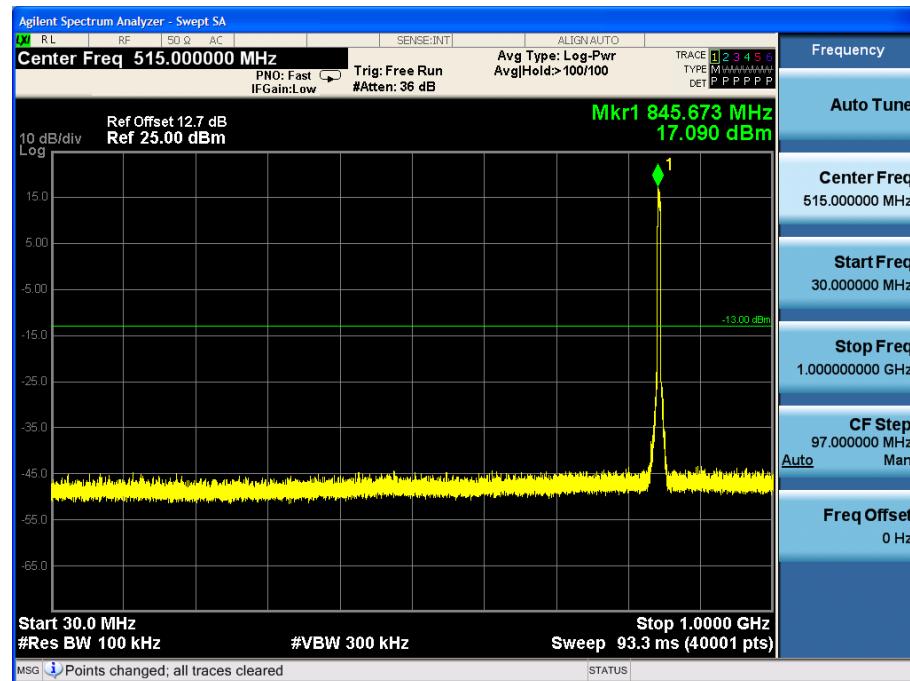


## Test Mode: WCDMA BAND II CH9262

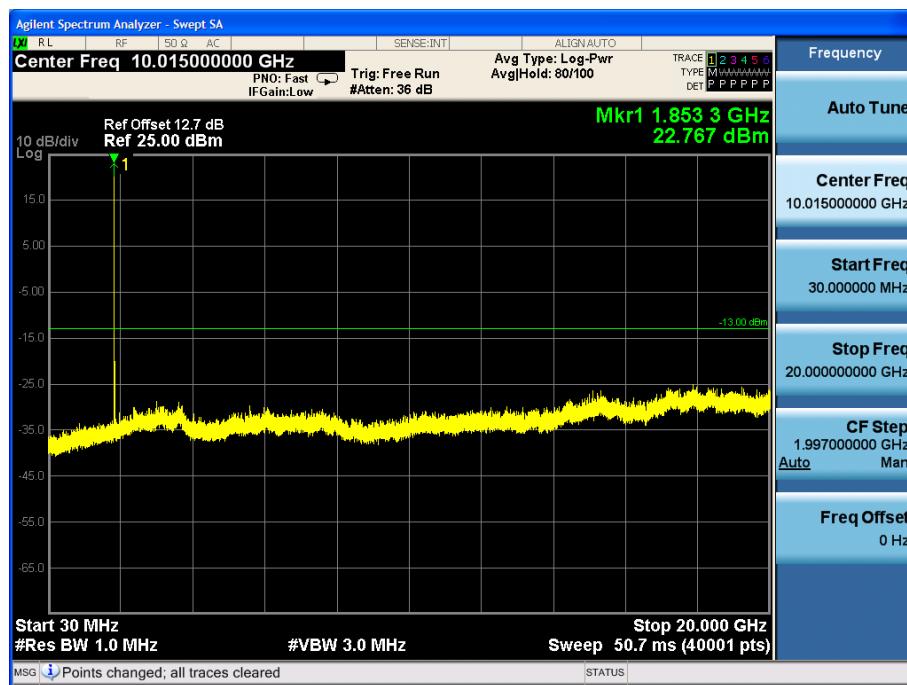

## Test Mode: WCDMA BAND II CH9400

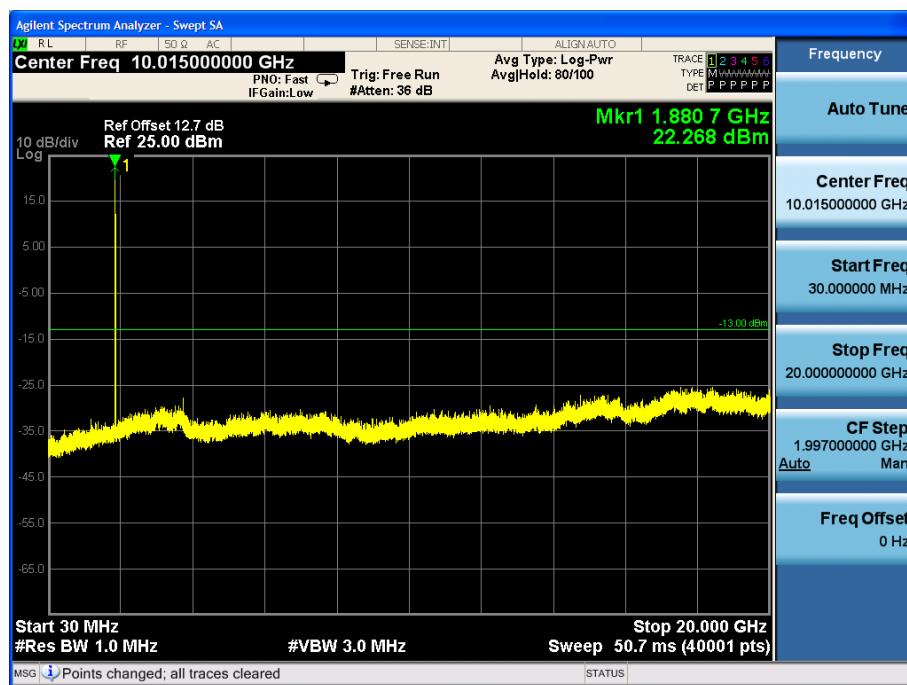


## Test Mode: WCDMA BAND II CH9538

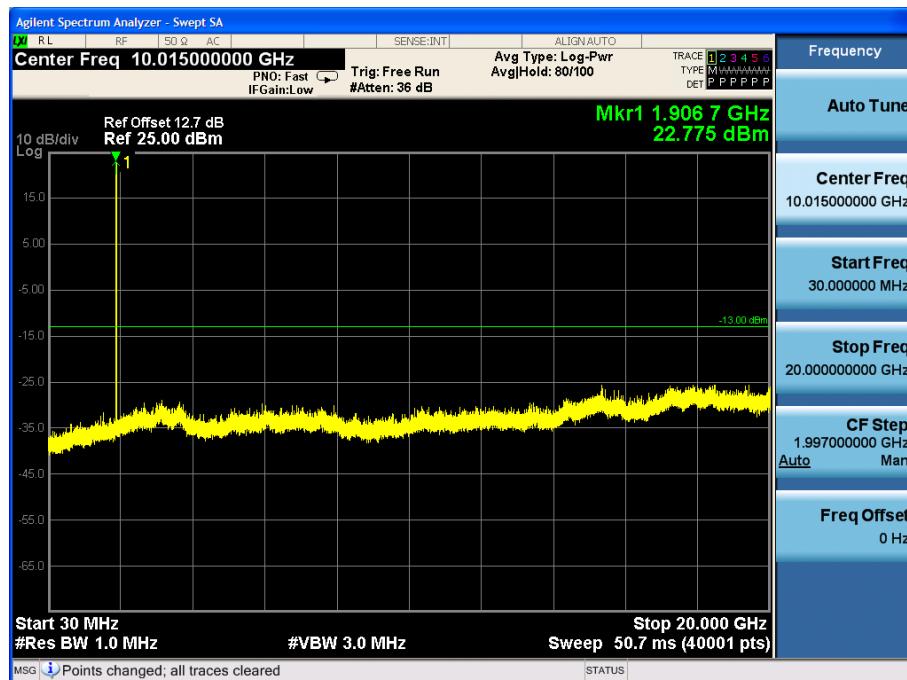

## 9. Radiated Spurious emissions

### 9.1. Block Diagram of Test Setup

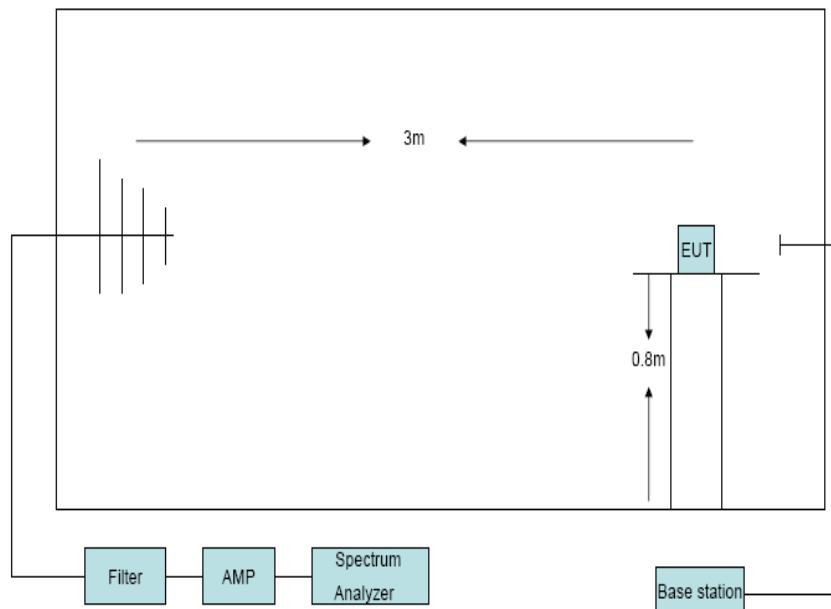

### 9.2. Limit

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency outside the frequency band by at least  $(43 + 10 \log P)$  dB, in this case, -13dBm.

### 9.3. Test Procedure

1. The EUT was placed on a non-conductive rotating platform with 0.8 meter height in an anechoic chamber. The radiated spurious emissions from 30MHz to 10<sup>th</sup> harmonious of fundamental frequency were measured at 3m with a test antenna and a spectrum analyzer with RBW= 1MHz, VBW= 1MHz ,peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. All the spurious emissions (record as LVL) at 3m were measured by rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Final spurious emissions levels were measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (for frequency below 1GHz) or Horn antenna (for frequency above 1GHz) at same location with same polarize of receiver antenna and then a known power of each measure frequency from S.G. was

applied into the dipole antenna or Horn antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain -Substitution antenna Loss(only for Dipole antenna) - Analyzer reading. Then final

spurious emissions were calculated with the correction factor, EIRP= LVL + Correction factor and ERP = EIRP – 2.15

#### 9.4. Test Result

EUT: Jethro Senior Cell Phone M/N:SC628												
Power: DC 3.7V from battery												
Test Date: 2015-07-06	Test site: RF Chamber		Tested by: Simple Guan									
Ambient Temperature: 24°C	Relative Humidity: 60%											
Conclusion: PASS												
Test result												
Test Mode: WCDMA BAND V CH4132												
Frequency (MHz)	Antenna polarization	LVL (dBm)	Correction factor(dB)	Result (ERP)(dBm)	Limit (dBm)	Margin (dB)						
537.31	H	-57.25	-6.53	-63.78	-13	50.78						
537.31	V	-57.02	-6.53	-63.55	-13	50.55						
1652.8	H	-55.56	11.50	-44.06	-13.00	31.06						
1652.8	V	-52.35	10.56	-41.79	-13.00	28.79						
Test Mode: WCDMA BAND V CH4182												
1673.2	H	-57.09	10.94	-46.15	-13.00	33.15						
1673.2	V	-51.69	10.90	-40.79	-13.00	27.79						
Test mode: WCDMA BAND V CH4233												
1693.2	H	-59.05	11.67	-47.38	-13.00	34.38						
1693.2	V	-52.39	11.13	-41.26	-13.00	28.26						

Test Mode: WCDMA BAND II CH9262						
Frequency (MHz)	Antenna polarization	LVL (dBm)	Correction factor(dB)	Result (EIRP)(dBm)	Limit (dBm)	Margin (dB)
537.31	H	-57.26	-6.53	-63.79	-13	50.79
537.31	V	-56.75	-6.53	-63.28	-13	50.28
3704.8	H	-56.36	8.57	-47.79	-13.00	34.79
3704.8	V	-51.46	8.37	-43.09	-13.00	30.09


Test Mode: WCDMA BAND II CH9400						
Frequency (MHz)	Antenna polarization	LVL (dBm)	Correction factor(dB)	Result (EIRP)(dBm)	Limit (dBm)	Margin (dB)
3760	H	-54.12	8.75	-45.37	-13.00	32.37
3760	V	-50.66	8.55	-42.11	-13.00	29.11

Test mode: WCDMA BAND II CH9538						
Frequency (MHz)	Antenna polarization	LVL (dBm)	Correction factor(dB)	Result (EIRP)(dBm)	Limit (dBm)	Margin (dB)
3815.2	H	-52.51	8.94	-43.57	-13.00	30.57
3815.2	V	-53.49	8.72	-44.77	-13.00	31.77

## 10. Band Edge Compliance

### 10.1. Block Diagram of Test Setup

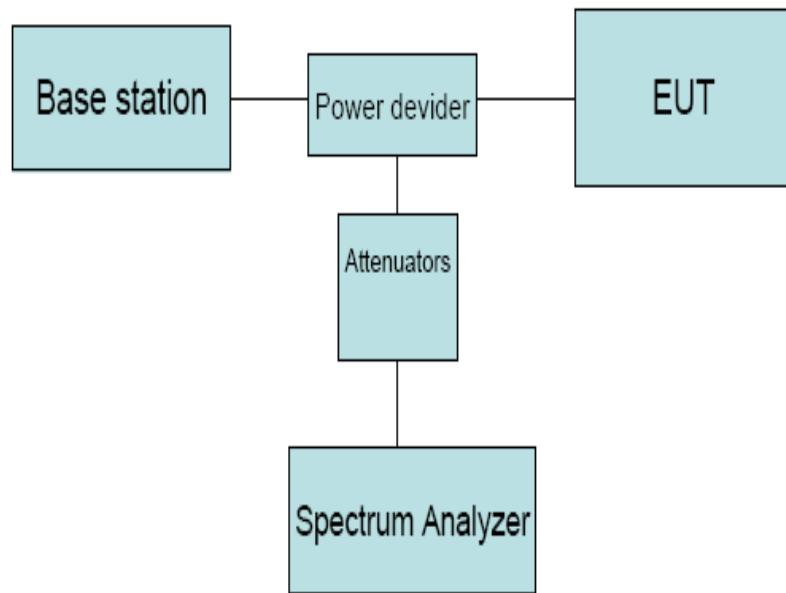

### 10.2. Limit

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency outside the frequency band by at least  $(43 + 10 \log P)$  dB, in this case, -13dBm.


### 10.3. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured.


## 10.4. Test Result

PASS

Test Mode: WCDMA BAND V

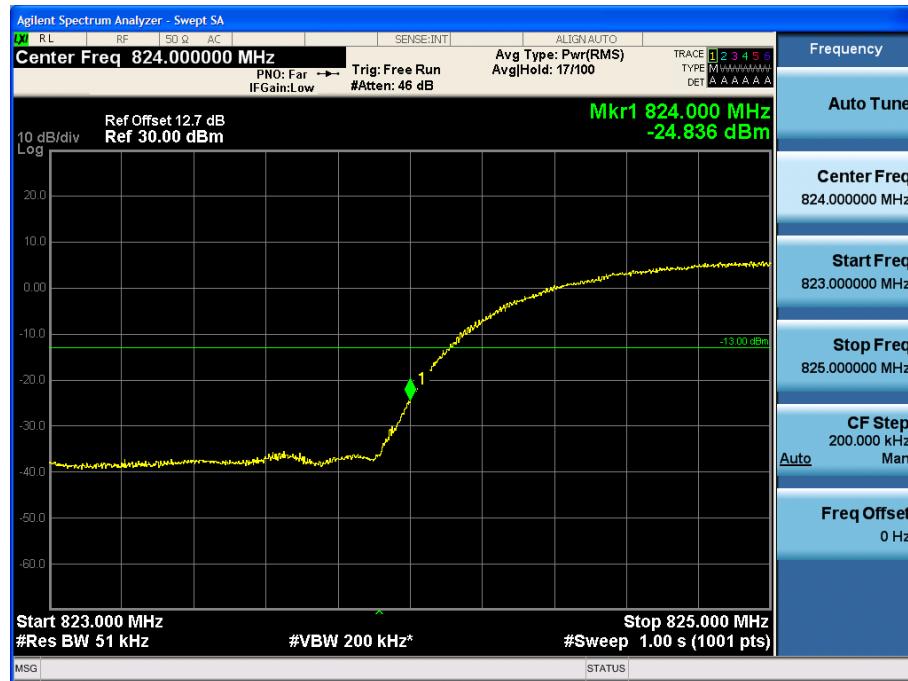


## Test Mode: WCDMA BAND II

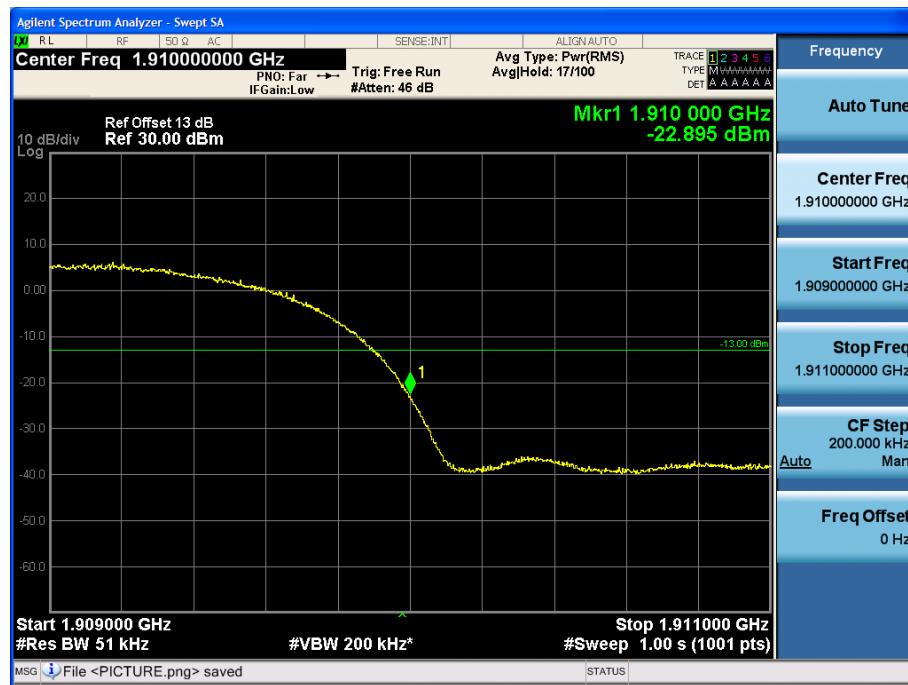

## 11. Power line conducted emission

### 11.1. Block Diagram of Test Setup

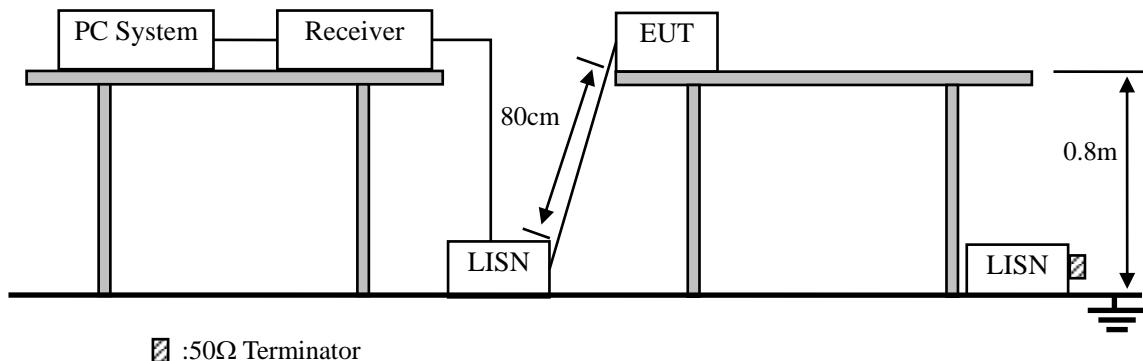

### 11.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


### 11.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N1), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2009 and ANSI C64.10:2009 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

## 11.4. Test Result

**PASS. (See below detailed test data)**


Charge with adapter

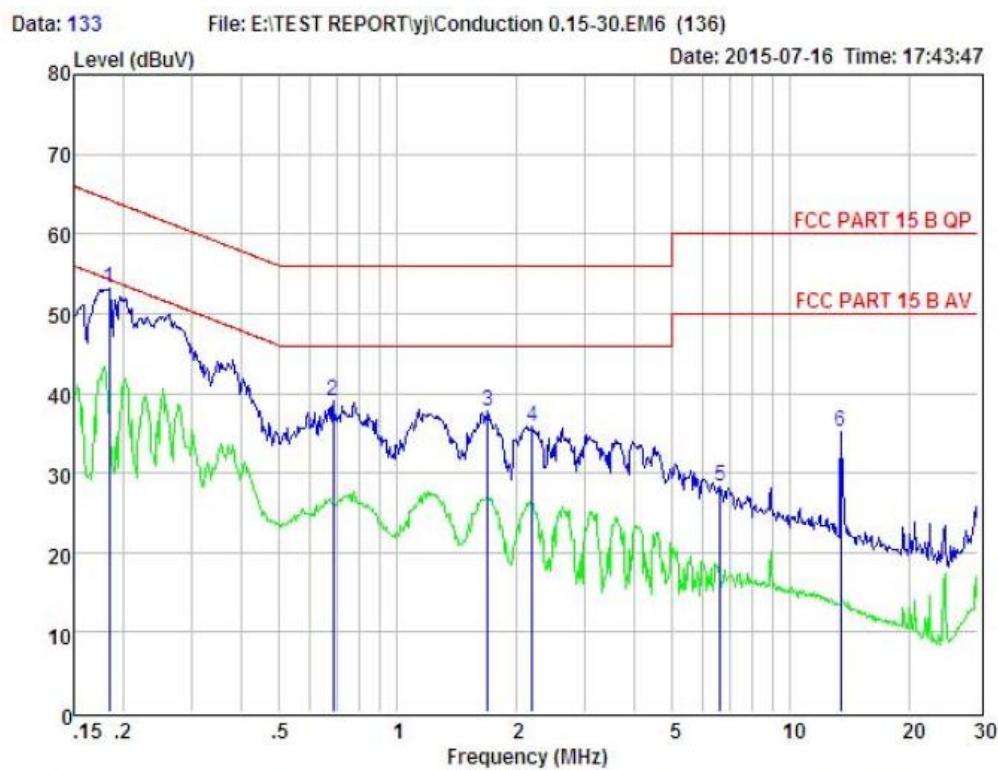

Condition : FCC PART 15 B QP      POL: LINE      Temp: 24 °C      Hum: 56 %  
 EUT :  
 Model No :  
 Test Mode :  
 Power : DC 5V from PC with AC 120V/60Hz  
 Test Engineer:  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
1	0.184	43.32	0.03	-9.72	0.10	53.17	64.28	-11.11	Peak
2	0.686	29.18	0.04	-9.72	0.10	39.04	56.00	-16.96	Peak
3	1.698	27.89	0.05	-9.70	0.10	37.74	56.00	-18.26	Peak
4	2.201	25.99	0.06	-9.70	0.10	35.85	56.00	-20.15	Peak
5	6.627	18.41	0.12	-9.57	0.15	28.25	60.00	-31.75	Peak
6	13.408	25.38	0.23	-9.42	0.22	35.25	60.00	-24.75	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

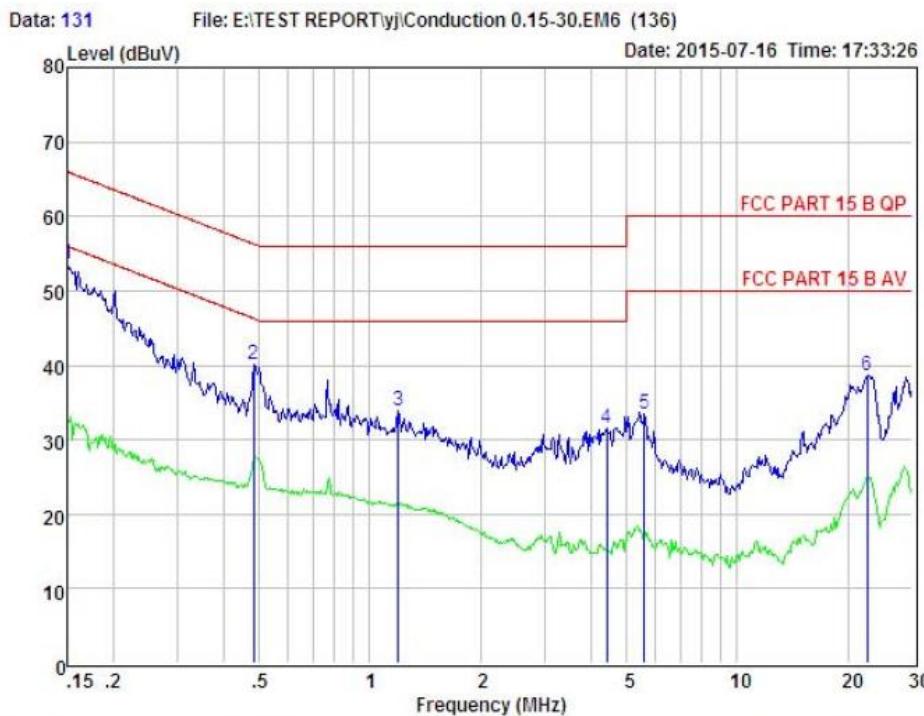


Condition : FCC PART 15 B QP      POL: NEUTRAL   Temp: 24 °C   Hum: 56 %  
 EUT : PC  
 Model No :  
 Test Mode :  
 Power : DC 5V from PC with AC 120V/60Hz  
 Test Engineer:  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
			Factor	Factor	Cable Loss	dBuV	dBuV	dBuV	
	MHz	dBuV	dB	dB	dB				
1	0.150	43.67	0.03	-9.72	0.10	53.52	66.00	-12.48	Peak
2	0.484	30.21	0.03	-9.72	0.10	40.06	56.27	-16.21	Peak
3	1.197	24.05	0.04	-9.71	0.10	33.90	56.00	-22.10	Peak
4	4.407	21.54	0.09	-9.68	0.12	31.43	56.00	-24.57	Peak
5	5.594	23.56	0.10	-9.64	0.13	33.43	60.00	-26.57	Peak
6	22.655	28.16	0.41	-9.54	0.42	38.53	60.00	-21.47	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss


Charge with charger

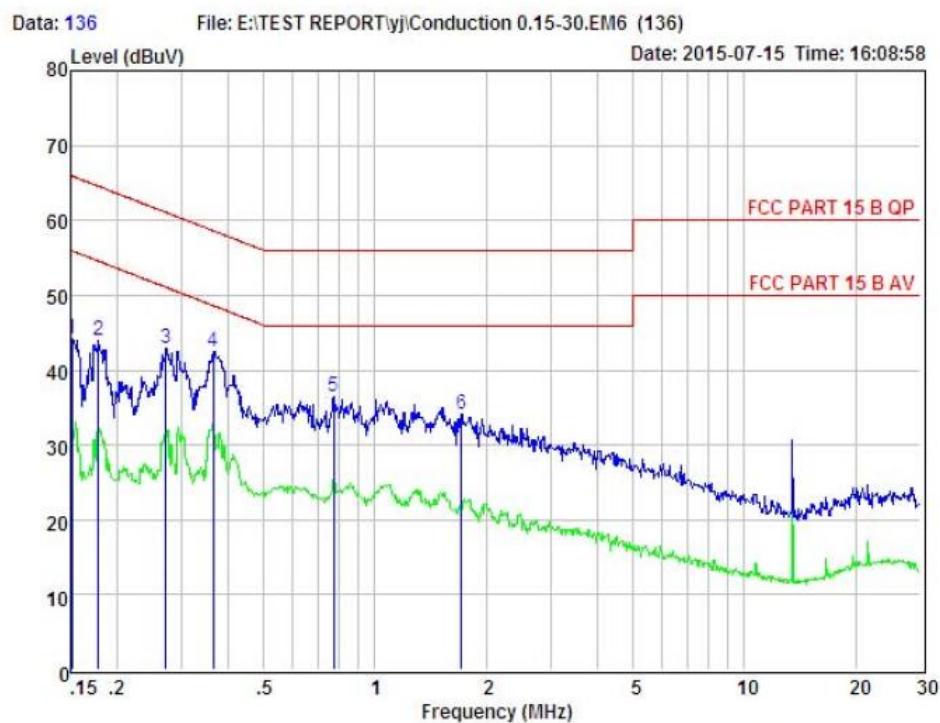

Condition : FCC PART 15 B QP POL: LINE Temp: 24 °C Hum: 56 %  
 EUT :  
 Model No :  
 Test Mode :  
 Power : DC 5V from adapter with AC 120V/60Hz  
 Test Engineer:  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
			Factor	Factor	Cable				
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.151	34.26	0.03	-9.72	0.10	44.11	65.96	-21.85	Peak
2	0.179	34.12	0.03	-9.72	0.10	43.97	64.55	-20.58	Peak
3	0.272	33.12	0.03	-9.72	0.10	42.97	61.07	-18.10	Peak
4	0.365	32.59	0.03	-9.72	0.10	42.44	58.61	-16.17	Peak
5	0.775	26.57	0.00	-9.71	0.10	36.38	56.00	-19.62	Peak
6	1.716	24.31	0.05	-9.70	0.10	34.16	56.00	-21.84	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

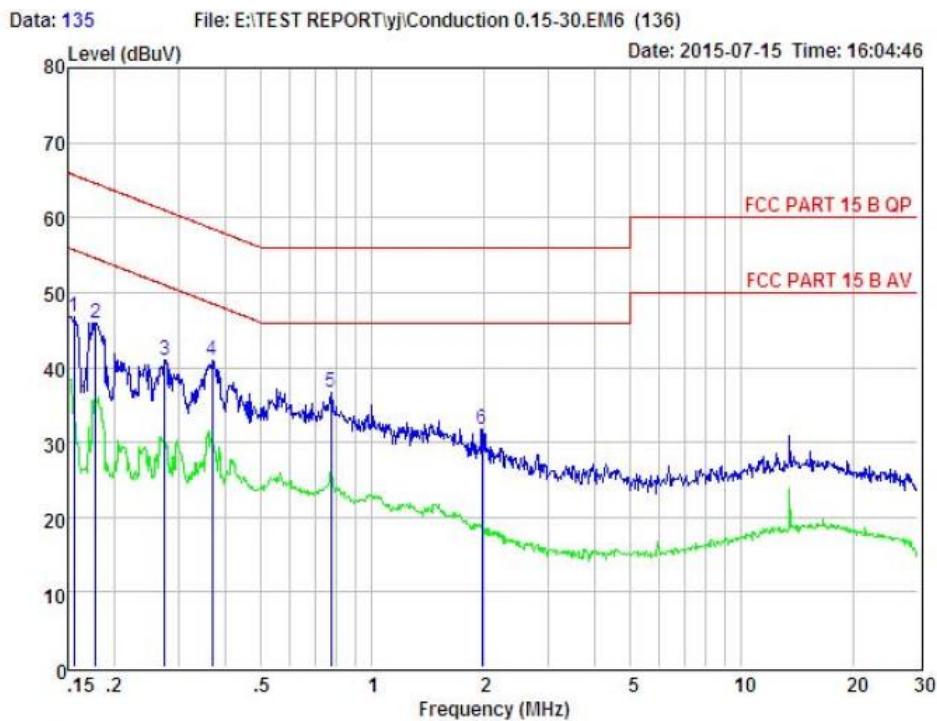

Condition : FCC PART 15 B QP      POL: NEUTRAL    Temp: 24 °C    Hum: 56 %  
 EUT :  
 Model No :  
 Test Mode :  
 Power : DC 5V from adapter with AC 120V/60Hz  
 Test Engineer:  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	dB	dBuV	dBuV	dBuV	
1	0.156	36.98	0.03	-9.72	0.10	46.83	65.69	-18.86	Peak
2	0.179	36.10	0.03	-9.72	0.10	45.95	64.55	-18.60	Peak
3	0.274	31.07	0.03	-9.72	0.10	40.92	60.98	-20.06	Peak
4	0.369	31.07	0.03	-9.72	0.10	40.92	58.52	-17.60	Peak
5	0.775	26.90	0.00	-9.71	0.10	36.71	56.00	-19.29	Peak
6	1.980	21.89	0.06	-9.70	0.10	31.75	56.00	-24.25	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

## 12. Test setup photo

Photographs-Radiated Emission Test Setup in Chamber




Photographs-Conducted Emission Test Setup







### 13. Photos of EUT





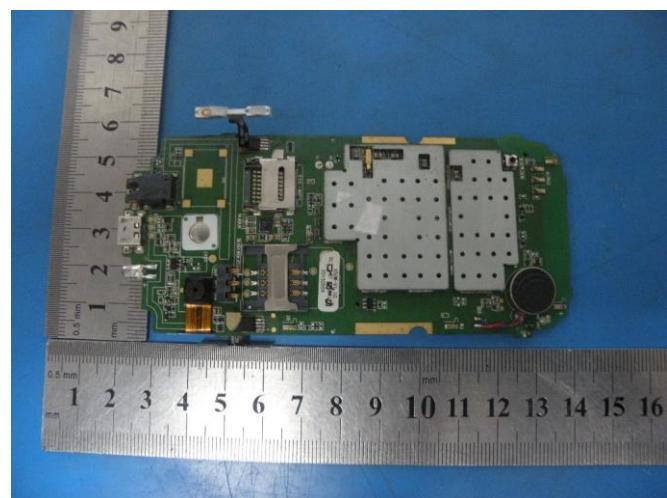

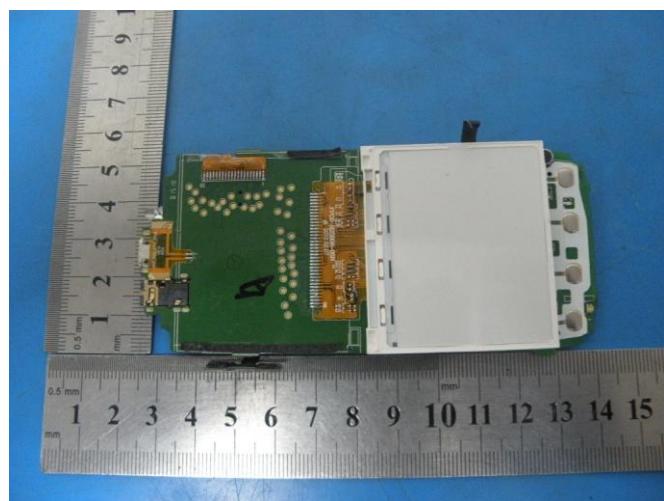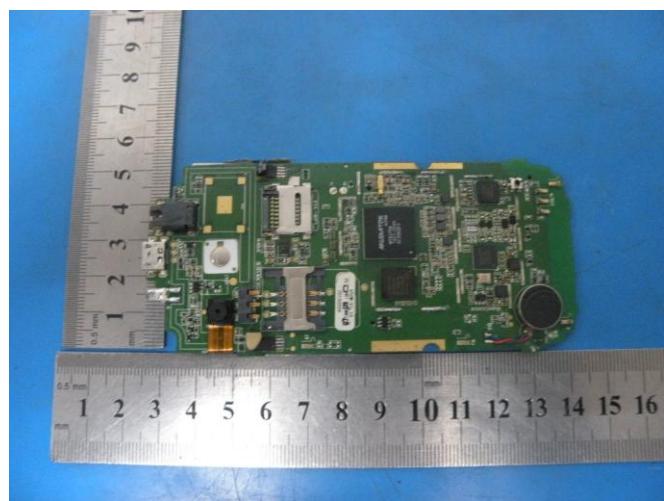

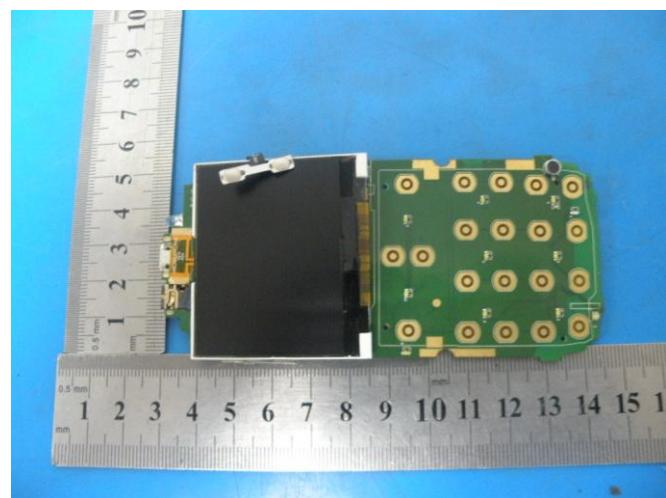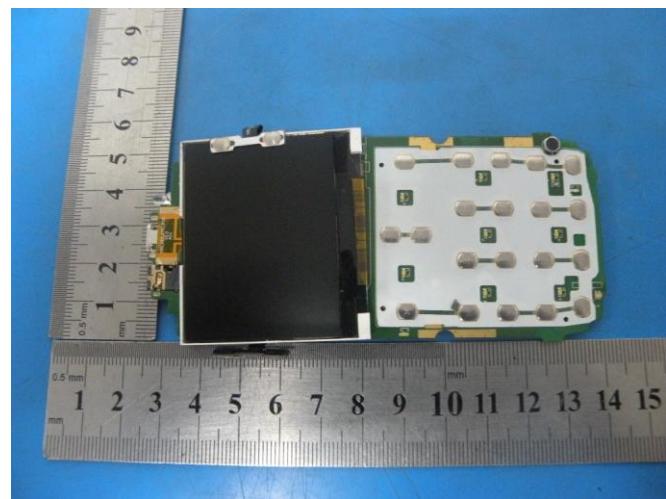

-----END OF THE REPORT-----