



Test Mode	Mode 1 IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

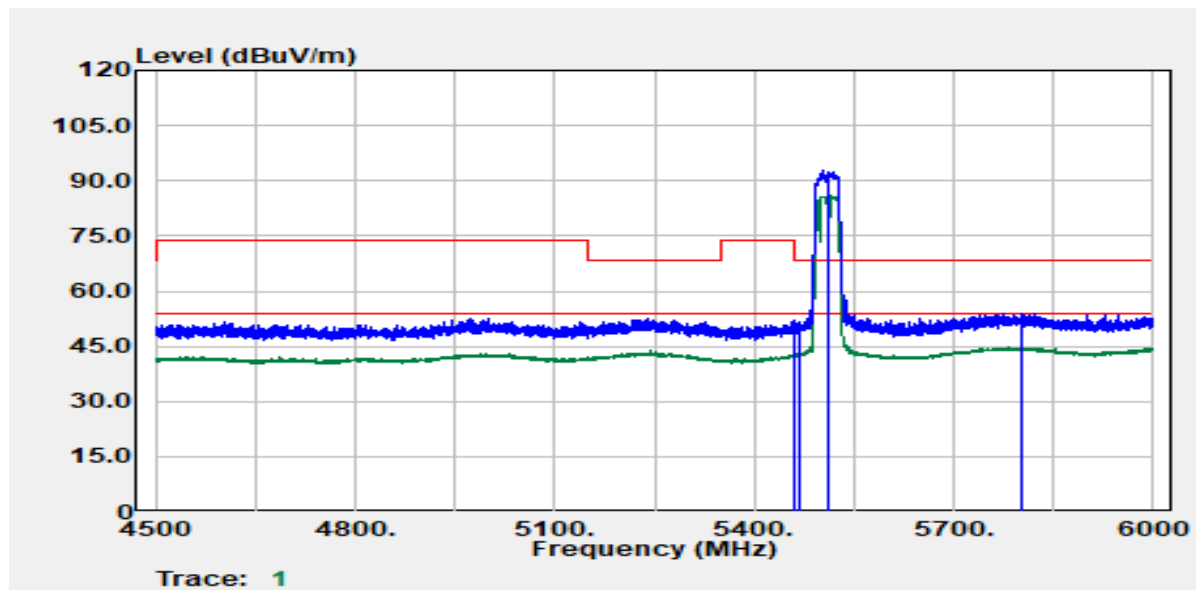


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.91	Peak	39.69	12.41	52.10	74.00	-21.90
5459.66	Average	30.17	12.41	42.58	54.00	-11.42
5469.16	Peak	39.24	12.44	51.68	68.20	-16.52
5510.00	Peak	80.00	12.62	92.62	--	--
5510.00	Average	73.42	12.62	86.05	--	--
5800.72	Peak	39.88	14.16	54.04	68.20	-14.16

Test Mode	Mode 1 IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

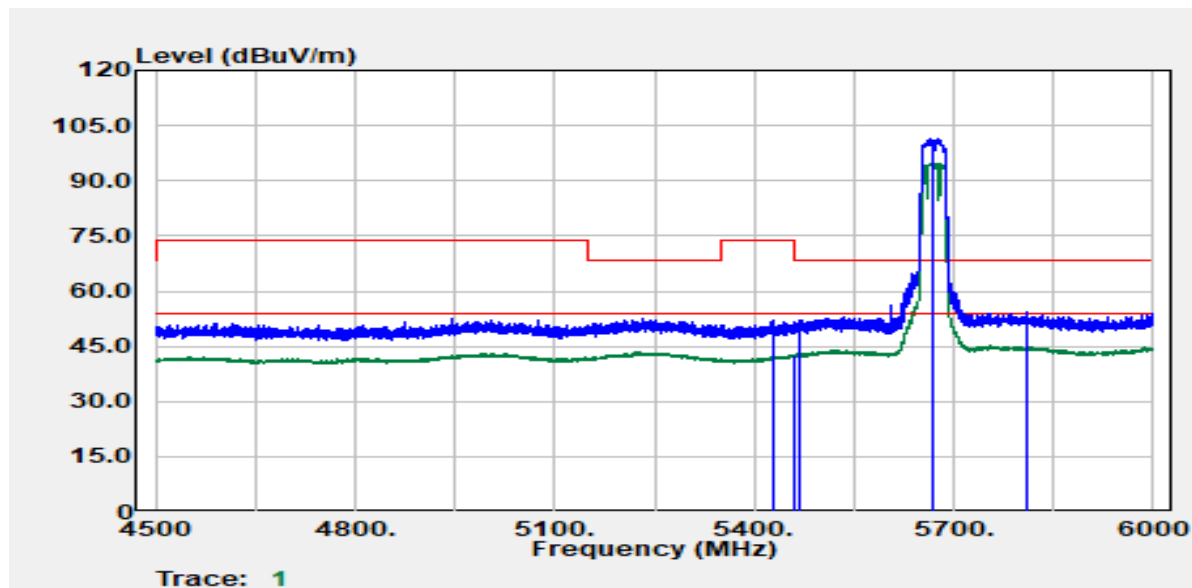


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5428.16	Peak	39.53	12.35	51.88	74.00	-22.12
5459.16	Average	30.17	12.41	42.58	54.00	-11.42
5466.16	Peak	39.61	12.43	52.04	68.20	-16.16
5670.00	Peak	88.13	13.39	101.52	--	--
5670.00	Average	81.47	13.39	94.86	--	--
5811.47	Peak	40.27	14.13	54.39	68.20	-13.81

Test Mode	Mode 1 IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

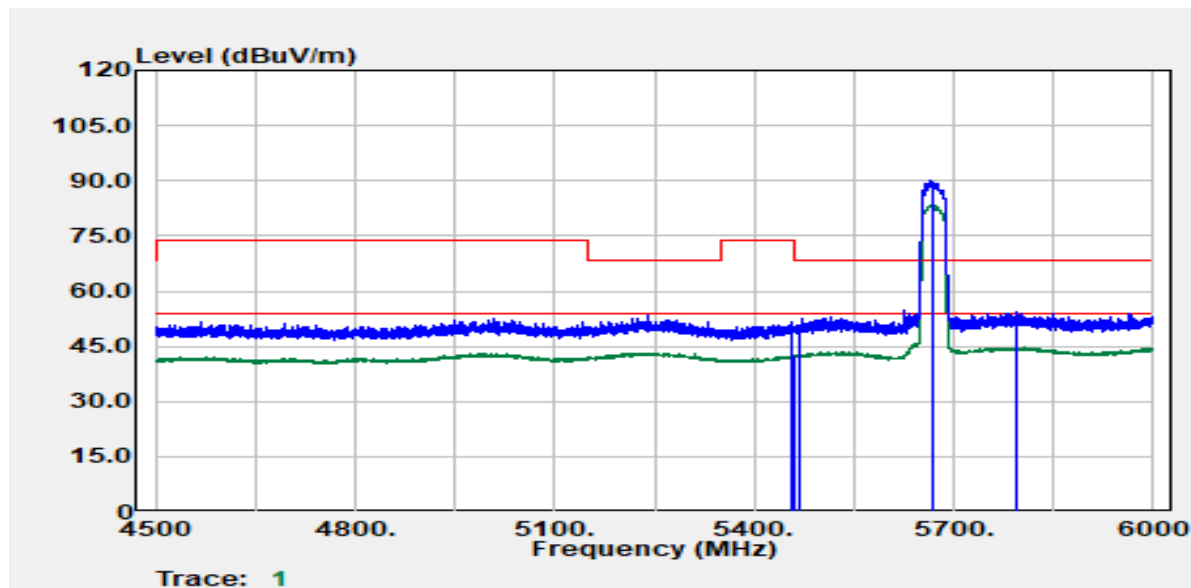


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.41	Peak	39.39	12.40	51.79	74.00	-22.21
5459.66	Average	30.10	12.41	42.51	54.00	-11.49
5466.41	Peak	38.46	12.43	50.89	68.20	-17.31
5670.00	Peak	76.78	13.39	90.17	--	--
5670.00	Average	70.12	13.39	83.51	--	--
5793.22	Peak	40.12	14.11	54.23	68.20	-13.97

Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

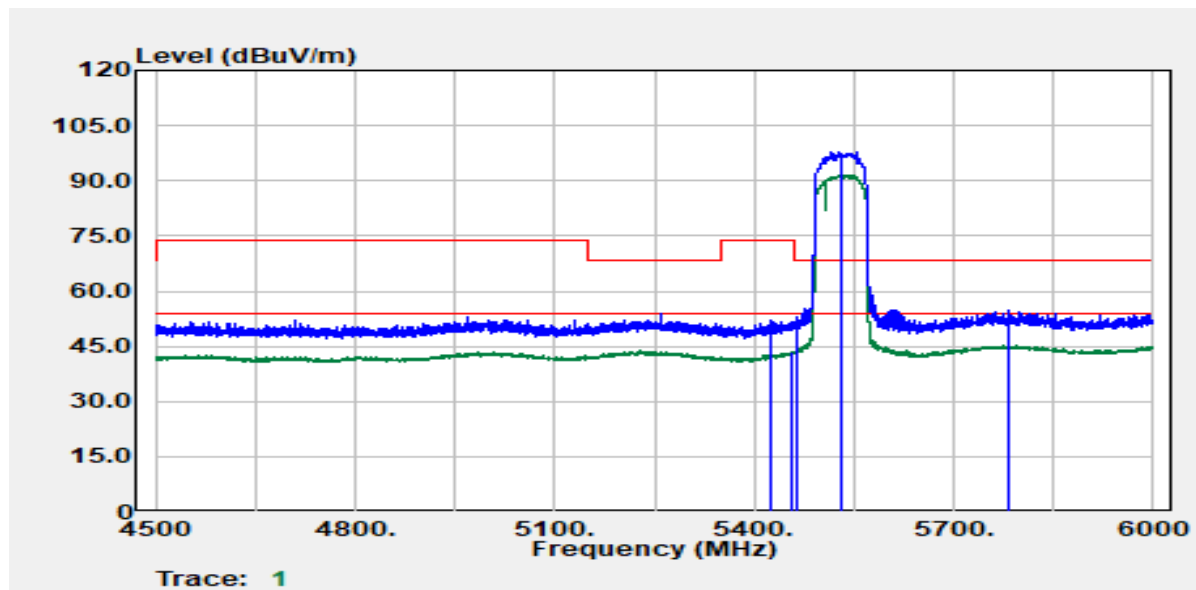


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5424.00	Peak	39.60	12.35	51.95	74.00	-22.05
5458.20	Average	31.26	12.40	43.67	54.00	-10.33
5465.70	Peak	40.40	12.43	52.83	68.20	-15.37
5530.00	Peak	85.19	12.77	97.95	--	--
5530.00	Average	78.81	12.77	91.58	--	--
5784.00	Peak	40.71	14.05	54.76	68.20	-13.44

Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

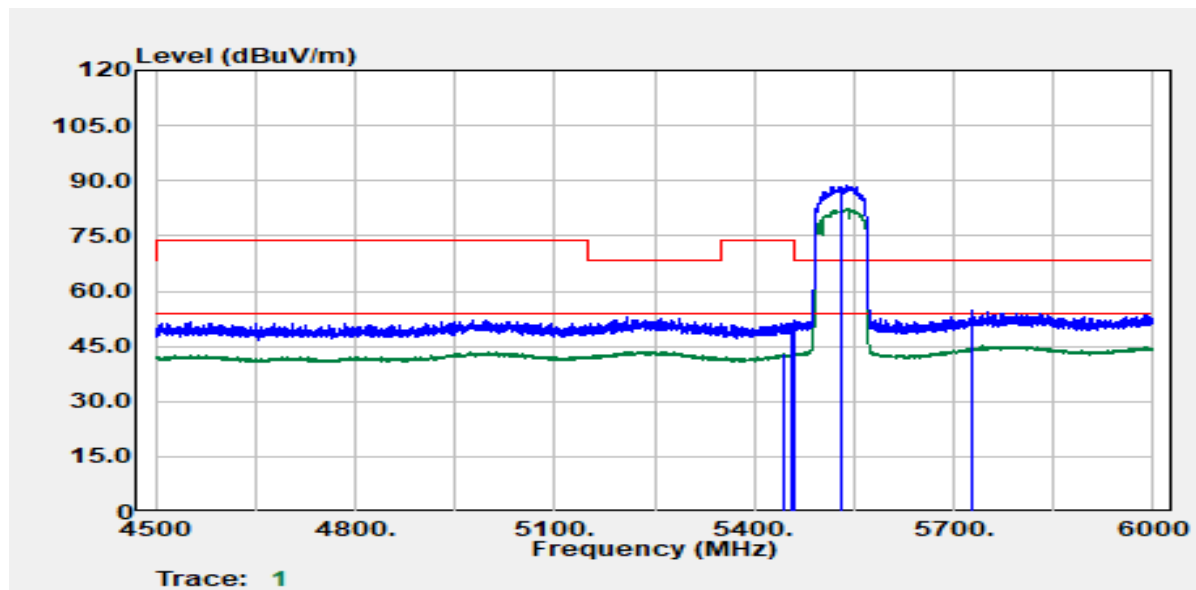


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5443.20	Average	30.73	12.37	43.10	54.00	-10.90
5458.20	Peak	38.98	12.40	51.39	74.00	-22.61
5460.90	Peak	39.53	12.41	51.94	68.20	-16.26
5530.00	Peak	75.82	12.77	88.59	--	--
5530.00	Average	69.53	12.77	82.30	--	--
5728.80	Peak	40.86	13.71	54.57	68.20	-13.63

Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

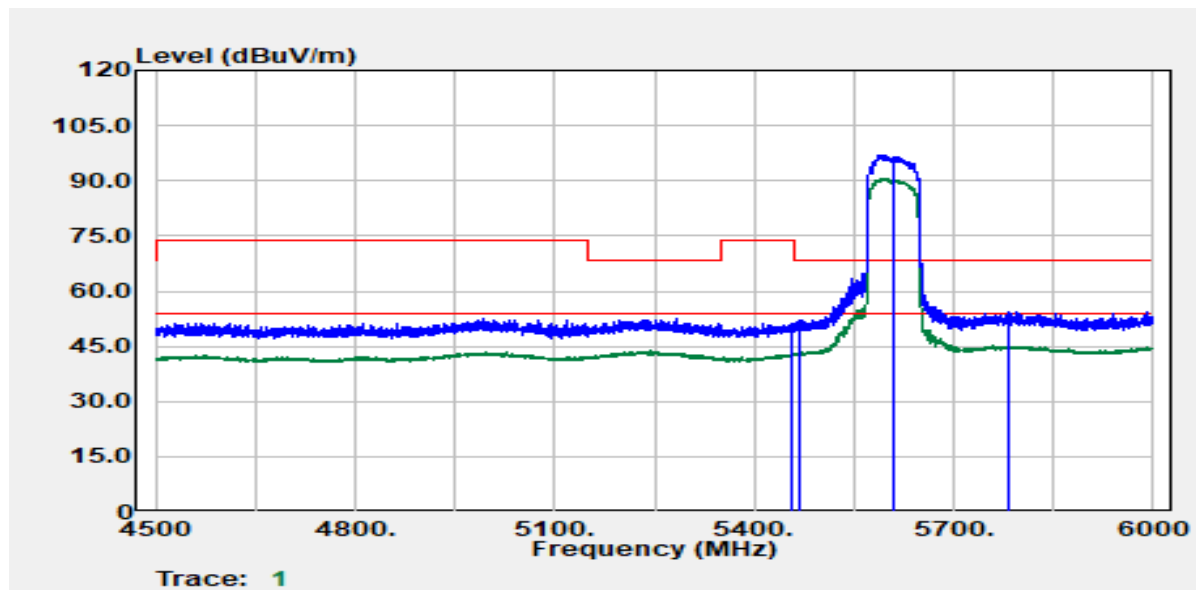

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5455.20	Peak	38.79	12.39	51.18	74.00	-22.82
5455.50	Average	30.40	12.39	42.80	54.00	-11.20
5466.60	Peak	39.73	12.43	52.17	68.20	-16.03
5610.00	Peak	84.18	12.92	97.10	--	--
5610.00	Average	77.55	12.92	90.47	--	--
5781.60	Peak	40.51	14.03	54.55	68.20	-13.65


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

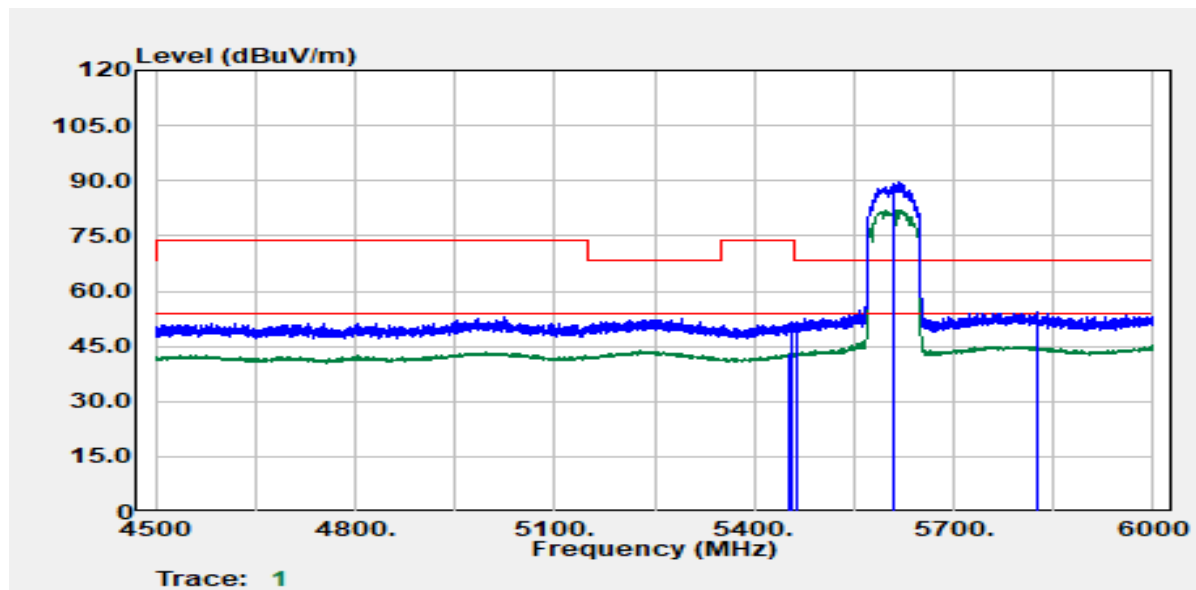

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.70	Average	30.71	12.39	43.10	54.00	-10.90
5455.20	Peak	39.03	12.39	51.42	74.00	-22.58
5463.30	Peak	39.10	12.42	51.52	68.20	-16.68
5610.00	Peak	76.90	12.92	89.82	--	--
5610.00	Average	69.20	12.92	82.12	--	--
5825.40	Peak	40.12	14.09	54.21	68.20	-13.99


Test Data for UNII-3

Test Mode	Mode 1 IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

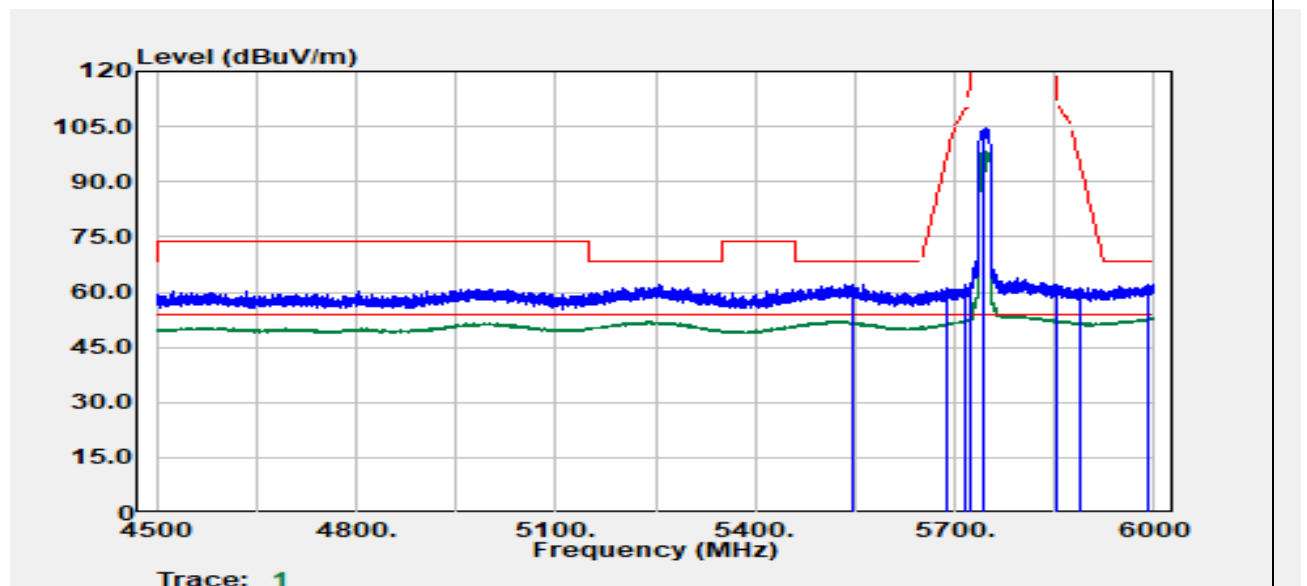


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5548.18	Peak	49.36	12.90	62.26	68.20	-5.94
5687.70	Peak	47.62	13.49	61.12	96.13	-35.01
5717.20	Peak	48.20	13.65	61.85	110.02	-48.17
5723.95	Peak	48.84	13.68	62.52	119.82	-57.29
5745.00	Peak	90.61	13.79	104.41	--	--
5745.00	Average	84.55	13.79	98.34	--	--
5854.98	Peak	47.96	14.02	61.98	110.85	-48.88
5854.98	Peak	47.96	14.02	61.98	110.86	-48.88
5889.48	Peak	47.17	14.03	61.20	94.45	-33.25
5989.25	Peak	47.92	14.15	62.07	68.20	-6.13

Test Mode	Mode 1 IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

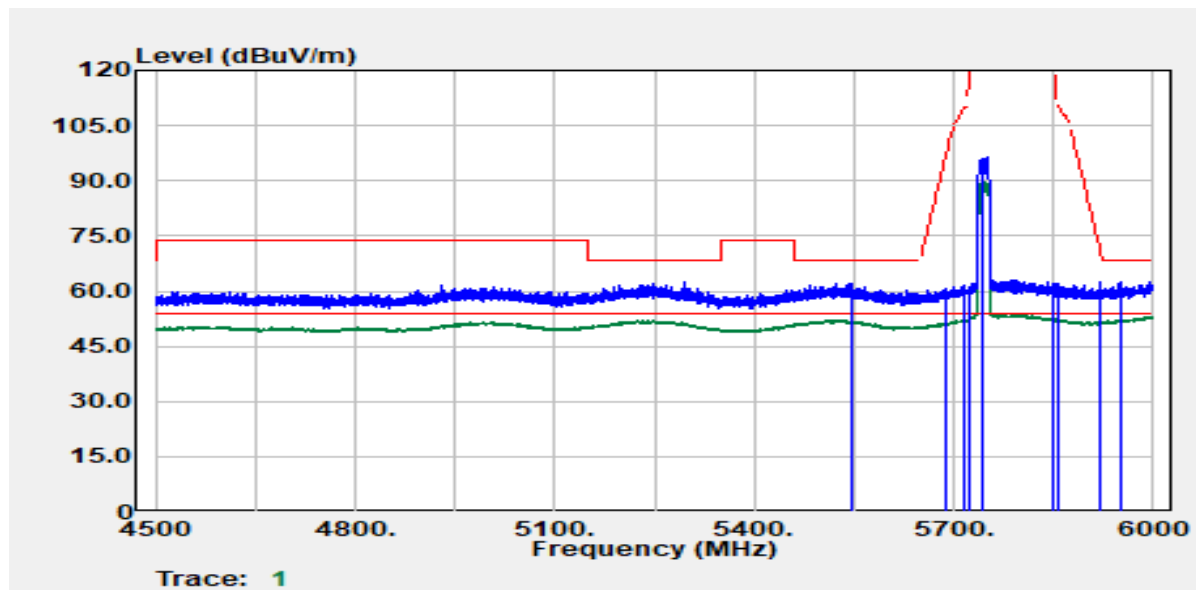


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5548.43	Peak	49.18	12.90	62.08	68.20	-6.12
5687.70	Peak	47.03	13.49	60.53	96.13	-35.60
5716.45	Peak	48.13	13.65	61.77	109.81	-48.04
5724.70	Peak	47.17	13.69	60.85	121.53	-60.67
5745.00	Peak	82.64	13.79	96.43	--	--
5745.00	Average	75.89	13.79	89.69	--	--
5850.48	Peak	47.98	14.02	62.00	121.12	-59.11
5855.73	Peak	48.09	14.02	62.11	110.60	-48.48
5918.49	Peak	48.35	14.08	62.43	73.00	-10.58
5949.99	Peak	48.50	14.16	62.66	68.20	-5.54

Test Mode	Mode 1 IEEE 802.11a / 5825 MHz	Temp/Hum	23.7(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 12, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

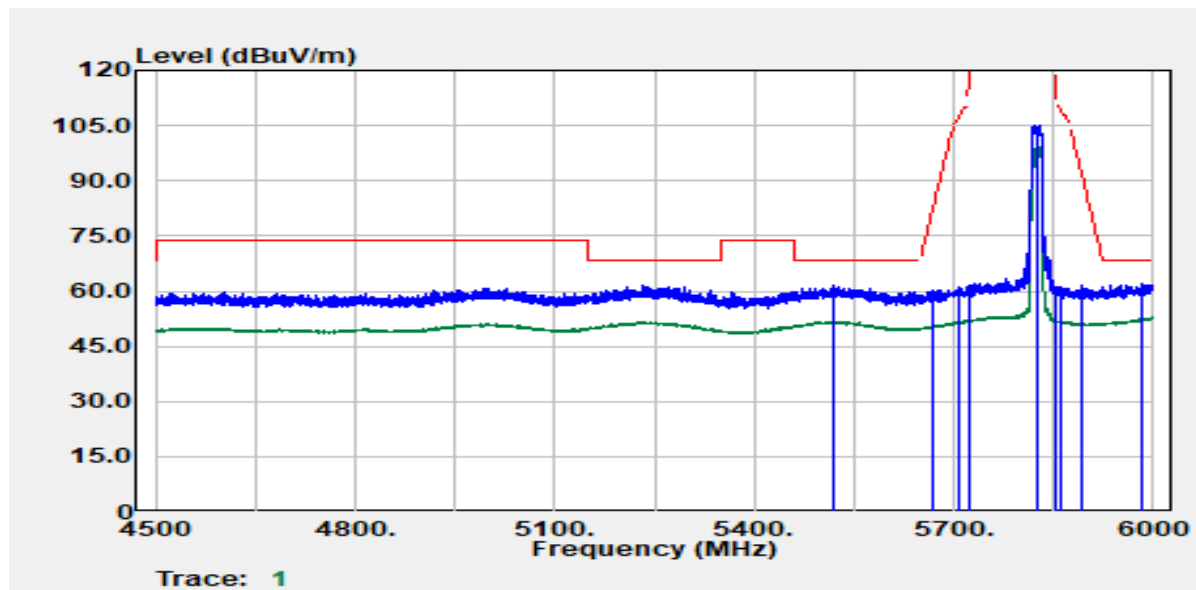


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5520.90	Peak	49.09	12.70	61.80	68.20	-6.40
5670.00	Peak	47.02	13.39	60.41	83.04	-22.63
5706.30	Peak	47.49	13.59	61.08	106.97	-45.88
5724.00	Peak	47.74	13.68	61.43	119.92	-58.49
5825.00	Peak	91.13	14.09	105.22	--	--
5825.00	Average	84.93	14.09	99.02	--	--
5852.10	Peak	47.22	14.02	61.24	117.41	-56.17
5859.30	Peak	47.33	14.02	61.35	109.59	-48.24
5894.40	Peak	47.53	14.03	61.56	90.81	-29.25
5981.40	Peak	47.73	14.15	61.89	68.20	-6.31

Test Mode	Mode 1 IEEE 802.11a / 5825 MHz	Temp/Hum	23.7(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 12, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

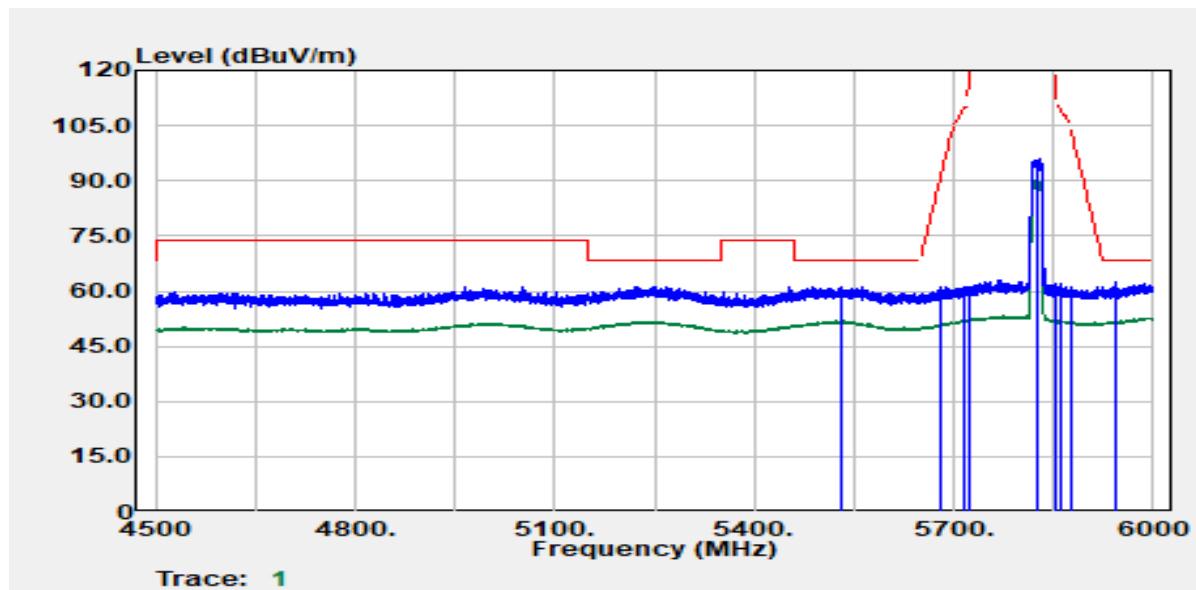


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5532.90	Peak	48.36	12.79	61.15	68.20	-7.05
5680.20	Peak	47.72	13.45	61.17	90.59	-29.41
5717.40	Peak	47.57	13.65	61.22	110.07	-48.85
5723.10	Peak	47.28	13.68	60.96	117.87	-56.91
5825.00	Peak	81.96	14.09	96.05	--	--
5825.00	Average	75.95	14.09	90.04	--	--
5851.50	Peak	48.01	14.02	62.03	118.78	-56.75
5862.90	Peak	47.95	14.02	61.97	108.59	-46.62
5878.50	Peak	47.09	14.03	61.11	102.60	-41.49
5944.20	Peak	48.37	14.14	62.51	68.20	-5.69

Test Mode	Mode 1 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

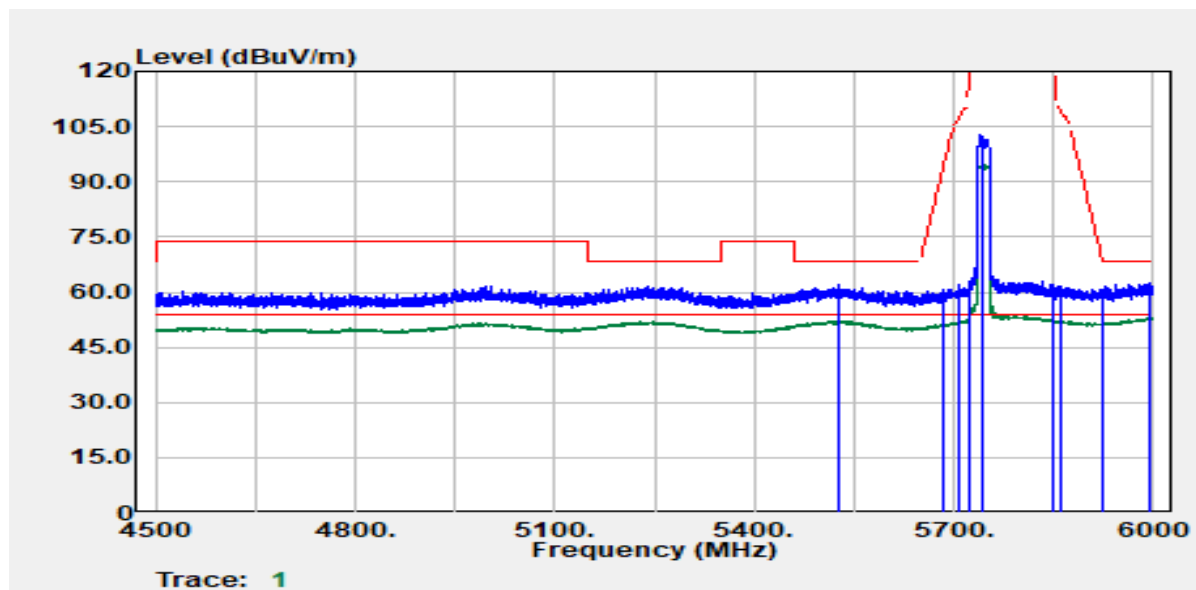


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5525.67	Peak	49.35	12.74	62.09	68.20	-6.11
5683.70	Peak	47.36	13.47	60.83	93.17	-32.35
5706.20	Peak	48.46	13.59	62.05	106.94	-44.89
5722.95	Peak	48.32	13.68	62.00	117.54	-55.53
5745.00	Peak	88.81	13.79	102.60	--	--
5745.00	Average	80.95	13.79	94.74	--	--
5850.00	Peak	47.65	14.02	61.67	122.20	-60.53
5859.23	Peak	47.70	14.02	61.72	109.62	-47.90
5922.24	Peak	46.67	14.09	60.76	70.24	-9.47
5993.75	Peak	48.25	14.15	62.40	68.20	-5.80

Test Mode	Mode 1 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

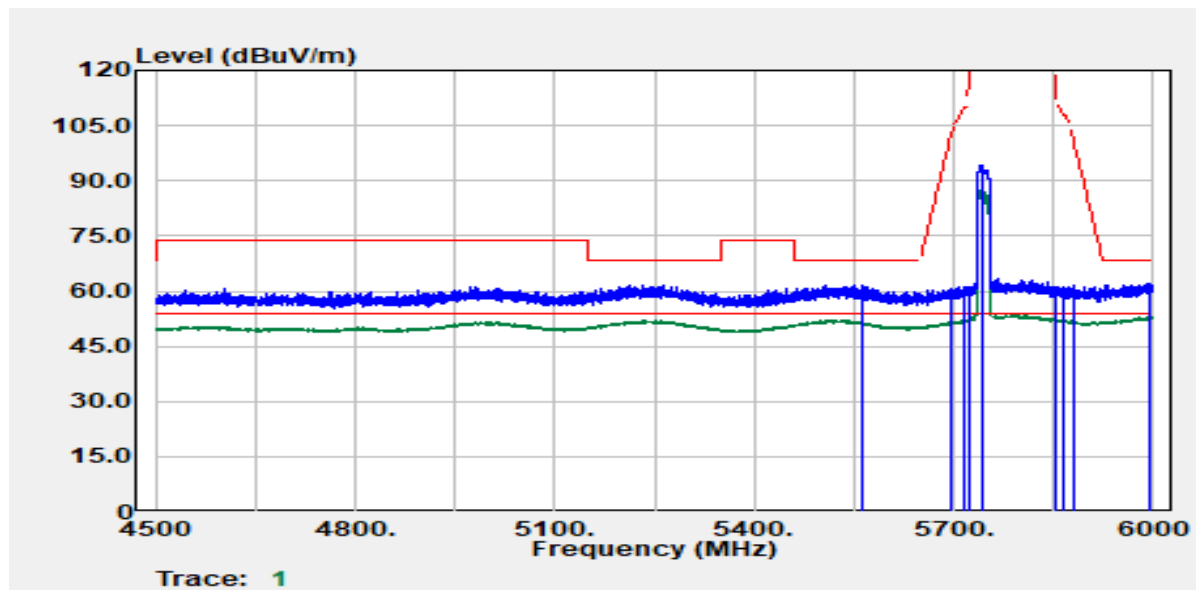


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5562.18	Peak	48.78	12.89	61.67	68.20	-6.53
5695.45	Peak	46.93	13.53	60.47	101.85	-41.38
5715.70	Peak	47.61	13.64	61.25	109.60	-48.35
5724.70	Peak	47.28	13.69	60.97	121.53	-60.56
5745.00	Peak	80.44	13.79	94.23	--	--
5745.00	Average	73.73	13.79	87.53	--	--
5853.73	Peak	47.03	14.02	61.05	113.70	-52.66
5863.98	Peak	47.28	14.02	61.30	108.28	-46.99
5879.73	Peak	47.37	14.03	61.39	101.69	-40.29
5995.50	Peak	47.99	14.15	62.14	68.20	-6.06

Test Mode	Mode 1 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

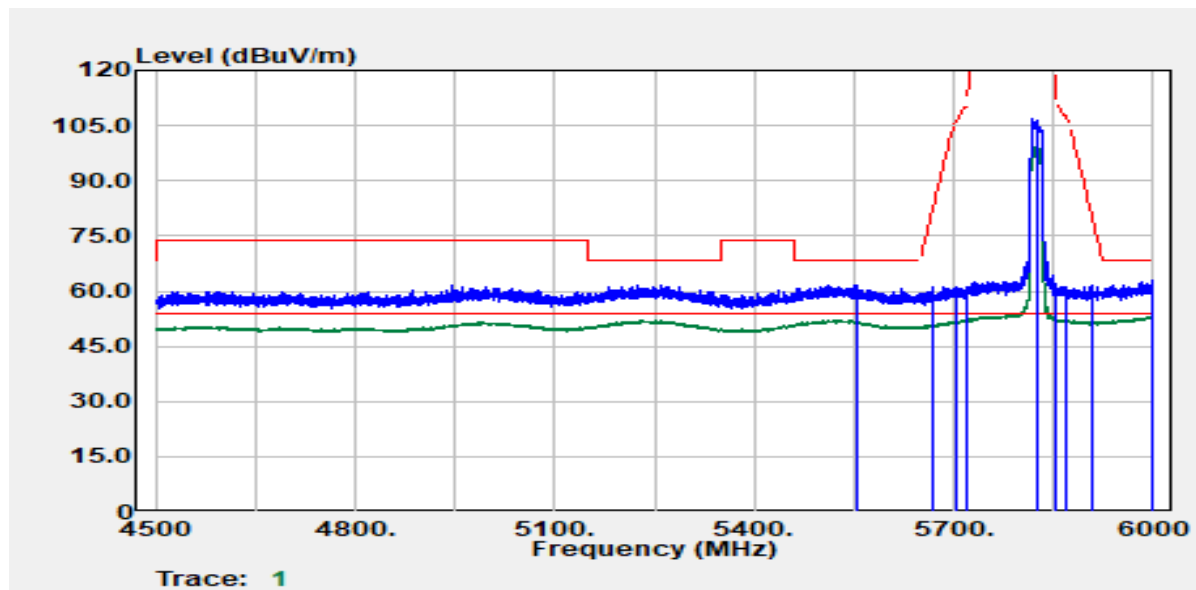


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5553.18	Peak	48.88	12.91	61.79	68.20	-6.41
5667.95	Peak	47.88	13.38	61.26	81.52	-20.25
5703.70	Peak	47.76	13.58	61.34	106.24	-44.90
5720.70	Peak	47.60	13.67	61.27	112.41	-51.13
5825.00	Peak	92.61	14.09	106.70	--	--
5825.00	Average	85.03	14.09	99.12	--	--
5854.48	Peak	48.23	14.02	62.25	111.99	-49.74
5867.98	Peak	47.17	14.02	61.20	107.16	-45.97
5908.74	Peak	47.31	14.05	61.36	80.20	-18.84
5996.75	Peak	48.75	14.15	62.90	68.20	-5.30

Test Mode	Mode 1 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

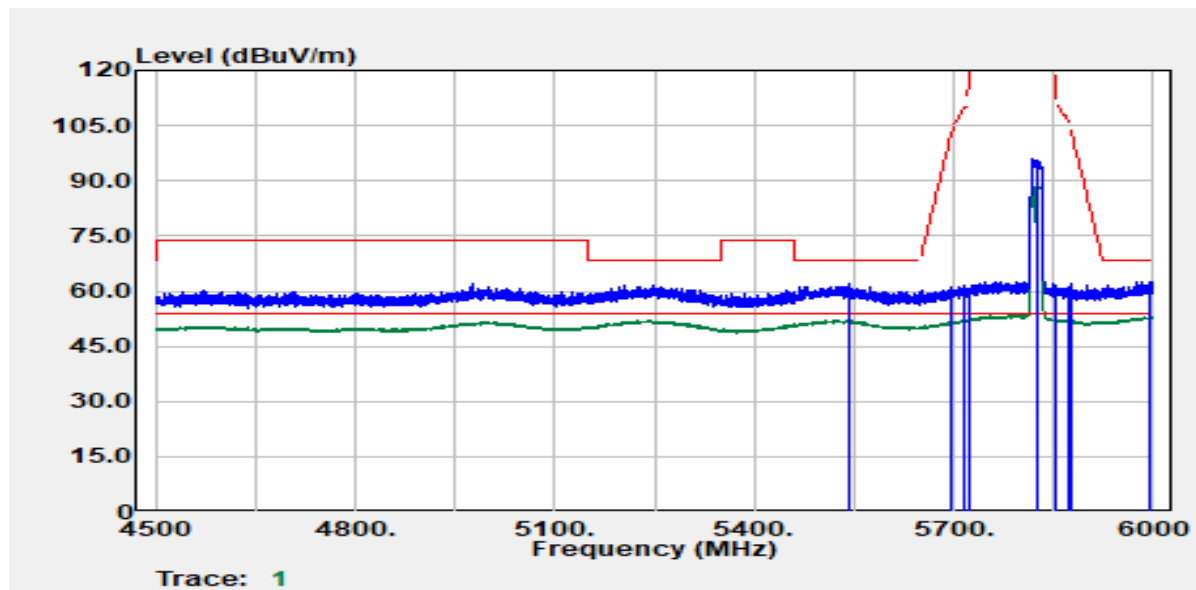


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5540.92	Peak	49.22	12.85	62.07	68.20	-6.13
5695.45	Peak	47.38	13.53	60.92	101.85	-40.93
5716.95	Peak	47.78	13.65	61.43	109.95	-48.52
5722.70	Peak	47.03	13.68	60.71	116.97	-56.26
5825.00	Peak	81.88	14.09	95.97	--	--
5825.00	Average	74.61	14.09	88.70	--	--
5852.48	Peak	47.45	14.02	61.47	116.55	-55.09
5873.48	Peak	47.22	14.02	61.25	105.63	-44.38
5877.73	Peak	47.88	14.03	61.91	103.17	-41.26
5995.00	Peak	48.35	14.15	62.50	68.20	-5.70

Test Mode	Mode 1 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

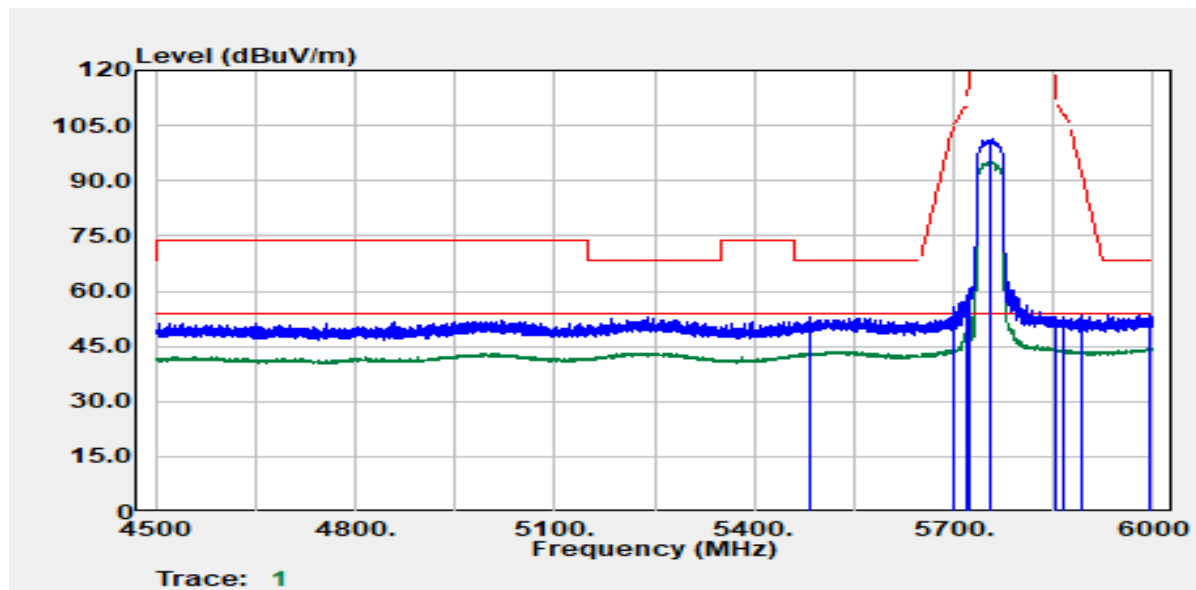


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5484.16	Peak	40.29	12.49	52.79	68.20	-15.41
5699.95	Peak	40.61	13.56	54.17	105.16	-50.99
5718.95	Peak	44.74	13.66	58.40	110.51	-52.11
5723.20	Peak	46.56	13.68	60.24	118.11	-57.87
5755.00	Peak	87.77	13.85	101.62	--	--
5755.00	Average	81.16	13.85	95.01	--	--
5853.48	Peak	38.84	14.02	52.86	114.27	-61.41
5864.98	Peak	39.08	14.02	53.10	108.00	-54.90
5892.23	Peak	39.45	14.03	53.48	92.41	-38.93
5994.75	Peak	39.47	14.15	53.62	68.20	-14.58

Test Mode	Mode 1 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

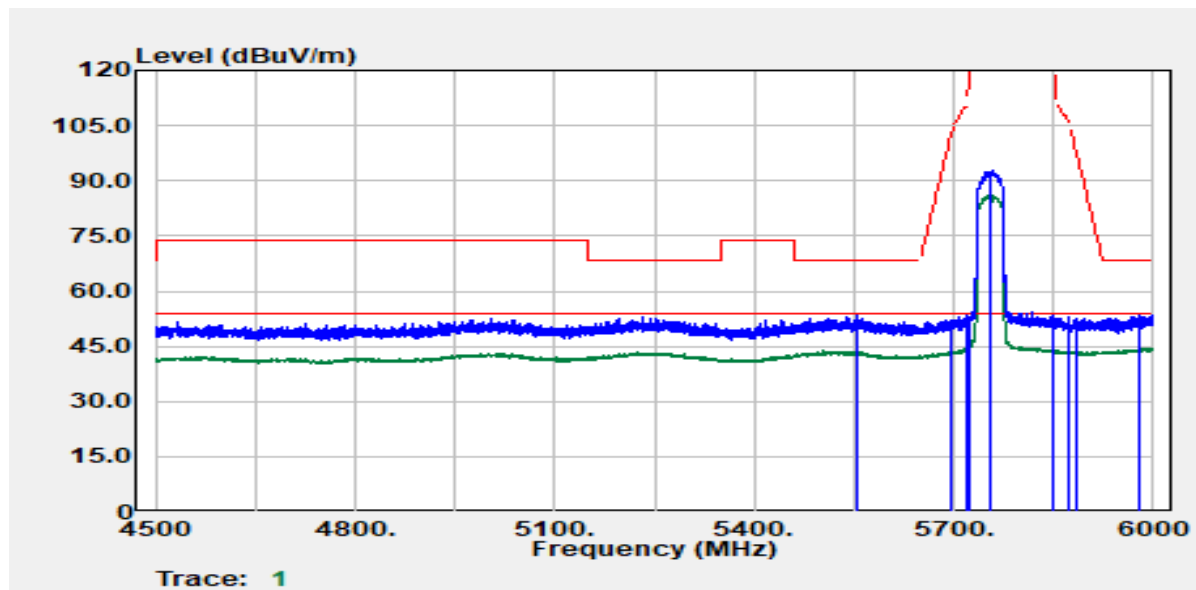


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5553.68	Peak	40.48	12.91	53.39	68.20	-14.81
5696.45	Peak	38.62	13.54	52.16	102.58	-50.42
5717.95	Peak	39.66	13.65	53.31	110.23	-56.92
5721.95	Peak	39.42	13.67	53.09	115.26	-62.16
5755.00	Peak	78.94	13.85	92.79	--	--
5755.00	Average	72.23	13.85	86.08	--	--
5850.98	Peak	38.67	14.02	52.69	119.98	-67.29
5874.48	Peak	38.91	14.02	52.94	105.35	-52.41
5883.48	Peak	38.38	14.03	52.41	98.90	-46.49
5980.00	Peak	39.48	14.15	53.63	68.20	-14.57

Test Mode	Mode 1 IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

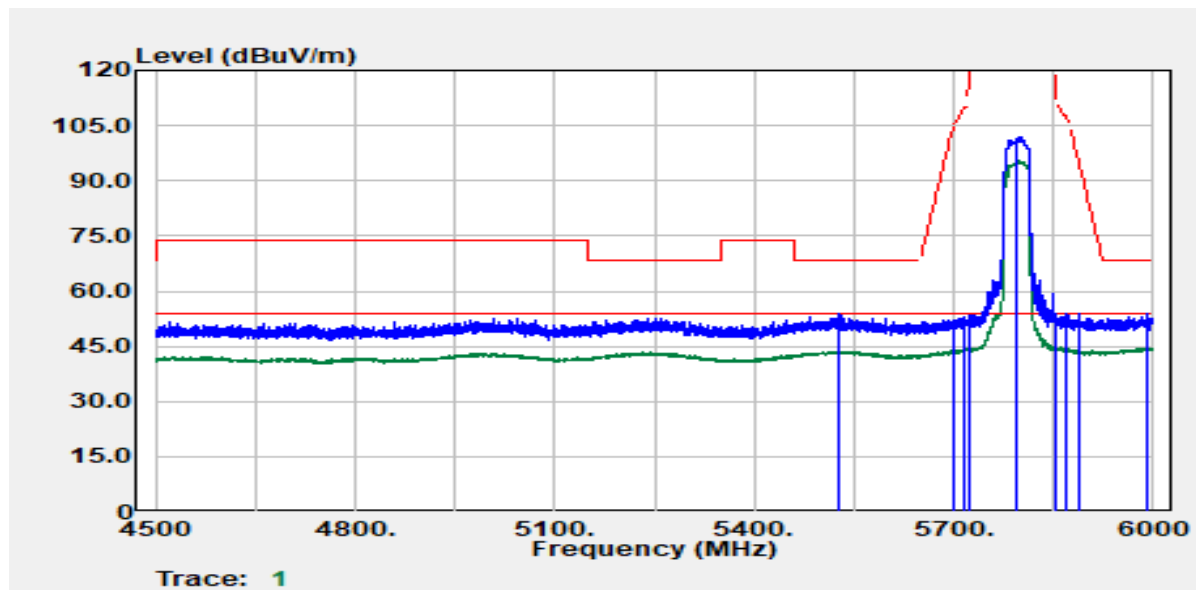


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5525.17	Peak	40.94	12.73	53.67	68.20	-14.53
5698.70	Peak	38.71	13.55	52.27	104.24	-51.98
5717.45	Peak	39.26	13.65	52.91	110.09	-57.17
5723.45	Peak	39.96	13.68	53.64	118.68	-65.04
5795.00	Peak	87.95	14.13	102.07	--	--
5795.00	Average	81.29	14.13	95.42	--	--
5851.48	Peak	40.04	14.02	54.06	118.84	-64.77
5867.73	Peak	39.90	14.02	53.93	107.23	-53.31
5888.98	Peak	39.90	14.03	53.93	94.82	-40.89
5989.25	Peak	39.94	14.15	54.09	68.20	-14.11

Test Mode	Mode 1 IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

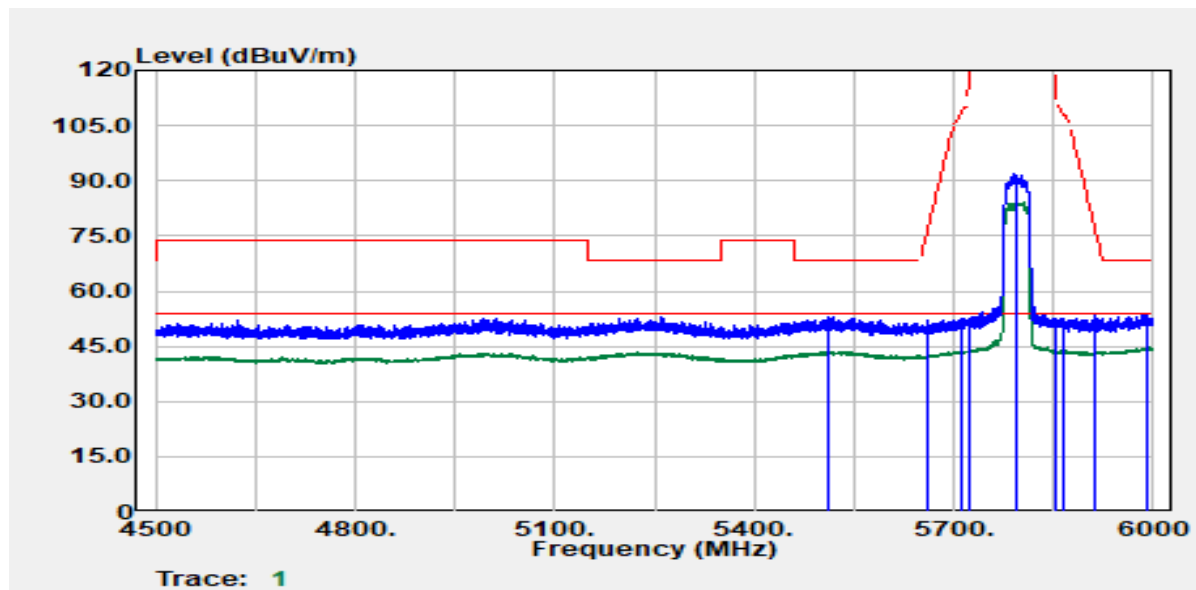


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5511.42	Peak	40.30	12.63	52.94	68.20	-15.26
5659.44	Peak	38.77	13.33	52.10	75.21	-23.11
5712.95	Peak	39.01	13.63	52.63	108.83	-56.19
5723.95	Peak	38.89	13.68	52.58	119.82	-67.24
5795.00	Peak	77.62	14.13	91.74	--	--
5795.00	Average	69.90	14.13	84.02	--	--
5851.73	Peak	38.35	14.02	52.37	118.27	-65.90
5866.48	Peak	38.54	14.02	52.57	107.58	-55.02
5913.49	Peak	39.29	14.07	53.36	76.69	-23.34
5991.00	Peak	39.43	14.15	53.58	68.20	-14.62

Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

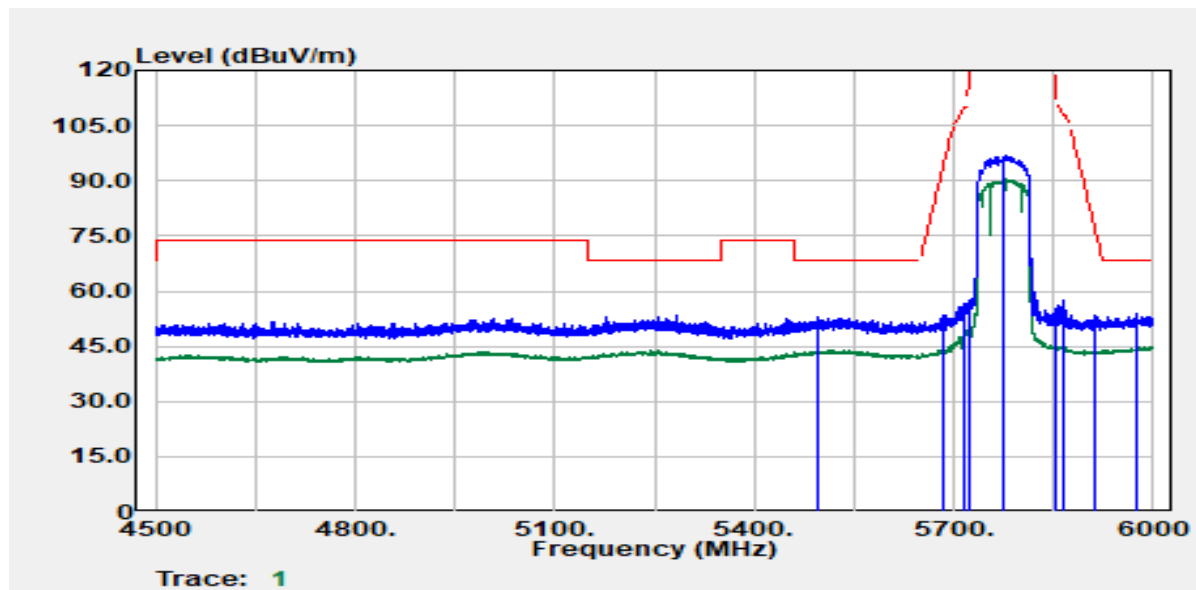

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5496.60	Peak	40.43	12.54	52.97	68.20	-15.23
5685.60	Peak	39.94	13.48	53.42	94.58	-41.16
5713.80	Peak	42.81	13.63	56.45	109.07	-52.62
5724.90	Peak	43.66	13.69	57.35	121.97	-64.62
5775.00	Peak	82.73	13.99	96.72	--	--
5775.00	Average	76.40	13.99	90.39	--	--
5853.00	Peak	40.75	14.02	54.77	115.36	-60.58
5864.10	Peak	43.54	14.02	57.56	108.25	-50.69
5913.60	Peak	39.39	14.07	53.45	76.61	-23.15
5976.00	Peak	39.73	14.15	53.89	68.20	-14.31


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 13, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

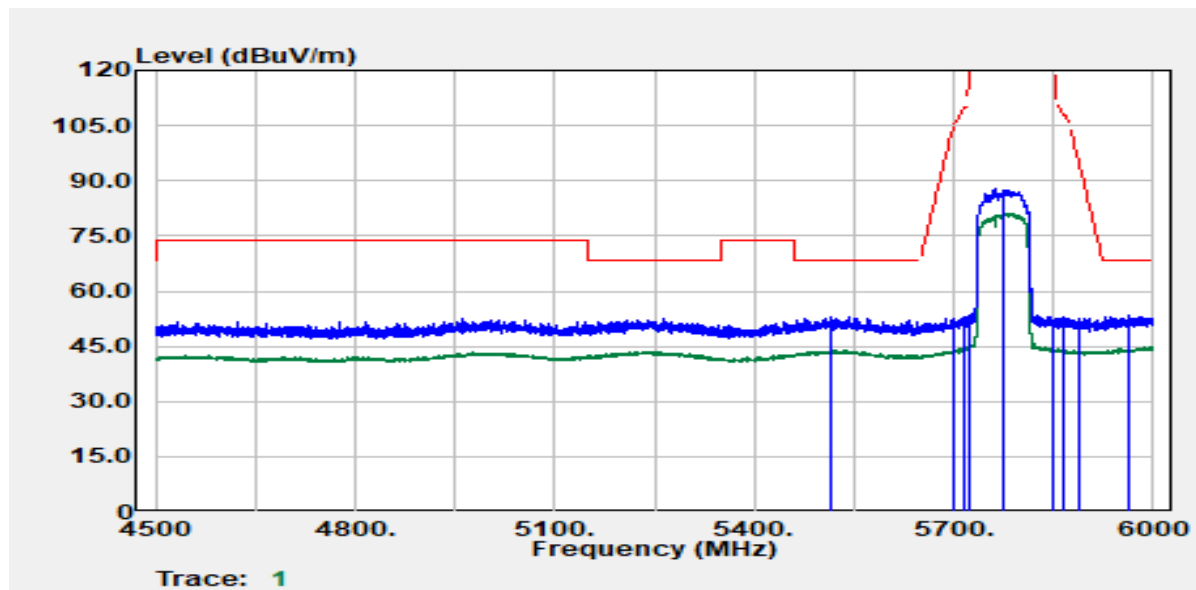

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5513.70	Peak	40.48	12.65	53.13	68.20	-15.07
5699.40	Peak	39.03	13.56	52.58	104.76	-52.18
5714.10	Peak	39.21	13.63	52.84	109.15	-56.31
5724.90	Peak	39.96	13.69	53.65	121.97	-68.32
5775.00	Peak	73.83	13.99	87.82	--	--
5775.00	Average	67.21	13.99	81.20	--	--
5850.90	Peak	38.27	14.02	52.29	120.15	-67.86
5865.90	Peak	38.98	14.02	53.00	107.75	-54.75
5887.80	Peak	38.58	14.03	52.61	95.70	-43.09
5964.00	Peak	39.06	14.16	53.22	68.20	-14.98


Test Data for UNII-1

Test Mode	Mode 2 IEEE 802.11a / 5180 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	June 16, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

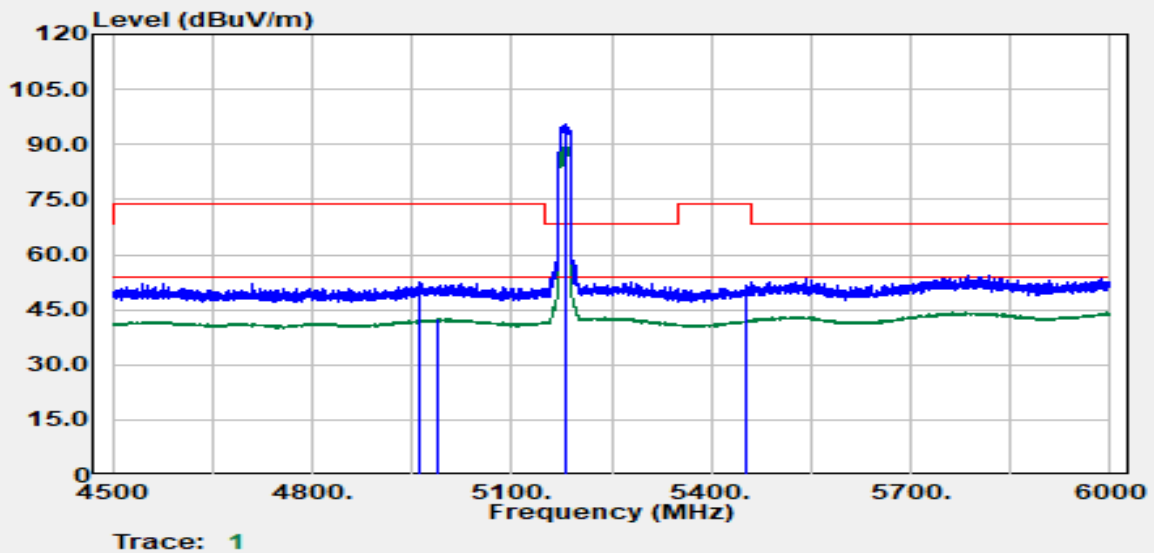


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4961.10	Peak	41.32	11.26	52.57	74.00	-21.43
4989.90	Average	30.91	11.52	42.43	54.00	-11.57
5180.00	Peak	83.27	12.10	95.37	--	--
5180.00	Average	77.23	12.10	89.33	--	--
5452.50	Peak	39.20	12.38	51.58	74.00	-22.42
5454.30	Average	29.80	12.39	42.19	54.00	-11.81

Test Mode	Mode 2 IEEE 802.11a / 5180 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 16, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

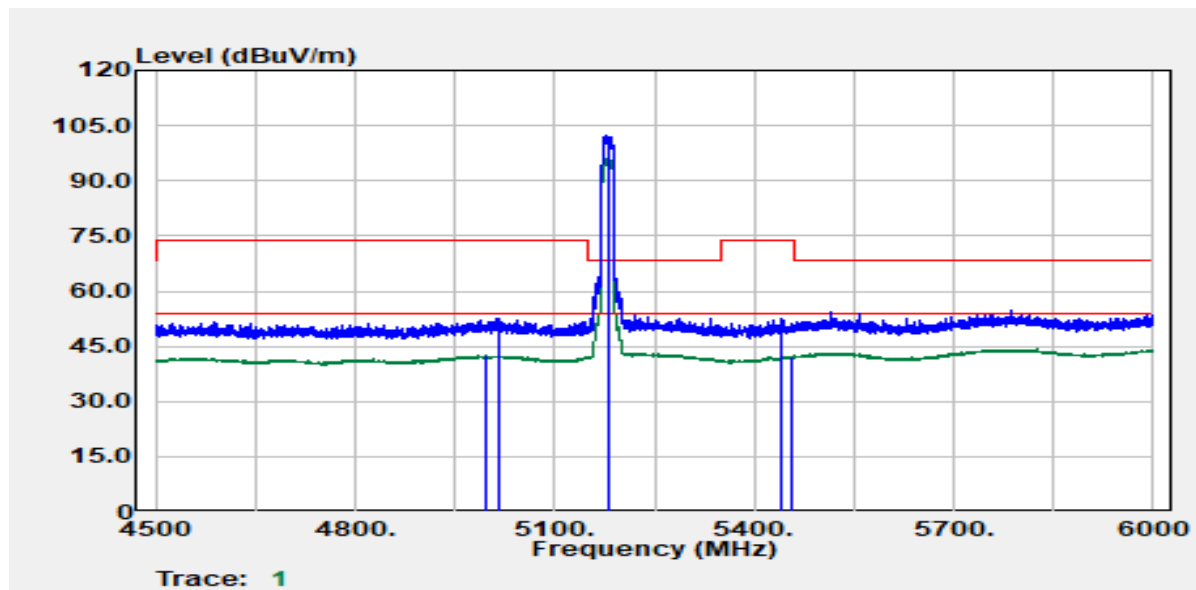


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4995.60	Average	30.95	11.57	42.52	54.00	-11.48
5015.40	Peak	40.90	11.71	52.62	74.00	-21.38
5180.00	Peak	90.05	12.10	102.15	--	--
5180.00	Average	83.91	12.10	96.01	--	--
5439.00	Peak	39.99	12.36	52.35	74.00	-21.65
5458.20	Average	29.89	12.40	42.29	54.00	-11.71

Test Mode	Mode 2 IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 16, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

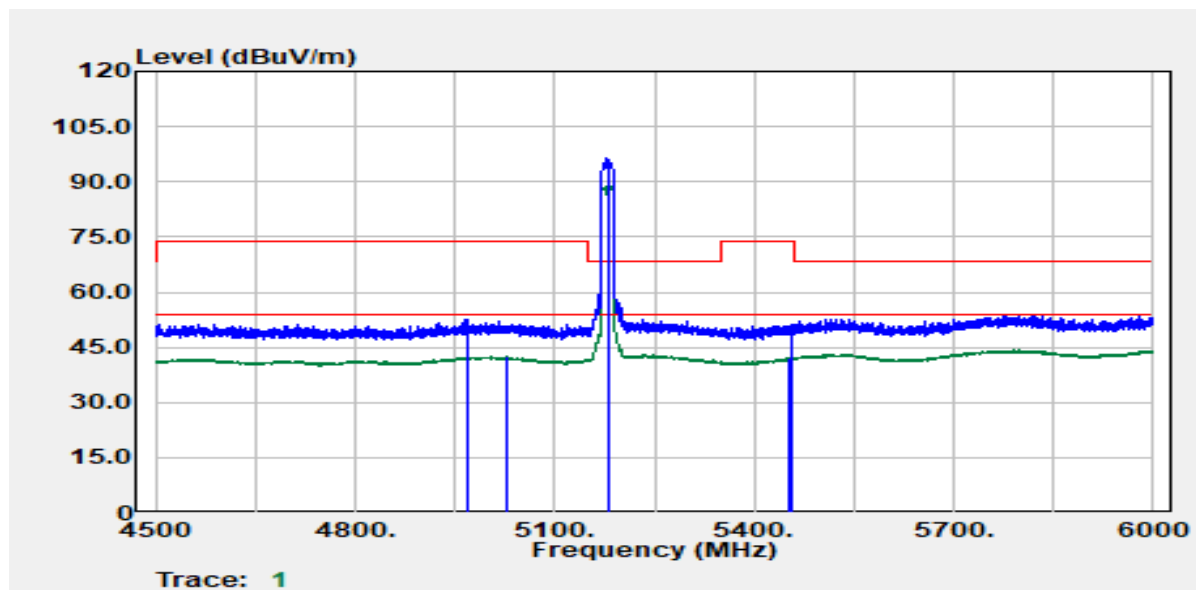


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4970.70	Peak	41.13	11.34	52.47	74.00	-21.53
5027.40	Average	30.68	11.80	42.48	54.00	-11.52
5180.00	Peak	84.30	12.10	96.40	--	--
5180.00	Average	76.87	12.10	88.97	--	--
5454.00	Average	29.70	12.39	42.08	54.00	-11.92
5456.40	Peak	38.78	12.40	51.18	74.00	-22.82

Test Mode	Mode 2 IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	June 16, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

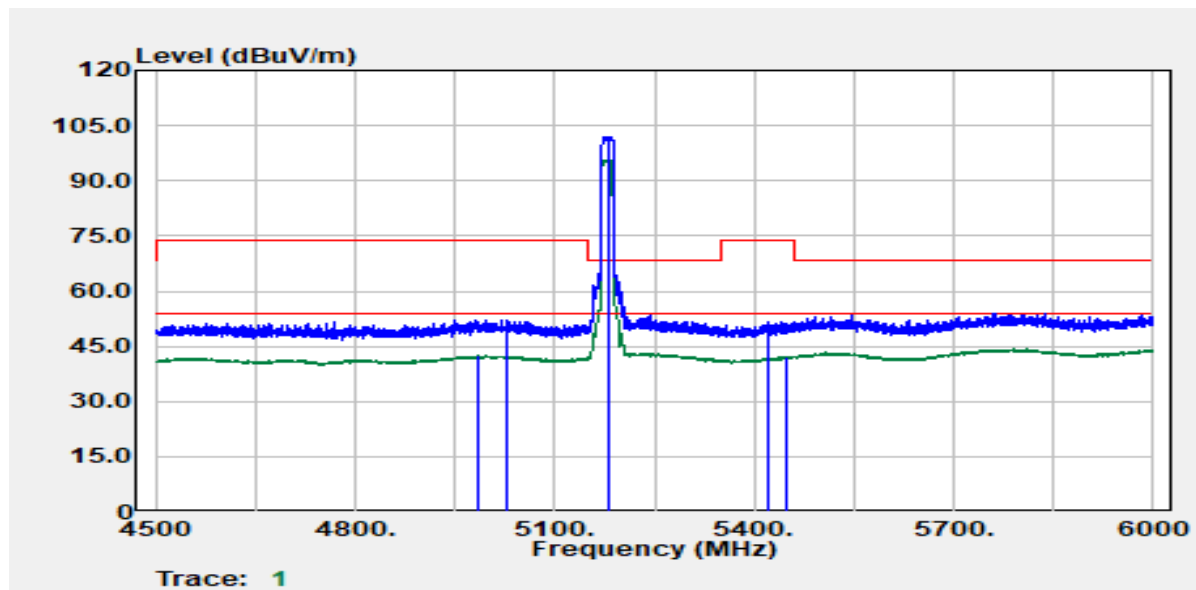


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4985.40	Average	30.95	11.48	42.42	54.00	-11.58
5026.80	Peak	40.30	11.79	52.09	74.00	-21.91
5180.00	Peak	89.98	12.10	102.08	--	--
5180.00	Average	83.69	12.10	95.79	--	--
5421.30	Peak	39.46	12.34	51.80	74.00	-22.20
5449.20	Average	29.95	12.37	42.33	54.00	-11.67

Test Mode	Mode 2 IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

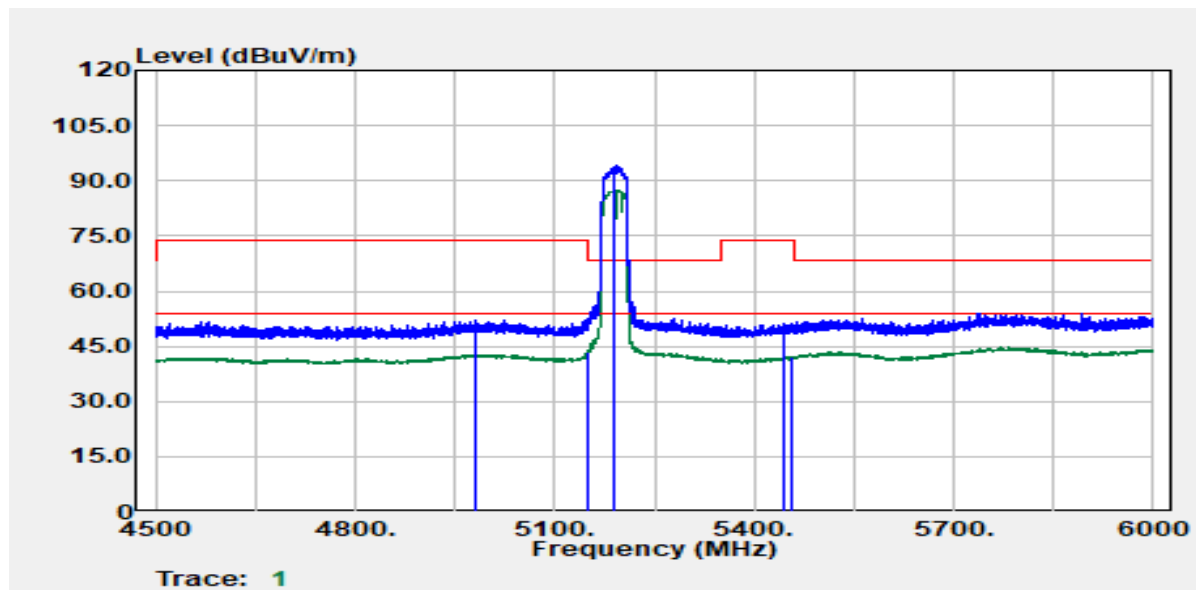


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4981.20	Peak	40.79	11.44	52.23	74.00	-21.77
5149.80	Average	31.46	12.16	43.62	54.00	-10.38
5190.00	Peak	81.96	12.08	94.04	--	--
5190.00	Average	75.44	12.08	87.52	--	--
5444.70	Peak	38.87	12.37	51.24	74.00	-22.76
5457.90	Average	29.93	12.40	42.33	54.00	-11.67

Test Mode	Mode 2 IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

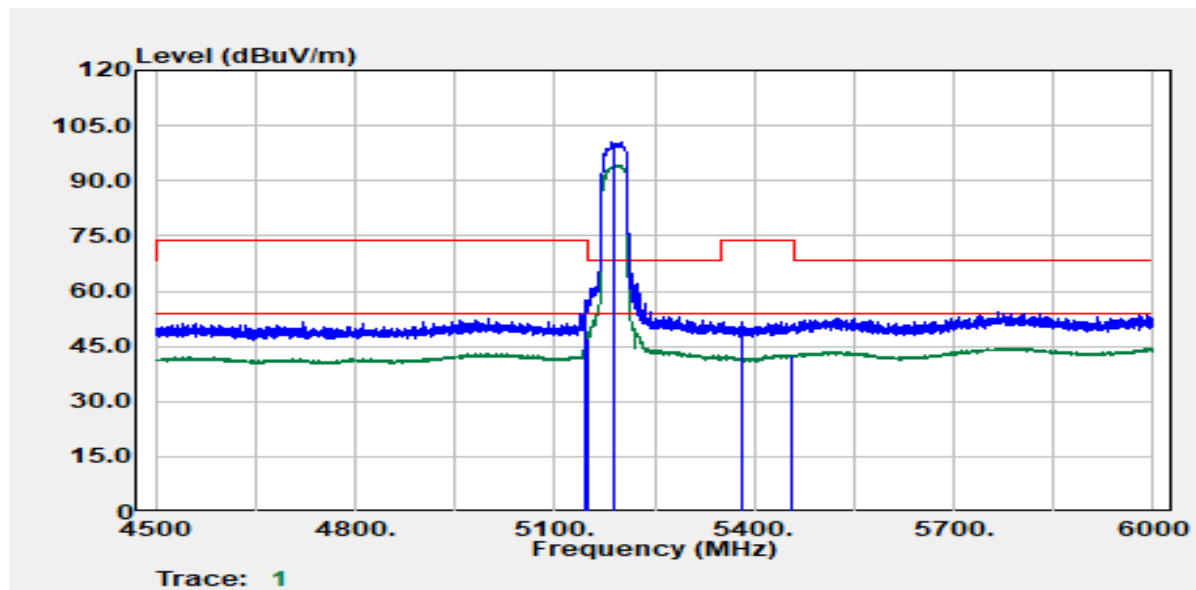


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5146.80	Peak	45.54	12.15	57.69	74.00	-16.31
5149.80	Average	35.13	12.16	47.29	54.00	-6.71
5190.00	Peak	88.36	12.08	100.44	--	--
5190.00	Average	82.19	12.08	94.27	--	--
5381.40	Peak	39.26	12.25	51.51	74.00	-22.49
5455.50	Average	30.34	12.39	42.73	54.00	-11.27

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

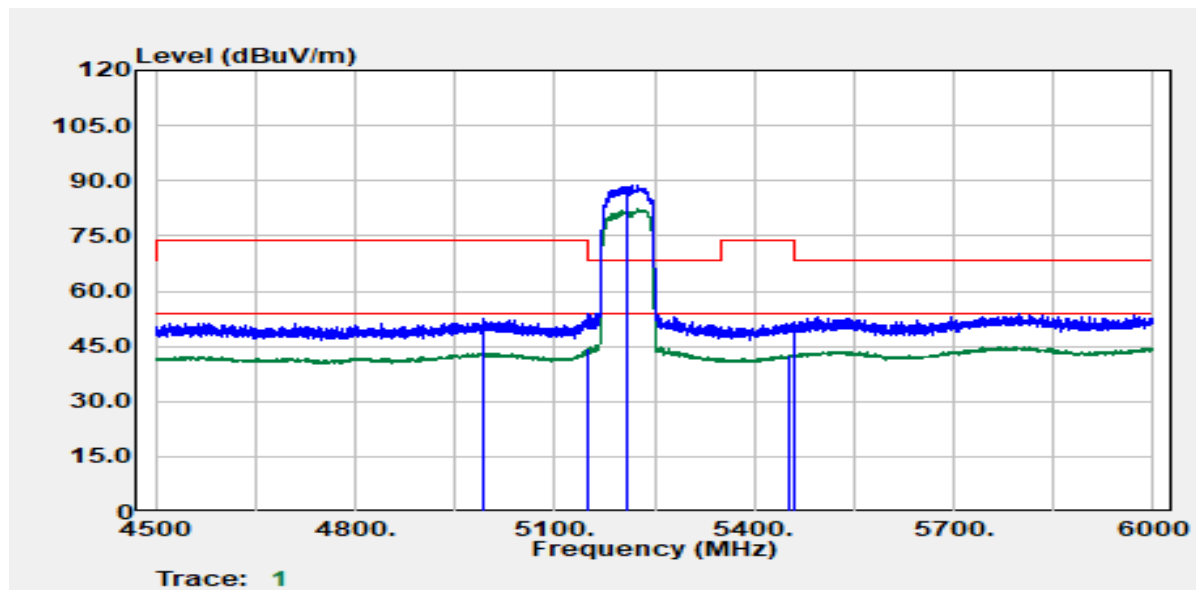

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4992.60	Peak	40.97	11.54	52.51	74.00	-21.49
5149.20	Average	32.19	12.16	44.34	54.00	-9.66
5210.00	Peak	76.55	12.06	88.60	--	--
5210.00	Average	70.31	12.06	82.36	--	--
5453.40	Average	30.26	12.39	42.64	54.00	-11.36
5459.70	Peak	39.43	12.41	51.84	74.00	-22.16


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

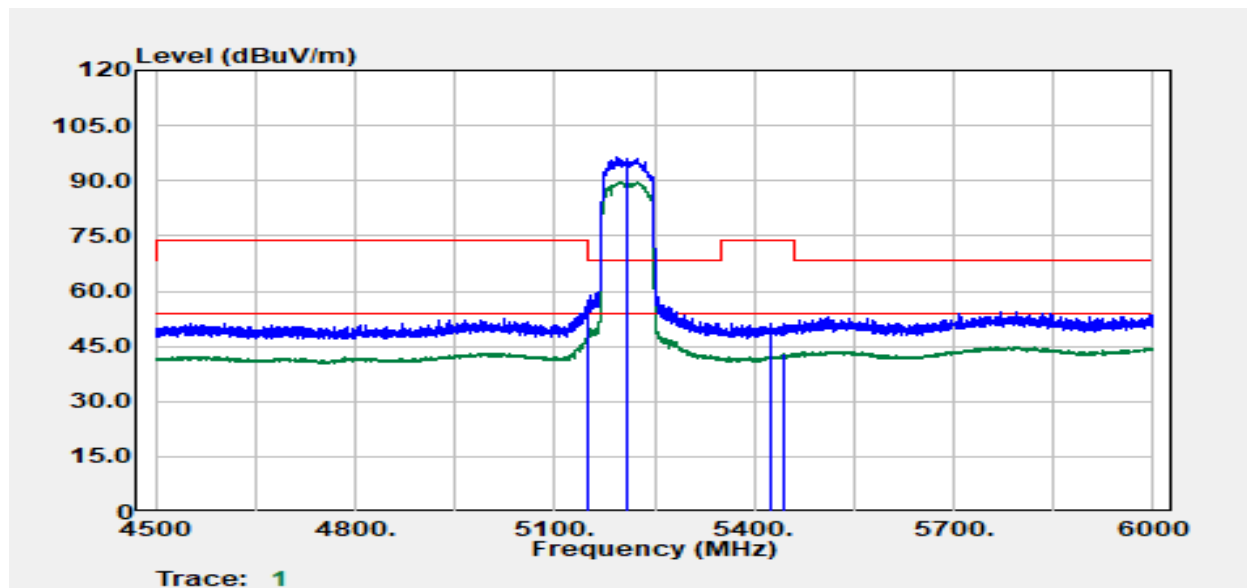

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5148.30	Peak	45.42	12.16	57.57	74.00	-16.43
5149.50	Average	35.94	12.16	48.10	54.00	-5.90
5210.00	Peak	84.42	12.06	96.48	--	--
5210.00	Average	77.67	12.06	89.73	--	--
5424.30	Peak	39.03	12.35	51.38	74.00	-22.62
5444.40	Average	30.73	12.37	43.09	54.00	-10.91


Test Data for UNII-2a

Test Mode	Mode 2 IEEE 802.11a / 5320 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

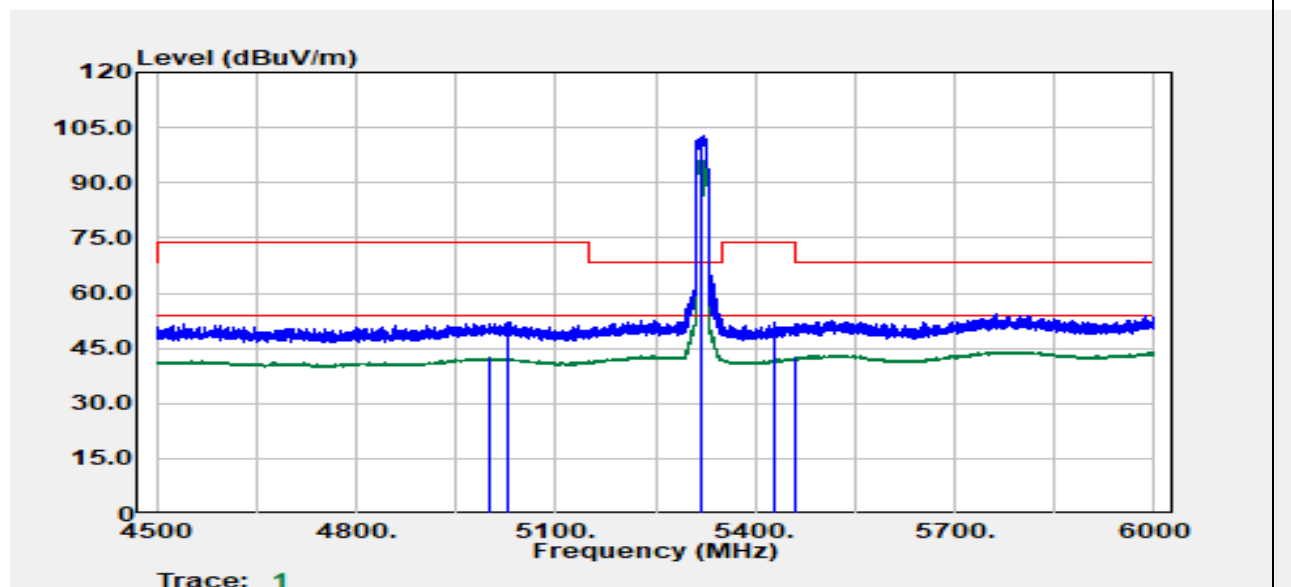


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5001.08	Average	30.83	11.62	42.45	54.00	-11.55
5029.84	Peak	40.16	11.81	51.97	74.00	-22.03
5320.00	Peak	90.81	12.14	102.96	--	--
5320.00	Average	84.03	12.14	96.17	--	--
5427.91	Peak	39.58	12.35	51.93	74.00	-22.07
5459.66	Average	30.05	12.41	42.46	54.00	-11.54

Test Mode	Mode 2 IEEE 802.11a / 5320 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

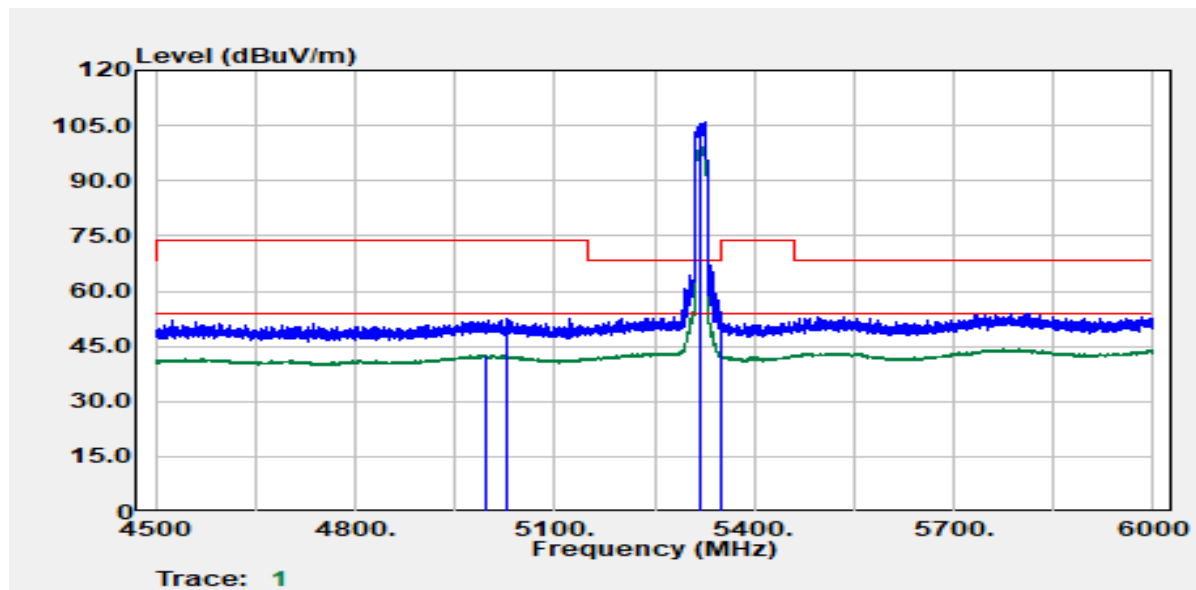


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4998.33	Average	31.10	11.59	42.69	54.00	-11.31
5029.09	Peak	40.82	11.81	52.63	74.00	-21.37
5320.00	Peak	93.89	12.14	106.03	--	--
5320.00	Average	86.81	12.14	98.95	--	--
5350.39	Average	30.53	12.13	42.66	54.00	-11.34
5352.14	Peak	40.44	12.14	52.58	74.00	-21.42

Test Mode	Mode 2 IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

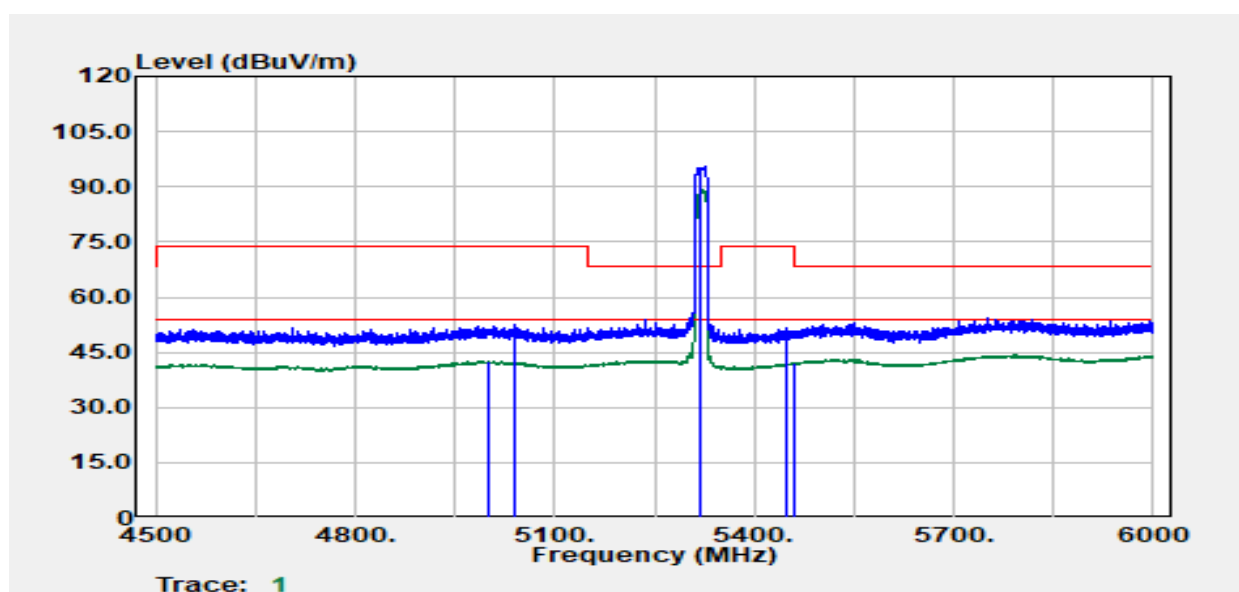


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4998.90	Average	31.01	11.60	42.61	54.00	-11.39
5039.70	Peak	40.52	11.88	52.40	74.00	-21.60
5320.00	Peak	83.27	12.14	95.42	--	--
5320.00	Average	76.87	12.14	89.02	--	--
5448.60	Peak	39.27	12.37	51.65	74.00	-22.35
5459.70	Average	29.61	12.41	42.02	54.00	-11.98

Test Mode	Mode 2 IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

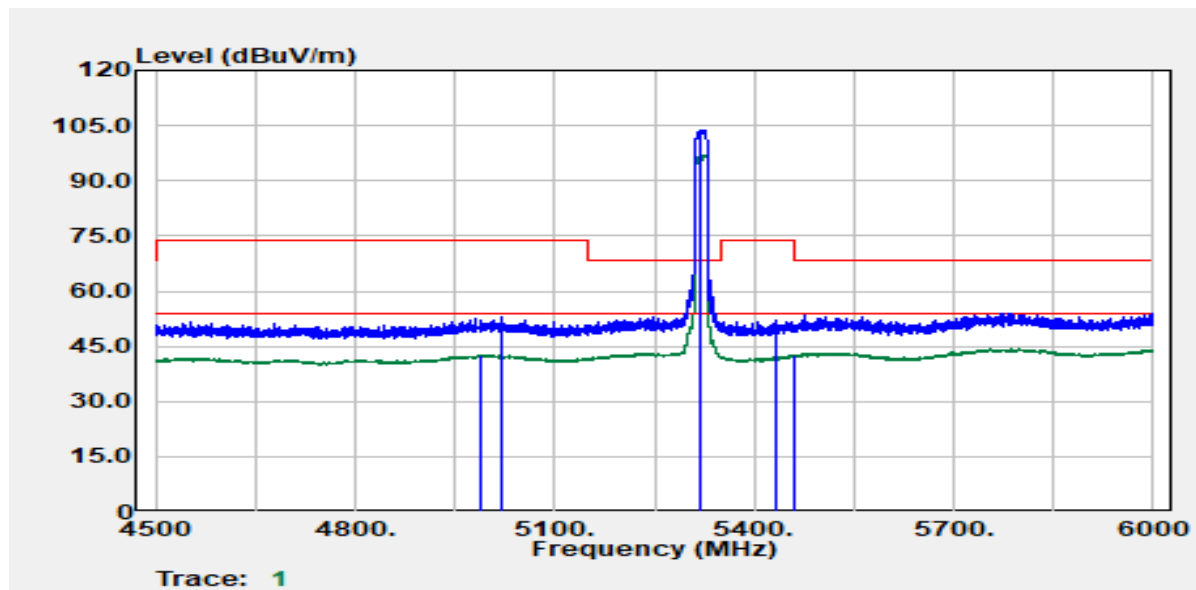


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4989.00	Average	31.08	11.51	42.59	54.00	-11.41
5018.40	Peak	41.06	11.74	52.80	74.00	-21.20
5320.00	Peak	91.54	12.14	103.69	--	--
5320.00	Average	84.94	12.14	97.09	--	--
5431.20	Peak	39.56	12.35	51.92	74.00	-22.08
5459.70	Average	30.16	12.41	42.56	54.00	-11.44

Test Mode	Mode 2 IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

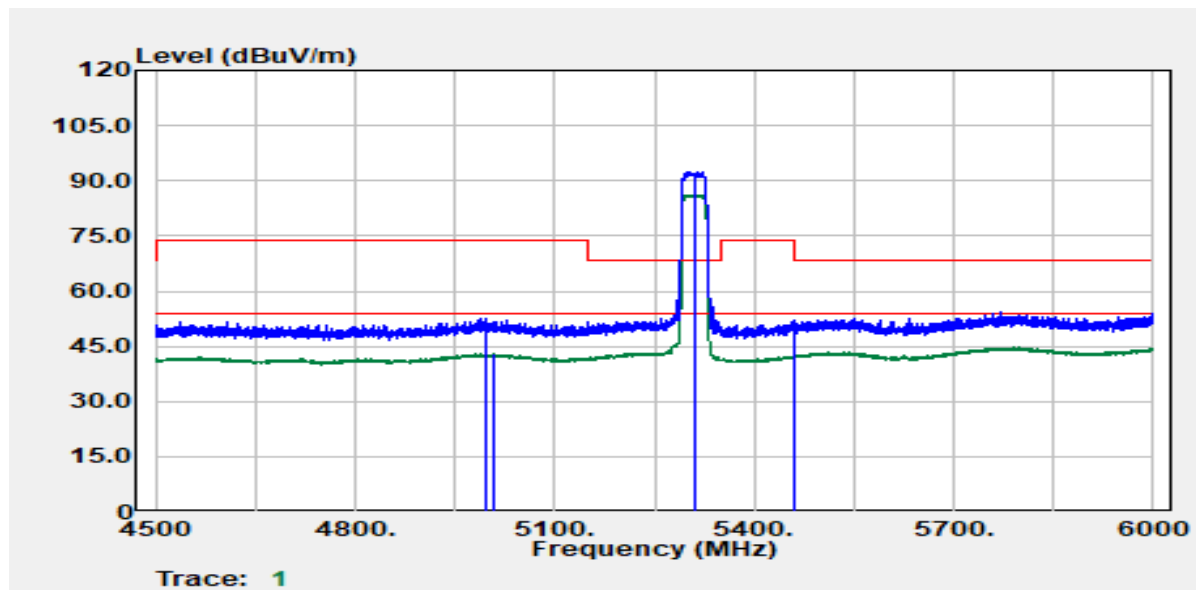


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4995.30	Peak	40.81	11.57	52.37	74.00	-21.63
5007.30	Average	31.19	11.66	42.85	54.00	-11.15
5310.00	Peak	80.37	12.15	92.51	--	--
5310.00	Average	73.98	12.15	86.13	--	--
5458.50	Peak	39.66	12.40	52.07	74.00	-21.93
5460.00	Average	29.92	12.41	42.33	54.00	-11.67

Test Mode	Mode 2 IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

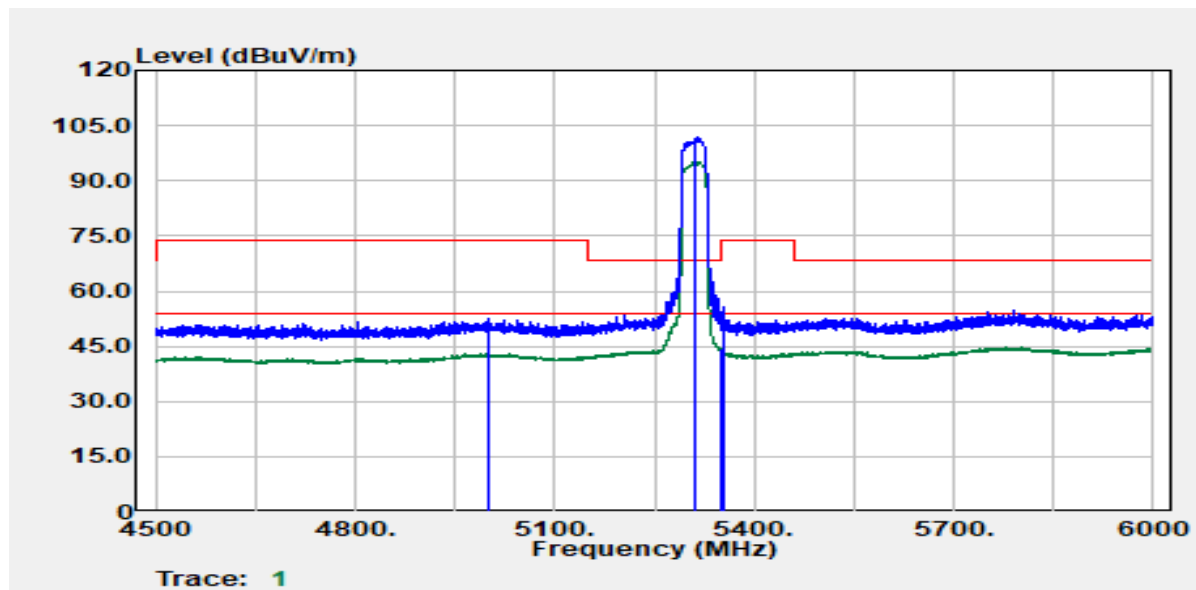


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4998.60	Average	31.27	11.60	42.87	54.00	-11.13
5001.00	Peak	40.78	11.62	52.40	74.00	-21.60
5310.00	Peak	89.53	12.15	101.68	--	--
5310.00	Average	83.09	12.15	95.23	--	--
5350.50	Average	32.39	12.13	44.52	54.00	-9.48
5355.60	Peak	43.33	12.15	55.48	74.00	-18.52

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

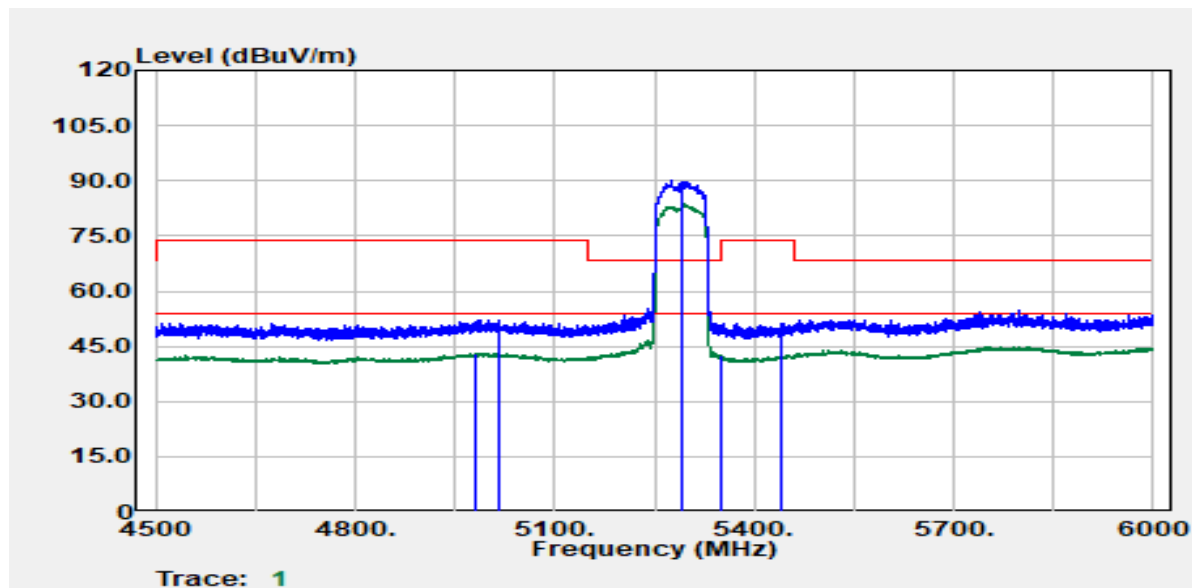

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4982.70	Average	31.78	11.45	43.23	54.00	-10.77
5017.80	Peak	40.50	11.73	52.23	74.00	-21.77
5290.00	Peak	77.94	12.13	90.06	--	--
5290.00	Average	71.61	12.13	83.74	--	--
5351.40	Average	30.37	12.14	42.50	54.00	-11.50
5441.10	Peak	38.86	12.37	51.22	74.00	-22.78


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

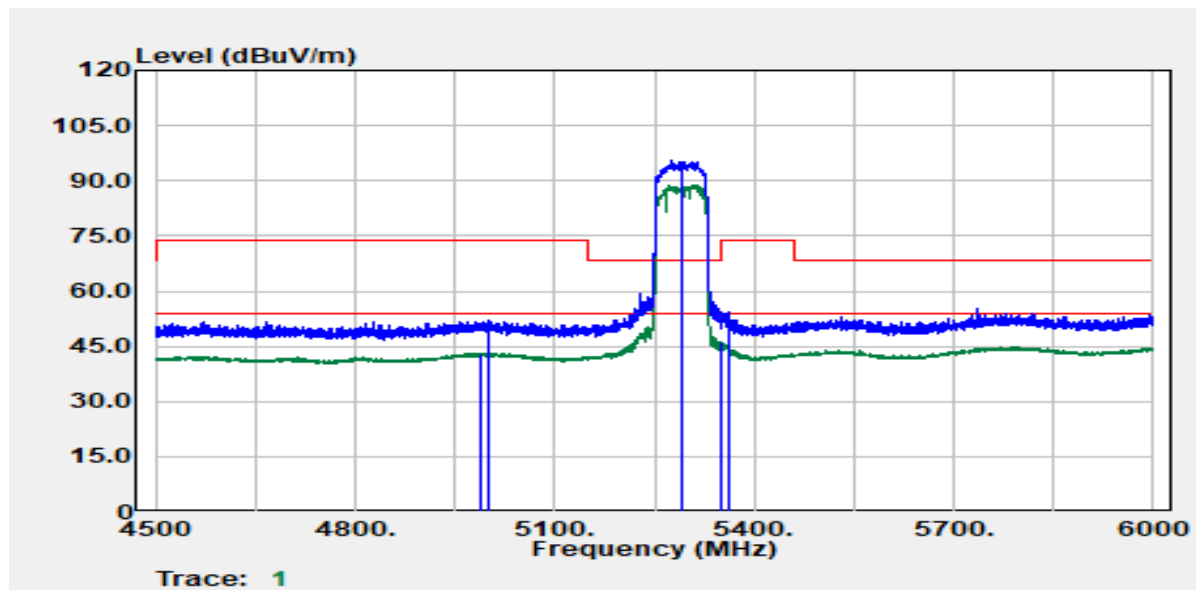

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4990.20	Average	31.57	11.52	43.09	54.00	-10.91
5001.90	Peak	40.43	11.62	52.05	74.00	-21.95
5290.00	Peak	83.37	12.13	95.50	--	--
5290.00	Average	76.76	12.13	88.89	--	--
5350.20	Average	34.15	12.13	46.28	54.00	-7.72
5361.30	Peak	42.23	12.17	54.40	74.00	-19.60


Test Data for UNII-2c

Test Mode	Mode 2 IEEE 802.11a / 5500 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

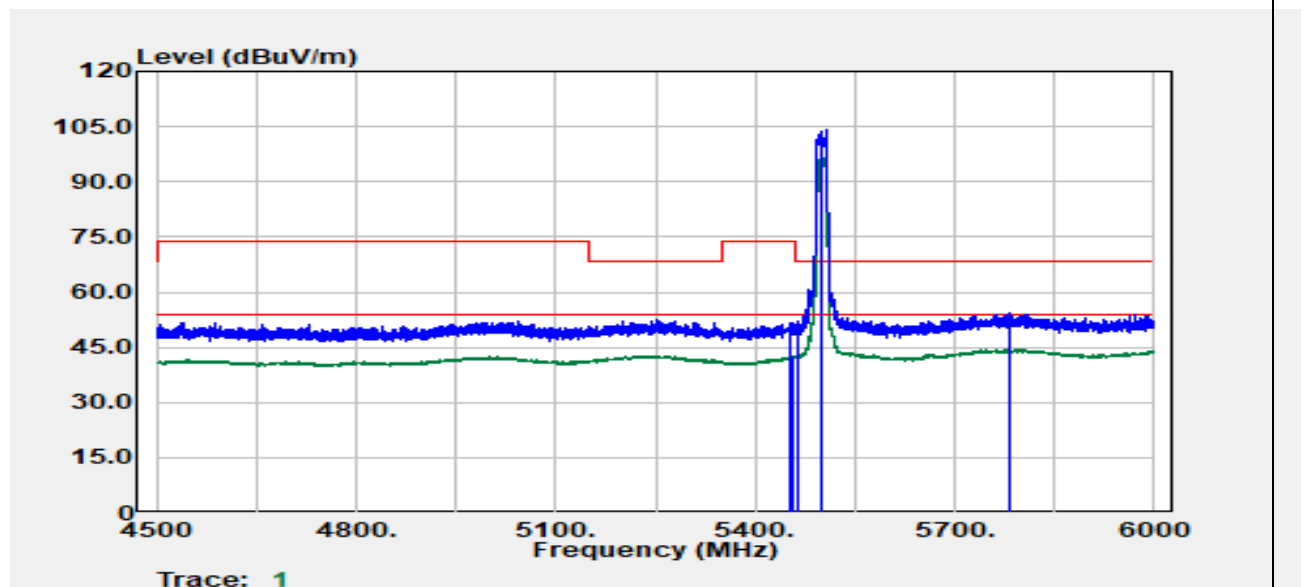


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.91	Peak	39.43	12.38	51.81	74.00	-22.19
5457.91	Average	30.05	12.40	42.46	54.00	-11.54
5464.66	Peak	39.85	12.43	52.28	68.20	-15.92
5500.00	Peak	91.52	12.55	104.07	--	--
5500.00	Average	83.82	12.55	96.37	--	--
5783.71	Peak	40.25	14.05	54.30	68.20	-13.90

Test Mode	Mode 2 IEEE 802.11a / 5500 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

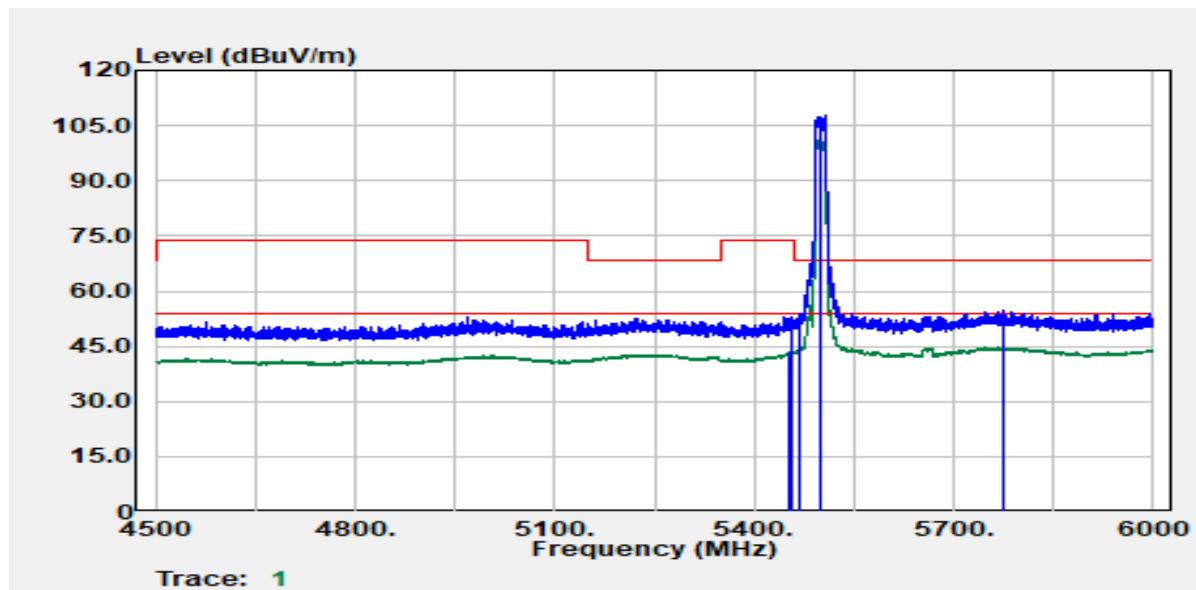


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.66	Average	30.91	12.38	43.30	54.00	-10.70
5457.91	Peak	40.77	12.40	53.17	74.00	-20.83
5467.66	Peak	41.33	12.44	53.77	68.20	-14.43
5500.00	Peak	95.12	12.55	107.67	--	--
5500.00	Average	88.38	12.55	100.93	--	--
5775.96	Peak	40.57	14.00	54.57	68.20	-13.63

Test Mode	Mode 2 IEEE 802.11a / 5700 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

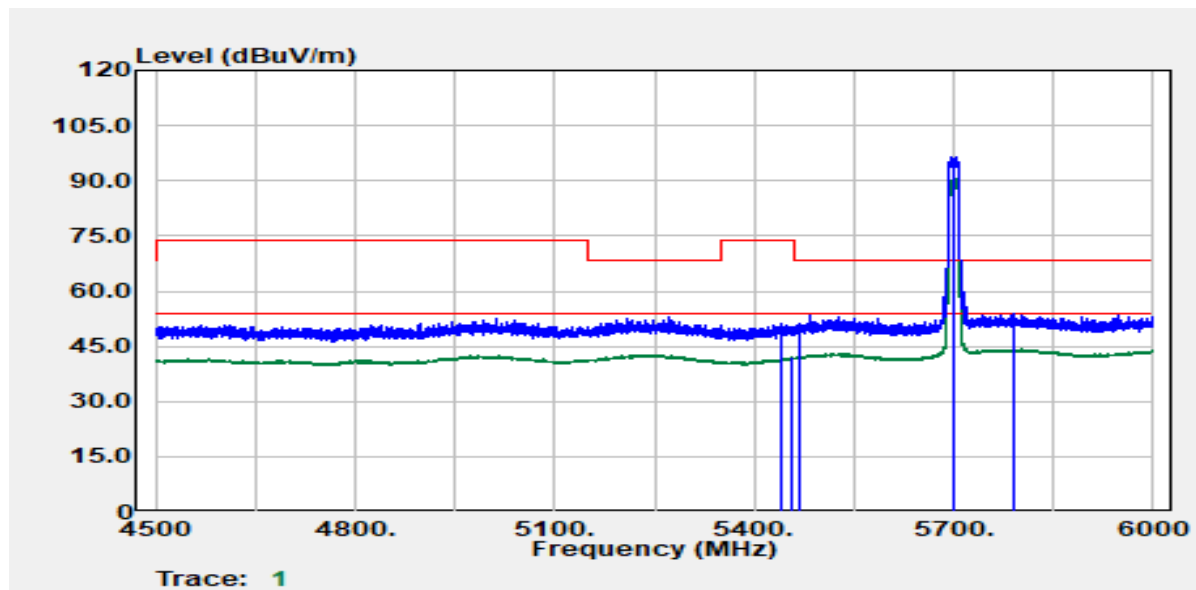


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5439.16	Peak	38.82	12.36	51.19	74.00	-22.81
5455.66	Average	29.55	12.39	41.94	54.00	-12.06
5468.16	Peak	38.86	12.44	51.30	68.20	-16.90
5700.00	Peak	83.00	13.56	96.56	--	--
5700.00	Average	76.83	13.56	90.39	--	--
5790.47	Peak	39.76	14.10	53.85	68.20	-14.35

Test Mode	Mode 2 IEEE 802.11a / 5700 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

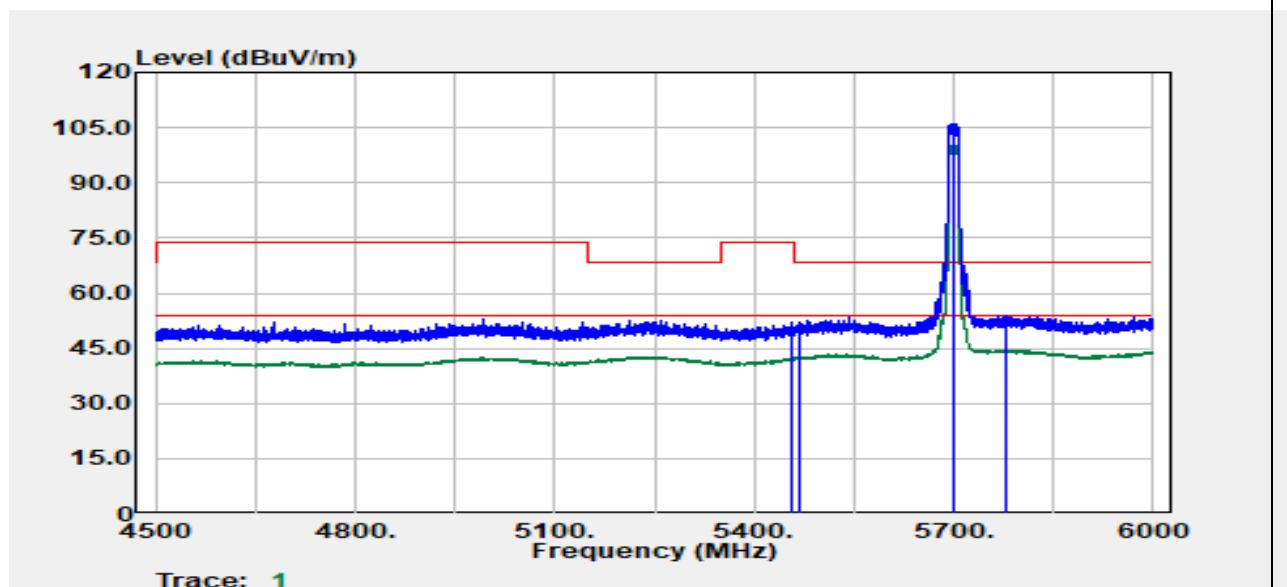


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5455.16	Peak	39.61	12.39	52.00	74.00	-22.00
5457.16	Average	29.90	12.40	42.30	54.00	-11.70
5467.66	Peak	39.71	12.44	52.15	68.20	-16.05
5700.00	Peak	92.62	13.56	106.18	--	--
5700.00	Average	86.83	13.56	100.39	--	--
5779.46	Peak	39.93	14.02	53.95	68.20	-14.25

Test Mode	Mode 2 IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

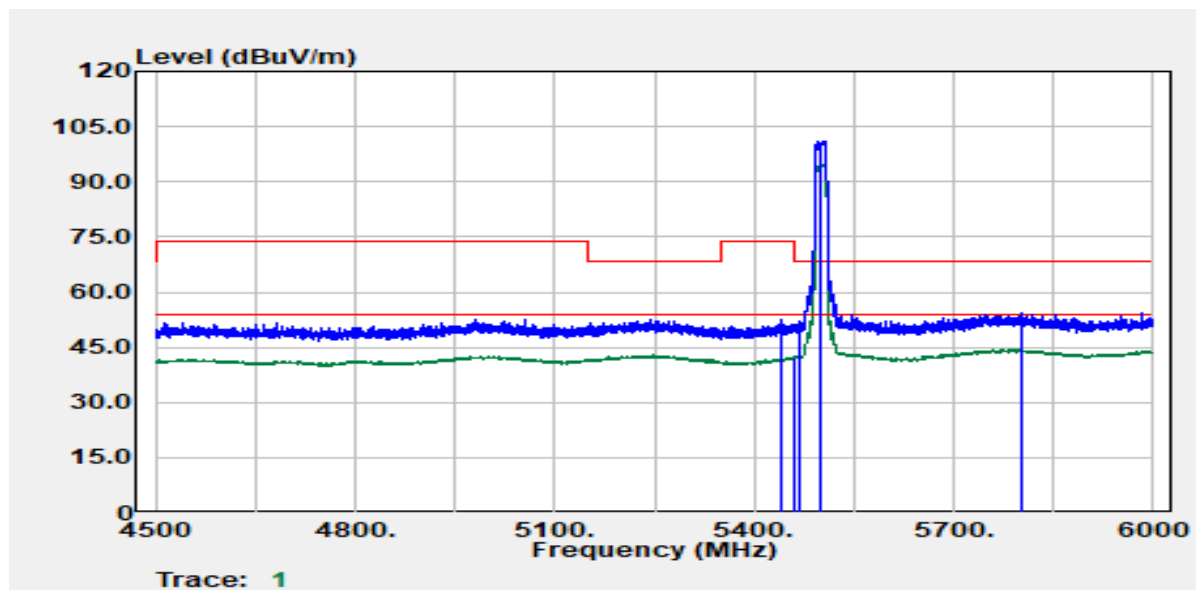


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5439.90	Peak	40.04	12.36	52.40	74.00	-21.60
5459.40	Average	29.83	12.41	42.24	54.00	-11.76
5468.10	Peak	39.51	12.44	51.95	68.20	-16.25
5500.00	Peak	88.63	12.55	101.18	--	--
5500.00	Average	82.24	12.55	94.79	--	--
5802.90	Peak	40.38	14.15	54.54	68.20	-13.66

Test Mode	Mode 2 IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

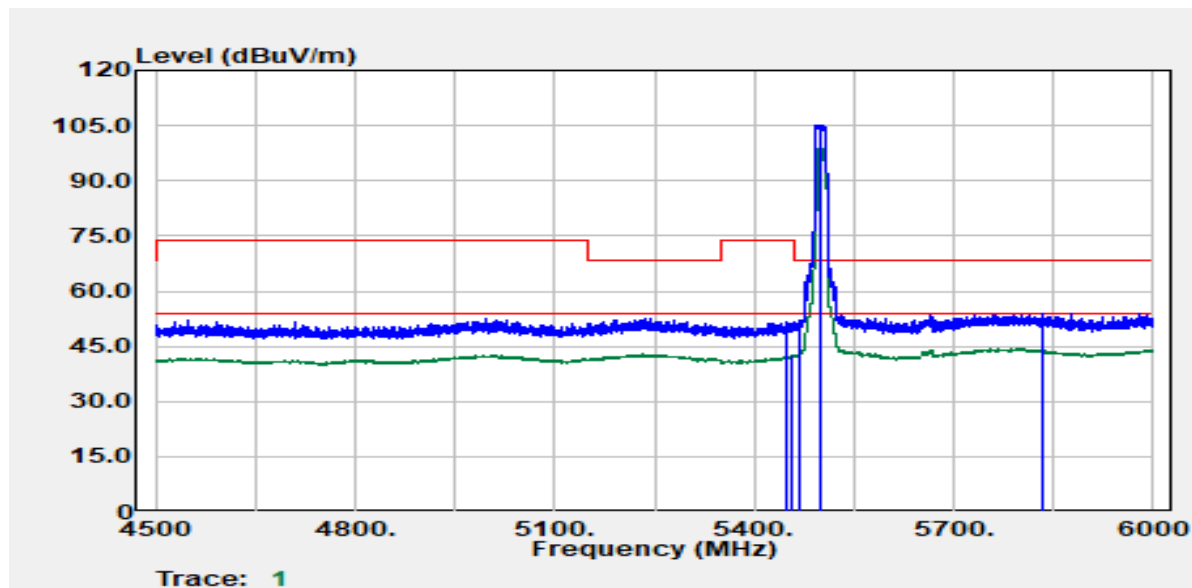


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.90	Peak	39.17	12.37	51.54	74.00	-22.46
5458.20	Average	30.21	12.40	42.61	54.00	-11.39
5467.80	Peak	39.57	12.44	52.00	68.20	-16.20
5500.00	Peak	92.55	12.55	105.10	--	--
5500.00	Average	86.21	12.55	98.76	--	--
5832.60	Peak	39.86	14.07	53.93	68.20	-14.27

Test Mode	Mode 2 IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

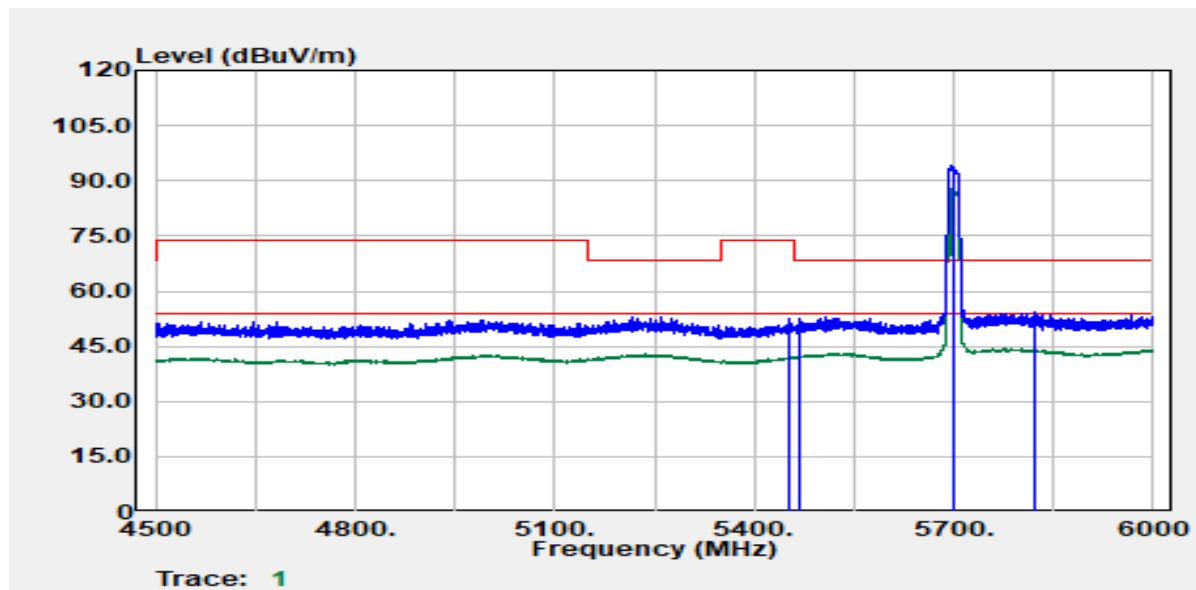


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.10	Average	29.64	12.39	42.02	54.00	-11.98
5454.30	Peak	40.03	12.39	52.42	74.00	-21.58
5468.10	Peak	40.18	12.44	52.62	68.20	-15.58
5700.00	Peak	80.79	13.56	94.35	--	--
5700.00	Average	74.41	13.56	87.97	--	--
5822.40	Peak	40.03	14.10	54.13	68.20	-14.07

Test Mode	Mode 2 IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

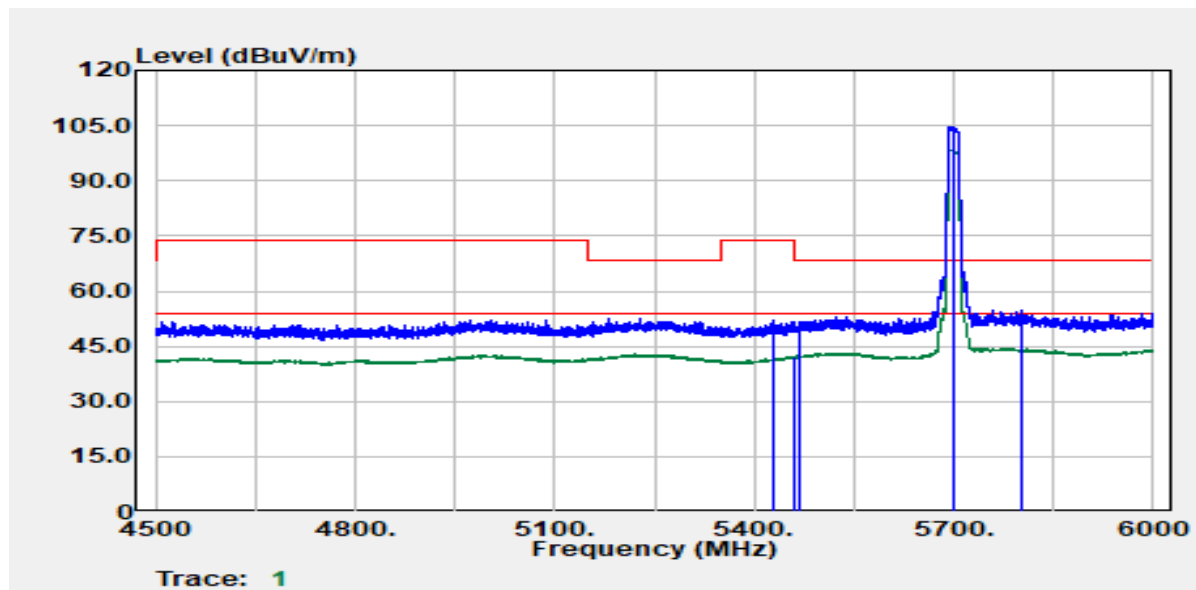


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5427.60	Peak	39.63	12.35	51.98	74.00	-22.02
5458.50	Average	29.93	12.40	42.34	54.00	-11.66
5469.30	Peak	38.96	12.44	51.40	68.20	-16.80
5700.00	Peak	91.26	13.56	104.82	--	--
5700.00	Average	84.86	13.56	98.42	--	--
5801.70	Peak	40.73	14.16	54.88	68.20	-13.32

Test Mode	Mode 2 IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

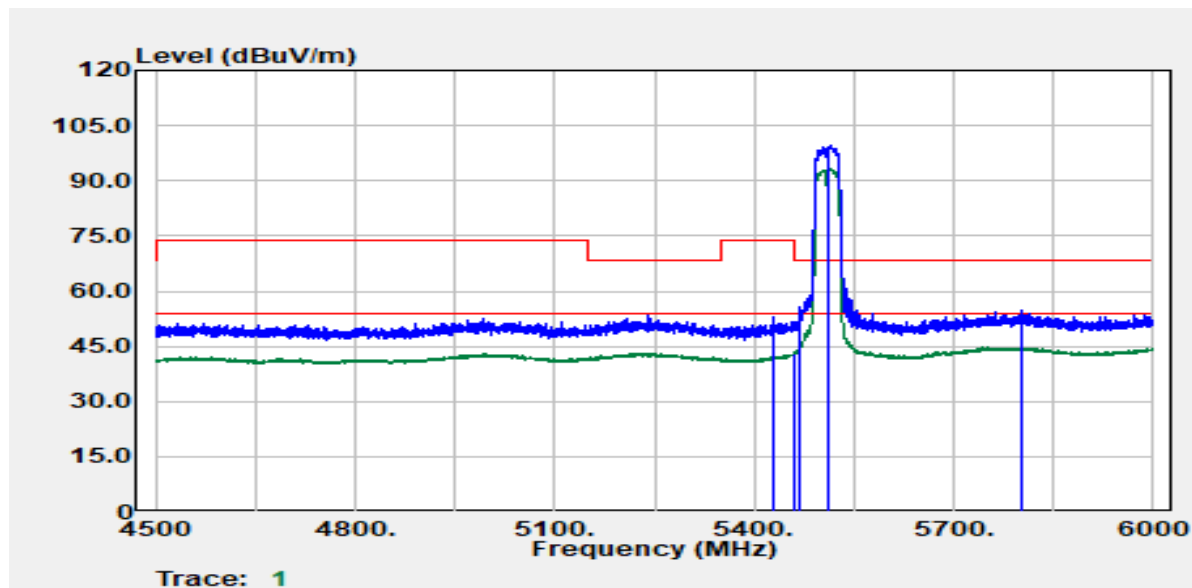


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5428.50	Peak	40.80	12.35	53.15	74.00	-20.85
5458.80	Average	30.82	12.41	43.23	54.00	-10.77
5467.50	Peak	43.36	12.44	55.80	68.20	-12.40
5510.00	Peak	87.21	12.62	99.83	--	--
5510.00	Average	80.64	12.62	93.26	--	--
5802.90	Peak	40.59	14.15	54.74	68.20	-13.46

Test Mode	Mode 2 IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

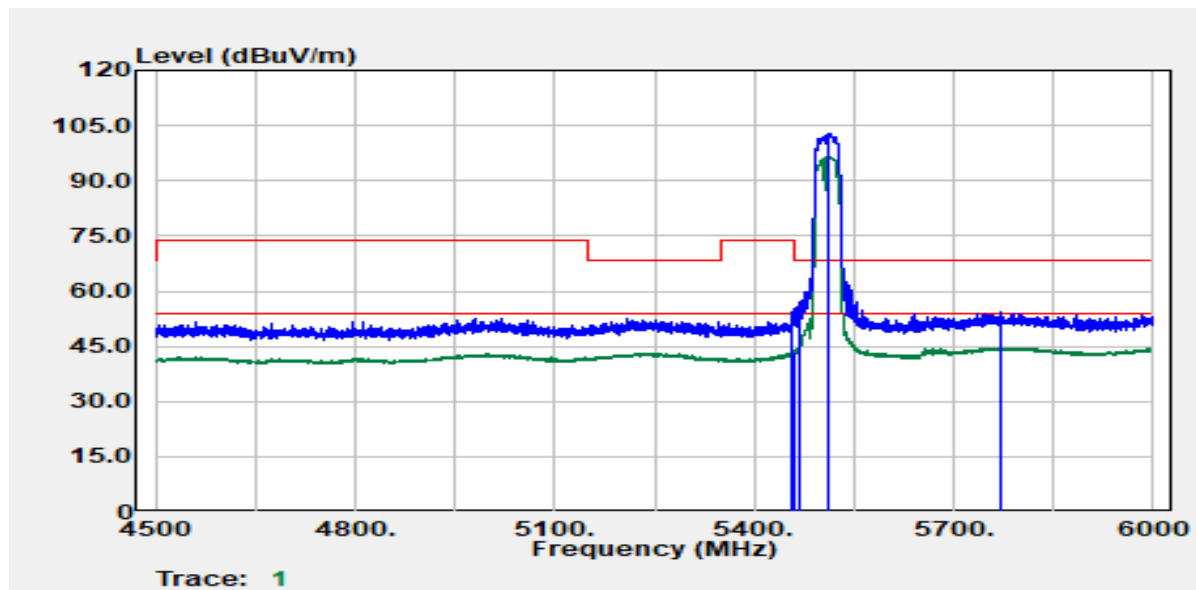


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.00	Peak	41.75	12.40	54.15	74.00	-19.85
5459.70	Average	30.88	12.41	43.29	54.00	-10.71
5467.20	Peak	44.70	12.44	57.14	68.20	-11.06
5510.00	Peak	90.10	12.62	102.72	--	--
5510.00	Average	83.94	12.62	96.56	--	--
5772.30	Peak	40.18	13.97	54.16	68.20	-14.04

Test Mode	Mode 2 IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

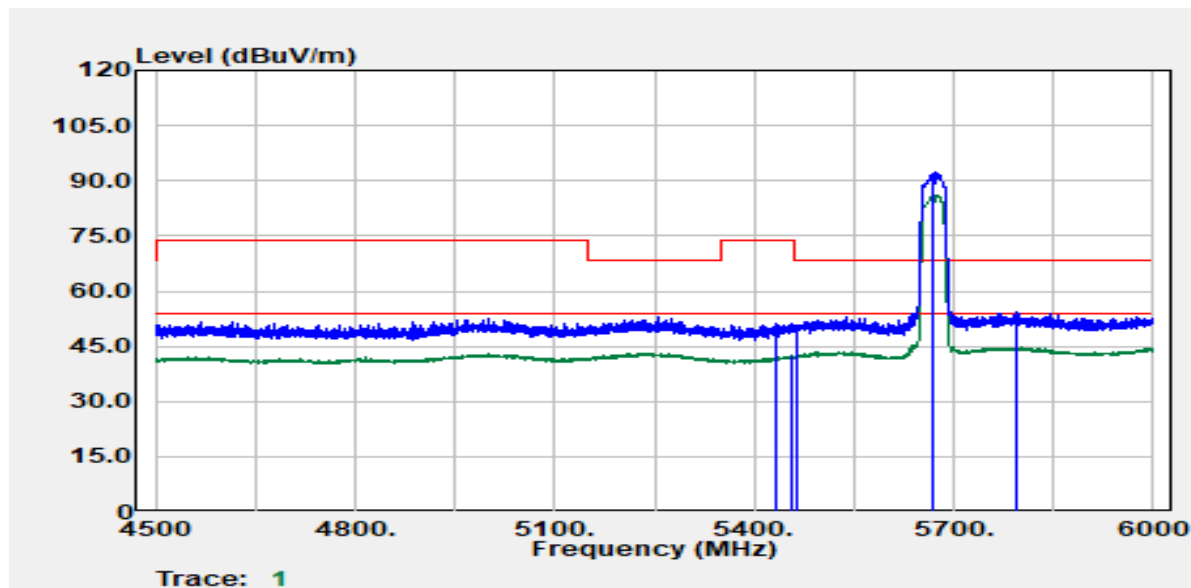


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5434.20	Peak	38.98	12.36	51.34	74.00	-22.66
5457.60	Average	29.94	12.40	42.34	54.00	-11.66
5462.70	Peak	38.33	12.42	50.75	68.20	-17.45
5670.00	Peak	79.10	13.39	92.49	--	--
5670.00	Average	72.85	13.39	86.24	--	--
5794.20	Peak	40.00	14.12	54.12	68.20	-14.08

Test Mode	Mode 2 IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

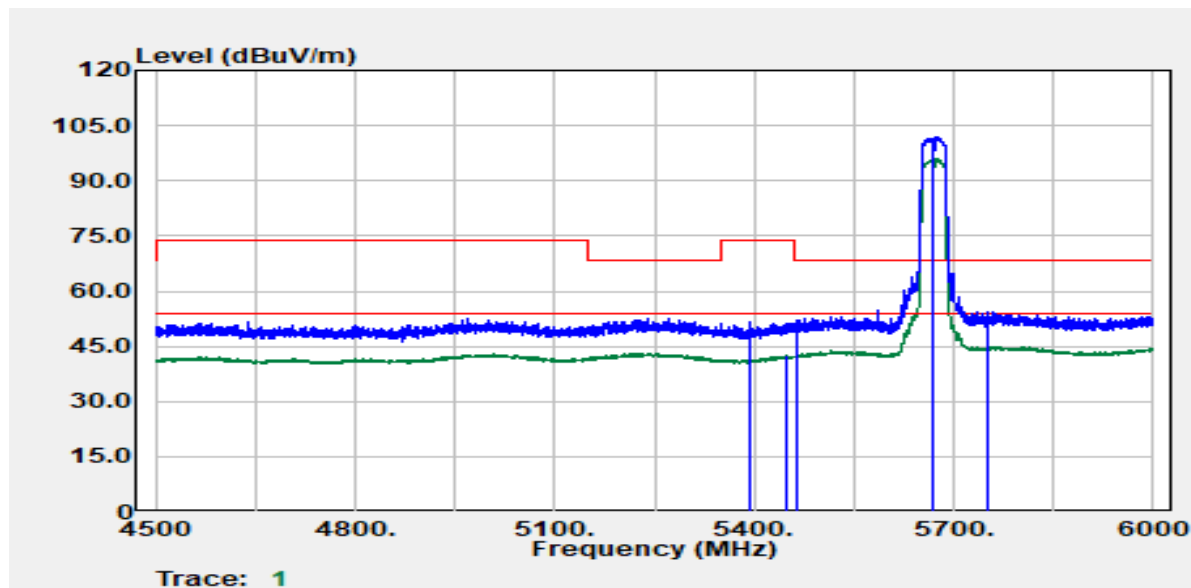


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5394.90	Peak	39.13	12.30	51.43	74.00	-22.57
5449.20	Average	30.05	12.37	42.42	54.00	-11.58
5464.80	Peak	39.61	12.43	52.04	68.20	-16.16
5670.00	Peak	88.50	13.39	101.89	--	--
5670.00	Average	82.54	13.39	95.93	--	--
5751.00	Peak	40.71	13.83	54.54	68.20	-13.66

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

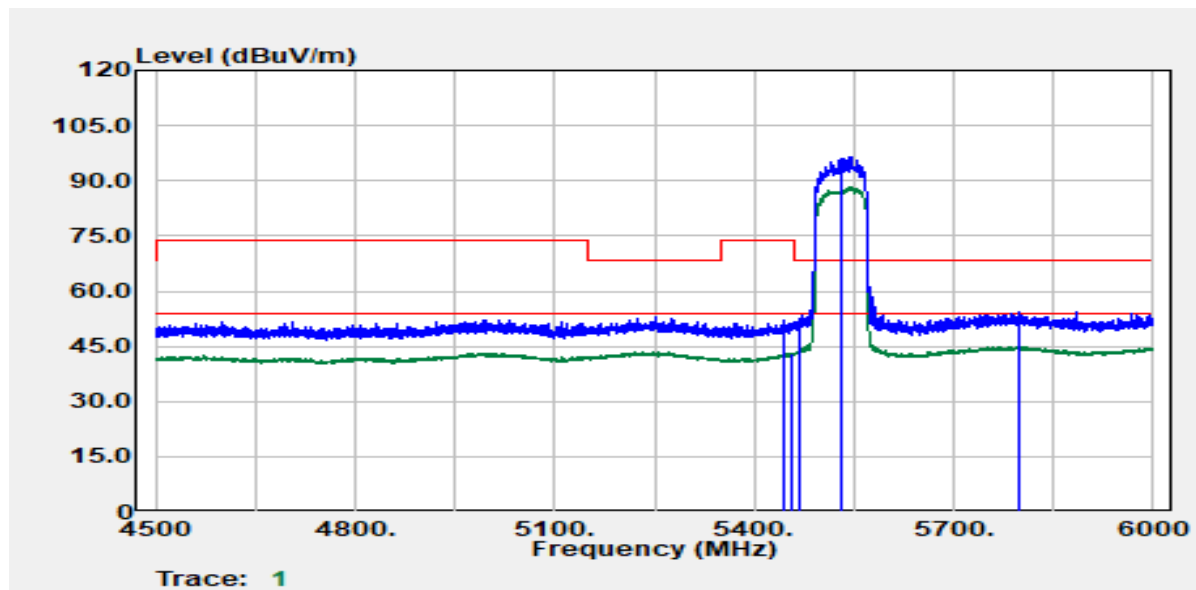


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5445.60	Peak	39.77	12.37	52.14	74.00	-21.86
5457.00	Average	30.78	12.40	43.18	54.00	-10.82
5469.30	Peak	39.91	12.44	52.35	68.20	-15.85
5530.00	Peak	83.68	12.77	96.44	--	--
5530.00	Average	75.67	12.77	88.44	--	--
5796.90	Peak	40.12	14.14	54.26	68.20	-13.94

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

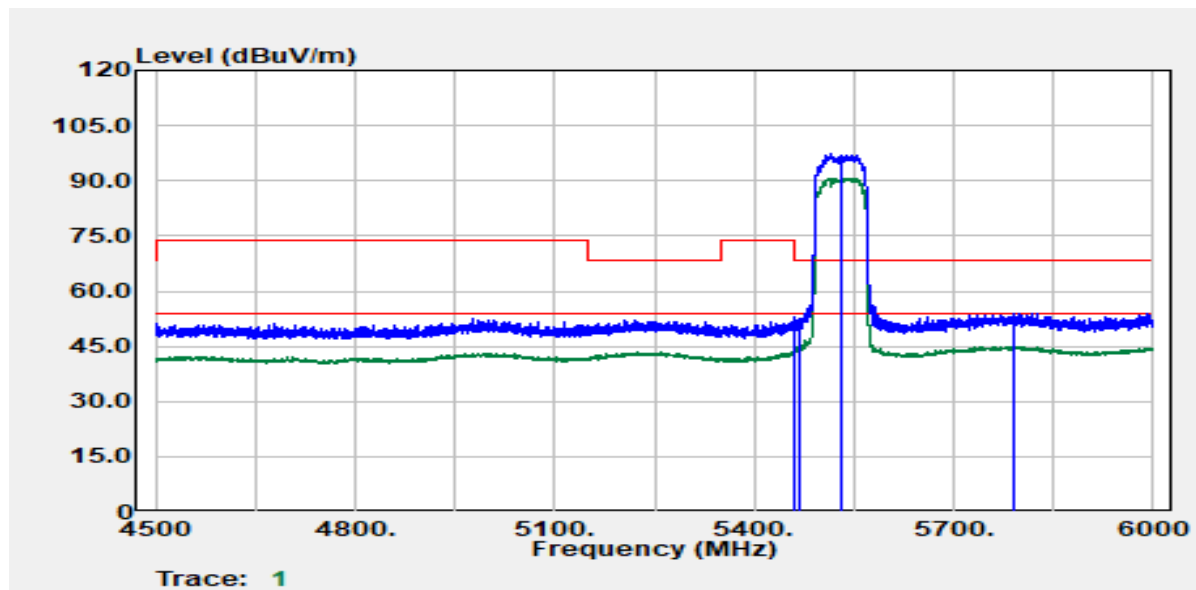


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5459.10	Peak	40.52	12.41	52.93	74.00	-21.07
5459.70	Average	31.46	12.41	43.87	54.00	-10.13
5469.90	Peak	40.20	12.44	52.65	68.20	-15.55
5530.00	Peak	84.42	12.77	97.19	--	--
5530.00	Average	78.01	12.77	90.78	--	--
5790.30	Peak	39.94	14.09	54.03	68.20	-14.17

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

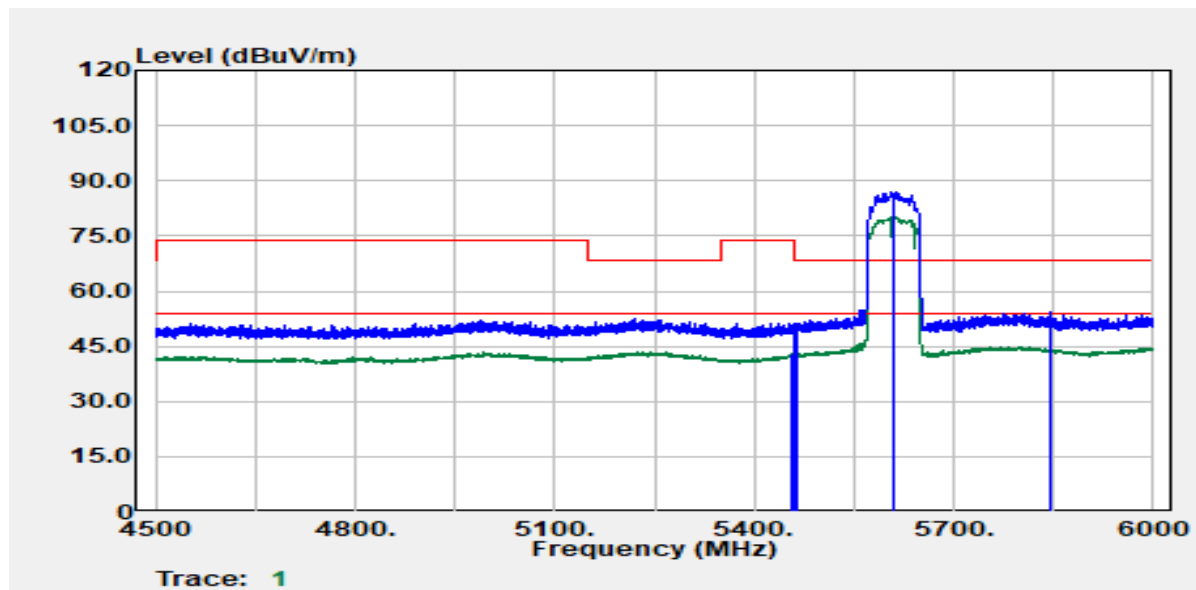

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.20	Average	30.55	12.40	42.95	54.00	-11.05
5459.40	Peak	38.90	12.41	51.30	74.00	-22.70
5465.70	Peak	38.64	12.43	51.07	68.20	-17.13
5610.00	Peak	74.12	12.92	87.04	--	--
5610.00	Average	67.38	12.92	80.30	--	--
5847.00	Peak	40.10	14.03	54.13	68.20	-14.07


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	23.6(°C) / 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

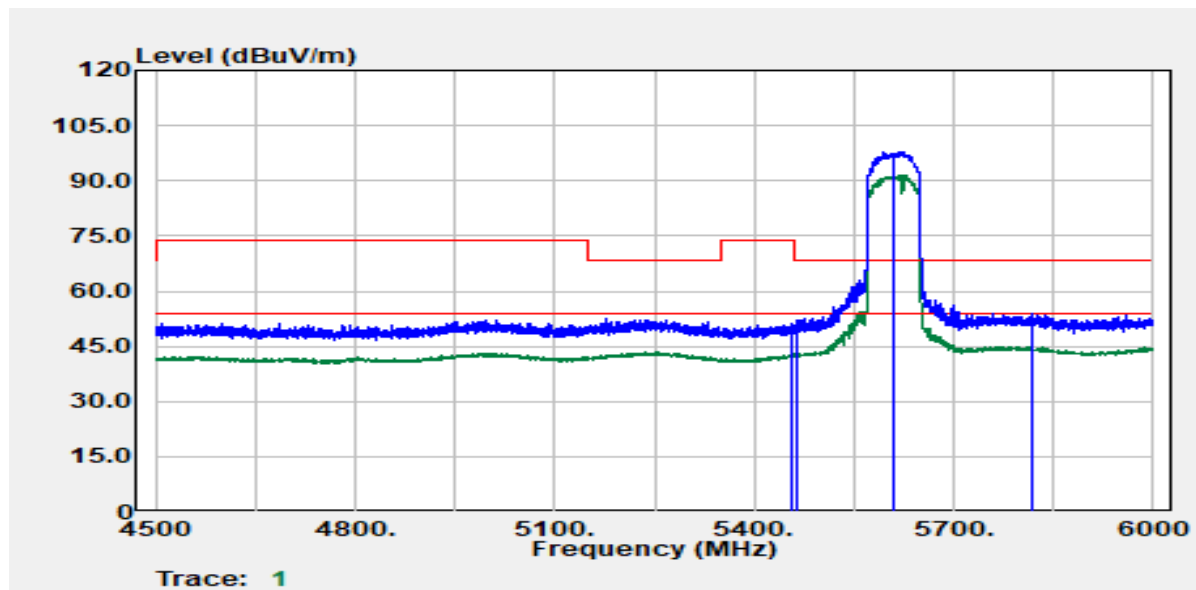

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.90	Average	30.15	12.39	42.54	54.00	-11.46
5457.30	Peak	38.68	12.40	51.08	74.00	-22.92
5462.70	Peak	39.52	12.42	51.94	68.20	-16.26
5610.00	Peak	84.93	12.92	97.85	--	--
5610.00	Average	78.63	12.92	91.55	--	--
5817.30	Peak	39.60	14.11	53.71	68.20	-14.49


Test Data for UNII-3

Test Mode	Mode 2 IEEE 802.11a / 5745 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

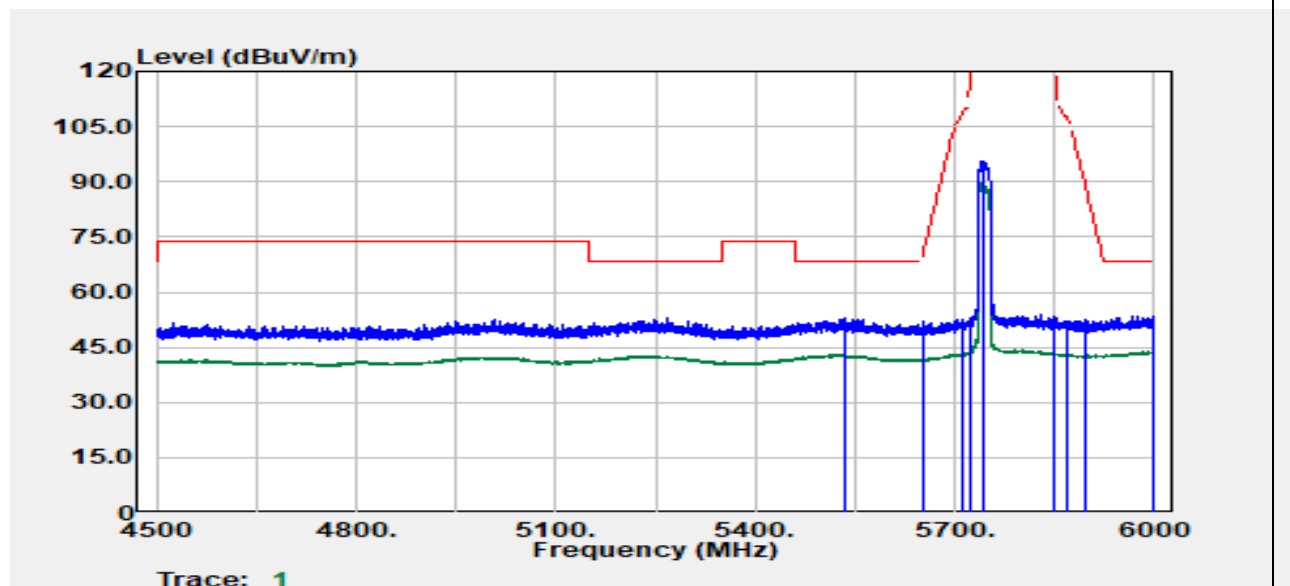


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5536.50	Peak	40.10	12.82	52.92	68.20	-15.28
5654.10	Peak	38.97	13.30	52.27	71.25	-18.98
5711.40	Peak	38.89	13.62	52.51	108.39	-55.89
5724.60	Peak	38.64	13.69	52.33	121.29	-68.96
5745.00	Peak	81.79	13.79	95.59	--	--
5745.00	Average	75.65	13.79	89.44	--	--
5851.20	Peak	39.31	14.02	53.33	119.46	-66.13
5868.90	Peak	38.13	14.02	52.15	106.91	-54.75
5895.00	Peak	38.29	14.03	52.32	90.36	-38.04
5999.40	Peak	39.42	14.15	53.58	68.20	-14.62

Test Mode	Mode 2 IEEE 802.11a / 5745 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

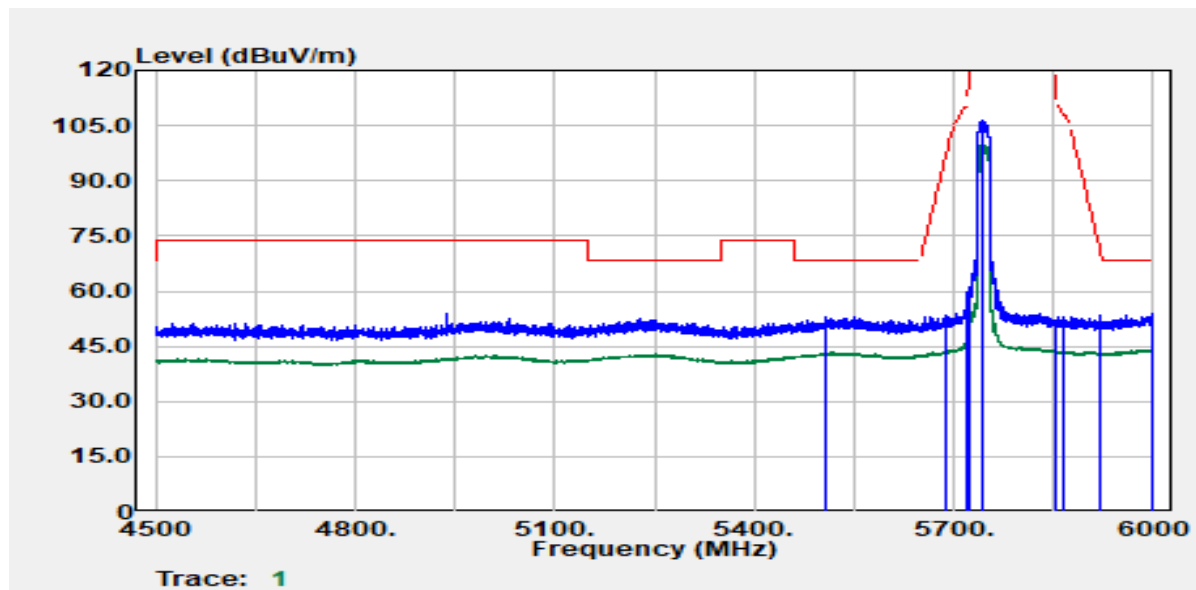


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5507.70	Peak	40.57	12.61	53.18	68.20	-15.02
5689.50	Peak	39.92	13.50	53.42	97.46	-44.04
5718.90	Peak	42.57	13.66	56.22	110.49	-54.27
5724.30	Peak	47.51	13.69	61.19	120.60	-59.41
5745.00	Peak	92.56	13.79	106.36	--	--
5745.00	Average	85.96	13.79	99.76	--	--
5853.90	Peak	37.98	14.02	52.00	113.31	-61.31
5865.90	Peak	38.87	14.02	52.89	107.75	-54.86
5921.70	Peak	39.16	14.09	53.24	70.63	-17.39
5999.40	Peak	39.90	14.15	54.05	68.20	-14.15

Test Mode	Mode 2 IEEE 802.11a / 5825 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

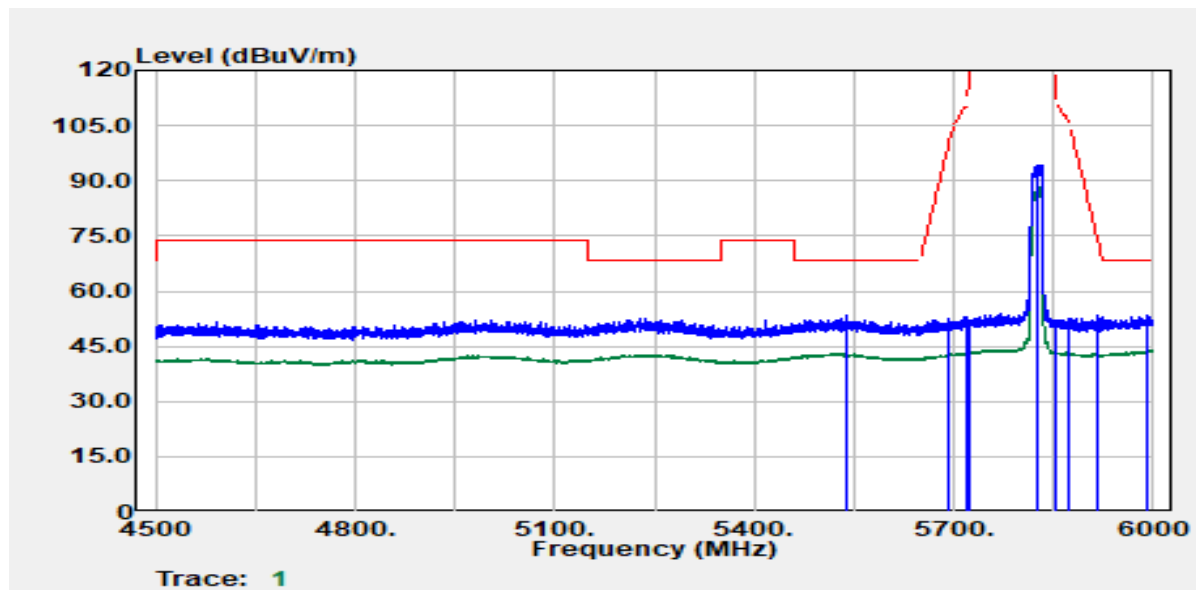


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5539.50	Peak	40.42	12.84	53.26	68.20	-14.94
5694.00	Peak	39.15	13.53	52.67	100.78	-48.10
5719.50	Peak	39.34	13.66	53.00	110.66	-57.66
5724.00	Peak	38.61	13.68	52.30	119.92	-67.62
5825.00	Peak	80.29	14.09	94.38	--	--
5825.00	Average	74.04	14.09	88.13	--	--
5851.80	Peak	38.03	14.02	52.06	118.09	-66.04
5871.00	Peak	38.54	14.02	52.57	106.32	-53.75
5917.80	Peak	39.51	14.08	53.58	73.51	-19.93
5990.70	Peak	39.50	14.15	53.65	68.20	-14.55

Test Mode	Mode 2 IEEE 802.11a / 5825 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

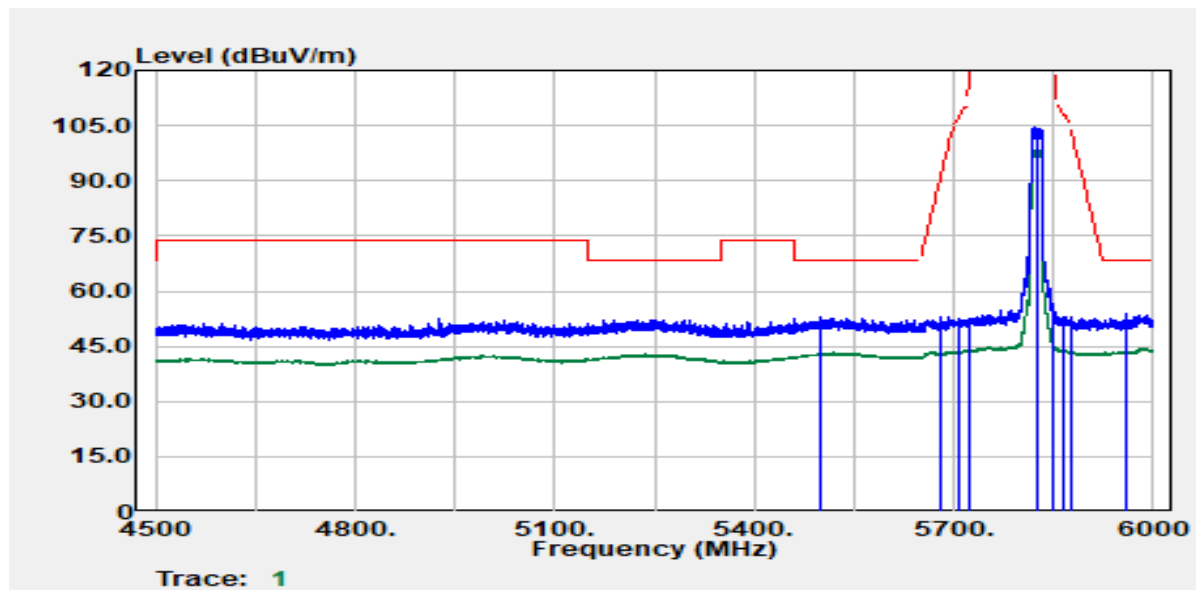


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5498.70	Peak	40.31	12.55	52.85	68.20	-15.35
5678.40	Peak	39.68	13.44	53.12	89.26	-36.14
5708.40	Peak	38.81	13.60	52.41	107.55	-55.14
5724.90	Peak	38.77	13.69	52.46	121.97	-69.51
5825.00	Peak	90.63	14.09	104.72	--	--
5825.00	Average	84.55	14.09	98.64	--	--
5850.60	Peak	38.93	14.02	52.95	120.83	-67.88
5864.10	Peak	39.14	14.02	53.17	108.25	-55.08
5875.20	Peak	39.13	14.03	53.16	105.05	-51.90
5957.70	Peak	39.75	14.16	53.91	68.20	-14.29

Test Mode	Mode 2 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

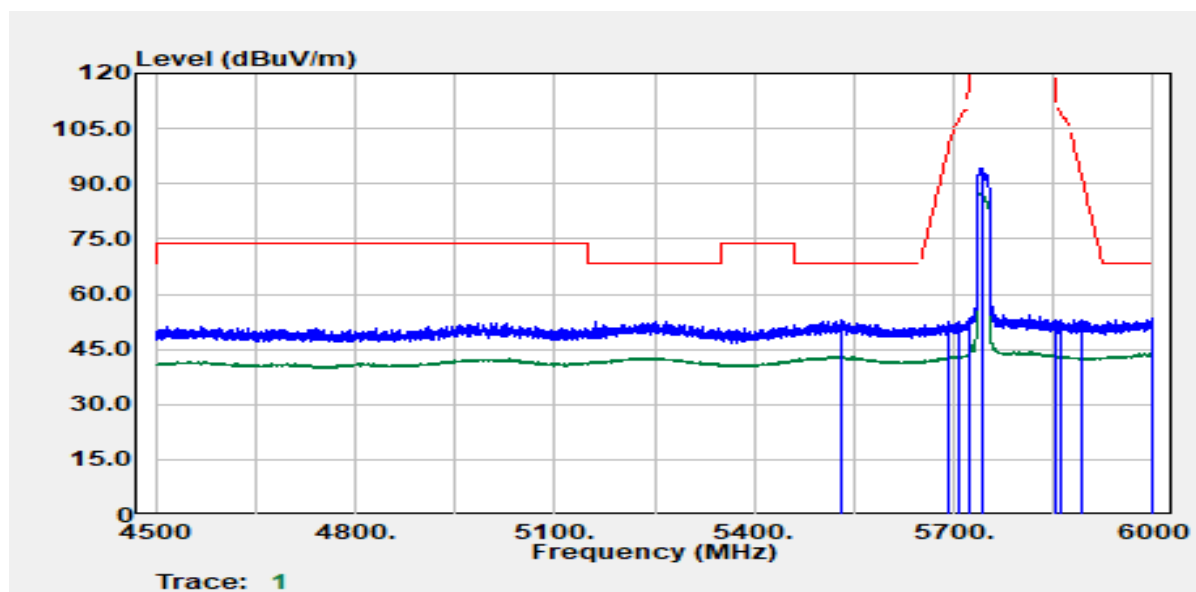


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5532.00	Peak	40.06	12.78	52.85	68.20	-15.35
5691.60	Peak	38.94	13.51	52.45	99.01	-46.56
5706.00	Peak	39.01	13.59	52.60	106.88	-54.28
5724.00	Peak	39.61	13.68	53.30	119.92	-66.62
5745.00	Peak	80.52	13.79	94.32	--	--
5745.00	Average	73.79	13.79	87.58	--	--
5853.90	Peak	38.99	14.02	53.01	113.31	-60.30
5859.60	Peak	38.95	14.02	52.97	109.51	-56.54
5893.80	Peak	38.94	14.03	52.97	91.25	-38.28
5997.90	Peak	39.30	14.15	53.45	68.20	-14.75

Test Mode	Mode 2 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

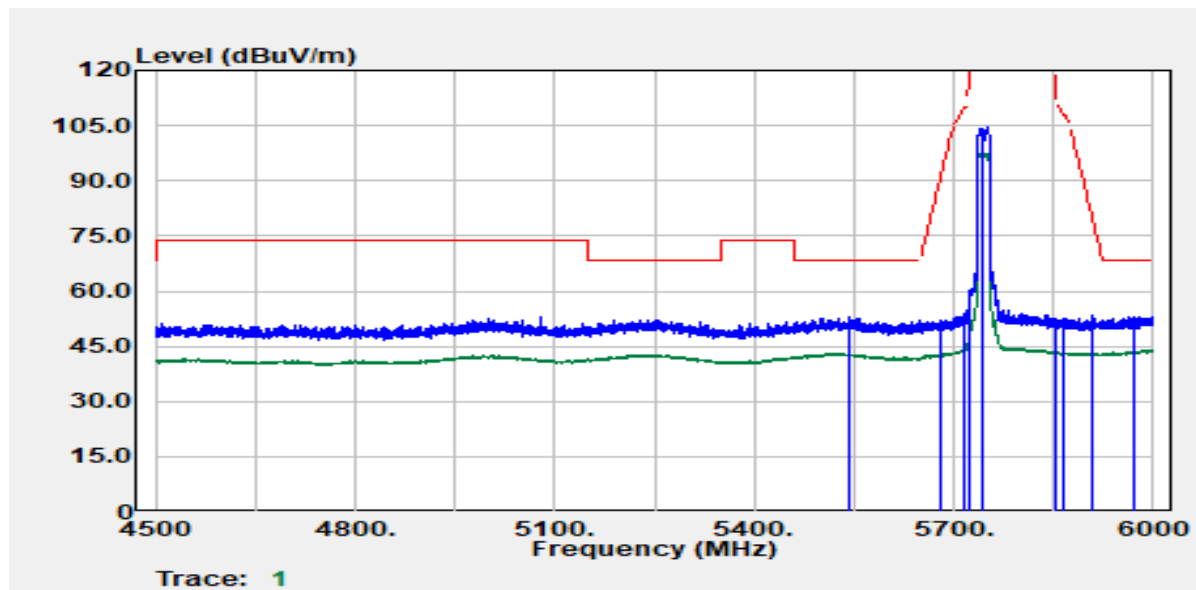


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5543.40	Peak	40.05	12.87	52.92	68.20	-15.28
5681.40	Peak	38.55	13.46	52.01	91.47	-39.46
5715.90	Peak	40.10	13.64	53.74	109.65	-55.92
5723.70	Peak	46.40	13.68	60.08	119.24	-59.16
5745.00	Peak	90.62	13.79	104.41	--	--
5745.00	Average	83.66	13.79	97.45	--	--
5853.00	Peak	38.32	14.02	52.34	115.36	-63.02
5865.00	Peak	38.62	14.02	52.64	108.00	-55.36
5908.80	Peak	39.28	14.05	53.34	80.15	-26.82
5970.90	Peak	39.03	14.16	53.19	68.20	-15.01

Test Mode	Mode 2 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

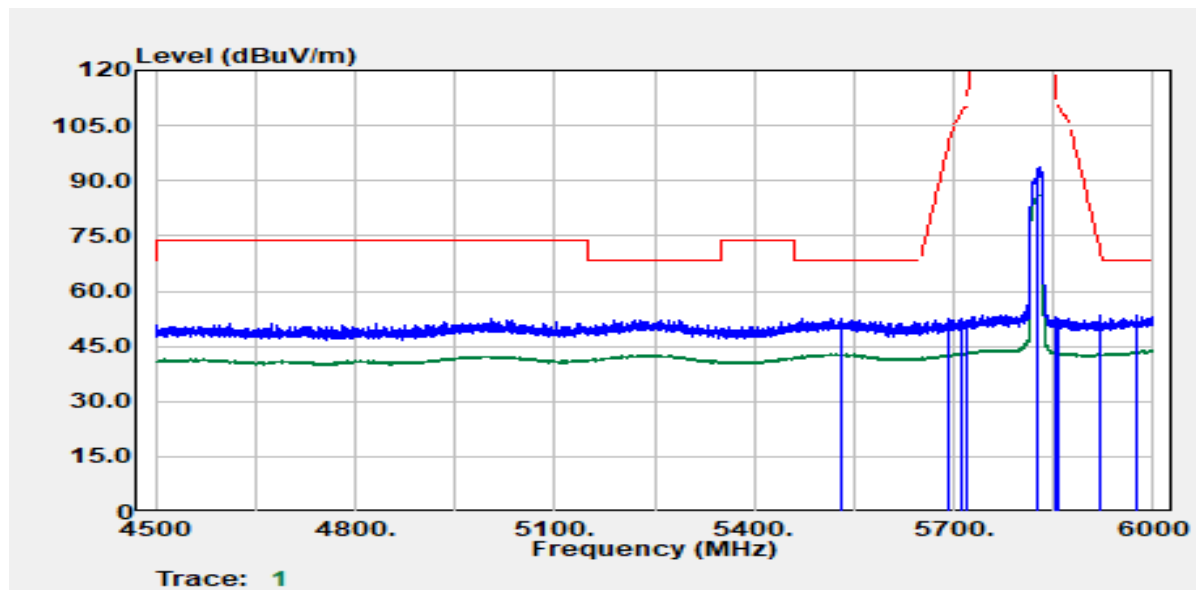


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5529.60	Peak	39.89	12.77	52.65	68.20	-15.55
5691.90	Peak	38.89	13.51	52.40	99.23	-46.83
5710.20	Peak	38.82	13.61	52.43	108.06	-55.63
5721.00	Peak	38.43	13.67	52.10	113.08	-60.98
5825.00	Peak	79.44	14.09	93.53	--	--
5825.00	Average	72.07	14.09	86.16	--	--
5852.40	Peak	38.81	14.02	52.83	116.73	-63.90
5858.70	Peak	38.66	14.02	52.68	109.76	-57.08
5919.90	Peak	39.30	14.08	53.39	71.96	-18.57
5974.80	Peak	39.10	14.16	53.25	68.20	-14.95

Test Mode	Mode 2 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

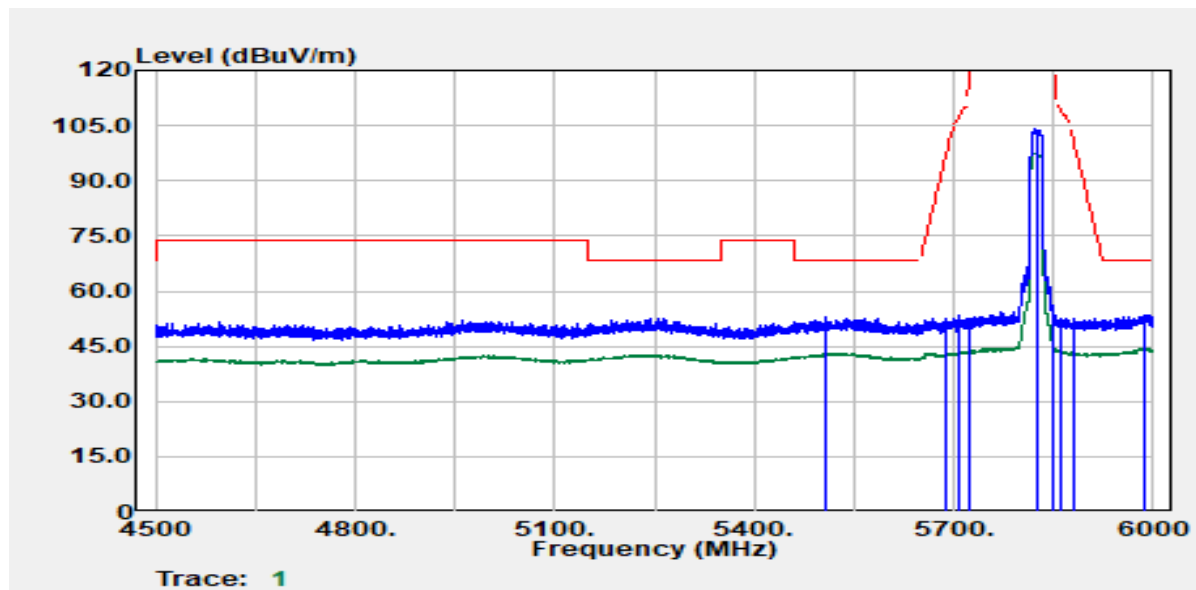


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5506.20	Peak	40.32	12.60	52.91	68.20	-15.29
5686.20	Peak	39.11	13.48	52.59	95.02	-42.43
5709.00	Peak	39.77	13.61	53.38	107.72	-54.34
5723.10	Peak	38.15	13.68	51.83	117.87	-66.03
5825.00	Peak	89.87	14.09	103.96	--	--
5825.00	Average	83.26	14.09	97.35	--	--
5850.30	Peak	39.24	14.02	53.26	121.52	-68.25
5859.30	Peak	38.54	14.02	52.56	109.59	-57.03
5880.60	Peak	38.67	14.03	52.69	101.04	-48.35
5985.30	Peak	39.45	14.15	53.61	68.20	-14.59

Test Mode	Mode 2 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

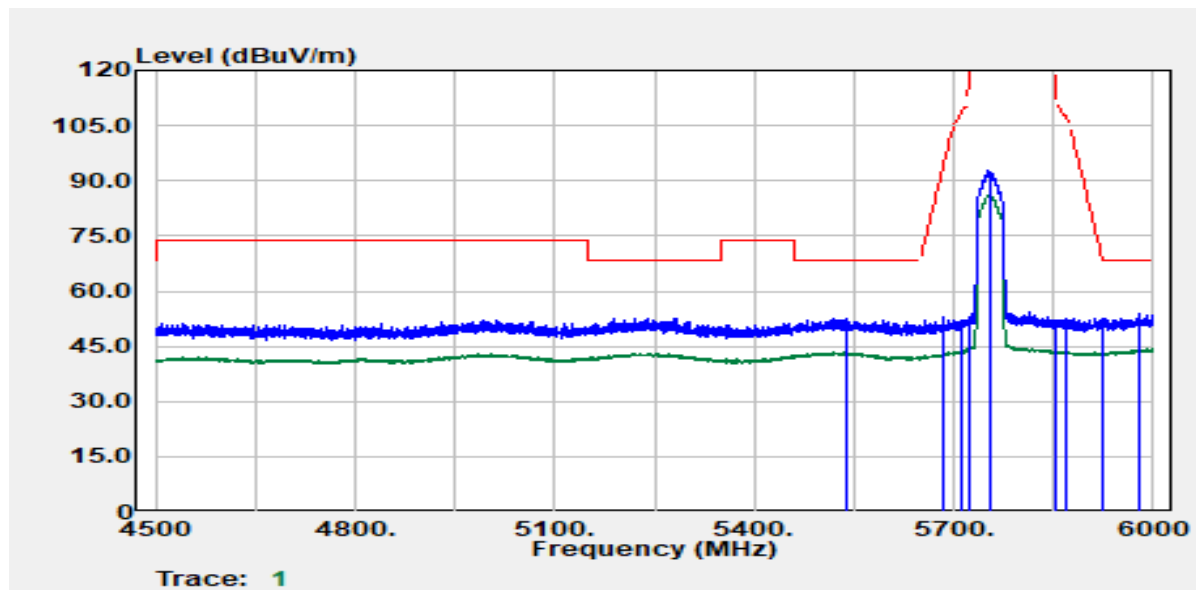


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5537.10	Peak	39.85	12.82	52.67	68.20	-15.53
5682.60	Peak	39.66	13.46	53.12	92.36	-39.24
5712.60	Peak	38.62	13.63	52.25	108.73	-56.48
5721.60	Peak	39.48	13.67	53.15	114.45	-61.30
5755.00	Peak	78.91	13.85	92.76	--	--
5755.00	Average	72.29	13.85	86.14	--	--
5853.30	Peak	38.03	14.02	52.05	114.67	-62.62
5868.00	Peak	38.56	14.02	52.59	107.16	-54.57
5922.90	Peak	38.62	14.09	52.70	69.75	-17.04
5979.60	Peak	39.51	14.15	53.66	68.20	-14.54

Test Mode	Mode 2 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

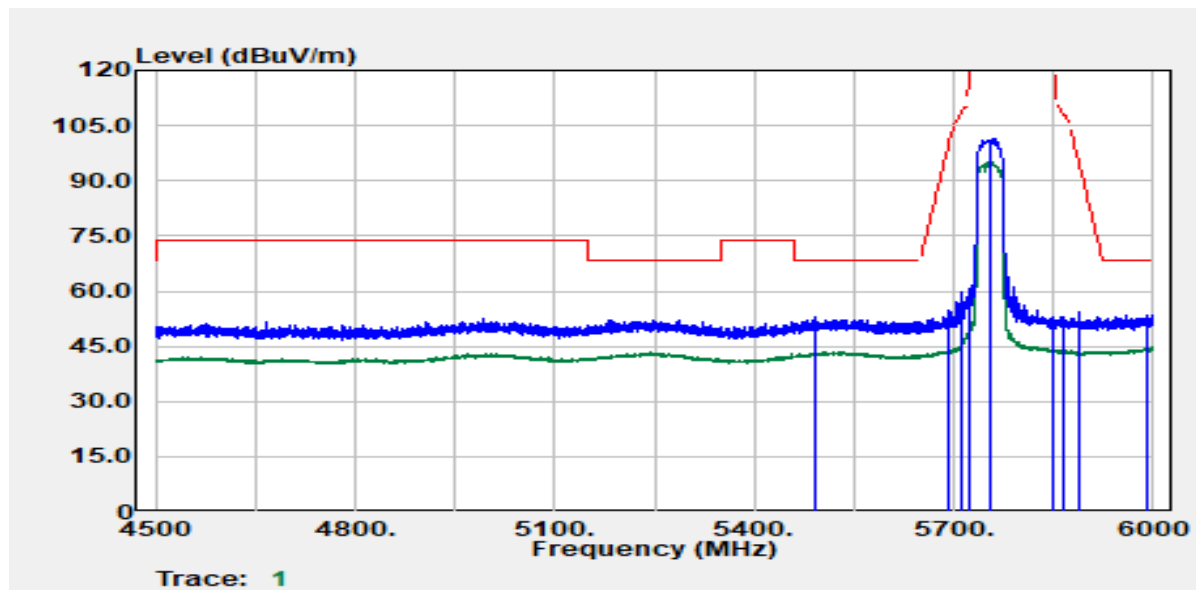


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5491.20	Peak	40.34	12.52	52.85	68.20	-15.35
5691.90	Peak	41.18	13.51	54.69	99.23	-44.54
5713.50	Peak	46.26	13.63	59.89	108.98	-49.09
5724.60	Peak	46.78	13.69	60.46	121.29	-60.82
5755.00	Peak	87.63	13.85	101.49	--	--
5755.00	Average	81.17	13.85	95.02	--	--
5850.90	Peak	38.99	14.02	53.01	120.15	-67.14
5864.40	Peak	38.94	14.02	52.96	108.17	-55.20
5887.80	Peak	40.21	14.03	54.24	95.70	-41.46
5989.50	Peak	39.31	14.15	53.46	68.20	-14.74

Test Mode	Mode 2 IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

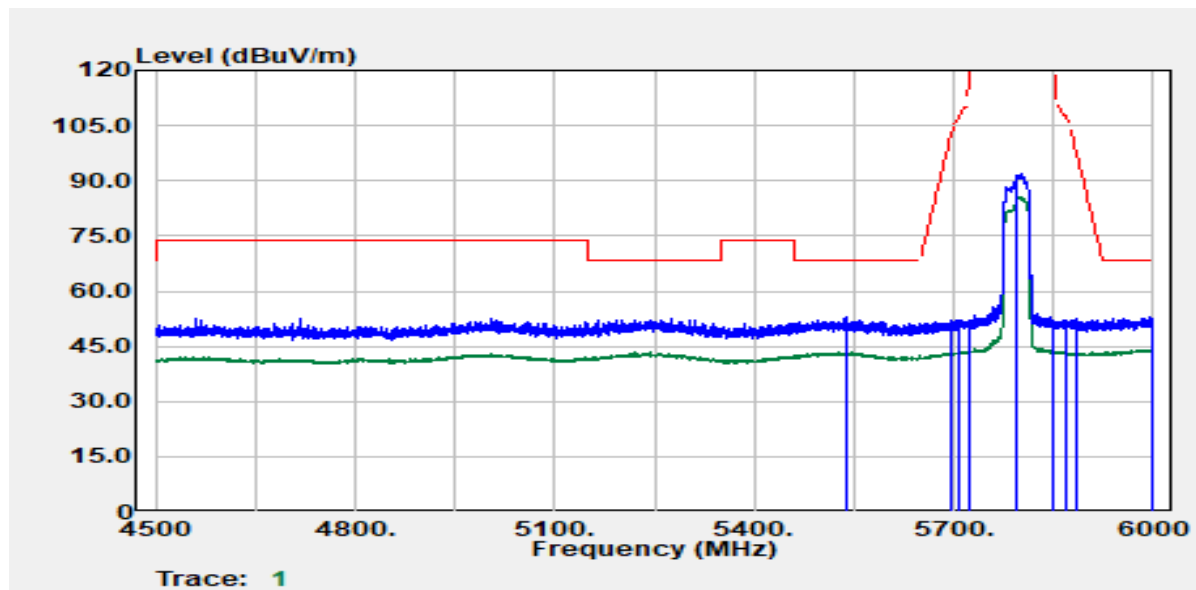


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5537.70	Peak	39.97	12.83	52.80	68.20	-15.40
5694.60	Peak	38.47	13.53	52.00	101.22	-49.22
5707.80	Peak	38.55	13.60	52.15	107.39	-55.23
5722.80	Peak	38.46	13.68	52.14	117.19	-65.05
5795.00	Peak	77.96	14.13	92.09	--	--
5795.00	Average	71.42	14.13	85.55	--	--
5850.30	Peak	38.08	14.02	52.10	121.52	-69.41
5868.00	Peak	38.05	14.02	52.07	107.16	-55.08
5882.70	Peak	38.47	14.03	52.50	99.48	-46.98
6000.00	Peak	38.92	14.15	53.07	68.20	-15.13

Test Mode	Mode 2 IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

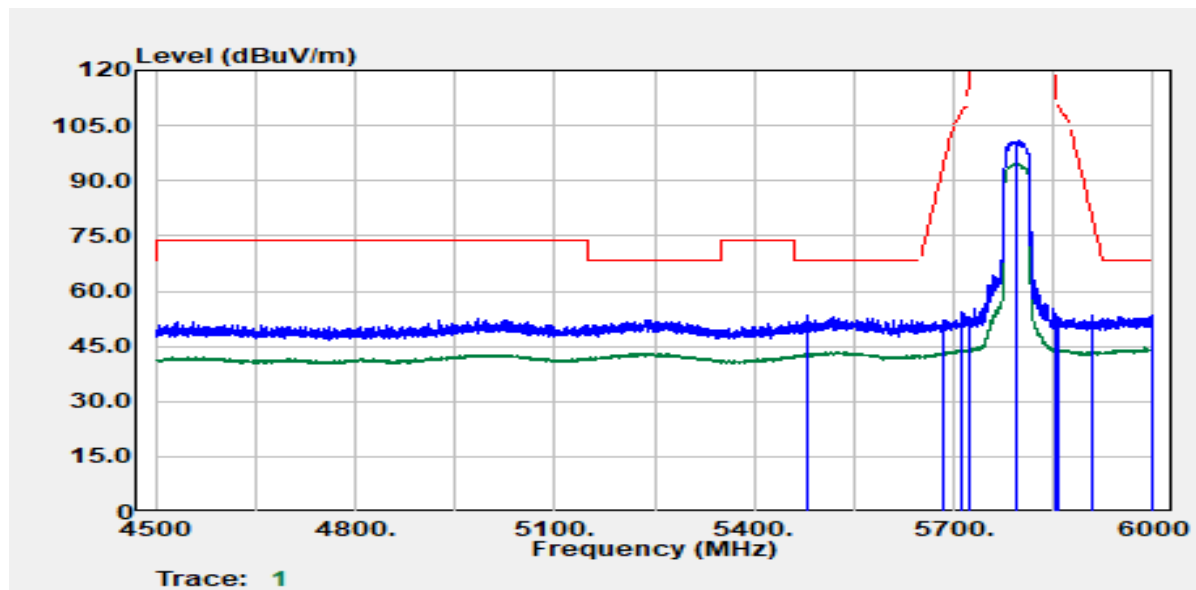


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5481.60	Peak	40.97	12.49	53.46	68.20	-14.74
5684.40	Peak	38.66	13.47	52.13	93.69	-41.56
5713.50	Peak	40.64	13.63	54.27	108.98	-54.72
5724.30	Peak	39.43	13.69	53.11	120.60	-67.49
5795.00	Peak	86.90	14.13	101.03	--	--
5795.00	Average	80.57	14.13	94.69	--	--
5852.40	Peak	39.08	14.02	53.10	116.73	-63.63
5859.00	Peak	38.83	14.02	52.85	109.68	-56.83
5910.00	Peak	39.57	14.06	53.62	79.27	-25.64
5998.50	Peak	39.39	14.15	53.54	68.20	-14.66

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

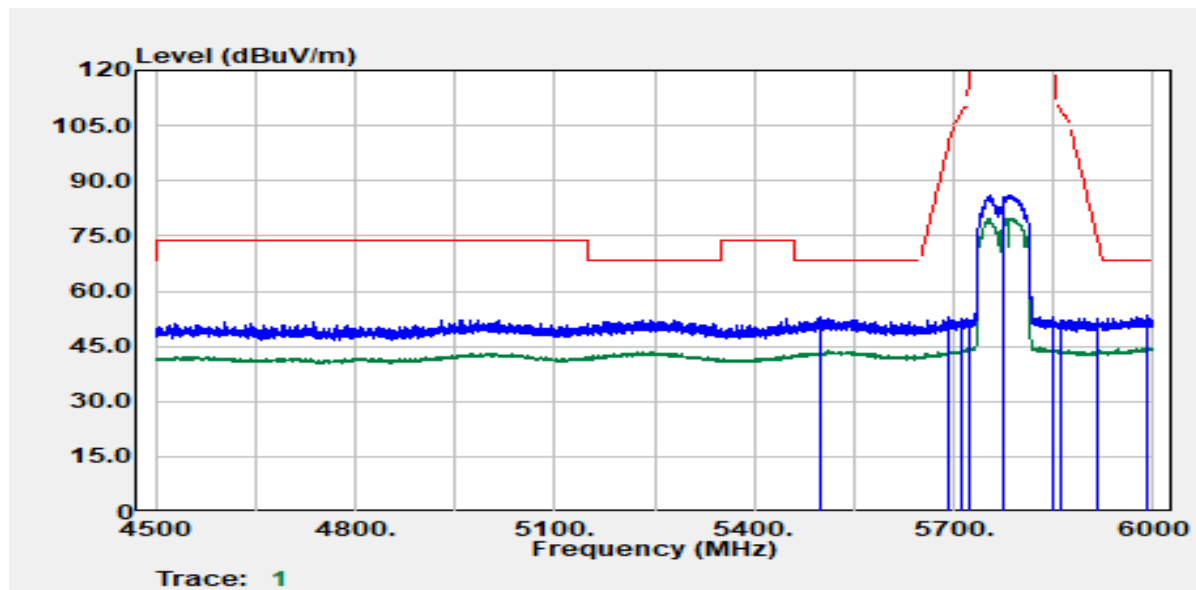

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5500.50	Peak	40.61	12.55	53.16	68.20	-15.04
5694.00	Peak	39.37	13.53	52.90	100.78	-47.88
5712.90	Peak	39.11	13.63	52.74	108.81	-56.07
5721.90	Peak	38.35	13.67	52.02	115.13	-63.11
5775.00	Peak	72.13	13.99	86.12	--	--
5775.00	Average	65.76	13.99	79.75	--	--
5850.90	Peak	38.87	14.02	52.89	120.15	-67.26
5860.80	Peak	38.22	14.02	52.24	109.17	-56.93
5917.50	Peak	38.49	14.08	52.57	73.73	-21.16
5991.90	Peak	39.37	14.15	53.53	68.20	-14.67


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.6(°C)/ 59%RH
Test Item	Band Edge	Test Date	June 15, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

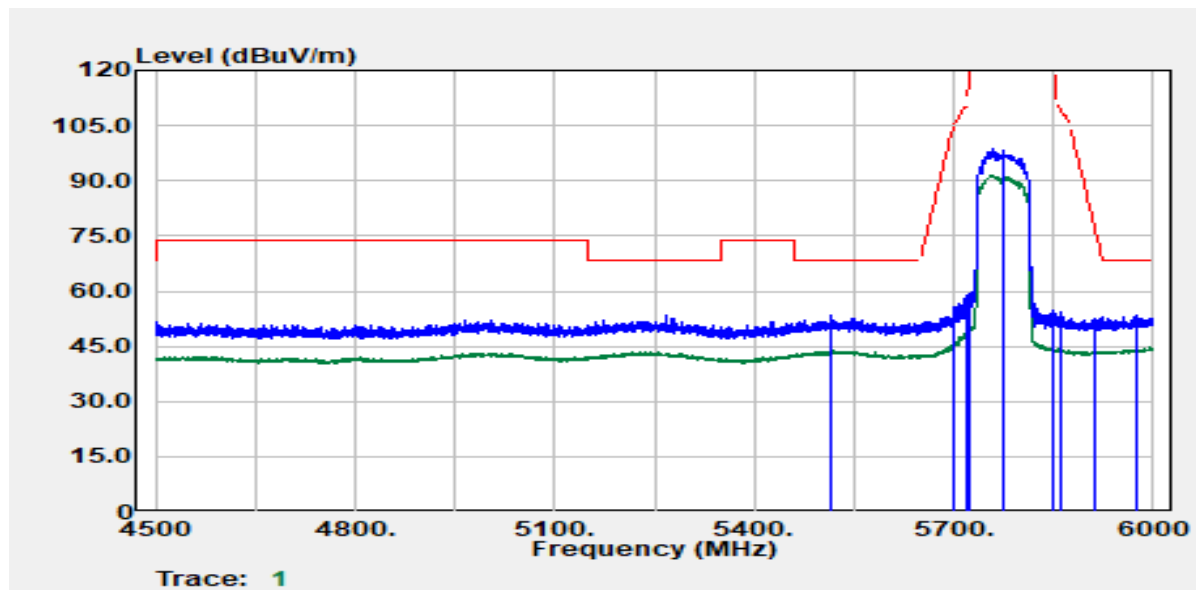

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5516.40	Peak	40.91	12.67	53.58	68.20	-14.62
5700.00	Peak	42.02	13.56	55.58	105.20	-49.62
5717.70	Peak	45.26	13.65	58.91	110.16	-51.24
5724.90	Peak	45.42	13.69	59.11	121.97	-62.86
5775.00	Peak	84.72	13.99	98.71	--	--
5775.00	Average	77.53	13.99	91.52	--	--
5850.60	Peak	39.19	14.02	53.21	120.83	-67.62
5861.40	Peak	40.42	14.02	54.44	109.01	-54.57
5913.90	Peak	38.58	14.07	52.65	76.39	-23.74
5973.30	Peak	39.49	14.16	53.64	68.20	-14.56

Below 1G Test Data:


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

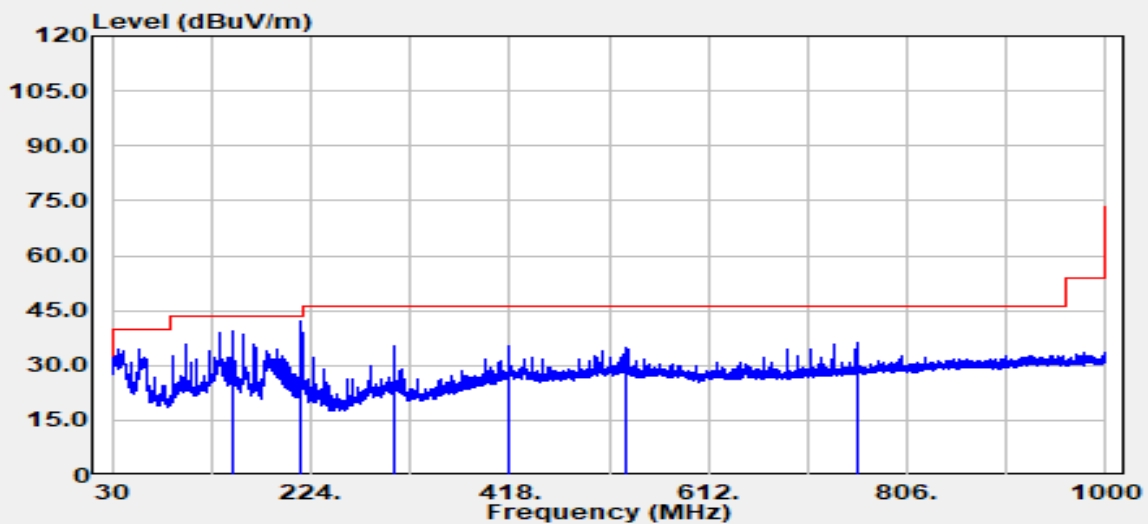

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
146.76	Peak	49.83	-10.22	39.61	43.50	-3.89
214.54	Peak	53.91	-11.88	42.03	43.50	-1.47
304.87	Peak	43.98	-8.43	35.54	46.00	-10.46
417.76	Peak	40.66	-5.19	35.47	46.00	-10.53
532.46	Peak	38.11	-3.03	35.08	46.00	-10.92
756.41	Peak	35.68	0.76	36.44	46.00	-9.56

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

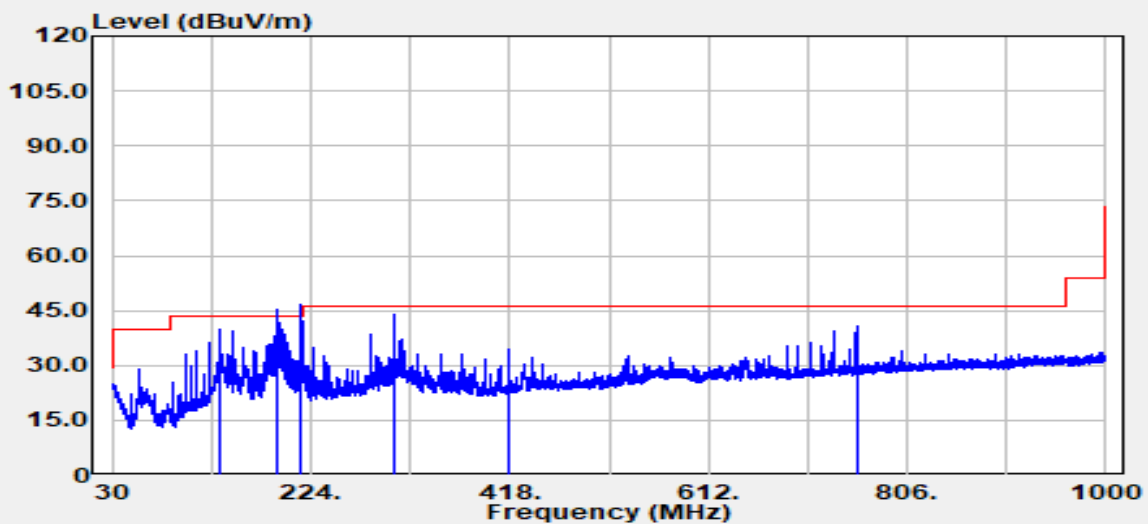

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
135.49	Peak	49.44	-9.74	39.70	43.50	-3.80
191.87	QP	50.16	-11.10	39.07	43.50	-4.43
214.54	QP	54.65	-11.88	42.77	43.50	-0.73
304.87	Peak	52.28	-8.43	43.85	46.00	-2.15
417.76	Peak	39.72	-5.19	34.52	46.00	-11.48
756.41	Peak	40.06	0.76	40.83	46.00	-5.17

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

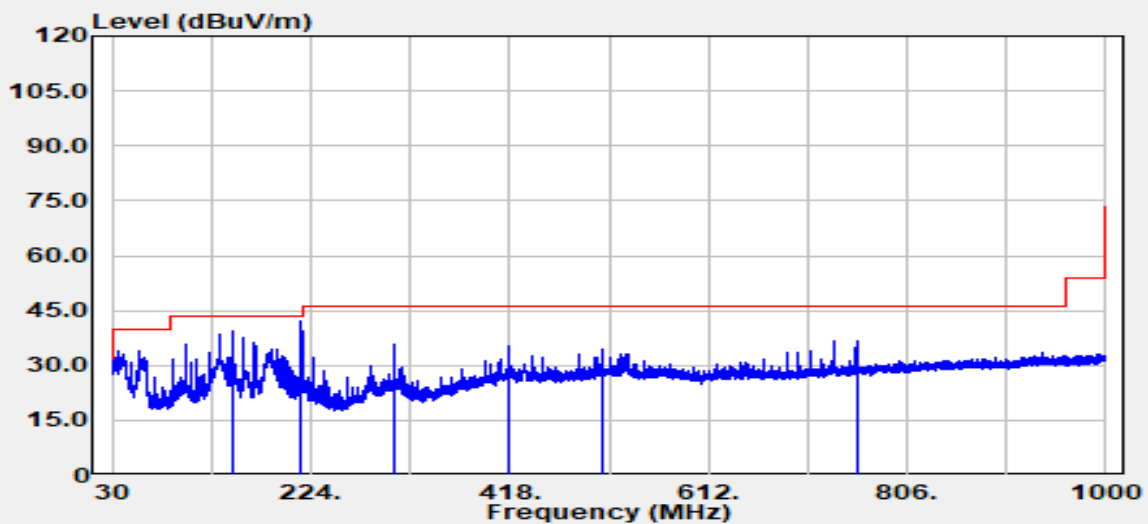

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
146.76	Peak	49.72	-10.22	39.50	43.50	-4.00
214.54	Peak	54.07	-11.88	42.18	43.50	-1.32
304.87	Peak	44.33	-8.43	35.90	46.00	-10.10
417.76	Peak	40.73	-5.19	35.54	46.00	-10.46
508.09	Peak	37.71	-3.51	34.20	46.00	-11.80
756.53	Peak	36.08	0.77	36.85	46.00	-9.15

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

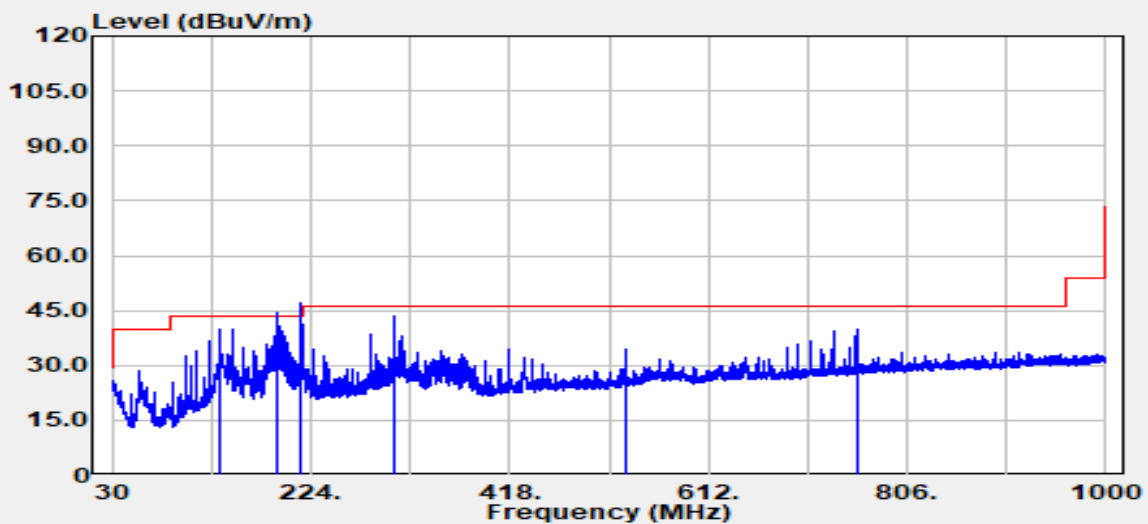

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
135.49	Peak	49.58	-9.74	39.84	43.50	-3.66
191.99	QP	49.65	-11.08	38.57	43.50	-4.93
214.54	QP	54.89	-11.88	43.01	43.50	-0.49
304.87	Peak	52.10	-8.43	43.67	46.00	-2.33
531.37	Peak	37.29	-3.04	34.25	46.00	-11.75
756.41	Peak	39.04	0.76	39.80	46.00	-6.20

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

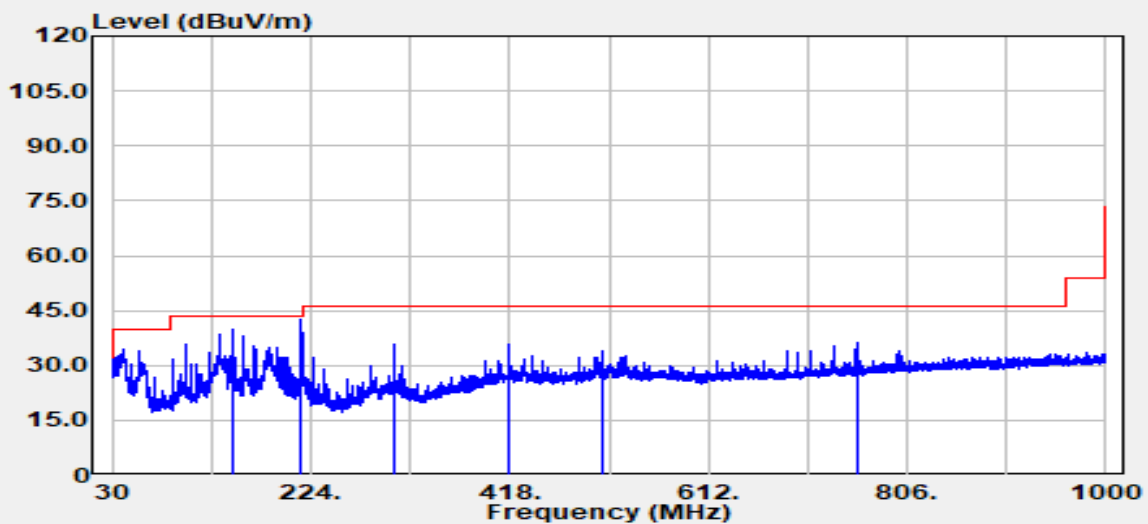

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
146.76	Peak	50.15	-10.22	39.93	43.50	-3.57
214.54	Peak	54.23	-11.88	42.35	43.50	-1.15
304.87	Peak	44.19	-8.43	35.75	46.00	-10.25
417.76	Peak	41.07	-5.19	35.88	46.00	-10.12
508.09	Peak	37.32	-3.51	33.81	46.00	-12.19
756.41	Peak	35.53	0.76	36.29	46.00	-9.71

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

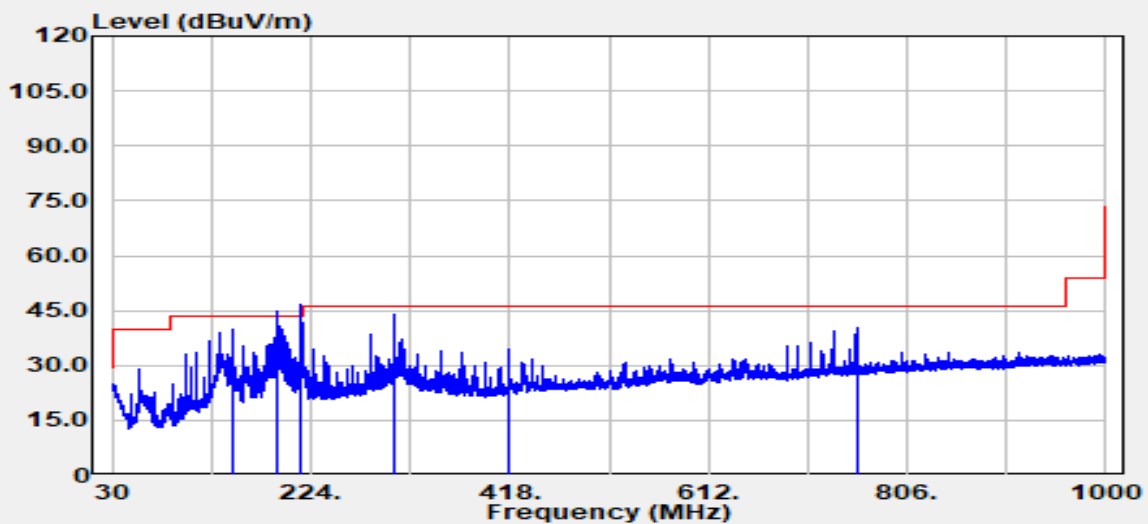

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBμV/m)	Margin (dB)
146.76	Peak	50.22	-10.22	40.00	43.50	-3.50
191.87	QP	50.11	-11.10	39.01	43.50	-4.49
214.54	QP	54.49	-11.88	42.61	43.50	-0.89
304.87	Peak	52.35	-8.43	43.91	46.00	-2.09
417.76	Peak	39.69	-5.19	34.50	46.00	-11.50
756.41	Peak	39.41	0.76	40.17	46.00	-5.83

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5745 MHz	Temp/Hum	24.4(°C) / 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

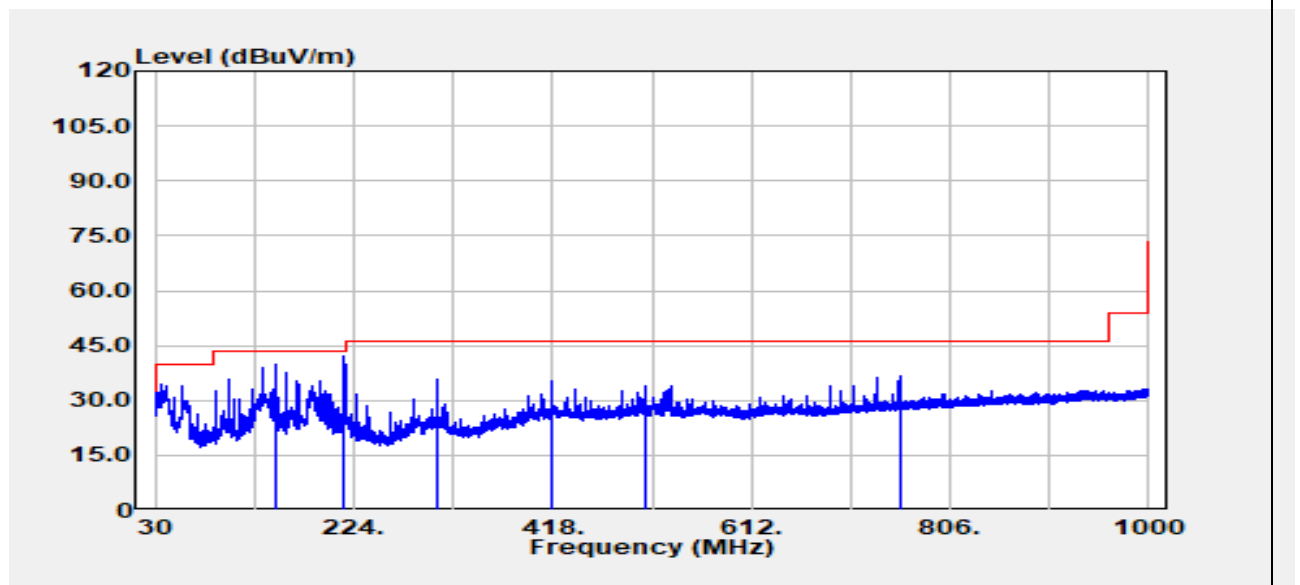

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
146.76	Peak	49.97	-10.22	39.75	43.50	-3.75
214.54	Peak	53.92	-11.88	42.03	43.50	-1.47
304.87	Peak	44.29	-8.43	35.85	46.00	-10.15
417.76	Peak	40.51	-5.19	35.32	46.00	-10.68
508.09	Peak	37.50	-3.51	33.99	46.00	-12.01
756.41	Peak	36.05	0.76	36.82	46.00	-9.18

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	Mode 1 IEEE 802.11ac VHT80 / 5745 MHz	Temp/Hum	24.4(°C)/ 57%RH
Test Item	30MHz-1GHz	Test Date	June 30, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

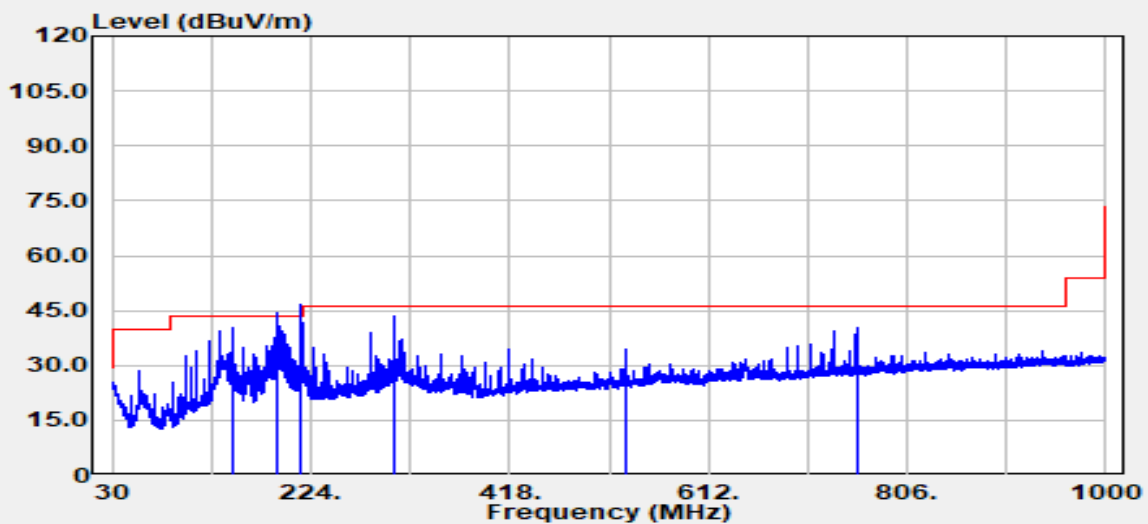

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
146.76	Peak	50.37	-10.22	40.15	43.50	-3.35
191.99	QP	50.30	-11.08	39.22	43.50	-4.28
214.54	QP	54.41	-11.88	42.52	43.50	-0.98
304.87	Peak	52.12	-8.43	43.69	46.00	-2.31
531.37	Peak	37.49	-3.04	34.45	46.00	-11.55
756.41	Peak	39.64	0.76	40.40	46.00	-5.60

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.