

TEST REPORT

Reference No. : WTS14S1221842E
FCC ID..... : 2AAWUTLS100
Applicant..... : AVC Technology (International) Limited
Address..... : 6/F Enterprise Square Three, 39 Wang Chiu Road, Kowloon Bay,Hong Kong.
Manufacturer : The same as above
Address : The same as above
Product Name : Lumen Strip – App Enabled LED Color Strip
Model No. : TLS100, TLS100-5L
Standards..... : FCC CFR47 Part 15 Section 15.247:2014
Date of Receipt sample..... : Dec.29,2014
Date of Test..... : Jan.02,2015 ~ Jan.20,2015
Date of Issue : Jan.23,2015
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	5
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	8
5.3 TEST EQUIPMENT CALIBRATION	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP	9
6.3 MEASUREMENT DESCRIPTION	9
6.4 CONDUCTED EMISSION TEST RESULT	10
7 RADIATED EMISSIONS	14
7.1 EUT OPERATION.....	14
7.2 TEST SETUP	15
7.3 SPECTRUM ANALYZER SETUP	16
7.4 TEST PROCEDURE	17
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.6 SUMMARY OF TEST RESULTS	18
8 BAND EDGE MEASUREMENT	21
8.1 TEST PROCEDURE	21
8.2 TEST RESULT	22
9 6 DB BANDWIDTH MEASUREMENT	23
9.1 TEST PROCEDURE:	23
9.2 TEST RESULT:	23
10 MAXIMUM PEAK OUTPUT POWER	26
10.1 TEST PROCEDURE:.....	26
10.2 TEST RESULT:	27
11 POWER SPECTRAL DENSITY	29
11.1 TEST PROCEDURE:.....	29
11.2 TEST RESULT:	29
12 ANTENNA REQUIREMENT	31
13 RF EXPOSURE	32
13.1 REQUIREMENTS.....	32
13.2 THE PROCEDURES / LIMIT	32
14 PHOTOGRAPHS –TEST SETUP	33
14.1 PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP	33
14.2 PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP	34
15 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	36

15.1	TLS100 & TLS100-5L EXTERNAL VIEW	36
15.2	TLS100 & TLS100-5L INTERNAL VIEW.....	42

4 General Information

4.1 General Description of E.U.T.

Product Name	: Lumen Strip – App Enabled LED Color Strip
Model No.	: TLS100, TLS100-5L
Model Description	: The length of LED strip and adapters are different, the RF modules are the same.
Operation Frequency	: 2402MHz ~ 2480MHz, separated by 2MHz,40 channels in total
The lowest oscillator	: 32MHz
Type of modulation	: GFSK(BLE only)

4.2 Details of E.U.T.

Technical Data	:For TLS100 : DC 12V 1.2A power by adapter (Input AC 100-240V 50/60Hz 0.4A)
	:For TLS100-5L : DC 12V 3.0A power by adapter (Input AC 100-240V 50/60Hz 1.0A)

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Table 1 Tests Carried Out Under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2440MHz	2480MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	669	Apr.19,2014	Apr.18,2015
7	Broadband Pre-amplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
8	Coaxial Cable (above 1GHz)	Top	1000MHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
9	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.15,2014	Sep.14,2015
10	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.11,2014	Apr.10,2015
11	Signal Generator	R&S	SMR20	100046	Sep.15,2014	Sep.14,2015
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Aug. 15,2014	Aug.14,2015
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Aug. 15,2014	Aug.14,2015
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Aug. 15,2014	Aug.14,2015

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode(BT BLE).

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

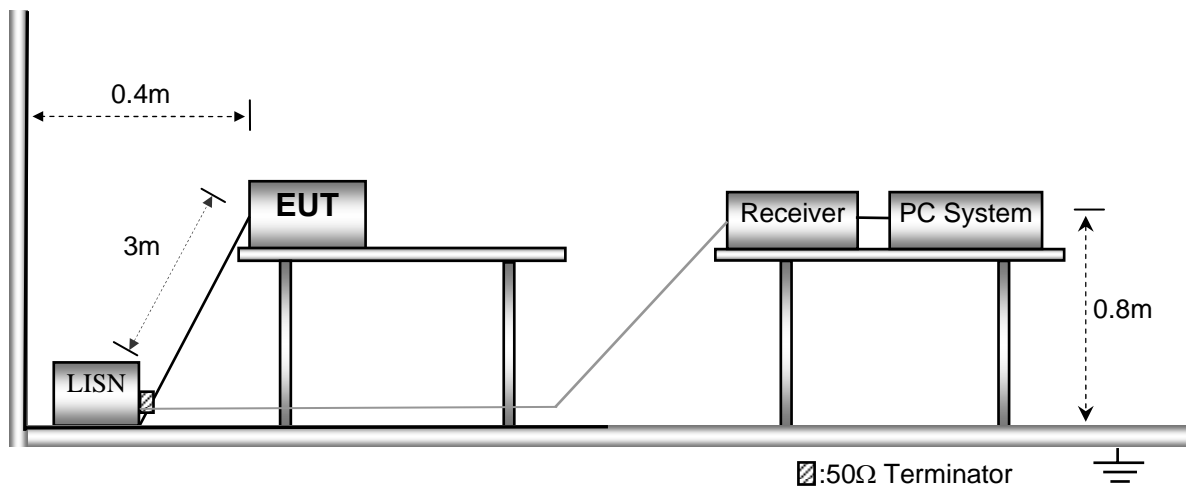

6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Model: TLS100-5L


Mode: BT Transmitting

Live Line:

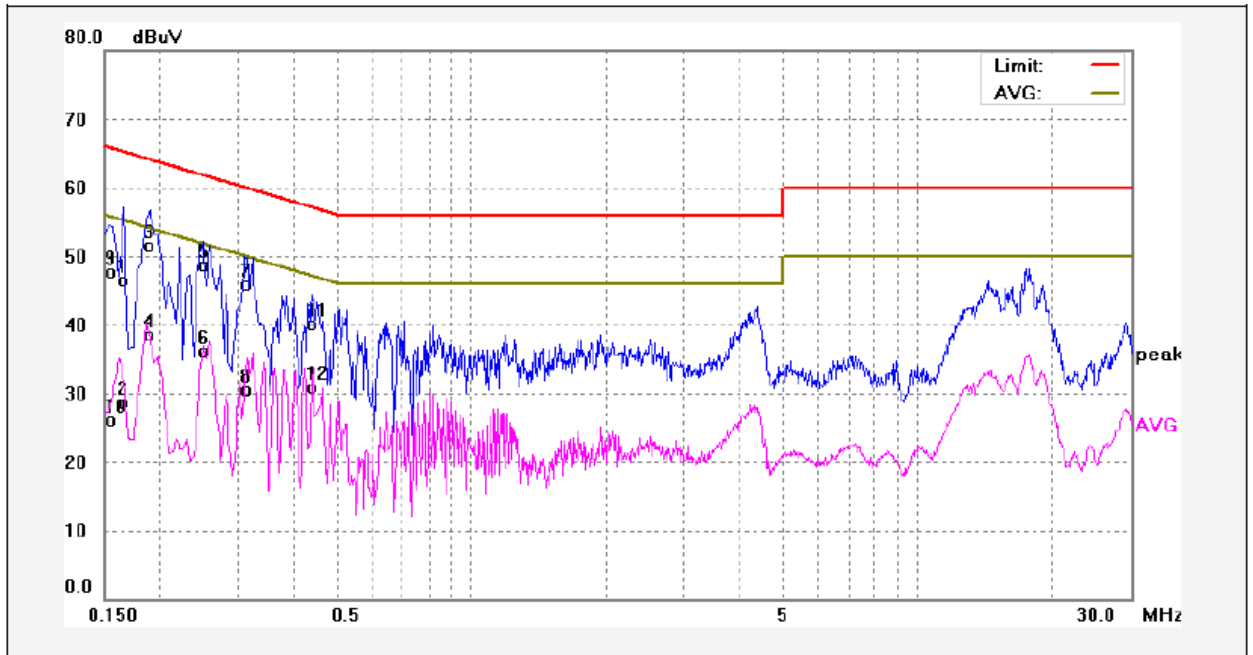


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	34.79	11.81	46.60	65.15	-18.55	QP	
2	0.1660	16.83	11.81	28.64	55.15	-26.51	AVG	
3	0.1900	39.61	11.83	51.44	64.03	-12.59	QP	
4	0.1900	26.72	11.83	38.55	54.03	-15.48	AVG	
5	0.2500	36.88	11.85	48.73	61.75	-13.02	QP	
6	0.2500	24.20	11.85	36.05	51.75	-15.70	AVG	
7	0.3100	33.94	11.87	45.81	59.97	-14.16	QP	
8	0.3100	18.62	11.87	30.49	49.97	-19.48	AVG	
9	0.1539	35.85	11.80	47.65	65.78	-18.13	QP	
10	0.1539	14.31	11.80	26.11	55.78	-29.67	AVG	
11	0.4380	28.18	11.91	40.09	57.10	-17.01	QP	
12	0.4380	19.01	11.91	30.92	47.10	-16.18	AVG	

Neutral Line:

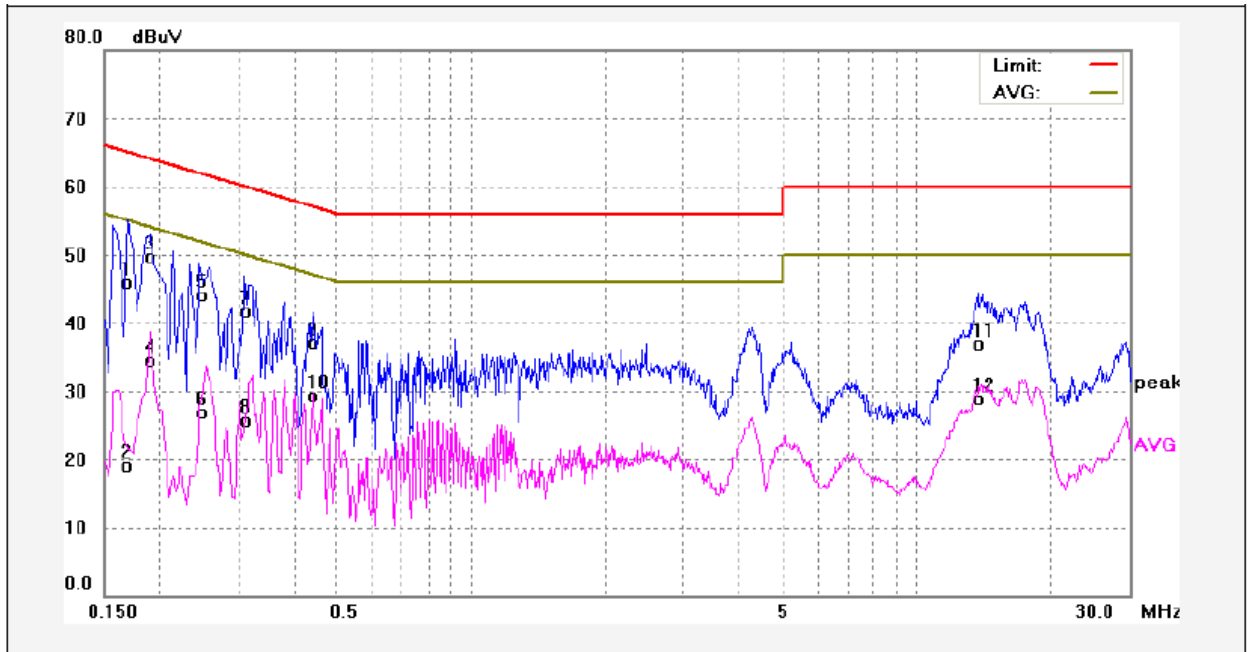


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	34.02	11.82	45.84	64.96	-19.12	QP	
2	0.1700	7.20	11.82	19.02	54.96	-35.94	AVG	
3	0.1900	37.79	11.83	49.62	64.03	-14.41	QP	
4	0.1900	22.68	11.83	34.51	54.03	-19.52	AVG	
5	0.2460	32.26	11.85	44.11	61.89	-17.78	QP	
6	0.2460	15.03	11.85	26.88	51.89	-25.01	AVG	
7	0.3100	29.93	11.87	41.80	59.97	-18.17	QP	
8	0.3100	13.81	11.87	25.68	49.97	-24.29	AVG	
9	0.4420	25.22	11.91	37.13	57.02	-19.89	QP	
10	0.4420	17.35	11.91	29.26	47.02	-17.76	AVG	
11	13.7540	23.10	13.80	36.90	60.00	-23.10	QP	
12	13.7540	15.03	13.80	28.83	50.00	-21.17	AVG	

Model: TLS100
 Mode: BT Transmitting
 Live Line:

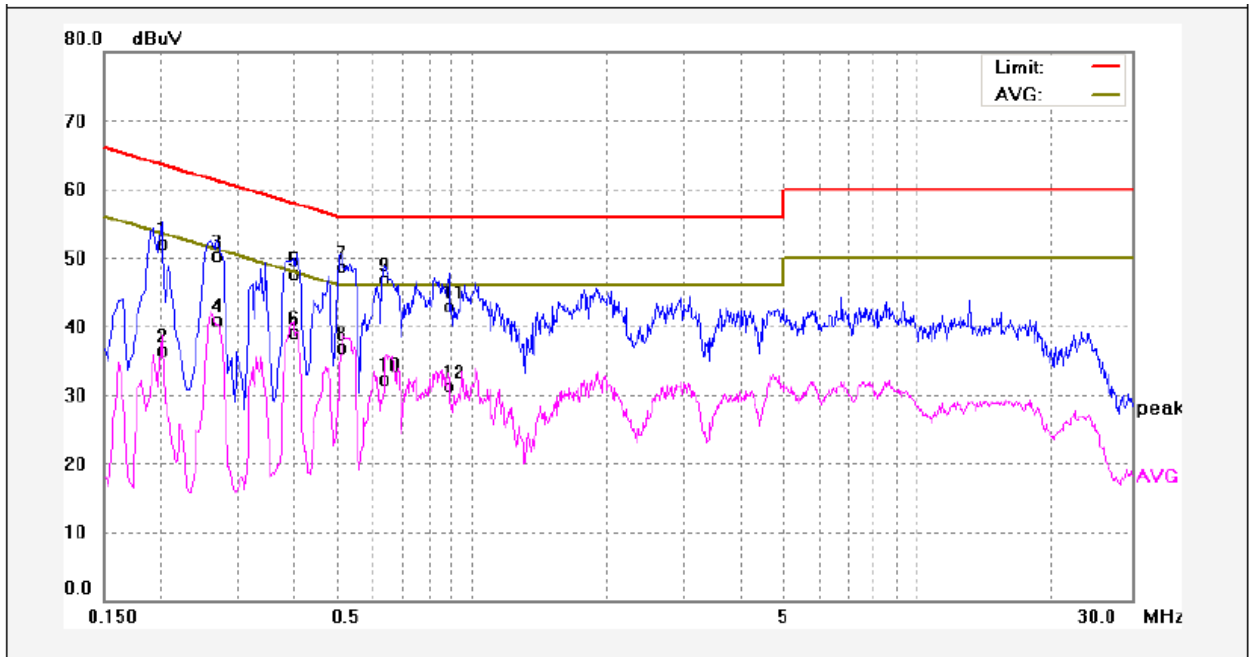

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.2020	40.31	11.84	52.15	63.52	-11.37	QP	
2	0.2020	24.73	11.84	36.57	53.52	-16.95	AVG	
3	0.2700	38.41	11.86	50.27	61.12	-10.85	QP	
4	0.2700	29.03	11.86	40.89	51.12	-10.23	AVG	
5	0.4060	35.90	11.90	47.80	57.73	-9.93	QP	
6	0.4060	27.28	11.90	39.18	47.73	-8.55	AVG	
7	0.5100	36.66	11.98	48.64	56.00	-7.36	QP	
8	0.5100	24.98	11.98	36.96	46.00	-9.04	AVG	
9	0.6340	34.20	12.61	46.81	56.00	-9.19	QP	
10	0.6340	19.76	12.61	32.37	46.00	-13.63	AVG	
11	0.8940	30.62	12.34	42.96	56.00	-13.04	QP	
12	0.8940	18.96	12.34	31.30	46.00	-14.70	AVG	

Neutral Line:

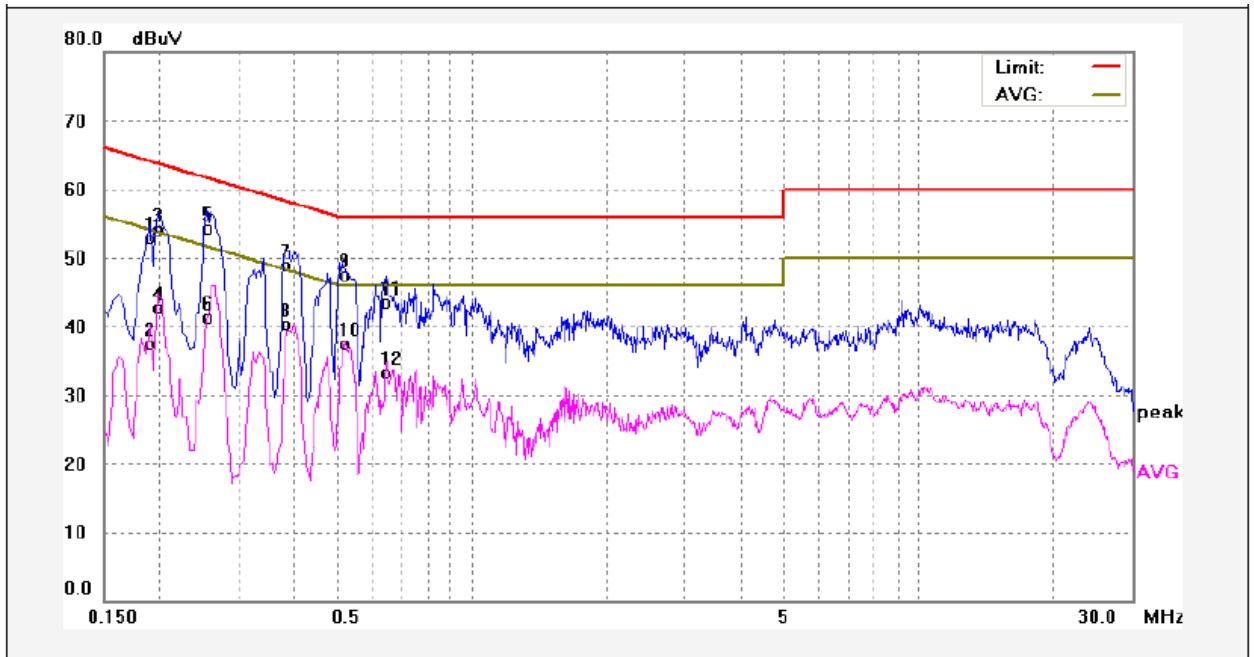

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1900	41.01	11.83	52.84	64.03	-11.19	QP	
2	0.1900	25.67	11.83	37.50	54.03	-16.53	AVG	
3	0.1980	42.27	11.84	54.11	63.69	-9.58	QP	
4	0.1980	30.79	11.84	42.63	53.69	-11.06	AVG	
5	0.2540	42.44	11.86	54.30	61.62	-7.32	QP	
6	0.2540	29.38	11.86	41.24	51.62	-10.38	AVG	
7	0.3899	37.00	11.90	48.90	58.06	-9.16	QP	
8	0.3899	28.33	11.90	40.23	48.06	-7.83	AVG	
9	0.5140	35.50	12.00	47.50	56.00	-8.50	QP	
10	0.5140	25.51	12.00	37.51	46.00	-8.49	AVG	
11	0.6419	30.94	12.65	43.59	56.00	-12.41	QP	
12	0.6419	20.63	12.65	33.28	46.00	-12.72	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

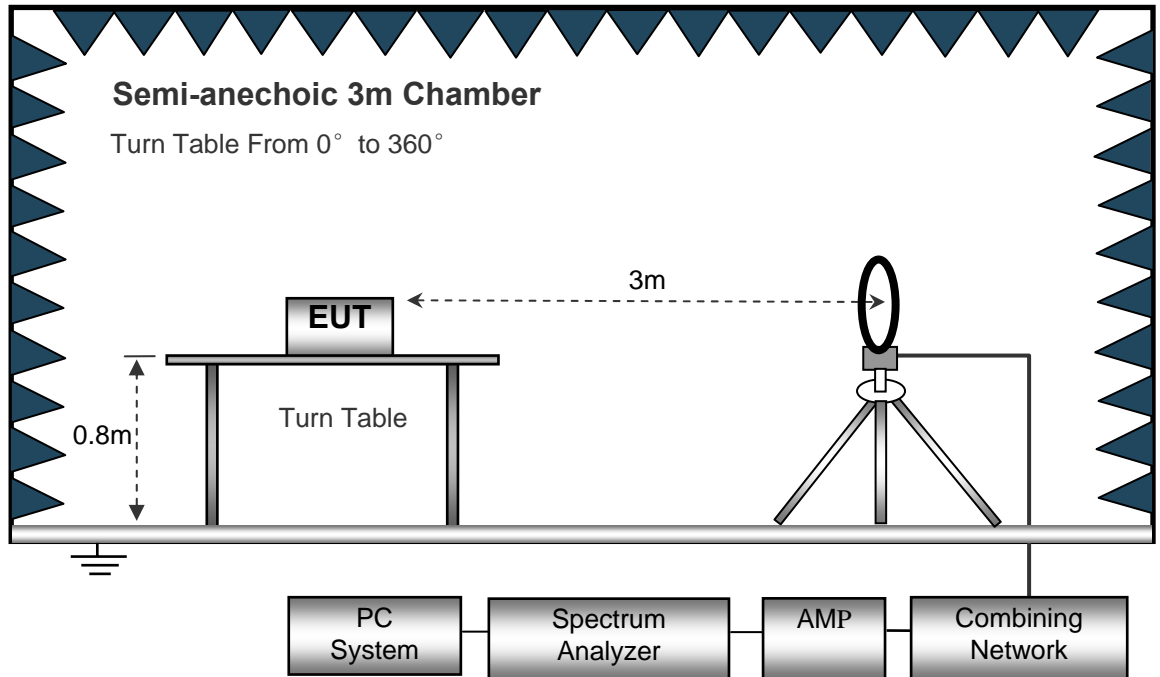

The test setup for emission measurement from 30 MHz to 1 GHz.

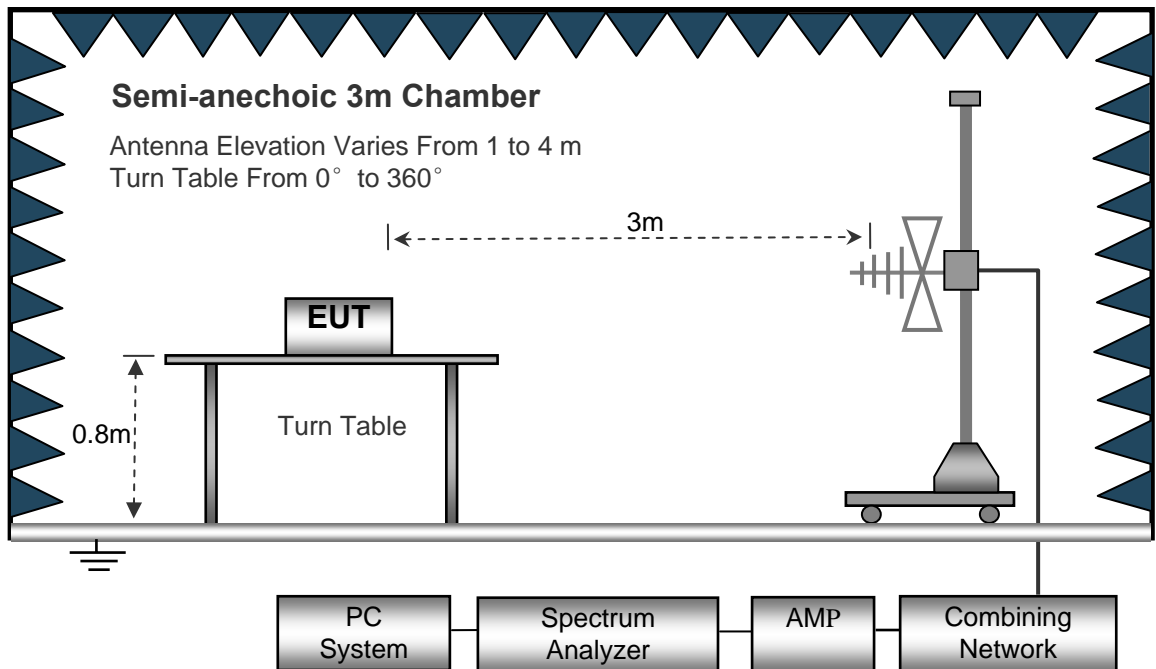

The test setup for emission measurement above 1 GHz.

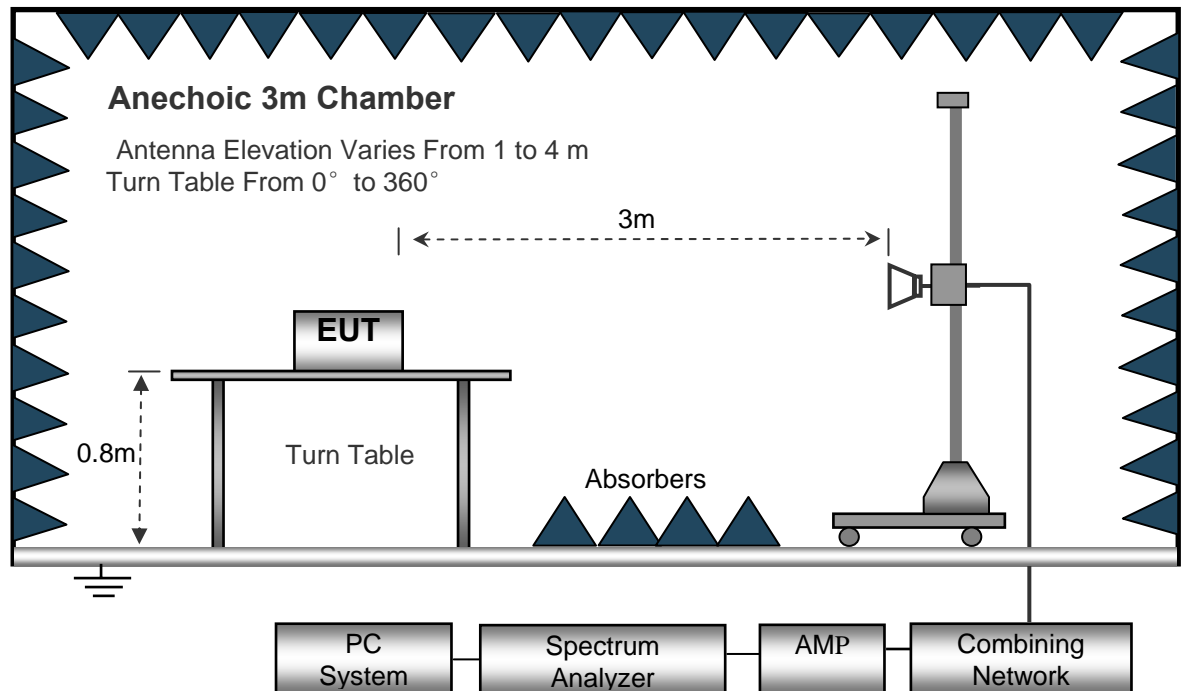

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
196.41	22.55	QP	21	1.9	H	11.13	33.68	43.50	-9.82
196.41	20.55	QP	35	1.1	V	11.13	31.68	43.50	-11.82
4804.00	46.34	PK	190	1.5	V	-1.06	45.28	74.00	-28.72
4804.00	43.14	Ave	190	1.5	V	-1.06	42.08	54.00	-11.92
7206.00	40.62	PK	299	1.2	H	1.33	41.95	74.00	-32.05
7206.00	36.44	Ave	299	1.2	H	1.33	37.77	54.00	-16.23
2313.80	45.74	PK	342	1.2	V	-13.19	32.55	74.00	-41.45
2313.80	37.36	Ave	342	1.2	V	-13.19	24.17	54.00	-29.83
2366.43	43.25	PK	345	1.8	H	-13.14	30.11	74.00	-43.89
2366.43	37.91	Ave	345	1.8	H	-13.14	24.77	54.00	-29.23
2493.28	43.12	PK	146	1.4	V	-13.08	30.04	74.00	-43.96
2493.28	36.69	Ave	146	1.4	V	-13.08	23.61	54.00	-30.39

Frequency	Receiver Reading	Detector	Turntable Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
196.41	23.71	QP	164	1.0	H	11.13	34.84	43.50	-8.66
196.41	24.93	QP	88	1.9	V	11.13	36.06	43.50	-7.44
4880.00	49.86	PK	250	1.3	V	-0.62	49.24	74.00	-24.76
4880.00	42.61	Ave	250	1.3	V	-0.62	41.99	54.00	-12.01
7320.00	42.36	PK	131	1.6	H	2.21	44.57	74.00	-29.43
7320.00	39.11	Ave	131	1.6	H	2.21	41.32	54.00	-12.68
2316.94	46.96	PK	197	1.8	V	-13.19	33.77	74.00	-40.23
2316.94	38.38	Ave	197	1.8	V	-13.19	25.19	54.00	-28.81
2362.93	43.68	PK	329	1.3	H	-13.14	30.54	74.00	-43.46
2362.93	37.05	Ave	329	1.3	H	-13.14	23.91	54.00	-30.09
2498.04	44.58	PK	102	1.4	V	-13.08	31.50	74.00	-42.50
2498.04	37.59	Ave	102	1.4	V	-13.08	24.51	54.00	-29.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
196.41	23.10	QP	239	1.6	H	11.13	34.23	43.50	-9.27
196.41	18.75	QP	94	1.9	V	11.13	29.88	43.50	-13.62
4960.00	49.54	PK	27	1.3	V	-0.24	49.30	74.00	-24.70
4960.00	43.24	Ave	27	1.3	V	-0.24	43.00	54.00	-11.00
7440.00	39.18	PK	350	1.2	H	2.84	42.02	74.00	-31.98
7440.00	38.63	Ave	350	1.2	H	2.84	41.47	54.00	-12.53
2322.32	45.32	PK	51	1.7	V	-13.19	32.13	74.00	-41.87
2322.32	38.25	Ave	51	1.7	V	-13.19	25.06	54.00	-28.94
2356.28	42.30	PK	282	1.3	H	-13.14	29.16	74.00	-44.84
2356.28	37.47	Ave	282	1.3	H	-13.14	24.33	54.00	-29.67
2499.38	43.75	PK	114	1.6	V	-13.08	30.67	74.00	-43.33
2499.38	36.83	Ave	114	1.6	V	-13.08	23.75	54.00	-30.25

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

Re: The two samples were tested and the worst case(TSL100-5L) was recorded.

8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 v03r02 06/05/2014
Test Mode:	Transmitting

8.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result

Test result plots shown as follows:

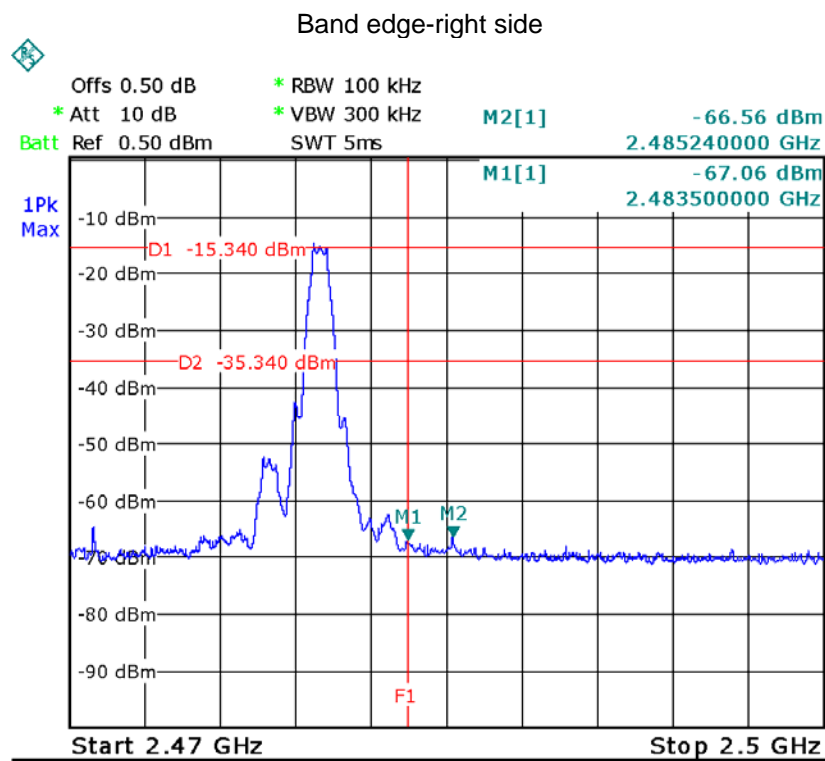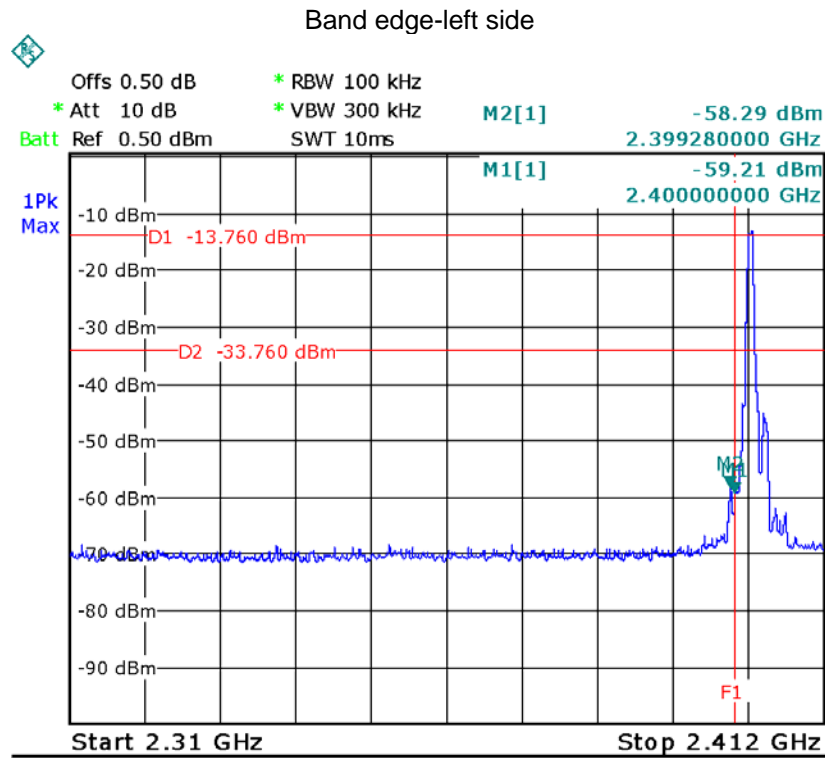

9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014



9.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Result:

Operation Channel	Bandwidth (MHz)
Low channel	0.707
Middle channel	0.707
High channel	0.707

Test result plot as follows:

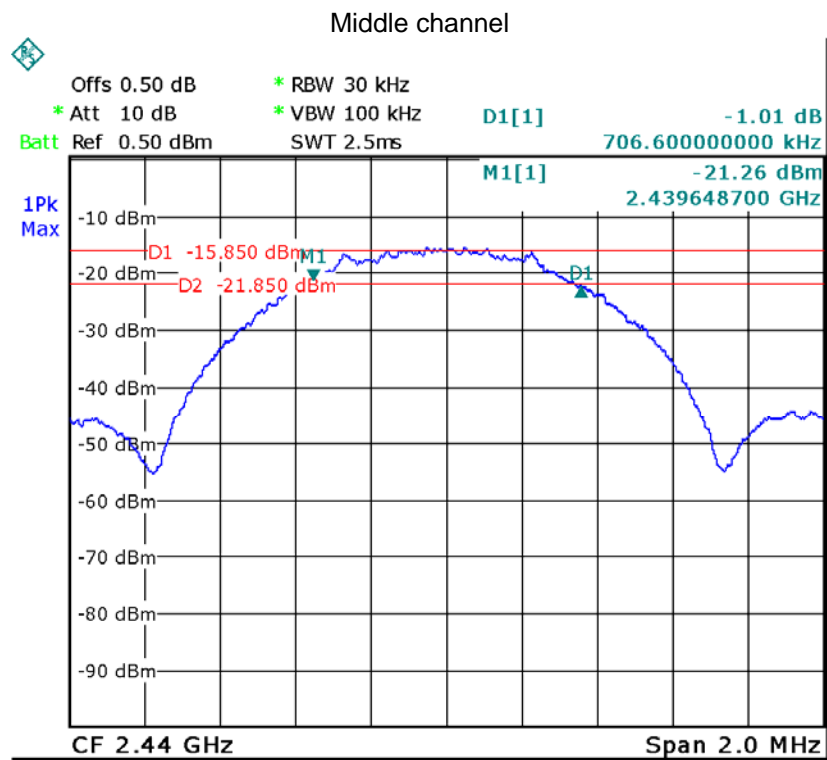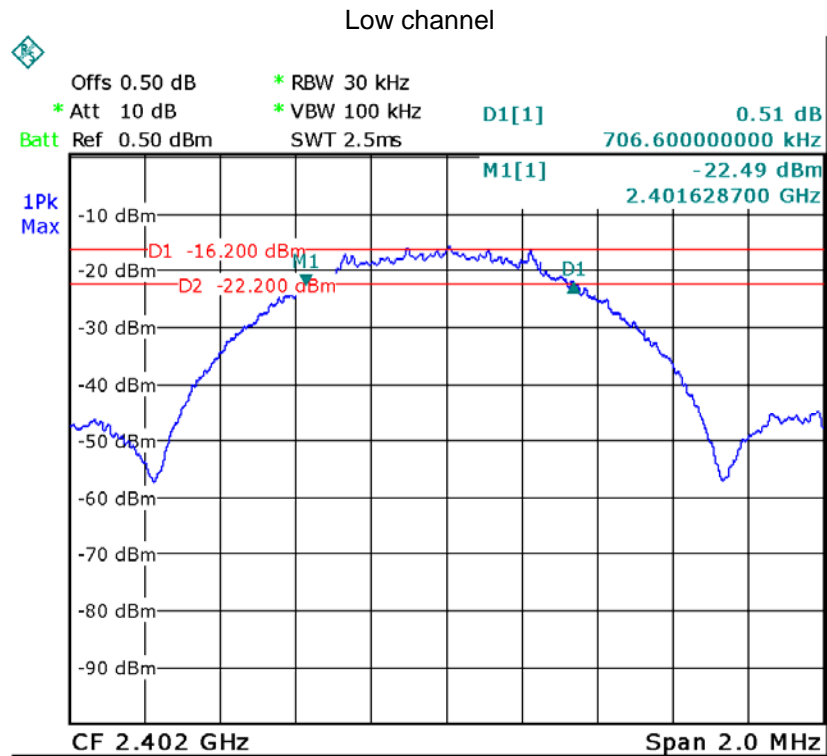

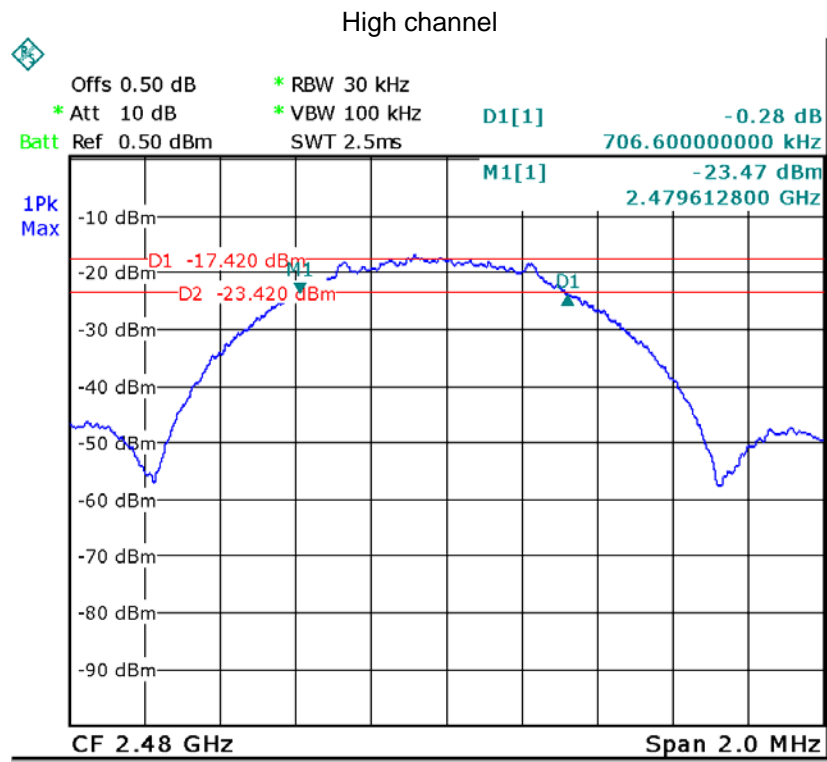

10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014

10.1 Test Procedure:

KDB 558074 D01 v03r02 06/05/2014

section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \quad RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


section 9.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1 \text{ MHz}$.
- b) Set the $VBW \geq 3 \quad RBW$
- c) Set the $span \geq 1.5 \times DTS$ bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

10.2 Test Result:


Maximum Peak Output Power (dBm)		
Low channel	Middle channel	High channel
-13.04	-12.82	-14.40
Limit		
1W/30dBm		

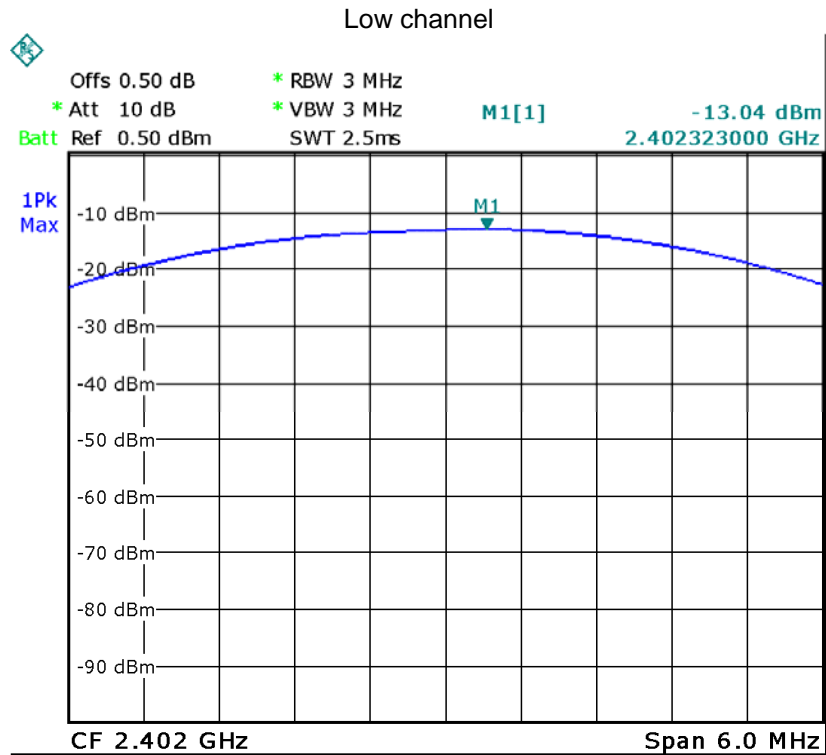

Middle channel

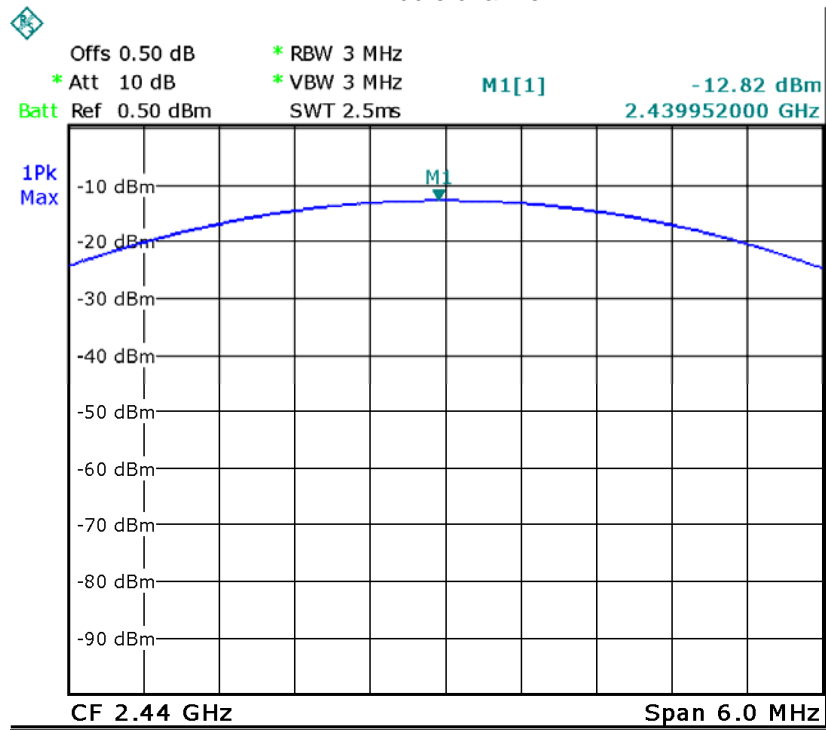

High channel

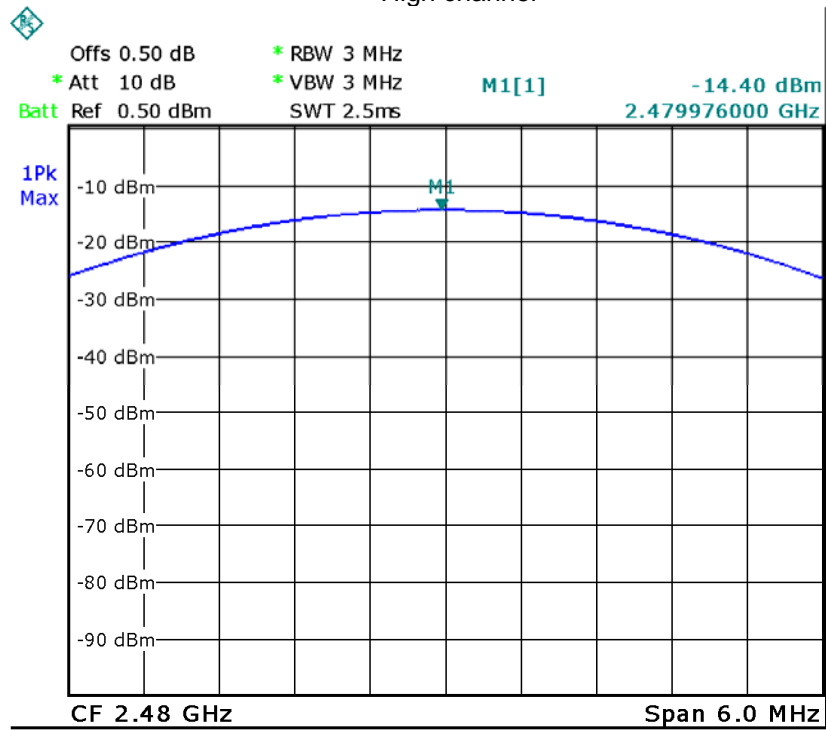

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014


11.1 Test Procedure:

KDB 558074 D01 v03r02 06/05/2014 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

11.2 Test Result:


Power Spectral Density		
Low channel	Middle channel	High channel
-25.16	-24.77	-26.43
Limit		
8dBm per 3kHz		

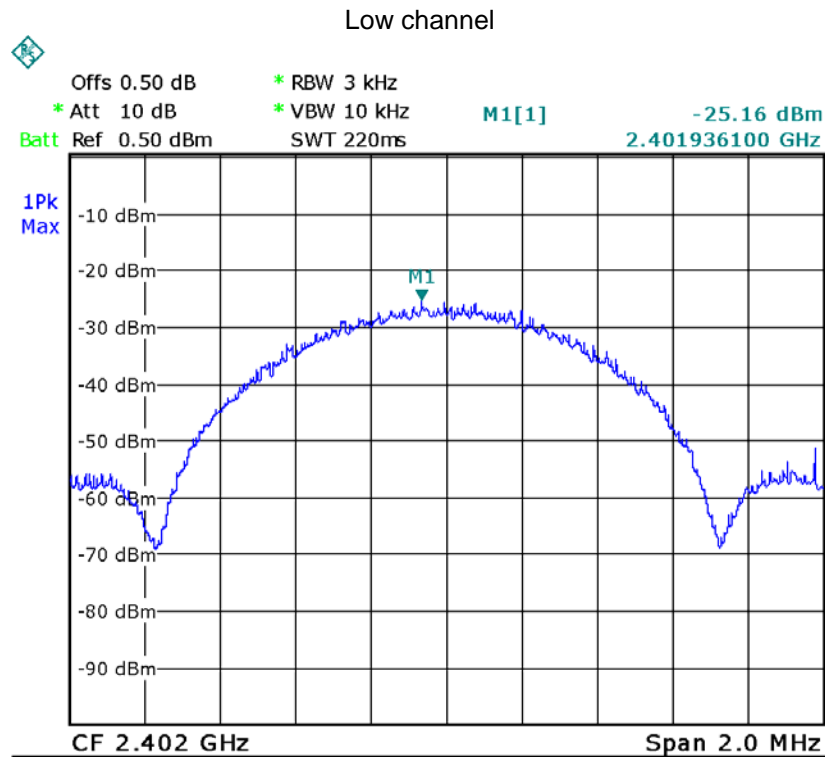

Middle channel

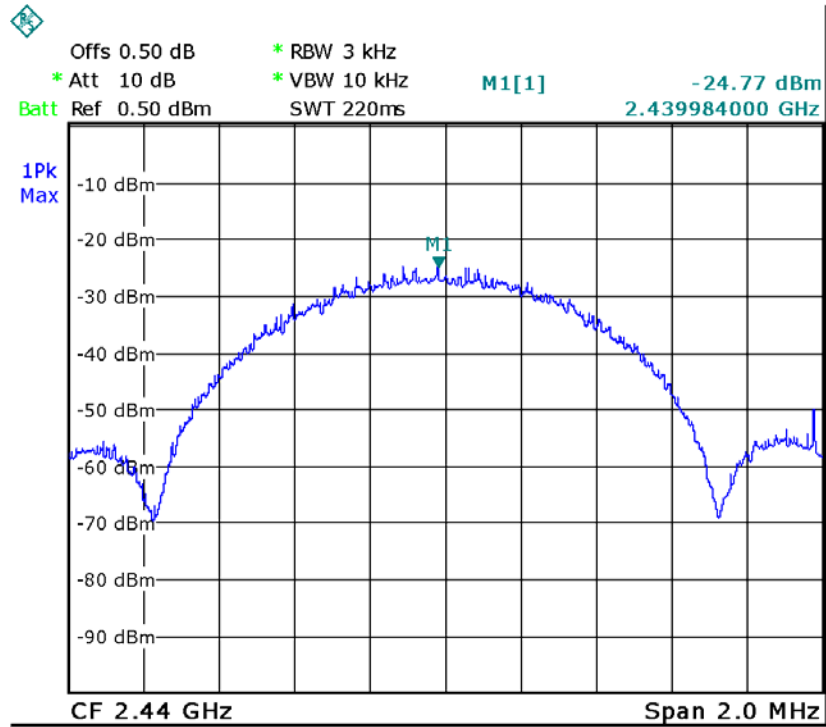

High channel

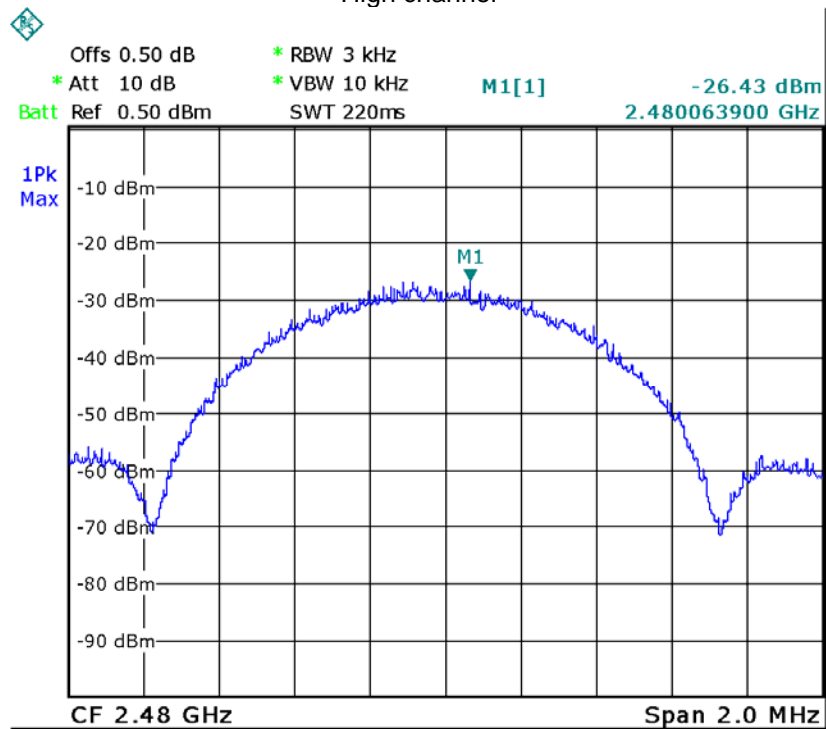

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna which meet the requirement of this section.

13 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method KDB 447498 D01 v05r02 General RF Exposure Guidance v05

13.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

13.2 The procedures / limit

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds(mW)
-12.82	0.05	0.05	5	10

Remark: Max. duty factor is 100%

Calculation formula: Source-based time-averaged maximum conducted output power(mW) =Conducted peak power(mW)*Duty factor


14 Photographs –Test Setup

14.1 Photograph – Conducted Emission Test Setup

TLS100-5L




TLS100

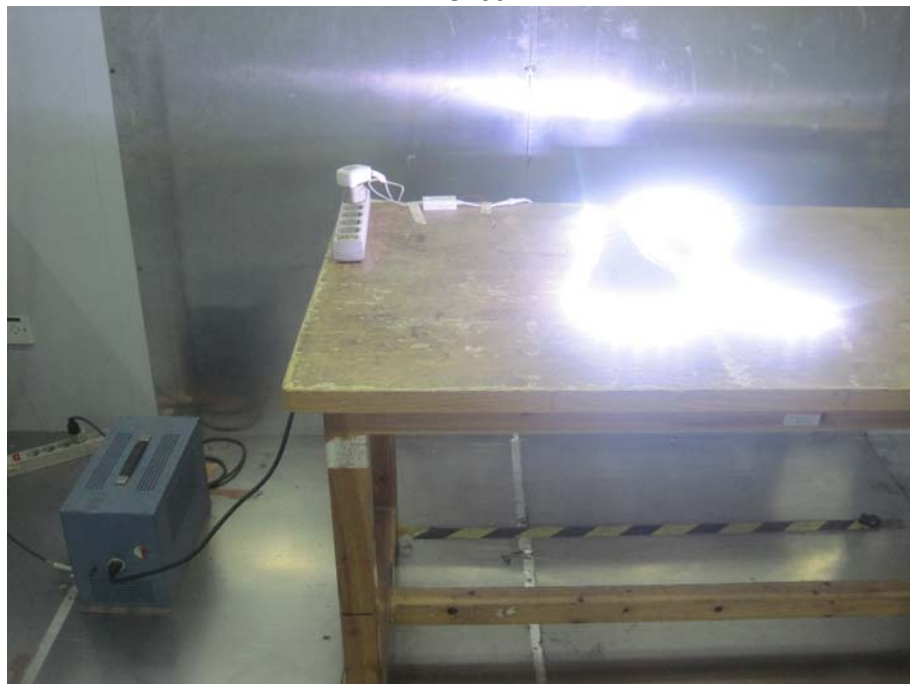


14.2 Photograph – Radiation Spurious Emission Test Setup

TLS100-5L

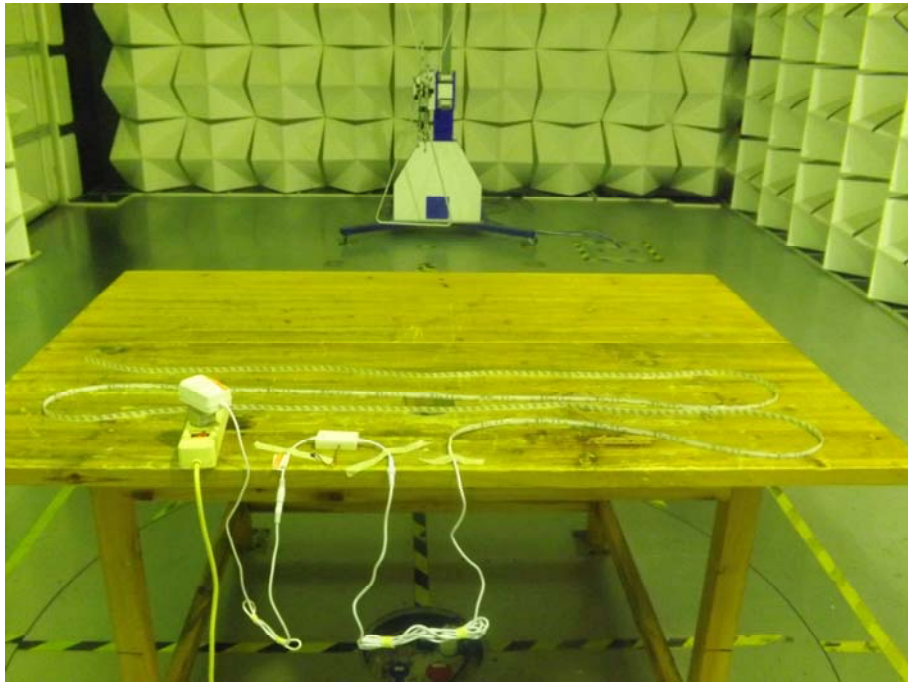


TLS100

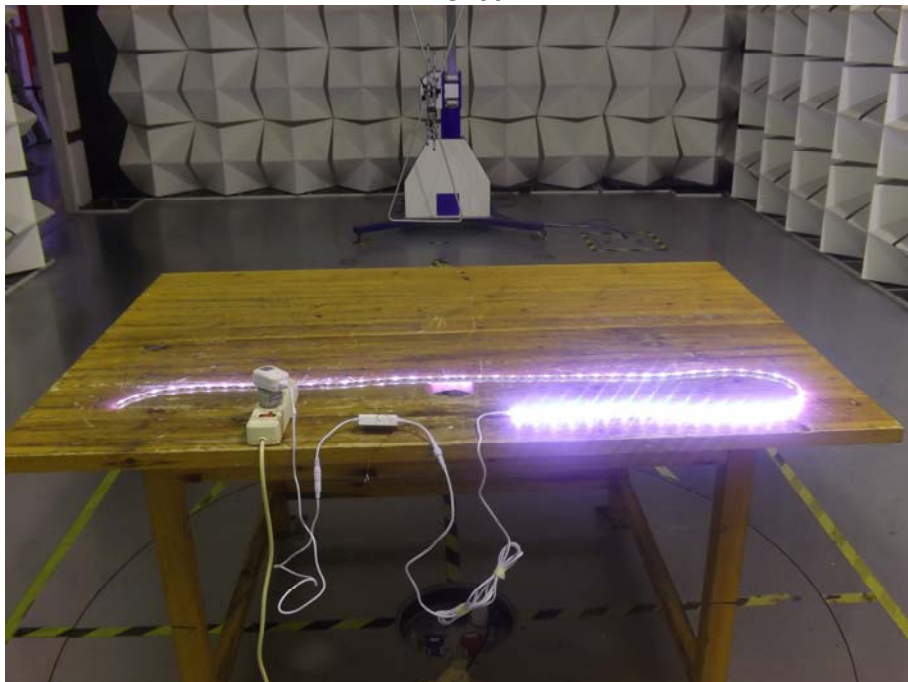


Above 1GHz

TLS100-5L

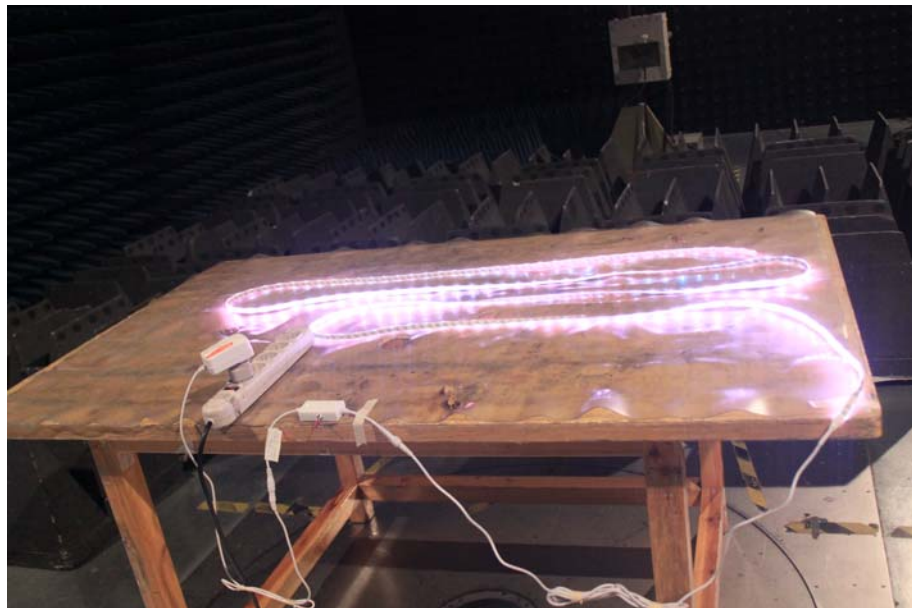

TLS100

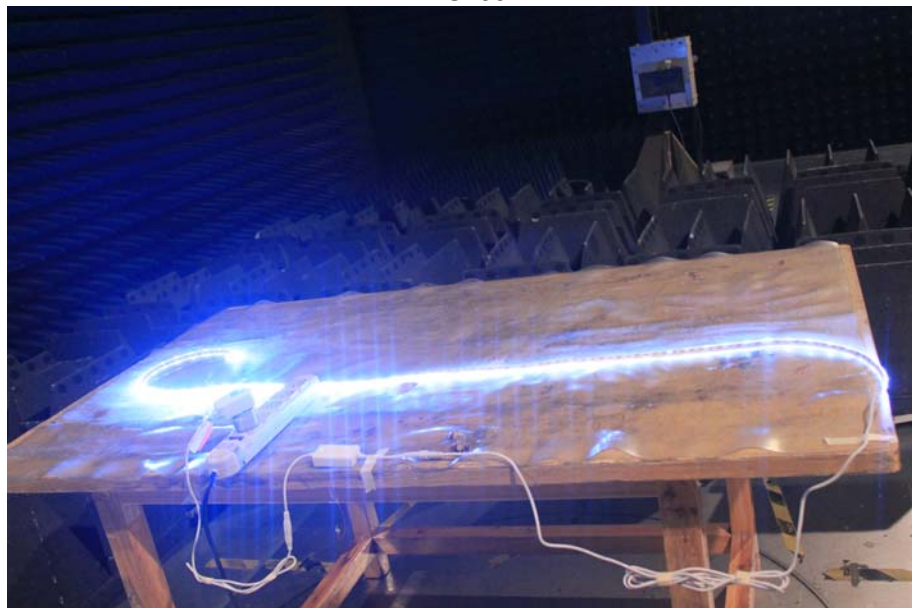

15 Photographs - Constructional Details

15.1 TLS100 & TLS100-5L External View

TLS100-5L












TLS100







15.2 TLS100 & TLS100-5L Internal View

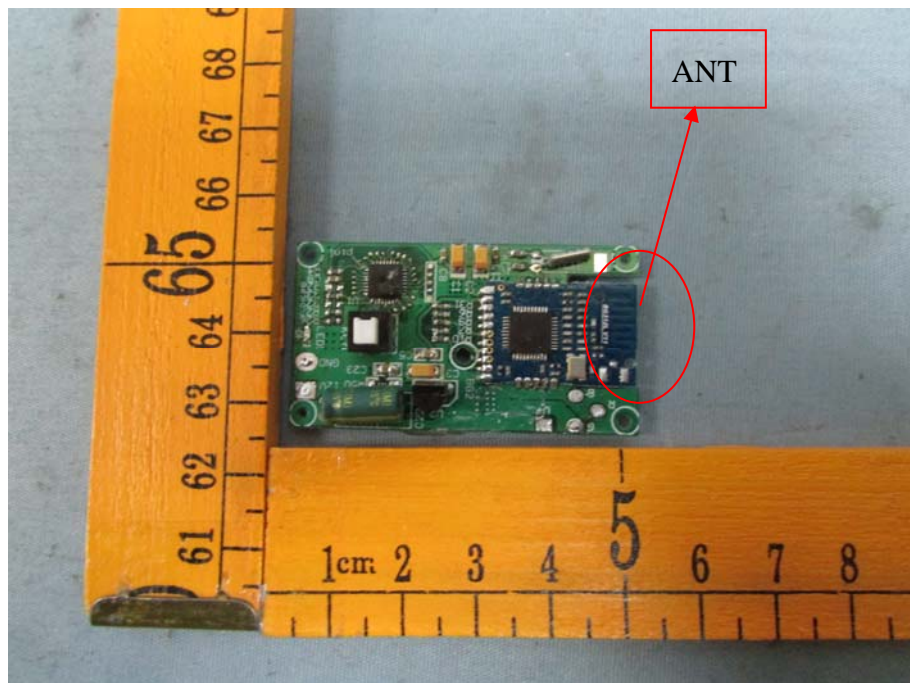

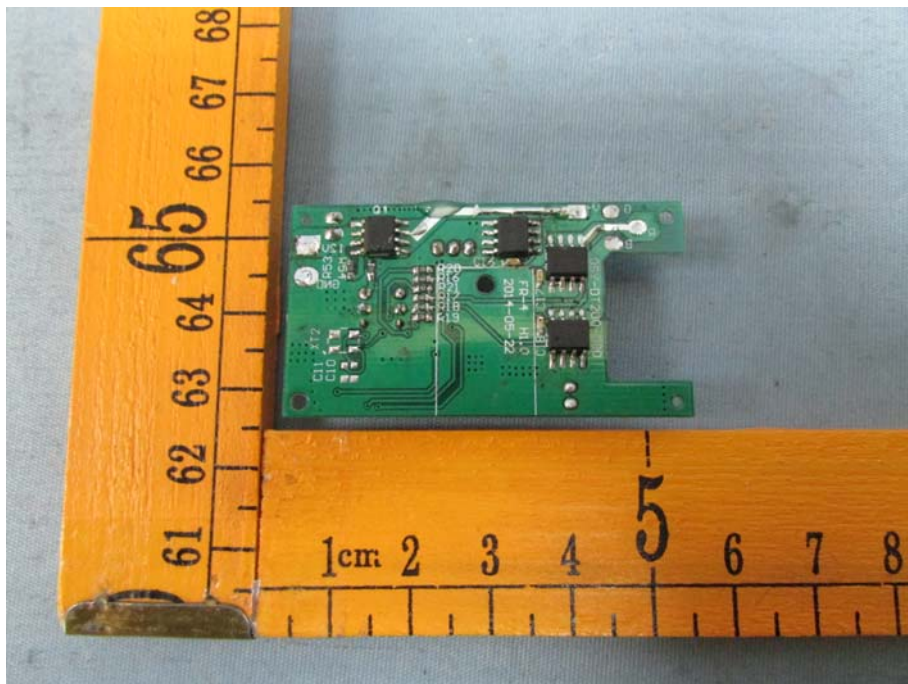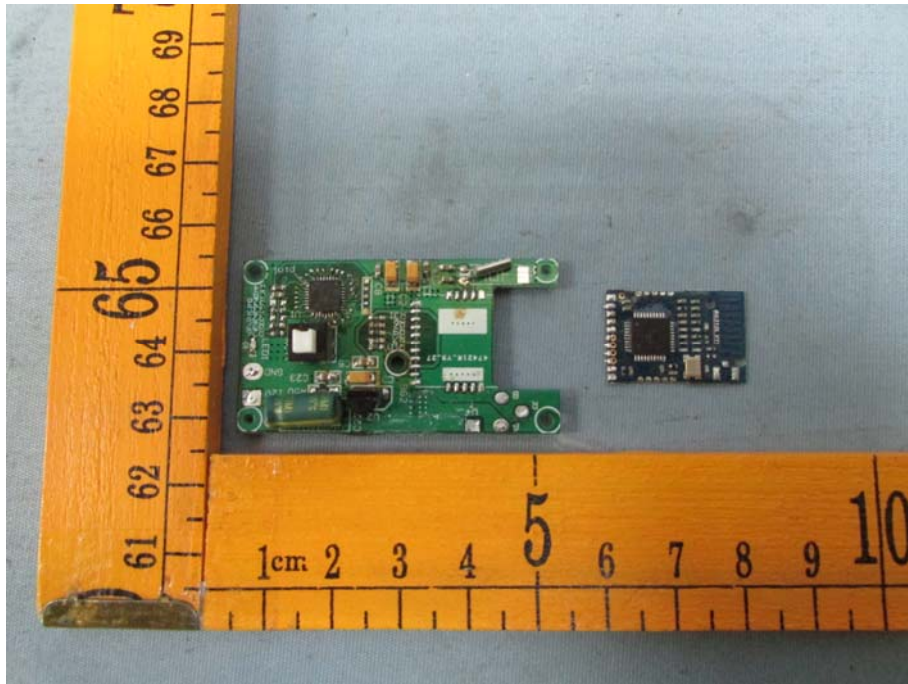

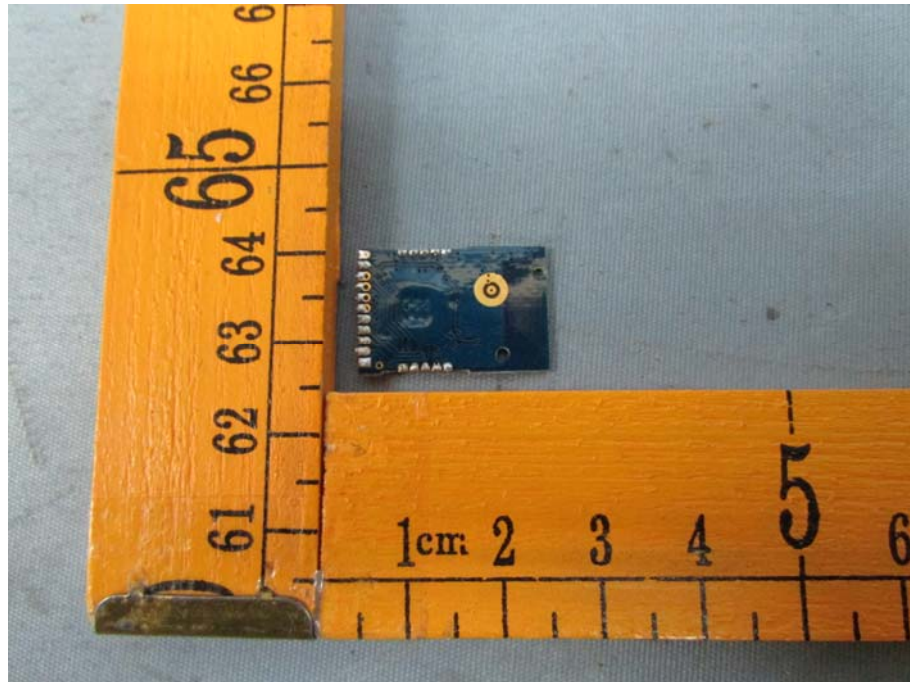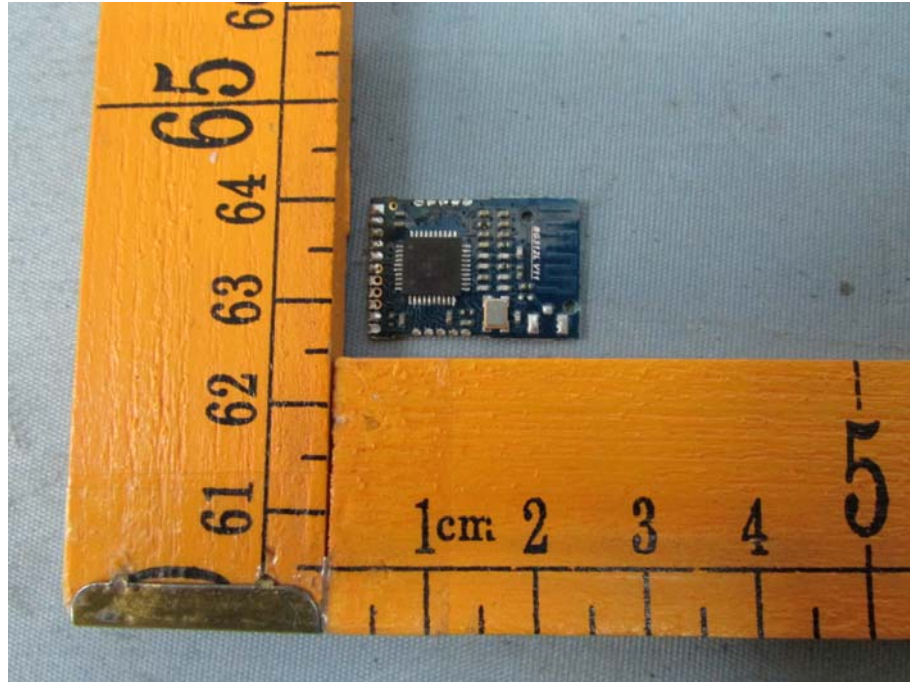

===== End of Report =====