



Test_Graph_802.11n40_ANT1_2452_MCS0_Lower Band Emissions








Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

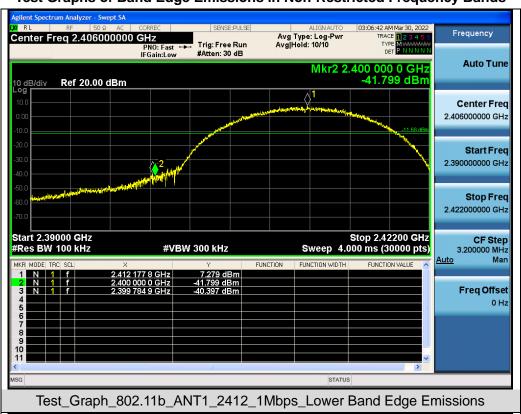




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





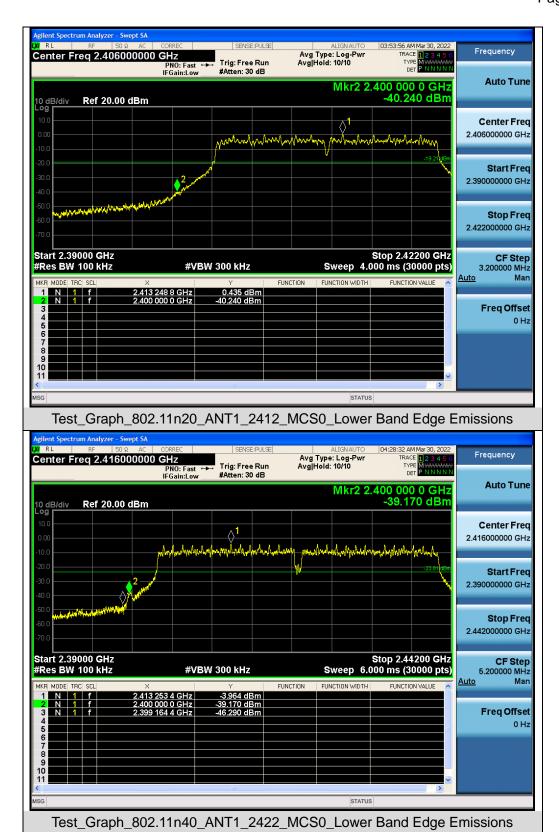

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Report No.: AGC04138220301FE05

Page 45 of 87

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.


10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT


	Test Data of Conducted Output Power Spectral Density								
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail				
	2412	2.205	-6.034	- \$8	Pass				
802.11b	2437	2.193	-6.046	- ₹8	Pass				
	2462	1.084	-7.155	- 88	Pass				
	2412	-5.359	-13.598	- ₹8	Pass				
802.11g	2437	-6.020	-14.259	- \$8	Pass				
	2462	-4.587	-12.826	- \$8	Pass				
	2412	-5.998	-14.237	- \$8	Pass				
802.11n20	2437	-6.194	-14.433	- \$8	Pass				
	2462	-6.659	-14.898	- \$8	Pass				
	2422	-10.621	-18.86	- ₹8	Pass				
802.11n40	2437	-9.044	-17.283	- \$8	Pass				
	2452	-9.913	-18.152	- ₹8	Pass				

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).





Test Graphs of Conducted Output Power Spectral Density

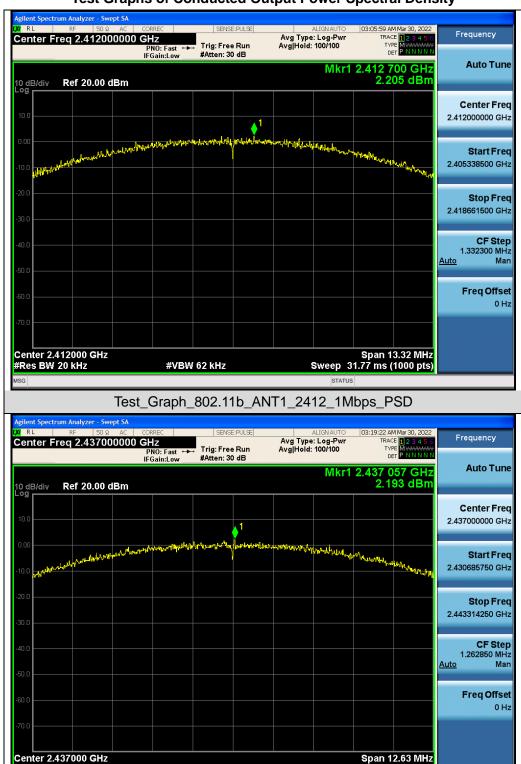


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT1_2437_1Mbps_PSD

Sweep 30.10 ms (1000 pts)


#VBW 62 kHz


#Res BW 20 kHz









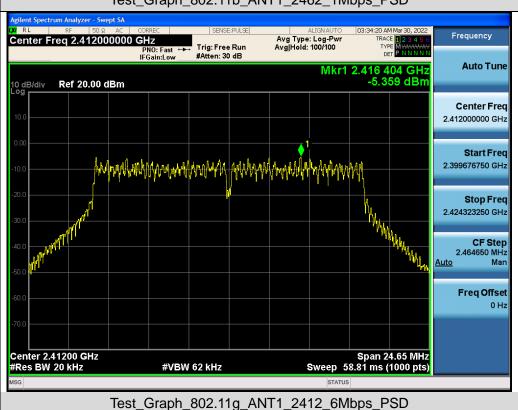







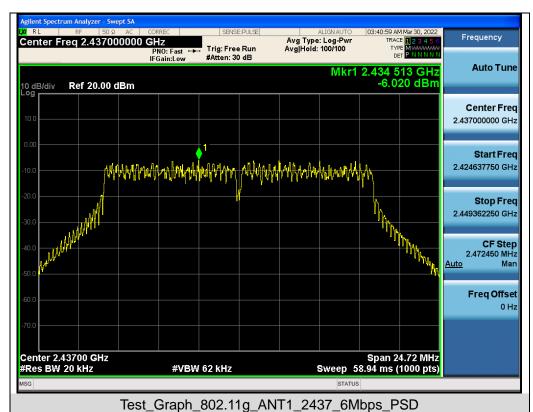


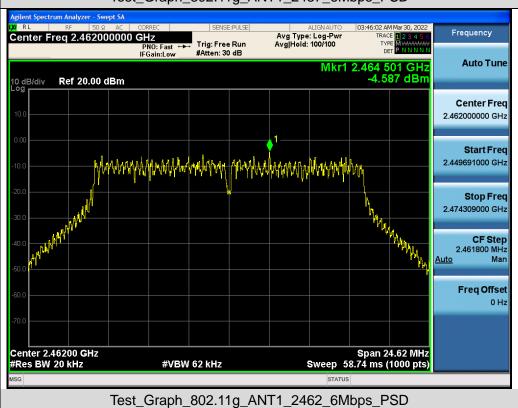







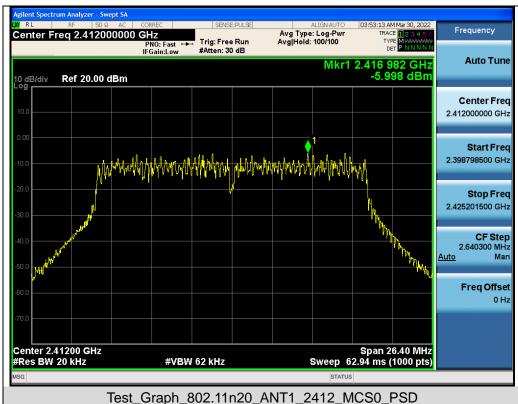


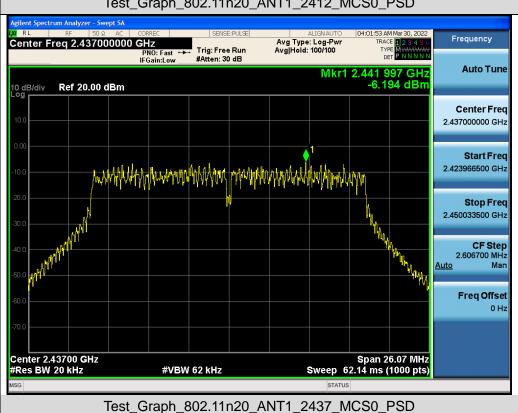






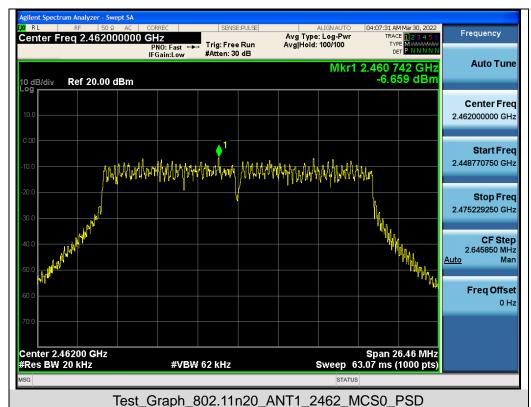

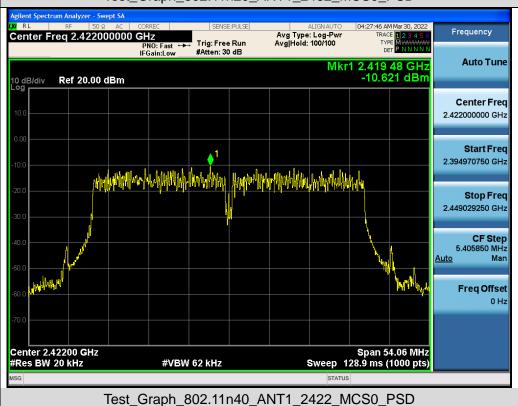







gilent Spectrum Analyzer - Swept SA Frequency Avg Type: Log-Pw Avg|Hold: 100/100 Center Freq 2.452000000 GHz Trig: Free Run #Atten: 30 dB IFGain:Low **Auto Tune** Mkr1 2.440 71 GHz -9.913 dBm 10 dB/div Ref 20.00 dBm Center Frea 2.452000000 GHz Start Freq 2.425339000 GHz Stop Freq 2.478661000 GHz **CF Step** 5.332200 MHz Auto Man Freq Offset 0 Hz Center 2.45200 GHz #Res BW 20 kHz Span 53.32 MHz Sweep 127.1 ms (1000 pts) #VBW 62 kHz Test_Graph_802.11n40_ANT1_2452_MCS0_PSD



Report No.: AGC04138220301FE05

Page 52 of 87

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

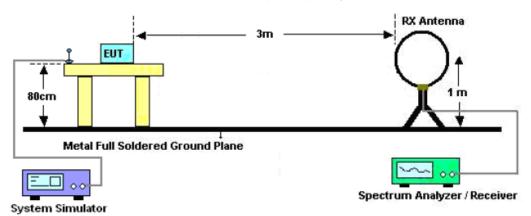

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

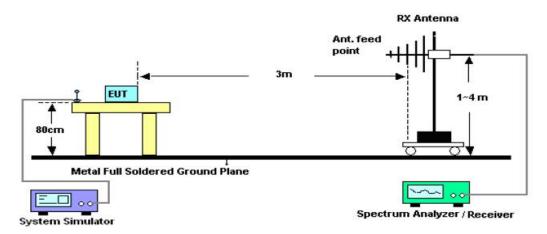

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

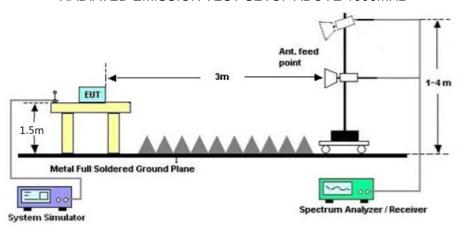



Report No.: AGC04138220301FE05

Page 54 of 87

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.






The model name of adapter: TGB12-090100-03


Radiated emission from 30MHz to 1000MHz

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

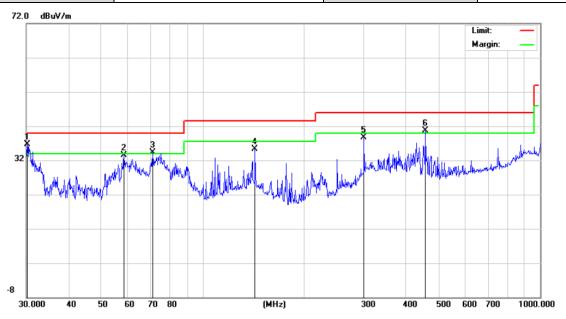


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	30.2111	23.49	13.18	36.67	40.00	-3.33	peak
2		58.4074	16.53	17.04	33.57	40.00	-6.43	peak
3	İ	71.0803	16.55	17.66	34.21	40.00	-5.79	peak
4		142.8243	16.86	18.44	35.30	43.50	-8.20	peak
5		300.3672	14.34	24.44	38.78	46.00	-7.22	peak
6	İ	457.5073	17.95	22.72	40.67	46.00	-5.33	peak

RESULT: PASS





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

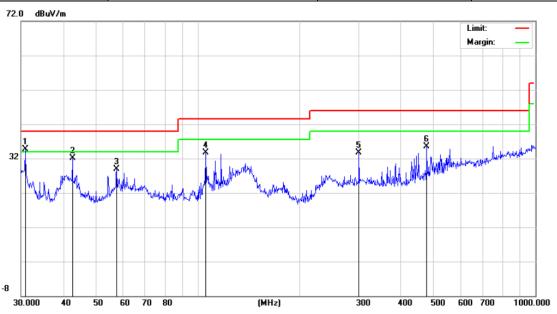

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	,
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	30.8535	21.45	13.20	34.65	40.00	-5.35	peak
2		42.6000	16.47	15.64	32.11	40.00	-7.89	peak
3		57.5938	11.82	17.03	28.85	40.00	-11.15	peak
4	•	105.6414	18.36	15.41	33.77	43.50	-9.73	peak
5	(300.3672	13.33	20.47	33.80	46.00	-12.20	peak
6	4	477.1693	13.11	22.30	35.41	46.00	-10.59	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC04138220301FE05

Page 57 of 87


Radiated emission above 1GHz

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	51.23	0.08	51.31	74.00	-22.69	peak
4824.000	42.33	0.08	42.41	54.00	-11.59	AVG
7236.000	48.52	2.21	50.73	74.00	-23.27	peak
7236.000	34.05	2.21	36.26	54.00	-17.74	AVG
temark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	52.53	0.08	52.61	74.00	-21.39	peak
4824.000	41.89	0.08	41.97	54.00	-12.03	AVG
7236.000	49.37	2.21	51.58	74.00	-22.42	peak
7236.000	35.22	2.21	37.43	54.00	-16.57	AVG
emark:						





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
4874.000	55.25	0.14	55.39	74.00	-18.61	peak			
4874.000	36.37	0.14	36.51	54.00	-17.49	AVG			
7311.000	52.03	2.36	54.39	74.00	-19.61	peak			
7311.000	41.28	2.36	43.64	54.00	-10.36	AVG			
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tune		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4874.000	51.39	0.14	51.53	74.00	-22.47	peak		
4874.000	35.63	0.14	35.77	54.00	-18.23	AVG		
7311.000	51.35	2.36	53.71	74.00	-20.29	peak		
7311.000	39.38	2.36	41.74	54.00	-12.26	AVG		
Remark:								
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Report No.: AGC04138220301FE05 Page 59 of 87

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
4960.000	51.02	0.22	51.24	74.00	-22.76	peak			
4960.000	43.25	0.22	43.47	54.00	-10.53	AVG			
7440.000	49.37	2.64	52.01	74.00	-21.99	peak			
7440.000	40.02	2.64	42.66	54.00	-11.34	AVG			
Remark:	Remark:								
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4960.000	49.52	0.22	49.74	74.00	-24.26	peak		
4960.000	42.35	0.22	42.57	54.00	-11.43	AVG		
7440.000	48.25	2.64	50.89	74.00	-23.11	peak		
7440.000	39.24	2.64	41.88	54.00	-12.12	AVG		
Remark:								
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



The model name of adapter: JF012WR-0900100UH

Radiated emission from 30MHz to 1000MHz

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

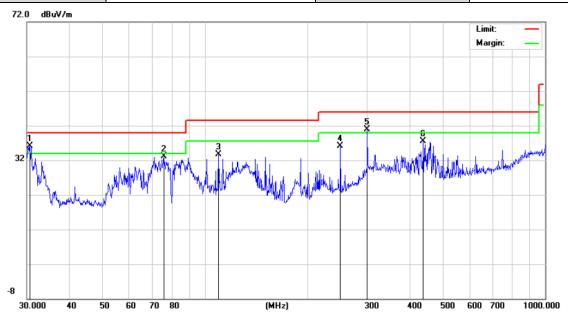


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	30.6379	22.98	13.19	36.17	40.00	-3.83	peak
2		75.7114	17.41	15.73	33.14	40.00	-6.86	peak
3		109.7960	16.44	17.28	33.72	43.50	-9.78	peak
4		250.3012	18.69	17.48	36.17	46.00	-9.83	peak
5	ļ	300.3672	16.40	24.44	40.84	46.00	-5.16	peak
6		438.6554	14.41	23.03	37.44	46.00	-8.56	peak

RESULT: PASS



EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

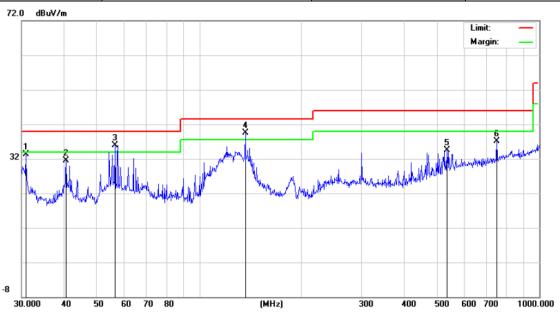

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		30.8535	20.11	13.20	33.31	40.00	-6.69	peak
2		40.5591	15.61	15.99	31.60	40.00	-8.40	peak
3	İ	56.5929	19.15	16.68	35.83	40.00	-4.17	peak
4	*	136.4598	20.37	19.18	39.55	43.50	-3.95	peak
5		535.7073	10.41	24.05	34.46	46.00	-11.54	peak
6		750.1082	9.87	27.28	37.15	46.00	-8.85	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC04138220301FE05

Page 62 of 87


Radiated emission above 1GHz

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	49.85	0.08	49.93	74.00	-24.07	peak
4824.000	41.52	0.08	41.60	54.00	-12.40	AVG
7236.000	49.37	2.21	51.58	74.00	-22.42	peak
7236.000	35.51	2.21	37.72	54.00	-16.28	AVG
Remark:			-			1
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	51.36	0.08	51.44	74.00	-22.56	peak
4824.000	39.52	0.08	39.60	54.00	-14.40	AVG
7236.000	49.12	2.21	51.33	74.00	-22.67	peak
7236.000	34.28	2.21	36.49	54.00	-17.51	AVG
emark:						





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	50.41	0.14	50.55	74.00	-23.45	peak
4874.000	38.28	0.14	38.42	54.00	-15.58	AVG
7311.000	51.17	2.36	53.53	74.00	-20.47	peak
7311.000	35.63	2.36	37.99	54.00	-16.01	AVG
Remark:						
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	49.56	0.14	49.70	74.00	-24.30	peak
4874.000	37.52	0.14	37.66	54.00	-16.34	AVG
7311.000	49.53	2.36	51.89	74.00	-22.11	peak
7311.000	38.58	2.36	40.94	54.00	-13.06	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



Report No.: AGC04138220301FE05

Page 64 of 87

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	49.58	0.22	49.80	74.00	-24.20	peak
4960.000	39.52	0.22	39.74	54.00	-14.26	AVG
7440.000	48.57	2.64	51.21	74.00	-22.79	peak
7440.000	39.51	2.64	42.15	54.00	-11.85	AVG
Remark:	Remark:					
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	48.52	0.22	48.74	74.00	-25.26	peak
4960.000	41.25	0.22	41.47	54.00	-12.53	AVG
7440.000	47.37	2.64	50.01	74.00	-23.99	peak
7440.000	38.14	2.64	40.78	54.00	-13.22	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.




Test result for band edge emission at restricted bands

EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement




Test Graph for Average Measurement

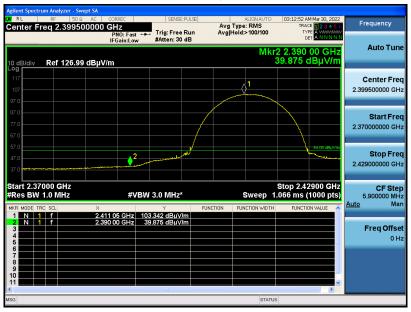

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

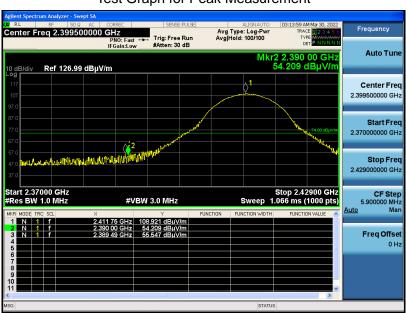

Test Graph for Average Measurement







EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

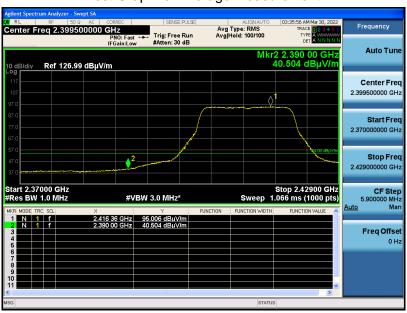





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






EUT	SINGCAST MAX MIC STAND KARAOKE MACHINE	Model Name	SMC2040
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

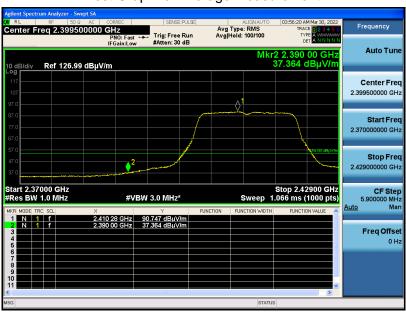

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.