



# H.B. Compliance Solutions

## Intentional Radiator Test Report

For the

**Aarcomm Systems Inc**

**Radio Module RM2-2400MRTR**

Tested under

The FCC Rules contained in Title 47 of the CFR, Part 15.247 for

Frequency Hopping Spread Spectrum

**Prepared for:**

Aarcomm Systems, Inc.

112-17 Fawcett Road

Coquitlam, British Columbia V3K 6V2

**Prepared By:**

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

**Reviewed By:**

A handwritten signature in black ink, appearing to read 'Hoosamuddin Bandukwala'.

Hoosamuddin Bandukwala



Cert # ATL-0062-E

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedure indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurement made, the equipment tested is capable of operation in accordance with the requirements of Part 15 of the FCC Rules under normal use and maintenance. All results contained herein relate only to the sample tested.

## Report Status Sheet

Revision #	Report Date	Reason for Revision
Ø	April 14, 2017	Initial Issue

## Table of Contents

EXECUTIVE SUMMARY .....	5
1. Testing Summary .....	5
EQUIPMENT CONFIGURATION .....	6
1. Overview .....	6
2. Test Facility .....	7
3. Description of Test Sample .....	7
4. Equipment Configuration .....	7
5. Support Equipment .....	7
6. Ports and Cabling Information .....	8
7. Method of Monitoring EUT Operation .....	8
8. Mode of Operation .....	8
9. Modifications .....	8
10. Disposition of EUT .....	8
Criteria for Un-Intentional Radiators .....	9
1. Radiated Emissions .....	9
Emissions Tests Calculations .....	10
Criteria for Intentional Radiators .....	12
2. Conducted Emissions .....	12
1. Occupied Bandwidth .....	13
2. RF Power Output .....	17
3. Conducted Spurious Emissions .....	20
4. Radiated Spurious Emissions and Restricted Band .....	28
6. Emissions At Band Edges .....	31
7. Time of Occupancy (Dwell Time) .....	34
8. Number of Hopping Frequencies .....	37
9. Carrier Frequency Separation .....	38

I. Test Equipment.....	40
------------------------	----

## EXECUTIVE SUMMARY

### 1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15.247. All tests were conducted using measurement procedure from ANSI C63.10-2013, FCC Public Notice DA 00-705 FHSS Guide March 30, 2000 as appropriate.

Test Name	Test Method/Standard	Result	Comments
Unintentional Radiated Emissions	15.109	Pass	
A/C Powerline Conducted Emissions	15.207	N/A	DC Powered Device
Occupied Bandwidth	15.247(a)(2)	Pass	
Peak Output Power	15.247(b)	Pass	
Conducted Spurious Emissions	15.247(d)	Pass	
Radiated Spurious Emissions & Restricted Band	15.247(d), 15.209(a), 15.205	Pass	
Emissions At Band Edges	15.247(d), 15.209(a), 15.205	Pass	
Time of Occupancy (Dwell Time)	15.247(a)	Pass	
Number of Hopping Channels	15.247(a)	Pass	
Carrier Frequency Separation	15.247(a)	Pass	

## EQUIPMENT CONFIGURATION

### 1. Overview

H.B Compliance Solutions was contracted by Aarcomm Systems to perform testing on the Radio Module RM2-2400MRTR under the quotation number Q17021006.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Aarcomm Systems, Radio Module RM2-2400MRTR.

The tests were based on FCC Part 15 Rules. The tests described in this document were formal tests as described with the objective of the testing was to evaluate compliance of the Equipment Under Test (EUT) to the requirements of the aforementioned specifications. Aarcomm Systems should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been permanently discontinued. The results obtained relate only to the item(s) tested.

<b>Product Name:</b>	2.4GHz Radio Module
<b>Model(s) Tested:</b>	RM2-2400MRTR
<b>FCC ID:</b>	2AAXW-2400MRM2
<b>Supply Voltage Input:</b>	Primary Power : +12 or +24 Vdc
<b>Frequency Range:</b>	2403-2480MHz
<b>No. of Channels:</b>	62 Channels
<b>Necessary Bandwidth</b>	N/A
<b>Type(s) of Modulation:</b>	2-GFSK and 4-GFSK
<b>Range of Operation Power:</b>	0.0087W
<b>Emission Designator:</b>	N/A
<b>Channel Spacing(s)</b>	None
<b>Test Item:</b>	Pre-Production
<b>Type of Equipment :</b>	Fixed
<b>Antenna Requirement (§15.203) :</b>	Type of Antenna: Collinear (PCB) and Flex Dipole Gain of Antenna: 2.95 and 3dBi
<b>Environmental Test Conditions:</b>	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
<b>Modification to the EUT:</b>	None
<b>Evaluated By:</b>	Staff at Artesyn Embedded & H.B. Compliance Solutions
<b>Test Date(s):</b>	03/20/17 till 04/14/17

## 2. Test Facility

All testing was performed at Artesyn Embedded Technologies. This facility is located at 2900 S. Diablo Way, Suite 190, Tempe, AZ 85282. All equipment used in making physical determination is accurate and bears recent traceability to the National Institute of Standards and Technology.

Test facility at Artesyn Embedded Technologies is an A2LA accredited test site. The A2LA certificate number is 2716.01. The scope of accreditation covers the FCC Method - 47 CFR Part 15, ICES-003, CISPR 22, AS/NZS 3548 and VCCI

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at Artesyn Embedded Technologies.

## 3. Description of Test Sample

The Aarcomm Systems, RM2-2400MRTR is a frequency hopping, proprietary-data-format transceiver module. It is primarily employed in Aarcomm Systems SCADA, telemetry and control devices supplied to the industrial process automation and mobile remote control markets. The module plugs onto a host PCB which varies with application. The device is DC powered.

## 4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
# 1	Radio Module (Sample # 1 with connector) – For Conducted test only	None	None
# 2	Radio Module (Sample # 2) – For Radiated test only	None	None

Table 1. Equipment Configuration

## 5. Support Equipment

All support equipment supplied is listed in the following Support Equipment List.

Ref ID	Name / Description	Manufacturer	Model #	Serial #
# 3	Laptop Computer	Toshiba		
# 4	AC Power Supply			

Table 2. Support Equipment

## 6. Ports and Cabling Information

Ref ID	Port name on the EUT	Cable Description	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
-	-	-	-	-	-	-

Table 3. Ports and Cabling Information

## 7. Method of Monitoring EUT Operation

A test receiver will be used to monitor the data transmission from the EUT.

## 8. Mode of Operation

The EUT will be configured to transmit at maximum power level. The device were programmed with special test software that allowed to cycle through test modes. Test mode was provided to select the lower, middle and upper band of the transmitter. This software allowed the selection of the channel on the transmitter from three frequencies modulated and the other three in CW mode. These settings were created for testing purpose only.

## 9. Modifications

### 9.1 Modifications to EUT

No modifications were made to the EUT

### 9.2 Modifications to Test Standard

No Modifications were made to the test standard.

## 10. Disposition of EUT

The test sample including all support equipment submitted to H.B Compliance Solutions for testing will be returned to Aarcomm Systems Inc. at the completion of testing & certification.

## Criteria for Un-Intentional Radiators

### 1. Radiated Emissions

<b>Test Requirement(s):</b>	§15.109	<b>Test Engineer(s):</b>	Jerry Mejak
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	03/31/2017

#### ***Test Procedures:***

The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by varying table azimuth, antenna height, and manipulating cables.

Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

*Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.*

Tests were made with the antenna positioned in both the horizontal and vertical polarization planes. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 3 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
30 MHz to 1 GHz	120 kHz	120 kHz	N/A
1 GHz to 11 GHz	1MHz	N/A	1MHz
Measurements were made using the bandwidths and detectors specified. The video filter was at least as wide as the IF bandwidth of the measuring receiver.			

**Table 4. Radiated Emissions – Measurement Bandwidth**

## Emissions Tests Calculations

In the case of indoor measurements, radiated emissions measurements are made by the manipulation of correction factors using Rohde and Schwarz ES-K1 software. This is done automatically by the software during the final measurement process.

In both cases, the level of the Field Strength of the interfering signal is calculated by adding the Antenna Factor, Cable Factor and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + (CF - AG)$$

Where: FS = Field Strength

RA = Receiver (indicated) Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

This laboratory uses an approach of combining the CF and AG using an end-to-end measurement of the entire cabling system, including the test cable, any in-line amplifiers, attenuators, or transient protection networks, all measured in-situ.


For a sample calculation, assume a receiver reading of 52.5 dBuV is obtained. With an antenna factor of 7.4 and a combined cable factor (CF + AG) of -27.9:

$$FS = 52.5 + 7.4 + (-27.9) = 32 \text{ dBuV/m}$$


$$FS = 32 \text{ dBuV/m}$$

If desired, this can be converted into its corresponding level in uV/m:

$$FS = 10^{((32 \text{ dBuV/m})/20)} = 39.8 \text{ uV/m}$$

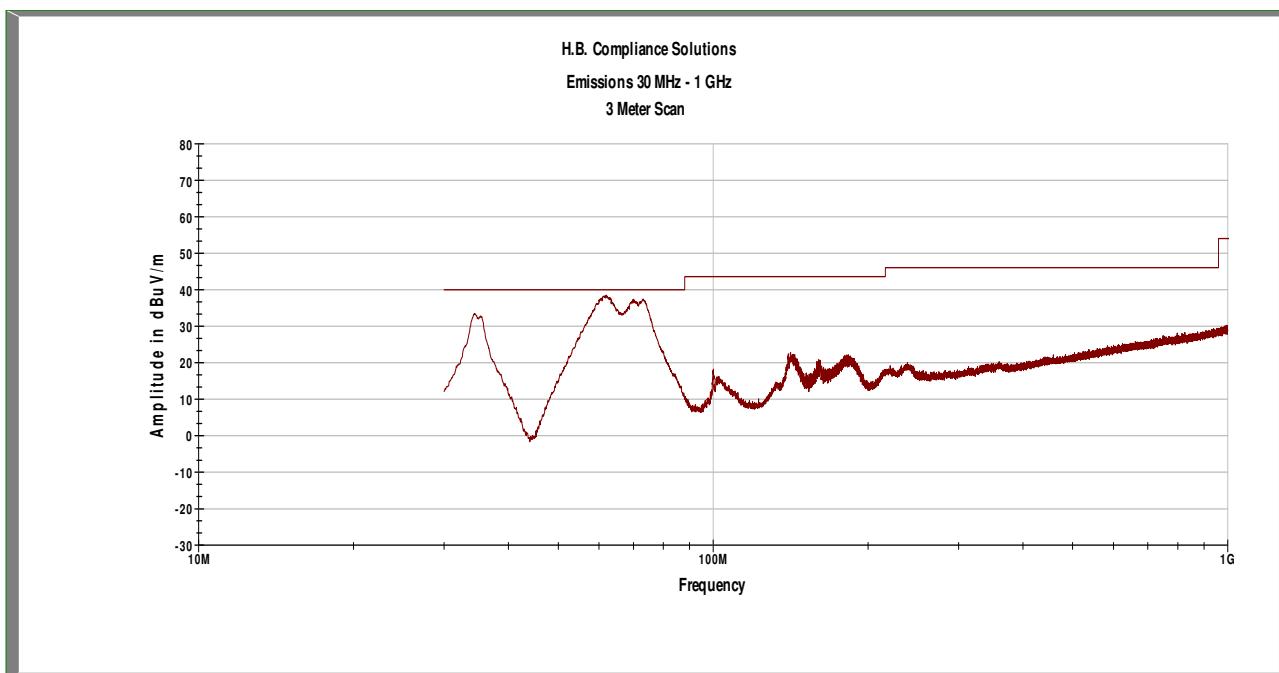

**Plot 1 – Radiated Emissions – 30MHz to 1GHz**

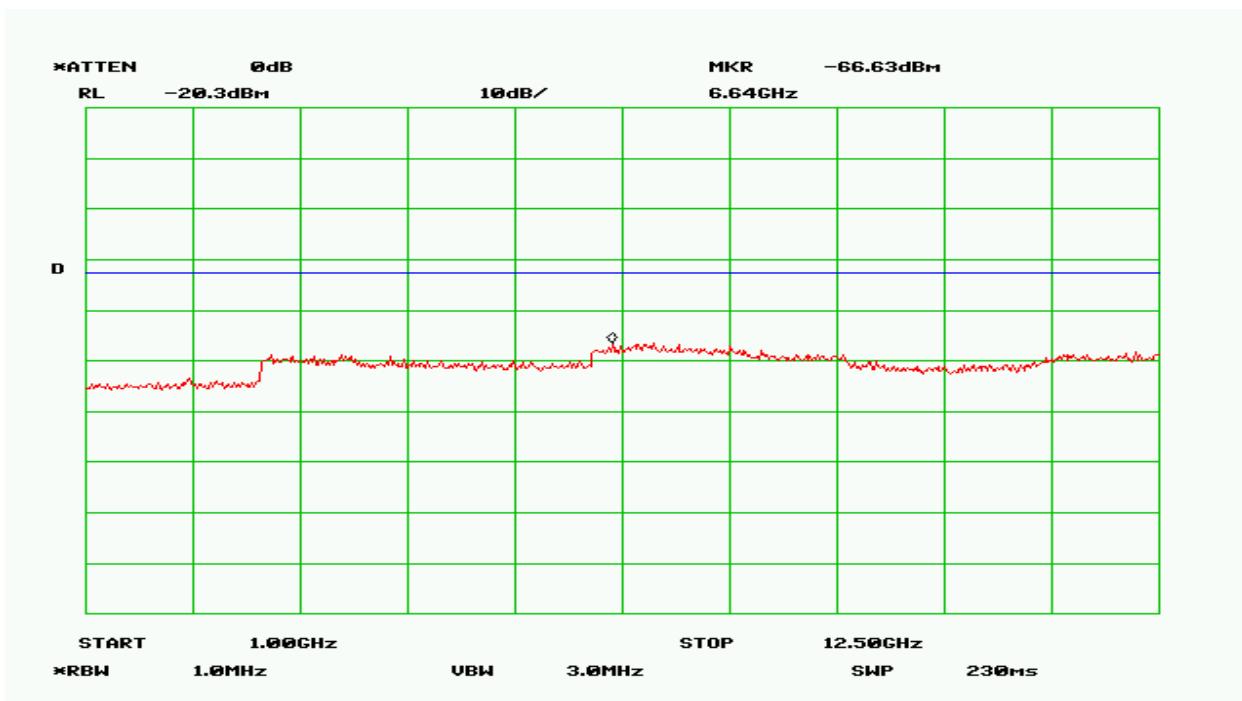

**Plot 2 – Receiver Emissions (Conducted) – 1GHz to 12.5GHz (For Industry Canada RSS-GEN)**

## Criteria for Intentional Radiators

### 2. Conducted Emissions

<b>Test Requirement(s):</b>	§15.207	<b>Test Engineer(s):</b>	None
<b>Test Results:</b>	N/A	<b>Test Date(s):</b>	None

**Test Procedures:** The EUT was placed on a non-metallic table, 80cm above the ground plane inside a shielded enclosure. The EUT was powered through a  $50\Omega/50\mu\text{H}$  LISN. The conducted emissions tests were performed using the mode of operation and configuration noted within this report. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are the same as those cords normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network). All 50 Ohm measuring ports of the LISN are terminated by 50 Ohms, either by the 50 Ohm EMI receiver or a 50 Ohm resistive load.

Refer to the Emissions Tests Calculations section in the Radiated Emissions section for sample calculations. For the purposes of the conducted emissions test, the Antenna Factor (AF) is replaced by the LISN correction factor.

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.150 - 30	9.0	9.0	9.0
Measurements were made using the bandwidths and detectors specified. No video filter was used.			

Table 1. Conducted Emissions – Measurement Bandwidth

Frequency Range (MHz)	15.107(b), Class A Limits (dBuV)		15.107(a), Class B Limits (dBuV)	
	Quasi-Peak	Average	Quasi Peak	Average
0.15 – 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 – 30	73	60	60	50

**Note 1 – The lower limit shall apply at the transition frequencies.**

Table 2. Conducted Emissions Limits – FCC Limits from Section 15.107(a)(b)

## 1. Occupied Bandwidth

<b>Test Requirement(s):</b>	15.247(a)(2), ANSI C63.10	<b>Test Engineer(s):</b>	Hoosam B.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	04/14/17

**Test Procedure:** As required by 47 CFR 15.247(a): For Frequency hopping systems operating in the 2400-2483.5 MHz band: measurements to be made with 20dB bandwidth for frequency hopping systems.

Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer. The measured highest peak power was set relative to zero dB reference. The RBW of the Spectrum Analyzer was set to 100kHz and VBW>RBW. Measurements were carried out at the low, mid and high channels of the TX band at the output terminals of the EUT.


Frequency (MHz)	Recorded Measurement	Comments
2403	111.41 kHz	2-GFSK
2442	111.48 kHz	2-GFSK
2480	111.4 kHz	2-GFSK
2403	309.28 kHz	4-GFSK
2442	304.98 kHz	4-GFSK
2480	304.48 kHz	4-GFSK

**Table 3. Occupied Bandwidth Summary, Test Results**


Frequency (MHz)	Recorded Measurement	Comments
2403	95.24 kHz	2-GFSK
2442	94.74 kHz	2-GFSK
2480	95.02 kHz	2-GFSK
2403	250.67 kHz	4-GFSK
2442	247.43 kHz	4-GFSK
2480	250.04 kHz	4-GFSK

**Table 4. 99% Bandwidth, Test Results**


The following pages show measurements of Occupied Bandwidth plots:

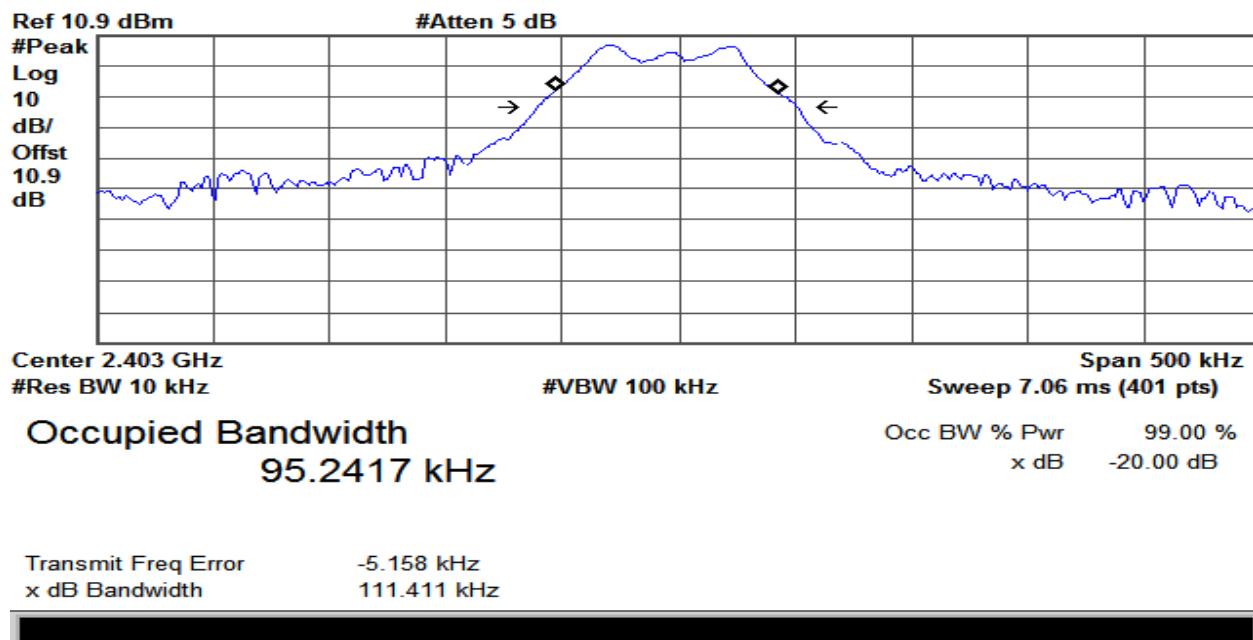


Plot 3 – Lowest Channel – 20dB BW (2-GFSK 50kbps)

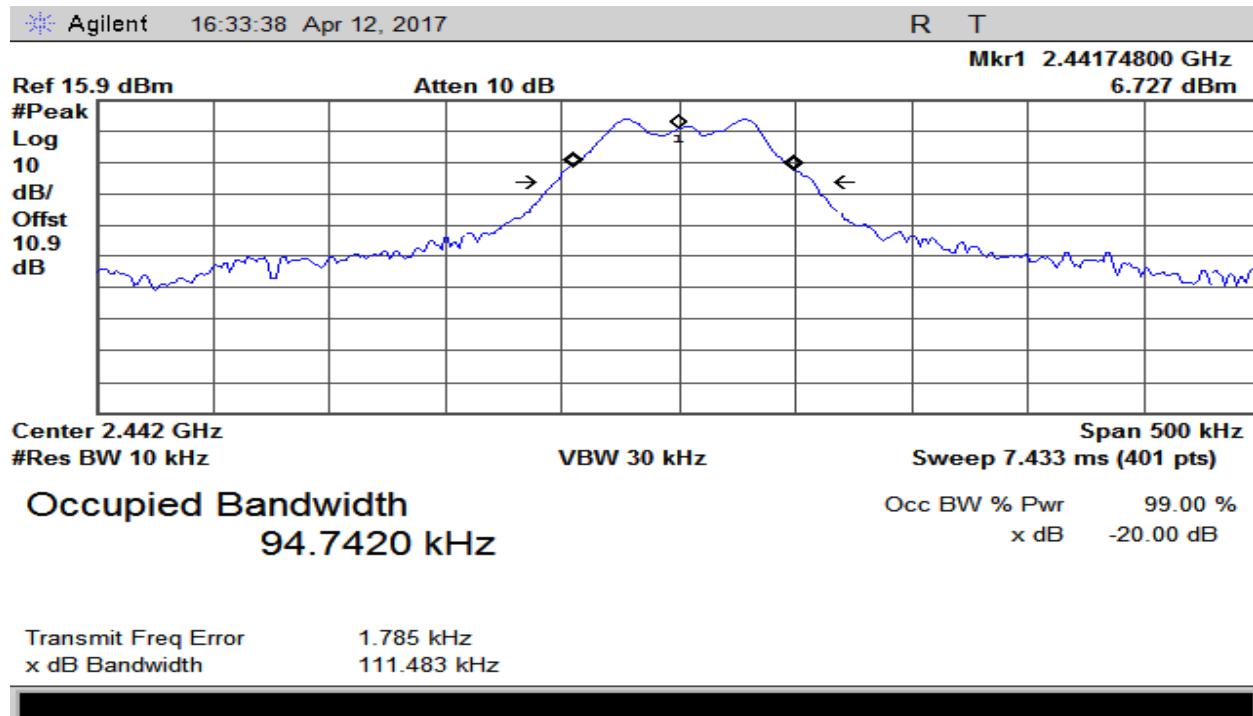


Plot 4 – Middle Channel – 20dB BW (2-GFSK 50kbps)

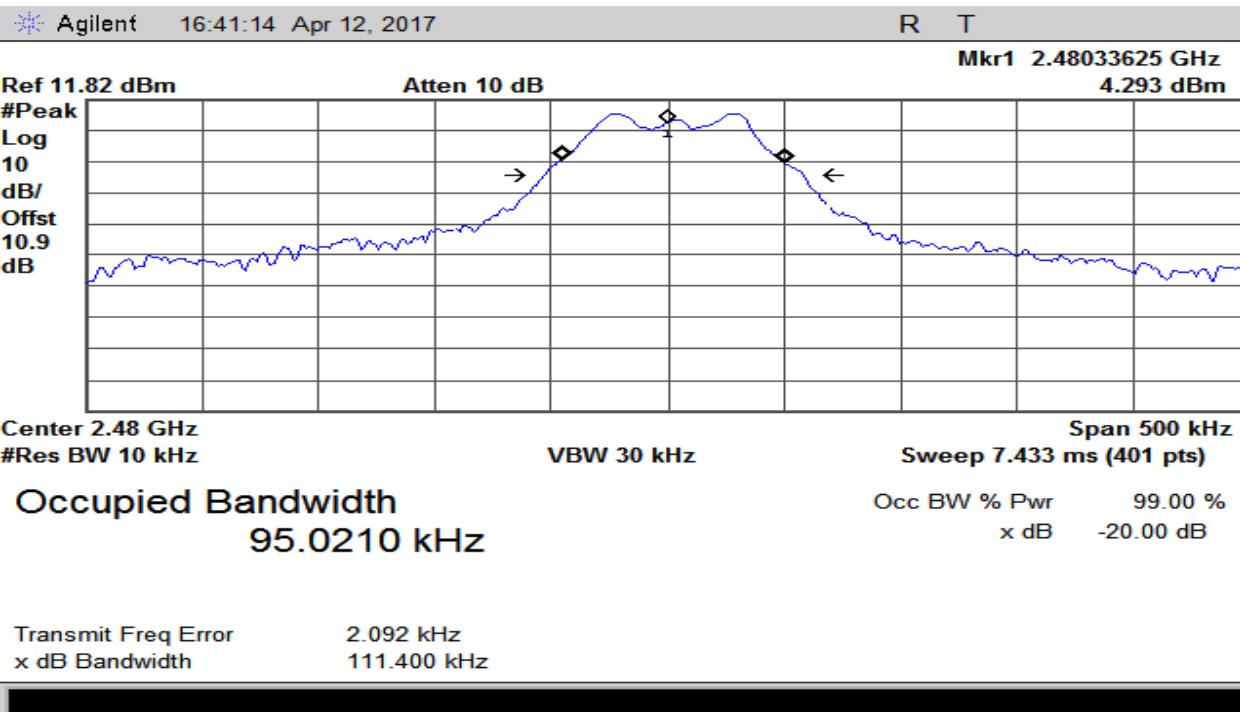


Plot 5 – Highest Channel – 20dB BW (2-GFSK 50kbps)

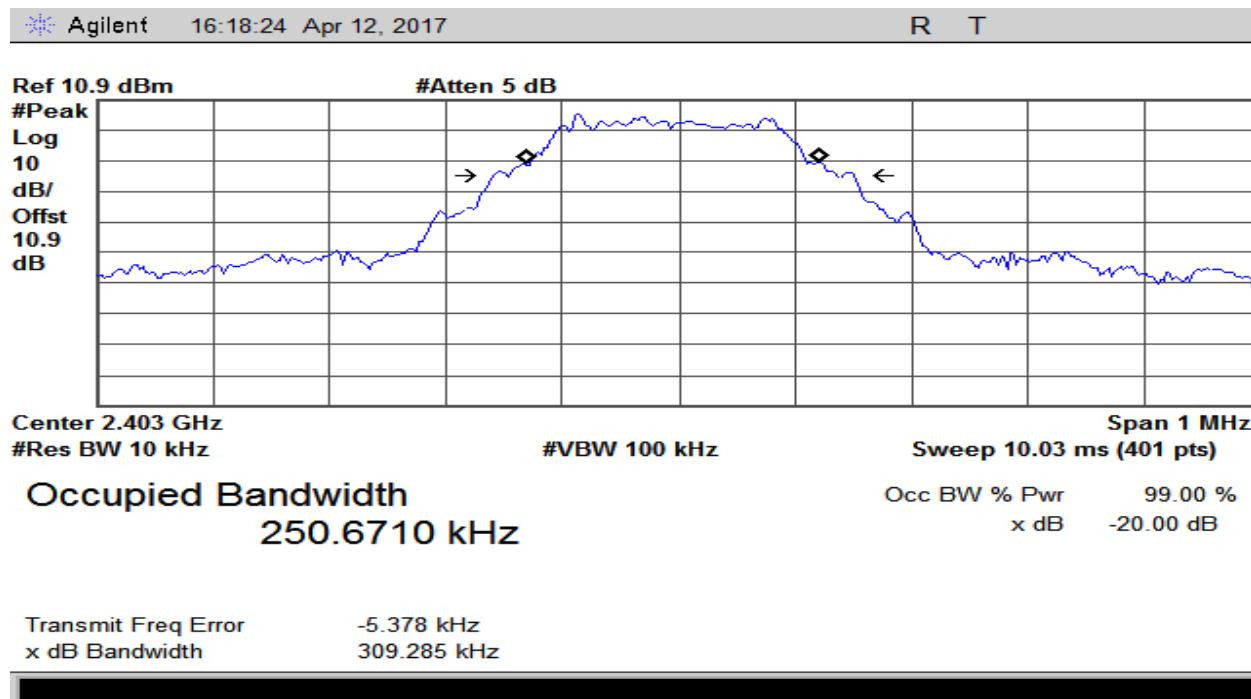

Plot 6 – Lowest Channel – 20dB BW (4-GFSK 200kbps)

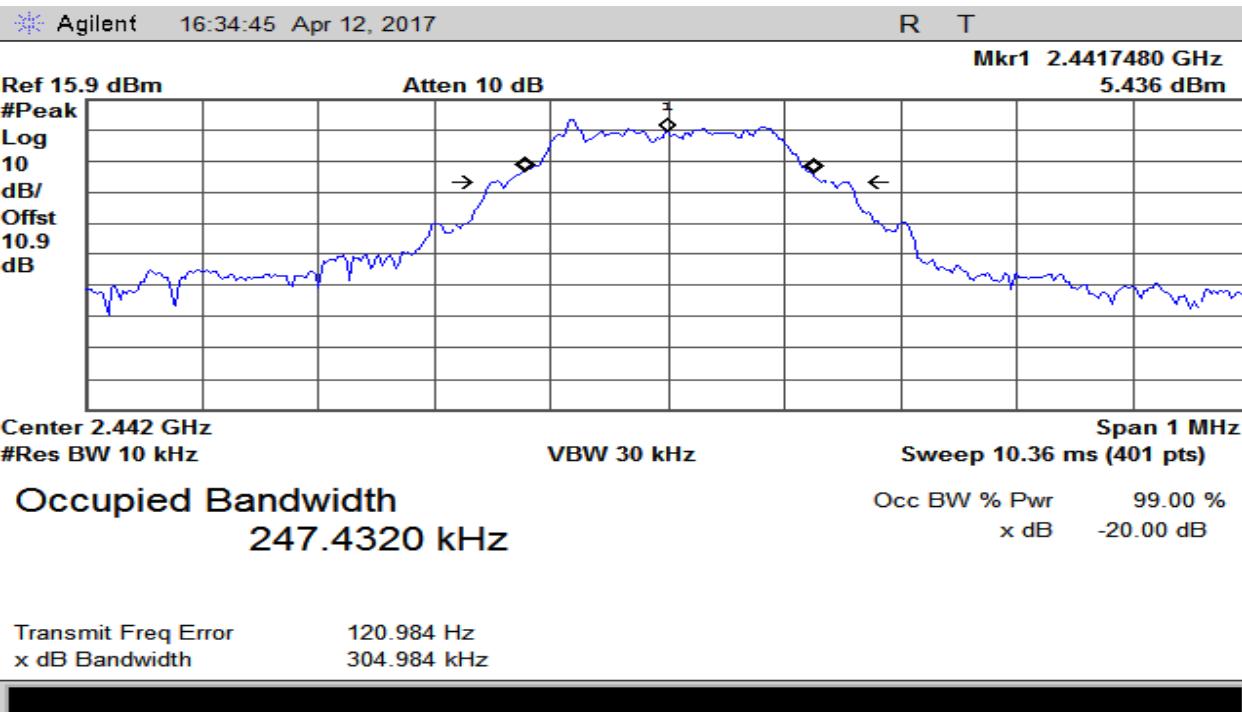

Plot 7 – Middle Channel – 20dB BW (4-GFSK 200kbps)

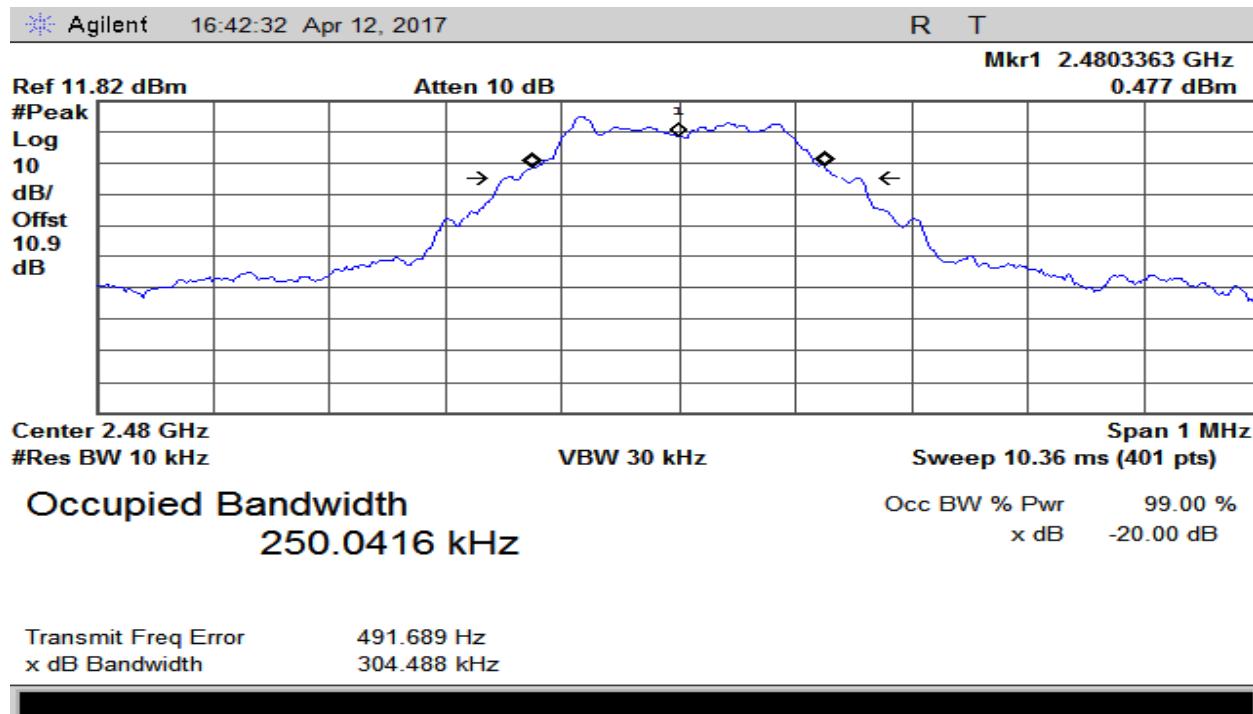

Plot 8 – Highest Channel – 20dB BW (4-GFSK 200kbps)

## 2. RF Power Output

<b>Test Requirement(s):</b>	§15.247(b)(3)	<b>Test Engineer(s):</b>	Hoosam B.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	04/12/17

**Test Procedures:** As required by 47 CFR 15.247(b)(3), RF Power output measurements were made at the RF output terminals of the EUT

Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer capable of making power measurements. Measurements were made at the low, mid, and high channels of the entire frequency band.


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Specification Limit
2403	7.38	0.0054	0.125W
2442	9.40	0.0087	0.125W
2480	7.09	0.0051	0.125W

Table 5. RF Power Output, Test Results

Agilent 16:04:15 Apr 12, 2017

R T

Mkr1 2.4028500 GHz  
7.381 dBm

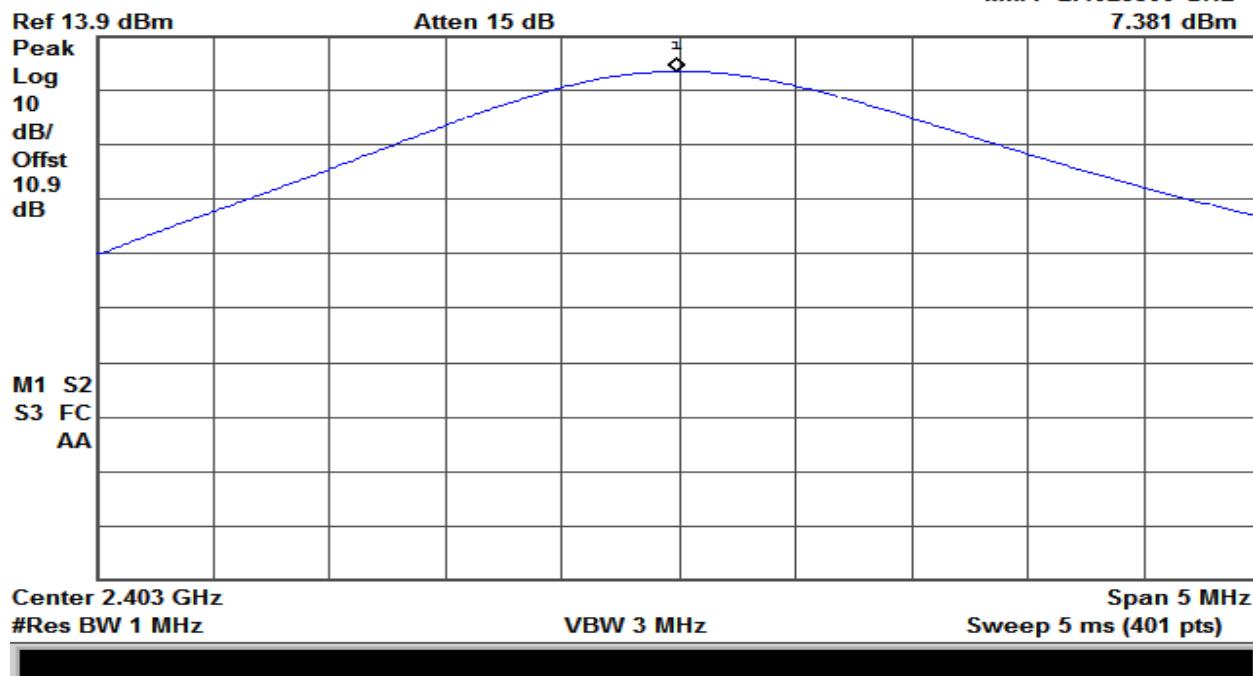


Plot 9 – Output Power – Lowest Channel


Agilent 16:06:27 Apr 12, 2017

R T

Mkr1 2.4417375 GHz  
9.401 dBm

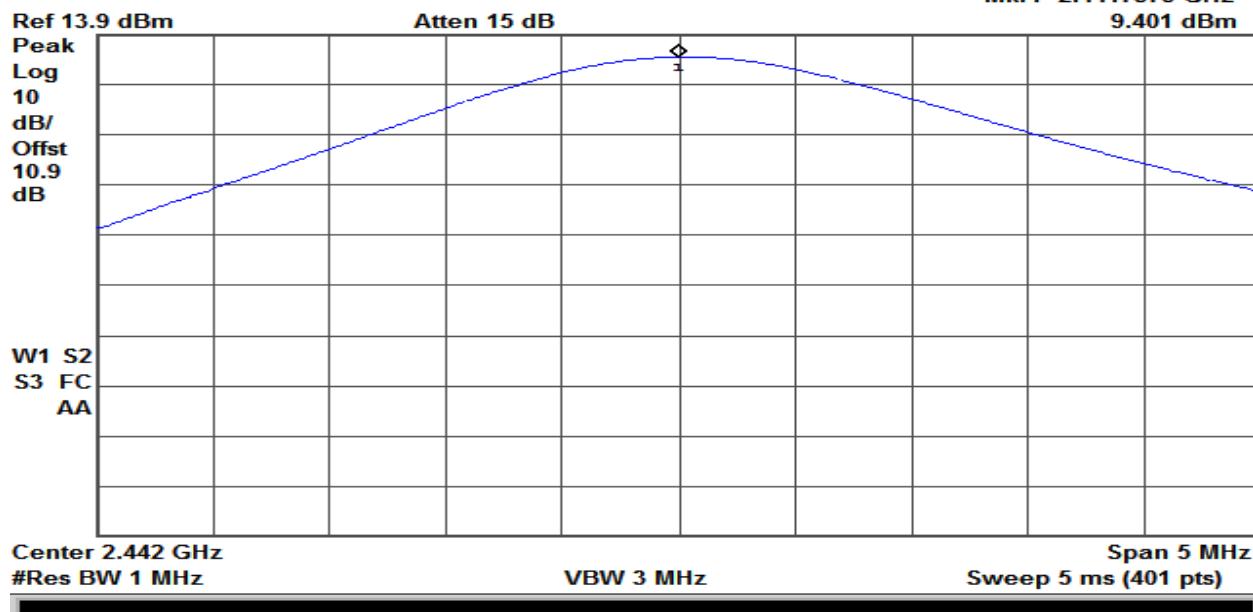

Plot 10 – Output Power – Middle Channel

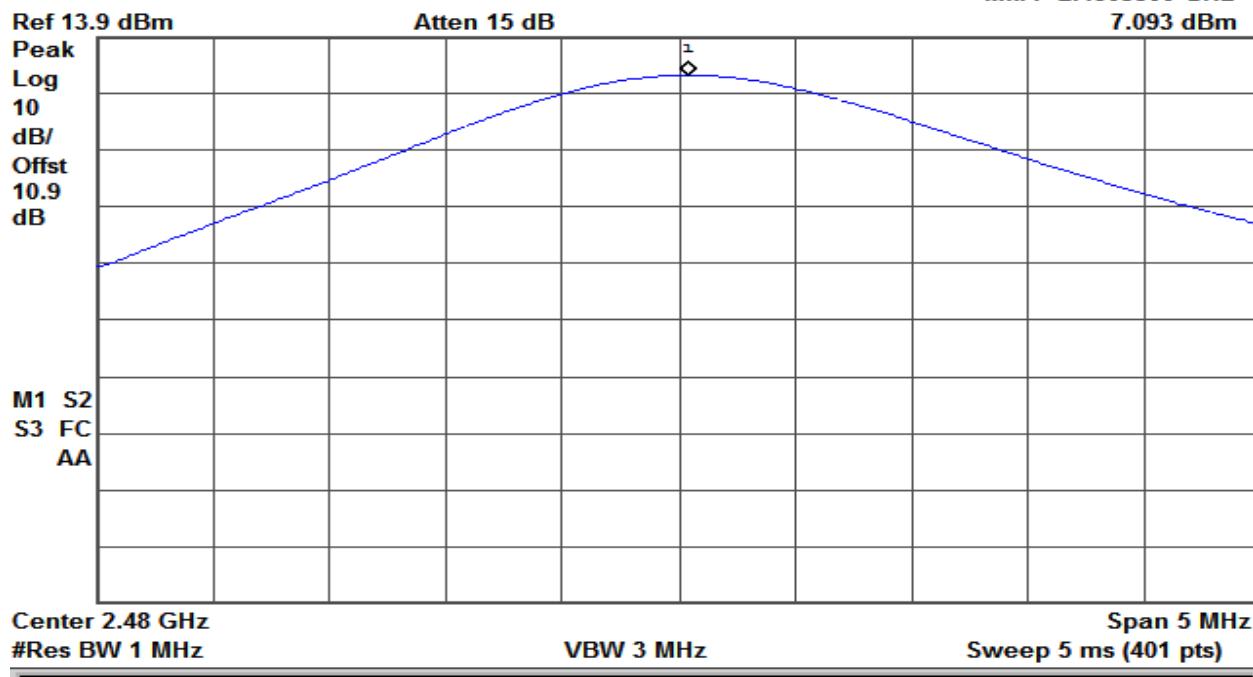

**Plot 11 – Output Power – Highest Channel**

### 3. Conducted Spurious Emissions

<b>Test Requirement(s):</b>	§15.247(c)	<b>Test Engineer(s):</b>	Hoosam B.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	03/20/17

<b>Test Procedures:</b>	<p>As required by 47 CFR 15.247(c): In any 100kHz bandwidth the frequency band in which the spread spectrum or digitally modulation intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either and RF conducted or a radiated measurement. Conducted spurious emissions at antenna terminal measurements were made at the RF output antenna terminal of the EUT.</p> <p>Customer provided a test mode internal to the EUT to control the RF modulation, and frequency channel. The EUT was connected through an attenuator to a Spectrum Analyzer with RBW set to 100kHz and <math>VBW \geq RBW</math>. The Spectrum Analyzer was set to sweep from 30MHz up to <math>10^{th}</math> harmonic of the fundamental or 40GHz whichever is the lesser. Measurements were made at the low, mid and high frequency of the transmit band.</p>
-------------------------	---

### Test Data

Frequency (GHz)	Measured Level (dBm)	Limit (dBm)
2.465	-37.94	-12.6

Table 6. Lowest Channel – Conducted Spurious Emissions, Test Results

Frequency (GHz)	Measured Level (dBm)	Limit (dBm)
21.51	-52.73	-10.6


Table 7. Middle Channel – Conducted Spurious Emissions, Test Results

Frequency (GHz)	Measured Level (dBm)	Limit (dBm)
19.55	-50.63	-12.9


Table 8. Highest Channel – Conducted Spurious Emissions, Test Results

Agilent 15:08:56 Mar 20, 2017


T

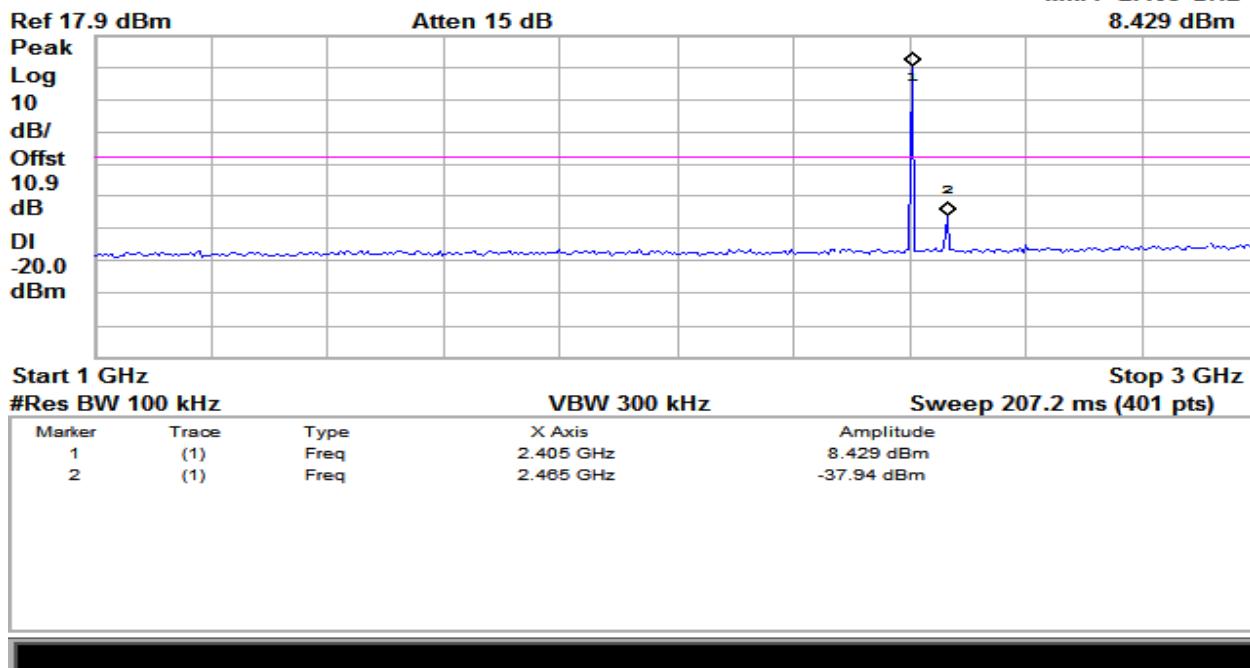 Mkr1 2.405 GHz  
8.429 dBm


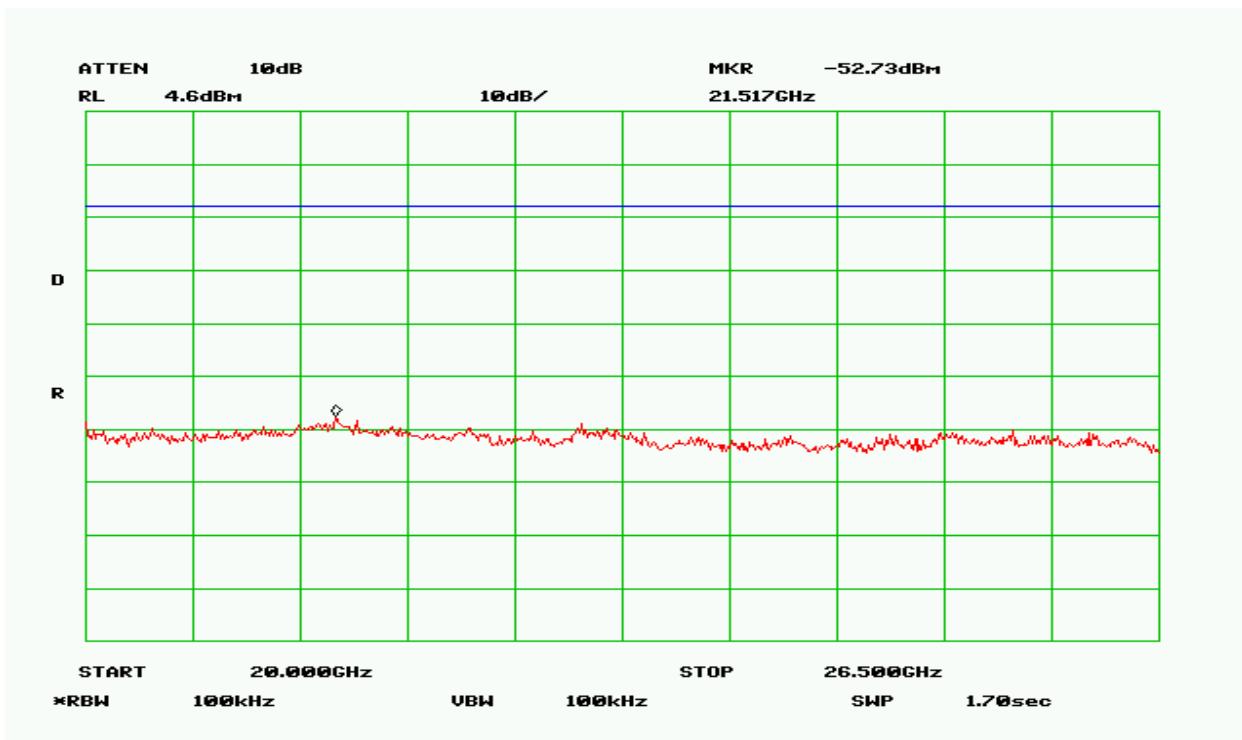
Plot 12 – Low Band – 30MHz to 3GHz

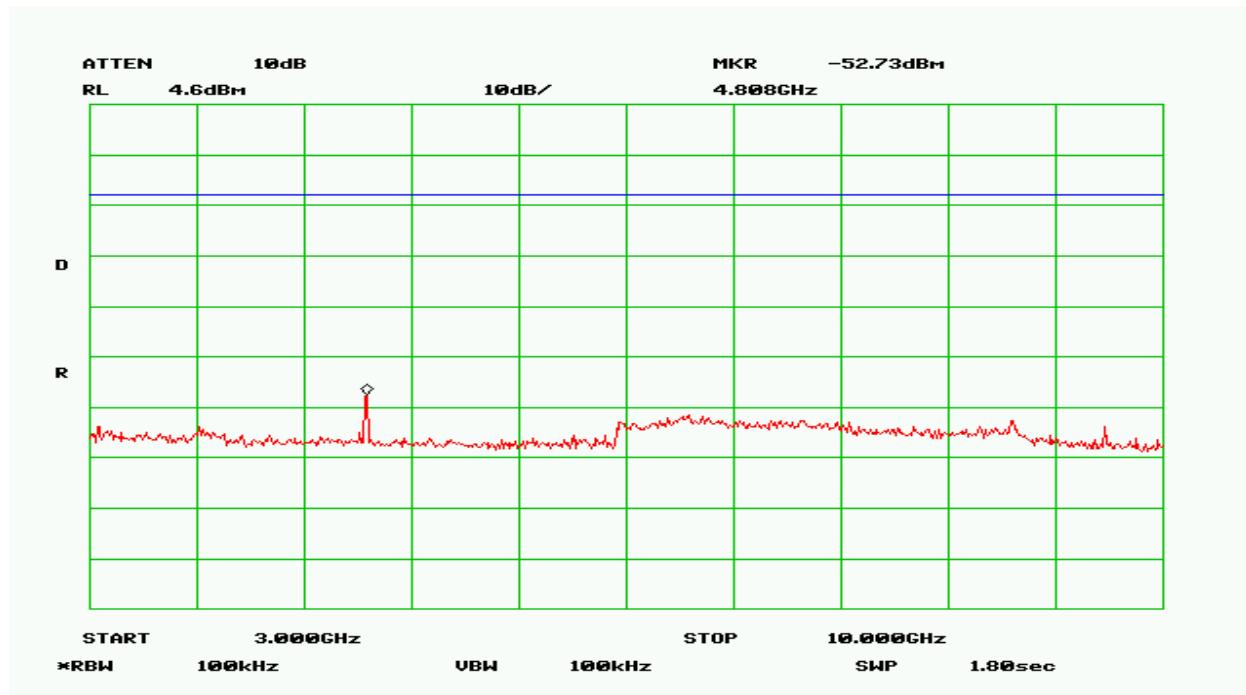


Plot 13 – Low Band – 3GHz to 10GHz

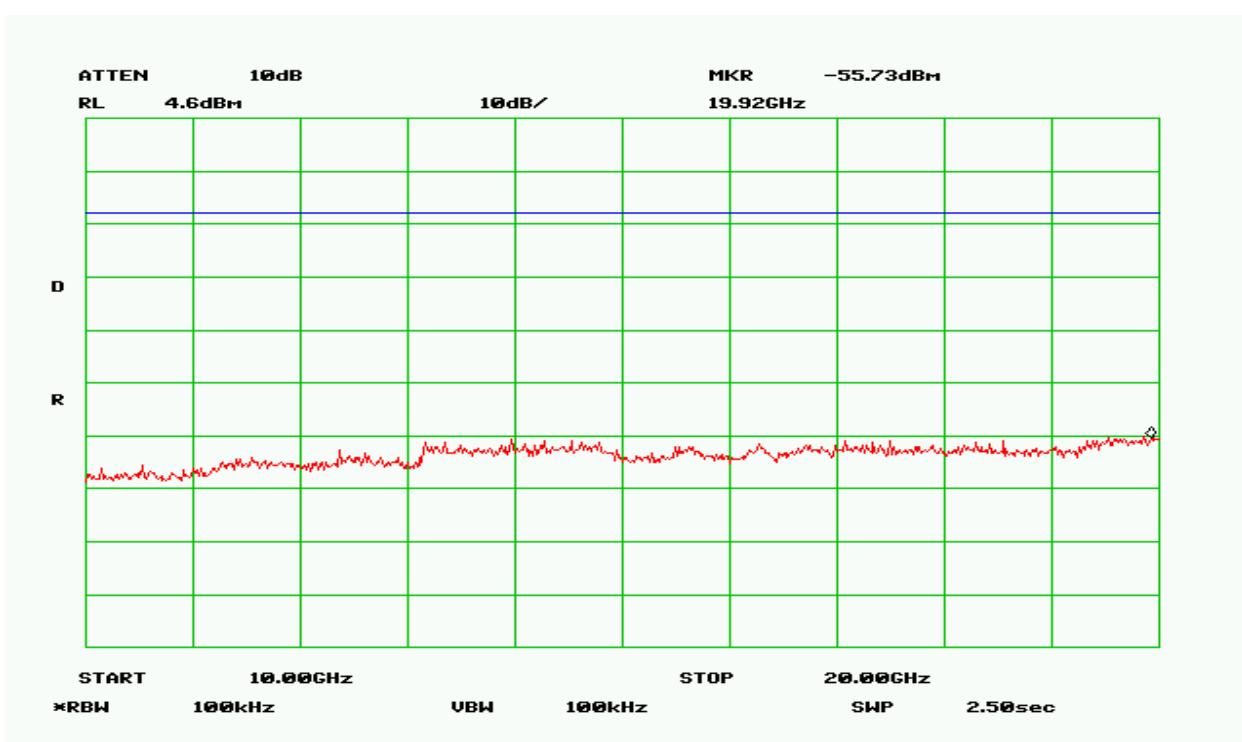


Plot 14 – Low Band – 10GHz to 20GHz




Plot 15 – Low Band – 20GHz to 26.5GHz

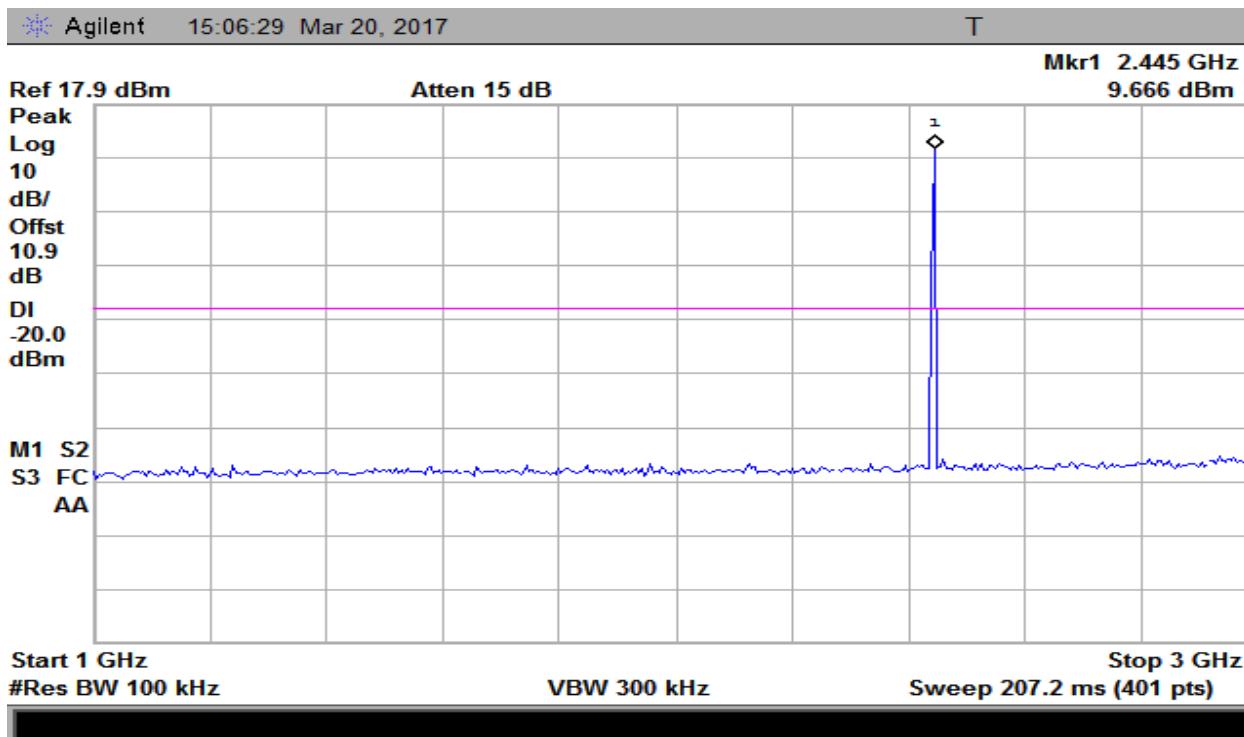


Plot 16 – Mid Band – 30MHz to 3GHz

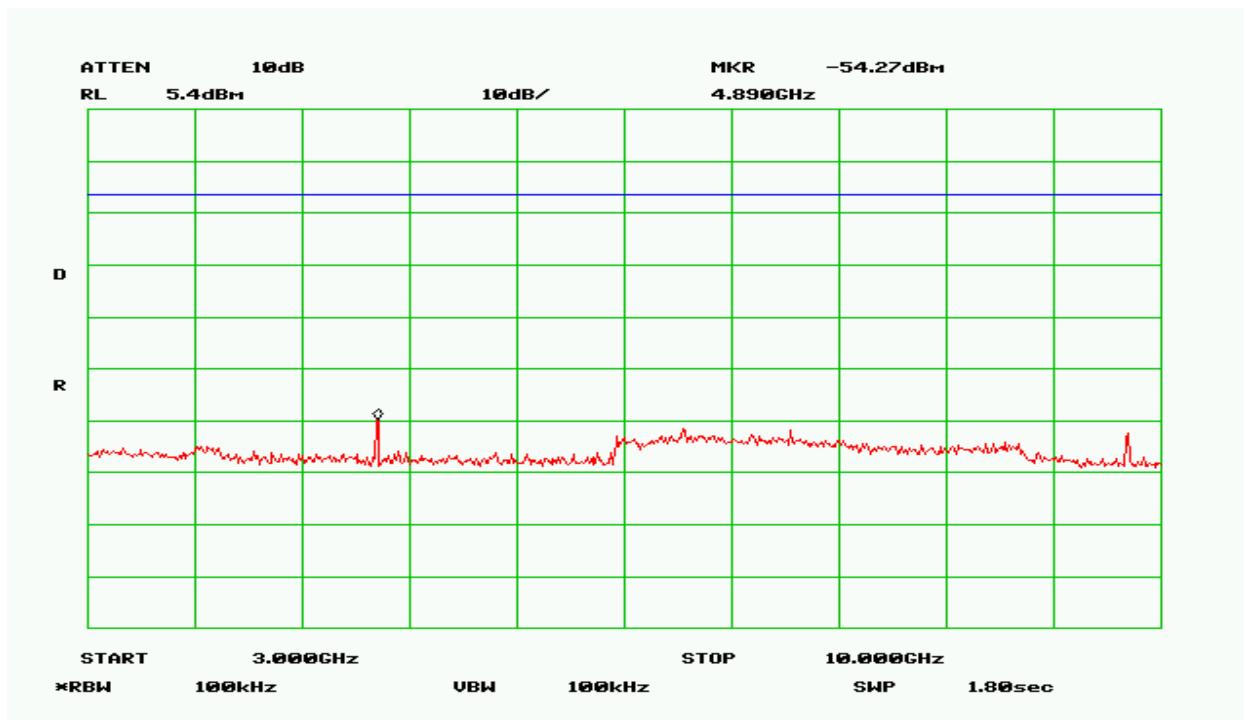


Plot 17 – Mid Band – 3GHz to 10GHz

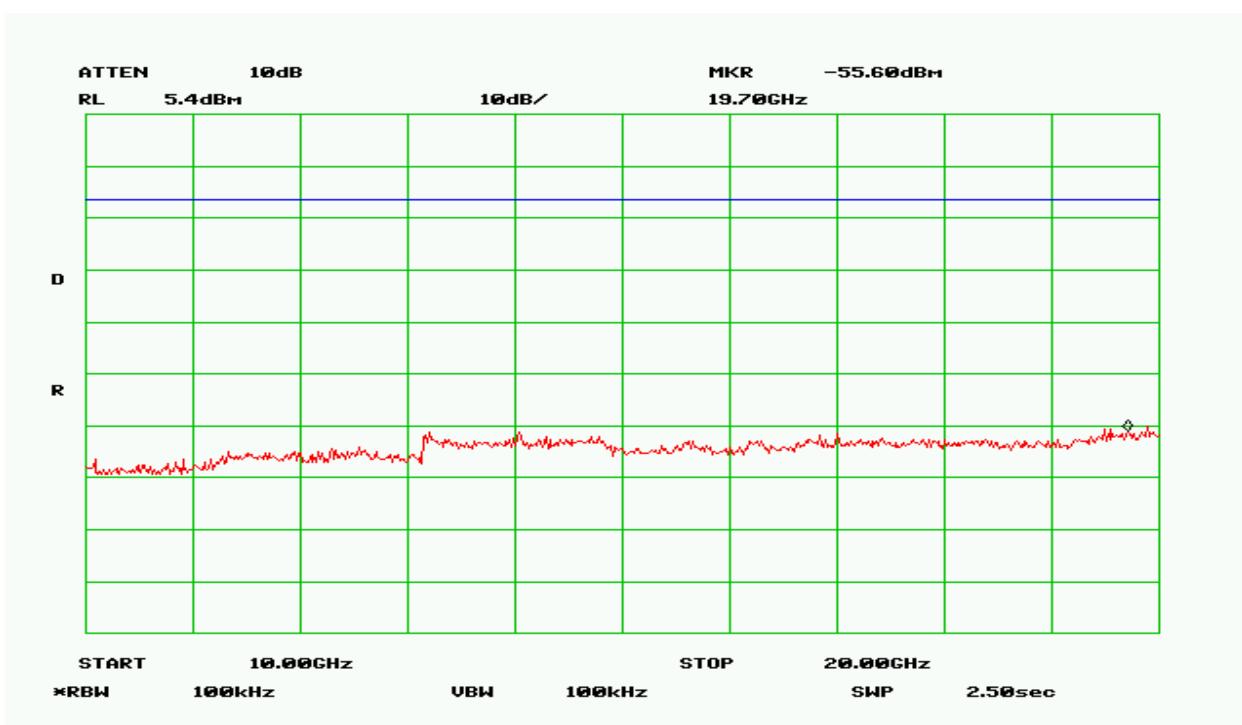


Plot 18 – Mid Band – 10GHz to 20GHz

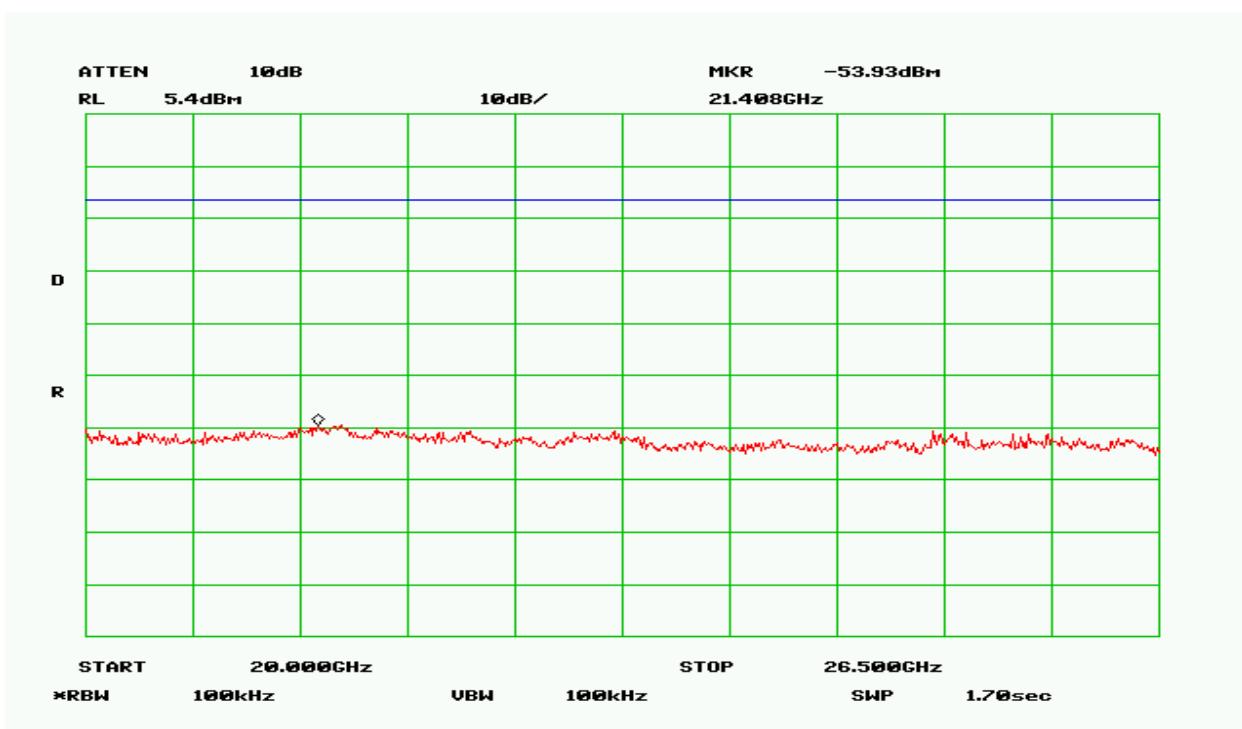


Plot 19 – Mid Band – 20GHz to 26.5GHz

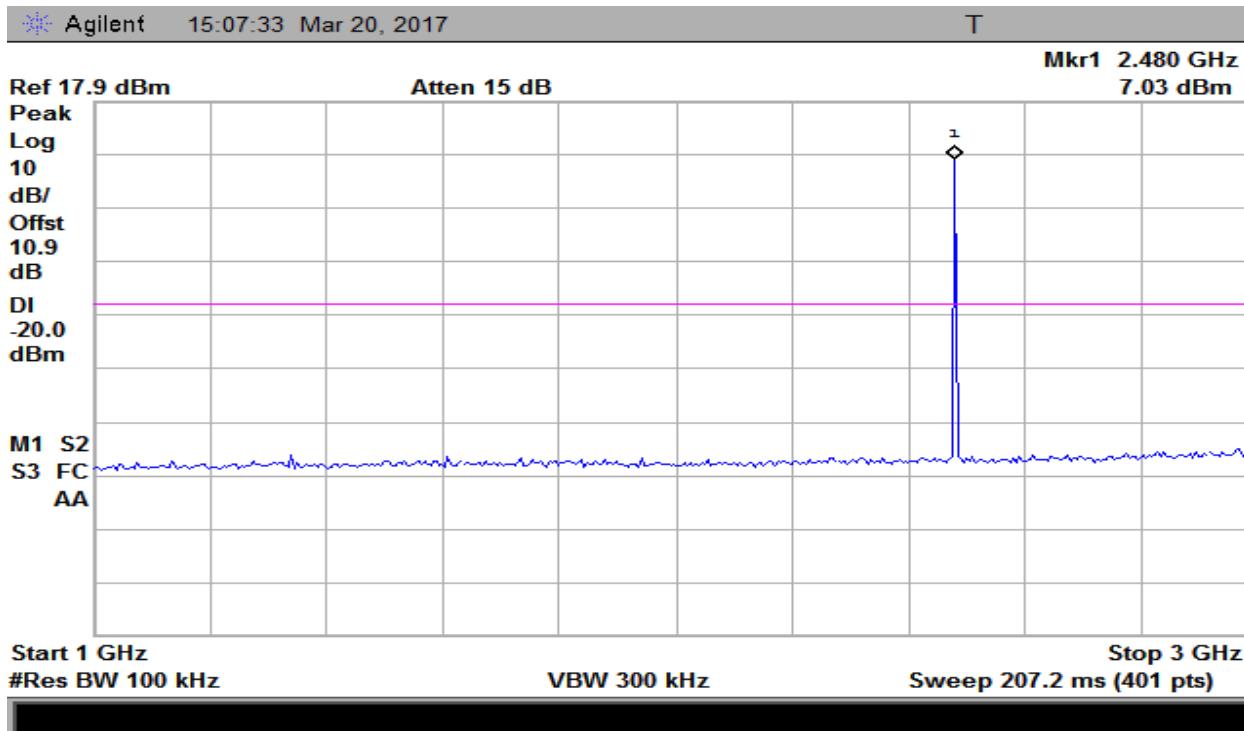


Plot 20 – High Band – 30MHz to 3GHz

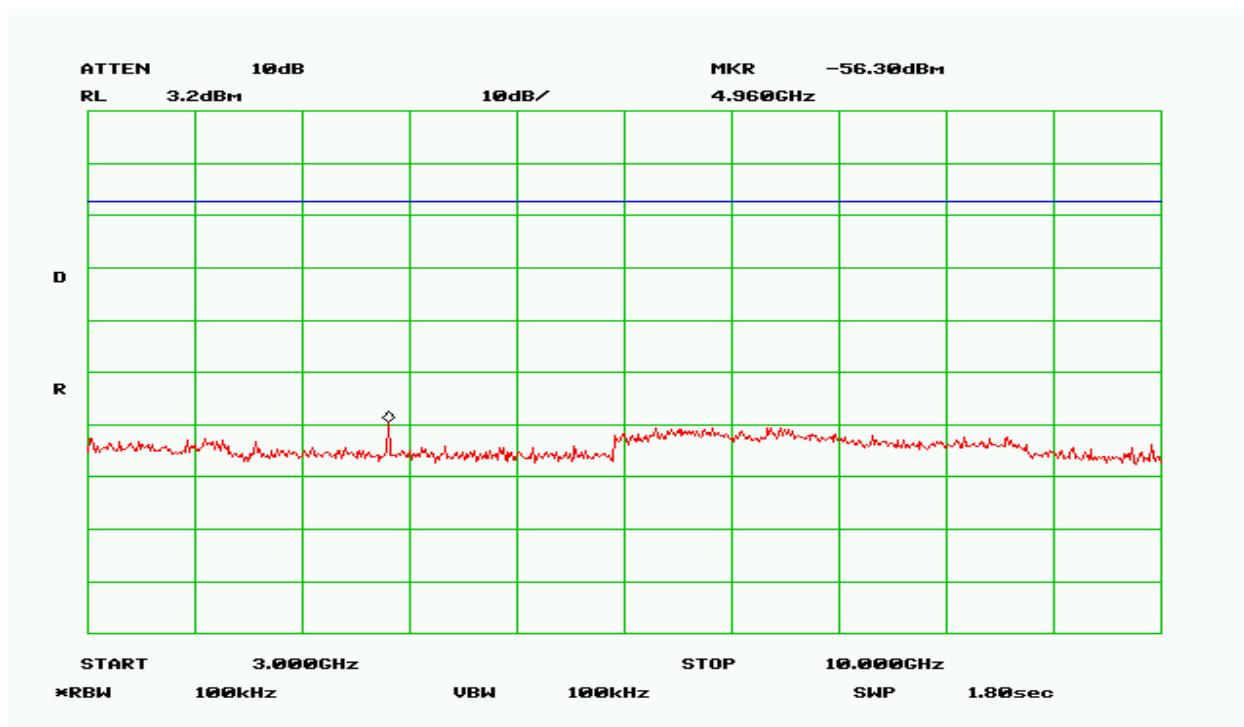

Plot 21 – High Band – 3GHz to 10GHz

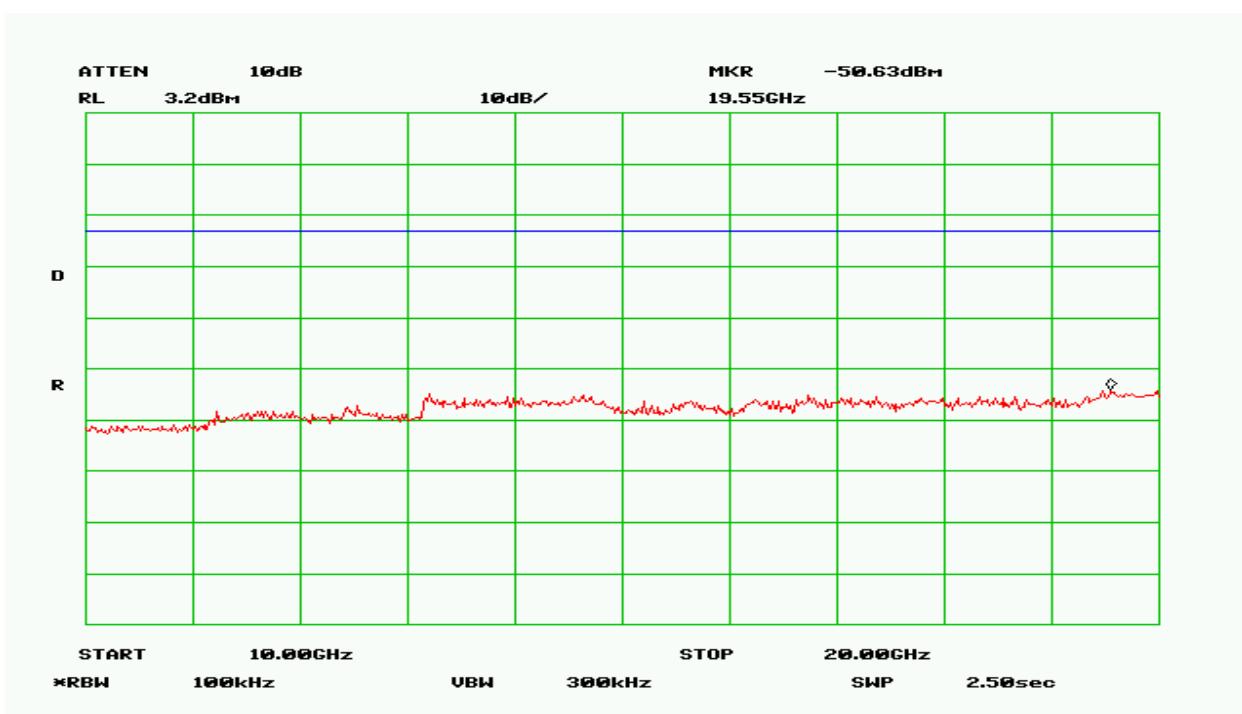

Plot 22 – High Band – 10GHz to 20GHz

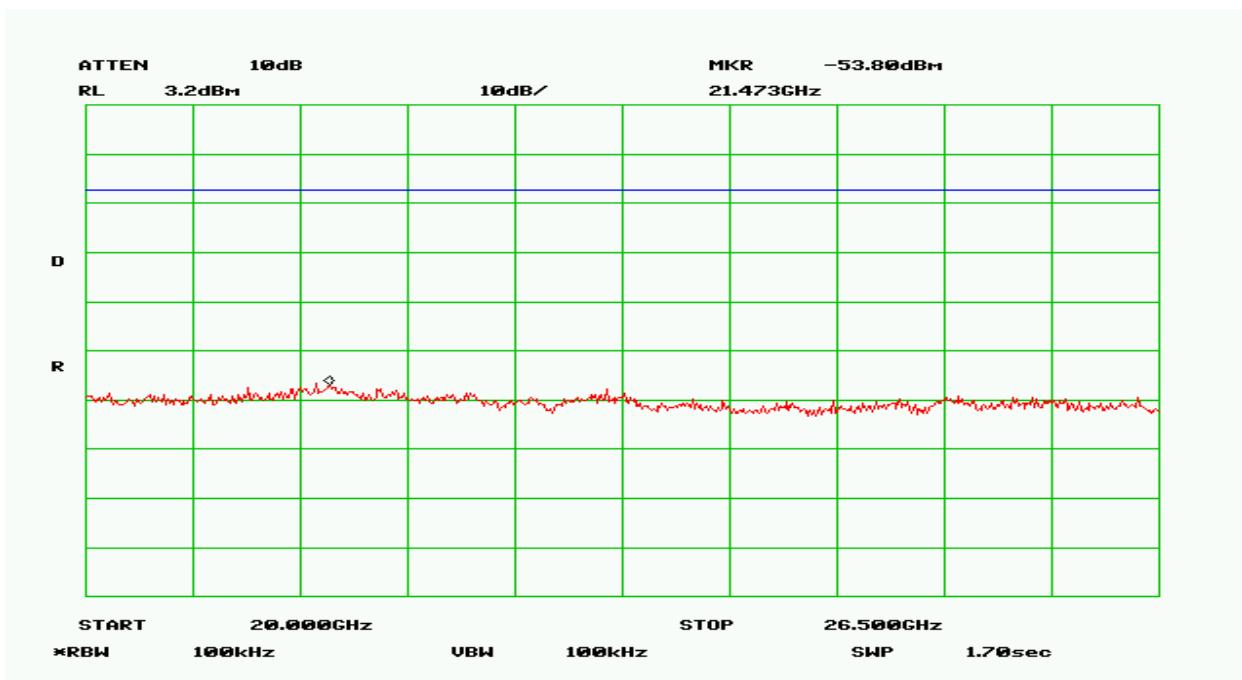

Plot 23 – High Band – 20GHz to 26.5GHz

#### 4. Radiated Spurious Emissions and Restricted Band

<b>Test Requirement(s):</b>	§15.247(d), 15.209(a), 15.205	<b>Test Engineer(s):</b>	Jerry M.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	04/14/17

**Test Procedures:** As required by 47 CFR 15.247, Radiated spurious measurements were made in accordance with the procedures of the FCC Public Notice DA 00-705.

The EUT was placed on a non-reflective table inside a 3 meter semi-anechoic room. The EUT was set on continuous transmit.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The frequency range up to the 10<sup>th</sup> harmonic was investigated.

To get a maximum emission level from the EUT, the EUT was rotated throughout the X-axis, Y-axis and Z-axis. Worst case is X-axis

<b>Detector Setting</b>	<b>Resolution Bandwidth</b>	<b>Video Bandwidth</b>	<b>Span</b>
Peak	1MHz	1MHz	As necessary
Average	1MHz	10Hz	0 Hz

Table 9. Analyzer Settings

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m))	Average Limit (dBuV/m)
4806	46.17	115.5	-	95.5
9612	45.0	115.5	-	95.5

Table 10 - Spurious Radiated Emission Data – Low Band –PCB Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
4883.4	45.5	115.5	-	95.5
9766.8	44.67	115.5	-	95.5

Table 11– Spurious Radiated Emission Data – Mid Band- PCB Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
4960	41.17	115.5	-	95.5
9921.2	45.33	115.5	-	95.5

Table 12- Spurious Radiated Emission Data – High Band - PCB Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m))	Average Limit (dBuV/m)
4806	46.67	115.5	-	95.5
9612	43.33	115.5	-	95.5

Table 10 - Spurious Radiated Emission Data – Low Band –External Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
4883.4	44.43	115.5	-	95.5
9766.8	43.83	115.5	-	95.5

Table 11– Spurious Radiated Emission Data – Mid Band- External Antenna

Frequency (MHz)	Peak Amplitude (dbuV/m)	Peak Limit (dBuV/m)	Average Amplitude (dBuV/m)	Average Limit (dBuV/m)
4960	44.5	115.5	-	95.5
9921.2	45.83	115.5	-	95.5

Table 12- Spurious Radiated Emission Data – High Band – External Antenna

**NOTE 1:** There were no detectable emissions above the 2nd harmonic.

**NOTE 2:** Frequency marked with “\*” falls under the restricted band

## 6. Emissions At Band Edges

<b>Test Requirement(s):</b>	§15.247(d)	<b>Test Engineer(s):</b>	Hoosam B.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	03/12/17


**Test Procedures:** As required by 47 CFR 15.247, Band edge radiated emissions measurements were made at the RF antenna output terminals of the EUT using the marker-delta method.

The EUT was placed on a wooden table inside a 3 meter semi-anechoic chamber. The EUT was set on continuous transmit.


The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The EUT was set up at maximum power, first on the lowest operating channel, then on the highest operating channel of the transmit band.

Frequency (MHz)	Measured Level	Detector	Limit	Comments
2400	-58.01dB	Peak	-20dBc	2-GFSK
2483.5	-58.01dB	Peak	-20dBc	2-GFSK
2400	-58.19dB	Peak	-20dBc	4-GFSK
2483.5	-58.01dB	Peak	-20dBc	4-GFSK


Table 16 – Band Edge Emissions Summary

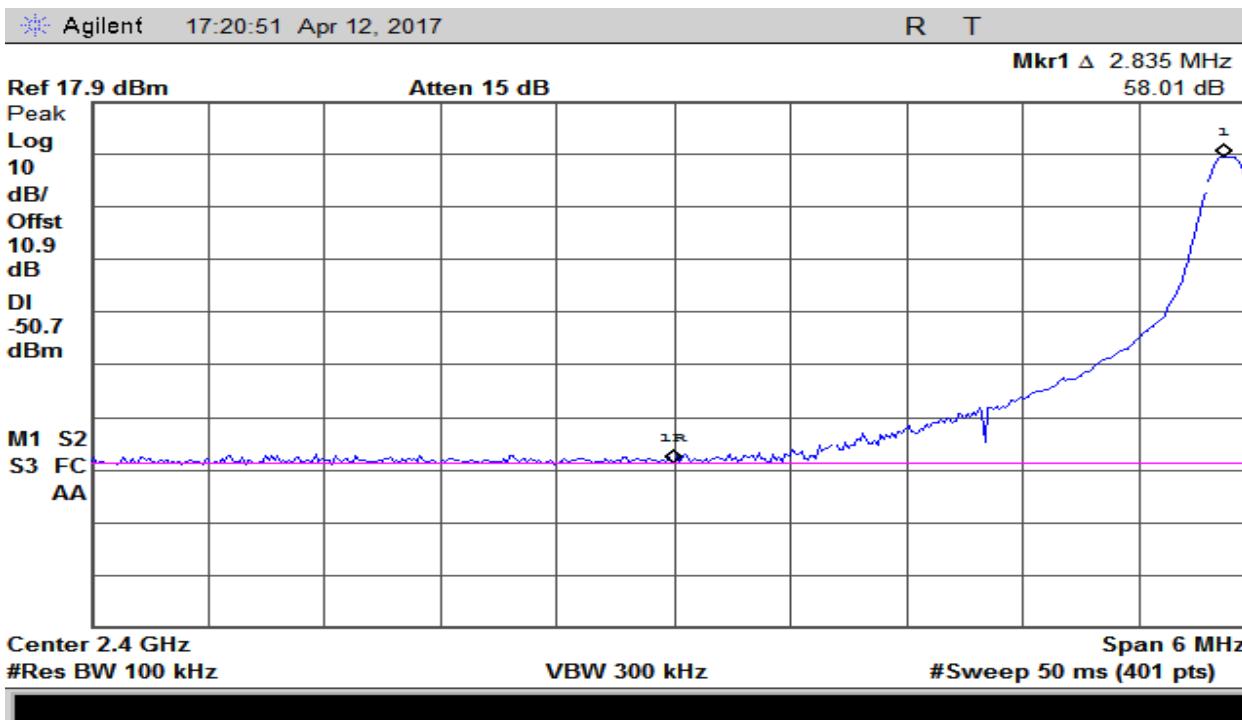


Plot 24 - Band Edge – Low Channel (2-GFSK)

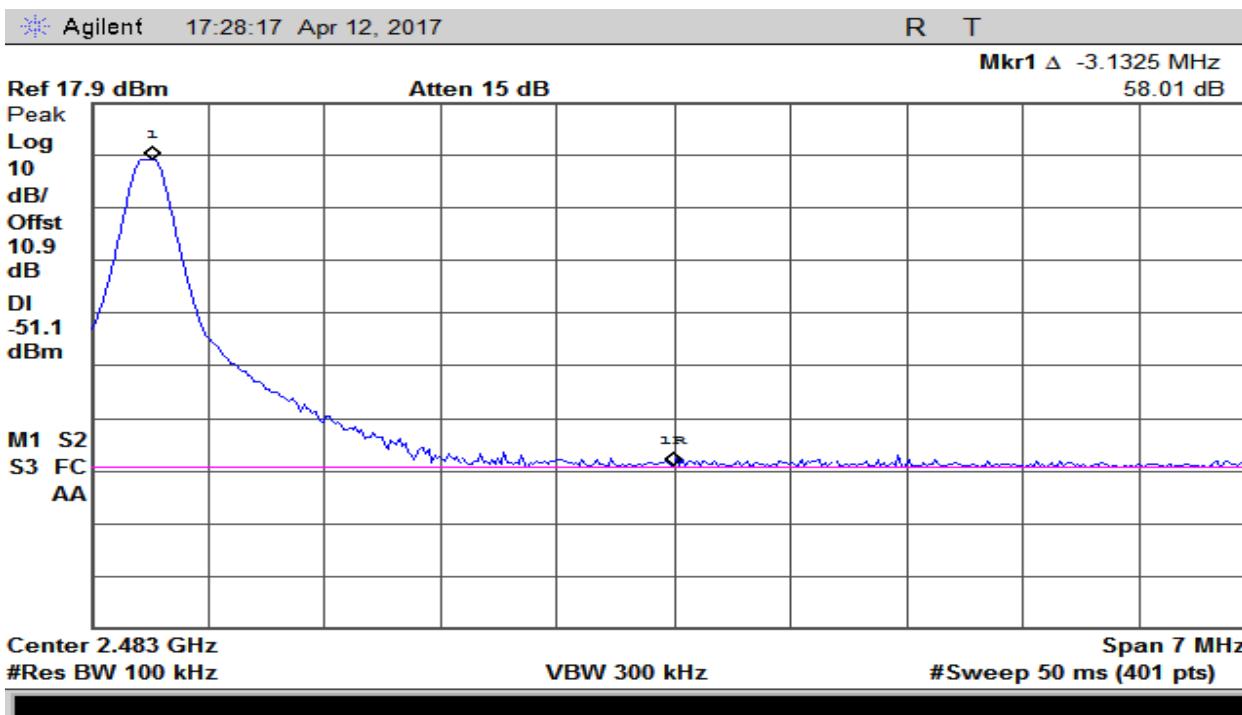

Plot 25 – Band Edge - High Channel (2-GFSK)

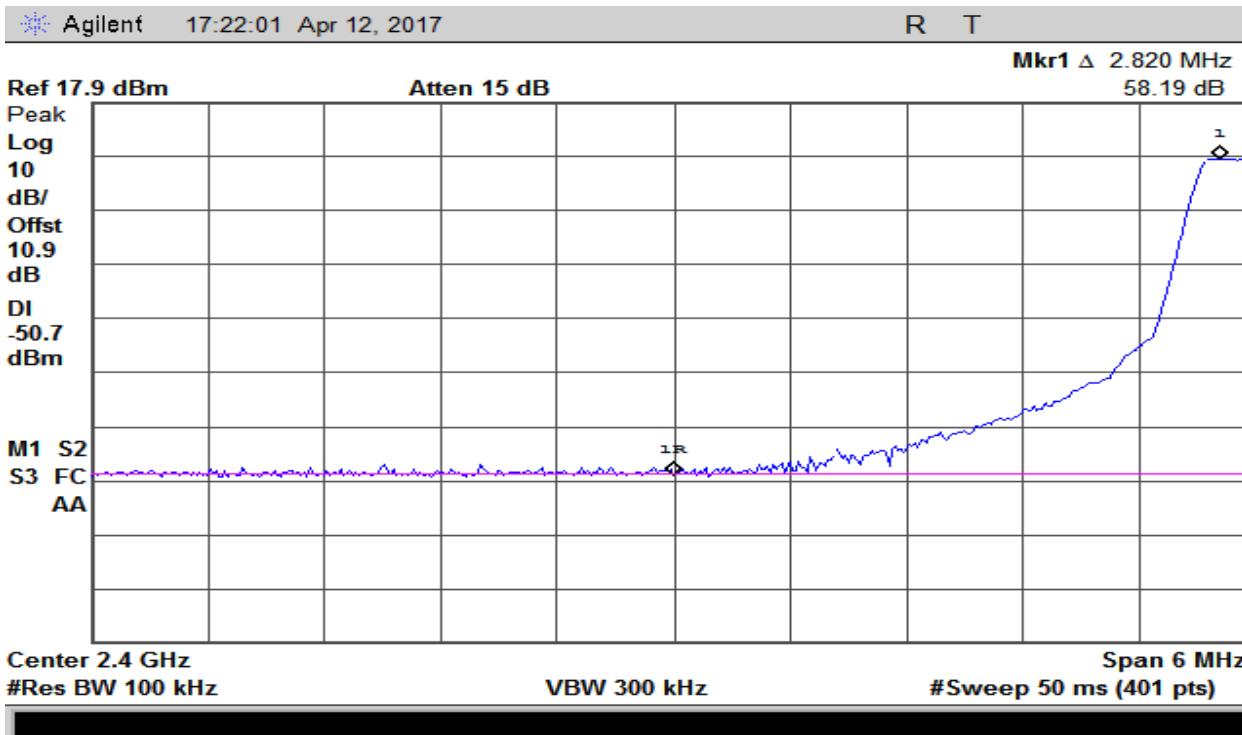

Plot 26 - Band Edge – Low Channel (4-GFSK)

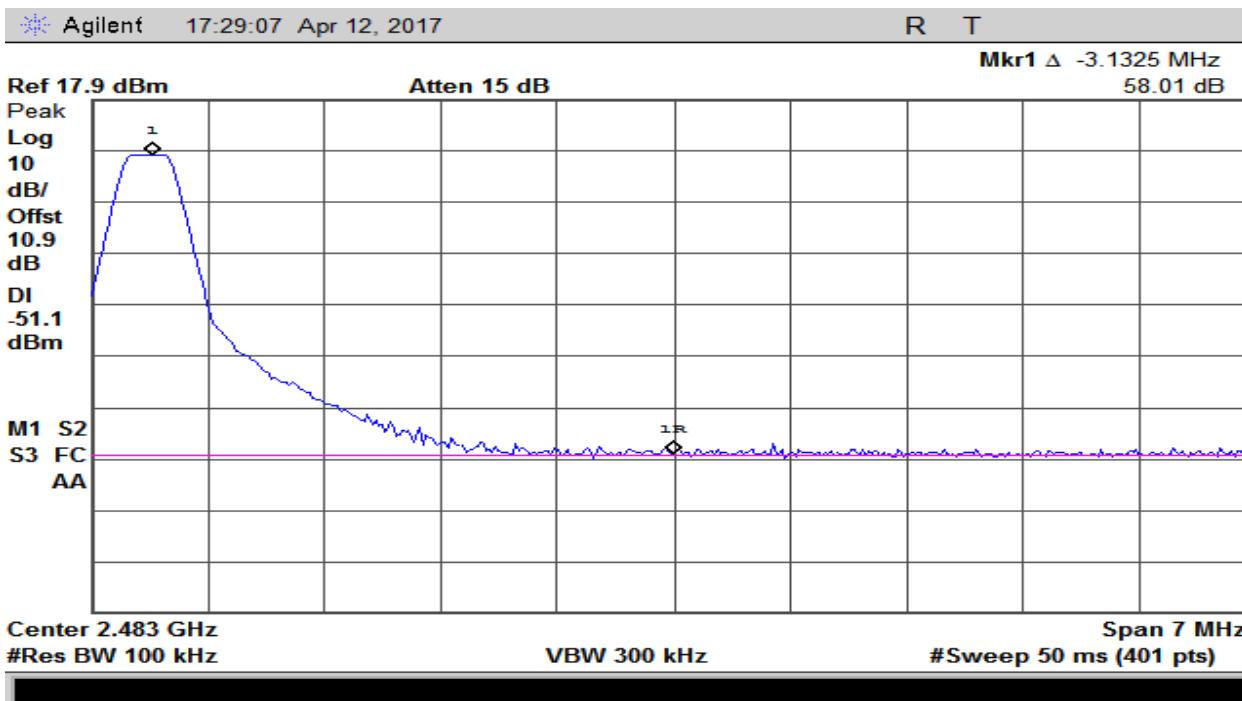

Plot 27 - Band Edge – Low Channel (4-GFSK)

## 7. Time of Occupancy (Dwell Time)

<b>Test Requirement(s):</b>	§15.247(a)	<b>Test Engineer(s):</b>	Hoosam B.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	03/12/17

**Test Procedures:** As required by 47 CFR 15.247(a), for frequency hopping spread spectrum operating at 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Measurements were made with device hopping function enabled.


The EUT output was connected directly to the spectrum analyzer through an attenuator. The measurements were made at the RF antenna output terminals of the EUT.

<b>Detector Setting</b>	<b>Resolution Bandwidth</b>	<b>Video Bandwidth</b>	<b>Span</b>
Peak	1MHz	1MHz	0


Table 17 – Analyzer settings

**Calculation:** At channel 2442MHz for 2-GFSK Modulation, there is 1 burst in 0.4 seconds. Time period of each burst is 8.625msec. Therefore device meets the 0.4 sec requirement.


At channel 2442MHz for 4-GFSK Modulation, there is 1 burst in 0.4 seconds. Time period of each burst is 2.725msec. Therefore device meets the 0.4 sec requirement.

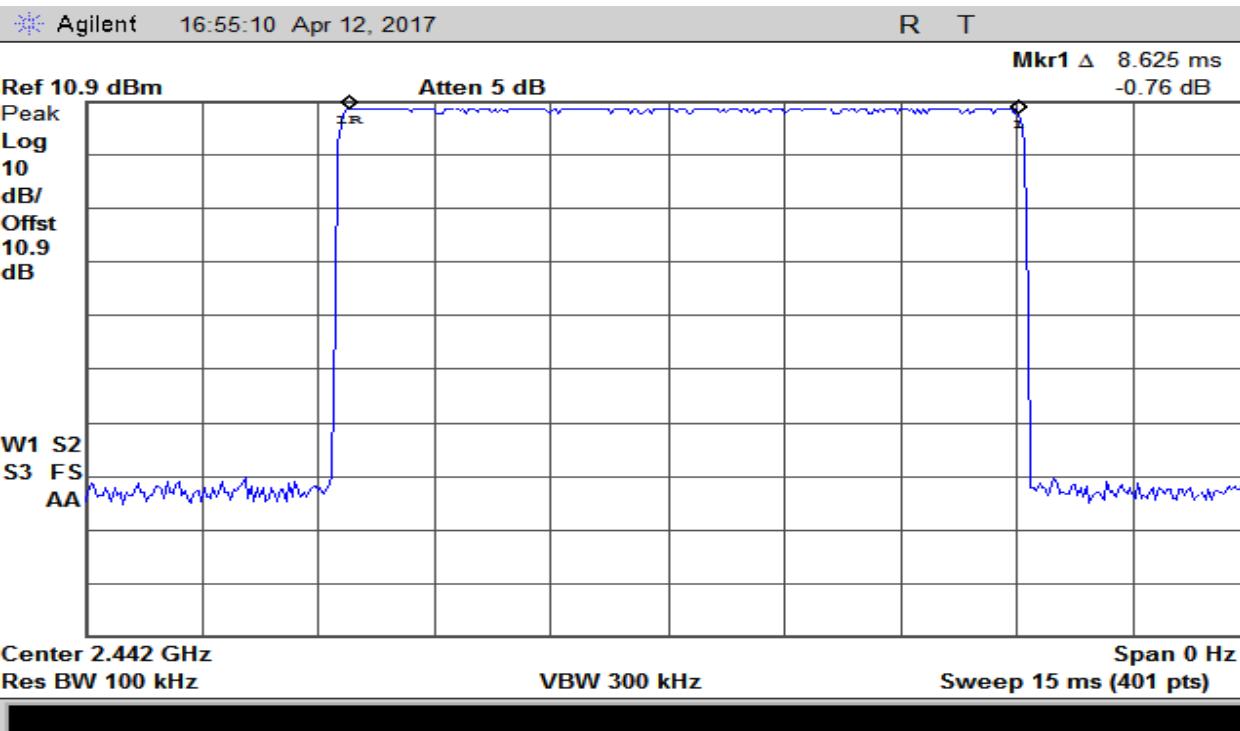


Plot 28 – Dwell Time (2-GFSK)

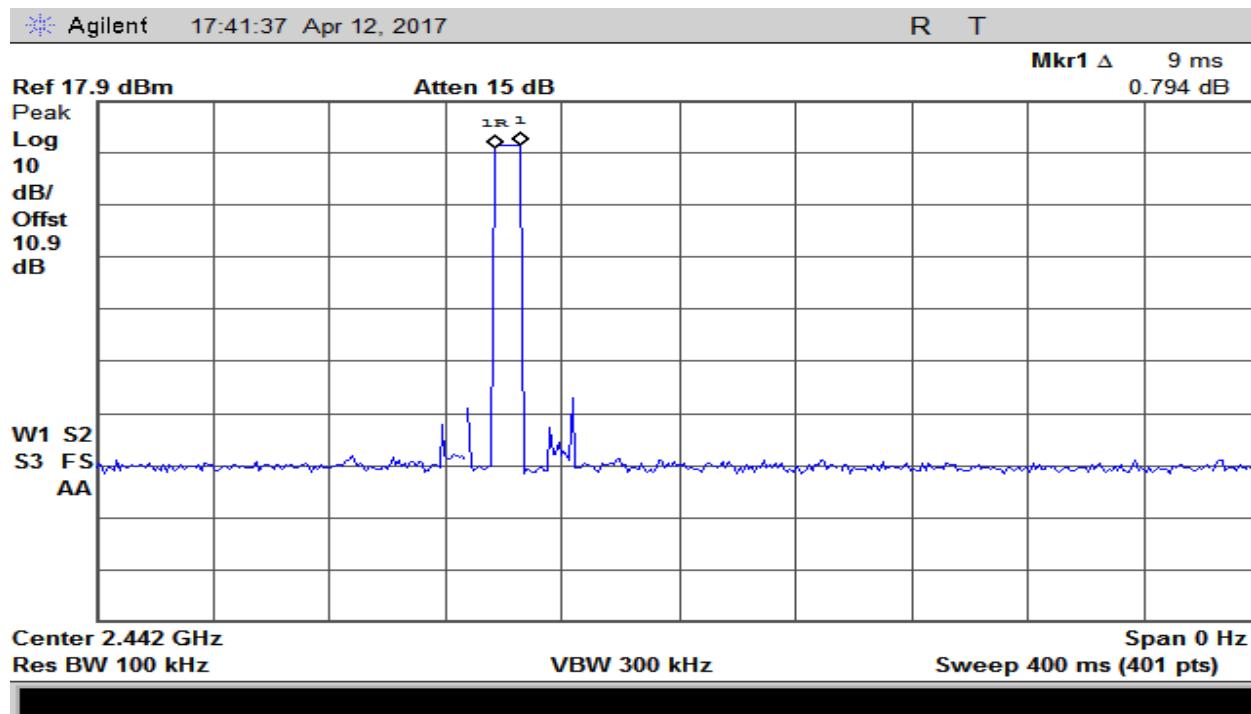

Plot 29 – # of Hops in 0.4 second period – 2-GFSK

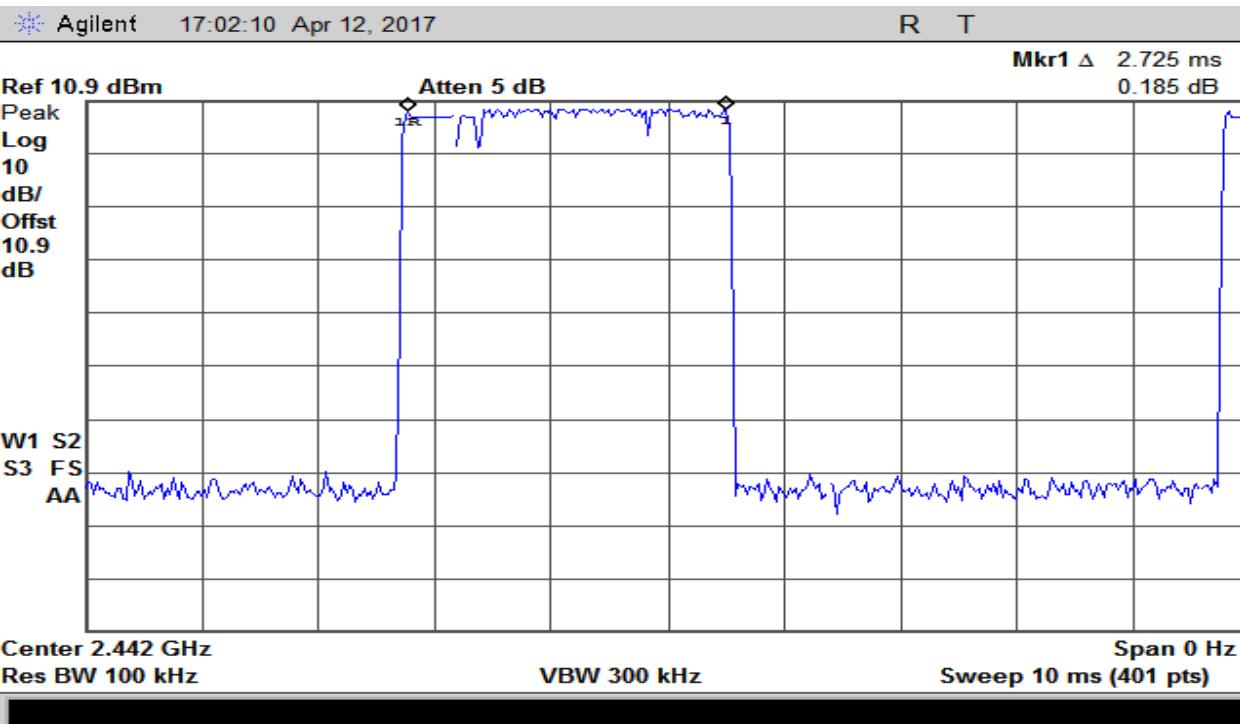

Plot 30 – Dwell Time (4-GFSK)

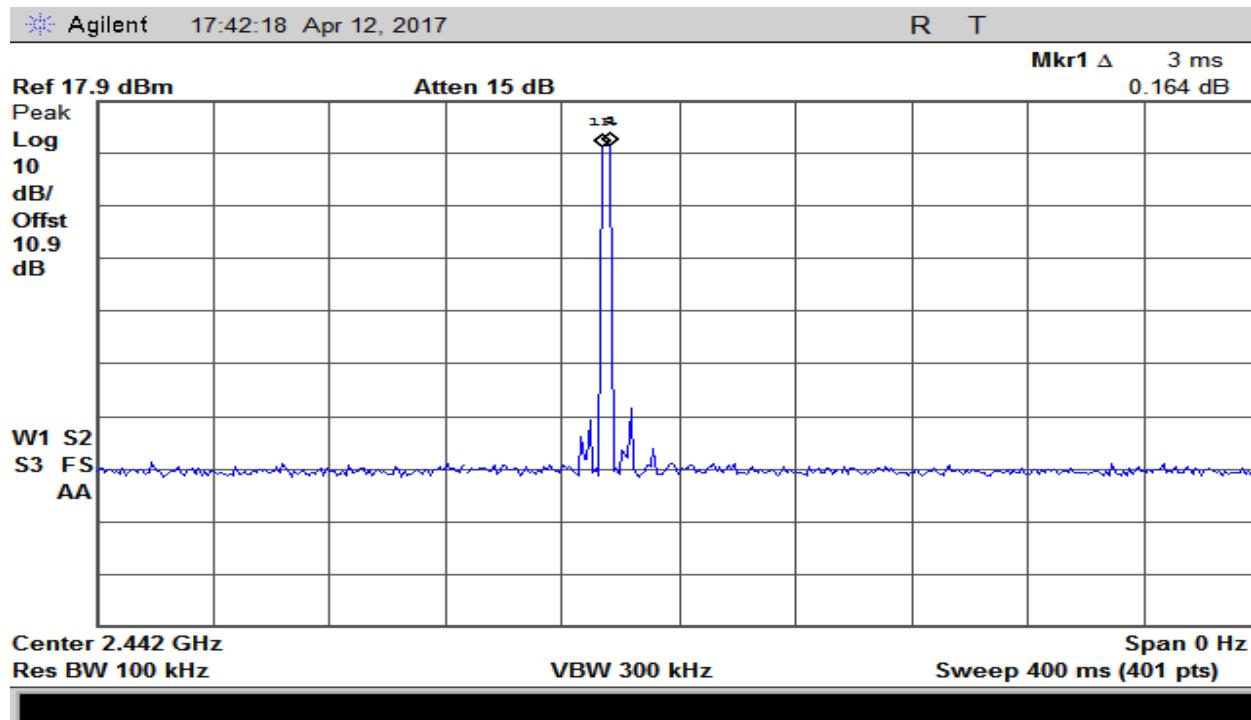


Plot 31 – # of Hops in 0.4 second period – 4-GFSK

## 8. Number of Hopping Frequencies

<b>Test Requirement(s):</b>	§15.247(a)	<b>Test Engineer(s):</b>	Keith T.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	03/20/17

**Test Procedures:** As required by 47 CFR 15.247(a), for frequency hopping spread spectrum operating at 2400MHz-2483.5MHz band. Measurements were made with device hopping function enabled.

The EUT output was connected directly to the spectrum analyzer through an attenuator. The measurements were made at the RF antenna output terminals of the EUT. Peak detector was used and trace was set to max hold

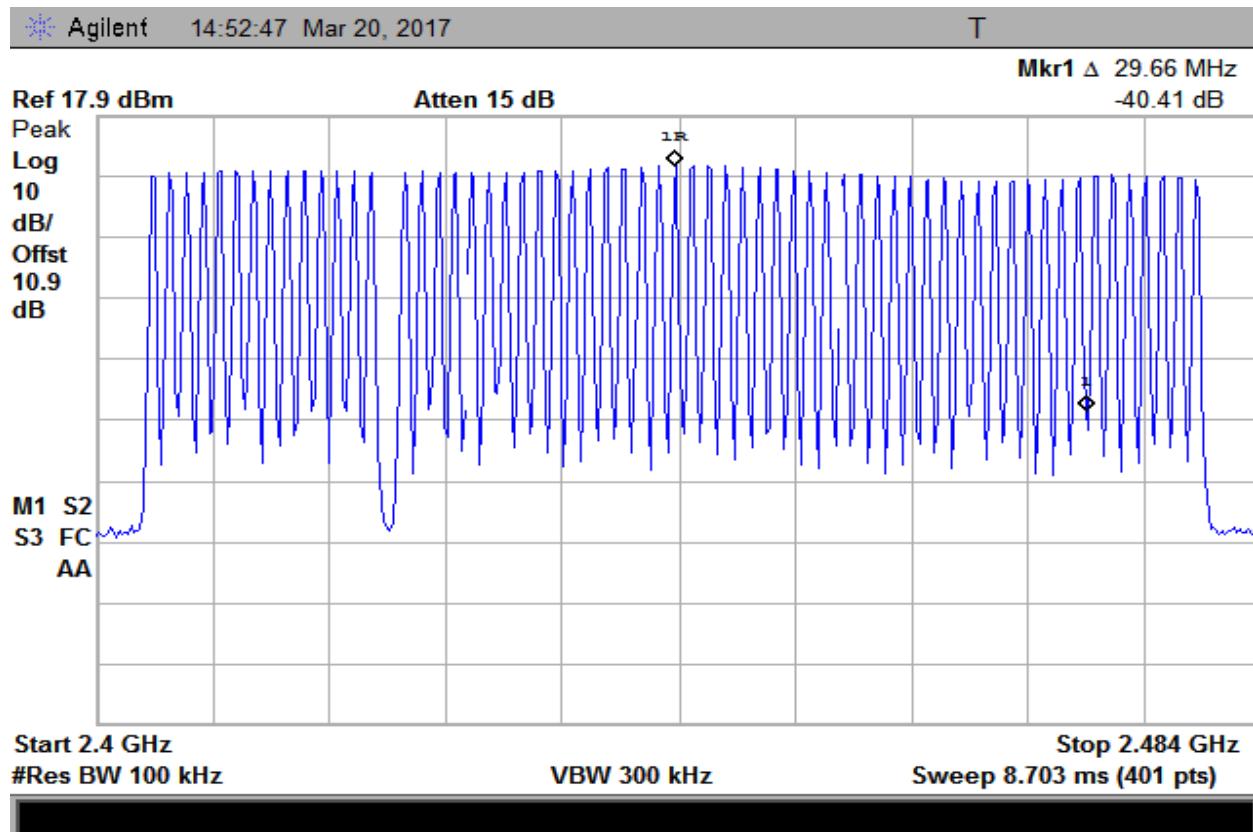

## 9. Carrier Frequency Separation

<b>Test Requirement(s):</b>	§15.247(a)(1)	<b>Test Engineer(s):</b>	Hoosam B.
<b>Test Results:</b>	Pass	<b>Test Date(s):</b>	04/12/17


**Test Procedures:** As required by 47 CFR 15.247(a), for frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Measurements were made with device hopping function enabled.

The EUT output was connected directly to the spectrum analyzer through an attenuator. The measurements were made at the RF antenna output terminals of the EUT. Peak detector was used and trace was set to max hold.


Frequency Measured (MHz)	Frequency Separation (MHz)	Detector	Limit (20dB BW)
2442.0	1.21	Peak	250.6 kHz

Table 18 – Carrier Frequency Separation - Summary

Mkr1  $\Delta$  -1.2150 MHz  
-0.178 dB

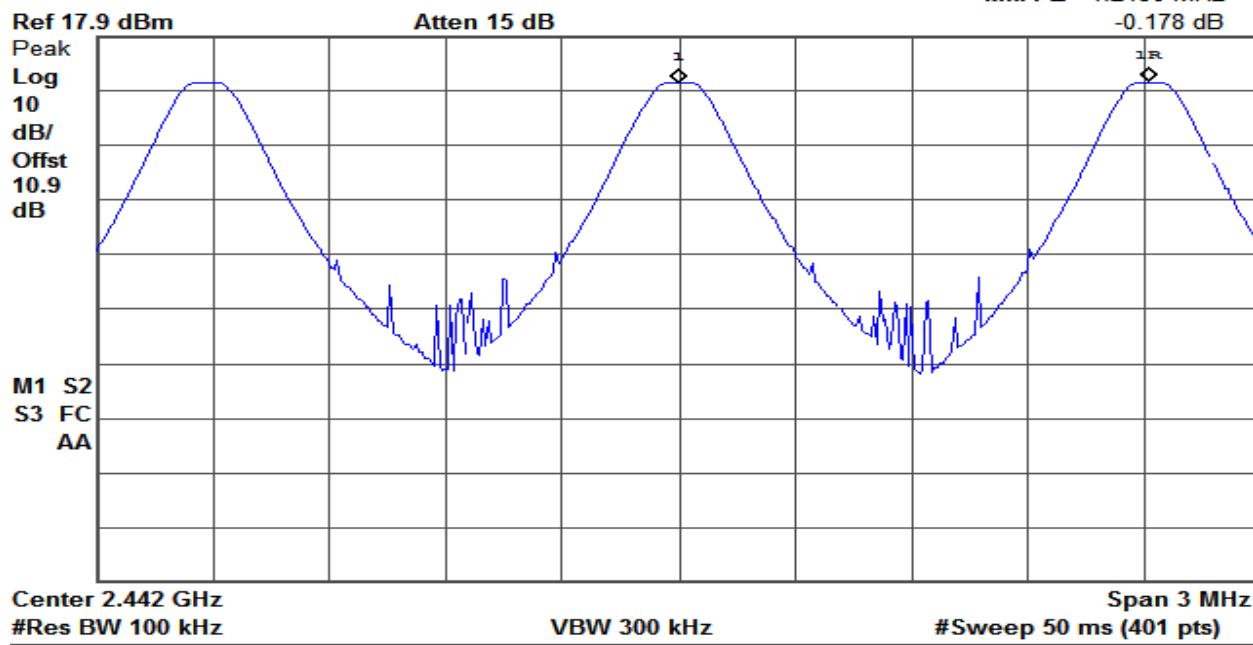

Plot 33 – Carrier Frequency Separation (Using Delta Marker Method) – 2-GFSK

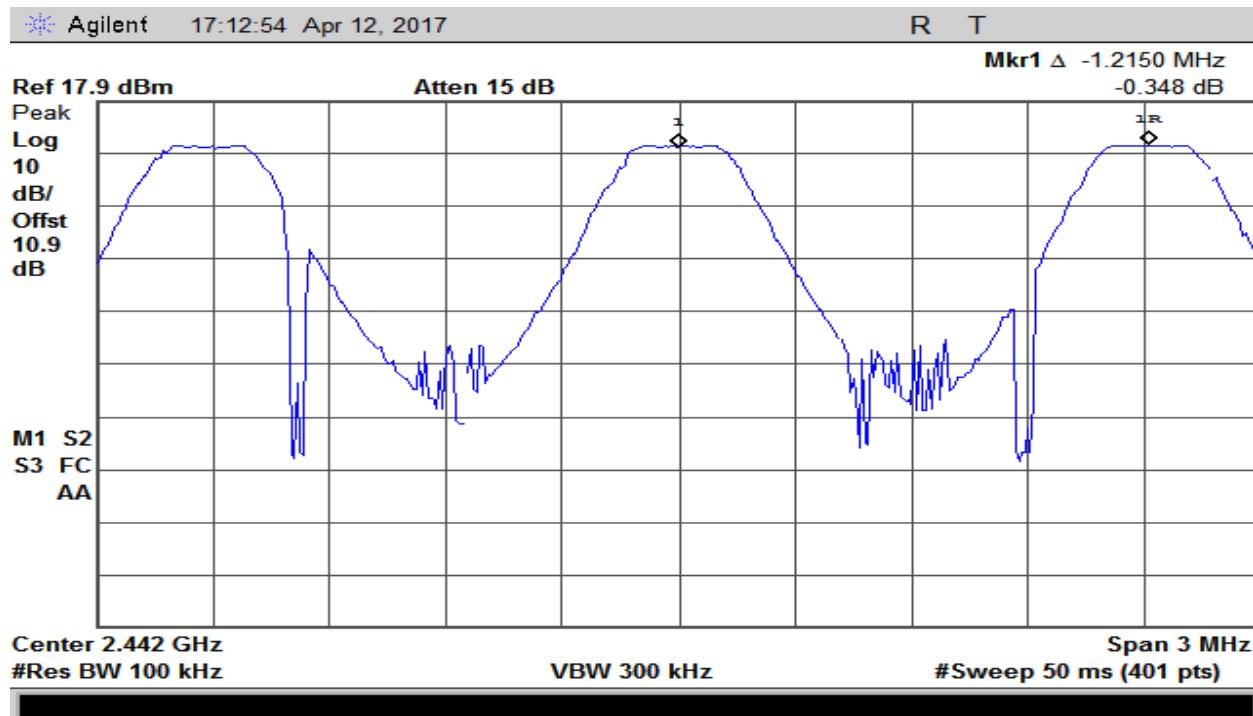

Plot 34 – Carrier Frequency Separation (Using Delta Marker Method) – 4-GFSK

## I. Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Spectrum Analyzer	Agilent	E4402B	US41192757	Mar/15/17	Mar/15/18
Spectrum Analyzer	Hewlett Packard	8563E	3821A09316	Nov/05/16	Nov/05/17
High Pass Filter	Mini-Circuits	VHF-3100+	1023	Verified	
EMI Receiver	R&S	ESCS-30	828985/007	Dec/02/16	Dec/02/17
High Pass Filter	Mini-Circuits	VHF-1320+	1034	Verified	
Signal Generator	R&S	SMY02	1062.5502.12	Verified	
Attenuator 10dB	Huber+Suhner	6810.17.A	747300	Verified	
Horn Antenna	Com-Power	AHA-118	711150	May/10/16	May/10/18
Bilog Antena	Chase	CBL6140	1040	Nov/09/16	Nov/09/17

Table 19 – Test Equipment List

**\*Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

**END OF TEST REPORT**