




FCC RADIO TEST REPORT

Applicant : Protop International Inc.
Address : 10F-8, No.237, Sec.,1, Datong Rd., Xizhi Dist., New Taipei City 22161, Taiwan, R.O.C.
Equipment : Inflight Bluetooth Transmitter
Model No. : 602001
Trademark : 
FCC ID : 2AAYX602001

I HEREBY CERTIFY THAT :

The sample was received on Jan. 15, 2018 and the testing was carried out on Jan. 16, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Mark Liao

Assistant Manager

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory

TAF LAB Code:	1439
----------------------	-------------



Contents

1. Report of Measurements and Examinations	5
1.1 List of Measurements and Examinations.....	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode & Test Software.....	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty.....	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements	10
4.1 Standard Applicable.....	10
4.2 Antenna Construction and Directional Gain.....	10
5. Test of Conducted Emission	11
5.1 Test Limit.....	11
5.2 Test Procedures.....	11
5.3 Typical Test Setup.....	12
5.4 Test Result and Data.....	13
6. Test of Radiated Emission	15
6.1 Test Limit.....	15
6.2 Test Procedures.....	16
6.3 Typical Test Setup.....	16
6.4 Test Result and Data.....	18
7. 20dB Bandwidth Measurement Data	38
7.1 Test Limit.....	38
7.2 Test Procedures.....	38
7.3 Test Setup Layout.....	38
7.4 Test Result and Data.....	38
8. Frequencies Separation	44
8.1 Test Limit.....	44
8.2 Test Procedures.....	44
8.3 Test Setup Layout.....	44
8.4 Test Result and Data.....	44
9. Dwell Time on each channel	47
9.1 Test Limit.....	47
9.2 Test Procedures.....	47
9.3 Test Setup Layout.....	47
9.4 Test Result and Data.....	48
10. Number of Hopping Channels	55
10.1 Test Limit.....	55
10.2 Test Procedures.....	55
10.3 Test Setup Layout.....	55



10.4	Test Result and Data	55
11.	Maximum Peak Output Power	58
11.1	Test Limit	58
11.2	Test Procedures	58
11.3	Test Setup Layout	58
11.4	Test Result and Data	58
12.	Band Edges Measurement	64
12.1	Test Limit	64
12.2	Test Procedure	64
12.3	Test Setup Layout	64
12.4	Test Result and Data	65
12.5	Restrict band emission Measurement Data	70
13.	Restricted Bands of Operation	82
13.1	Labeling Requirement	82



History of this test report

ORIGINAL

Additional attachment as following record:

Attachment No.	Issue Date	Description



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
§ 15.203	. Antenna Requirement	Pass
§ 15.207(a)	. Conducted Emission	Pass
§ 15.209(a)	. Radiated Emission	Pass
§ 15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
§ 15.247(a)(1)	. 20dB Bandwidth Measurement	Pass
§ 15.247(a)(1)	. Dwell Time	Pass
§ 15.247(b)	. Number of Hopping Channels	Pass
§ 15.247(b)	. Peak Output Power Measurement Data	Pass
§ 15.247(d)	. Band Edges Measurement Data	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Product	Inflight Bluetooth Transmitter
Test Model	602001
Frequency Range	2.4 GHz ISM radio band
Number of Channels	79
Modulation	GFSK (1Mbps), $\pi/4$ DQPSK (2Mbps) and 8DPSK (3Mbps) for Bluetooth
Data Rates	Bluetooth: 1, 2, 3Mbps
Antenna Type	On-board antenna
Power Supply Rating	Input: DC 5V
Battery Charging	Input Voltage: 4.75 ~ 5.25VDC Charging Current (CC Mode): 150mA TYP. @5.0VDC Input Charging Current (CV Mode): 60mA TYP. @ 5.0VDC Input

Note: for more details, please refer to the User's manual of the EUT.

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---



2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- b. The complete test system included support units and EUT for RF test.
- c. Run the test software "ISRT.exe".
- d. The following test mode was performed for conduction and radiation test:
 - Test Mode 1: GFSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - Test Mode 2: $\pi/4$ DQPSK : CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.
 - Test Mode 3: 8DPSK: CH 00: 2402MHz, CH 39: 2441MHz, CH 78: 2480MHz.

2.4 Description of Test System

No	Device	Manufacturer	Model No.	Description
1	Notebook	Sony	PCG-71811P	R33021
2	USB Mouse	DELL	OXN967	R41108

Cable:

No.	Cable	Quantity	Description
A	Micro USB Cable	1	0.15m Non Shielding
B	DC Cable	1	1.7m Non Shielding
C	USB Mouse Cable	1	1.8m Non Shielding



2.5 General Information of Test

☒	Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582
	FCC	TW1079, TW1061,390316, 228391, 641184
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-3428, R-4218 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:		Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25000MHz
Test Distance:		The test distance of radiated emission from antenna to EUT is 3 M.

2.6 Measurement Uncertainty

Measurement Item	Measurement Uncertainty
Conducted Emission	±2.71 dB
Radiation test (10m) below 1GHz	Vertical : ±3.89 dB
	Horizontal: ±4.11 dB
Radiation test (3m) below 1GHz	Vertical : ±4.11 dB
	Horizontal: ±4.10 dB
20 dB Bandwidth	7500 Hz
Maximum Peak Output Power	±1.4 dB
100kHz Bandwidth of Frequency Band Edges	±2.2 dB
Power Spectral Density	±1.3870 dB



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100853	2017.02.14	2018.02.13
Preamplifier	HP	8447F	3113A05915	2017.02.14	2018.02.13
Loop Antenna	R&S	HFH2-Z2	100150	2017.10.24	2018.10.23
Horn Antenna	EMCO	3116	31974	2017.02.18	2018.02.17
Ultra Broadband Antenna	SCHAFFNER	CBL6112D	22241	2017.02.14	2018.02.13
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2017.05.07	2018.05.06
Preamplifier	COM-POWER	PA-840	711885	2017.03.22	2018.03.21
Broad-Band Horn Antenna	Sunol	DRH-118	A072913	2017.09.22	2018.09.21
EXA Signal Analyzer	Agilent	N9020A	US46220290	2017.05.26	2018.05.25
Temperature/ Humidity Meter	mingle	ETH529	N/A	2017.02.14	2018.02.13



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna	Peak Gain
on-board antenna	2.61dBi



5. Test of Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

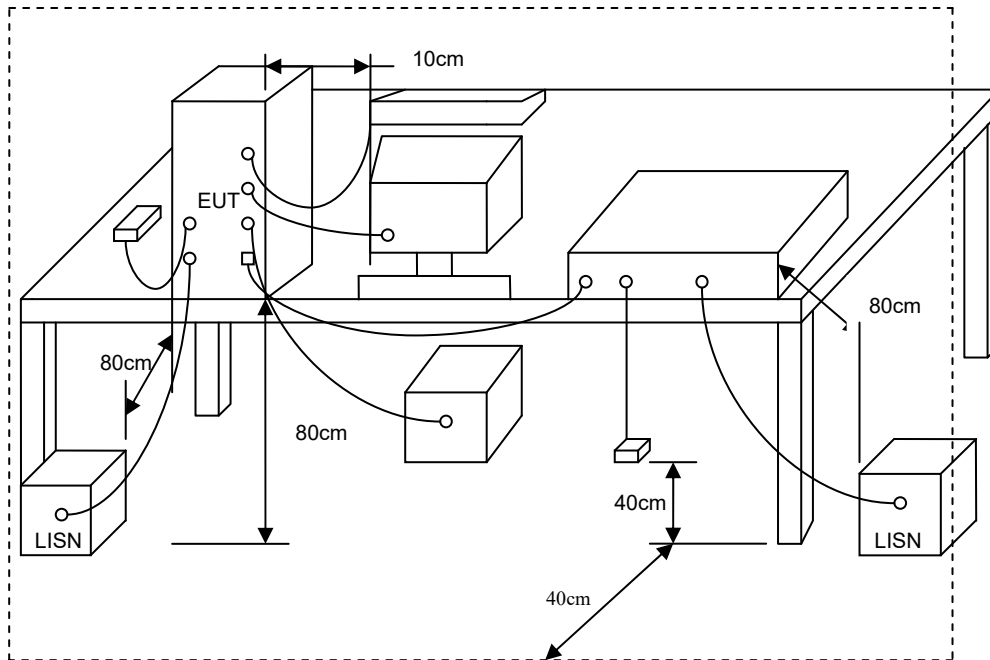



5.4 Test Result and Data

Test Mode :	Normal Link	Phase :	Line
Temperature :	20°C	Humidity:	51%
Pressur(mbar) :	1002	Date:	Jan. 13, 2018

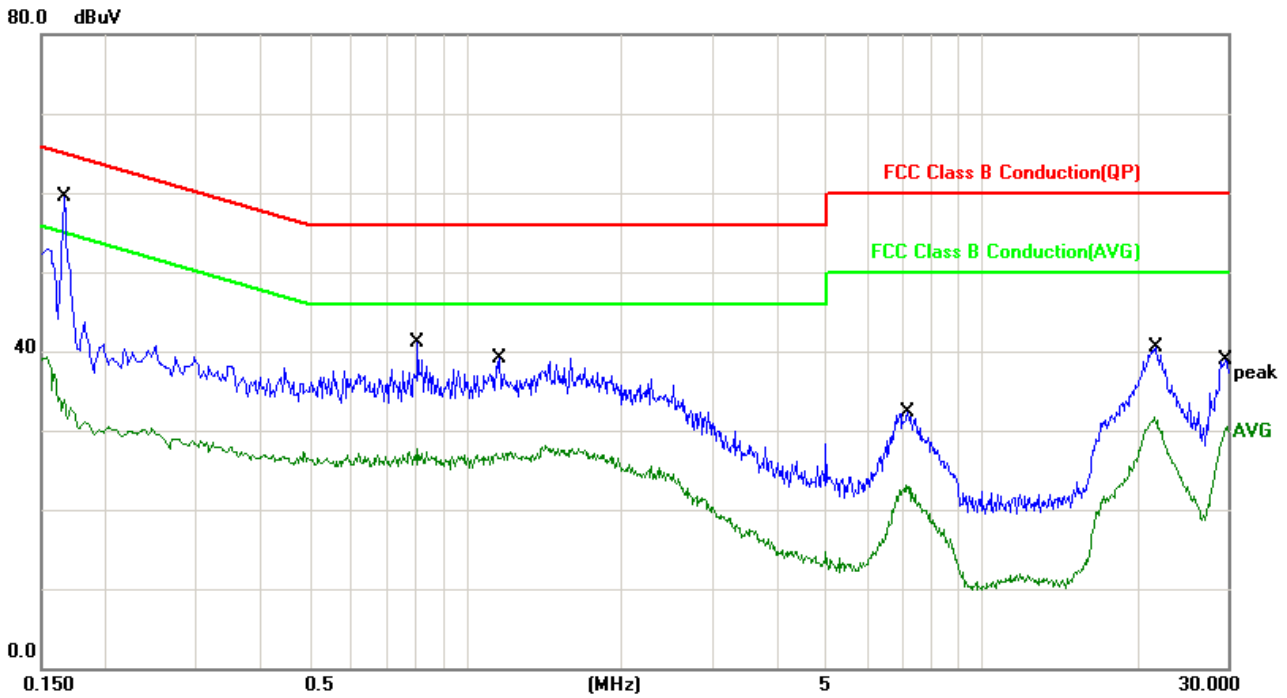


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	10.06	38.62	48.68	65.15	-16.47	QP
2	0.1660	10.06	21.13	31.19	55.15	-23.96	AVG
3	0.8059	10.09	23.23	33.32	56.00	-22.68	QP
4	0.8059	10.09	16.30	26.39	46.00	-19.61	AVG
5	1.1620	10.28	21.24	31.52	56.00	-24.48	QP
6	1.1620	10.28	15.99	26.27	46.00	-19.73	AVG
7	7.1820	10.24	16.63	26.87	60.00	-33.13	QP
8	7.1820	10.24	9.74	19.98	50.00	-30.02	AVG
9	21.8220	10.58	24.81	35.39	60.00	-24.61	QP
10	21.8220	10.58	19.93	30.51	50.00	-19.49	AVG
11	29.7300	10.64	23.46	34.10	60.00	-25.90	QP
12	29.7300	10.64	18.73	29.37	50.00	-20.63	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



Test Mode :	Normal Link	Phase :	Neutral
Temperature :	20°C	Humidity:	51%
Pressur(mbar) :	1002	Date:	Jan. 13, 2018

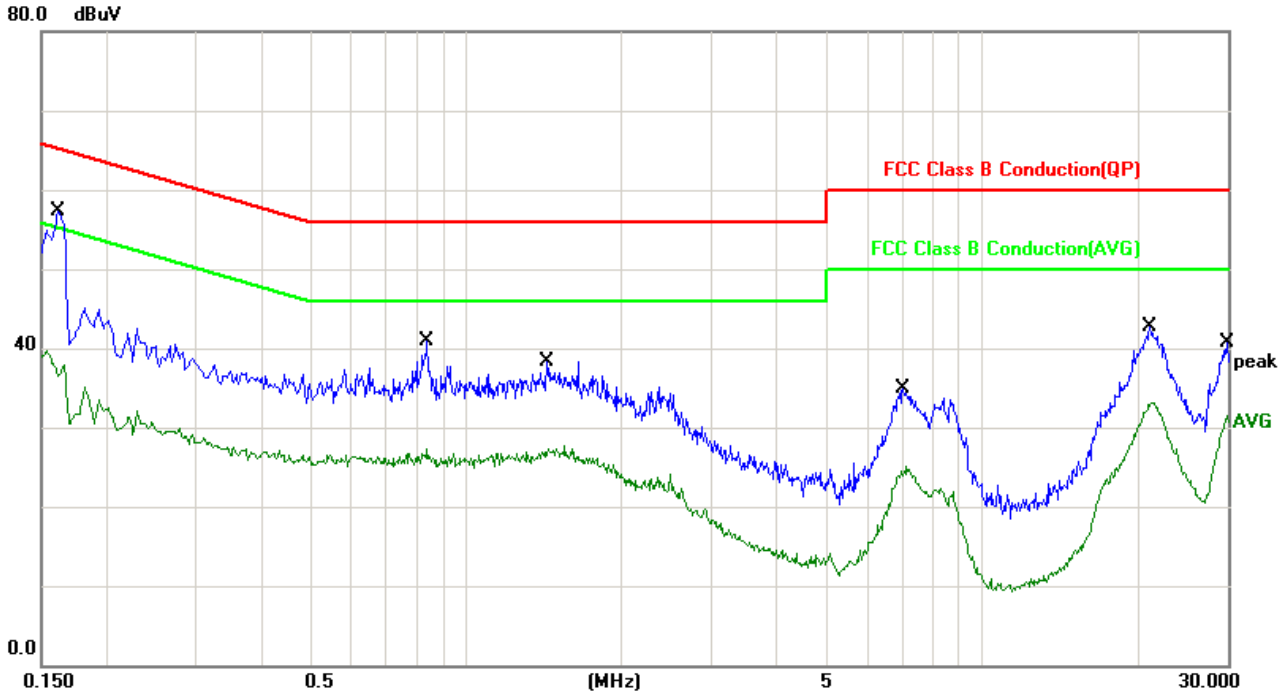

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	10.06	42.40	52.46	65.36	-12.90	QP
2	0.1620	10.06	24.11	34.17	55.36	-21.19	AVG
3	0.8420	10.10	23.74	33.84	56.00	-22.16	QP
4	0.8420	10.10	16.09	26.19	46.00	-19.81	AVG
5	1.4340	10.14	21.59	31.73	56.00	-24.27	QP
6	1.4340	10.14	16.46	26.60	46.00	-19.40	AVG
7	7.0460	10.24	19.09	29.33	60.00	-30.67	QP
8	7.0460	10.24	11.70	21.94	50.00	-28.06	AVG
9	21.2220	10.57	26.40	36.97	60.00	-23.03	QP
10	21.2220	10.57	21.49	32.06	50.00	-17.94	AVG
11	29.9340	10.64	24.51	35.15	60.00	-24.85	QP
12	29.9340	10.64	19.61	30.25	50.00	-19.75	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



6. Test of Radiated Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH(microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37




6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground; above 1GHz, the height was 1.5m.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


6.3 Typical Test Setup

Below 1GHz Test Setup

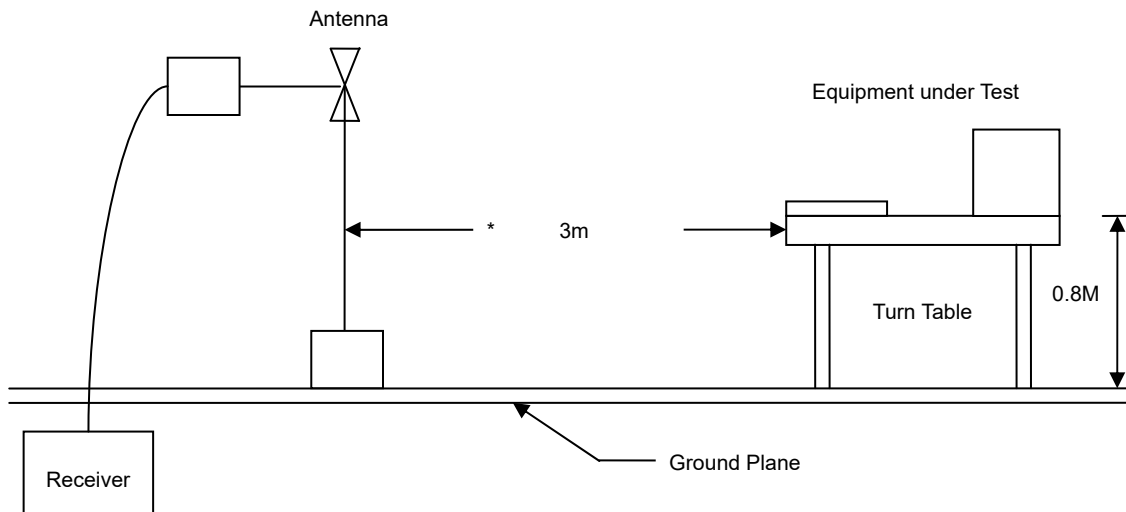



Above 1GHz Test Setup

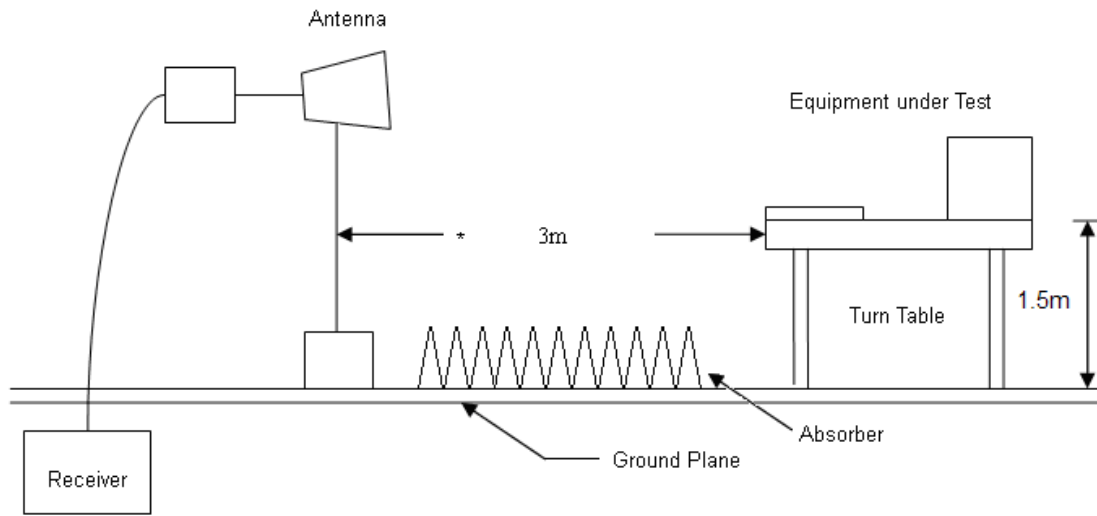




6.4 Test Result and Data

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.4.1 Test Result and Data of Transmitter

Below 1GHz

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 18 °C
Test Date	: Jan. 13, 2018	Humidity	: 49 %
Memo	: CH 00	Atmospheric Pressure	: 1008 hpa

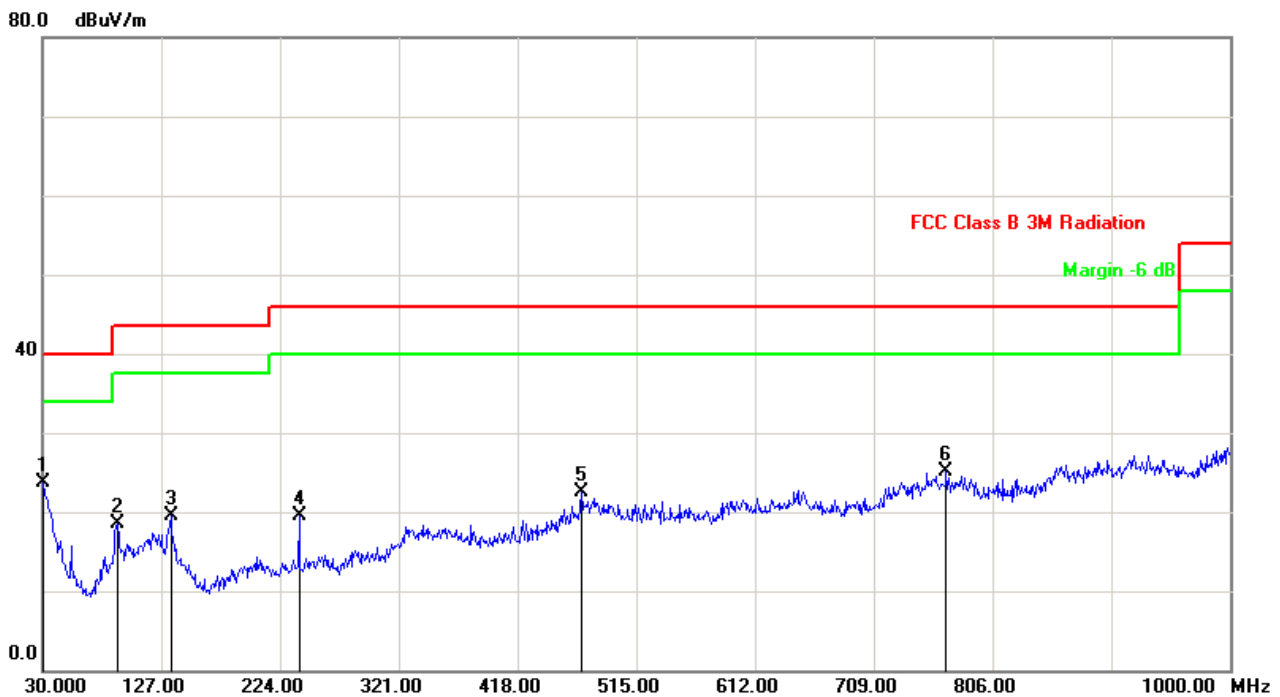


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.0000	-3.01	26.78	23.77	40.00	-16.23	peak	100	156
2	91.1100	-11.17	29.59	18.42	43.50	-25.08	peak	200	337
3	134.7600	-9.50	28.93	19.43	43.50	-24.07	peak	100	155
4	239.5200	-9.06	28.59	19.53	46.00	-26.47	peak	100	293
5	470.3800	-1.53	23.99	22.46	46.00	-23.54	peak	100	0
6	768.1700	1.51	23.53	25.04	46.00	-20.96	peak	200	177

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 18 °C
Test Date	: Jan. 13, 2018	Humidity	: 49 %
Memo	: CH 00	Atmospheric Pressure	: 1008 hpa

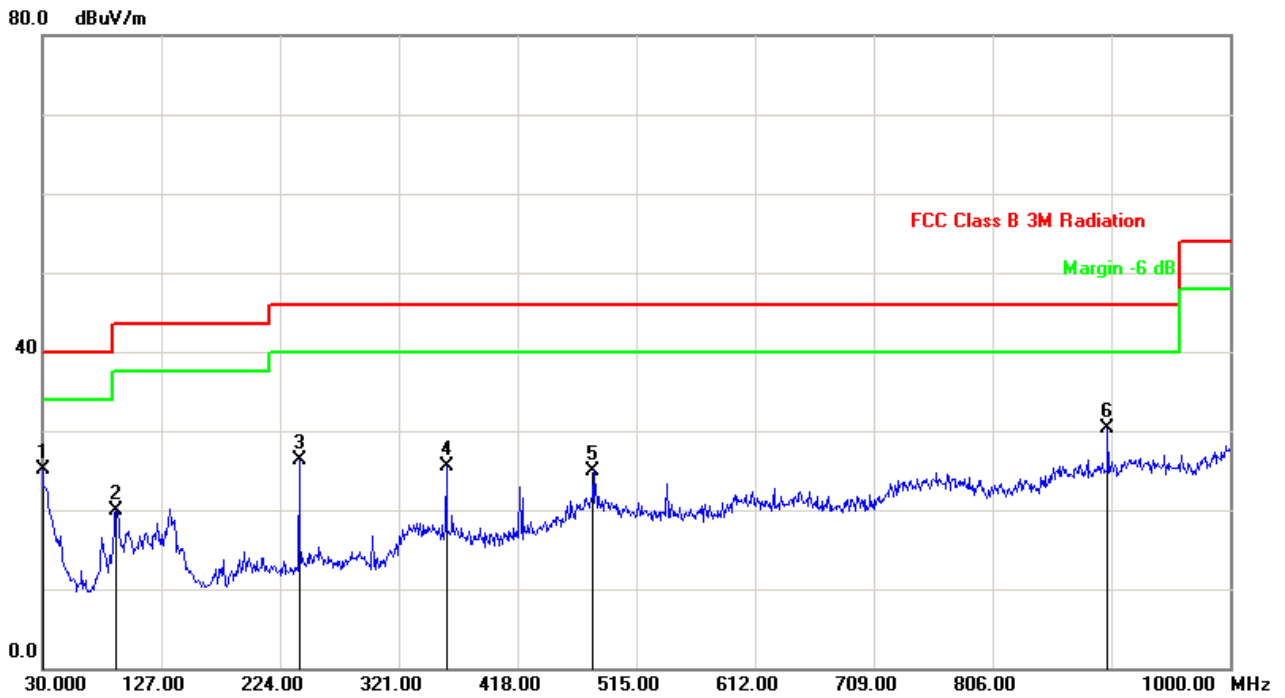


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.0000	-3.01	28.16	25.15	40.00	-14.85	peak	100	67
2	90.1400	-11.37	31.29	19.92	43.50	-23.58	peak	200	116
3	239.5200	-9.06	35.29	26.23	46.00	-19.77	peak	100	24
4	359.8000	-4.41	29.93	25.52	46.00	-20.48	peak	200	134
5	480.0799	-1.10	25.97	24.87	46.00	-21.13	peak	300	249
6	900.0900	2.91	27.40	30.31	46.00	-15.69	peak	100	6

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor= Antenna Factor + Cable Loss - Amplifier Factor



Above 1GHz (1~25GHz)

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 00	Atmospheric Pressure	: 1010 hpa

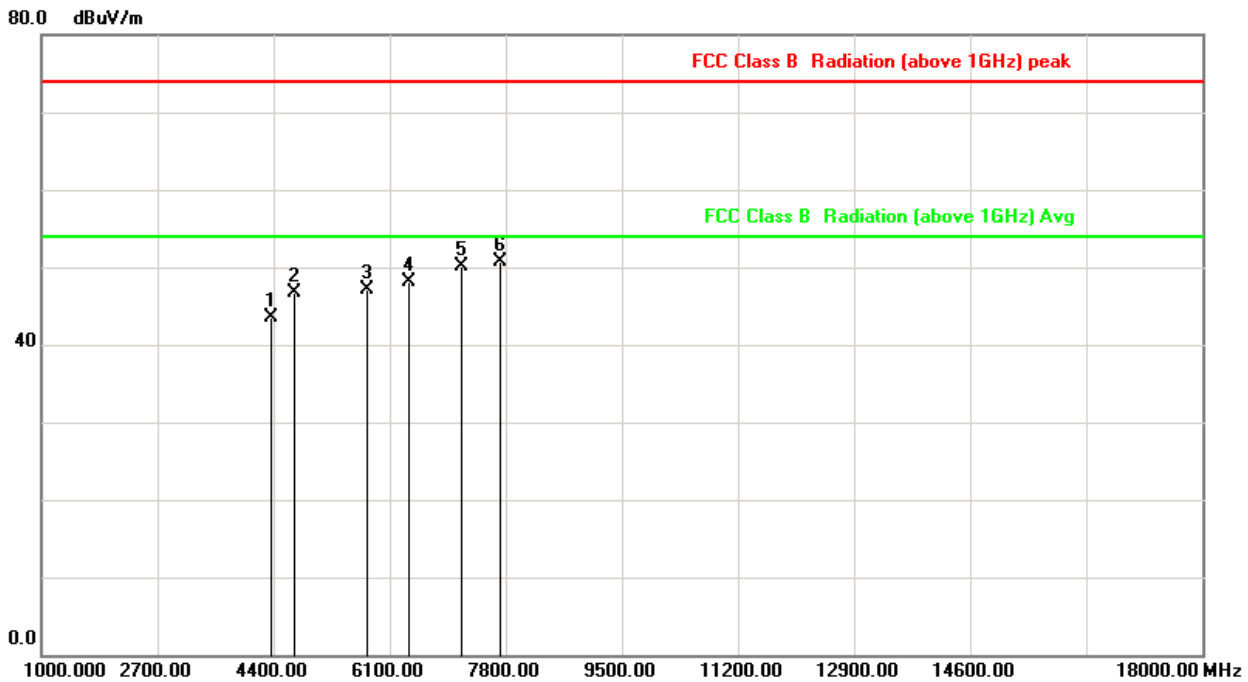

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4371.667	13.01	30.54	43.55	74.00	-30.45	peak
2	4711.667	14.06	32.60	46.66	74.00	-27.34	peak
3	5760.000	15.66	31.52	47.18	74.00	-26.82	peak
4	6383.333	16.41	31.78	48.19	74.00	-25.81	peak
5	7148.333	18.66	31.49	50.15	74.00	-23.85	peak
6	7715.000	20.13	30.64	50.77	74.00	-23.23	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 00	Atmospheric Pressure	: 1010 hpa

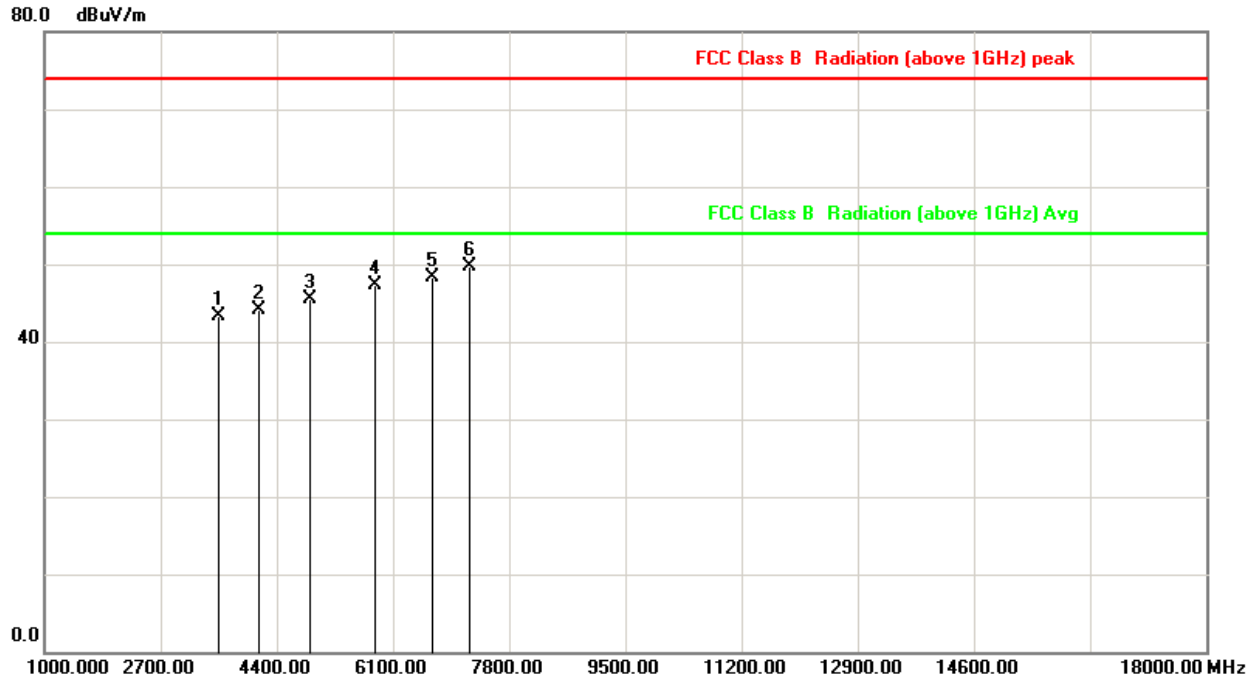

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3550.000	9.57	33.69	43.26	74.00	-30.74	peak
2	4145.000	11.85	32.26	44.11	74.00	-29.89	peak
3	4881.667	14.38	31.19	45.57	74.00	-28.43	peak
4	5845.000	15.88	31.46	47.34	74.00	-26.66	peak
5	6666.667	17.00	31.26	48.26	74.00	-25.74	peak
6	7233.333	18.99	30.75	49.74	74.00	-24.26	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 39	Atmospheric Pressure	: 1010 hpa

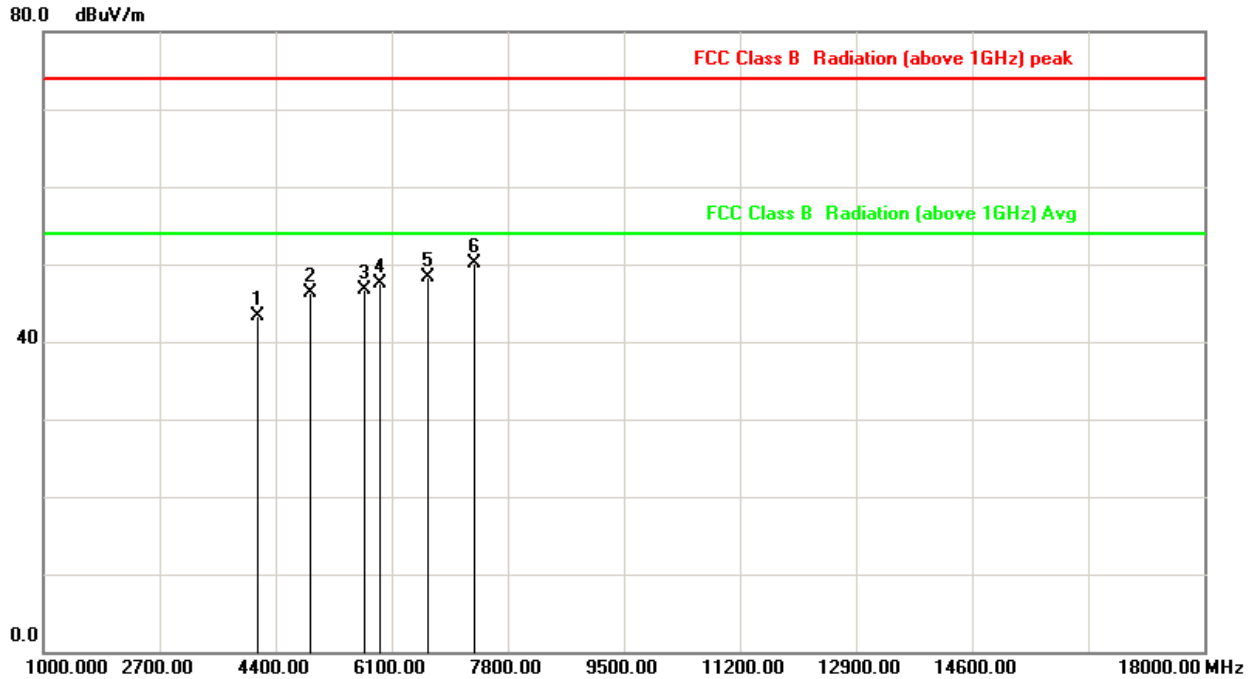

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4145.000	11.85	31.49	43.34	74.00	-30.66	peak
2	4910.000	14.43	31.88	46.31	74.00	-27.69	peak
3	5703.333	15.52	31.27	46.79	74.00	-27.21	peak
4	5930.000	16.09	31.44	47.53	74.00	-26.47	peak
5	6638.333	16.91	31.40	48.31	74.00	-25.69	peak
6	7318.333	19.32	30.77	50.09	74.00	-23.91	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 39	Atmospheric Pressure	: 1010 hpa

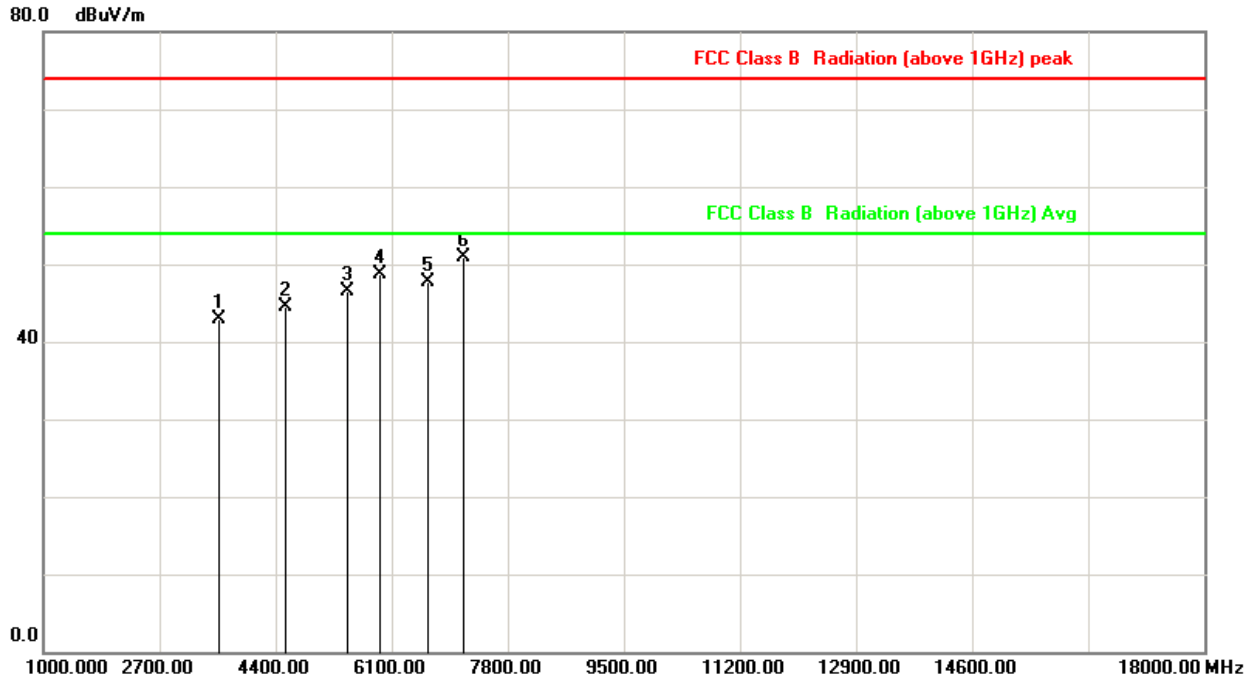

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3578.333	9.67	33.31	42.98	74.00	-31.02	peak
2	4541.667	13.74	30.73	44.47	74.00	-29.53	peak
3	5448.333	14.98	31.49	46.47	74.00	-27.53	peak
4	5930.000	16.09	32.54	48.63	74.00	-25.37	peak
5	6638.333	16.91	30.83	47.74	74.00	-26.26	peak
6	7148.333	18.66	32.26	50.92	74.00	-23.08	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 78	Atmospheric Pressure	: 1010 hpa

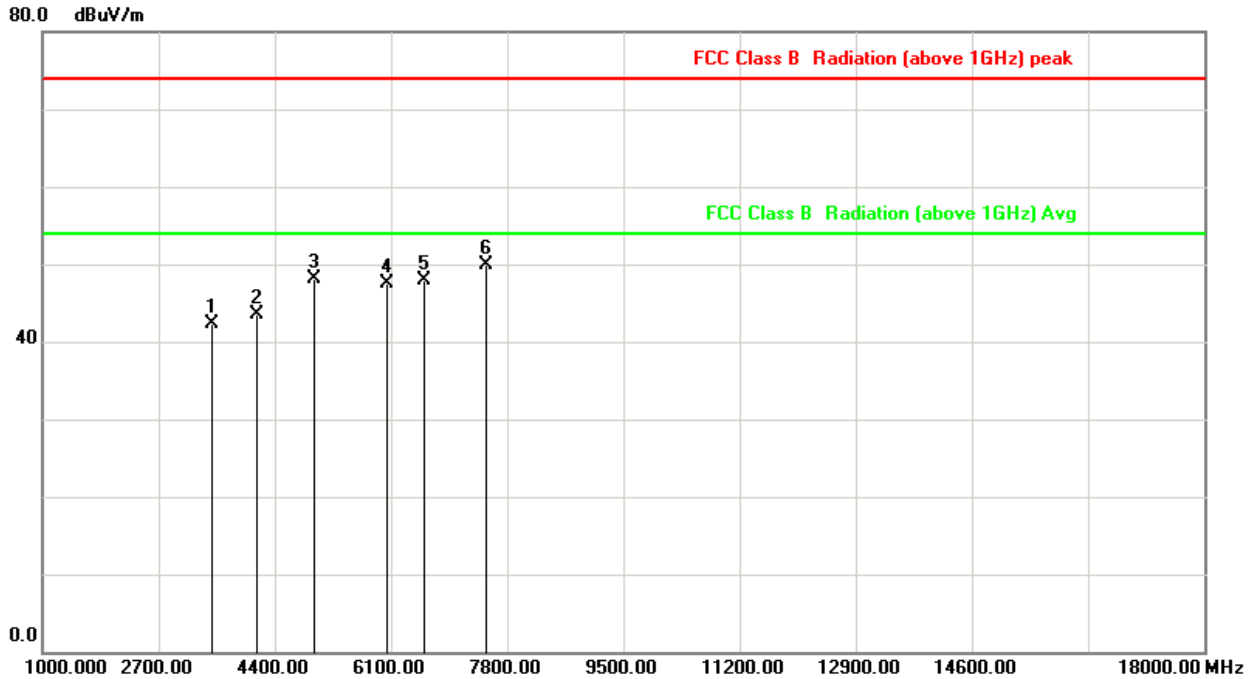

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3493.333	9.36	33.02	42.38	74.00	-31.62	peak
2	4145.000	11.85	31.56	43.41	74.00	-30.59	peak
3	4966.667	14.54	33.64	48.18	74.00	-25.82	peak
4	6043.333	16.28	31.29	47.57	74.00	-26.43	peak
5	6581.667	16.72	31.23	47.95	74.00	-26.05	peak
6	7488.333	19.98	29.95	49.93	74.00	-24.07	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 78	Atmospheric Pressure	: 1010 hpa

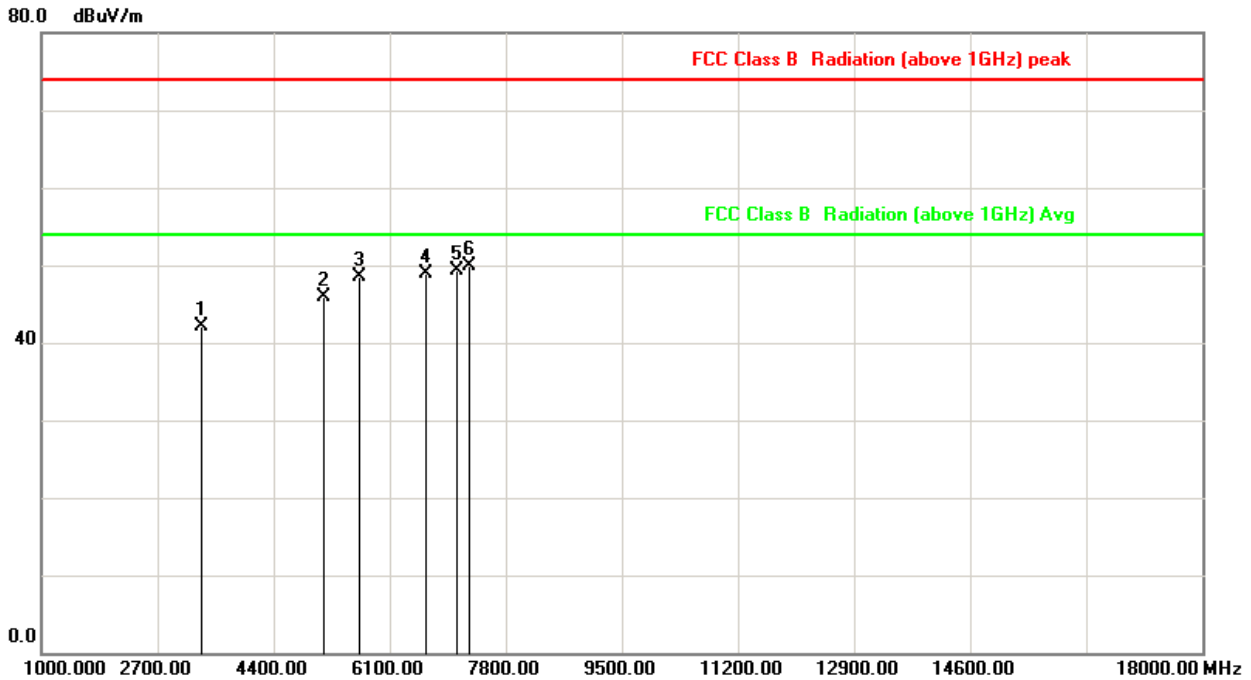

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3351.667	8.62	33.53	42.15	74.00	-31.85	peak
2	5136.667	14.71	31.21	45.92	74.00	-28.08	peak
3	5646.667	15.38	33.14	48.52	74.00	-25.48	peak
4	6638.333	16.91	32.03	48.94	74.00	-25.06	peak
5	7091.667	18.44	30.87	49.31	74.00	-24.69	peak
6	7261.667	19.10	30.74	49.84	74.00	-24.16	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 00	Atmospheric Pressure	: 1010 hpa

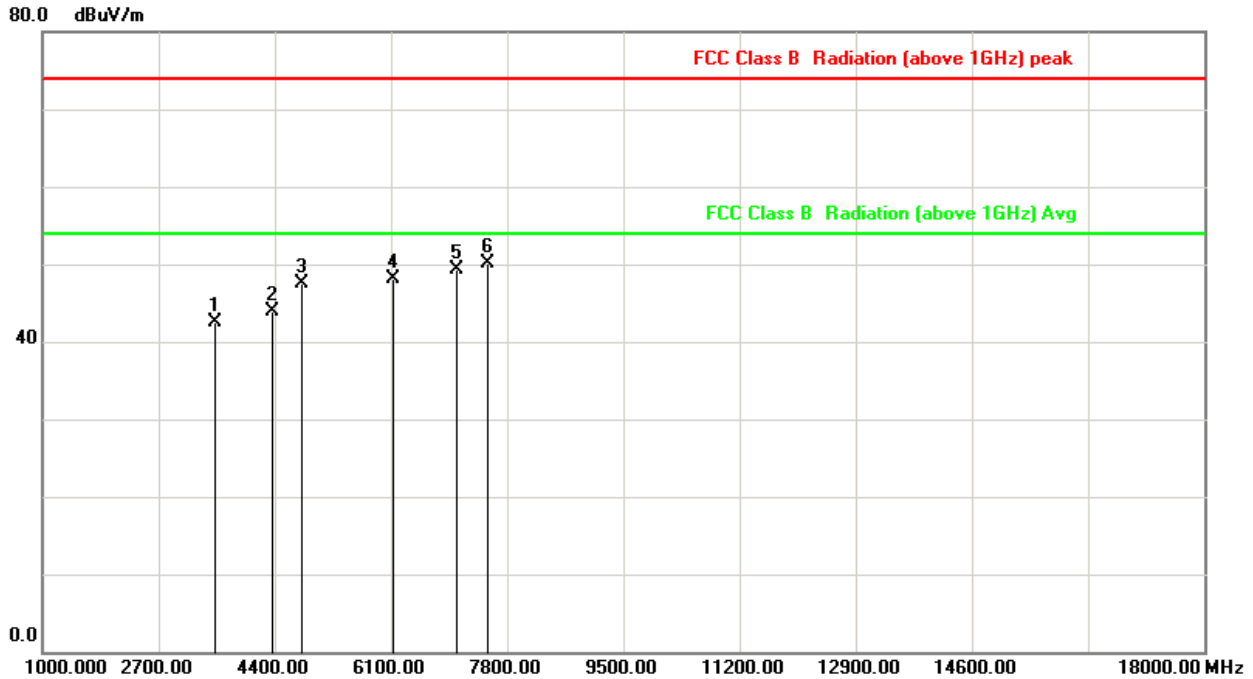

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3521.667	9.47	32.95	42.42	74.00	-31.58	peak
2	4371.667	13.01	30.83	43.84	74.00	-30.16	peak
3	4796.667	14.22	33.27	47.49	74.00	-26.51	peak
4	6128.333	16.31	31.78	48.09	74.00	-25.91	peak
5	7063.333	18.33	31.06	49.39	74.00	-24.61	peak
6	7516.667	20.04	30.07	50.11	74.00	-23.89	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 00	Atmospheric Pressure	: 1010 hpa

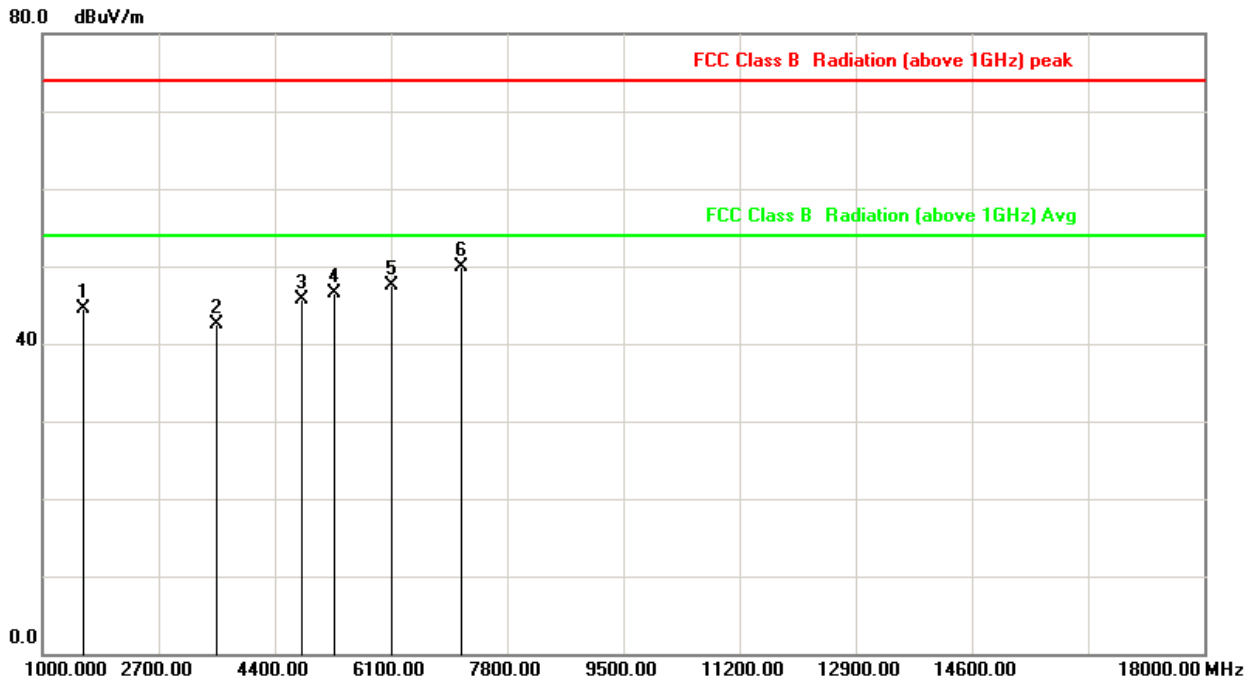

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	-1.06	45.47	44.41	74.00	-29.59	peak
2	3550.000	9.57	32.94	42.51	74.00	-31.49	peak
3	4796.667	14.22	31.44	45.66	74.00	-28.34	peak
4	5278.333	14.83	31.77	46.60	74.00	-27.40	peak
5	6100.000	16.30	31.13	47.43	74.00	-26.57	peak
6	7120.000	18.55	31.33	49.88	74.00	-24.12	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 39	Atmospheric Pressure	: 1010 hpa

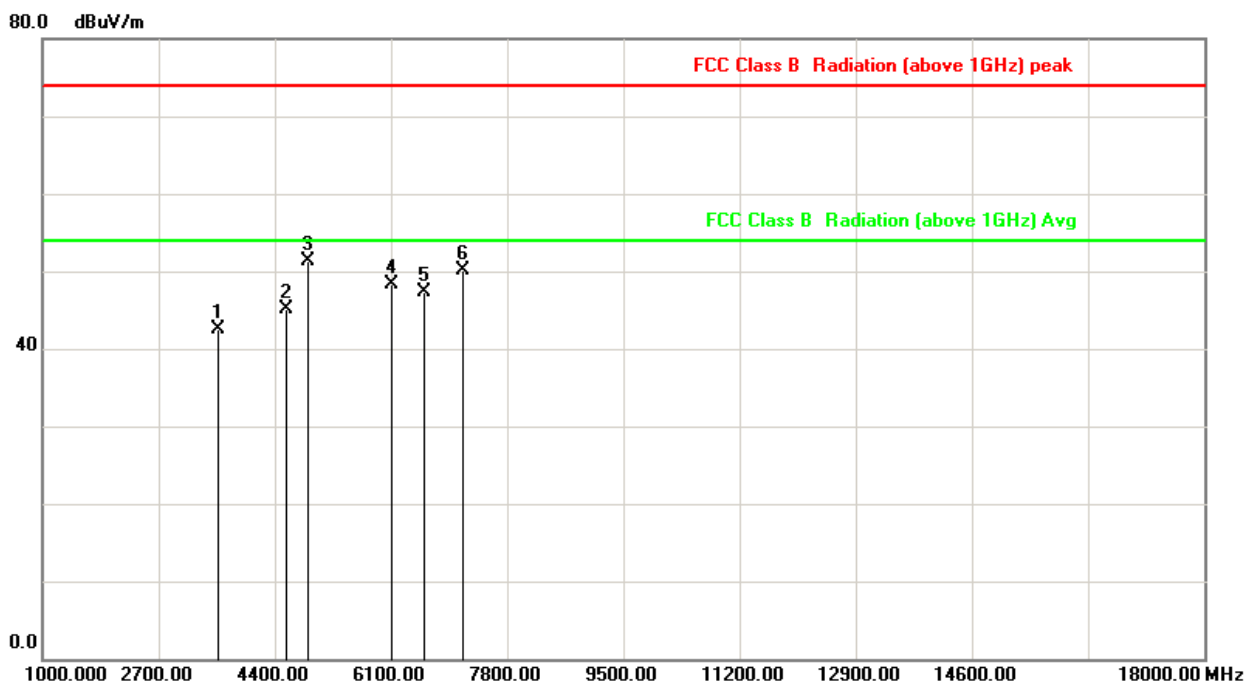

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3578.333	9.67	32.89	42.56	74.00	-31.44	peak
2	4570.000	13.79	31.41	45.20	74.00	-28.80	peak
3	4881.667	14.38	37.01	51.39	74.00	-22.61	peak
4	6100.000	16.30	32.05	48.35	74.00	-25.65	peak
5	6581.667	16.72	30.62	47.34	74.00	-26.66	peak
6	7148.333	18.66	31.54	50.20	74.00	-23.80	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 39	Atmospheric Pressure	: 1010 hpa

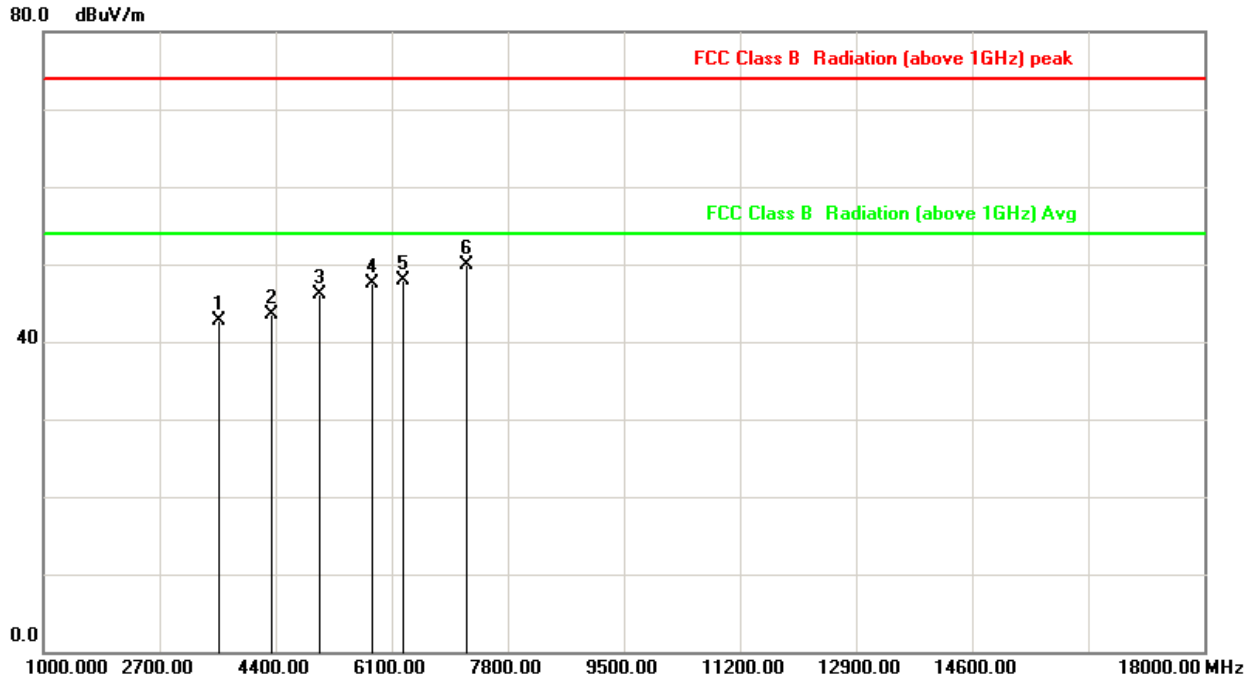

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3578.333	9.67	33.05	42.72	74.00	-31.28	peak
2	4343.333	12.86	30.62	43.48	74.00	-30.52	peak
3	5051.667	14.64	31.41	46.05	74.00	-27.95	peak
4	5816.667	15.81	31.64	47.45	74.00	-26.55	peak
5	6270.000	16.37	31.54	47.91	74.00	-26.09	peak
6	7205.000	18.88	30.96	49.84	74.00	-24.16	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 78	Atmospheric Pressure	: 1010 hpa

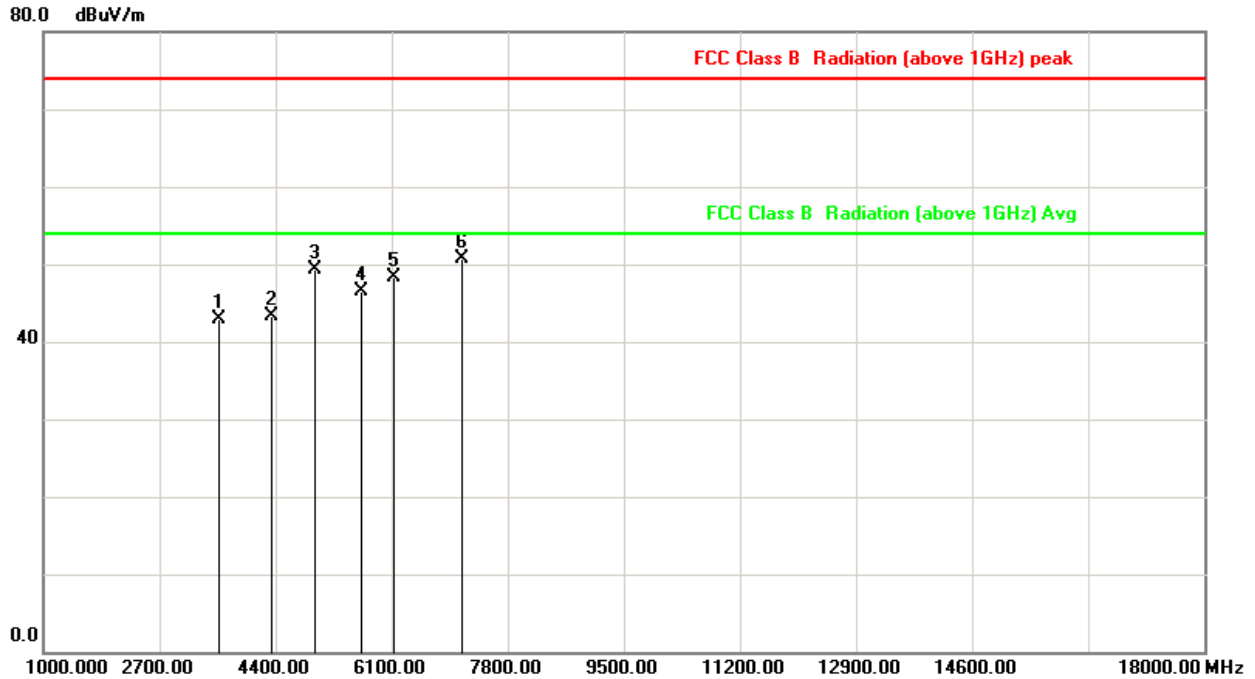

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3578.333	9.67	33.22	42.89	74.00	-31.11	peak
2	4343.333	12.86	30.51	43.37	74.00	-30.63	peak
3	4966.667	14.54	34.82	49.36	74.00	-24.64	peak
4	5646.667	15.38	31.18	46.56	74.00	-27.44	peak
5	6128.333	16.31	32.08	48.39	74.00	-25.61	peak
6	7120.000	18.55	32.09	50.64	74.00	-23.36	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 78	Atmospheric Pressure	: 1010 hpa

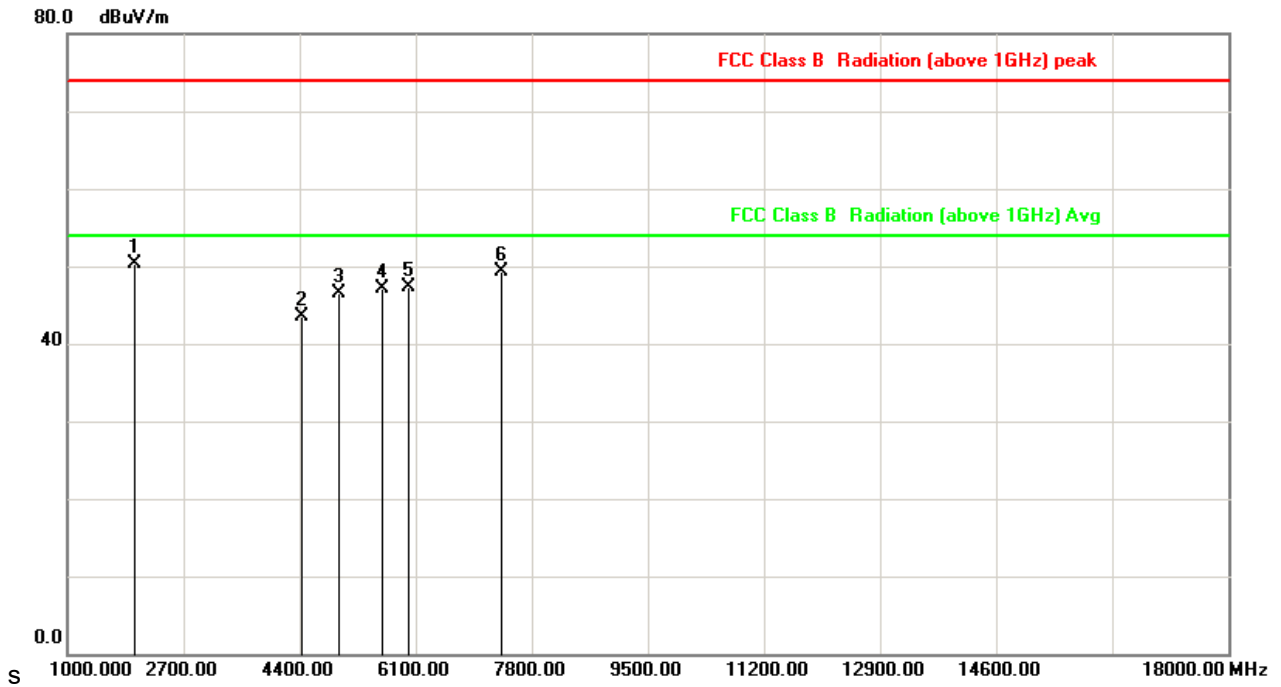

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1991.667	1.22	48.99	50.21	74.00	-23.79	peak
2	4428.333	13.29	30.29	43.58	74.00	-30.42	peak
3	4966.667	14.54	32.02	46.56	74.00	-27.44	peak
4	5618.333	15.31	31.79	47.10	74.00	-26.90	peak
5	5986.667	16.23	31.11	47.34	74.00	-26.66	peak
6	7346.667	19.43	29.79	49.22	74.00	-24.78	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 00	Atmospheric Pressure	: 1010 hpa

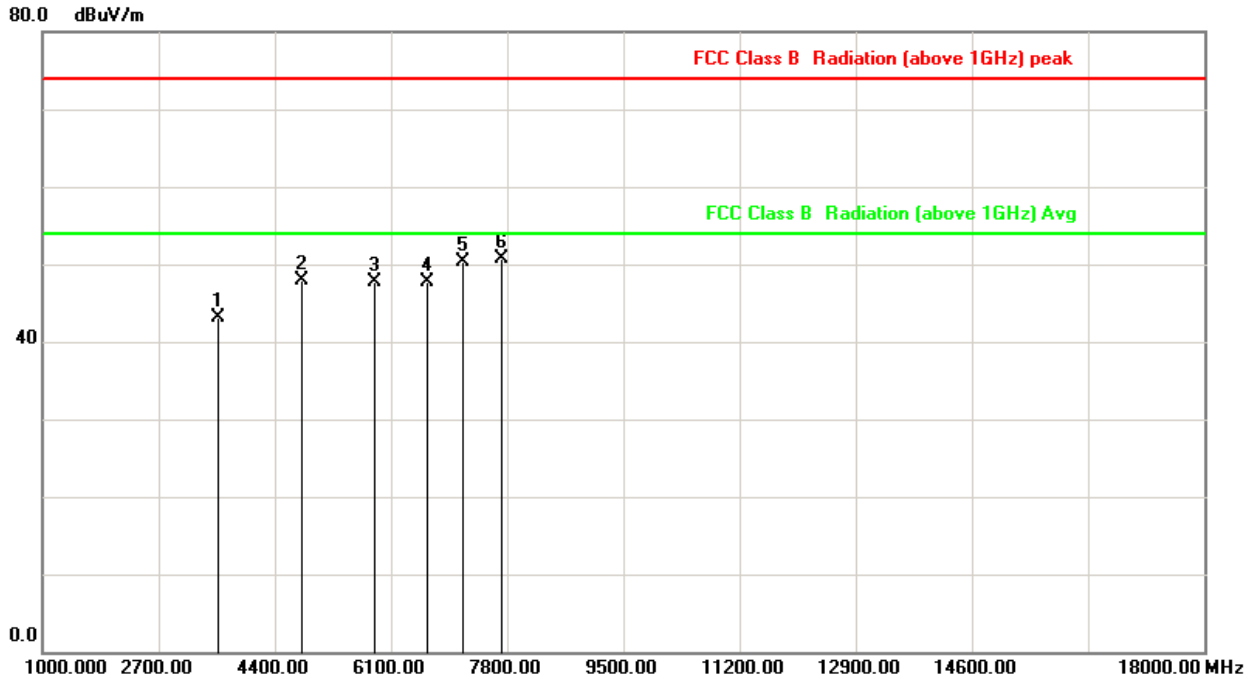

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3578.333	9.67	33.38	43.05	74.00	-30.95	peak
2	4796.667	14.22	33.78	48.00	74.00	-26.00	peak
3	5873.333	15.95	31.78	47.73	74.00	-26.27	peak
4	6638.333	16.91	30.80	47.71	74.00	-26.29	peak
5	7148.333	18.66	31.68	50.34	74.00	-23.66	peak
6	7715.000	20.13	30.59	50.72	74.00	-23.28	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	:	AC 120V	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3	Temperature	:	25 °C
Test Date	:	Jan. 13, 2018	Humidity	:	52 %
Memo	:	CH 00	Atmospheric Pressure	:	1010 hpa

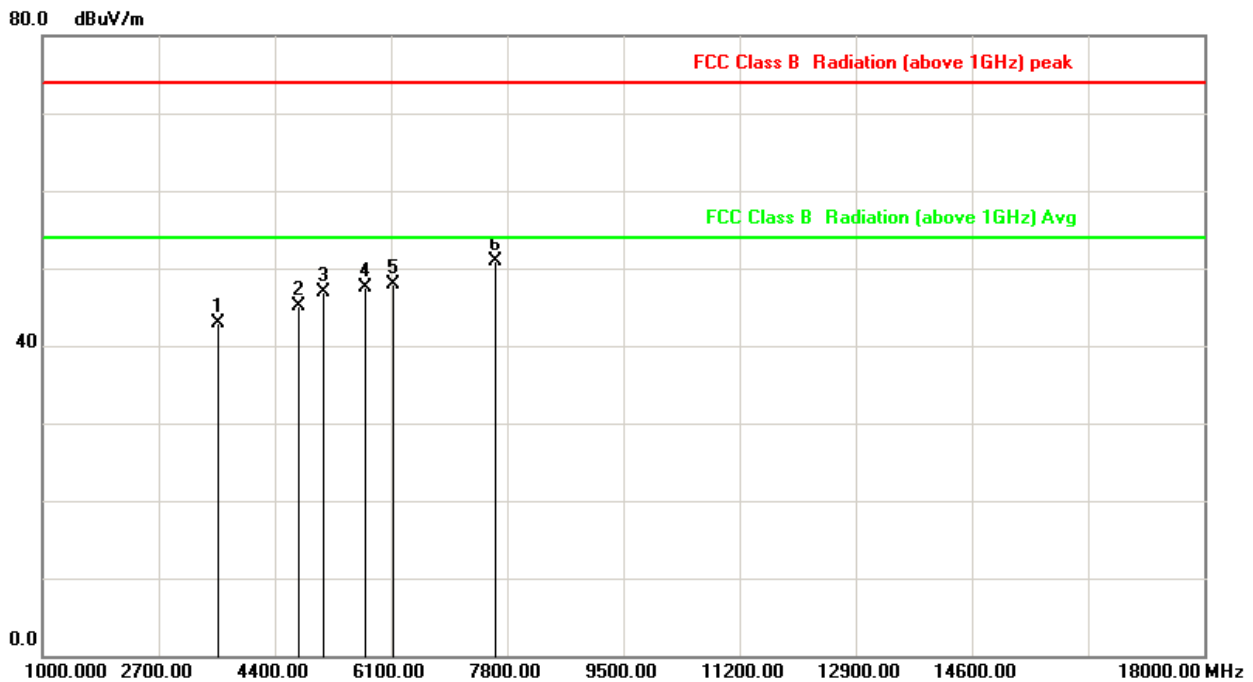

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3578.333	9.67	33.32	42.99	74.00	-31.01	peak
2	4740.000	14.11	31.02	45.13	74.00	-28.87	peak
3	5108.333	14.69	32.29	46.98	74.00	-27.02	peak
4	5731.667	15.59	31.99	47.58	74.00	-26.42	peak
5	6128.333	16.31	31.53	47.84	74.00	-26.16	peak
6	7630.000	20.09	30.72	50.81	74.00	-23.19	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 39	Atmospheric Pressure	: 1010 hpa

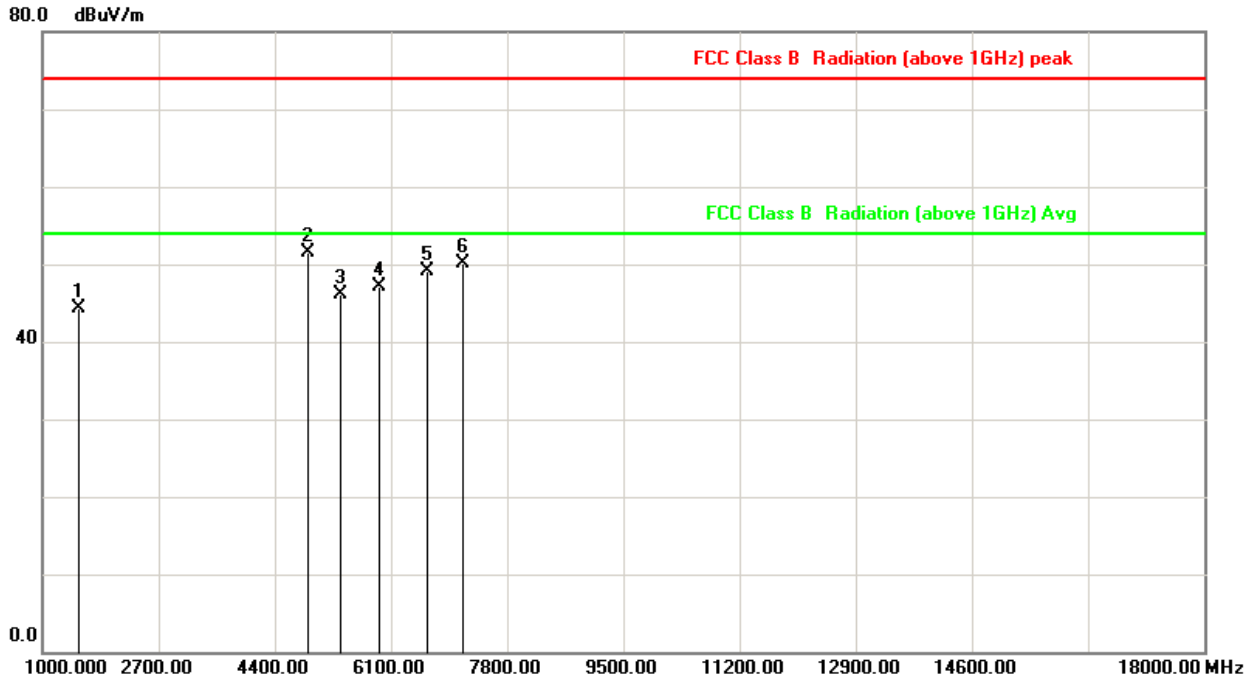

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1538.333	-1.39	45.63	44.24	74.00	-29.76	peak
2	4881.667	14.38	37.12	51.50	74.00	-22.50	peak
3	5363.333	14.91	31.25	46.16	74.00	-27.84	peak
4	5930.000	16.09	31.08	47.17	74.00	-26.83	peak
5	6638.333	16.91	32.20	49.11	74.00	-24.89	peak
6	7148.333	18.66	31.37	50.03	74.00	-23.97	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 39	Atmospheric Pressure	: 1010 hpa

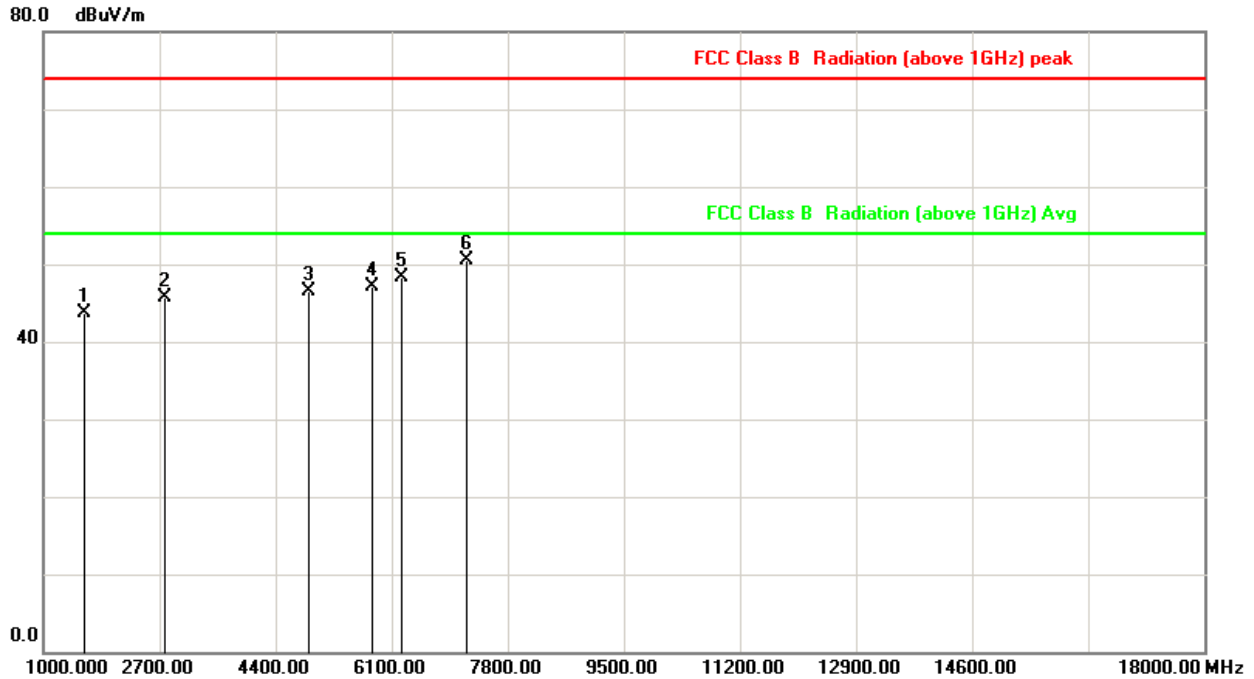

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	-1.06	44.73	43.67	74.00	-30.33	peak
2	2785.000	5.33	40.35	45.68	74.00	-28.32	peak
3	4881.667	14.38	32.09	46.47	74.00	-27.53	peak
4	5816.667	15.81	31.27	47.08	74.00	-26.92	peak
5	6241.667	16.36	31.91	48.27	74.00	-25.73	peak
6	7205.000	18.88	31.70	50.58	74.00	-23.42	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 78	Atmospheric Pressure	: 1010 hpa

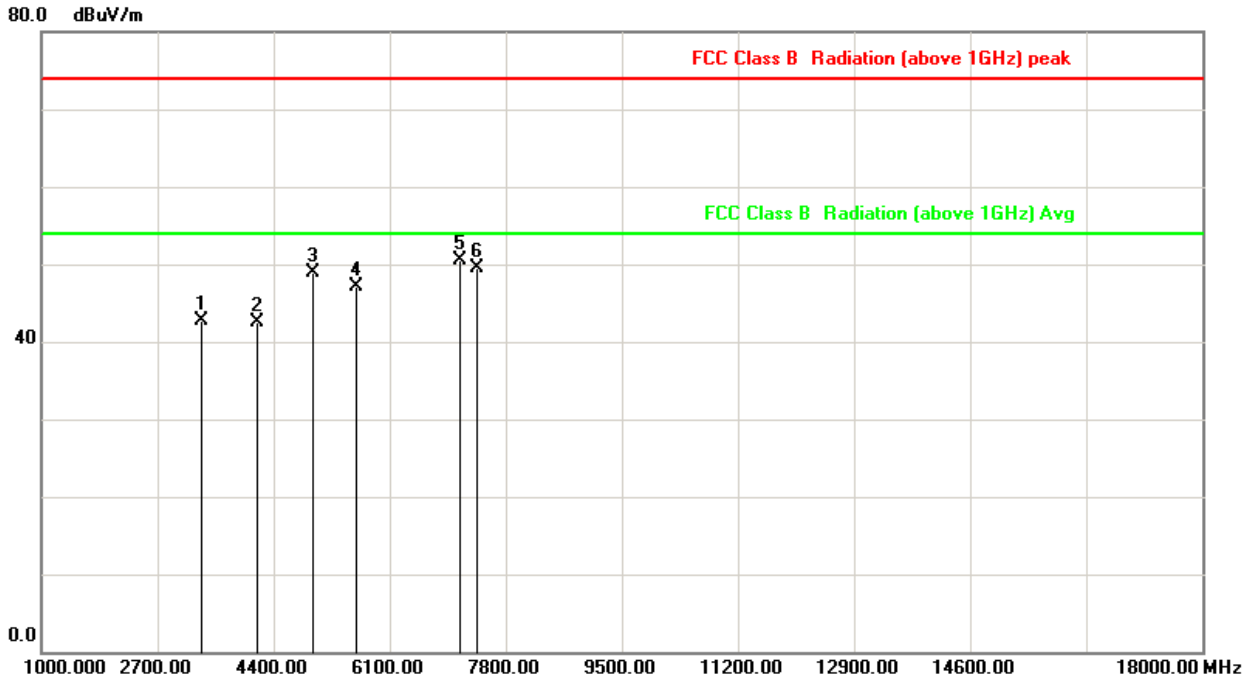

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3351.667	8.62	34.01	42.63	74.00	-31.37	peak
2	4173.333	11.99	30.55	42.54	74.00	-31.46	peak
3	4966.667	14.54	34.37	48.91	74.00	-25.09	peak
4	5618.333	15.31	31.88	47.19	74.00	-26.81	peak
5	7120.000	18.55	32.00	50.55	74.00	-23.45	peak
6	7375.000	19.54	29.91	49.45	74.00	-24.55	peak

Note: Level = Reading + Factor


Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 25 °C
Test Date	: Jan. 13, 2018	Humidity	: 52 %
Memo	: CH 78	Atmospheric Pressure	: 1010 hpa

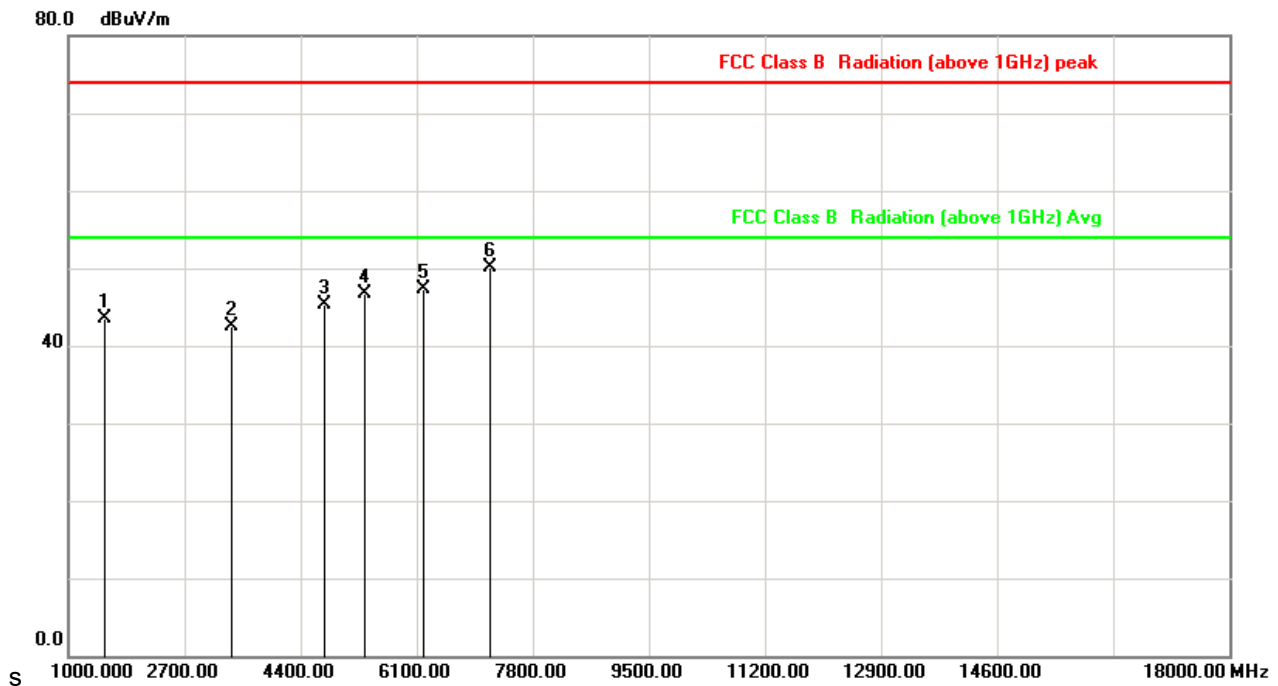

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1538.333	-1.39	44.98	43.59	74.00	-30.41	peak
2	3380.000	8.77	33.76	42.53	74.00	-31.47	peak
3	4740.000	14.11	31.23	45.34	74.00	-28.66	peak
4	5335.000	14.88	31.74	46.62	74.00	-27.38	peak
5	6213.333	16.35	30.92	47.27	74.00	-26.73	peak
6	7176.667	18.77	31.42	50.19	74.00	-23.81	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured



7. 20dB Bandwidth Measurement Data


7.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

7.3 Test Setup Layout



7.4 Test Result and Data

Test Date: Jan. 15, 2018

Temperature: 25°C

Atmospheric pressure: 1020 hPa

Humidity: 55%

1M

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)
00	2402	0.722	481
39	2441	0.745	497
78	2480	0.75	500

2M


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)
00	2402	1.133	755
39	2441	1.137	758
78	2480	1.122	748

3M


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)
00	2402	1.157	771
39	2441	1.156	771
78	2480	1.169	779



Modulation Standard: GFSK (1Mbps)
Channel: 00

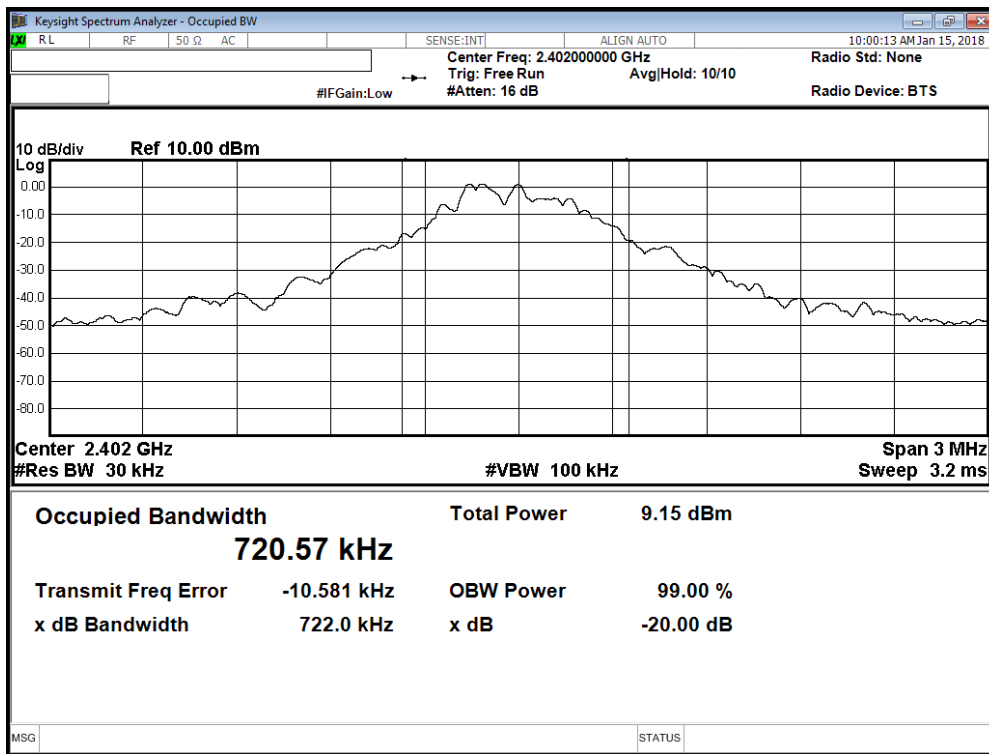


Modulation Standard: GFSK (1Mbps)
Channel: 39

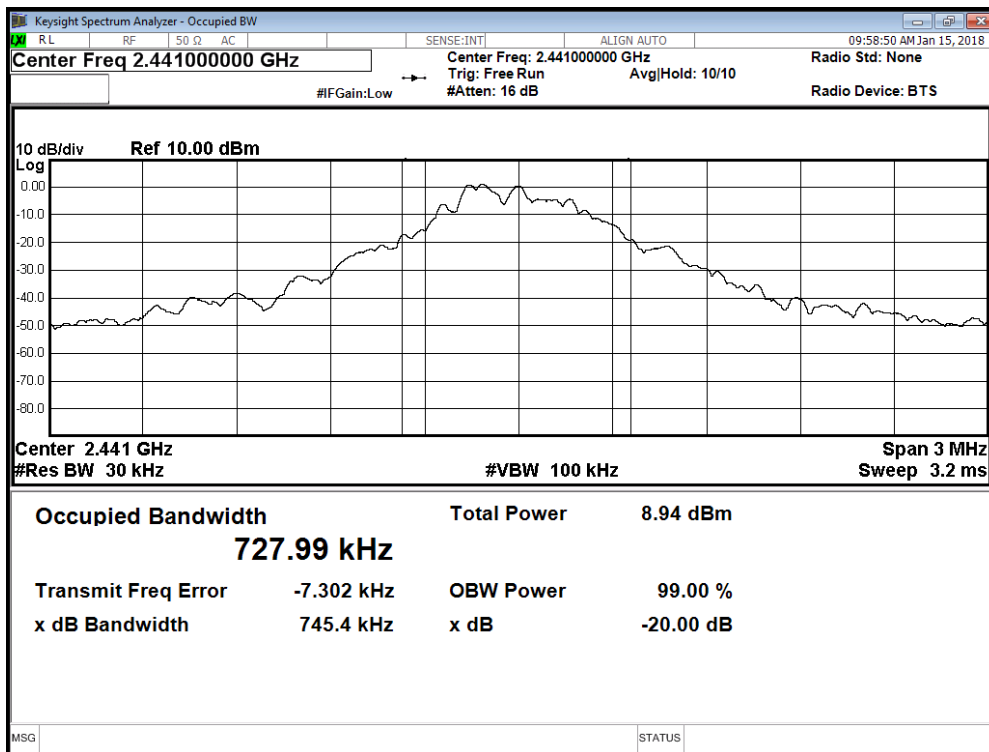




Modulation Standard: GFSK (1Mbps)
Channel: 78

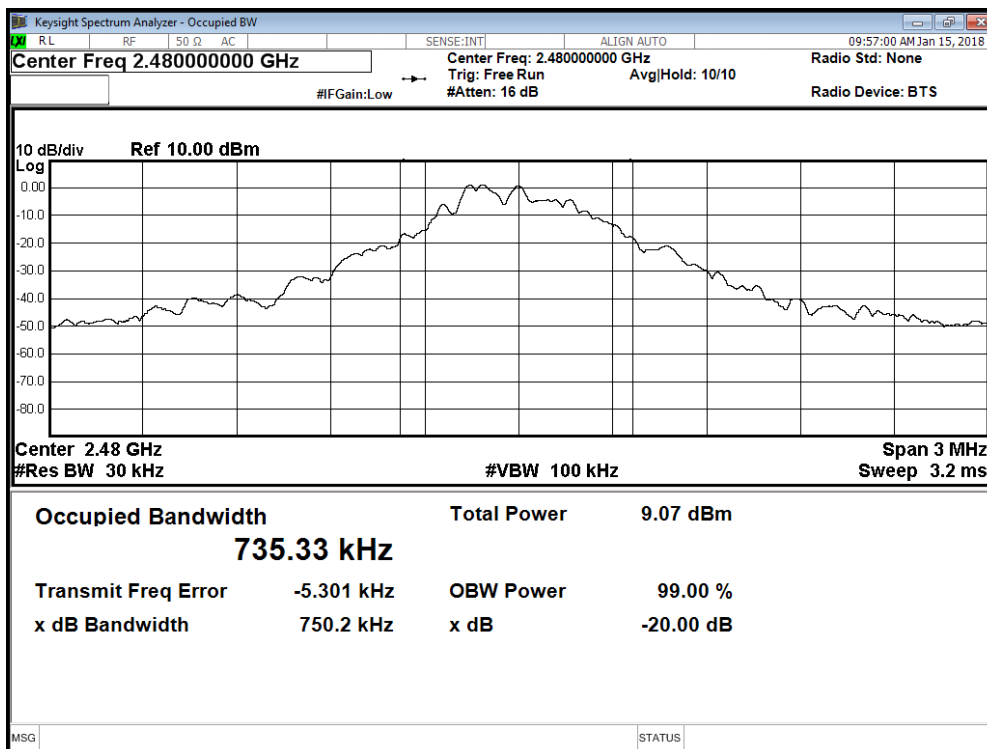


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 00

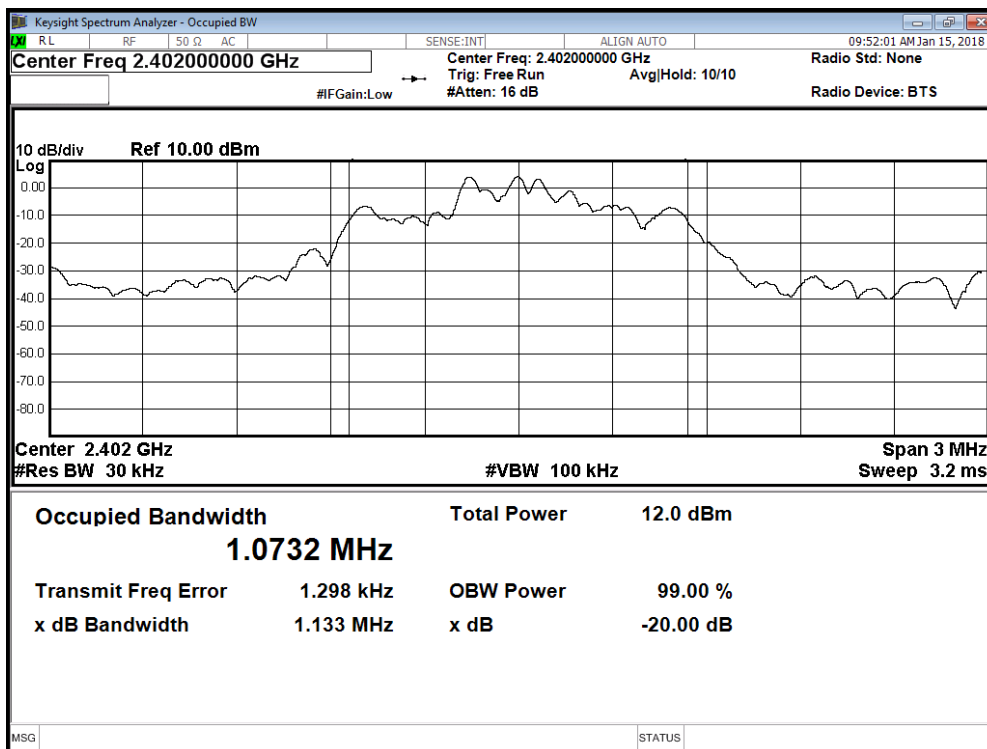




Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 39

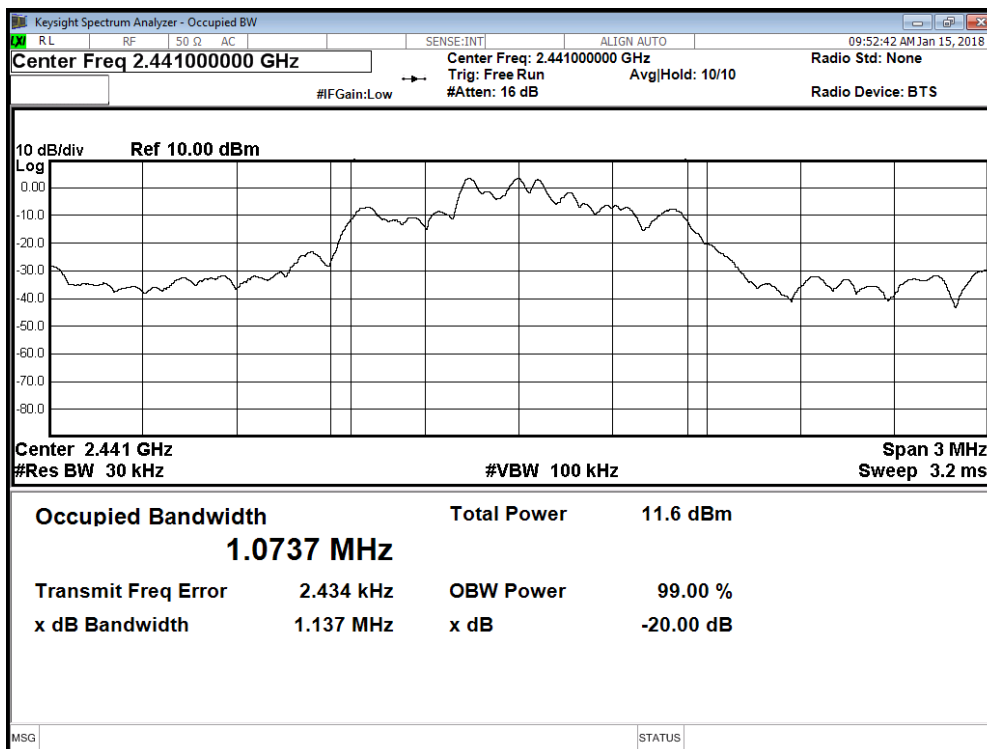


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 78

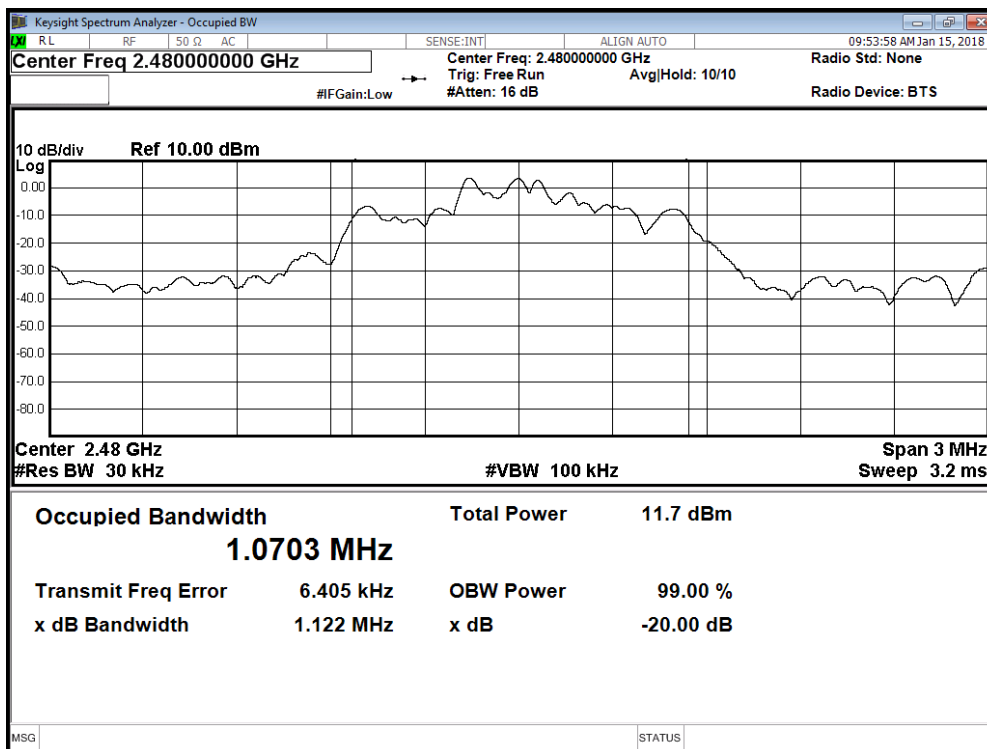




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

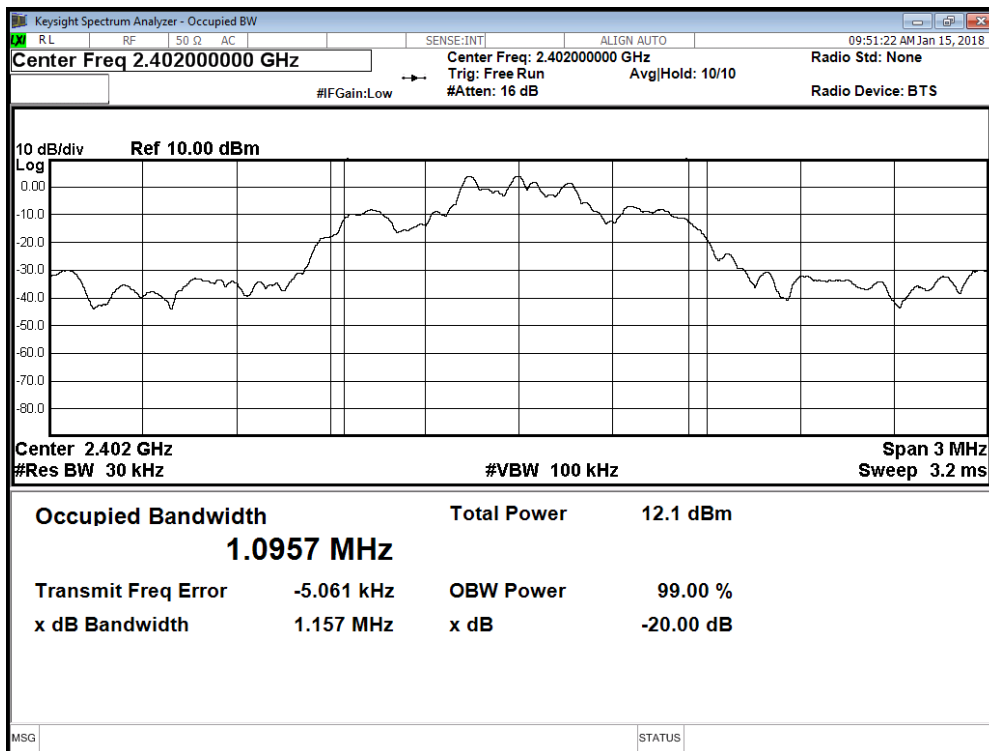


Modulation Standard: 8DPSK (3Mbps)
Channel: 39

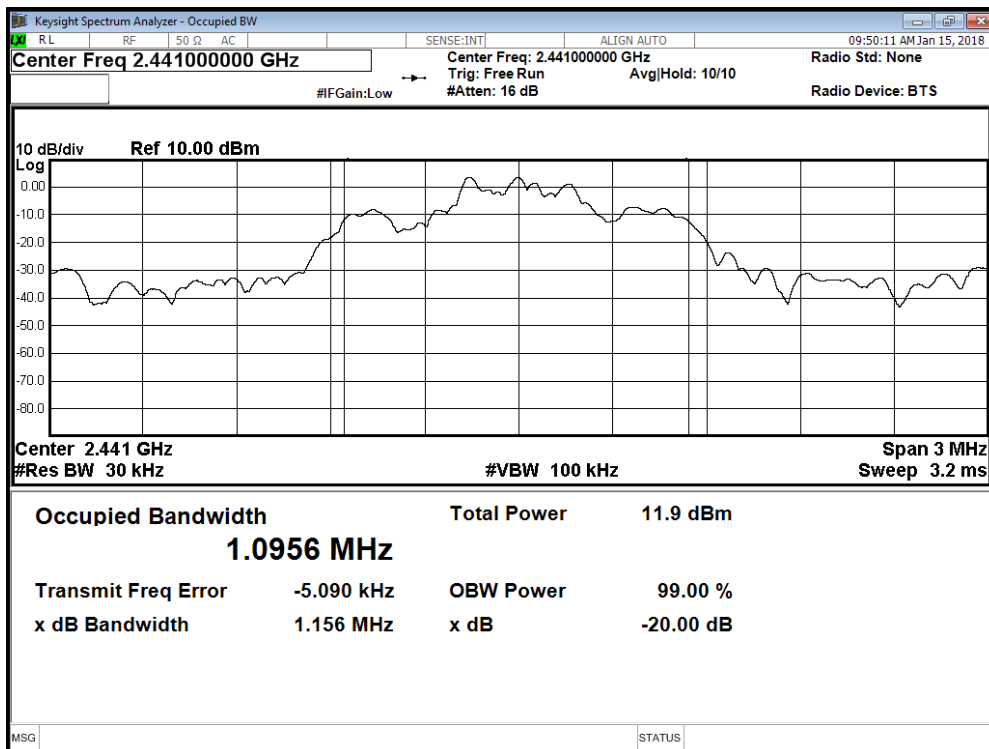



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

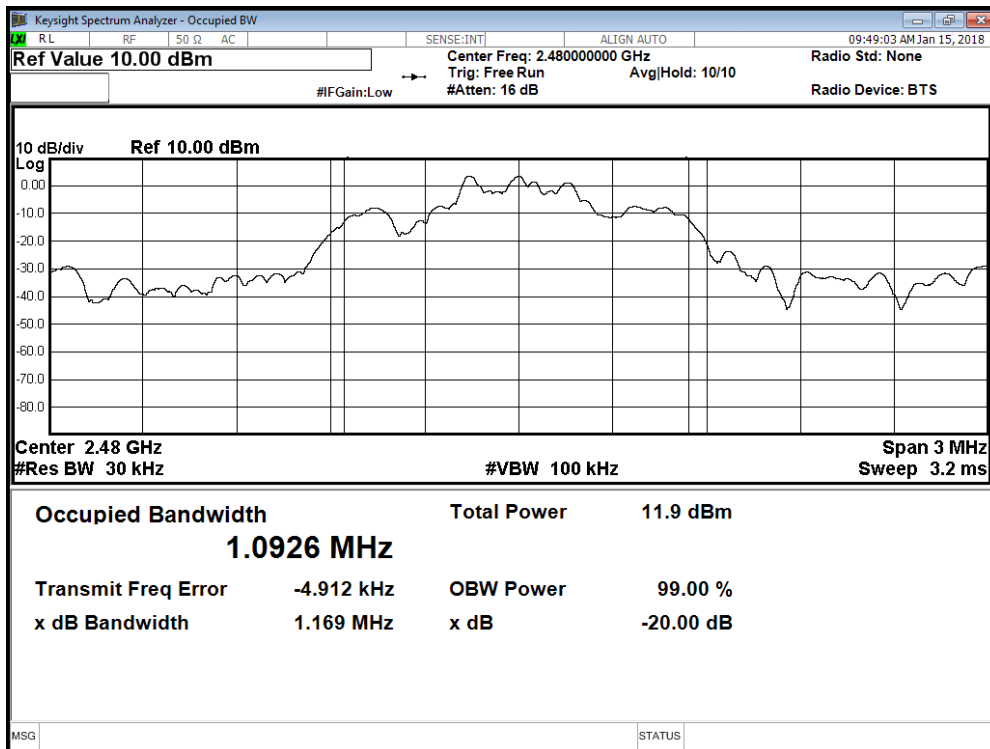



8. Frequencies Separation


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

8.3 Test Setup Layout



8.4 Test Result and Data

Test Date: Jan. 15, 2018

Temperature: 25°C

Atmospheric pressure: 1020 hPa

Humidity: 55%

1M

Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	2/3 of 20dB Bandwidth (MHz)
2402	1.000	\geq 2/3 of 20dB Bandwidth	0.481
2441	1.000	\geq 2/3 of 20dB Bandwidth	0.497
2480	1.000	\geq 2/3 of 20dB Bandwidth	0.500

2M

Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	2/3 of 20dB Bandwidth (MHz)
2402	1.000	\geq 2/3 of 20dB Bandwidth	0.481
2441	1.000	\geq 2/3 of 20dB Bandwidth	0.497
2480	1.000	\geq 2/3 of 20dB Bandwidth	0.500

3M


Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	2/3 of 20dB Bandwidth (MHz)
2402	1.000	\geq 2/3 of 20dB Bandwidth	0.771
2441	1.000	\geq 2/3 of 20dB Bandwidth	0.771
2480	1.000	\geq 2/3 of 20dB Bandwidth	0.779



Modulation Standard: GFSK (1Mbps)




Modulation Standard: $\pi/4$ DQPSK (2Mbps)

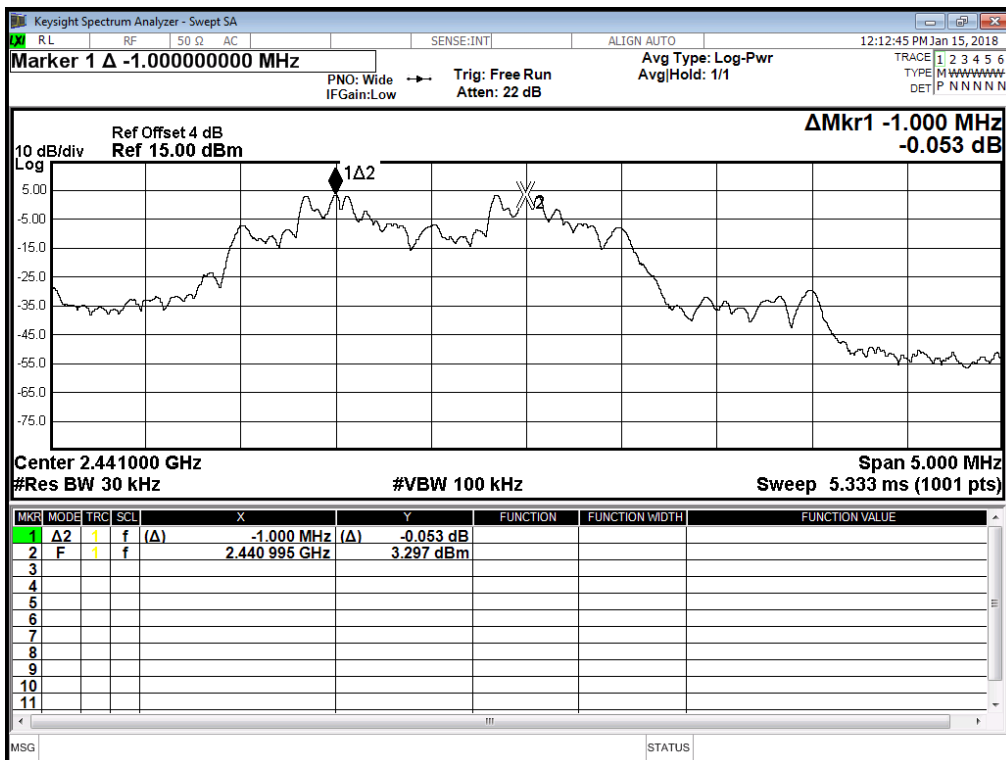



Modulation Standard: 8DPSK(3Mbps)

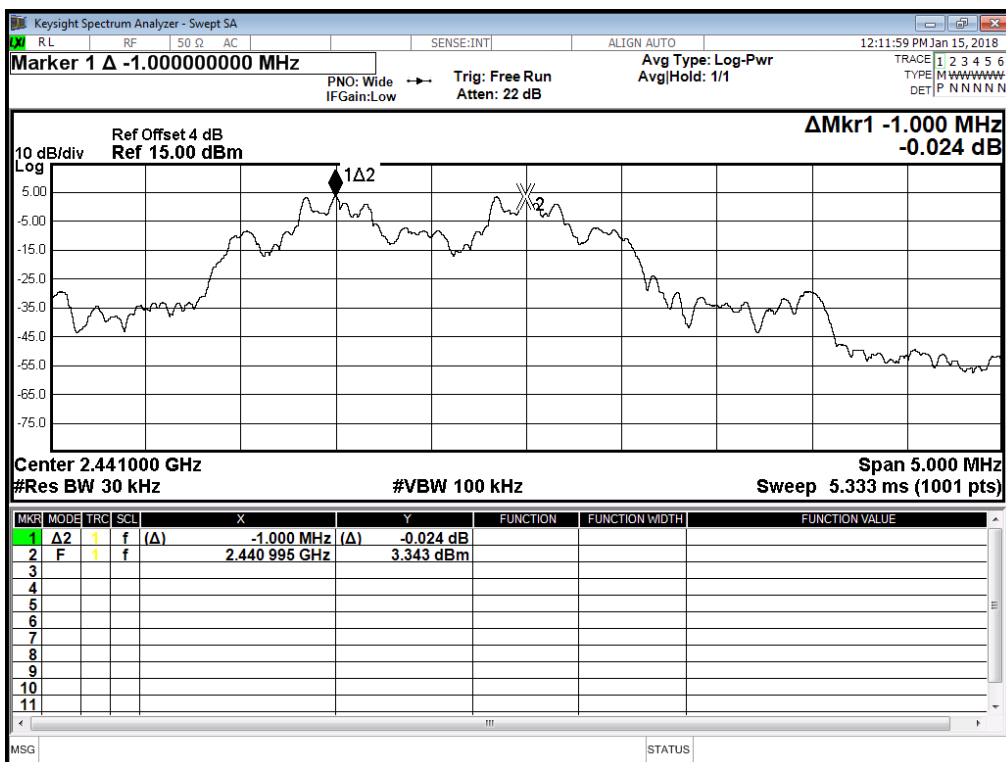



9. Dwell Time on each channel


9.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

9.3 Test Setup Layout





9.4 Test Result and Data

Test Date : Jan. 15, 2018 Temperature : 22C
Atmospheric pressure : 1017 hPa Humidity : 60 %
Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec

Modulation Standard: GFSK(1Mbps)

DH 1

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.408	130.56	31.6	400	PASS

Remark: Total of Dwell = pulse Time * (1600/2) / 79 * Period Time

DH 3

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.659	265.44	31.6	400	PASS

Remark: Total of Dwell = pulse Time * (1600/4) / 79 * Period Time

DH 5

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.91	310.40	31.6	400	PASS

Remark: Total of Dwell = pulse Time * (1600/6) / 79 * Period Time



Modulation Standard: $\pi/4$ DQPSK(2Mbps)

DH 1

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.42	134.4	31.6	400	PASS

Remark: Total of Dwell = pulse Time*(1600/2)/79*Period Time

DH 3

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.668	266.88	31.6	400	PASS

Remark: Total of Dwell = pulse Time*(1600/4)/79*Period Time

DH 5

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.92	311.47	31.6	400	PASS

Remark: Total of Dwell = pulse Time*(1600/6)/79*Period Time

Modulation Standard: 8DPSK(3Mbps)

DH 1

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.414	132.48	31.6	400	PASS

Remark: Total of Dwell = pulse Time*(1600/2)/79*Period Time

DH 3

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.668	266.88	31.6	400	PASS

Remark: Total of Dwell = pulse Time*(1600/4)/79*Period Time

DH 5


Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.92	311.47	31.6	400	PASS

Remark: Total of Dwell = pulse Time*(1600/6)/79*Period Time




Modulation Standard: GFSK (1Mbps)

DH1

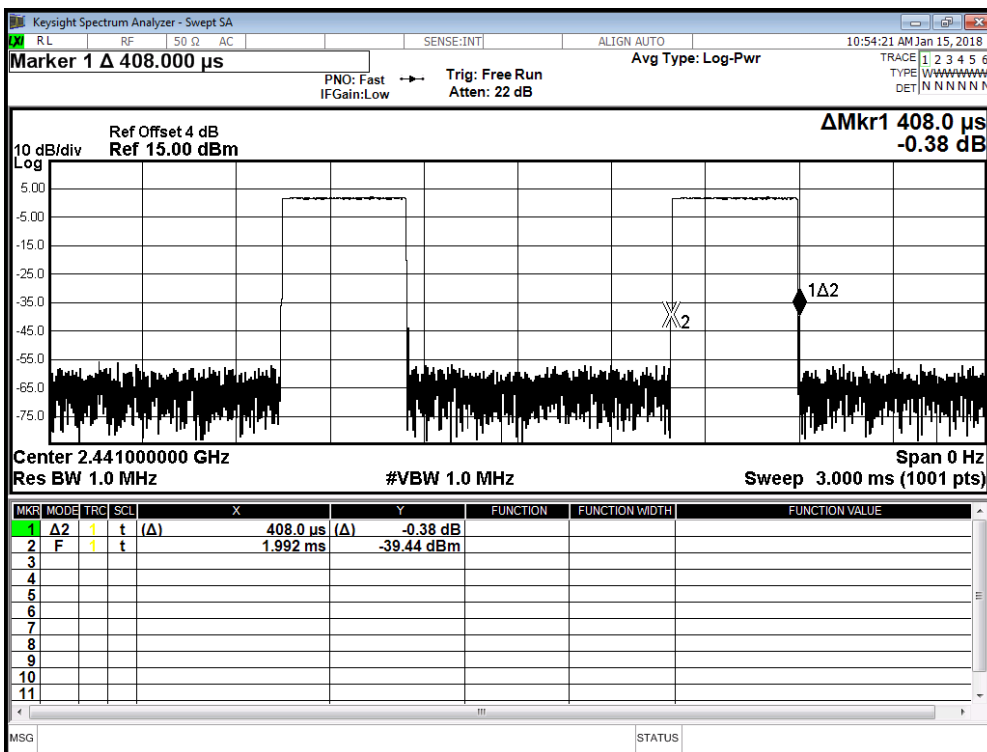

Modulation Standard: GFSK (1Mbps)


DH3

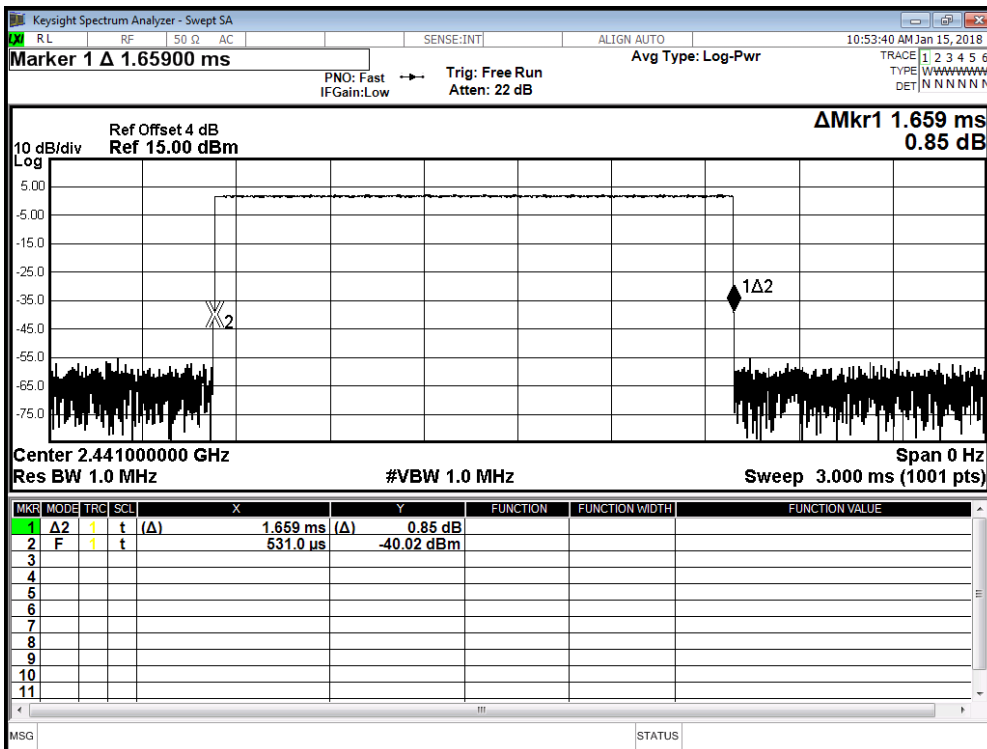




Modulation Standard: GFSK (1Mbps)

DH5

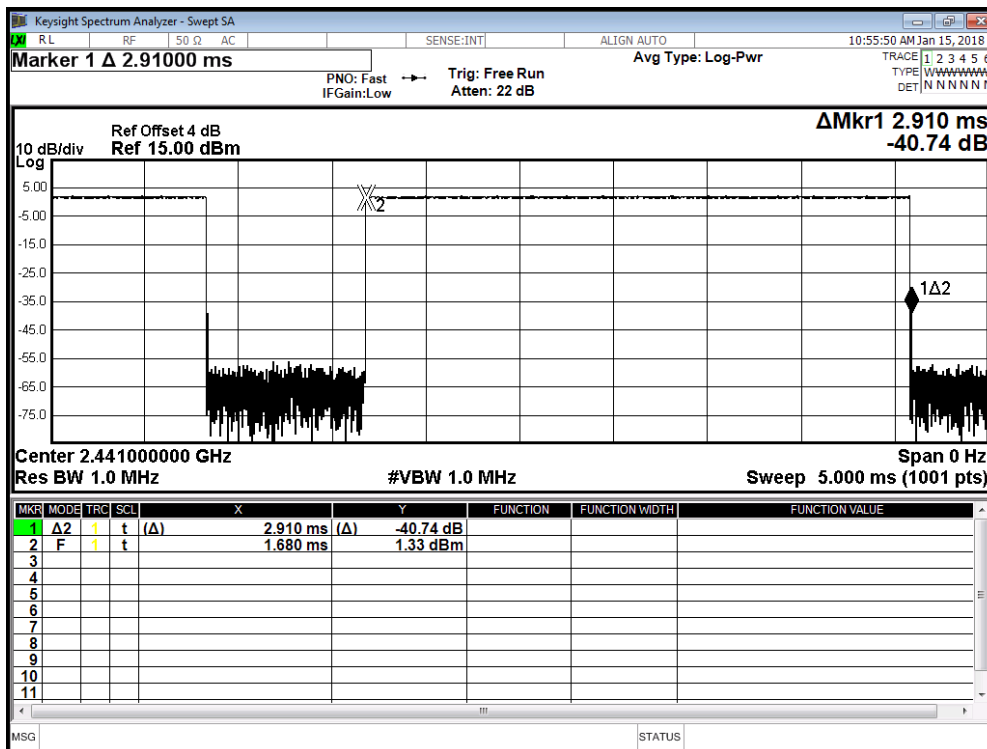


Modulation Standard: $\pi/4$ DQPSK (2Mbps)

DH1

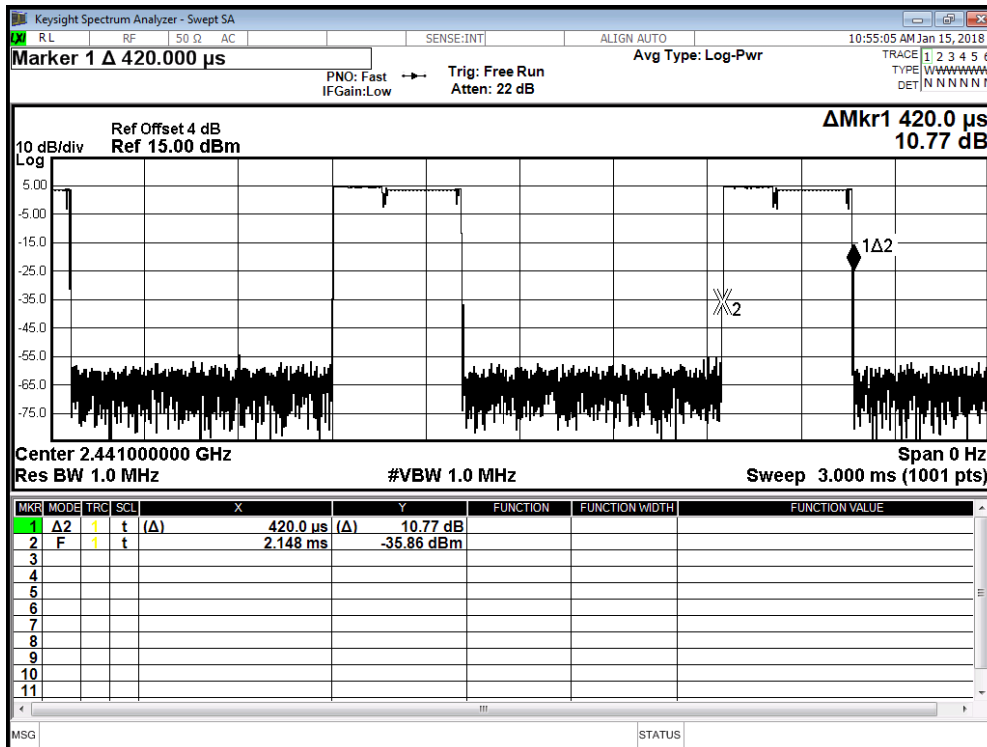




Modulation Standard: $\pi/4$ DQPSK (2Mbps)
DH3

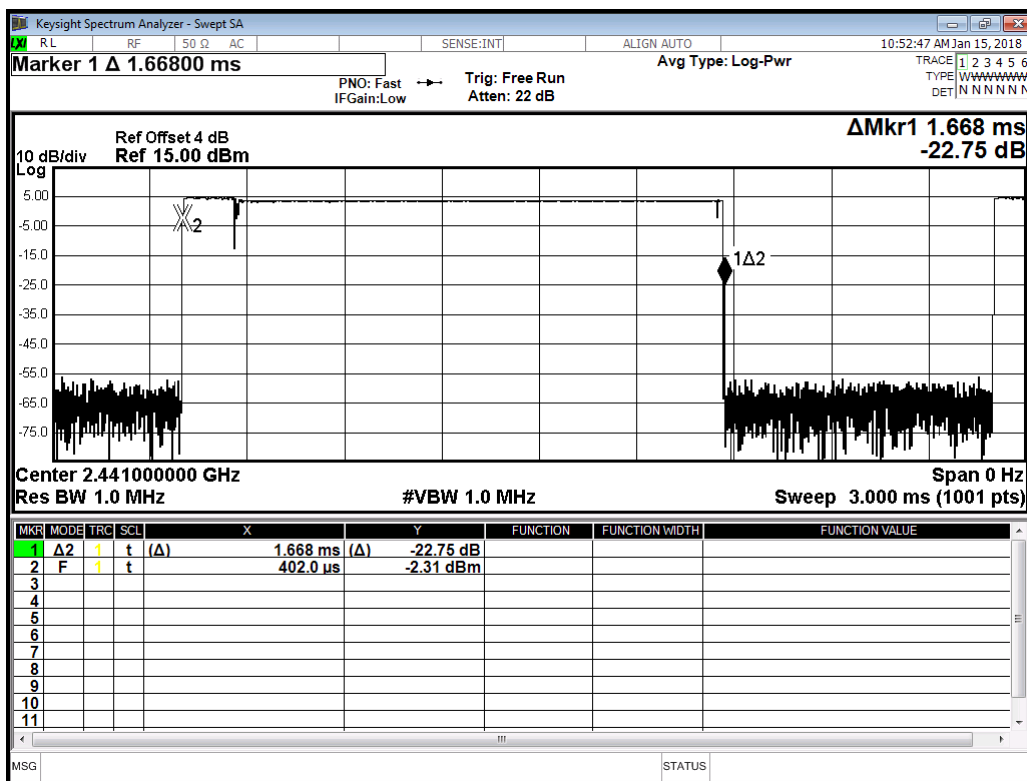


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
DH5

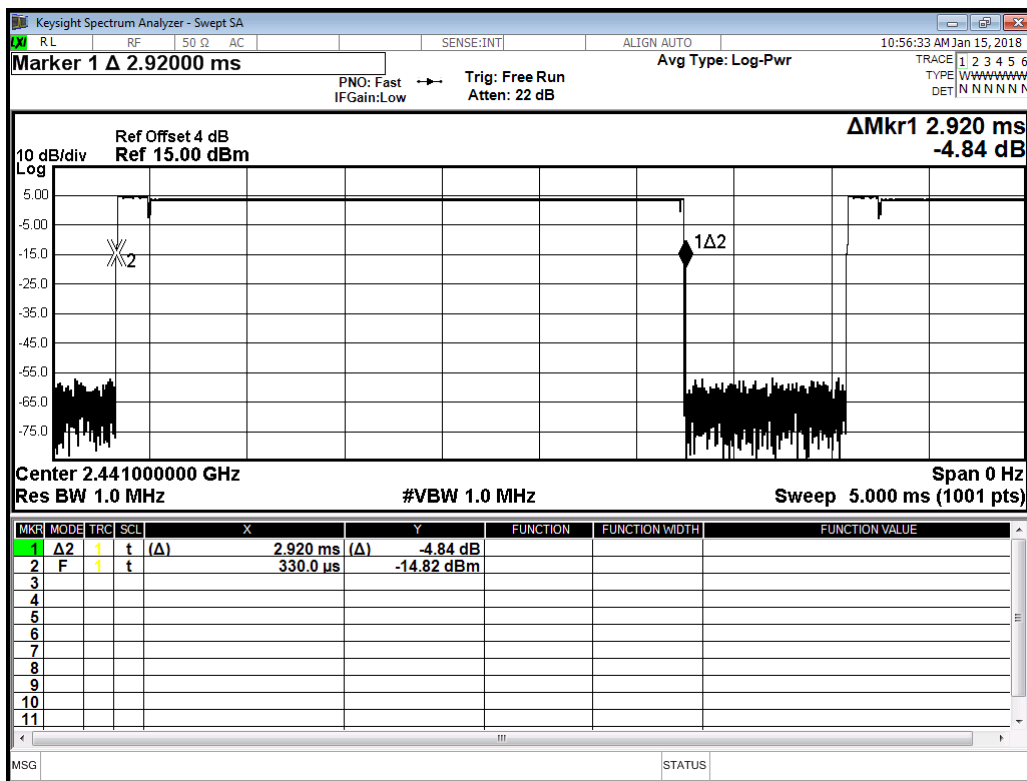




Modulation Standard: 8DPSK (3Mbps)

DH1

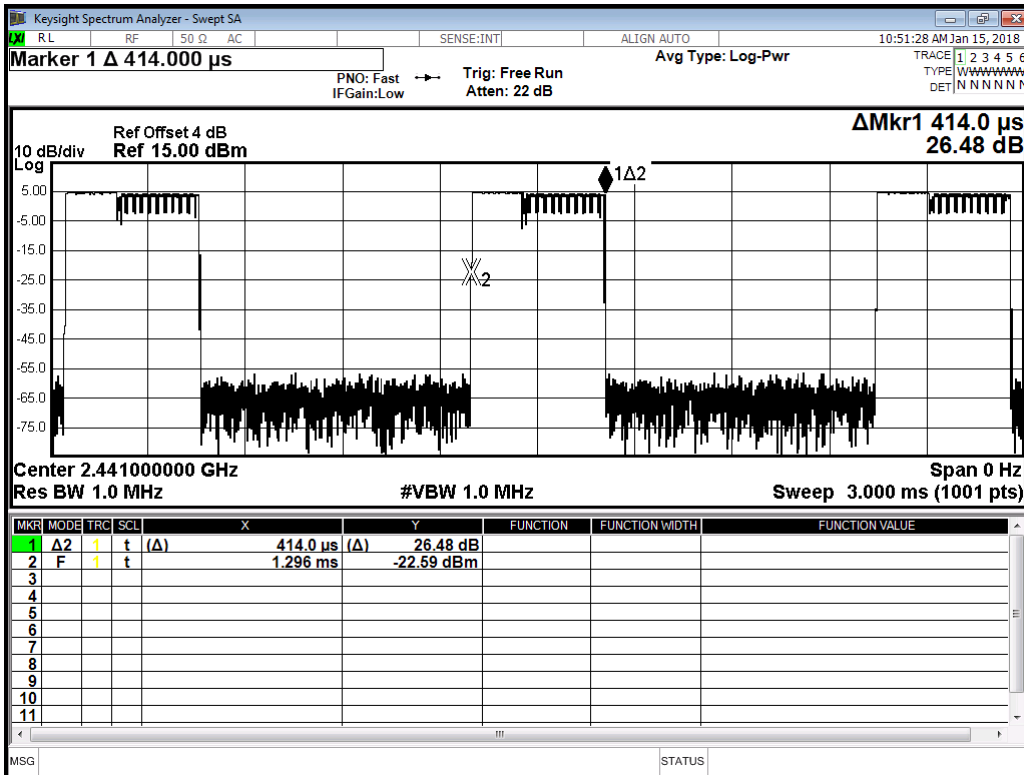


Modulation Standard: 8DPSK (3Mbps)

DH3

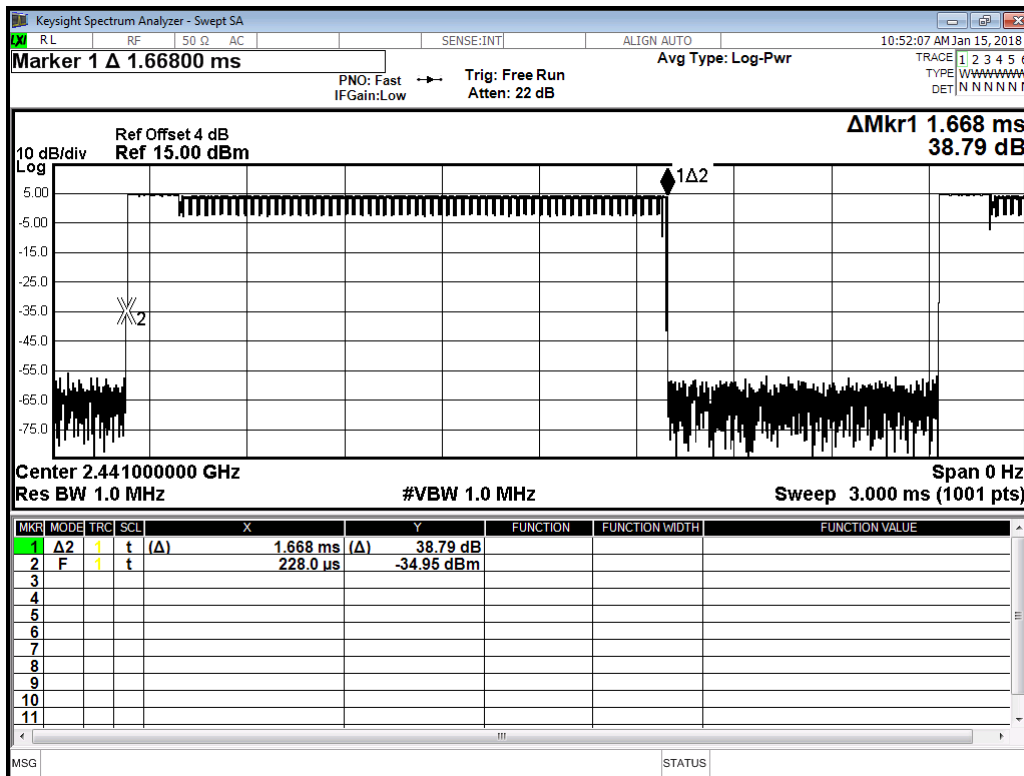



Modulation Standard: 8DPSK (3Mbps)
DH5

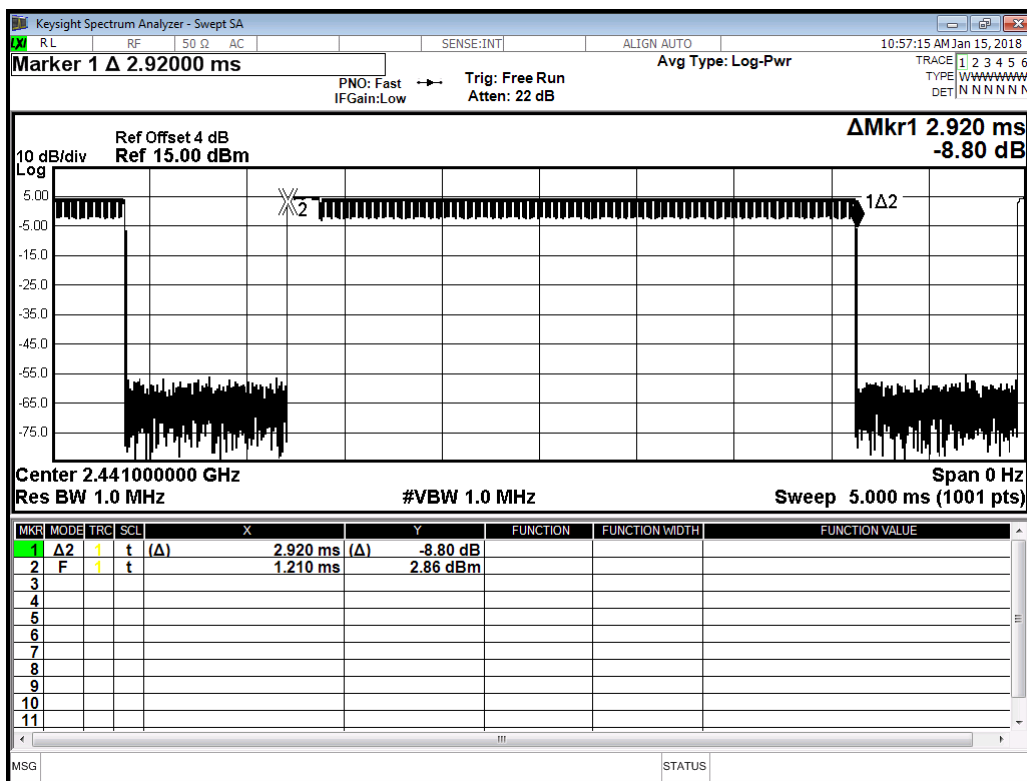



10. Number of Hopping Channels


10.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

10.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. 2. Set RBW of spectrum analyzer to 300 KHz and VBW to 300 KHz.
- c. 3. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

10.3 Test Setup Layout



10.4 Test Result and Data

Test Date: Jan. 15, 2018

Temperature: 25°C

Atmospheric pressure: 1020 hPa

Humidity: 55%

Modulation Standard: GFSK (1Mbps)

Number of hopping channels:	79	Channels
-----------------------------	----	----------

Modulation Standard: $\pi/4$ DQPSK (2Mbps)


Number of hopping channels:	79	Channels
-----------------------------	----	----------

Modulation Standard: 8DPSK (3Mbps)


Number of hopping channels:	79	Channels
-----------------------------	----	----------



Modulation Standard: GFSK (1Mbps)

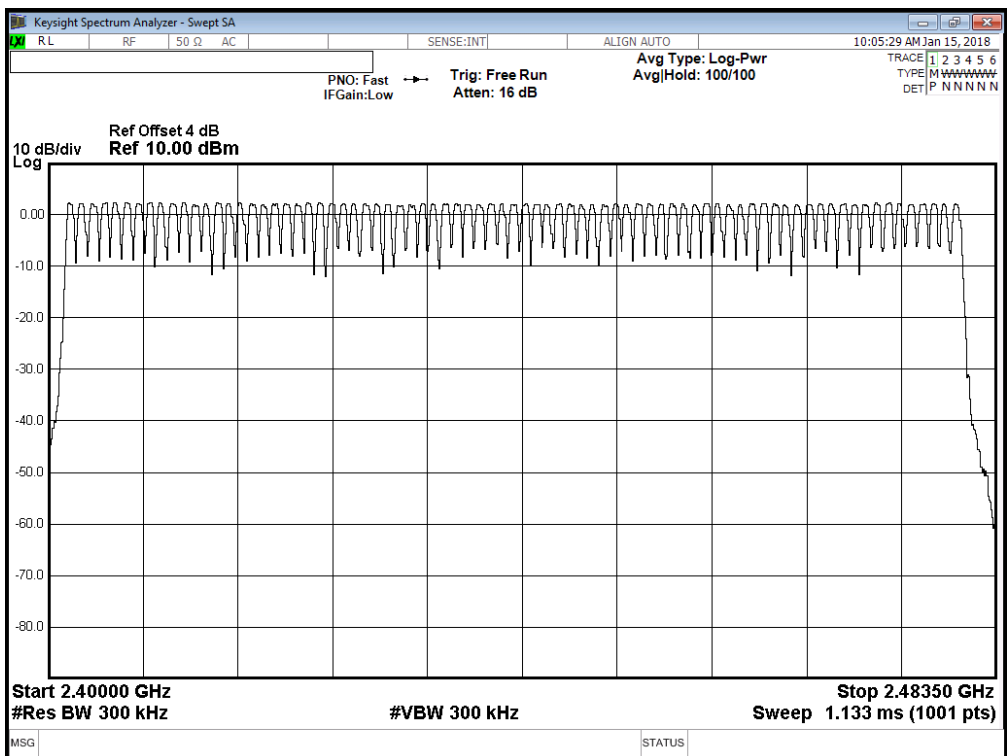


Modulation Standard: $\pi/4$ DQPSK (2Mbps)

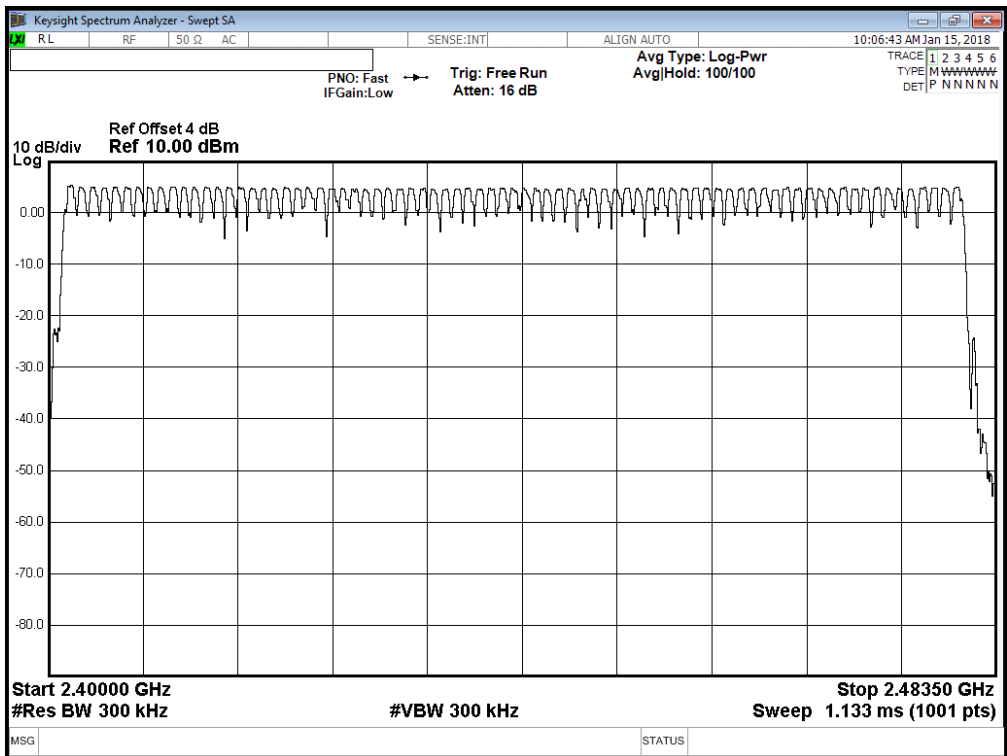



Modulation Standard: 8DPSK (3Mbps)

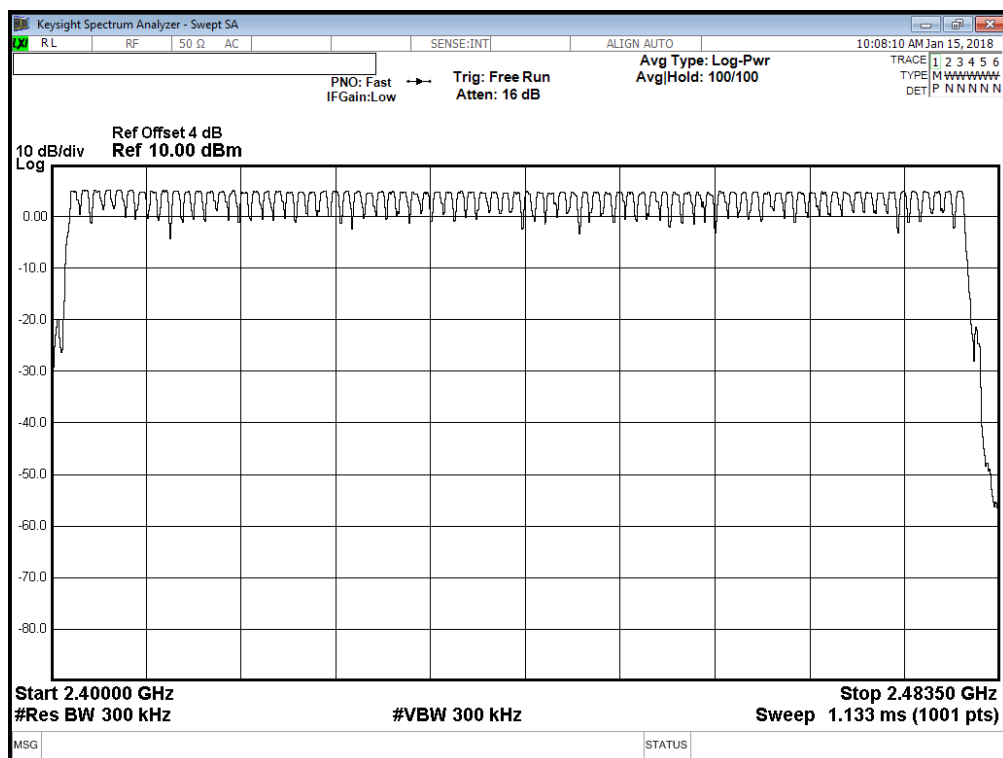



11. Maximum Peak Output Power

11.1 Test Limit


The Maximum Peak Output Power Measurement is 21dBm.

11.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter.

Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

11.3 Test Setup Layout



11.4 Test Result and Data

Test Date: Jan. 15, 2018

Temperature: 25°C


Atmospheric pressure: 1020 hPa

Humidity: 55%


Modulation Type	Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
GFSK (1Mbps)	00	2402	2.656	1.843
	39	2441	2.442	1.755
	78	2480	2.493	1.775
$\pi/4$ DQPSK (2Mbps)	00	2402	5.229	3.333
	39	2441	4.851	3.056
	78	2480	5.000	3.162
8DPSK (3Mbps)	00	2402	5.242	3.343
	39	2441	4.850	3.055
	78	2480	4.994	3.158



Modulation Standard: GFSK (1Mbps)
Channel: 00

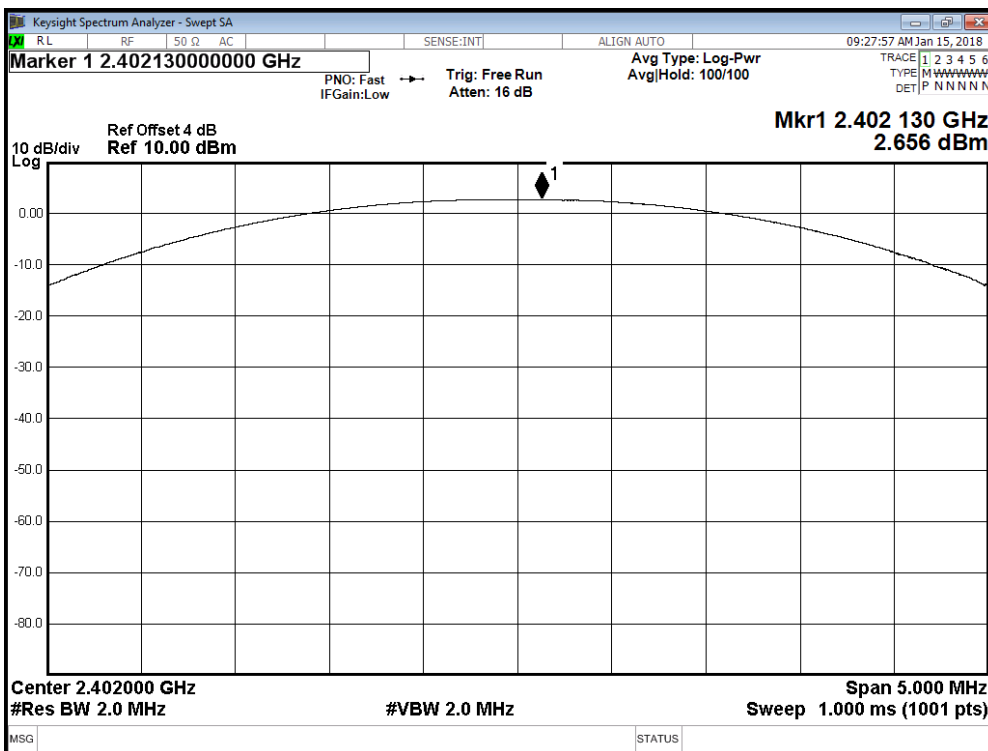


Modulation Standard: GFSK (1Mbps)
Channel: 39

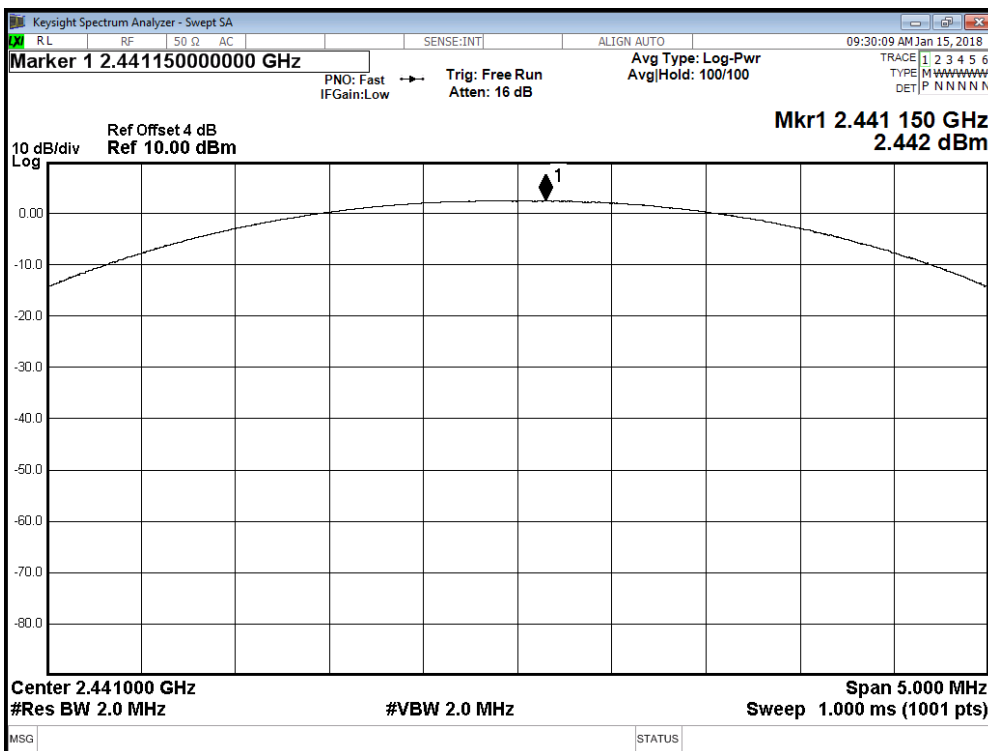




Modulation Standard: GFSK (1Mbps)
Channel: 78

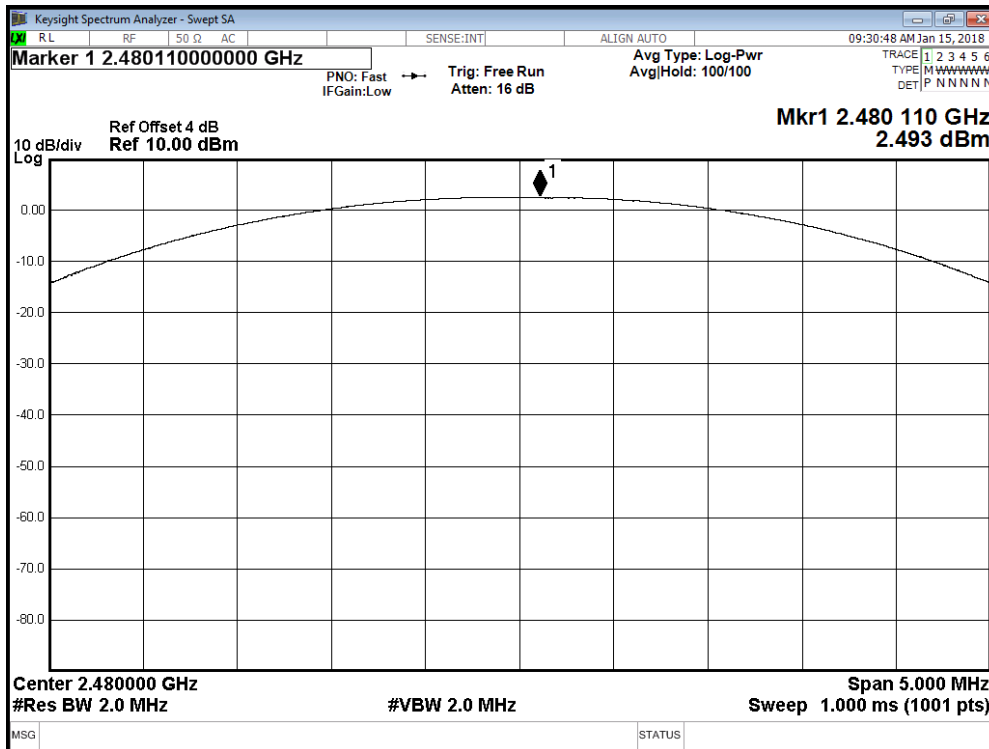


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 00

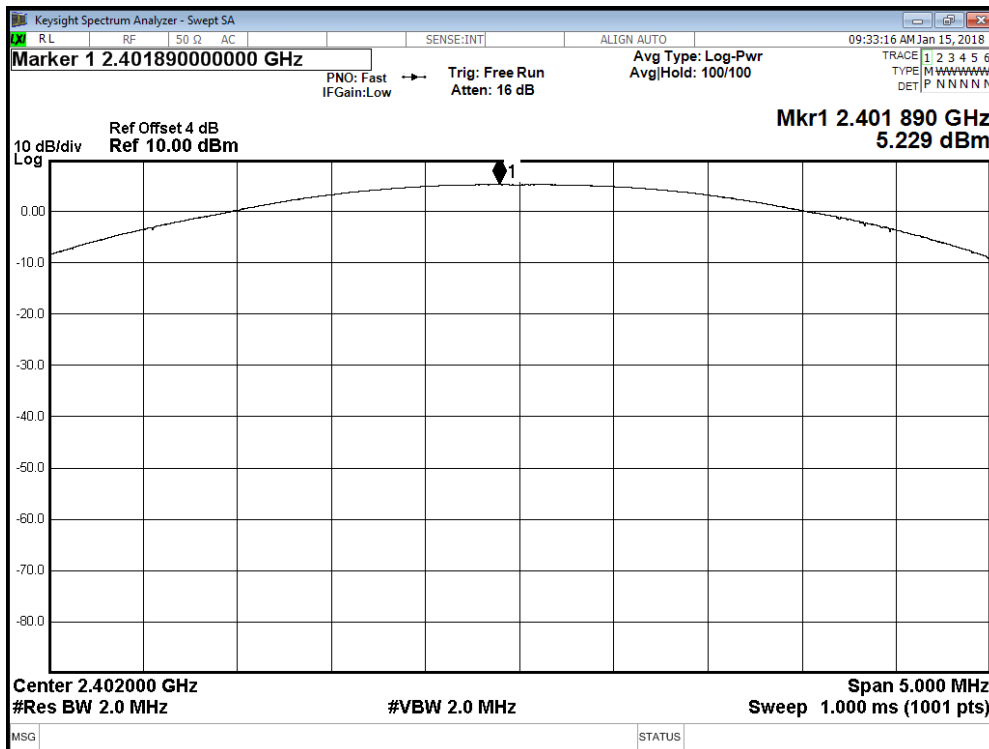




Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 39

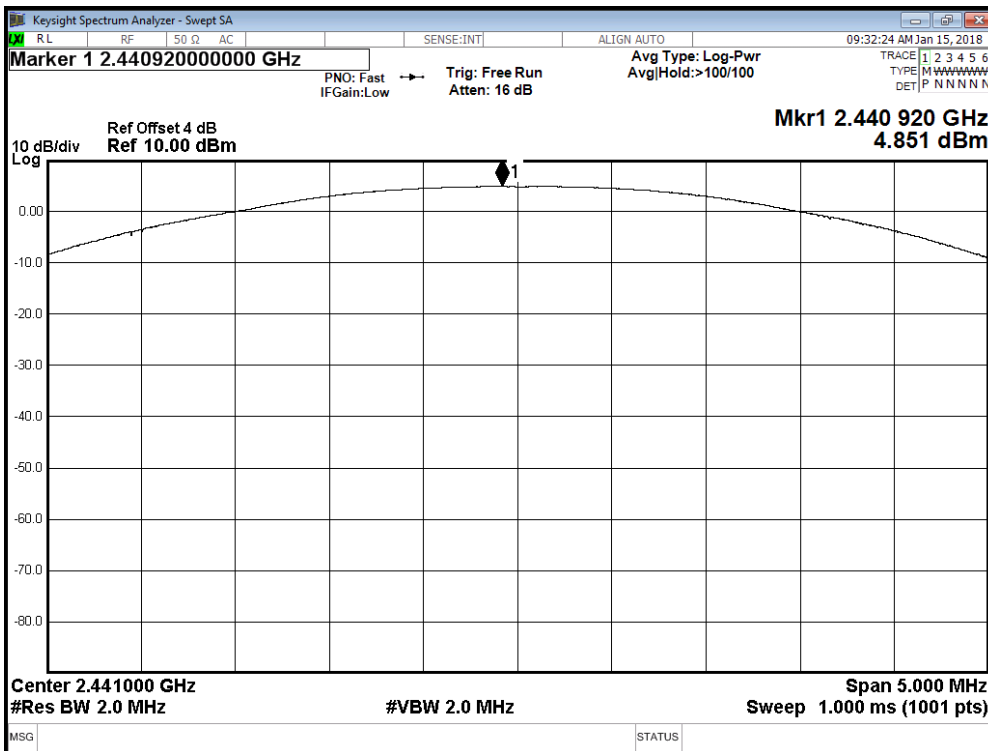


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 78

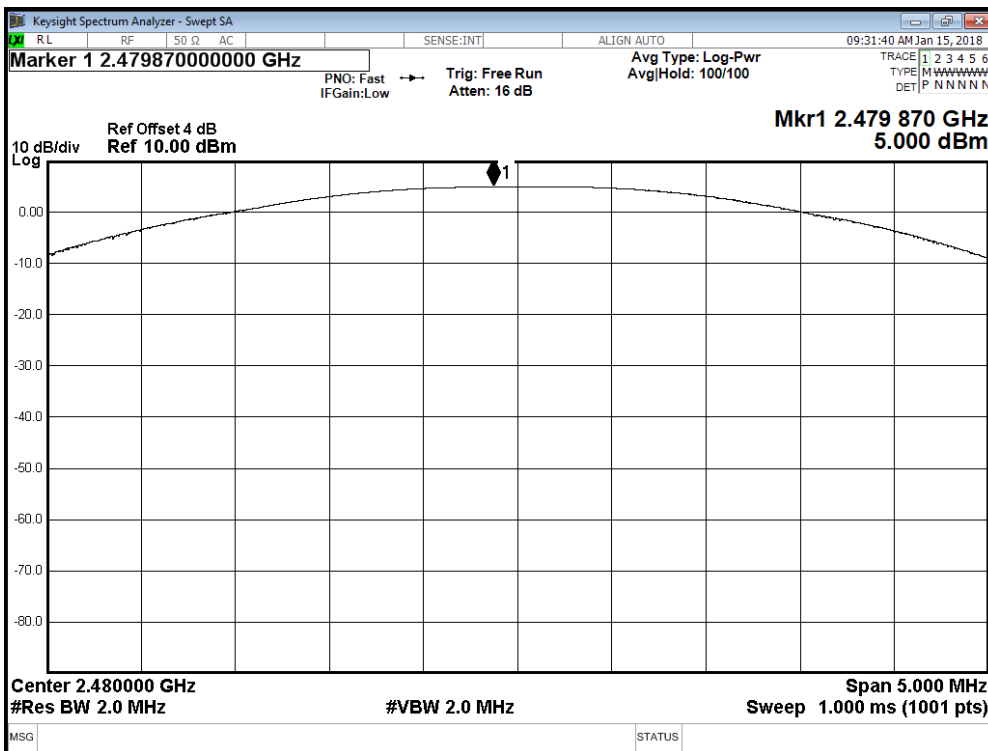




Modulation Standard: 8DPSK (3Mbps)
Channel: 00

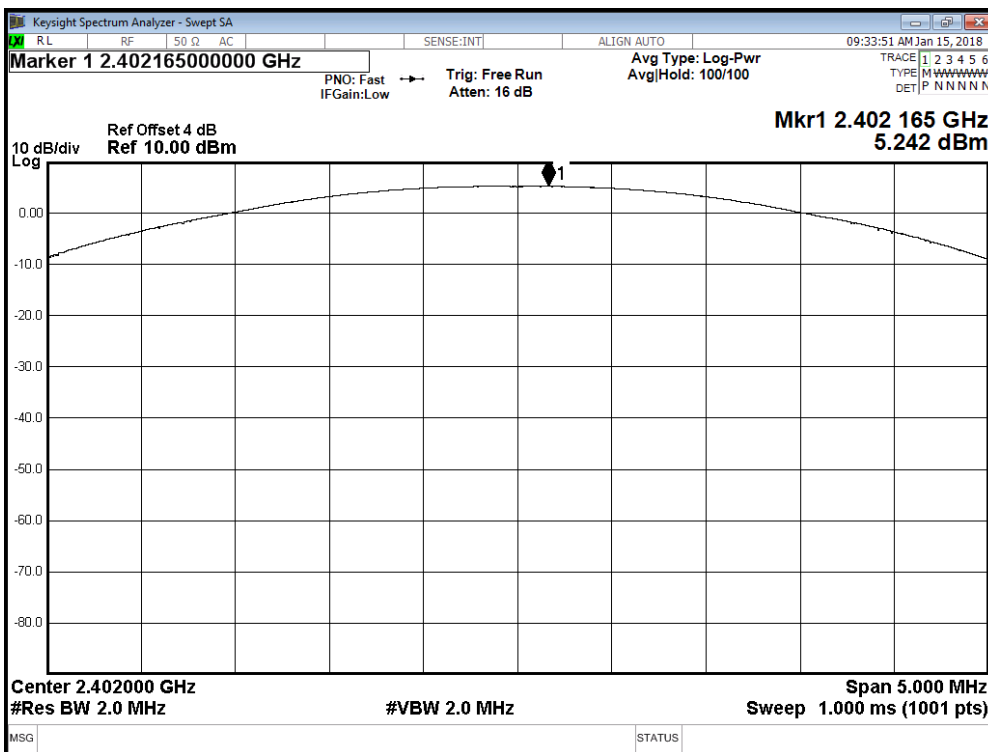


Modulation Standard: 8DPSK (3Mbps)
Channel: 39

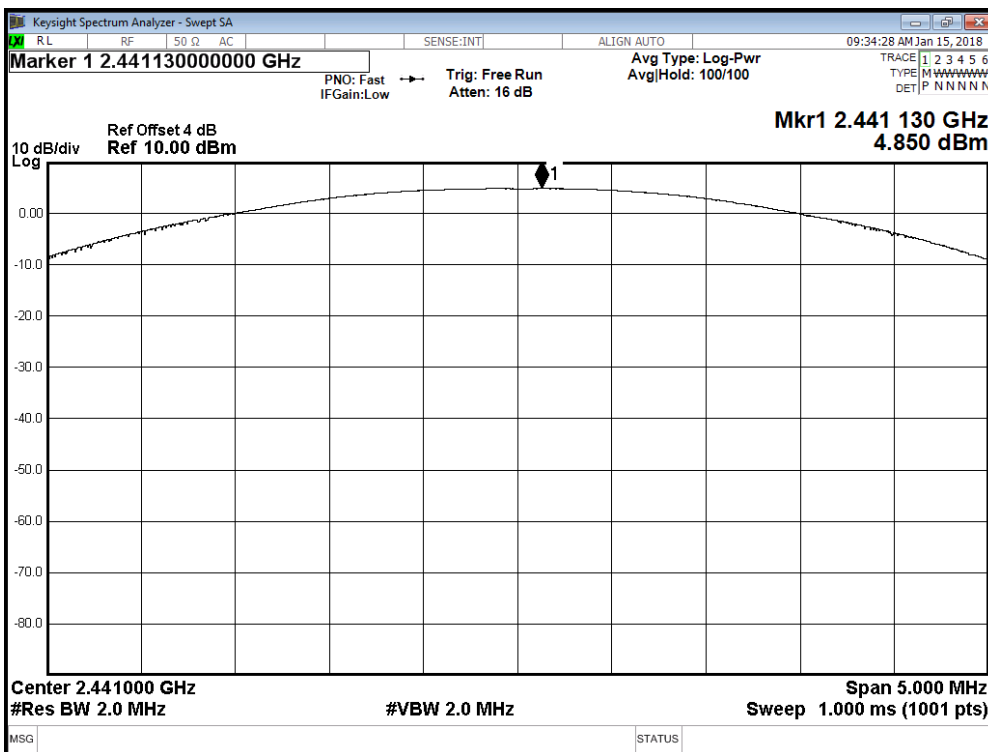



Modulation Standard: 8DPSK (3Mbps)
Channel: 78

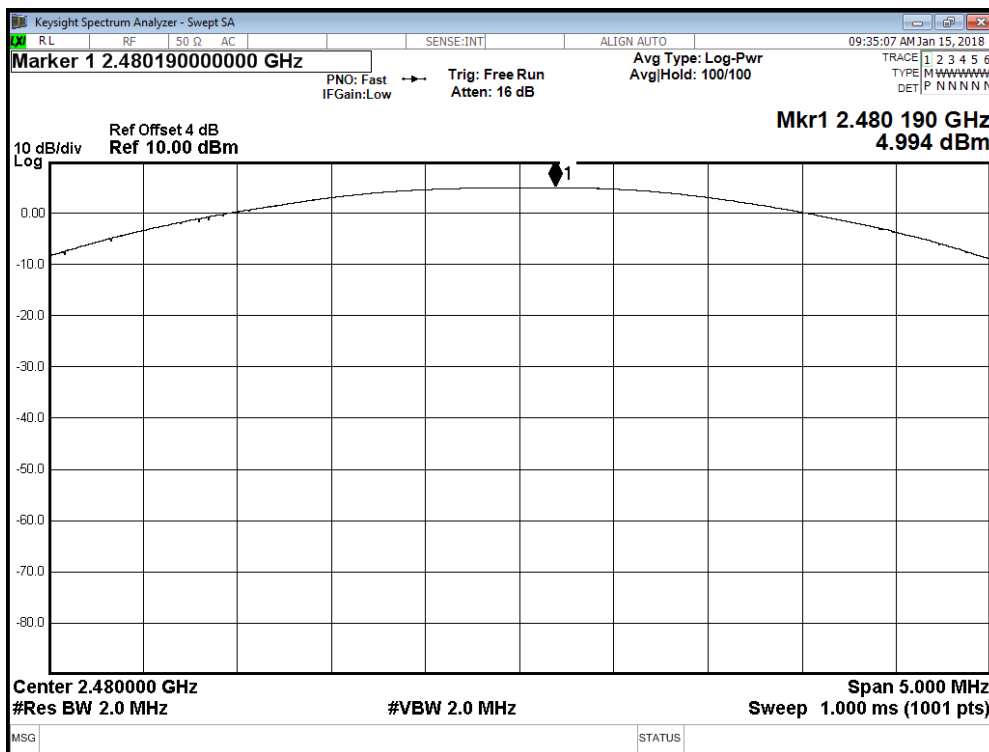



12. Band Edges Measurement


12.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

12.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

12.3 Test Setup Layout







12.4 Test Result and Data

Single test



Modulation Standard: GFSK (1Mbps)

Channel: 00

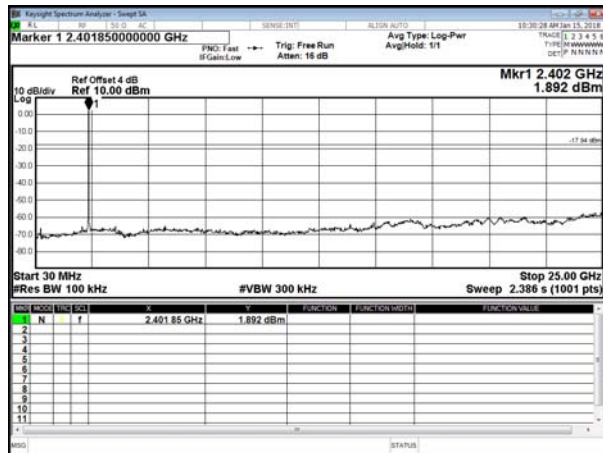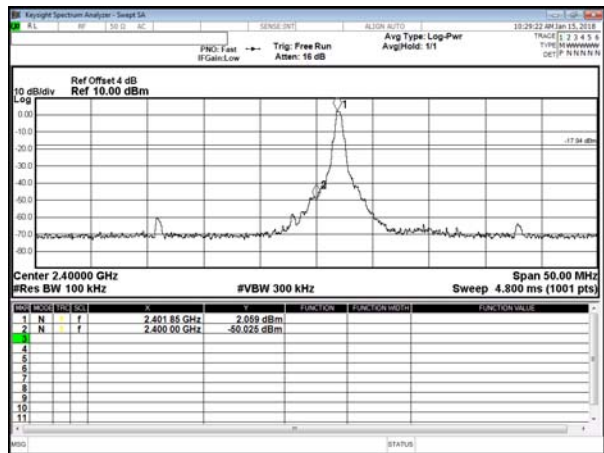



Modulation Standard: GFSK (1Mbps)

Channel: 39

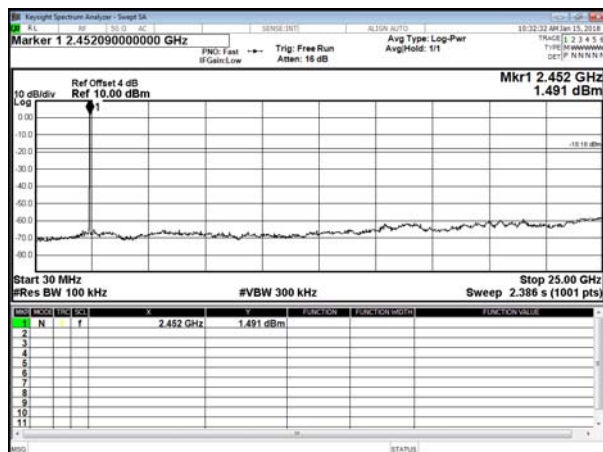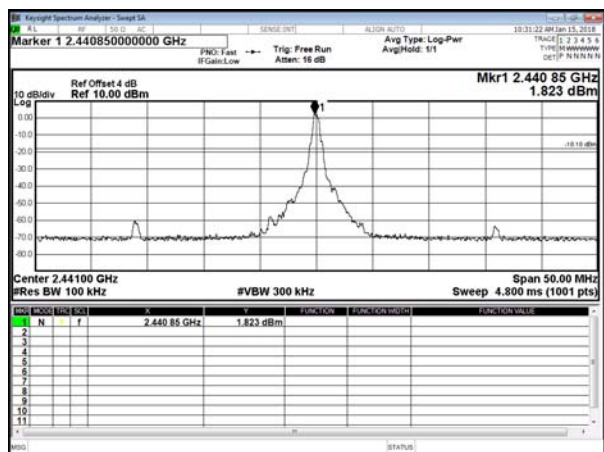

Modulation Standard: GFSK (1Mbps)



Channel: 78

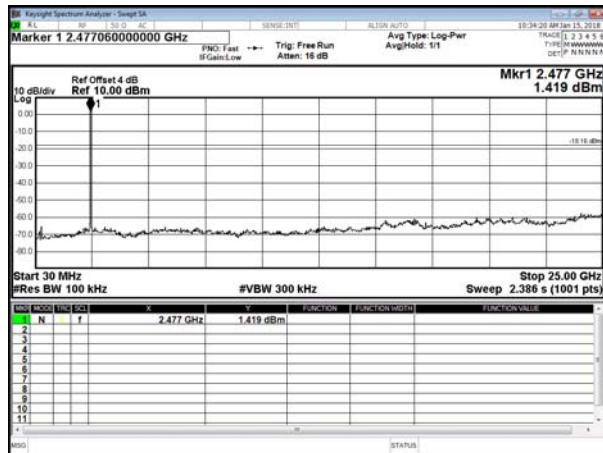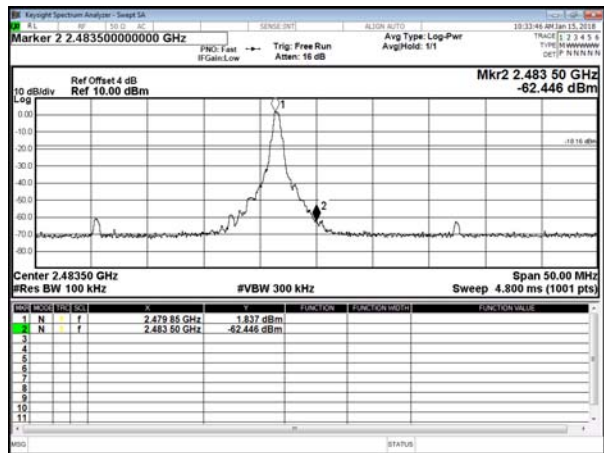





Modulation Standard: $\pi/4$ DQPSK (2Mbps)

Channel: 00

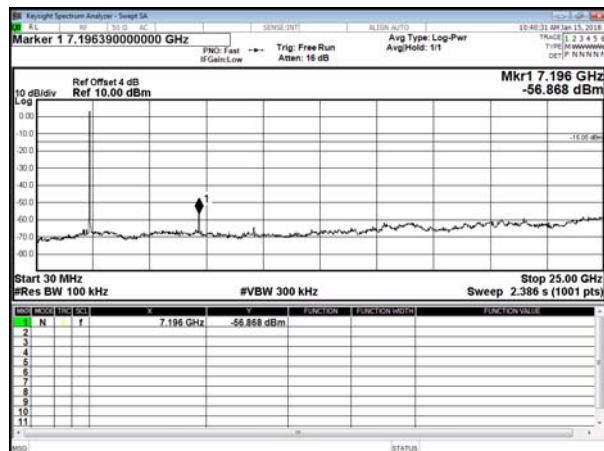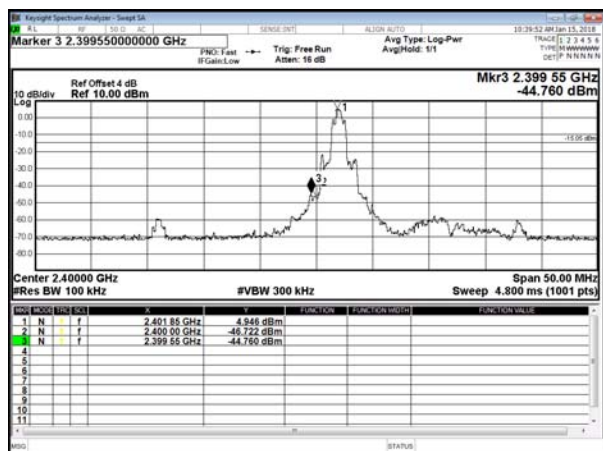


Modulation Standard: $\pi/4$ DQPSK (2Mbps)

Channel: 39

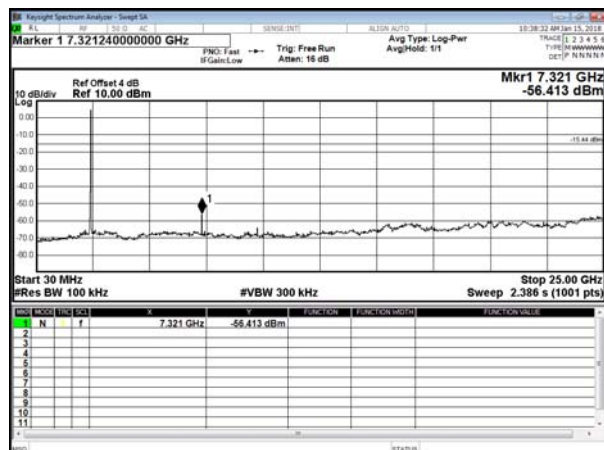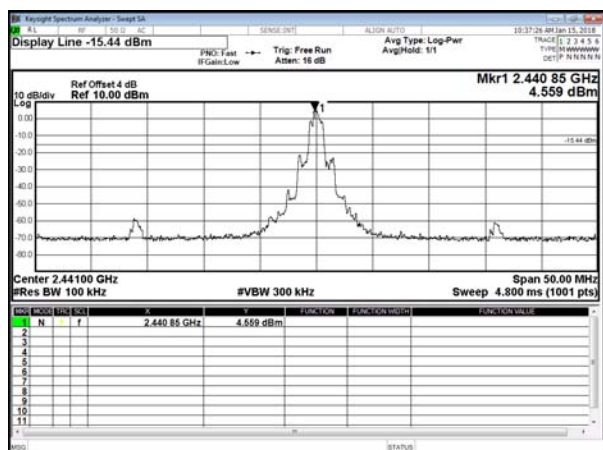



Modulation Standard: $\pi/4$ DQPSK (2Mbps)

Channel: 78


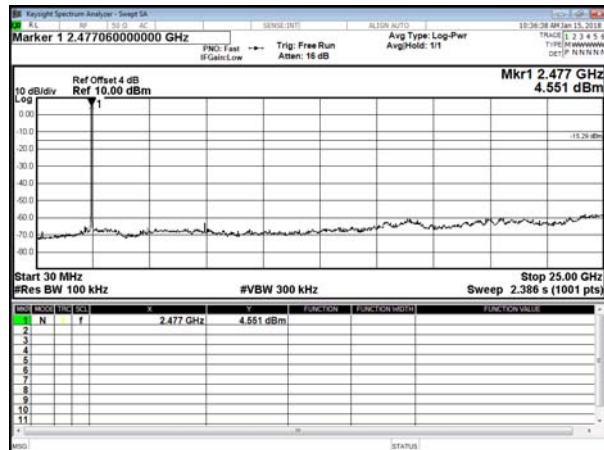





Modulation Standard: 8DPSK (3Mbps)
Channel: 00

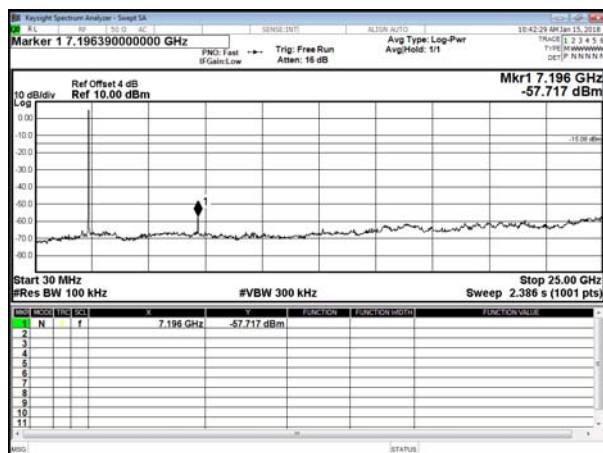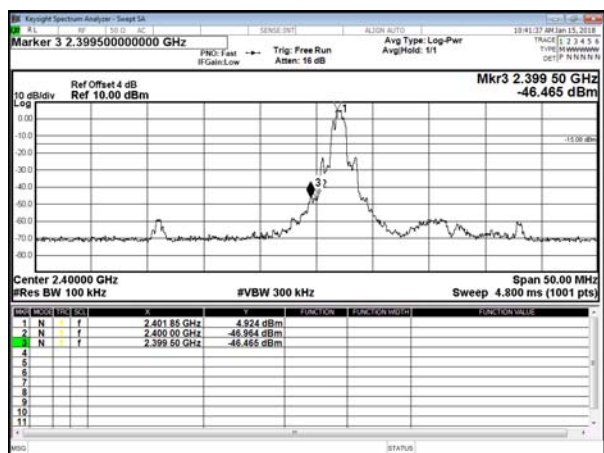

Modulation Standard: 8DPSK (3Mbps)
Channel: 39

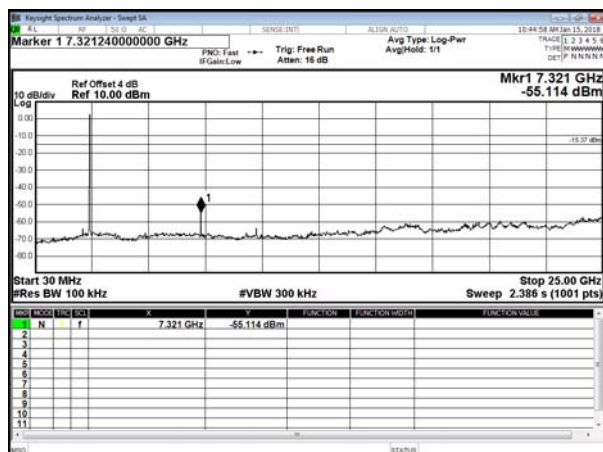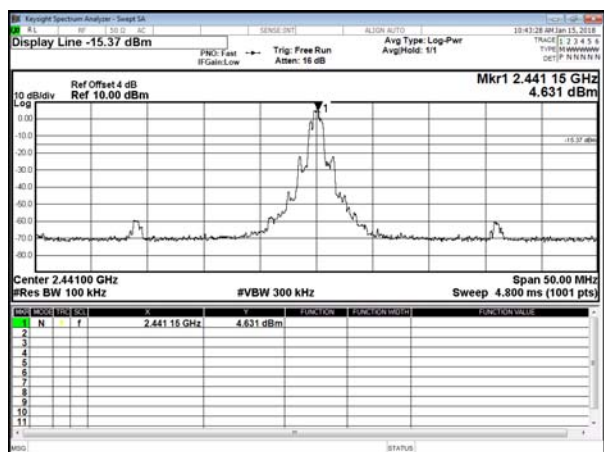


Modulation Standard: 8DPSK (3Mbps)
Channel: 78

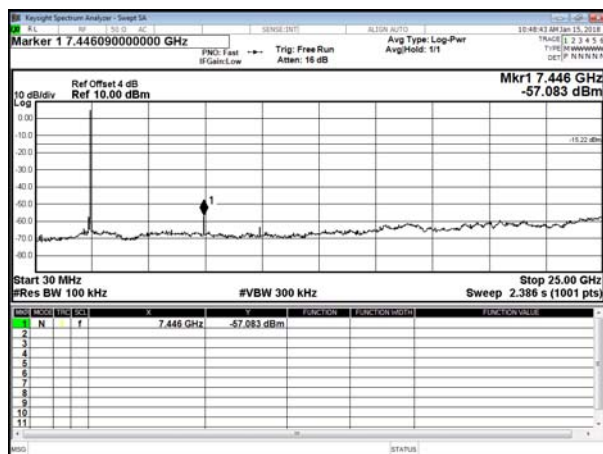




Hopping test


Modulation Standard: GFSK (1Mbps)
Channel: 00

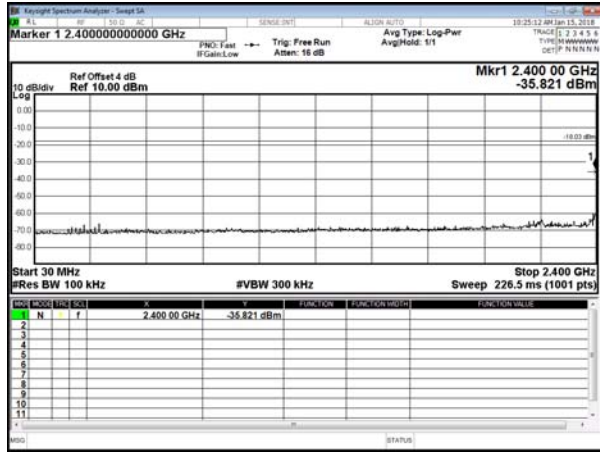


Modulation Standard: GFSK (1Mbps)
Channel: 39

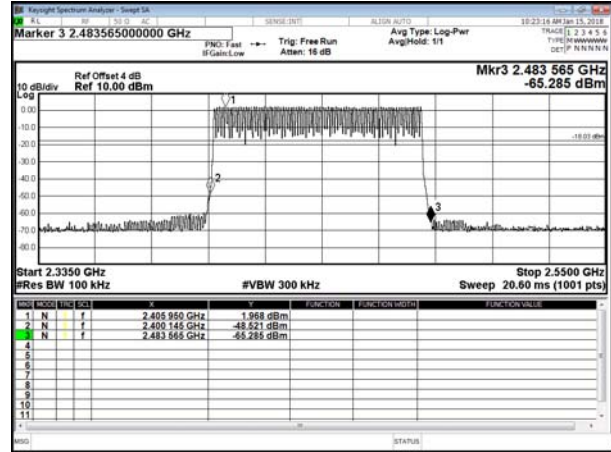


Modulation Standard: GFSK (1Mbps)
Channel: 78

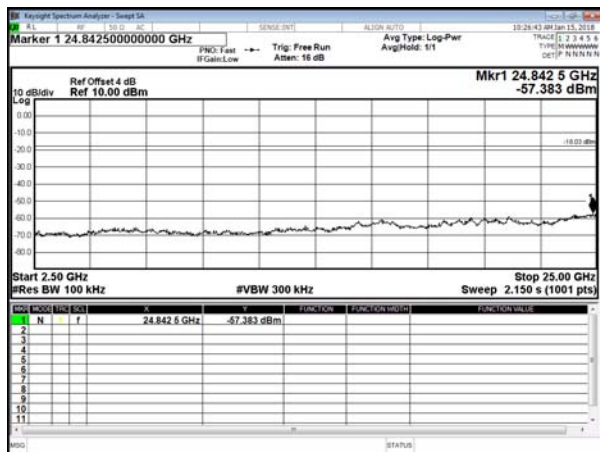


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 00

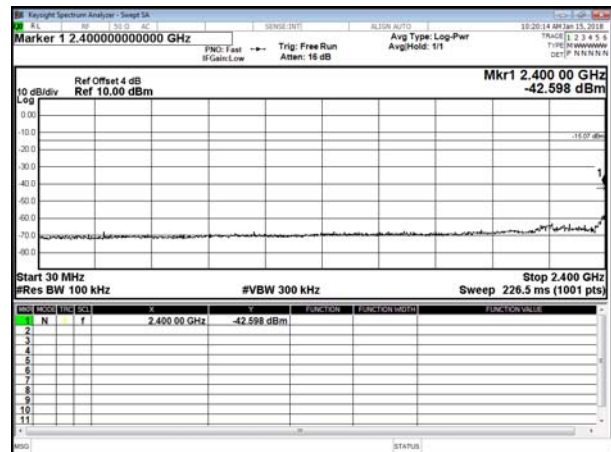

Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 39

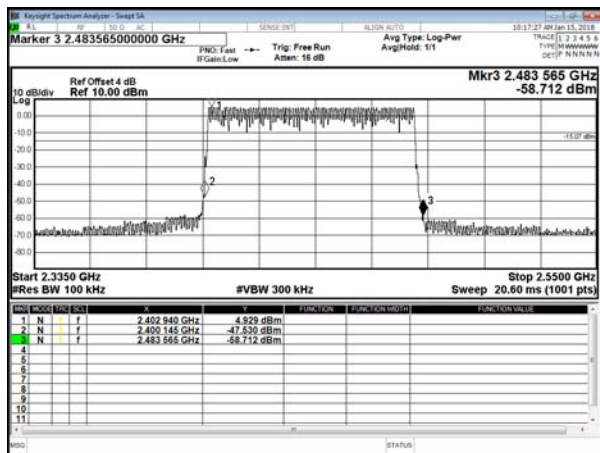


Modulation Standard: $\pi/4$ DQPSK (2Mbps)
Channel: 78

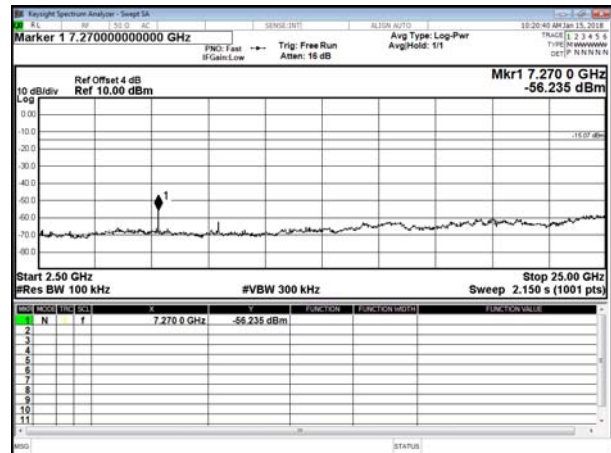





Modulation Standard: 8DPSK (3Mbps)
Channel: 00

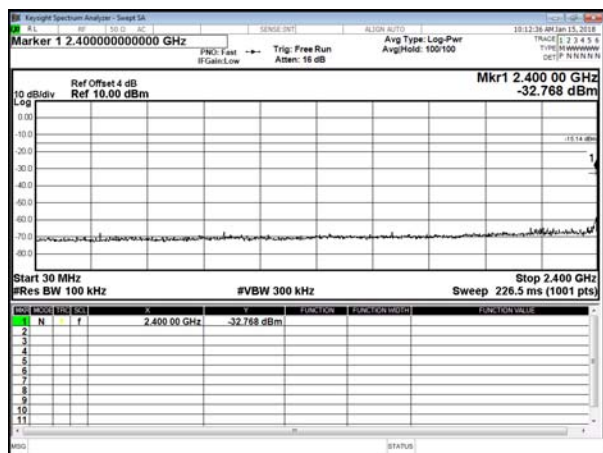

Modulation Standard: 8DPSK (3Mbps)
Channel: 39

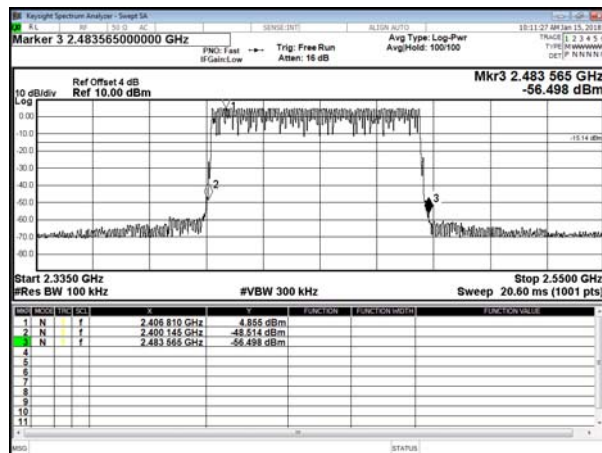


Modulation Standard: 8DPSK (3Mbps)
Channel: 78

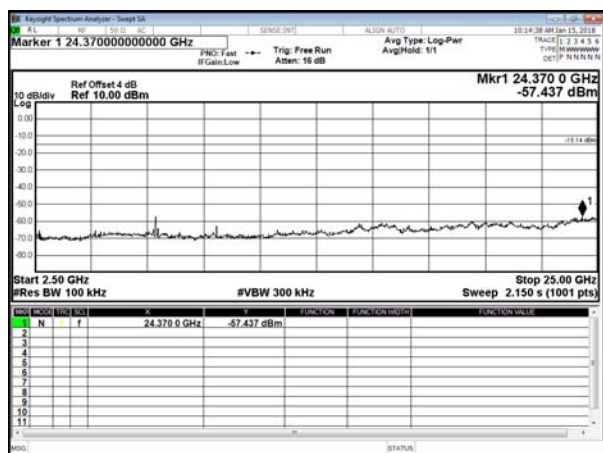



12.5 Restrict band emission Measurement Data


Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: GFSK, CH00	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

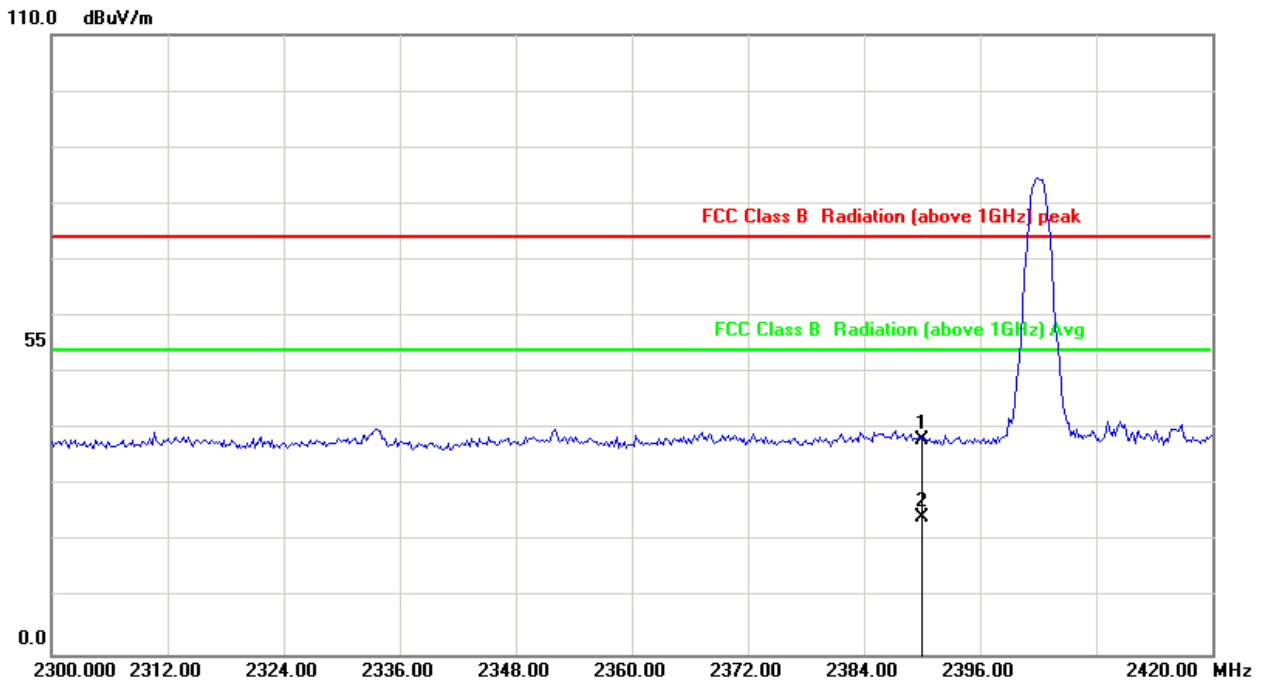

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	35.07	38.02	74.00	-35.98	peak
2	2390.000	2.95	21.35	24.30	54.00	-29.70	AVG



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: GFSK, CH00	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

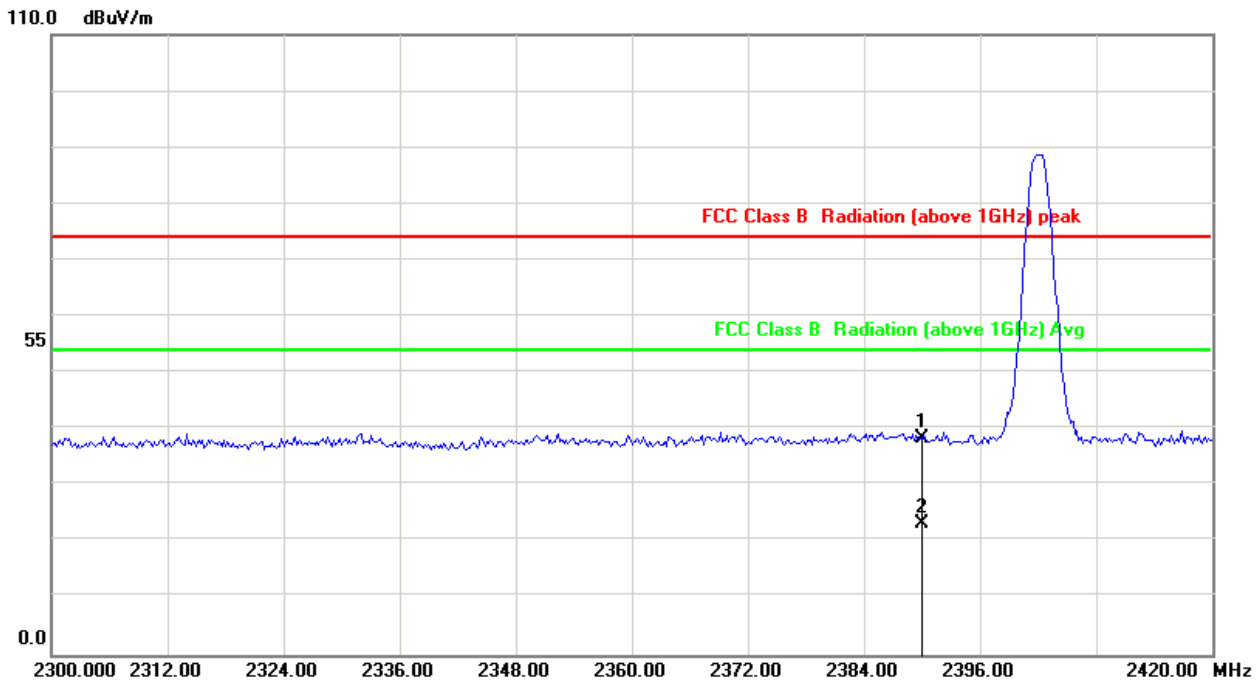


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	35.55	38.50	74.00	-35.50	peak
2	2390.000	2.95	20.39	23.34	54.00	-30.66	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: GFSK, CH78	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

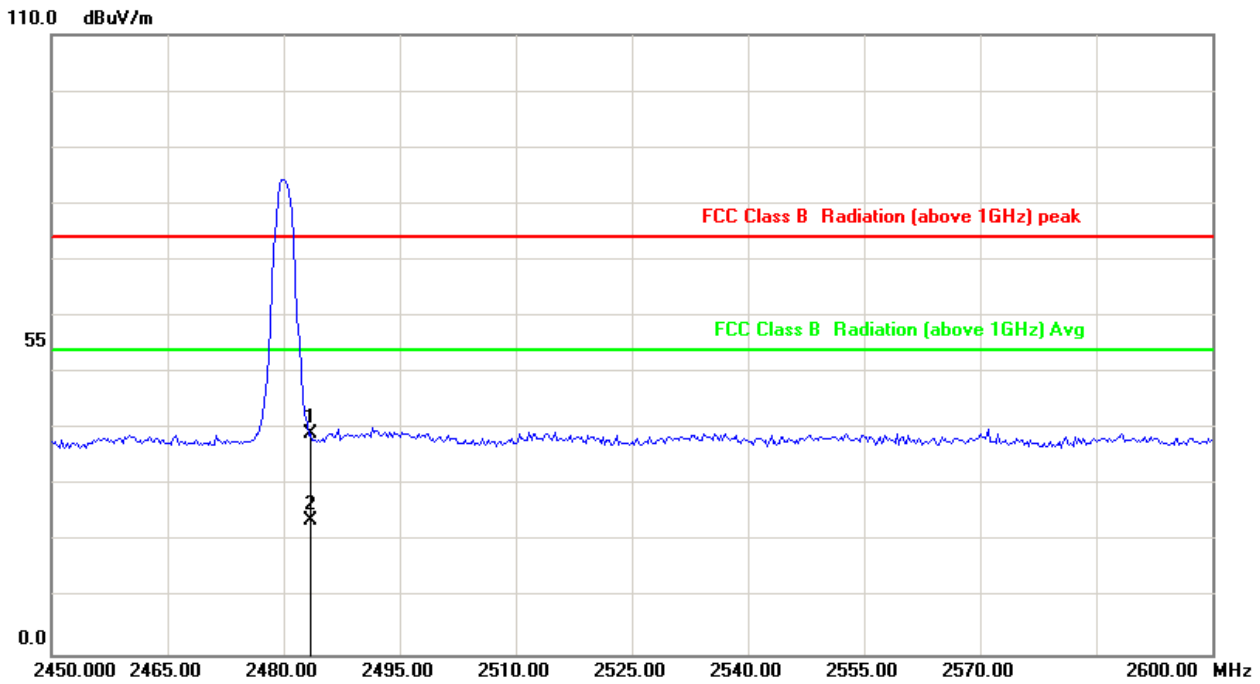


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	35.81	39.16	74.00	-34.84	peak
2	2483.500	3.35	20.34	23.69	54.00	-30.31	AVG

Note: Level=Reading+Factor.
Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: GFSK, CH78	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

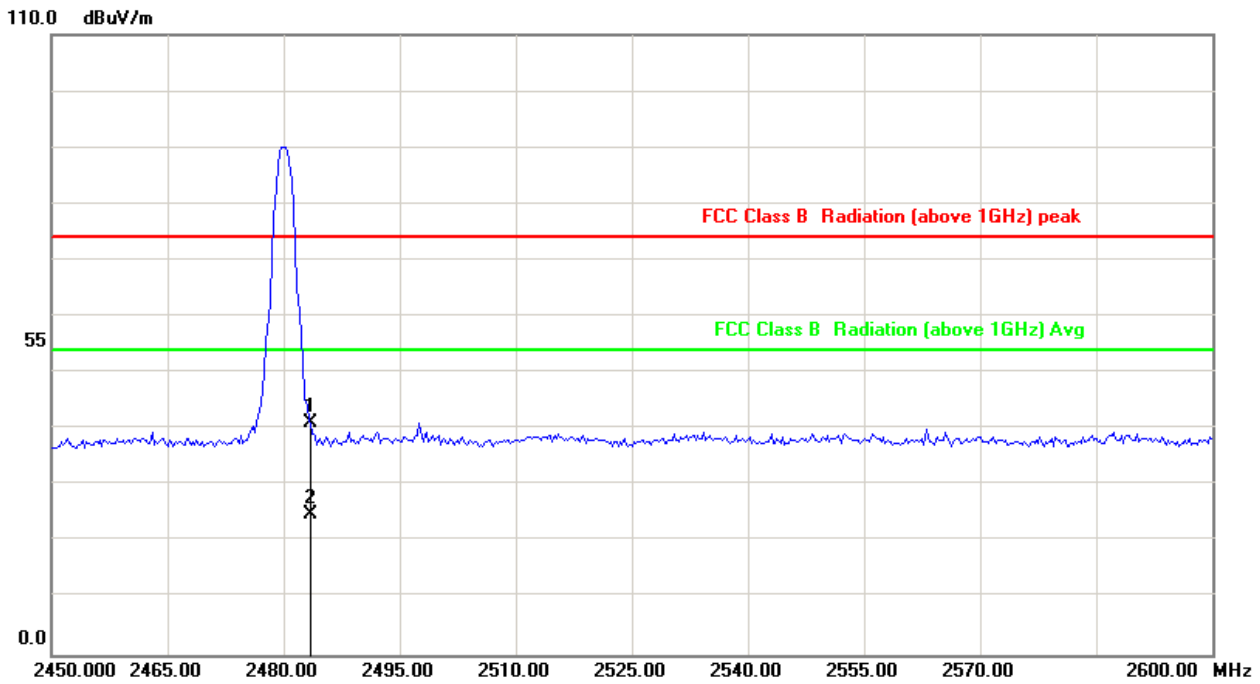


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	37.74	41.09	74.00	-32.91	peak
2	2483.500	3.35	21.53	24.88	54.00	-29.12	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: $\pi/4$ DQPSK, CH00	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

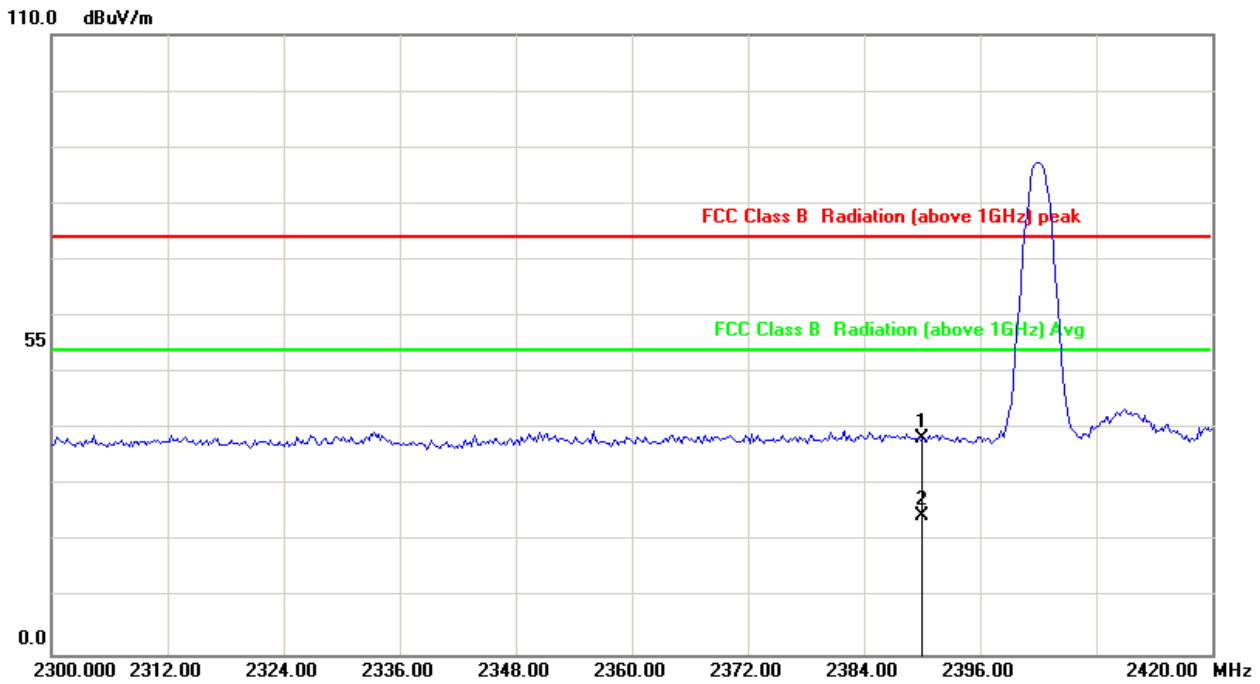


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	35.44	38.39	74.00	-35.61	peak
2	2390.000	2.95	21.53	24.48	54.00	-29.52	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: $\pi/4$ DQPSK, CH00	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

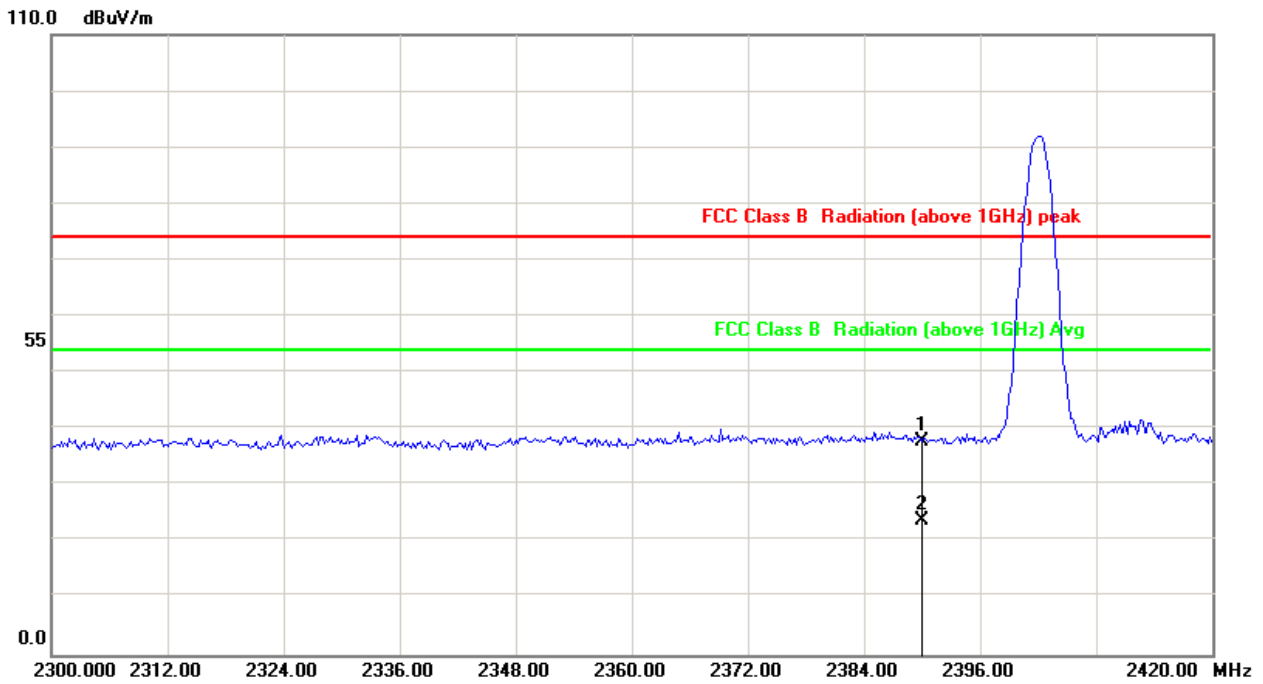


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	34.94	37.89	74.00	-36.11	peak
2	2390.000	2.95	20.72	23.67	54.00	-30.33	AVG

Note: Level=Reading+Factor.
Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: $\pi/4$ DQPSK, CH78	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

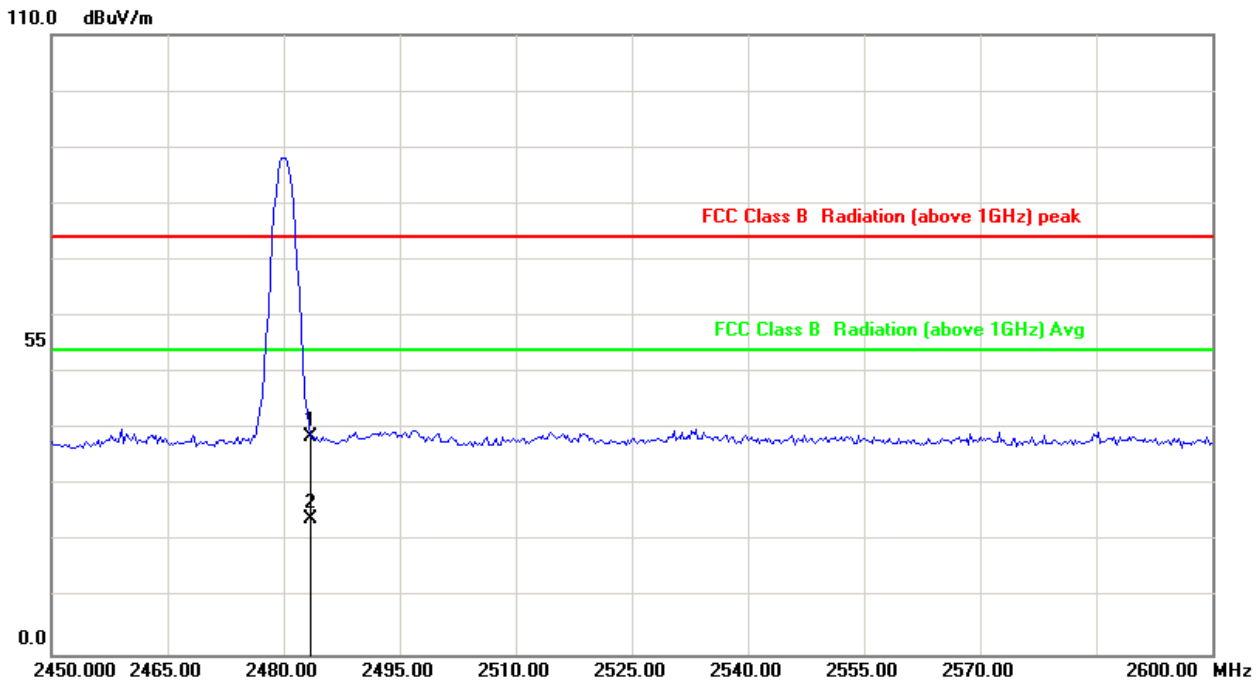


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	35.17	38.52	74.00	-35.48	peak
2	2483.500	3.35	20.67	24.02	54.00	-29.98	AVG

Note: Level=Reading+Factor.
Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: $\pi/4$ DQPSK, CH78	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

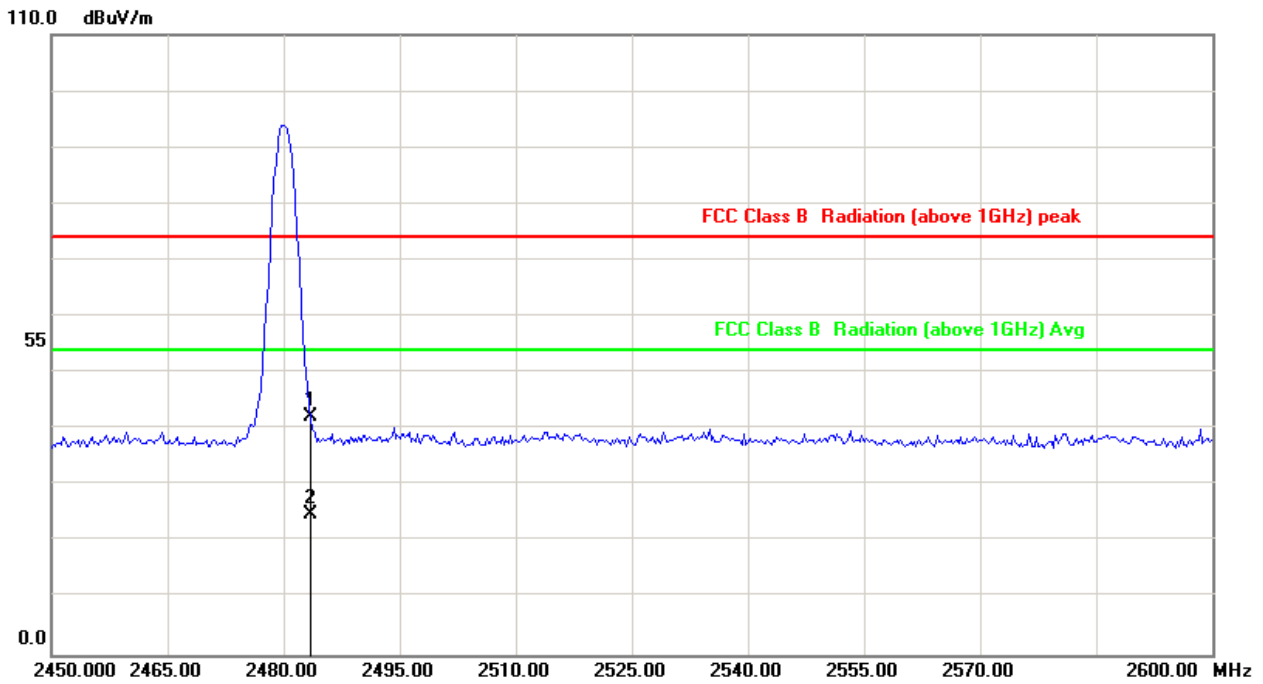


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	38.75	42.10	74.00	-31.90	peak
2	2483.500	3.35	21.67	25.02	54.00	-28.98	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 8DPSK, CH00	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

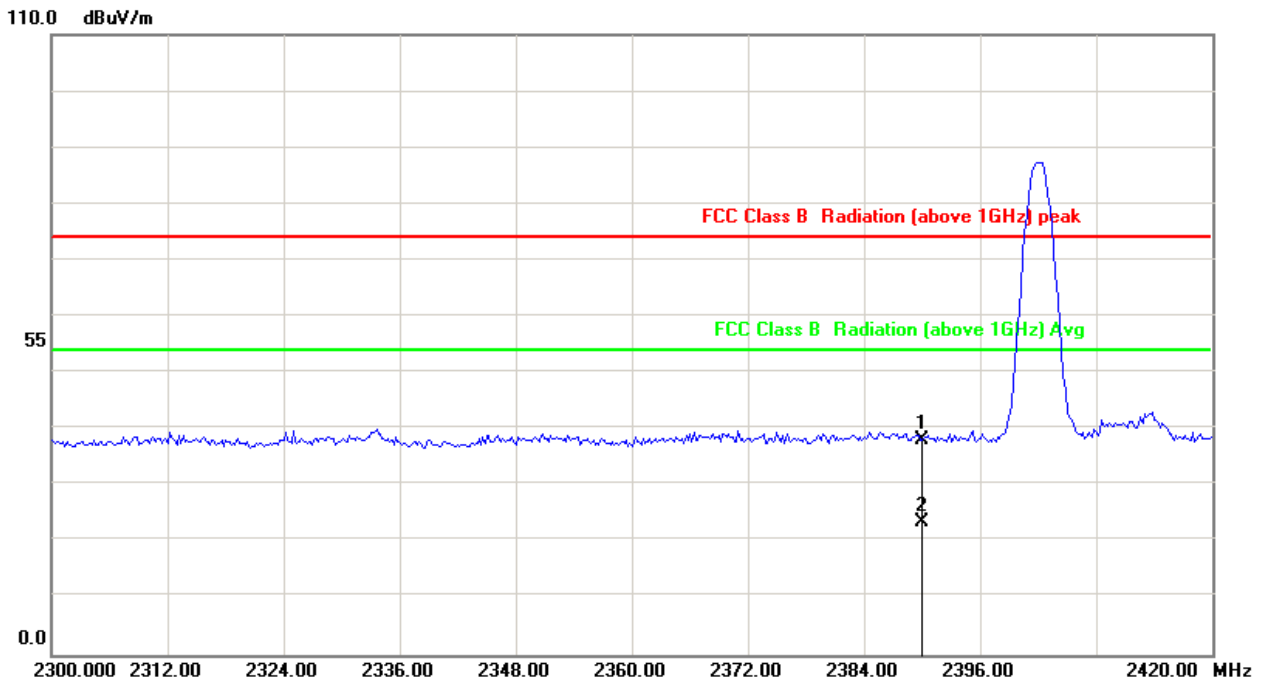


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	35.24	38.19	74.00	-35.81	peak
2	2390.000	2.95	20.59	23.54	54.00	-30.46	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 8DPSK, CH00	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

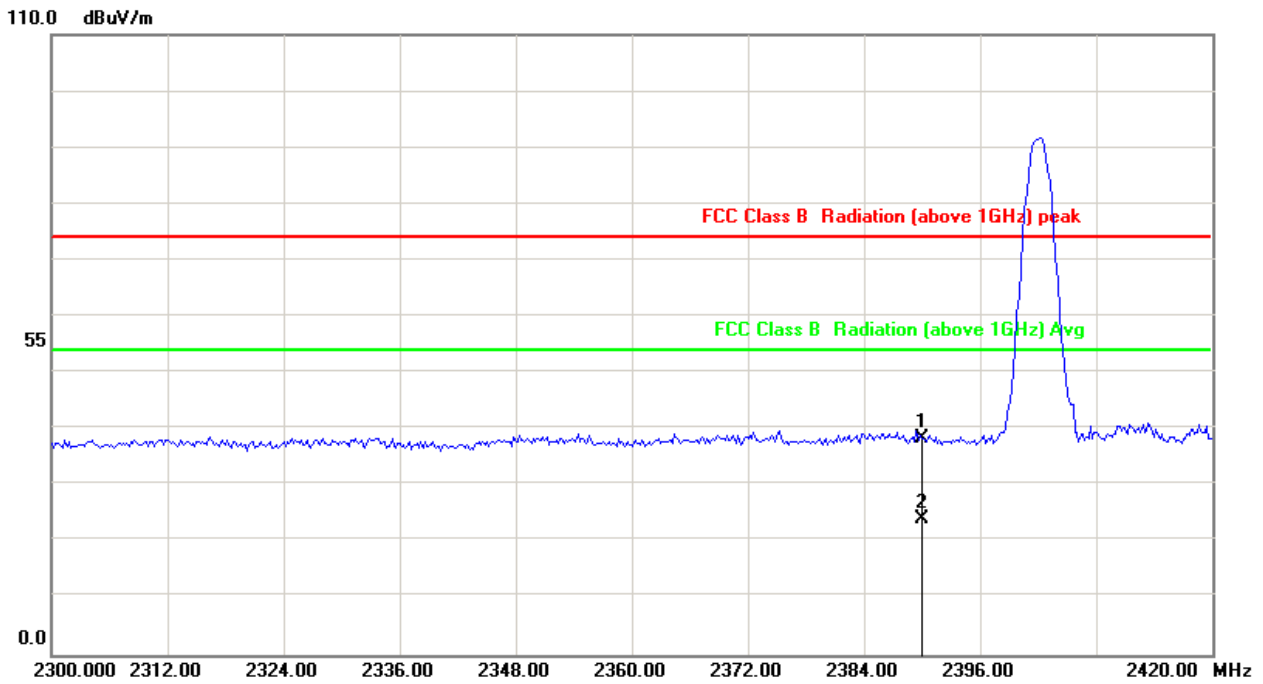


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	2.95	35.34	38.29	74.00	-35.71	peak
2	2390.000	2.95	21.06	24.01	54.00	-29.99	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: 8DPSK, CH78	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

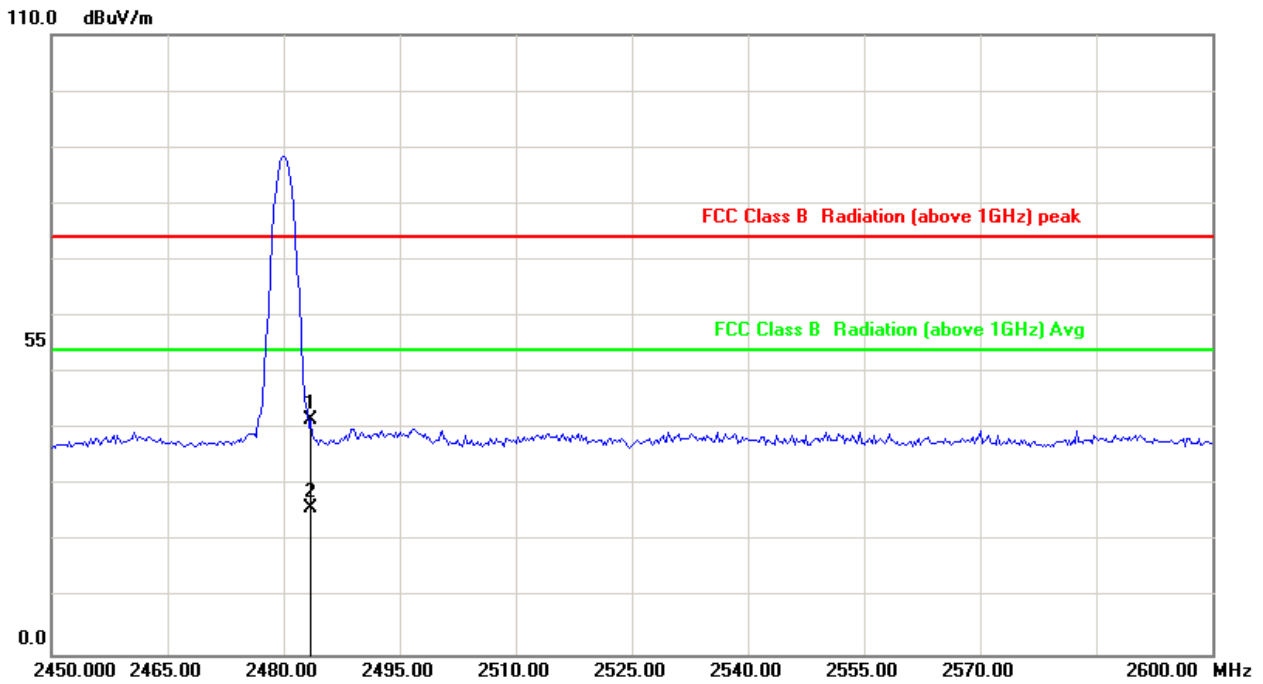


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	38.27	41.62	74.00	-32.38	peak
2	2483.500	3.35	22.56	25.91	54.00	-28.09	AVG

Note: Level=Reading+Factor.

Margin=Level-Limit.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: 8DPSK, CH78	Temperature	: 23 ° C
Test date	: Jan. 13, 2018	Humidity	: 65 %

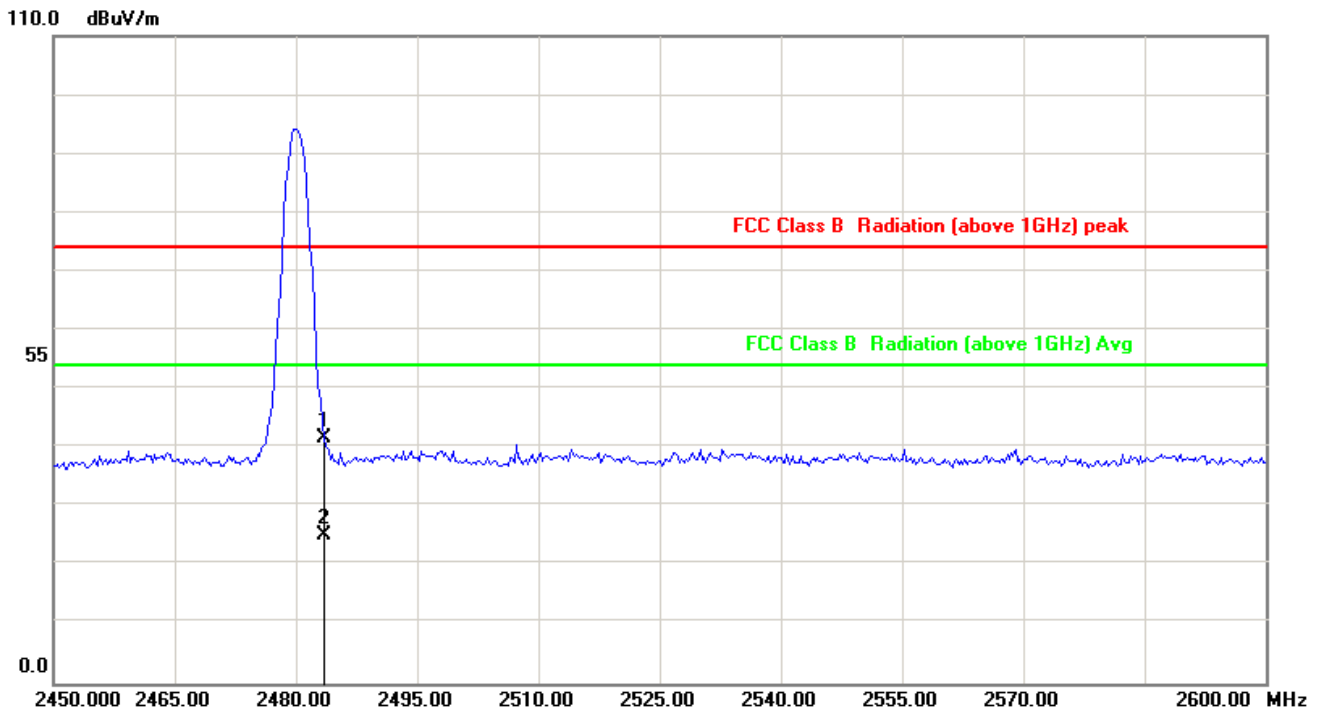

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	3.35	38.37	41.72	74.00	-32.28	peak
2	2483.500	3.35	21.68	25.03	54.00	-28.97	AVG

Note: Level=Reading+Factor.
Margin=Level-Limit.



13. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

13.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.