

# RF TEST REPORT



Report No.: 15071175-FCC-R3

Supersede Report No.: N/A

|  |  |                                     |
|--|--|-------------------------------------|
| Applicant  | NEG TECHNOLOGY CO., LIMITED  |                                     |
| Product Name   | Mobile Phone   |                                     |
| Model No.  | S3000D   |                                     |
| Serial No.   | N/A  |                                     |
| Test Standard  | FCC Part 15.247: 2014, ANSI C63.10: 2013                               |                                     |
| Test Date  | December 05 to December 16, 2015                                       |                                     |
| Issue Date   | December 21, 2015  |                                     |
| Test Result  | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |                                     |
| Equipment complied with the specification  |  | <input checked="" type="checkbox"/> |
| Equipment did not comply with the specification  |  | <input type="checkbox"/>            |
| Winnie Zhang   | David Huang  |                                     |
| Winnie Zhang<br>Test Engineer  | David Huang<br>Checked By  |                                     |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |  |                                     |

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Scope                              |
|----------------|------------------------------------|
| USA            | EMC, RF/Wireless, SAR, Telecom     |
| Canada         | EMC, RF/Wireless, SAR, Telecom     |
| Taiwan         | EMC, RF, Telecom, SAR, Safety      |
| Hong Kong      | RF/Wireless, SAR, Telecom          |
| Australia      | EMC, RF, Telecom, SAR, Safety      |
| Korea          | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan          | EMI, RF/Wireless, SAR, Telecom     |
| Singapore      | EMC, RF, SAR, Telecom              |
| Europe         | EMC, RF, SAR, Telecom, Safety      |

|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 3 of 52         |

This page has been left blank intentionally.

## CONTENTS

|  |    |
|--|----|
| 1. REPORT REVISION HISTORY .....   | 5  |
| 2. CUSTOMER INFORMATION .....  | 5  |
| 3. TEST SITE INFORMATION.....  | 5  |
| 4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....                              | 6  |
| 5. TEST SUMMARY .....  | 8  |
| 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....                       | 9  |
| 6.1 ANTENNA REQUIREMENT.....   | 9  |
| 6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH.....                                  | 10 |
| 6.3 MAXIMUM OUTPUT POWER .....   | 16 |
| 6.4 POWER SPECTRAL DENSITY.....  | 20 |
| 6.5 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS ..... | 24 |
| 6.6 AC POWER LINE CONDUCTED EMISSIONS.....                                   | 30 |
| 6.7 RADIATED SPURIOUS EMISSIONS.....   | 36 |
| ANNEX A. TEST INSTRUMENT.....  | 41 |
| ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....                                 | 42 |
| ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....                            | 47 |
| ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....           | 51 |
| ANNEX E. DECLARATION OF SIMILARITY .....                                     | 52 |

## 1. Report Revision History

| Report No.      | Report Version | Description                          | Issue Date        |
|-----------------|----------------|--------------------------------------|-------------------|
| 15071175-FCC-R3 | NONE           | Original                             | December 16, 2015 |
| 15071175-FCC-R3 | V1             | Adding adapter and cable information | December 21, 2015 |
|                 |                |                                      |                   |
|                 |                |                                      |                   |
|                 |                |                                      |                   |

## 2. Customer information

|                  |   |
|------------------|---|
| Applicant Name   | NEG TECHNOLOGY CO., LIMITED   |
| Applicant Add    | Rm 1406, Block B, Jinsejiali, Jingtian south road, Futian district, Shenzhen, China |
| Manufacturer     | NEG TECHNOLOGY CO., LIMITED   |
| Manufacturer Add | Rm 1406, Block B, Jinsejiali, Jingtian south road, Futian district, Shenzhen, China |

## 3. Test site information

|                      |   |
|----------------------|---|
| Lab performing tests | SIEMIC (Shenzhen-China) LABORATORIES  |
| Lab Address          | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park<br>South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China<br>518108 |
| FCC Test Site No.    | 718246  |
| IC Test Site No.     | 4842E-1   |
| Test Software        | Radiated Emission Program-To Shenzhen v2.0  |

#### 4. Equipment under Test (EUT) Information

|                               |   |
|-------------------------------|---|
| Description of EUT:           | Mobile Phone  |
| Main Model:                   | S3000D  |
| Serial Model:                 | N/A   |
| Date EUT received:            | December 16, 2015   |
| Test Date(s):                 | December 05 to December 16, 2015  |
| Equipment Category :          | DTS   |
| Antenna Gain:                 | GSM850: 0.8 dBi<br>PCS1900: 1 dBi<br>UMTS-FDD Band V: 1 dBi<br>UMTS-FDD Band II: 1 dBi<br>Bluetooth/BLE: 1 dBi<br>WIFI: 1 dBi<br>GPS:1 dBi  |
| Type of Modulation:           | GSM / GPRS: GMSK<br>EGPRS: GMSK, 8PSK<br>UMTS-FDD: QPSK, 16QAM<br>802.11b/g/n: DSSS, OFDM<br>Bluetooth: GFSK, π /4DQPSK, 8DPSK<br>BLE: GFSK<br>GPS:BPSK   |
| RF Operating Frequency (ies): | GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz<br>PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz<br>UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz<br>UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;<br>RX: 1932.4 ~ 1987.6 MHz<br>WIFI: 802.11b/g/n(20M): 2412-2462 MHz<br>WIFI: 802.11n(40M): 2422-2452 MHz<br>Bluetooth& BLE: 2402-2480 MHz<br>GPS RX: 1575.42 MHz |

Max. Output Power:  
802.11b: 8.74dBm  
802.11g: 8.84dBm  
802.11n(20M): 8.98dBm  
802.11n(40M): 9.07dBm

Number of Channels:  
GSM 850: 124CH  
PCS1900: 299CH  
UMTS-FDD Band V : 102CH  
UMTS-FDD Band II : 277CH  
WIFI :802.11b/g/n(20M): 11CH  
WIFI :802.11n(40M): 7CH  
Bluetooth: 79CH  
BLE: 40CH  
GPS:1CH

Port: Power Port, Earphone Port, USB Port

Input Power:  
Adapter:  
Model: S3000D  
Input: AC 100-240V; 50/60Hz;150mA  
Output: DC 5.0V,500mA  
Battery:  
Model: S3000D  
Standard: 3.7V,1100mAh,4.07Wh  
Limited charge voltage:4.2V

Trade Name : OWN

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2AAZ8-S3000D

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules                    | Description of Test  | Result     |
|------------------------------|--|------------|
| §15.203                      | Antenna Requirement  | Compliance |
| §15.247 (a)(2)               | DTS (6 dB&20 dB) CHANNEL BANDWIDTH   | Compliance |
| §15.247(b)(3)                | Conducted Maximum Output Power   | Compliance |
| §15.247(e)                   | Power Spectral Density   | Compliance |
| §15.247(d)                   | Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands               | Compliance |
| §15.207 (a),                 | AC Power Line Conducted Emissions  | Compliance |
| §15.205, §15.209, §15.247(d) | Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands | Compliance |

### Measurement Uncertainty

| Emissions                                 |   |               |
|---|---|---------------|
| Test Item                                 | Description   | Uncertainty   |
| Band Edge and Radiated Spurious Emissions | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| -   | -   | -             |

## **6. Measurements, Examination And Derived Results**

### **6.1 Antenna Requirement**

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/ BLE/WIFI/GPS, the gain is 1dBi for Bluetooth/BLE, the gain is 1dBi for WIFI, the gain is 1dBi for GPS.


A permanently attached PIFA antenna for GSM/PCS/ UMTS, the gain is 0.8dBi for GSM850, 1dBi for PCS1900, 1dBi for UMTS-FDD Band V, 1dBi for UMTS-FDD Band II.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 DTS (6 dB&20 dB) Channel Bandwidth

|                      |                   |
|----------------------|-------------------|
| Temperature          | 24°C              |
| Relative Humidity    | 59%               |
| Atmospheric Pressure | 1007mbar          |
| Test date :          | December 07, 2015 |
| Tested By :          | Winnie Zhang      |
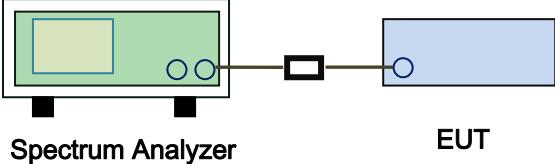
| Spec                             | Item   | Requirement                                     | Applicable                          |
|----------------------------------|--|---|-------------------------------------|
| § 15.247(a)(2)<br>RSS Gen(4.6.1) | a)   | 6dB BW $\geq$ 500kHz; 20dB BW $\geq$ 500kHz;    | <input checked="" type="checkbox"/> |
|                                  | b)   | 99% BW: For FCC reference only; required by IC. | <input checked="" type="checkbox"/> |
| Test Setup                       | <br><b>Spectrum Analyzer</b> <b>EUT</b>   |   |                                     |
| Test Procedure                   | <p>558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth</p> <p><u>6dB bandwidth</u></p> <ol style="list-style-type: none"> <li>Set RBW = 100 kHz.</li> <li>Set the video bandwidth (VBW) <math>\geq</math> 3 <math>\times</math> RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold.</li> <li>Sweep = auto couple.</li> <li>Allow the trace to stabilize.</li> <li>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ol> <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ol style="list-style-type: none"> <li>Set RBW = 1%-5% OBW.</li> <li>Set the video bandwidth (VBW) <math>\geq</math> 3 x RBW.</li> <li>Set the span range between 2 times and 5 times of the OBW.</li> <li>Sweep time=Auto, Detector=PK, Trace=Max hold.</li> <li>Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-</li> </ol> |   |                                     |

|        |   |
|--------|---|
|        | case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level. |
| Remark |   |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


#### Measurement result

| Test mode        | CH   | Freq (MHz) | 6dB Bandwidth (MHz) | 20dB Bandwidth (MHz) | Limit (MHz) |
|------------------|------|------------|---------------------|----------------------|-------------|
| 802.11b          | Low  | 2412       | 9.597               | 15.16                | $\geq 0.5$  |
|                  | Mid  | 2437       | 9.534               | 14.25                | $\geq 0.5$  |
|                  | High | 2462       | 9.553               | 14.25                | $\geq 0.5$  |
| 802.11g          | Low  | 2412       | 15.46               | 18.99                | $\geq 0.5$  |
|                  | Mid  | 2437       | 15.69               | 19.04                | $\geq 0.5$  |
|                  | High | 2462       | 15.47               | 18.99                | $\geq 0.5$  |
| 802.11n<br>(20M) | Low  | 2412       | 16.34               | 19.31                | $\geq 0.5$  |
|                  | Mid  | 2437       | 16.09               | 19.36                | $\geq 0.5$  |
|                  | High | 2462       | 16.79               | 19.35                | $\geq 0.5$  |
| 802.11n<br>(40M) | Low  | 2422       | 35.15               | 39.50                | $\geq 0.5$  |
|                  | Mid  | 2437       | 35.45               | 45.79                | $\geq 0.5$  |
|                  | High | 2452       | 35.51               | 39.55                | $\geq 0.5$  |


|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 12 of 52        |

## Test Plots

### 6dB Bandwidth measurement result

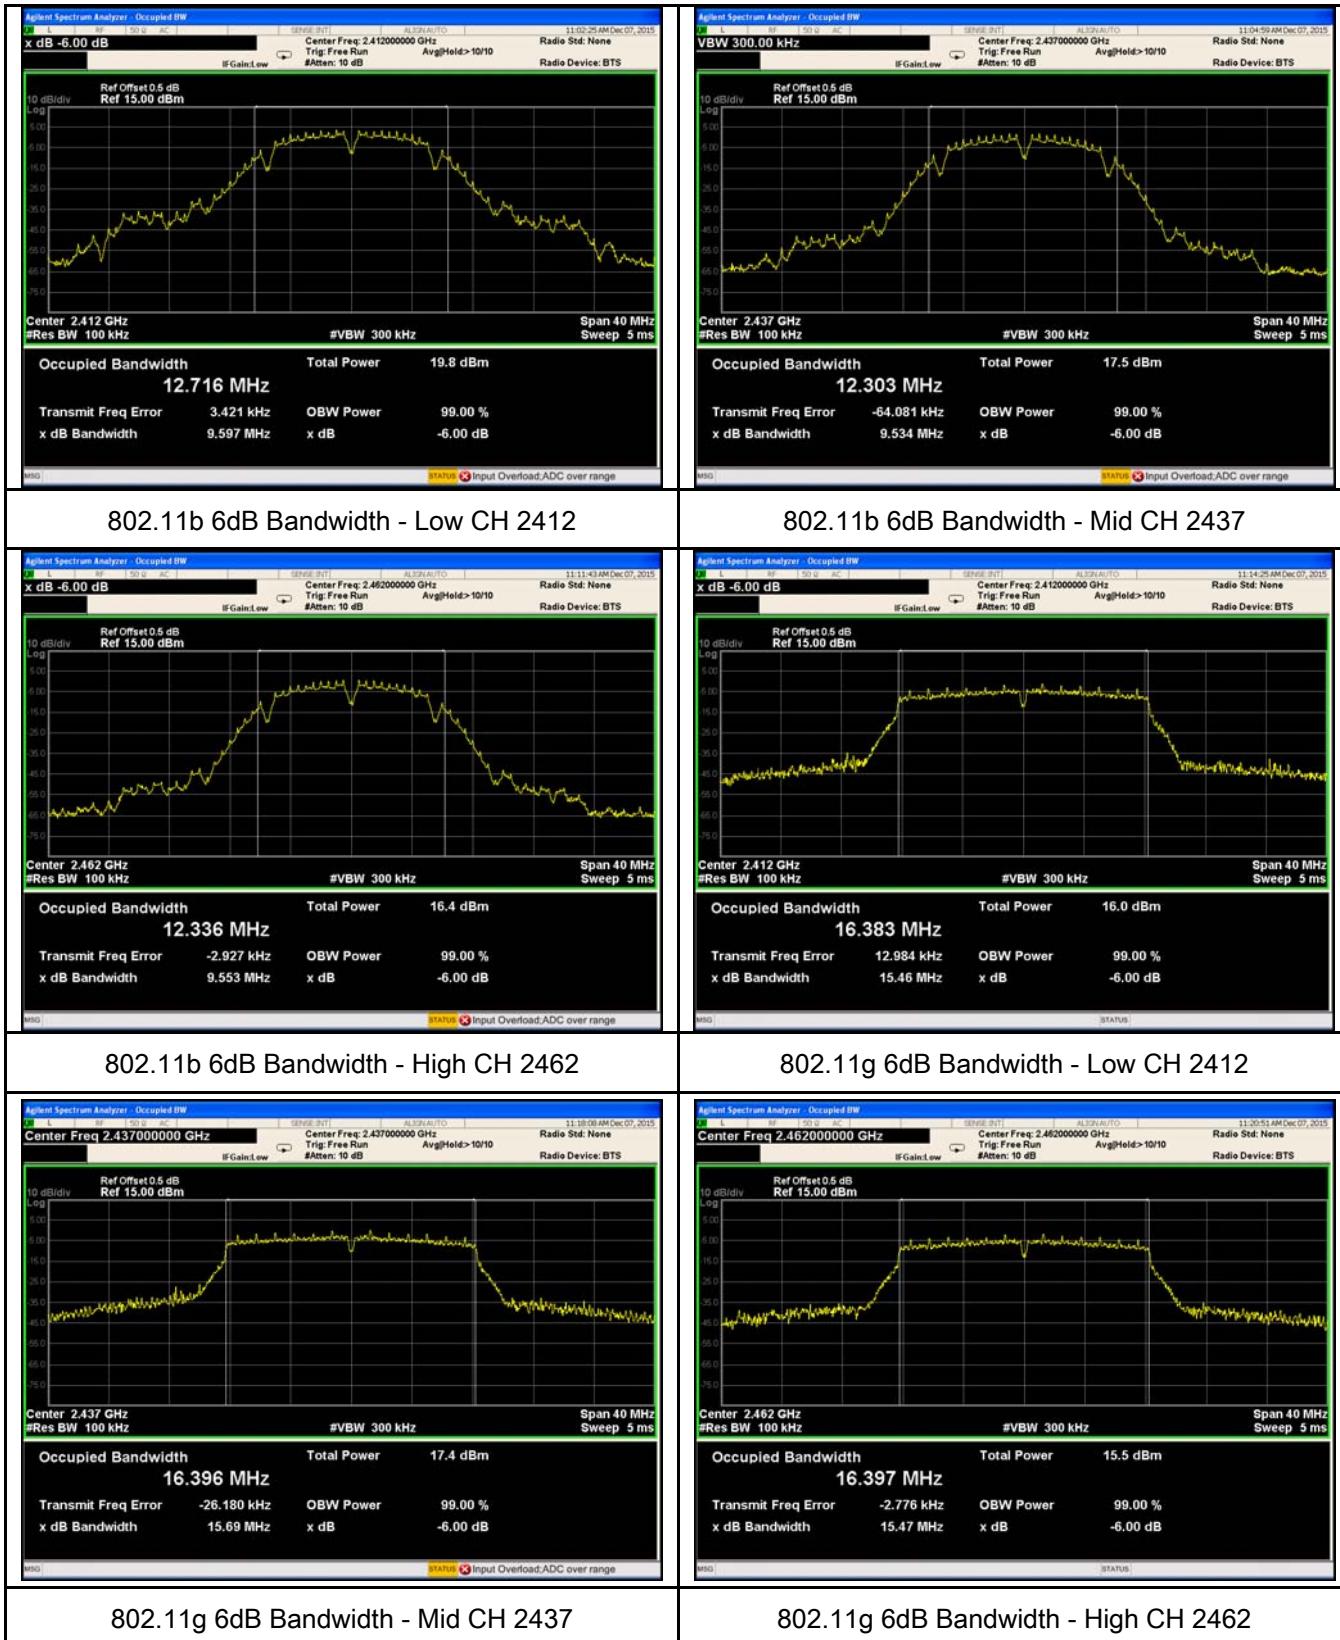


|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 13 of 52        |

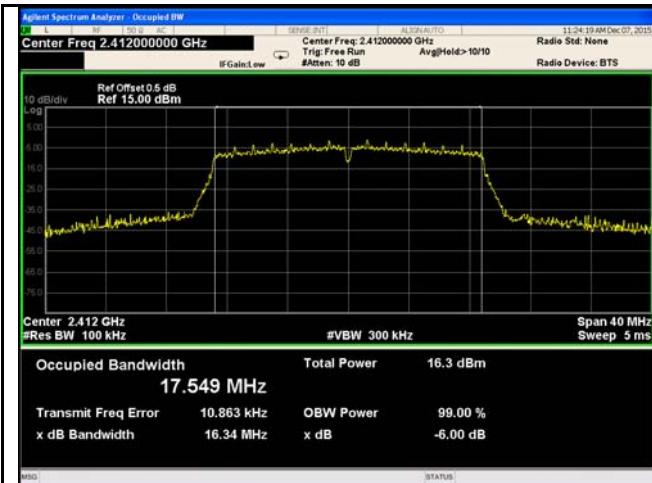

#### 802.11n20 6dB Bandwidth - Low CH 2412

#### 802.11n20 6dB Bandwidth - Mid CH 2437

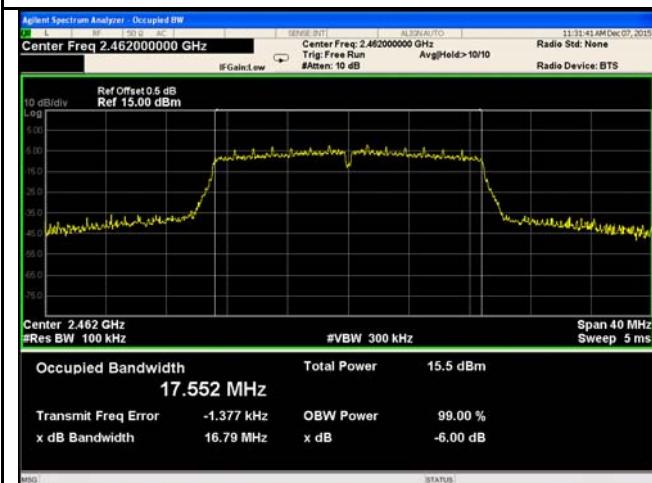

#### 802.11n20 6dB Bandwidth - High CH 2462



#### 802.11n40 6dB Bandwidth - Low CH 2422





#### 802.11n40 6dB Bandwidth - Mid CH 2437

#### 802.11n40 6dB Bandwidth - High CH 2452

## 20 dB Bandwidth measurement result

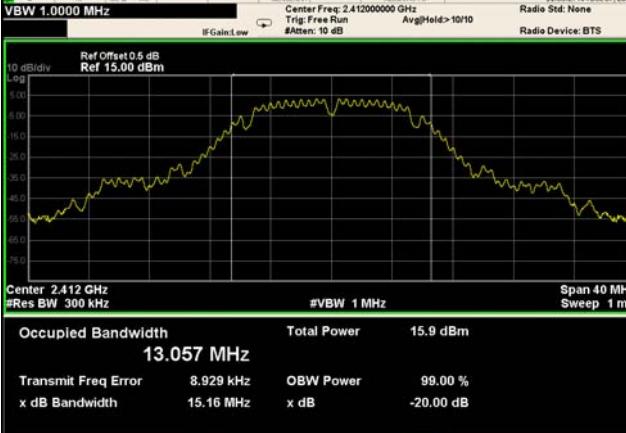
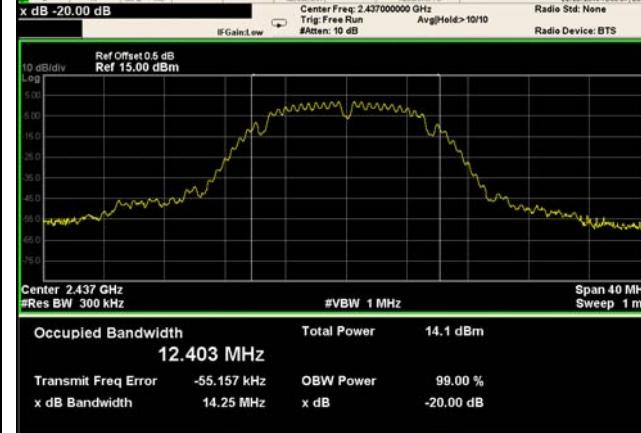
|  |  |
|--|--|
|  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>VBW 1.0000 MHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB<br/>Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.412 GHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth<br/><b>13.057 MHz</b></p> <p>Total Power 15.9 dBm</p> <p>Transmit Freq Error 8.929 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.16 MHz</p> <p>x dB -20.00 dB</p>   |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>x dB -20.00 dB</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB<br/>Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.437 GHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth<br/><b>12.403 MHz</b></p> <p>Total Power 14.1 dBm</p> <p>Transmit Freq Error -55.157 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.25 MHz</p> <p>x dB -20.00 dB</p>                                |
| <p><b>802.11b 20dB Bandwidth - Low CH 2412</b></p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>VBW 1.0000 MHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB<br/>Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.462 GHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth<br/><b>12.376 MHz</b></p> <p>Total Power 13.4 dBm</p> <p>Transmit Freq Error 7.791 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.25 MHz</p> <p>x dB -20.00 dB</p>     | <p><b>802.11b 20dB Bandwidth - Mid CH 2437</b></p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB<br/>Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.412 GHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth<br/><b>16.805 MHz</b></p> <p>Total Power 16.5 dBm</p> <p>Transmit Freq Error -1.725 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 18.99 MHz</p> <p>x dB -20.00 dB</p>   |
| <p><b>802.11b 20dB Bandwidth - High CH 2462</b></p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>x dB -20.00 dB</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB<br/>Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.437 GHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth<br/><b>16.943 MHz</b></p> <p>Total Power 17.4 dBm</p> <p>Transmit Freq Error -58.207 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 19.04 MHz</p> <p>x dB -20.00 dB</p> | <p><b>802.11g 20dB Bandwidth - Low CH 2412</b></p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB<br/>Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.462 GHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth<br/><b>16.841 MHz</b></p> <p>Total Power 16.0 dBm</p> <p>Transmit Freq Error -19.068 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 18.99 MHz</p> <p>x dB -20.00 dB</p> |
| <p><b>802.11g 20dB Bandwidth - Mid CH 2437</b></p>   | <p><b>802.11g 20dB Bandwidth - High CH 2462</b></p>  |

|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 15 of 52        |

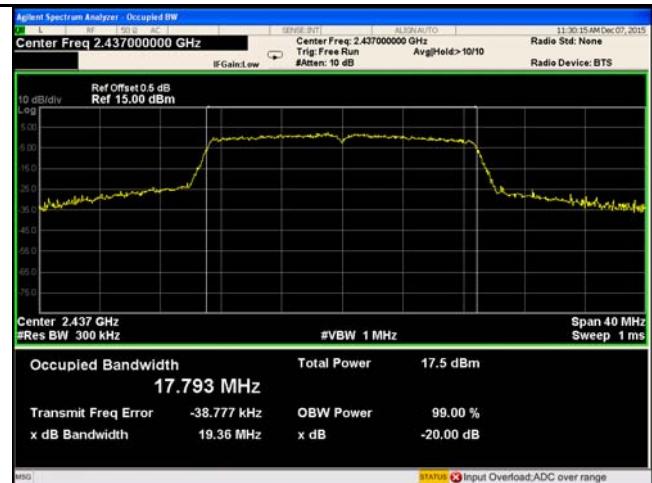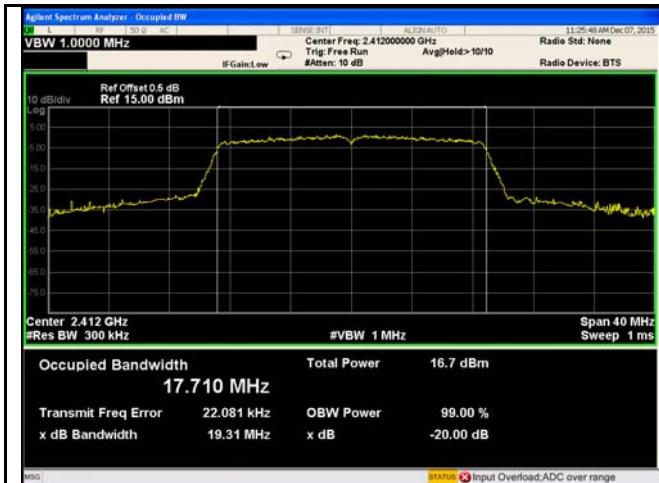



### 802.11n20 20dB Bandwidth - Low CH 2412

### 802.11n20 20dB Bandwidth - Mid CH 2437

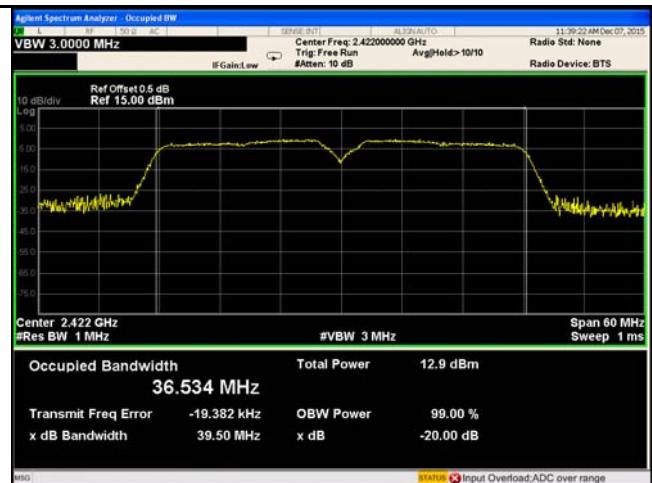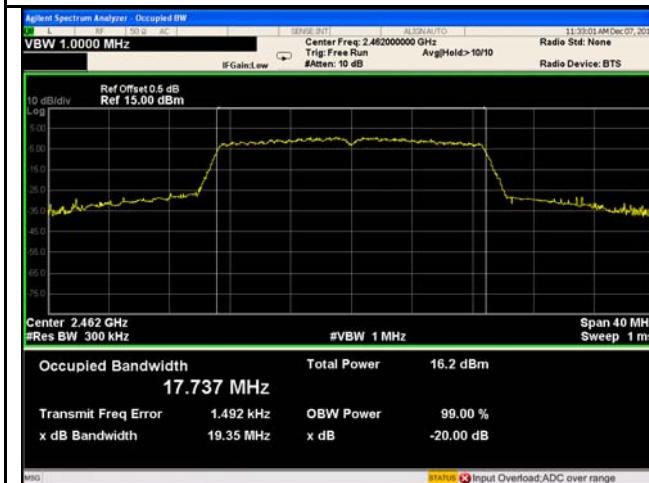

### 802.11n20 20dB Bandwidth - High CH 2462

### 802.11n40 20dB Bandwidth - Low CH 2422

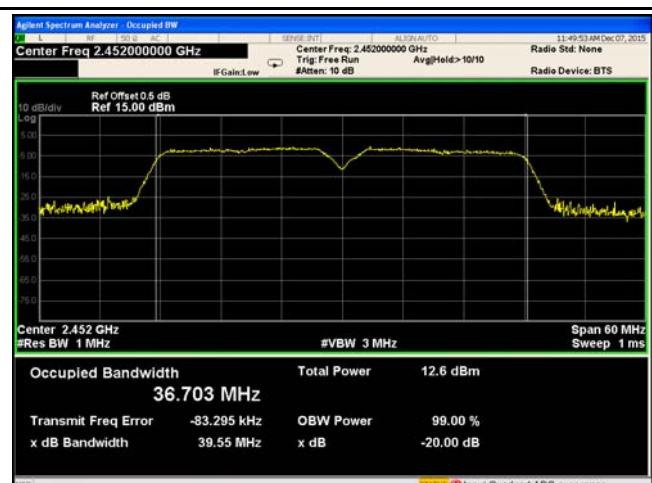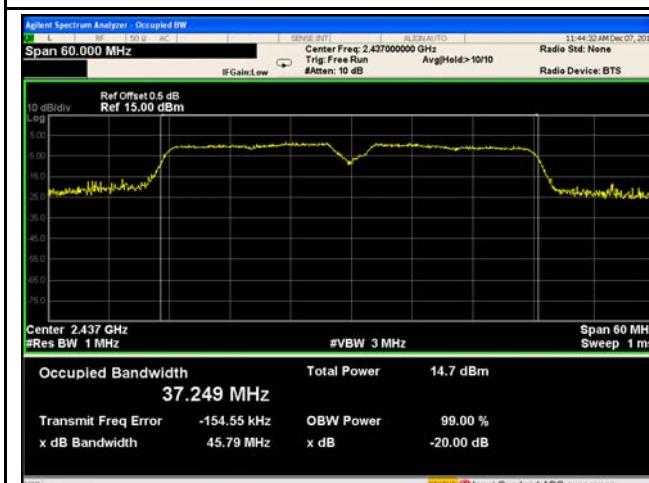


### 802.11n40 20dB Bandwidth - Mid CH 2437

### 802.11n40 20dB Bandwidth - High CH 2452

### 6.3 Maximum Output Power

|                      |                   |
|----------------------|-------------------|
| Temperature          | 24°C              |
| Relative Humidity    | 59%               |
| Atmospheric Pressure | 1007mbar          |
| Test date :          | December 07, 2015 |
| Tested By :          | Winnie Zhang      |

#### Requirement(s):
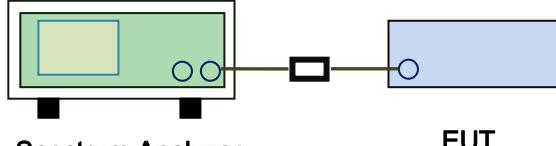
| Spec                                | Item | Requirement  | Applicable                          |
|-------------------------------------|------|--|-------------------------------------|
| §15.247(b)<br>(3), RSS210<br>(A8.4) | a)   | FHSS in 2400-2483.5MHz with $\geq$ 75 channels: $\leq$ 1 Watt  | <input type="checkbox"/>            |
|                                     | b)   | FHSS in 5725-5850MHz: $\leq$ 1 Watt  | <input type="checkbox"/>            |
|                                     | c)   | For all other FHSS in the 2400-2483.5MHz band: $\leq$ 0.125 Watt.  | <input type="checkbox"/>            |
|                                     | d)   | FHSS in 902-928MHz with $\geq$ 50 channels: $\leq$ 1 Watt  | <input type="checkbox"/>            |
|                                     | e)   | FHSS in 902-928MHz with $\geq$ 25 & $< 50$ channels: $\leq$ 0.25 Watt  | <input type="checkbox"/>            |
|                                     | f)   | DTS in 902-928MHz, 2400-2483.5MHz: $\leq$ 1 Watt   | <input checked="" type="checkbox"/> |
| Test Setup                          |      | <br><b>Spectrum Analyzer</b> <b>EUT</b>  |                                     |
| Test Procedure                      |      | <p>558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set span to at least 1.5 times the OBW.</li> <li>- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.</li> <li>- c) Set VBW <math>\geq</math> 3 x RBW.</li> <li>- d) Number of points in sweep <math>\geq</math> 2 <math>\times</math> span / RBW. (This gives bin-to-bin spacing <math>\leq</math> RBW/2, so that narrowband signals are not lost between frequency bins.)</li> <li>- e) Sweep time = auto.</li> <li>- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</li> <li>- g) If transmit duty cycle <math>&lt;</math> 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum</li> </ul> |                                     |

|        |  |
|--------|--|
|        | <p>power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle <math>\geq 98\%</math>, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “ free run” .</p> <ul style="list-style-type: none"> <li>- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.</li> <li>- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’ s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.</li> </ul> |
| Remark |  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

#### Output Power measurement result

| Type         | Test mode     | CH   | Freq (MHz) | Conducted Power (dBm) | Limit (dBm) | Result |
|--------------|---------------|------|------------|-----------------------|-------------|--------|
| Output power | 802.11b       | Low  | 2412       | 8.25                  | 30          | Pass   |
|              |               | Mid  | 2437       | 8.41                  | 30          | Pass   |
|              |               | High | 2462       | <b>8.74</b>           | 30          | Pass   |
|              | 802.11g       | Low  | 2412       | 8.58                  | 30          | Pass   |
|              |               | Mid  | 2437       | 8.81                  | 30          | Pass   |
|              |               | High | 2462       | <b>8.84</b>           | 30          | Pass   |
|              | 802.11n (20M) | Low  | 2412       | 8.70                  | 30          | Pass   |
|              |               | Mid  | 2437       | 8.94                  | 30          | Pass   |
|              |               | High | 2462       | <b>8.98</b>           | 30          | Pass   |
|              | 802.11n (40M) | Low  | 2422       | 8.53                  | 30          | Pass   |
|              |               | Mid  | 2437       | <b>9.07</b>           | 30          | Pass   |
|              |               | High | 2452       | 8.86                  | 30          | Pass   |


## Test Plots

### The Average Power

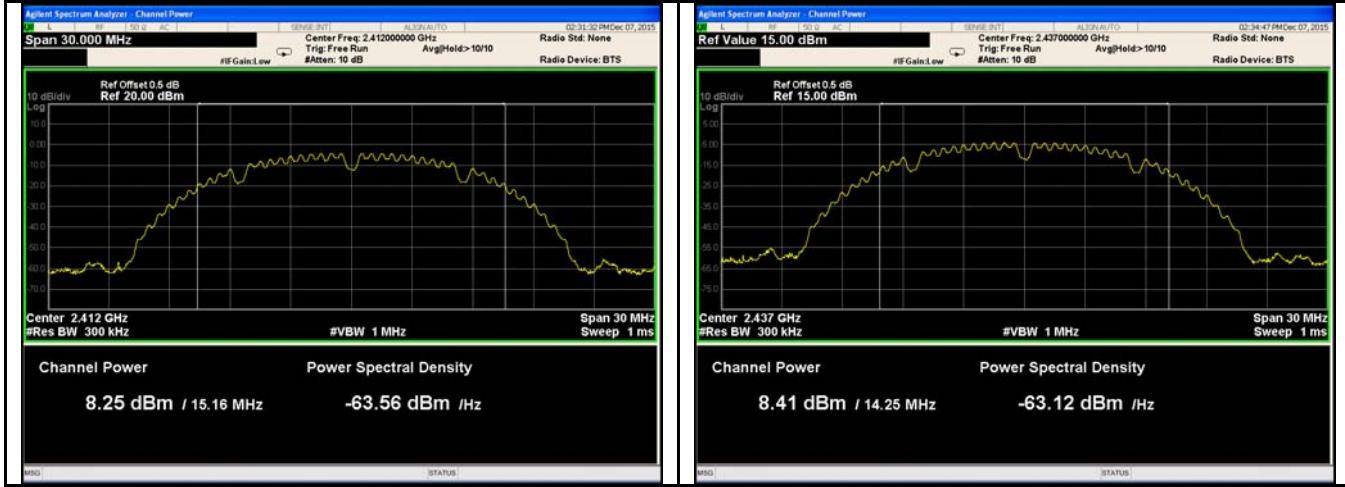


802.11b - AV Output power - Low CH 2412

802.11b - AV Output power - Mid CH 2437

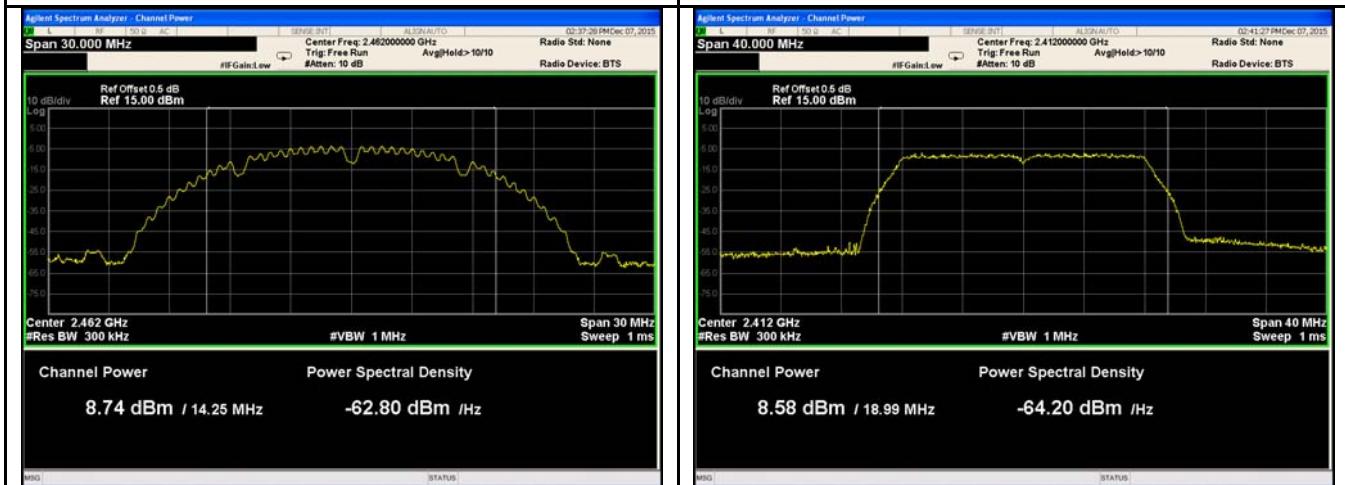

802.11b - AV Output power - High CH 2462


802.11g - AV Output power - Low CH 2412

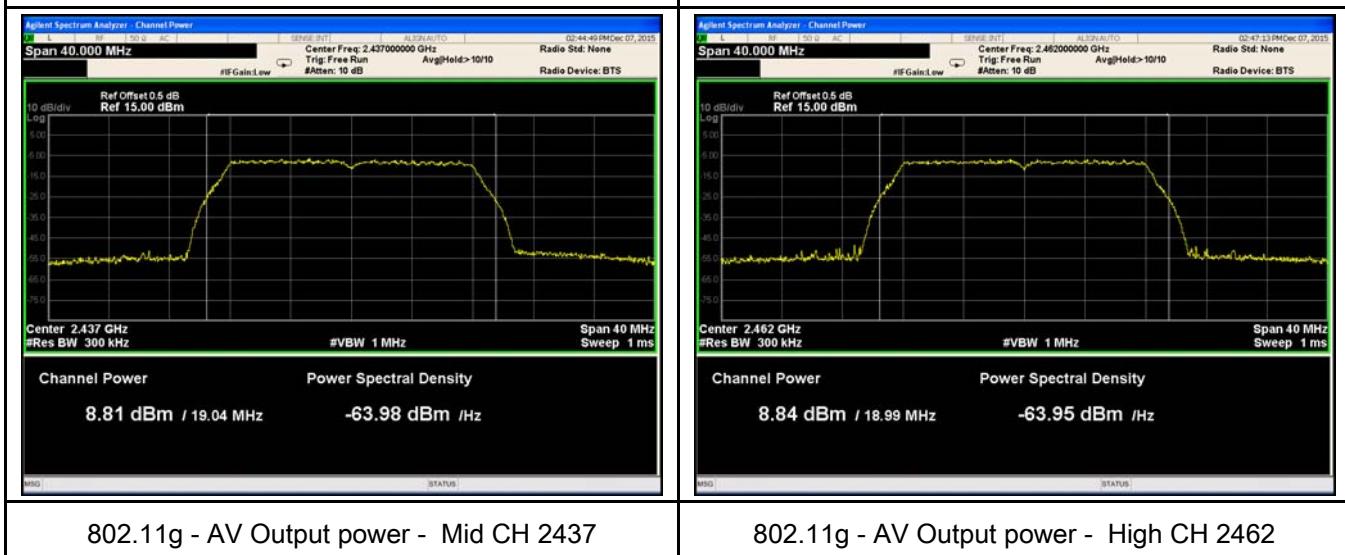

802.11g - AV Output power - Mid CH 2437


802.11g - AV Output power - High CH 2462

|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 19 of 52        |

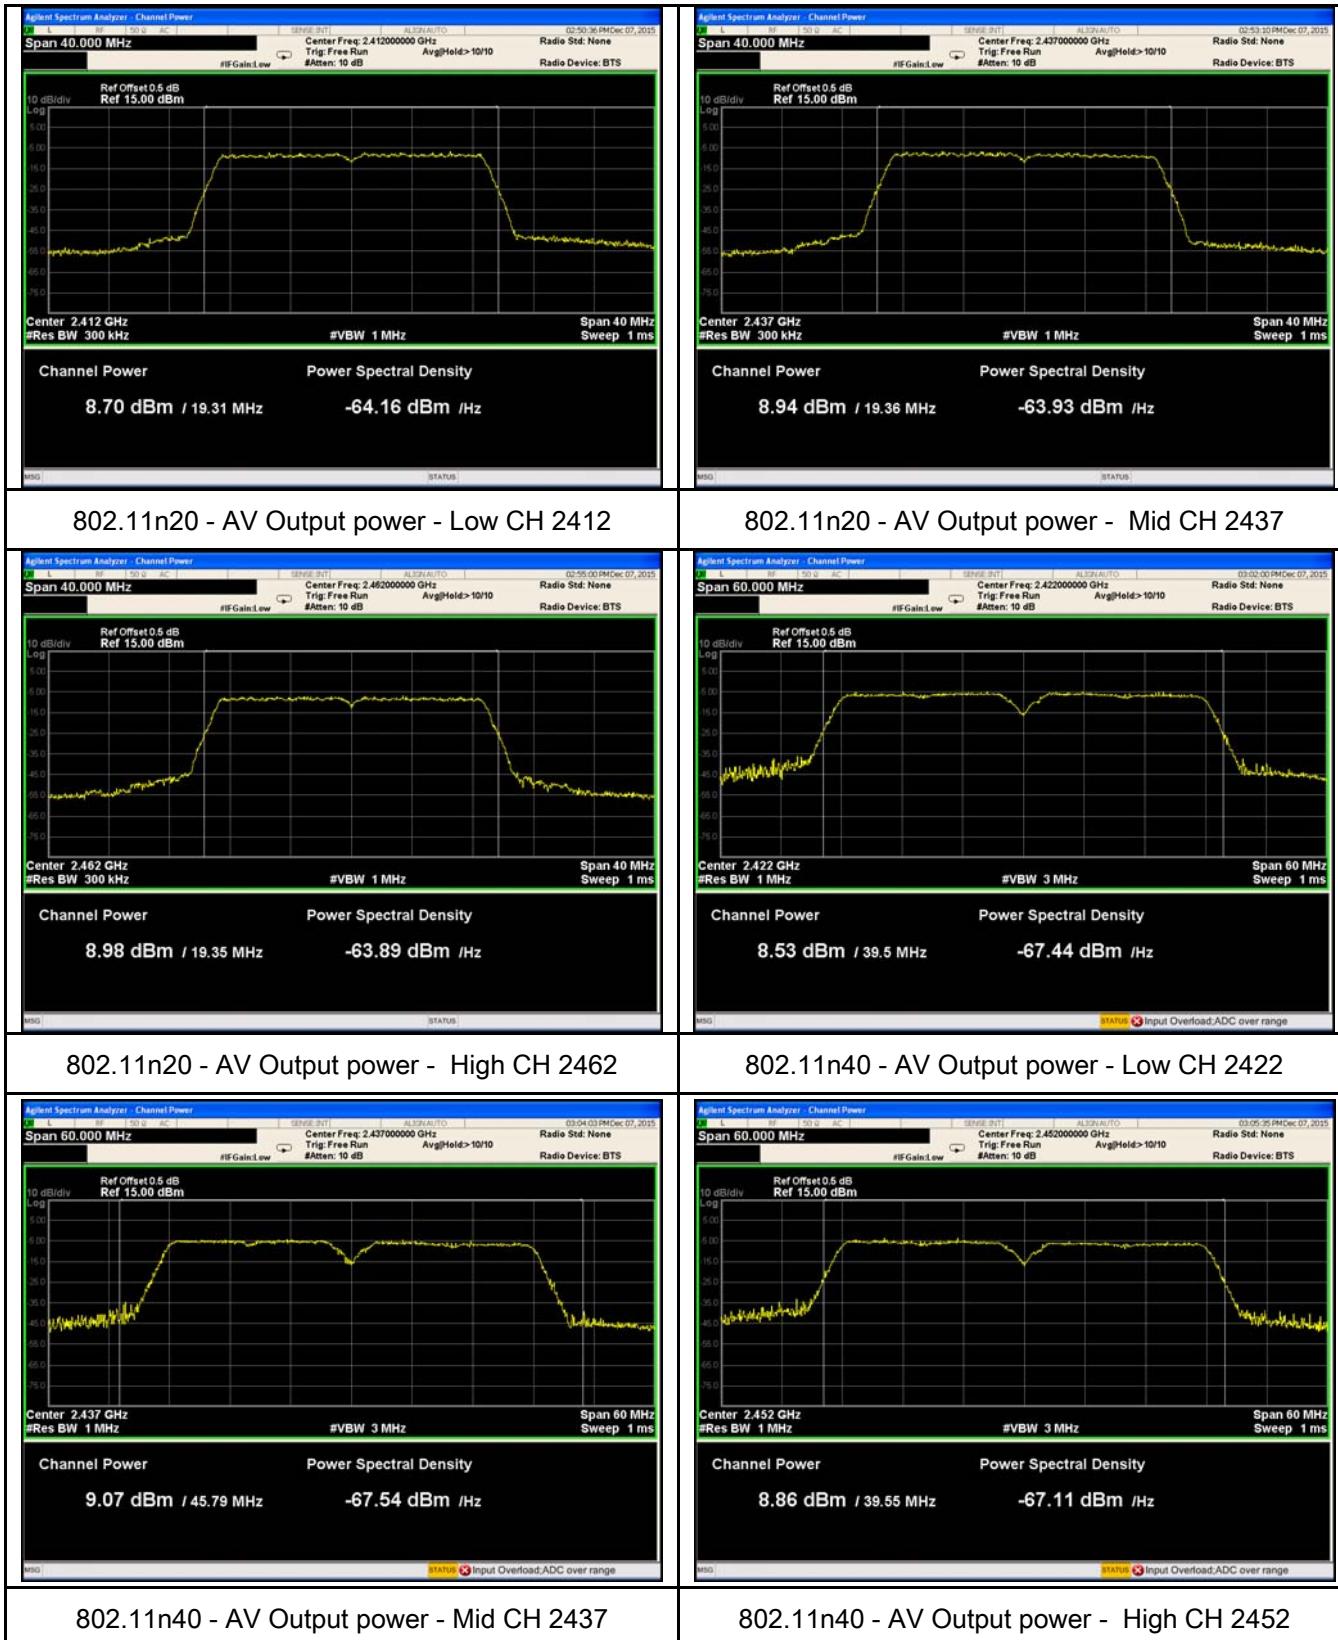

## 6.4 Power Spectral Density

|                      |                   |
|----------------------|-------------------|
| Temperature          | 24°C              |
| Relative Humidity    | 59%               |
| Atmospheric Pressure | 1007mbar          |
| Test date :          | December 07, 2015 |
| Tested By :          | Winnie Zhang      |
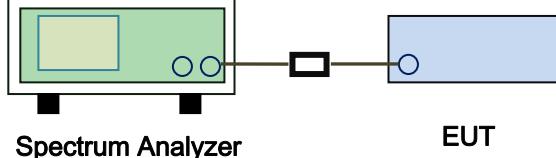
| Spec           | Item  | Requirement  | Applicable                          |
|----------------|---|--|-------------------------------------|
| §15.247(e)     | a)  | The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. | <input checked="" type="checkbox"/> |
| Test Setup     |   |  |                                     |
| Test Procedure | <p>558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set analyzer center frequency to DTS channel center frequency.</li> <li>- b) Set the span to 1.5 times the DTS bandwidth.</li> <li>- c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- e) Detector = peak.</li> <li>- f) Sweep time = auto couple.</li> <li>- g) Trace mode = max hold.</li> <li>- h) Allow trace to fully stabilize.</li> <li>- i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul> |  |                                     |
| Remark         |   |  |                                     |
| Result         | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |  |                                     |

Test Data  Yes  N/A  
 Test Plot  Yes (See below)  N/A

### Power Spectral Density measurement result


| Type | Test mode     | CH   | Freq (MHz) | Reading (dBm) | Factor (dB) | Result (dBm) | Limit (dBm) | Result |
|------|---------------|------|------------|---------------|-------------|--------------|-------------|--------|
| PSD  | 802.11b       | Low  | 2412       | 3.952         | -10         | -6.048       | 8           | Pass   |
|      |               | Mid  | 2437       | 1.789         | -10         | -8.211       | 8           | Pass   |
|      |               | High | 2462       | 1.577         | -10         | -8.423       | 8           | Pass   |
|      | 802.11g       | Low  | 2412       | -4.478        | -10         | -14.478      | 8           | Pass   |
|      |               | Mid  | 2437       | -3.538        | -10         | -13.538      | 8           | Pass   |
|      |               | High | 2462       | -5.327        | -10         | -15.327      | 8           | Pass   |
|      | 802.11n (20M) | Low  | 2412       | -4.130        | -10         | -14.13       | 8           | Pass   |
|      |               | Mid  | 2437       | -3.116        | -10         | -13.116      | 8           | Pass   |
|      |               | High | 2462       | -4.718        | -10         | -14.718      | 8           | Pass   |
|      | 802.11n (40M) | Low  | 2422       | -5.087        | -15.2       | -20.287      | 8           | Pass   |
|      |               | Mid  | 2437       | -2.317        | -15.2       | -17.517      | 8           | Pass   |
|      |               | High | 2452       | -5.966        | -15.2       | -21.166      | 8           | Pass   |


Note: Factor=  $10\log(3/30)$  dB= -10.0 dB (b, g, n20 mode);

Factor=  $10\log(3/100)$  dB= -15.2 dB (n40 mode).

## Test Plots

### Power Spectral Density measurement result

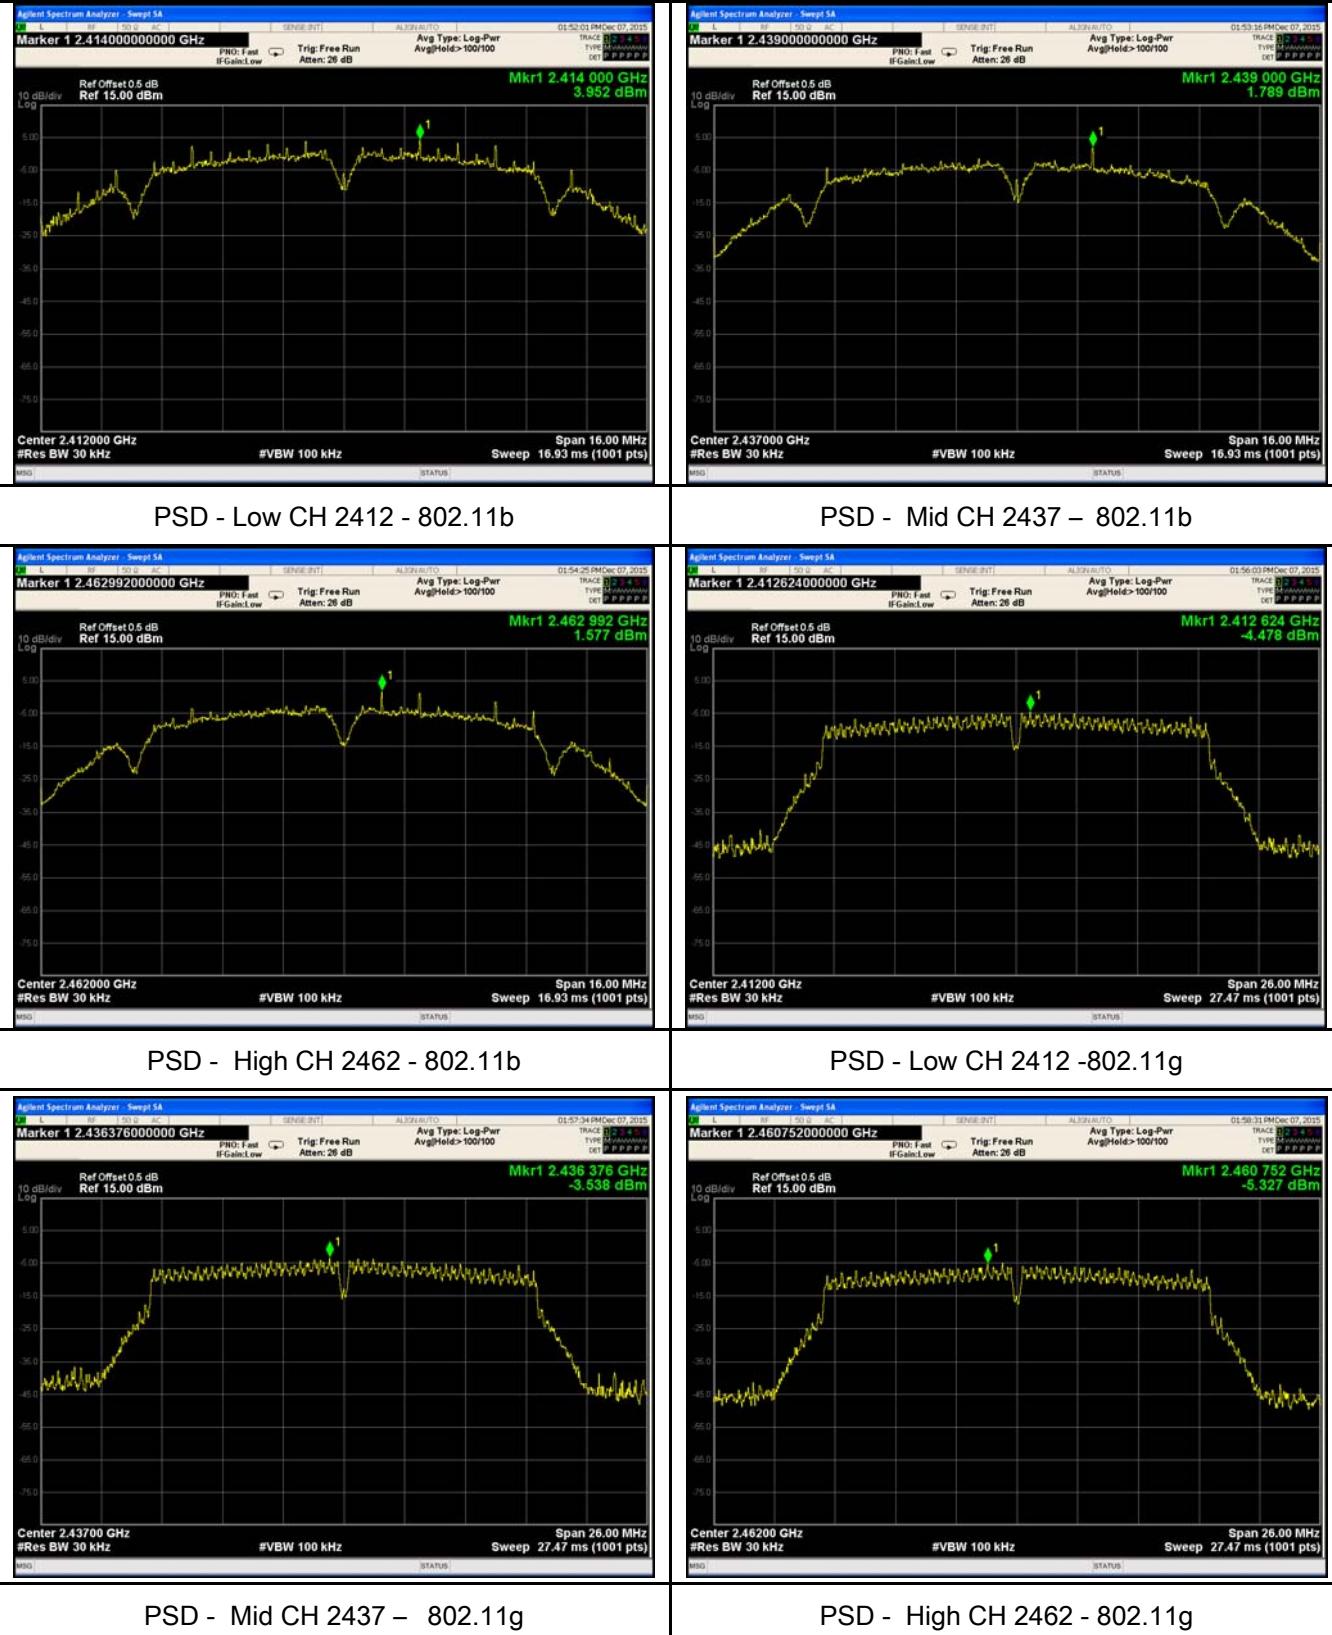


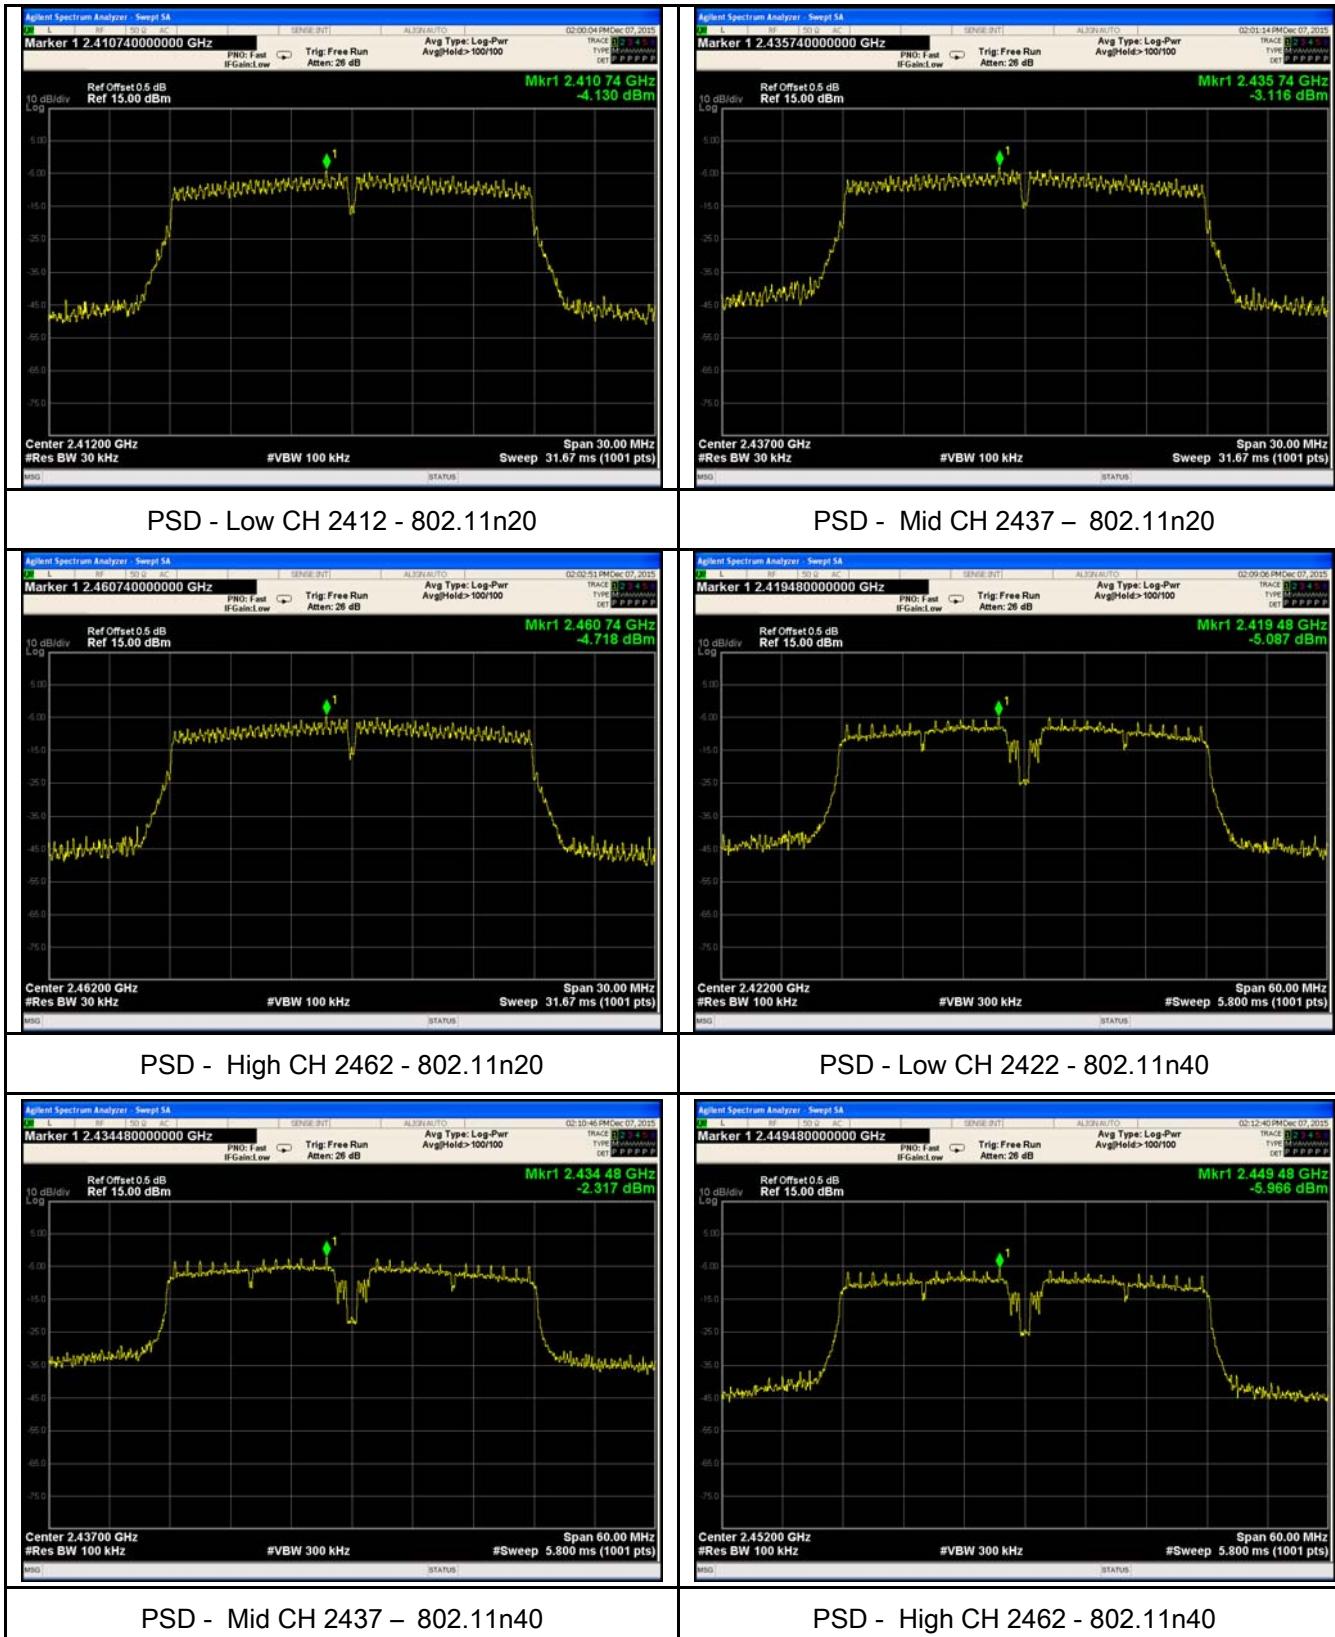

## 6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

|                      |                   |
|----------------------|-------------------|
| Temperature          | 25°C              |
| Relative Humidity    | 57%               |
| Atmospheric Pressure | 1015mbar          |
| Test date :          | December 15, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):
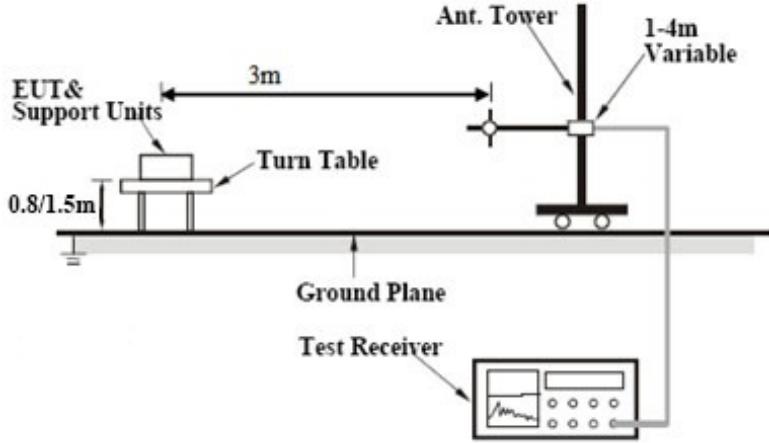
| Spec           | Item  | Requirement   | Applicable                          |
|----------------|---|---|-------------------------------------|
| §15.247(d)     | a)  | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. | <input checked="" type="checkbox"/> |
| Test Setup     |  <p>The diagram illustrates the test setup. An 'EUT &amp; Support Units' is positioned on a 'Turn Table' at a height of '0.8/1.5m' above a 'Ground Plane'. A 'Test Receiver' is connected to the EUT. A '1-4m Variable' length 'Ant. Tower' is mounted on the turn table, with its height indicated as '3m' from the ground plane. The tower is connected to the EUT.</p>   |   |                                     |
| Test Procedure | <p>Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> </ul> |   |                                     |



|        |   |
|--------|---|
|        | <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul> |
| Remark |   |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |



Test Data  Yes  N/A



Test Plot  Yes (See below)  N/A

## Test Plots

### Band Edge measurement result
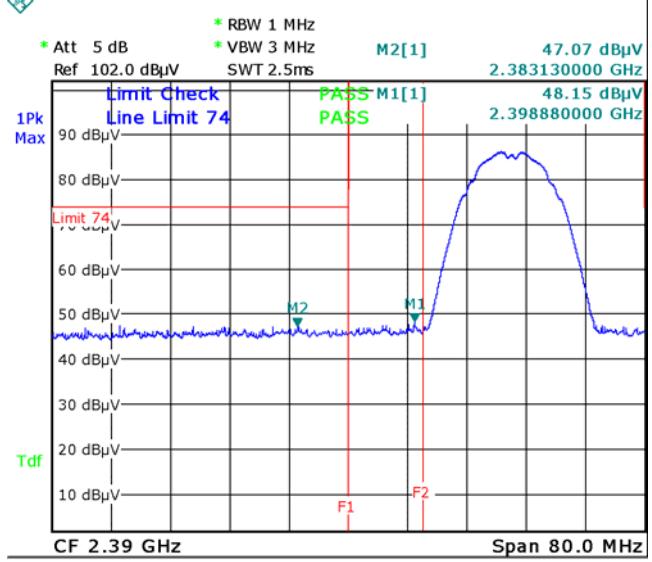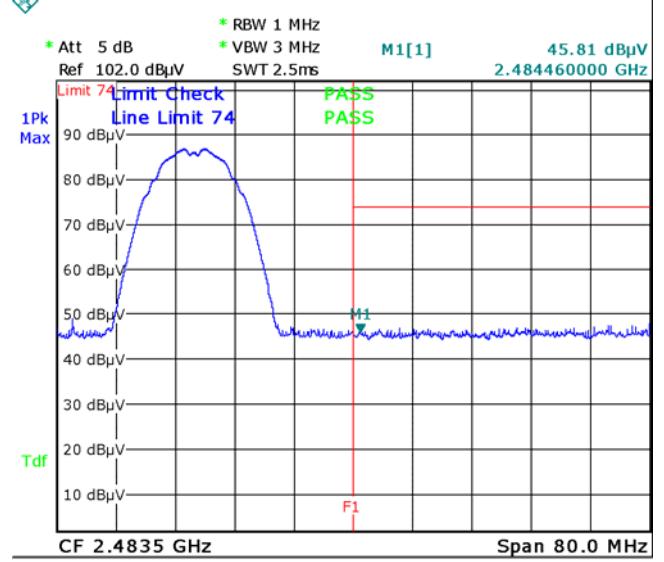
|   |  |
|---|--|
|  <p>1Pk Max</p> <p>90 dB<math>\mu</math>V<br/>80 dB<math>\mu</math>V<br/>70 dB<math>\mu</math>V<br/>60 dB<math>\mu</math>V<br/>50 dB<math>\mu</math>V<br/>40 dB<math>\mu</math>V<br/>30 dB<math>\mu</math>V<br/>20 dB<math>\mu</math>V<br/>10 dB<math>\mu</math>V</p> <p>M2<br/>M1</p> <p>CF 2.39 GHz Span 80.0 MHz</p> |  <p>1Pk Max</p> <p>90 dB<math>\mu</math>V<br/>80 dB<math>\mu</math>V<br/>70 dB<math>\mu</math>V<br/>60 dB<math>\mu</math>V<br/>50 dB<math>\mu</math>V<br/>40 dB<math>\mu</math>V<br/>30 dB<math>\mu</math>V<br/>20 dB<math>\mu</math>V<br/>10 dB<math>\mu</math>V</p> <p>M1<br/>M2</p> <p>CF 2.4835 GHz Span 80.0 MHz</p> |
| <p>Date: 15.DEC.2015 13:57:14</p> <p>Band Edge, Left Side (Peak) - 802.11b</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>  | <p>Date: 15.DEC.2015 14:06:31</p> <p>Band Edge, Right Side (Peak) - 802.11b</p> <p>Note: F1 is frequency 2483.5MHz</p>   |
| <p>Note: (no need if PK value less than the AV limit)</p>   | <p>Note: (no need if PK value less than the AV limit)</p>  |
| <p>Band Edge, Left Side (Average) - 802.11b</p>   | <p>Band Edge, Right Side (Average) - 802.11b</p>   |
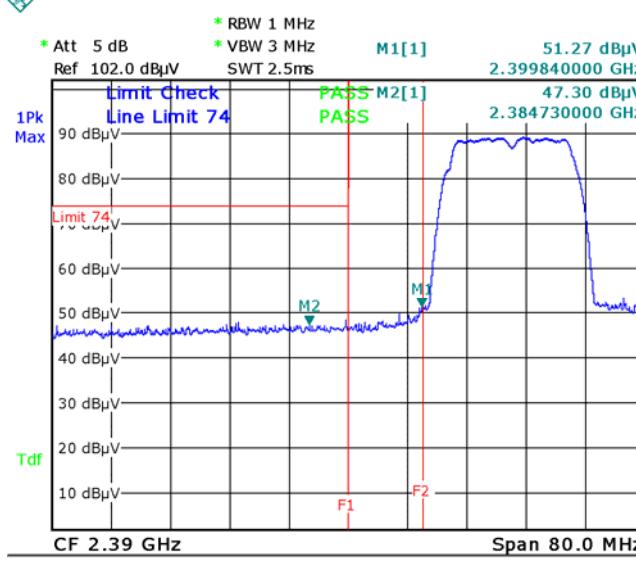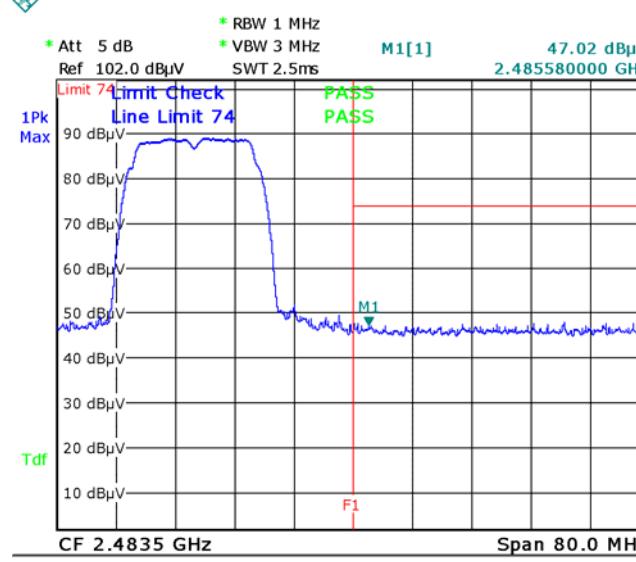
|   |  |
|---|--|
|  <p><b>Left Side (Peak) - 802.11g</b></p> <p><b>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</b></p> <p>Date: 15.DEC.2015 13:58:52</p> |  <p><b>Right Side (Peak) - 802.11g</b></p> <p><b>Note: F1 is frequency 2483.5MHz</b></p> <p>Date: 15.DEC.2015 14:08:42</p> |
| <p>Note: (no need if PK value less than the AV limit)</p>   | <p>Note: (no need if PK value less than the AV limit)</p>  |
| <p><b>Left Side (Average) - 802.11g</b></p> <p><b>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</b></p>  | <p><b>Right Side (Average) - 802.11g</b></p> <p><b>Note: F1 is frequency 2483.5MHz</b></p>   |

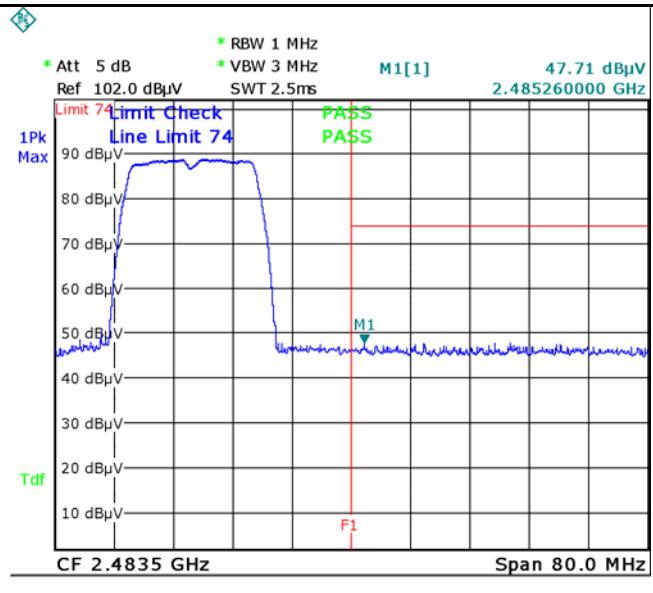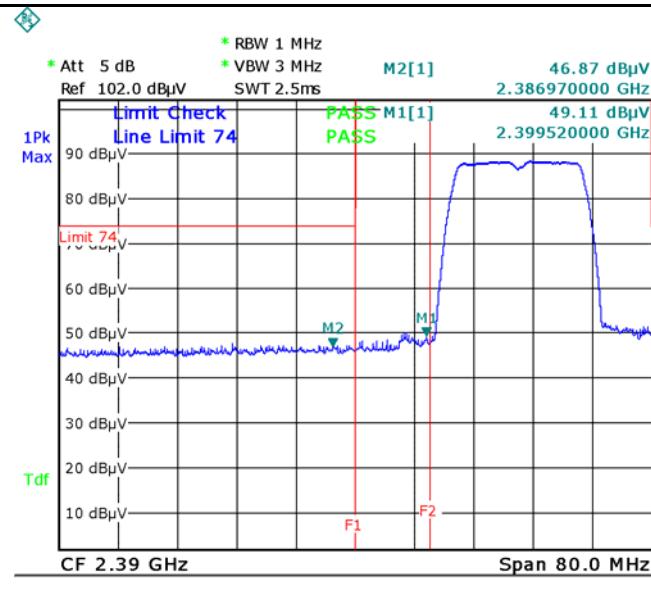

Date: 15.DEC.2015 14:00:32

Date: 15.DEC.2015 14:10:20

Band Edge, Left Side (Peak) - 802.11n20  
**Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz**

Band Edge, Right Side (Peak) - 802.11n20  
**Note: F1 is frequency 2483.5MHz**




Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

Band Edge, Left Side (Average) - 802.11n20

**Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz**


Band Edge, Right Side (Average) - 802.11n20
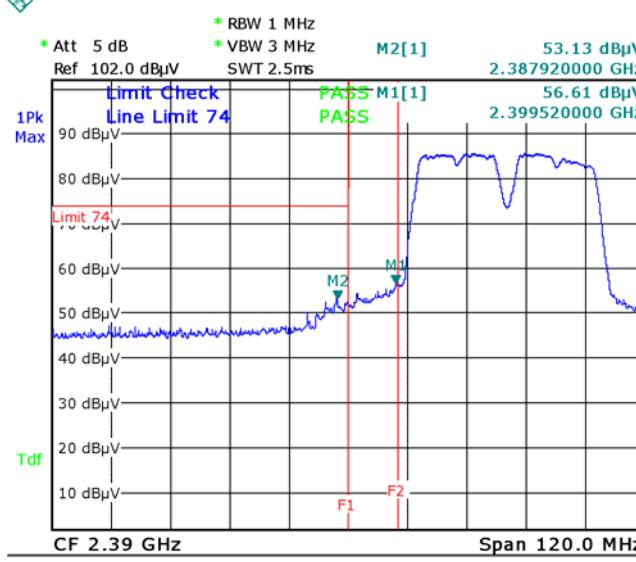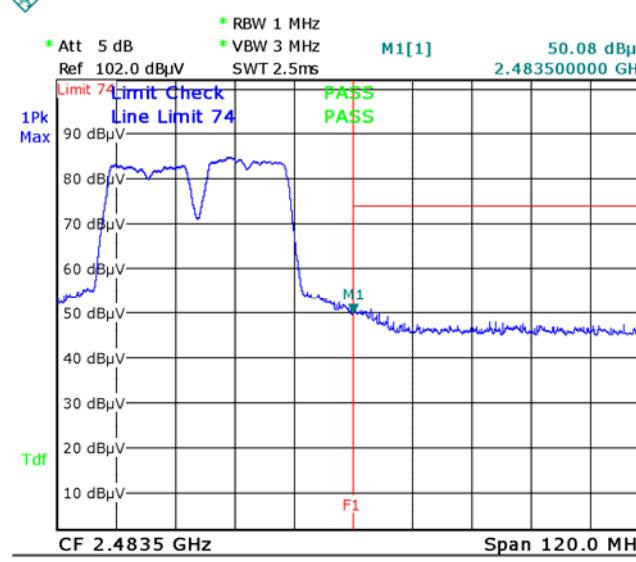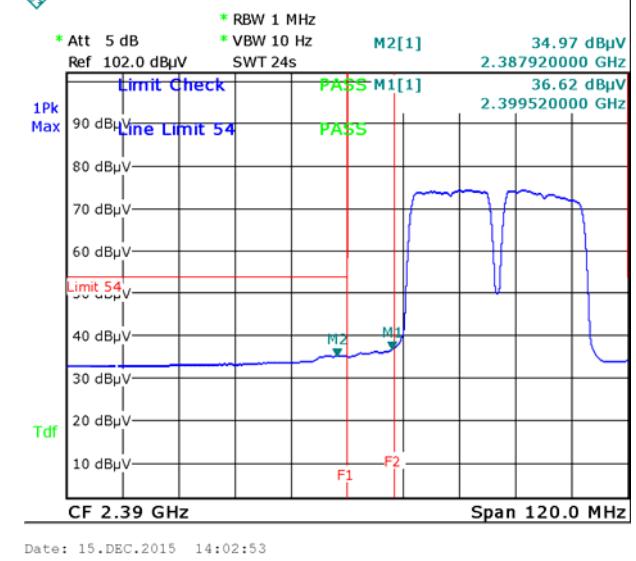
|  |  |
|--|--|
|  <p>* RBW 1 MHz<br/>   * Att 5 dB<br/>   * VBW 3 MHz<br/>   Ref 102.0 dB<math>\mu</math>V<br/>   SWT 2.5ms</p> <p>M2[1] 53.13 dB<math>\mu</math>V<br/>   2.387920000 GHz</p> <p>1Pk Max 90 dB<math>\mu</math>V<br/>   Line Limit 74<br/>   80 dB<math>\mu</math>V<br/>   70 dB<math>\mu</math>V<br/>   60 dB<math>\mu</math>V<br/>   50 dB<math>\mu</math>V<br/>   40 dB<math>\mu</math>V<br/>   30 dB<math>\mu</math>V<br/>   20 dB<math>\mu</math>V<br/>   10 dB<math>\mu</math>V</p> <p>Tdf 56.61 dB<math>\mu</math>V<br/>   2.399520000 GHz</p> <p>PASS M1[1] M2<br/>   M1<br/>   F1 F2</p> <p>CF 2.39 GHz Span 120.0 MHz</p> |  <p>* RBW 1 MHz<br/>   * Att 5 dB<br/>   * VBW 3 MHz<br/>   Ref 102.0 dB<math>\mu</math>V<br/>   SWT 2.5ms</p> <p>M1[1] 50.08 dB<math>\mu</math>V<br/>   2.483500000 GHz</p> <p>1Pk Max 90 dB<math>\mu</math>V<br/>   Line Limit 74<br/>   80 dB<math>\mu</math>V<br/>   70 dB<math>\mu</math>V<br/>   60 dB<math>\mu</math>V<br/>   50 dB<math>\mu</math>V<br/>   40 dB<math>\mu</math>V<br/>   30 dB<math>\mu</math>V<br/>   20 dB<math>\mu</math>V<br/>   10 dB<math>\mu</math>V</p> <p>Tdf 50.08 dB<math>\mu</math>V<br/>   2.483500000 GHz</p> <p>PASS M1<br/>   F1</p> <p>CF 2.4835 GHz Span 120.0 MHz</p> |
| <p>Date: 15.DEC.2015 14:02:00</p> <p>Band Edge, Left Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>   | <p>Date: 15.DEC.2015 14:04:45</p> <p>Band Edge, Right Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>   |
|  <p>* RBW 1 MHz<br/>   * Att 5 dB<br/>   * VBW 10 Hz<br/>   Ref 102.0 dB<math>\mu</math>V<br/>   SWT 24s</p> <p>M2[1] 34.97 dB<math>\mu</math>V<br/>   2.387920000 GHz</p> <p>1Pk Max 90 dB<math>\mu</math>V<br/>   Line Limit 54<br/>   80 dB<math>\mu</math>V<br/>   70 dB<math>\mu</math>V<br/>   60 dB<math>\mu</math>V<br/>   50 dB<math>\mu</math>V<br/>   40 dB<math>\mu</math>V<br/>   30 dB<math>\mu</math>V<br/>   20 dB<math>\mu</math>V<br/>   10 dB<math>\mu</math>V</p> <p>Tdf 36.62 dB<math>\mu</math>V<br/>   2.399520000 GHz</p> <p>PASS M1[1] M2<br/>   M1<br/>   F1 F2</p> <p>CF 2.39 GHz Span 120.0 MHz</p> | <p>Note: (no need if PK value less than the AV limit)</p>  |
| <p>Date: 15.DEC.2015 14:02:53</p> <p>Band Edge, Left Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>  | <p>Band Edge, Right Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>  |

## 6.6 AC Power Line Conducted Emissions

|                      |                   |
|----------------------|-------------------|
| Temperature          | 25°C              |
| Relative Humidity    | 57%               |
| Atmospheric Pressure | 1015mbar          |
| Test date :          | December 15, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):

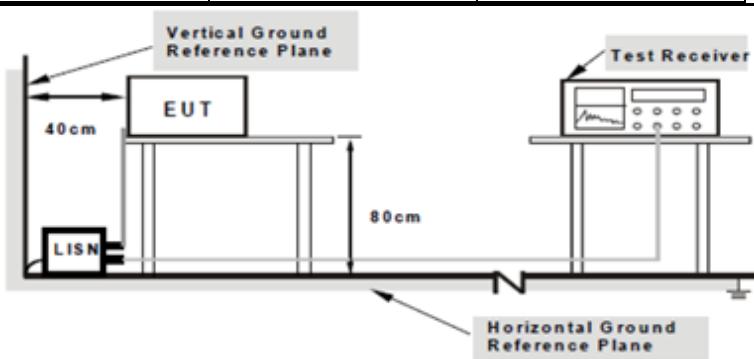
| Spec                        | Item  | Requirement   | Applicable             |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
|-----------------------------|---|---|------------------------|--------------------|--|--|----|---------|------------|---------|---------|---------|----|----|--------|----|----|-------------------------------------|
| 47CFR§15.207, RSS210 (A8.1) | a)  | <p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th>Frequency ranges (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th></th> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency ranges (MHz) | Limit (dB $\mu$ V) |  |  | QP | Average | 0.15 ~ 0.5 | 66 – 56 | 56 – 46 | 0.5 ~ 5 | 56 | 46 | 5 ~ 30 | 60 | 50 | <input checked="" type="checkbox"/> |
| Frequency ranges (MHz)      | Limit (dB $\mu$ V)  |   |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
|                             | QP  | Average   |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
| 0.15 ~ 0.5                  | 66 – 56   | 56 – 46   |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
| 0.5 ~ 5                     | 56  | 46  |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
| 5 ~ 30                      | 60  | 50  |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
| Test Setup                  |  <p><b>Note:</b> 1. Support units were connected to second LISN.<br/>2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>  |   |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |
| Procedure                   | <ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol> |   |                        |                    |  |  |    |         |            |         |         |         |    |    |        |    |    |                                     |

|        |  |
|--------|--|
|        | <p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol> |
| Remark |  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A


**Test Mode:** Transmitting Mode

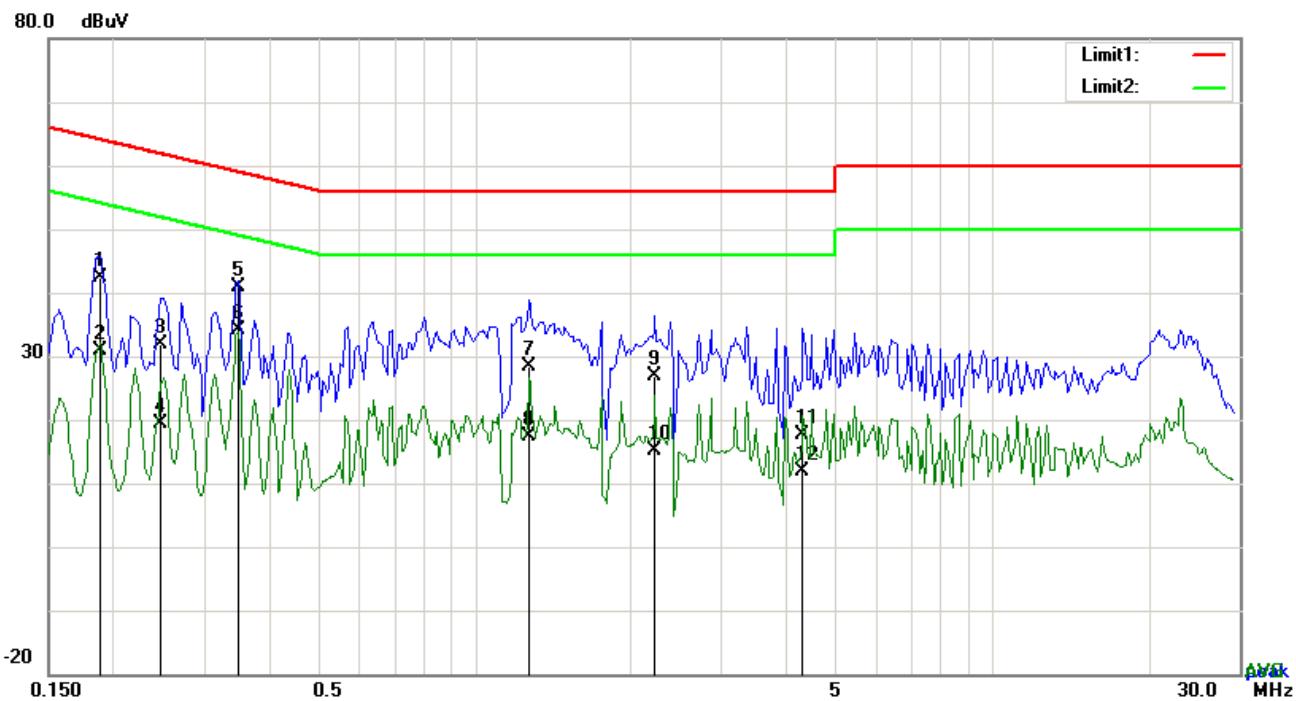

Phase Line Plot at 120Vac, 60Hz

| No. | P/L | Frequency (MHz) | Reading (dB $\mu$ V) | Detector | Corrected (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) |
|-----|-----|-----------------|----------------------|----------|----------------|---------------------|--------------------|-------------|
| 1   | L1  | 0.1890          | 32.33                | QP       | 10.03          | 42.36               | 64.08              | -21.72      |
| 2   | L1  | 0.1890          | 20.82                | AVG      | 10.03          | 30.85               | 54.08              | -23.23      |
| 3   | L1  | 0.2475          | 21.91                | QP       | 10.03          | 31.94               | 61.84              | -29.90      |
| 4   | L1  | 0.2475          | 9.34                 | AVG      | 10.03          | 19.37               | 51.84              | -32.47      |
| 5   | L1  | 0.3489          | 30.80                | QP       | 10.03          | 40.83               | 58.99              | -18.16      |
| 6   | L1  | 0.3489          | 24.00                | AVG      | 10.03          | 34.03               | 48.99              | -14.96      |
| 7   | L1  | 1.2732          | 18.35                | QP       | 10.03          | 28.38               | 56.00              | -27.62      |
| 8   | L1  | 1.2732          | 7.31                 | AVG      | 10.03          | 17.34               | 46.00              | -28.66      |
| 9   | L1  | 2.2287          | 16.82                | QP       | 10.05          | 26.87               | 56.00              | -29.13      |
| 10  | L1  | 2.2287          | 5.20                 | AVG      | 10.05          | 15.25               | 46.00              | -30.75      |
| 11  | L1  | 4.3026          | 7.60                 | QP       | 10.07          | 17.67               | 56.00              | -38.33      |
| 12  | L1  | 4.3026          | 1.77                 | AVG      | 10.07          | 11.84               | 46.00              | -34.16      |

**Test Mode:** Transmitting Mode

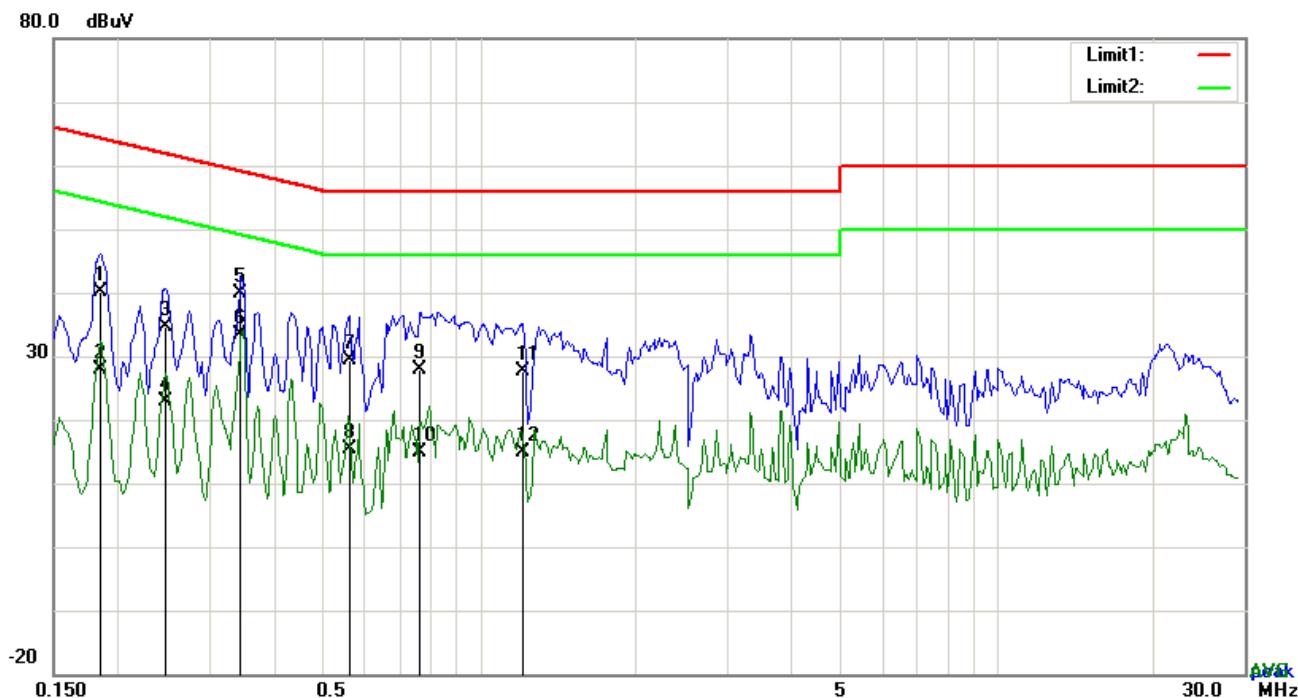


**Test Data**

Phase Neutral Plot at 120Vac, 60Hz

| No. | P/L | Frequency (MHz) | Reading (dB $\mu$ V) | Detector | Corrected (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) |
|-----|-----|-----------------|----------------------|----------|----------------|---------------------|--------------------|-------------|
| 1   | N   | 0.1851          | 30.12                | QP       | 10.02          | 40.14               | 64.25              | -24.11      |
| 2   | N   | 0.1851          | 17.89                | AVG      | 10.02          | 27.91               | 54.25              | -26.34      |
| 3   | N   | 0.2475          | 24.50                | QP       | 10.02          | 34.52               | 61.84              | -27.32      |
| 4   | N   | 0.2475          | 12.76                | AVG      | 10.02          | 22.78               | 51.84              | -29.06      |
| 5   | N   | 0.3450          | 29.94                | QP       | 10.02          | 39.96               | 59.08              | -19.12      |
| 6   | N   | 0.3450          | 23.25                | AVG      | 10.02          | 33.27               | 49.08              | -15.81      |
| 7   | N   | 0.5595          | 19.32                | QP       | 10.02          | 29.34               | 56.00              | -26.66      |
| 8   | N   | 0.5595          | 5.28                 | AVG      | 10.02          | 15.30               | 46.00              | -30.70      |
| 9   | N   | 0.7662          | 17.82                | QP       | 10.03          | 27.85               | 56.00              | -28.15      |
| 10  | N   | 0.7662          | 4.94                 | AVG      | 10.03          | 14.97               | 46.00              | -31.03      |
| 11  | N   | 1.2147          | 17.53                | QP       | 10.03          | 27.56               | 56.00              | -28.44      |
| 12  | N   | 1.2147          | 4.79                 | AVG      | 10.03          | 14.82               | 46.00              | -31.18      |


Test Mode: Transmitting Mode

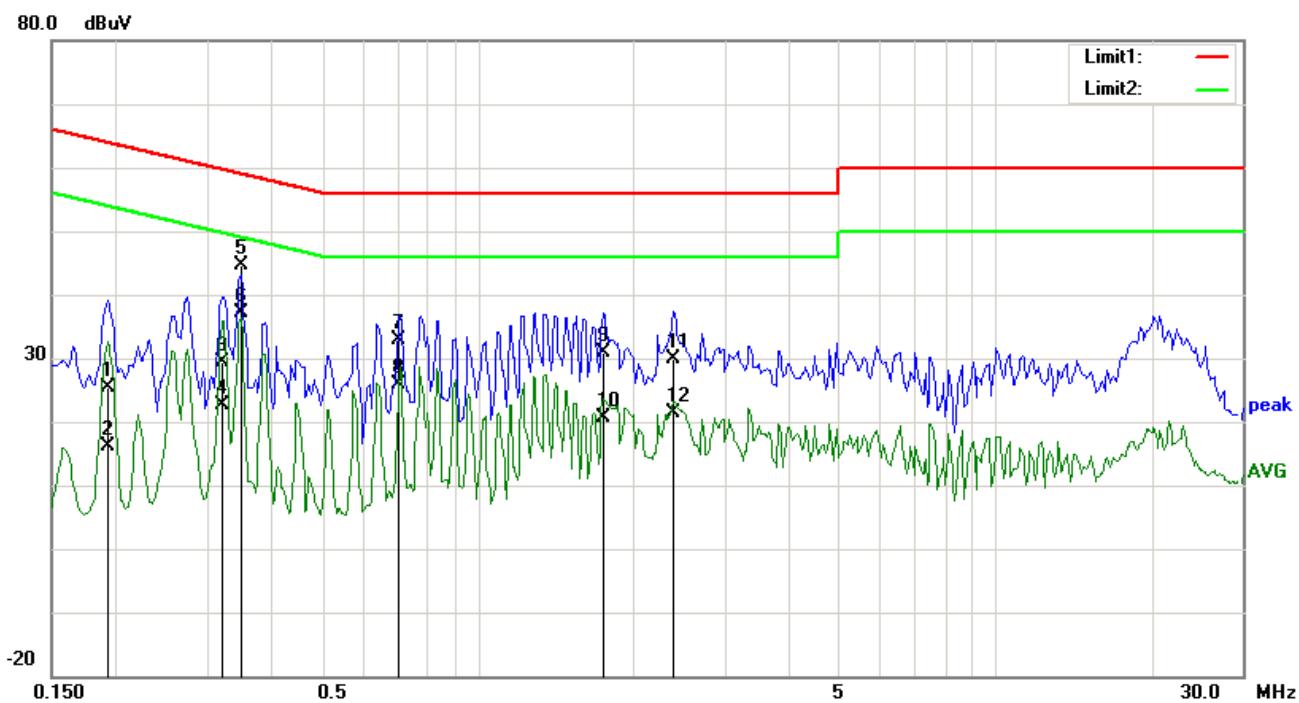
*Test Data*

## Phase Line Plot at 240Vac, 60Hz

| No. | P/L | Frequency (MHz) | Reading (dB $\mu$ V) | Detector | Corrected (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) |
|-----|-----|-----------------|----------------------|----------|----------------|---------------------|--------------------|-------------|
| 1   | L1  | 0.1929          | 15.45                | QP       | 10.03          | 25.48               | 63.91              | -38.43      |
| 2   | L1  | 0.1929          | 6.01                 | AVG      | 10.03          | 16.04               | 53.91              | -37.87      |
| 3   | L1  | 0.3216          | 19.46                | QP       | 10.03          | 29.49               | 59.67              | -30.18      |
| 4   | L1  | 0.3216          | 12.69                | AVG      | 10.03          | 22.72               | 49.67              | -26.95      |
| 5   | L1  | 0.3489          | 34.53                | QP       | 10.03          | 44.56               | 58.99              | -14.43      |
| 6   | L1  | 0.3489          | 27.11                | AVG      | 10.03          | 37.14               | 48.99              | -11.85      |
| 7   | L1  | 0.7038          | 22.92                | QP       | 10.03          | 32.95               | 56.00              | -23.05      |
| 8   | L1  | 0.7038          | 15.74                | AVG      | 10.03          | 25.77               | 46.00              | -20.23      |
| 9   | L1  | 1.7490          | 20.92                | QP       | 10.04          | 30.96               | 56.00              | -25.04      |
| 10  | L1  | 1.7490          | 10.50                | AVG      | 10.04          | 20.54               | 46.00              | -25.46      |
| 11  | L1  | 2.3925          | 19.80                | QP       | 10.05          | 29.85               | 56.00              | -26.15      |
| 12  | L1  | 2.3925          | 11.21                | AVG      | 10.05          | 21.26               | 46.00              | -24.74      |

**Test Mode:** Transmitting Mode

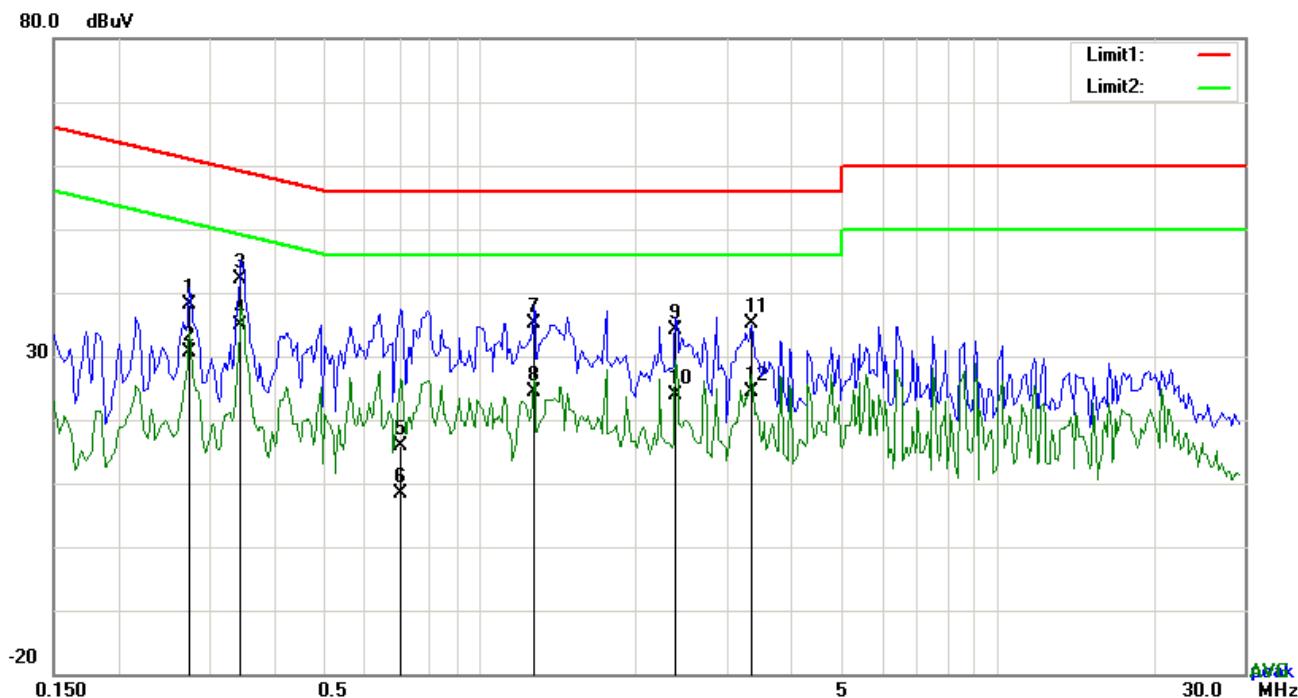

### Test Data

Phase Neutral Plot at 240Vac, 60Hz


| No. | P/L | Frequency (MHz) | Reading (dB $\mu$ V) | Detector | Corrected (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) |
|-----|-----|-----------------|----------------------|----------|----------------|---------------------|--------------------|-------------|
| 1   | N   | 0.2748          | 28.11                | QP       | 10.02          | 38.13               | 60.97              | -22.84      |
| 2   | N   | 0.2748          | 20.54                | AVG      | 10.02          | 30.56               | 50.97              | -20.41      |
| 3   | N   | 0.3450          | 32.20                | QP       | 10.02          | 42.22               | 59.08              | -16.86      |
| 4   | N   | 0.3450          | 24.98                | AVG      | 10.02          | 35.00               | 49.08              | -14.08      |
| 5   | N   | 0.7038          | 5.85                 | QP       | 10.02          | 15.87               | 56.00              | -40.13      |
| 6   | N   | 0.7038          | -1.58                | AVG      | 10.02          | 8.44                | 46.00              | -37.56      |
| 7   | N   | 1.2732          | 25.22                | QP       | 10.03          | 35.25               | 56.00              | -20.75      |
| 8   | N   | 1.2732          | 14.24                | AVG      | 10.03          | 24.27               | 46.00              | -21.73      |
| 9   | N   | 2.3925          | 24.17                | QP       | 10.04          | 34.21               | 56.00              | -21.79      |
| 10  | N   | 2.3925          | 13.89                | AVG      | 10.04          | 23.93               | 46.00              | -22.07      |
| 11  | N   | 3.3471          | 25.01                | QP       | 10.05          | 35.06               | 56.00              | -20.94      |
| 12  | N   | 3.3471          | 14.36                | AVG      | 10.05          | 24.41               | 46.00              | -21.59      |

## 6.7 Radiated Spurious Emissions

|                      |                   |
|----------------------|-------------------|
| Temperature          | 25°C              |
| Relative Humidity    | 57%               |
| Atmospheric Pressure | 1015mbar          |
| Test date :          | December 15, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):

| Spec                                     | Item  | Requirement   | Applicable                          |                       |                       |         |     |          |     |           |
|--|---|---|-------------------------------------|-----------------------|-----------------------|---------|-----|----------|-----|-----------|
| 47CFR§15.<br>247(d),<br>RSS210<br>(A8.5) | a)  | Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges | <input checked="" type="checkbox"/> |                       |                       |         |     |          |     |           |
|  |   | <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>                               |                                     | Frequency range (MHz) | Field Strength (µV/m) | 30 – 88 | 100 | 88 – 216 | 150 | 216 – 960 |
| Frequency range (MHz)                    | Field Strength (µV/m)   |   |                                     |                       |                       |         |     |          |     |           |
| 30 – 88                                  | 100   |   |                                     |                       |                       |         |     |          |     |           |
| 88 – 216                                 | 150   |   |                                     |                       |                       |         |     |          |     |           |
| 216 – 960                                | 200   |   |                                     |                       |                       |         |     |          |     |           |
| Above 960                                | 500   |   |                                     |                       |                       |         |     |          |     |           |
| b)                                       | For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required<br><br><input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down | <input checked="" type="checkbox"/>   |                                     |                       |                       |         |     |          |     |           |
| c)                                       | or restricted band, emission must also comply with the radiated emission limits specified in 15.209   | <input checked="" type="checkbox"/>   |                                     |                       |                       |         |     |          |     |           |

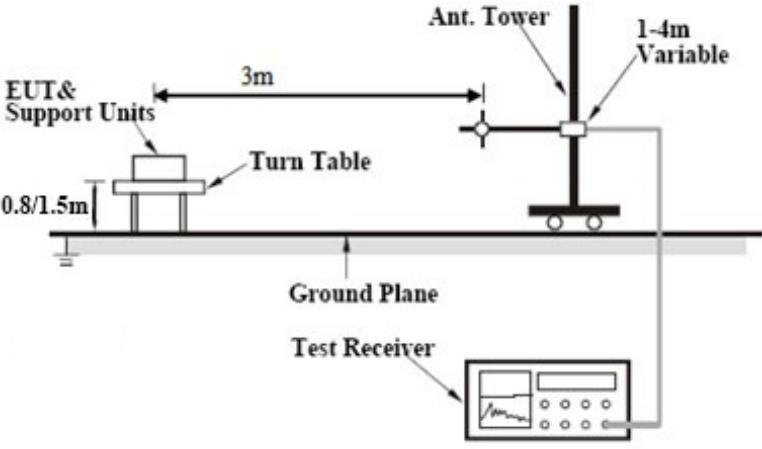
|            |   |
|------------|---|
| Test Setup |  <p>The diagram illustrates the test setup. An EUT &amp; Support Units assembly is mounted on a Turn Table, which is positioned 0.8/1.5m above a Ground Plane. The Turn Table is connected to an Ant. Tower. The Ant. Tower is a vertical mast with a 1-4m Variable height adjustment. A Test Receiver is connected to the Ant. Tower to measure emissions.</p>   |
| Procedure  | <ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.<br/>           The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> <li>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol> |
| Remark     | <p>Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.</p>  |
| Result     | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

Test Mode: Transmitting Mode


(Below 1GHz)

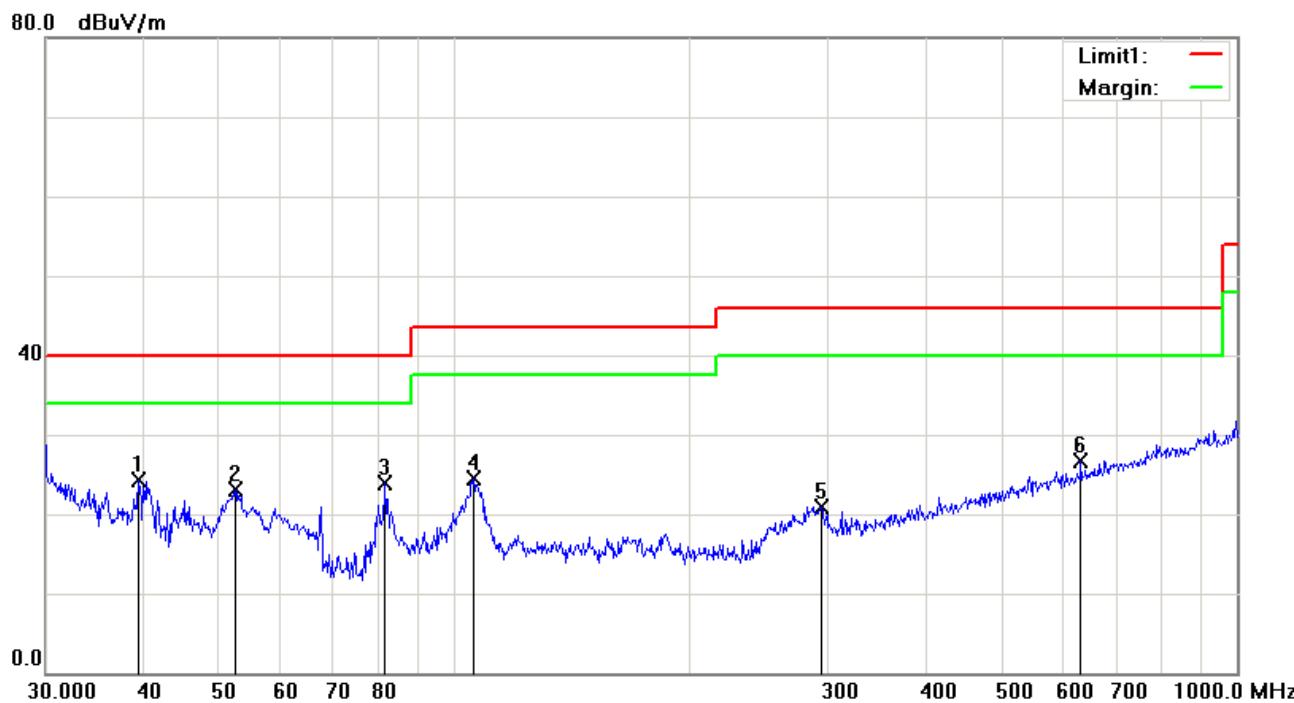

### Test Data

#### Vertical Polarity Plot @3m

| No | P/L | Frequency (MHz) | Reading (dB $\mu$ V) | Detector | Corrected (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Height | Degree |
|----|-----|-----------------|----------------------|----------|----------------|---------------------|--------------------|-------------|--------|--------|
| 1  | V   | 39.4372         | 31.55                | peak     | -7.18          | 24.37               | 40.00              | -15.63      | 100    | 197    |
| 2  | V   | 52.3913         | 36.49                | peak     | -13.46         | 23.03               | 40.00              | -16.97      | 100    | 242    |
| 3  | V   | 81.4970         | 37.58                | peak     | -13.69         | 23.89               | 40.00              | -16.11      | 100    | 164    |
| 4  | V   | 105.6415        | 34.20                | peak     | -9.79          | 24.41               | 43.50              | -19.09      | 100    | 239    |
| 5  | V   | 294.1137        | 28.11                | peak     | -7.17          | 20.94               | 46.00              | -25.06      | 100    | 220    |
| 6  | V   | 631.6884        | 26.24                | peak     | 0.52           | 26.76               | 46.00              | -19.24      | 100    | 130    |

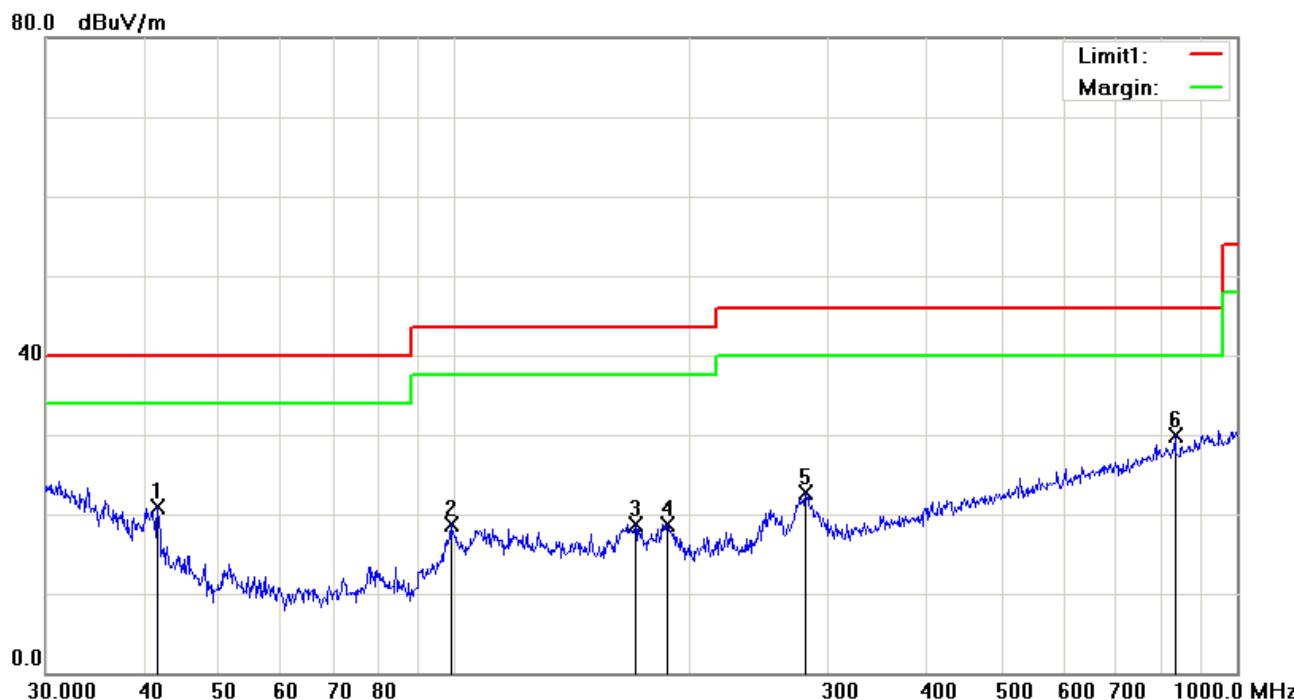**(Below 1GHz)**

**Test Data**
**Horizontal Polarity Plot @3m**

| No | P/L | Frequency (MHz) | Reading (dB $\mu$ V) | Detector | Corrected (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Height | Degree |
|----|-----|-----------------|----------------------|----------|----------------|---------------------|--------------------|-------------|--------|--------|
| 1  | H   | 41.7130         | 29.70                | peak     | -8.73          | 20.97               | 40.00              | -19.03      | 100    | 71     |
| 2  | H   | 98.8326         | 29.87                | peak     | -11.11         | 18.76               | 43.50              | -24.74      | 100    | 154    |
| 3  | H   | 170.1948        | 27.89                | peak     | -9.12          | 18.77               | 43.50              | -24.73      | 100    | 218    |
| 4  | H   | 187.0958        | 28.17                | peak     | -9.42          | 18.75               | 43.50              | -24.75      | 100    | 128    |
| 5  | H   | 281.0075        | 30.38                | peak     | -7.77          | 22.61               | 46.00              | -23.39      | 100    | 252    |
| 6  | H   | 833.3171        | 26.22                | peak     | 3.61           | 29.83               | 46.00              | -16.17      | 100    | 158    |

## Above 1GHz

|            |                   |
|------------|-------------------|
| Test Mode: | Transmitting Mode |
|------------|-------------------|

### Low Channel (2412 MHz)

| Frequency (MHz) | S.A. Reading (dB $\mu$ V) | Detector (PK/AV) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------------------|------------------|----------------|--------------------|-----------------|--------------------|--------------------------|----------------------|-------------|
| 4824            | 38.49                     | AV               | V              | 34                 | 6.86            | 31.72              | 47.63                    | 54                   | -6.37       |
| 4824            | 38.23                     | AV               | H              | 33.8               | 6.86            | 31.72              | 47.17                    | 54                   | -6.83       |
| 4824            | 46.37                     | PK               | V              | 34                 | 6.86            | 31.72              | 55.51                    | 74                   | -18.49      |
| 4824            | 46.32                     | PK               | H              | 33.8               | 6.86            | 31.72              | 55.26                    | 74                   | -18.74      |

### Middle Channel (2437 MHz)

| Frequency (MHz) | S.A. Reading (dB $\mu$ V) | Detector (PK/AV) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------------------|------------------|----------------|--------------------|-----------------|--------------------|--------------------------|----------------------|-------------|
| 4874            | 38.52                     | AV               | V              | 33.6               | 6.82            | 31.82              | 47.12                    | 54                   | -6.88       |
| 4874            | 38.19                     | AV               | H              | 33.8               | 6.82            | 31.82              | 46.99                    | 54                   | -7.01       |
| 4874            | 46.33                     | PK               | V              | 33.6               | 6.82            | 31.82              | 54.93                    | 74                   | -19.07      |
| 4874            | 46.27                     | PK               | H              | 33.8               | 6.82            | 31.82              | 55.07                    | 74                   | -18.93      |

### High Channel (2462 MHz)

| Frequency (MHz) | S.A. Reading (dB $\mu$ V) | Detector (PK/AV) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Cord Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------------------|------------------|----------------|--------------------|-----------------|--------------------|--------------------------|----------------------|-------------|
| 4924            | 38.46                     | AV               | V              | 34.6               | 6.76            | 31.92              | 47.9                     | 54                   | -6.10       |
| 4924            | 38.23                     | AV               | H              | 34.7               | 6.76            | 31.92              | 47.77                    | 54                   | -6.23       |
| 4924            | 46.48                     | PK               | V              | 34.6               | 6.76            | 31.92              | 55.92                    | 74                   | -18.08      |
| 4924            | 46.14                     | PK               | H              | 34.7               | 6.76            | 31.92              | 55.68                    | 74                   | -18.32      |

#### Note:

- 1, The testing has been conformed to 10\*2480MHz=24,800MHz
- 2, All other emissions more than 30 dB below the limit

## Annex A. TEST INSTRUMENT

| Instrument                           | Model    | Serial #    | Cal Date   | Cal Due    | In use                              |
|--------------------------------------|----------|-------------|------------|------------|-------------------------------------|
| <b>AC Line Conducted</b>             |          |             |            |            |                                     |
| EMI test receiver                    | ESCS30   | 8471241027  | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| Line Impedance                       | LI-125A  | 191106      | 09/25/2015 | 09/24/2016 | <input checked="" type="checkbox"/> |
| Line Impedance                       | LI-125A  | 191107      | 09/25/2015 | 09/24/2016 | <input checked="" type="checkbox"/> |
| LISN                                 | ISN T800 | 34373       | 09/25/2015 | 09/24/2016 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz) | AH-118   | 71283       | 09/24/2015 | 09/23/2016 | <input checked="" type="checkbox"/> |
| Transient Limiter                    | LIT-153  | 531118      | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| <b>RF conducted test</b>             |          |             |            |            |                                     |
| Agilent ESA-E SERIES                 | E4407B   | MY45108319  | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| Power Splitter                       | 1#       | 1#          | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| DC Power Supply                      | E3640A   | MY40004013  | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| <b>Radiated Emissions</b>            |          |             |            |            |                                     |
| EMI test receiver                    | ESL6     | 100262      | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| Positioning Controller               | UC3000   | MF780208282 | 11/19/2015 | 11/18/2016 | <input checked="" type="checkbox"/> |
| OPT 010 AMPLIFIER (0.1-1300MHz)      | 8447E    | 2727A02430  | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (1 ~ 26.5GHz) | 8449B    | 3008A02402  | 03/25/2015 | 03/24/2016 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~6GHz)           | JB6      | A110712     | 09/21/2015 | 09/20/2016 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz) | AH-118   | 71283       | 09/24/2015 | 09/23/2016 | <input checked="" type="checkbox"/> |
| Universal Radio Communication Tester | CMU200   | 121393      | 09/25/2015 | 09/24/2016 | <input checked="" type="checkbox"/> |

## Annex B. EUT and Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo







EUT - Top View



EUT - Bottom View

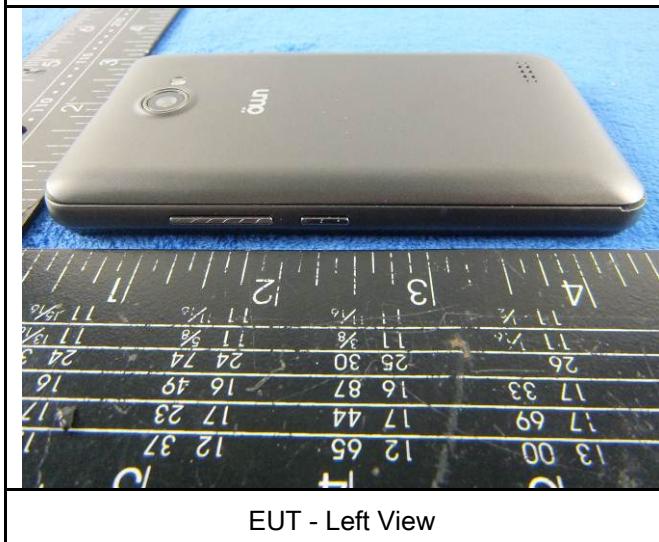


EUT - Left View

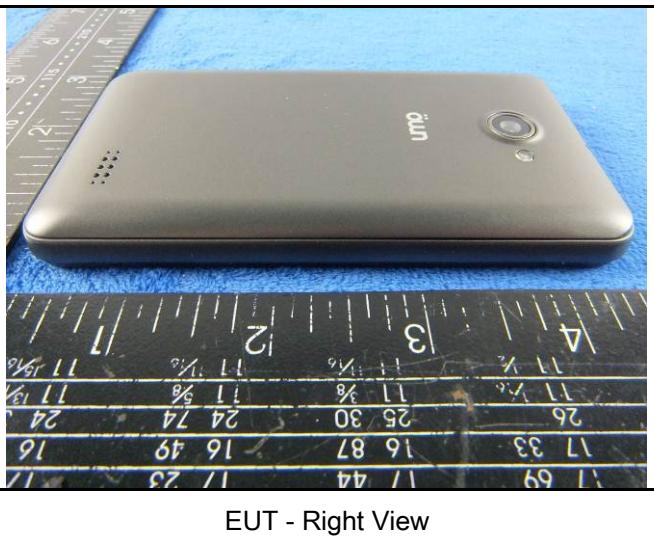


EUT - Right View

**Annex B.ii. Photograph: EUT Internal Photo**




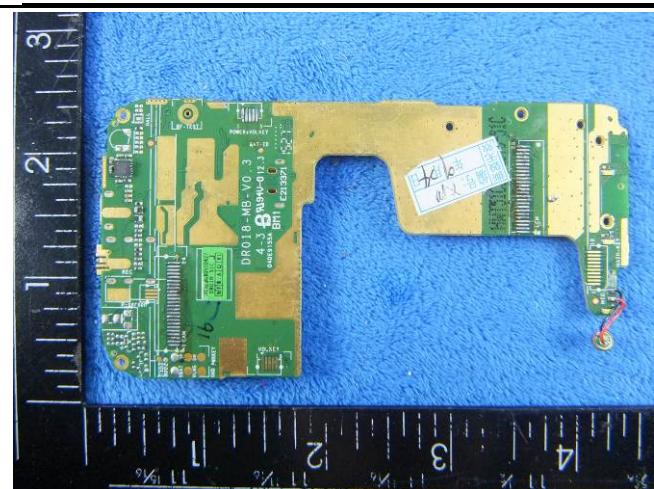


## Mainbard – Rear View

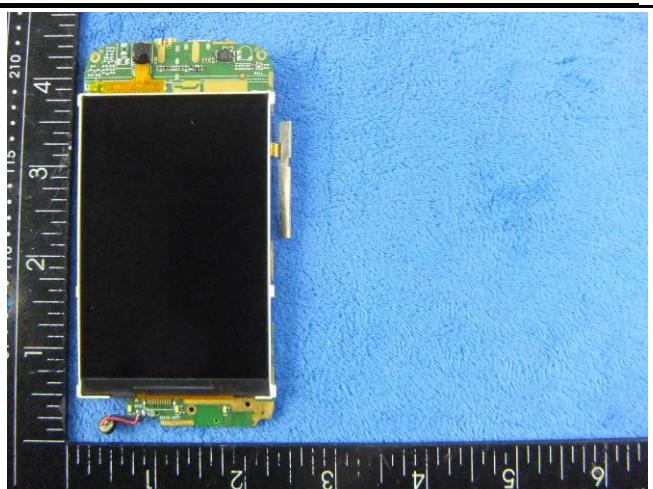

## LCD – Front View

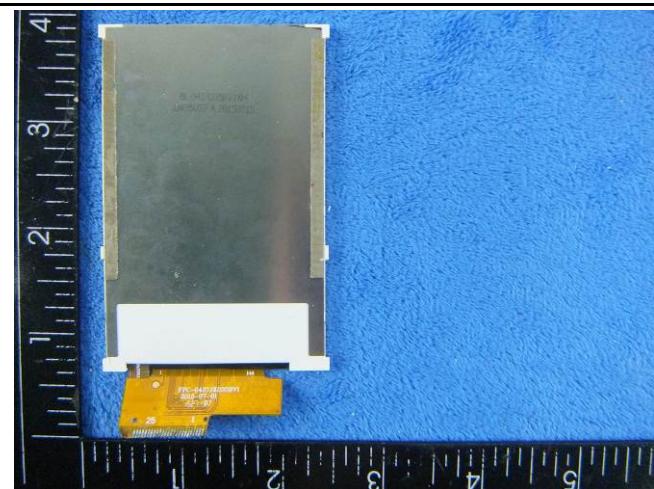

## LCD – Rear View

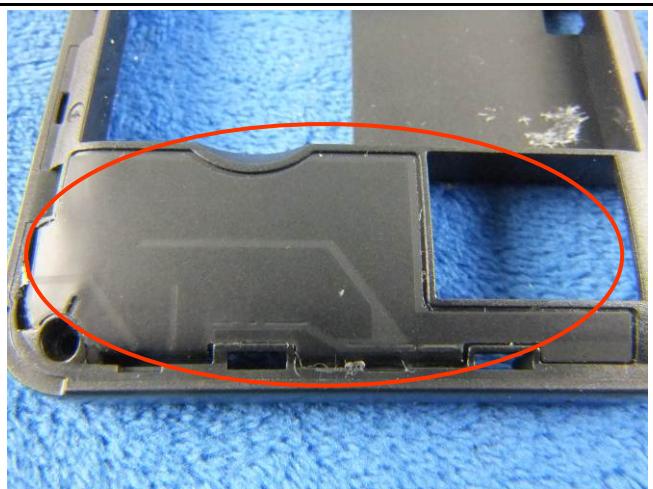


GSM/PCS/UMTS-FDD Antenna View



## WIFI/BT/BLE/GPS - Antenna View


**Annex B.iii. Photograph: Test Setup Photo**

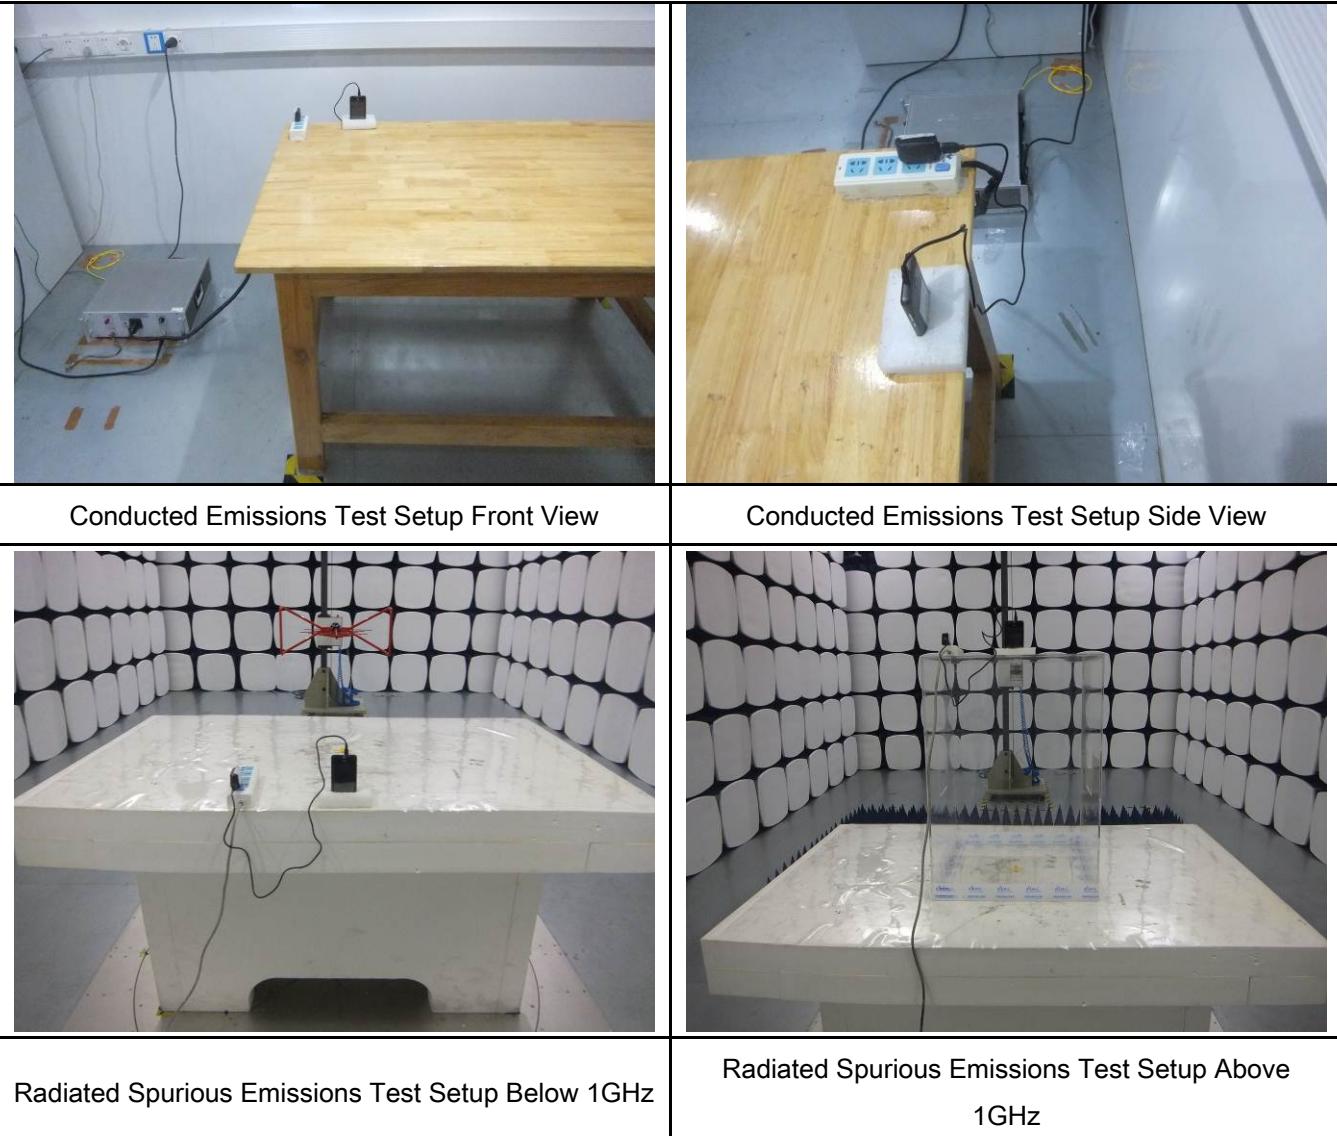


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

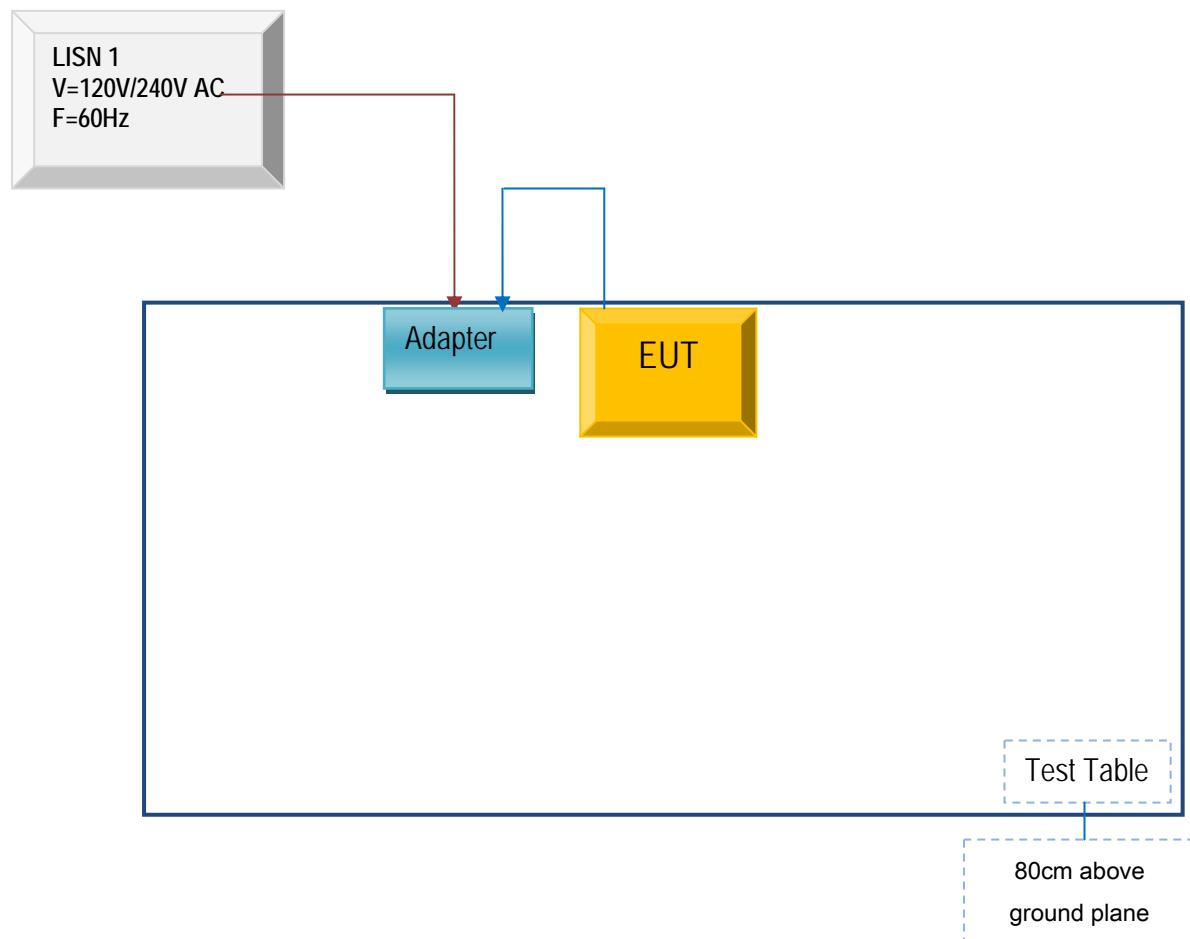

Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .

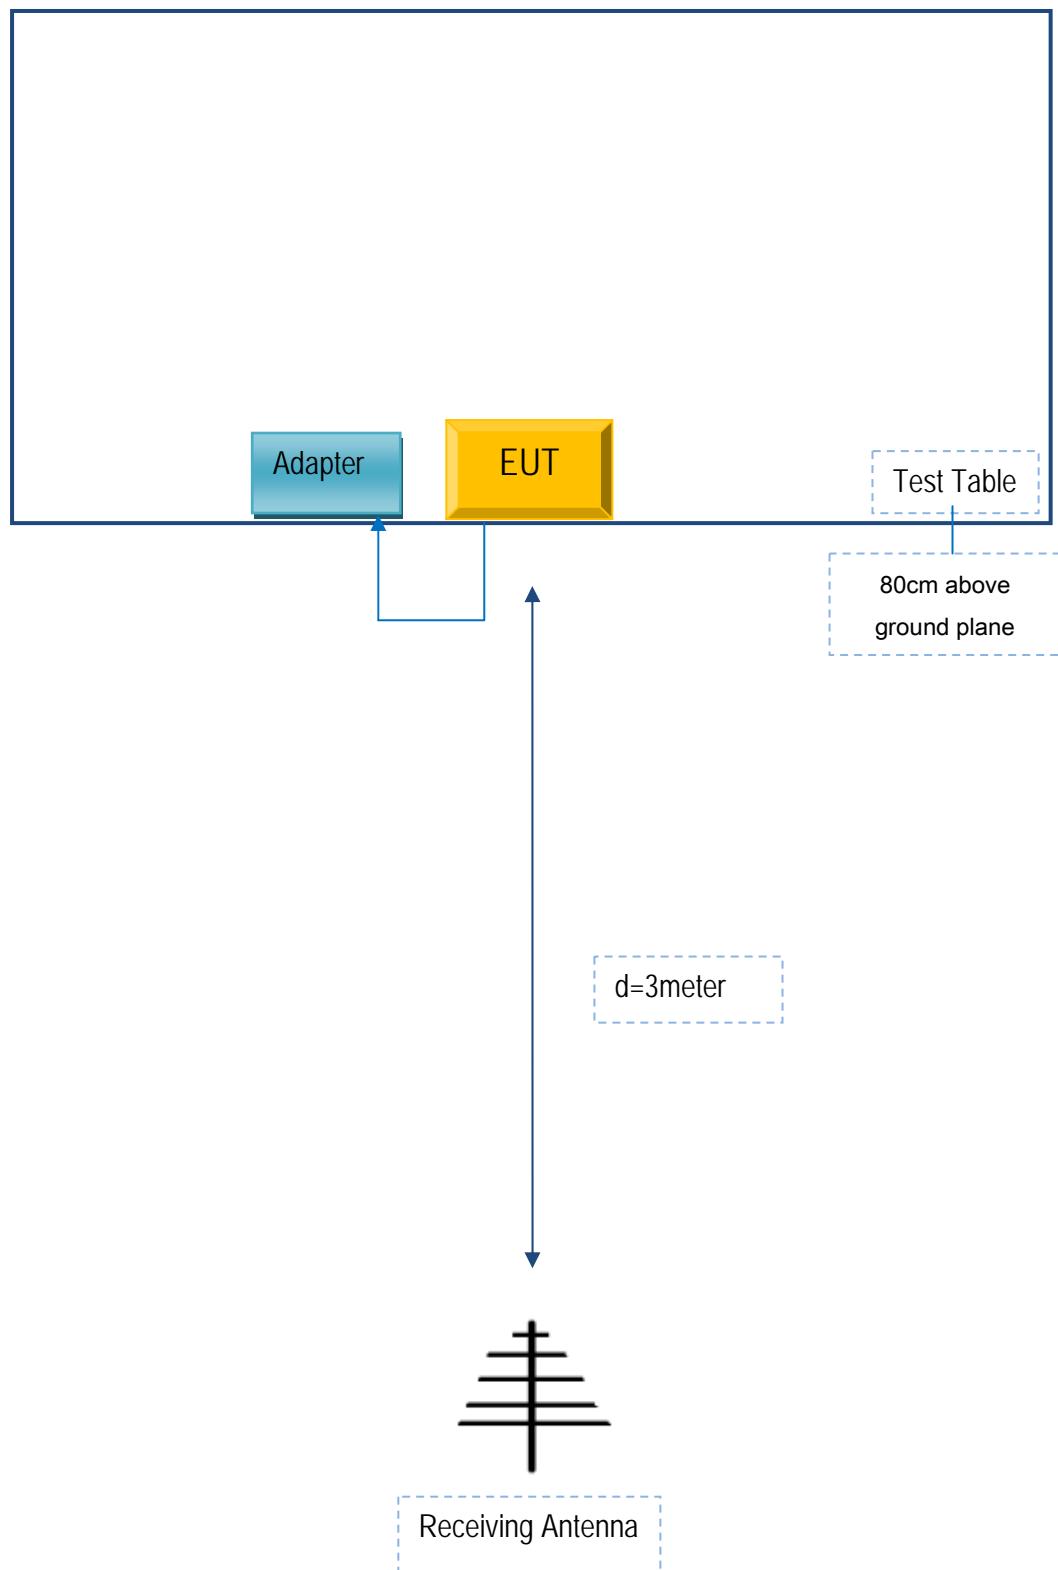

Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .

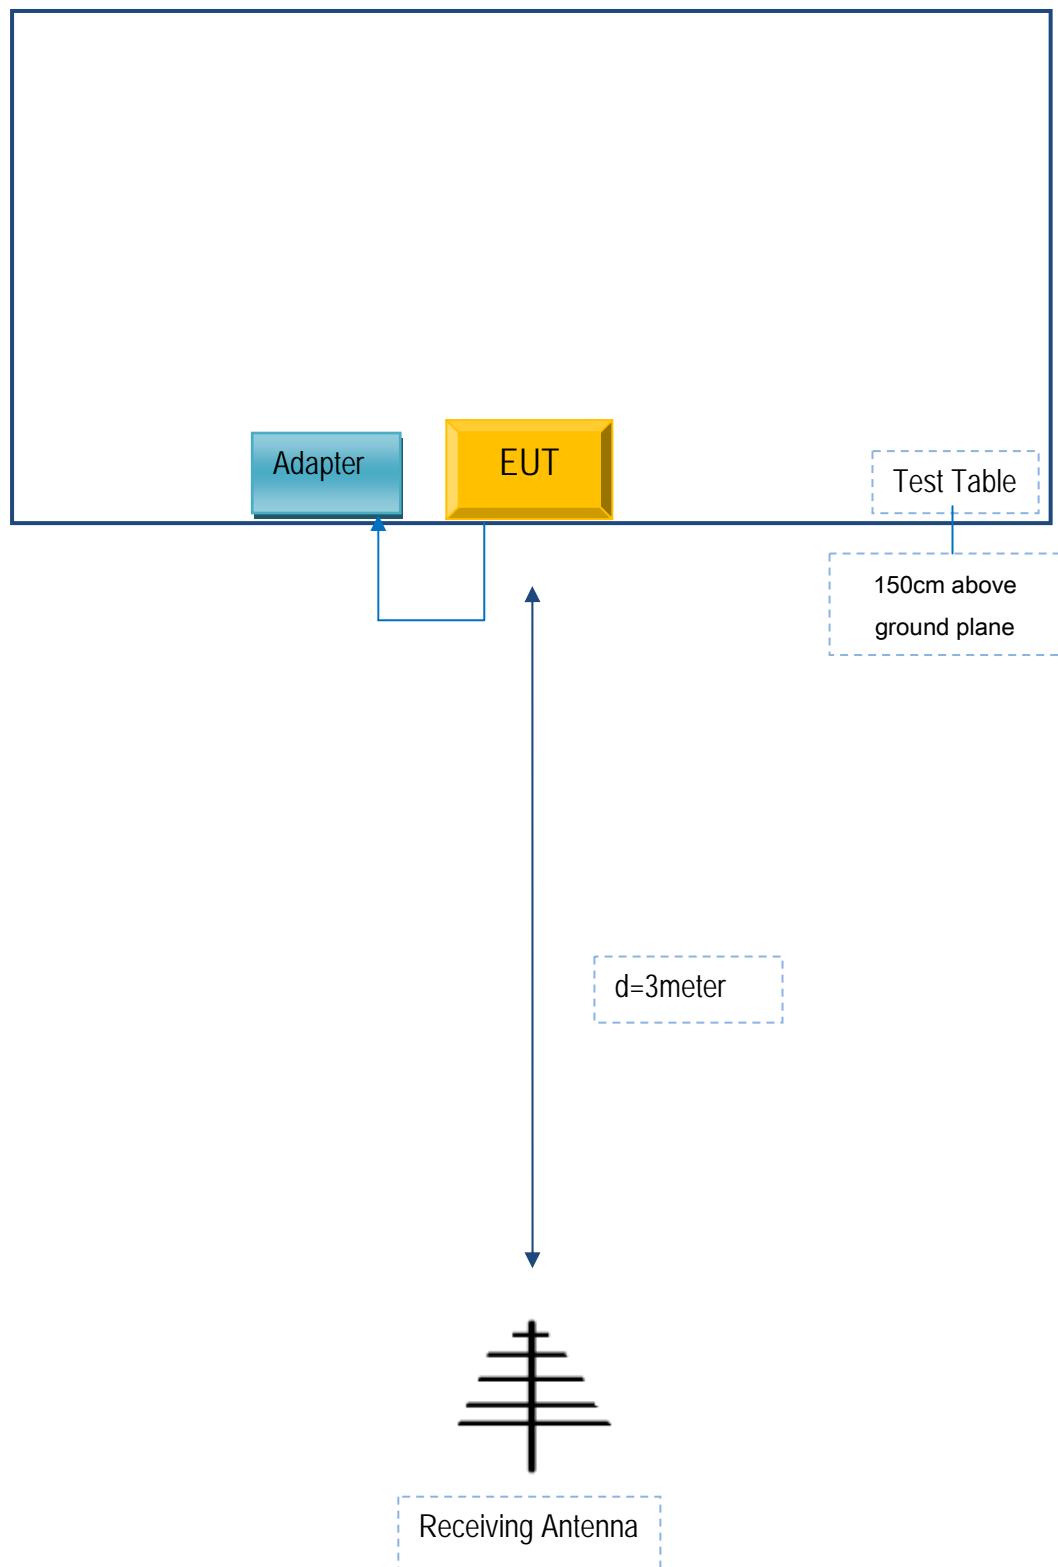

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

| Manufacturer                      | Equipment Description | Model  | Calibration Date | Serial No   | Calibration Due Date |
|-----------------------------------|-----------------------|--------|------------------|-------------|----------------------|
| NEG<br>TECHNOLOGY<br>CO., LIMITED | Adapter               | S3000D | N/A              | CN157421800 | N/A                  |

### Supporting Cable:

| Cable type | Shield Type  | Ferrite Core | Length | Serial No    | Calibration Date | Calibration Due Date |
|------------|--------------|--------------|--------|--------------|------------------|----------------------|
| USB Cable  | Un-shielding | No           | 0.8m   | XY1472851311 | N/A              | N/A                  |

|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 51 of 52        |

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

|                 |                 |
|-----------------|-----------------|
| Test Report No. | 15071175-FCC-R3 |
| Page            | 52 of 52        |

## Annex E. DECLARATION OF SIMILARITY

N/A