

APPLICATION FOR VERIFICATION
On Behalf of
Carewell Electric Technology (Zhongshan) Co.,Ltd.

REMOTE CONTROL
Model No.: FAN52R-M60

FCC ID: 2AAZPFAN52R-M60

Prepared for : Carewell Electric Technology (Zhongshan) Co.,Ltd.
Address : Torch Development Zone, No.2, Ouya
Road,Zhongshan,Guangdong,China
Prepared by : Accurate Technology Co., Ltd.
Address : F1, Bldg. A&D, Changyuan New Material Port, Keyuan
Rd., Science & Industry Park, Nanshan District, Shenzhen
518057, P.R. China

Tel: +86-755-26503290
Fax: +86-755-26503396

Report No. : ATE20151412
Date of Test : Jun 26-Jul 03,2015
Date of Report : Jul 03,2015

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Product of Device (EUT)	5
2.2. Accessory and Auxiliary Equipment.....	5
2.3. Description of Test Facility	6
2.4. Measurement Uncertainty.....	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
4. POWER LINE CONDUCTED MEASUREMENT.....	7
4.1. Block Diagram of Test Setup.....	9
4.2. The Emission Limit	9
4.3. Configuration of EUT on Measurement	10
4.4. Operating Condition of EUT	10
4.5. Test Procedure	10
4.6. Power Line Conducted Emission Measurement Results.....	11
5. RADIATED EMISSION MEASUREMENT	14
5.1. Block Diagram of Test Setup.....	14
5.2. The Emission Limit For Section 15.109 (a)	15
5.3. EUT Configuration on Measurement	15
5.4. Operating Condition of EUT	15
5.5. Test Procedure	15
5.6. Radiated Emission Noise Measurement Result.....	16

Test Report Declaration

Applicant : Carewell Electric Technology (Zhongshan) Co.,Ltd.
Manufacturer : Carewell Electric Technology (Zhongshan) Co.,Ltd.
EUT Description : REMOTE CONTROL
(A) MODEL NO.: FAN52R-M60
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: AC 120V


Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart B ANSI C63.4: 2014

The device described above is tested by Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Accurate Technology Co., Ltd.

Date of Test : Jun 26-Jul 03,2015
Date of Report : Jul 03,2015

Prepared by : 
(Eric Zhang, Engineer)

Approved & Authorized Signer : 
(Sean Liu, Manager)

1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15	Pass
Radiated Emission	FCC Part 15	Pass

2. GENERAL INFORMATION

2.1.Product of Device (EUT)

EUT	:	REMOTE CONTROL
Model Number	:	FAN52R-M60
Power Supply	:	AC 120V
Modulation:	:	ASK
Operation Frequency	:	315MHz RX
Applicant	:	Carewell Electric Technology (Zhongshan) Co.,Ltd.
Address	:	Torch Development Zone, No.2, Ouya Road,Zhongshan,Guangdong,China
Manufacturer	:	Carewell Electric Technology (Zhongshan) Co.,Ltd.
Address	:	Torch Development Zone, No.2, Ouya Road,Zhongshan,Guangdong,China
Date of sample received	:	Jun 26,2015
Date of Test	:	Jun 26-Jul 03,2015

2.2.Accessory and Auxiliary Equipment

NA

2.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004

Listed by FCC
The Registration Number is 253065

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-1

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee for Laboratories
The Certificate Registration Number is L3193

Name of Firm : Accurate Technology Co., Ltd.
Site Location : F1, Bldg. A&D, Changyuan New Material Port, Keyuan Rd., Science & Industry Park, Nanshan District, Shenzhen 518057, P.R. China

2.4. Measurement Uncertainty

Conducted emission expanded uncertainty : U=2.23dB, k=2

Power disturbance expanded uncertainty : U=2.92dB, k=2

Radiated emission expanded uncertainty : U=3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty : U=4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty : U=4.06dB, k=2
(Above 1GHz)

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. The Equipments Used to Measure Conducted Disturbance

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan.10, 2015	1 Year
2.	Test Receiver	Rohde & Schwarz	ESPI	100396/003	Jan.10, 2015	1 Year
3.	Test Receiver	Rohde & Schwarz	ESPI	101526/003	Jan.10, 2015	1 Year
4.	Test Receiver	Rohde & Schwarz	ESR	101817	Jan.10, 2015	1 Year
5.	L.I.S.N.	Schwarzbeck	NLSK8126	8126431	Jan.10, 2015	1 Year
6.	L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100305	Jan.10, 2015	1 Year
7.	L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100310	Jan.10, 2015	1 Year
8.	L.I.S.N.	Rohde & Schwarz	ESH3-Z6	100132	Jan.10, 2015	1 Year
9.	L.I.S.N.	Rohde & Schwarz	ESH3-Z6	100979	Jan.10, 2015	1 Year
10.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100305	Jan.10, 2015	1 Year
11.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100312	Jan.10, 2015	1 Year
12.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	Jan.10, 2015	1 Year
13.	50Ω Coaxial Switch	Anritsu Corp	MP59B	620028393 6	Jan.10, 2015	1 Year
14.	50Ω Coaxial Switch	Anritsu Corp	MP59B	620028393 3	Jan.10, 2015	1 Year
15.	50Ω Coaxial Switch	Anritsu Corp	MP59B	620050647 4	Jan.10, 2015	1 Year
16.	VOLTAGE PROBE	Schwarzbeck	TK9416	N/A	Jan.10, 2015	1 Year
17.	RF CURRENT PROBE	Rohde & Schwarz	EZ-17	100048	Jan.10, 2015	1 Year
18.	8-Wire Impedance Stabilisation Network	Schwarzbeck	CAT5 8158	8158-0035	Jan.10, 2015	1 Year
19.	RF Coaxial Cable	SUHNER	N-2m	No.2	Jan.10, 2015	1 Year
20.	RF Coaxial Cable	SUHNER	N-2m	No.3	Jan.10, 2015	1 Year
21.	RF Coaxial Cable	SUHNER	N-2m	No.14	Jan.10, 2015	1 Year

3.2. The Equipments Used to Measure Radiated Disturbance


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan.10, 2015	1 Year
2.	Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	Jan.10, 2015	1 Year
3.	Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan.10, 2015	1 Year
4.	Test Receiver	Rohde& Schwarz	ESPI	100396/003	Jan.10, 2015	1 Year
5.	Test Receiver	Rohde& Schwarz	ESPI	101526/003	Jan.10, 2015	1 Year
6.	Test Receiver	Rohde& Schwarz	ESR	101817	Jan.10, 2015	1 Year
7.	Bilog Antenna	Schwarzbeck	VULB9163	9163-194	Jan.15, 2015	1 Year
8.	Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan.15, 2015	1 Year
9.	Log.-Per.Antenna	Schwarzbeck	VUSLP 9111B	9111B-074	Jan.15, 2015	1 Year
10.	Biconical Broad Band Antenna	Schwarzbeck	VHBB 9124+BBA 9106	9124-617	Jan.15, 2015	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan.15, 2015	1 Year
12.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan.15, 2015	1 Year
13.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan.15, 2015	1 Year
14.	Vertical Active Monopole Antenna	Schwarzbeck	VAMP 9243	9243-370	Jan.15, 2015	1 Year
15.	RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	Jan.10, 2015	1 Year
16.	Pre-Amplifier	Agilent	8447D	294A10619	Jan.10, 2015	1 Year
17.	Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	Jan.10, 2015	1 Year
18.	50 Coaxial Switch	Anritsu Corp	MP59B	6200237248	Jan.10, 2015	1 Year
19.	50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan.10, 2015	1 Year
20.	RF Coaxial Cable	Schwarzbeck	N-5m	No.1	Jan.10, 2015	1 Year
21.	RF Coaxial Cable	Schwarzbeck	N-1m	No.6	Jan.10, 2015	1 Year
22.	RF Coaxial Cable	Schwarzbeck	N-1m	No.7	Jan.10, 2015	1 Year
23.	RF Coaxial Cable	SUHNER	N-3m	No.8	Jan.10, 2015	1 Year
24.	RF Coaxial Cable	RESENBERGER	N-3.5m	No.9	Jan.10, 2015	1 Year
25.	RF Coaxial Cable	SUHNER	N-6m	No.10	Jan.10, 2015	1 Year
26.	RF Coaxial Cable	RESENBERGER	N-12m	No.11	Jan.10, 2015	1 Year
27.	RF Coaxial Cable	RESENBERGER	N-0.5m	No.12	Jan.10, 2015	1 Year
28.	RF Coaxial Cable	SUHNER	N-2m	No.13	Jan.10, 2015	1 Year
29.	RF Coaxial Cable	SUHNER	N-0.5m	No.15	Jan.10, 2015	1 Year
30.	RF Coaxial Cable	SUHNER	N-2m	No.16	Jan.10, 2015	1 Year
31.	RF Coaxial Cable	RESENBERGER	N-6m	No.17	Jan.10, 2015	1 Year

4. POWER LINE CONDUCTED MEASUREMENT


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators

4.1.1.1. For Transfer data

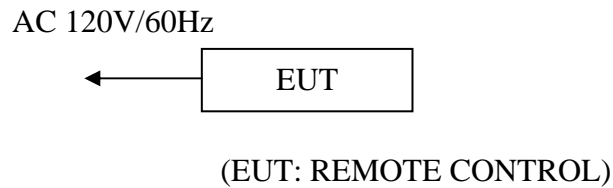

4.1.2. Shielding Room Test Setup Diagram

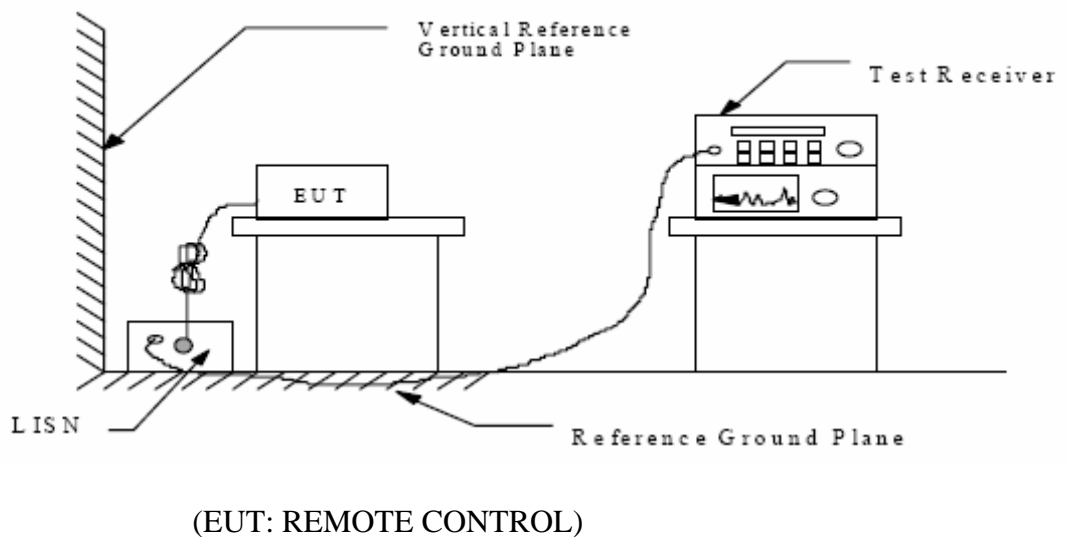

4.2. The Emission Limit

4.2.1. Conducted Emission Measurement Limits According to Section 15.107(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

4.3.1.REMOTE CONTROL (EUT)

Model Number: FAN52R-M60

Serial Number: N/A

Manufacturer: Carewell Electric Technology (Zhongshan) Co.,Ltd.

4.4. Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 3.2.

4.4.2.Turn on the power of all equipment.

4.4.3.Let the EUT work in test mode and measure it.

4.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

4.6. Power Line Conducted Emission Measurement Results

PASS.

Test Mode: RX								
MEASUREMENT RESULT: "CQER004_fin"								
2015-7-2 23:47								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.356000	48.30	11.2	59	10.5	QP	L1	GND	
0.372000	48.30	11.2	59	10.2	QP	L1	GND	
4.209500	45.20	11.8	56	10.8	QP	L1	GND	
10.509500	50.60	11.9	60	9.4	QP	L1	GND	
MEASUREMENT RESULT: "CQER004_fin2"								
2015-7-2 23:47								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.374000	44.20	11.2	48	4.2	AV	L1	GND	
3.759500	38.10	11.7	46	7.9	AV	L1	GND	
10.491500	41.00	11.9	50	9.0	AV	L1	GND	
MEASUREMENT RESULT: "CQER002_fin"								
2015-7-2 23:40								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.362000	48.00	11.2	59	10.7	QP	N	GND	
0.474000	44.50	11.4	56	11.9	QP	N	GND	
10.586000	48.50	11.9	60	11.5	QP	N	GND	
MEASUREMENT RESULT: "CQER002_fin2"								
2015-7-2 23:40								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.370000	44.00	11.2	49	4.5	AV	N	GND	
0.472000	39.30	11.4	47	7.2	AV	N	GND	
10.676000	38.90	11.9	50	11.1	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are shown in the following pages.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: REMOTE CONTROL M/N:FAN52R-M60
 Manufacturer: Carewell
 Operating Condition: ON
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20151412
 Start of Test: 2015-7-2 / 23:37:45

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

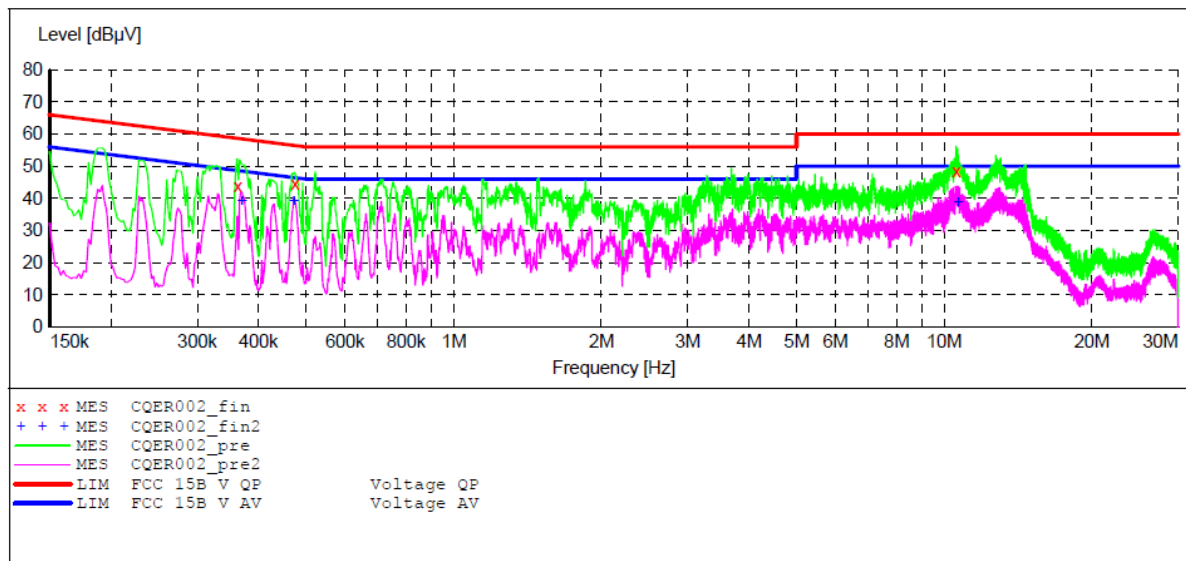

MEASUREMENT RESULT: "CQER002_fin"

2015-7-2 23:40

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.362000	48.00	11.2	59	10.7	QP	N	GND
0.474000	44.50	11.4	56	11.9	QP	N	GND
10.586000	48.50	11.9	60	11.5	QP	N	GND

MEASUREMENT RESULT: "CQER002_fin2"

2015-7-2 23:40

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.370000	44.00	11.2	49	4.5	AV	N	GND
0.472000	39.30	11.4	47	7.2	AV	N	GND
10.676000	38.90	11.9	50	11.1	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: REMOTE CONTROL M/N:FAN52R-M60
 Manufacturer: Carewell
 Operating Condition: ON
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20151412
 Start of Test: 2015-7-2 / 23:44:22

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

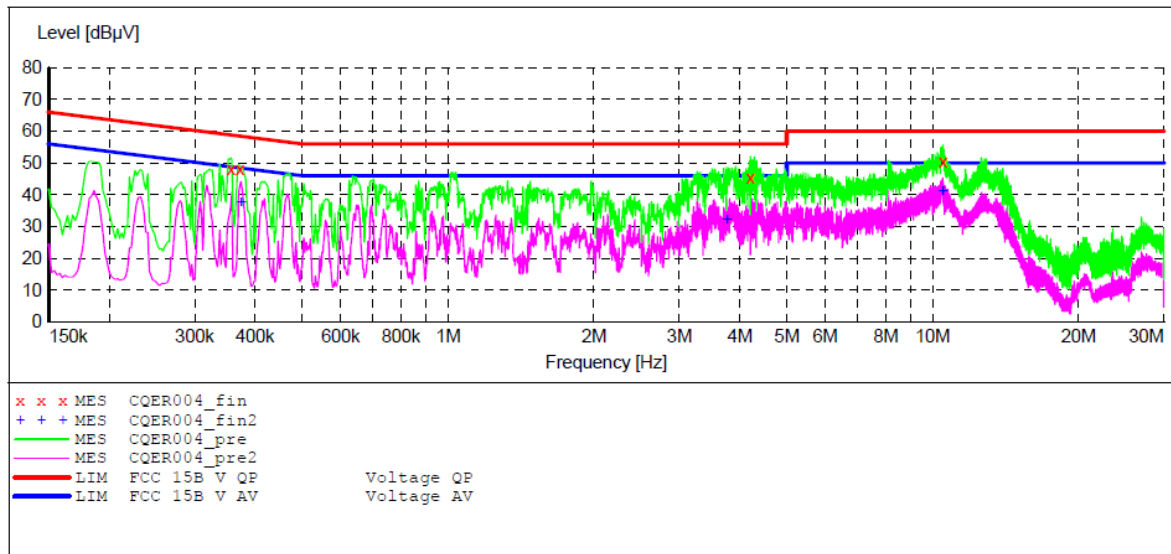

MEASUREMENT RESULT: "CQER004_fin"

2015-7-2 23:47

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.356000	48.30	11.2	59	10.5	QP	L1	GND
0.372000	48.30	11.2	59	10.2	QP	L1	GND
4.209500	45.20	11.8	56	10.8	QP	L1	GND
10.509500	50.60	11.9	60	9.4	QP	L1	GND

MEASUREMENT RESULT: "CQER004_fin2"


2015-7-2 23:47

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.374000	44.20	11.2	48	4.2	AV	L1	GND
3.759500	38.10	11.7	46	7.9	AV	L1	GND
10.491500	41.00	11.9	50	9.0	AV	L1	GND


5. RADIATED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators

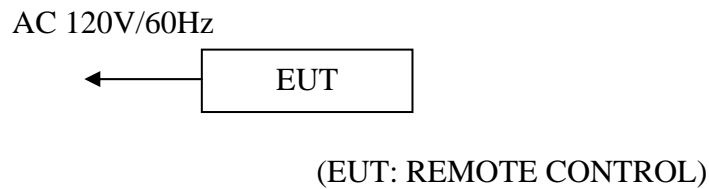

5.1.2. Semi-Anechoic Chamber Test Setup Diagram

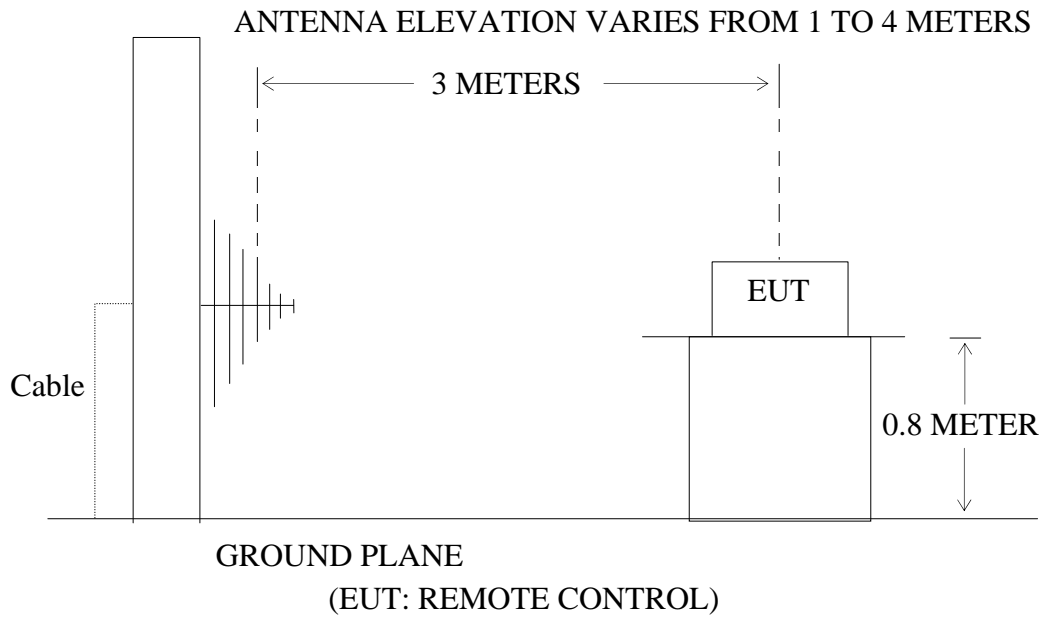

5.2.The Emission Limit For Section 15.109 (a)

5.2.1.Radiation Emission Measurement Limits According to Section 15.109 (a).

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V/m})$
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
960-1000	3	500	54.0

Remark: (1) Emission level $\text{dB}(\mu\text{V}) = 20 \log$ Emission level $\mu\text{V/m}$.
 (2)The smaller limit shall apply at the cross point between two frequency bands.
 (3)Distance is the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

5.3.EUT Configuration on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.REMOTE CONTROL

Model Number: FAN52R-M60

Serial Number: N/A

Manufacturer: Carewell Electric Technology (Zhongshan) Co.,Ltd.

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 4.2.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in test mode (Rx) and measure it.

5.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2014 on radiated emission measurement.

The bandwidth of the EMI test receiver (R&S ESCS30) is set at 120kHz from

30MHz to 4000MHz.

The frequency range from 30MHz to 4000MHz is checked.


5.6.Radiated Emission Noise Measurement Result

PASS.

Model Number: FAN52R-M60								
Test mode: RX								
Horizontal	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	118.9284	55.01	-21.30	33.71	43.50	-9.79	QP
	2	295.4623	56.63	-16.35	40.28	46.00	-5.72	QP
	3	315.8599	57.10	-15.91	41.19	46.00	-4.81	QP
Vertical	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	32.8697	51.23	-17.21	34.02	40.00	-5.98	QP
	2	120.1888	60.70	-21.34	39.36	43.50	-4.14	QP
	3	150.4953	62.67	-22.27	40.40	43.50	-3.10	QP
ABOVE1G								
Horizontal	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	3369.455	45.00	-4.94	40.06	54.00	-13.94	peak
	2	3369.455	34.67	-4.94	29.73	54.00	-24.27	AVG
Vertical	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	3793.531	43.50	-3.79	39.71	54.00	-14.29	peak
	2	3793.531	33.54	-3.79	29.75	54.00	-24.25	AVG

Job No.: star2015 #1086	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/07/02
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13:51:35
EUT: REMOTE CONTROL	Engineer Signature:
Mode: ON	Distance: 3m
Model: FAN52R-M60	
Manufacturer: Carewell	

Note: Report No.:ATE20151412

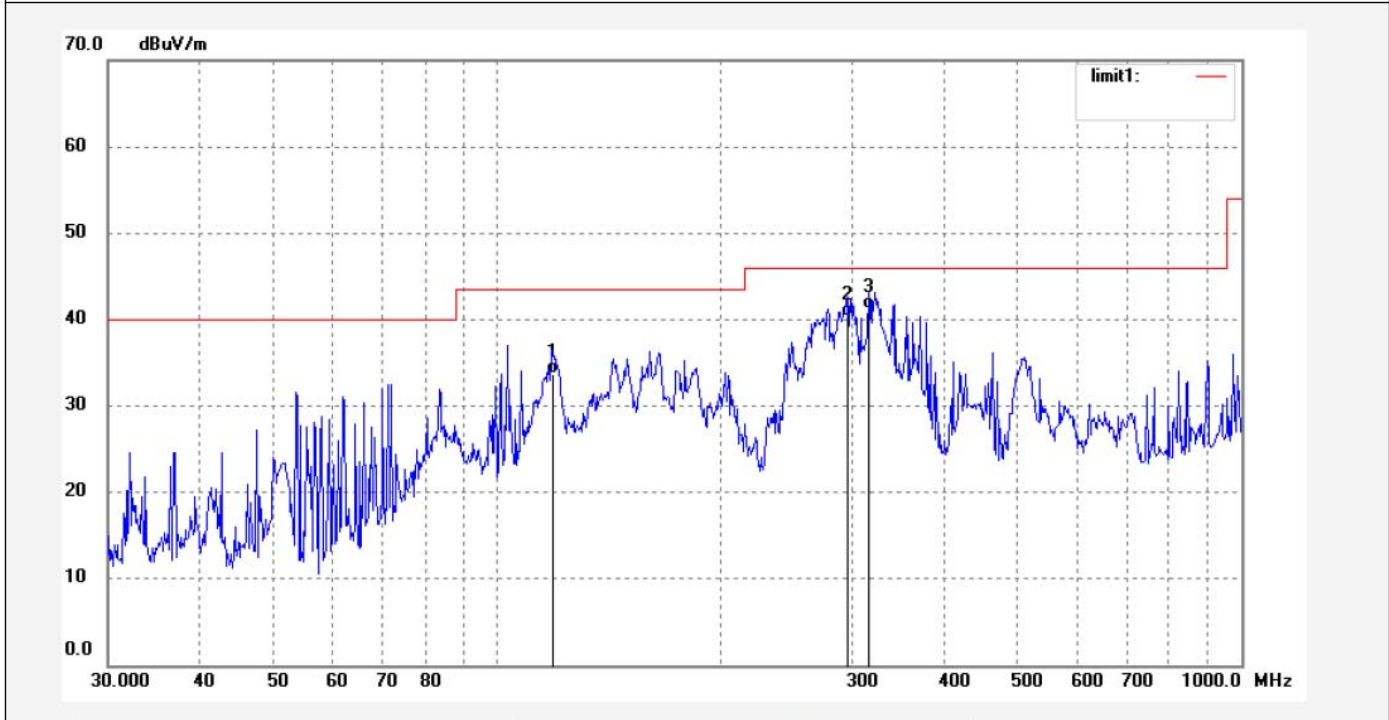


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	118.9284	55.01	-21.30	33.71	43.50	-9.79	QP			
2	295.4623	56.63	-16.35	40.28	46.00	-5.72	QP			
3	315.8599	57.10	-15.91	41.19	46.00	-4.81	QP			

Job No.: star2015 #1087
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: REMOTE CONTROL
 Mode: ON
 Model: FAN52R-M60
 Manufacturer: Carewell

Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 2015/07/02
 Time: 13:53:48
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20151412

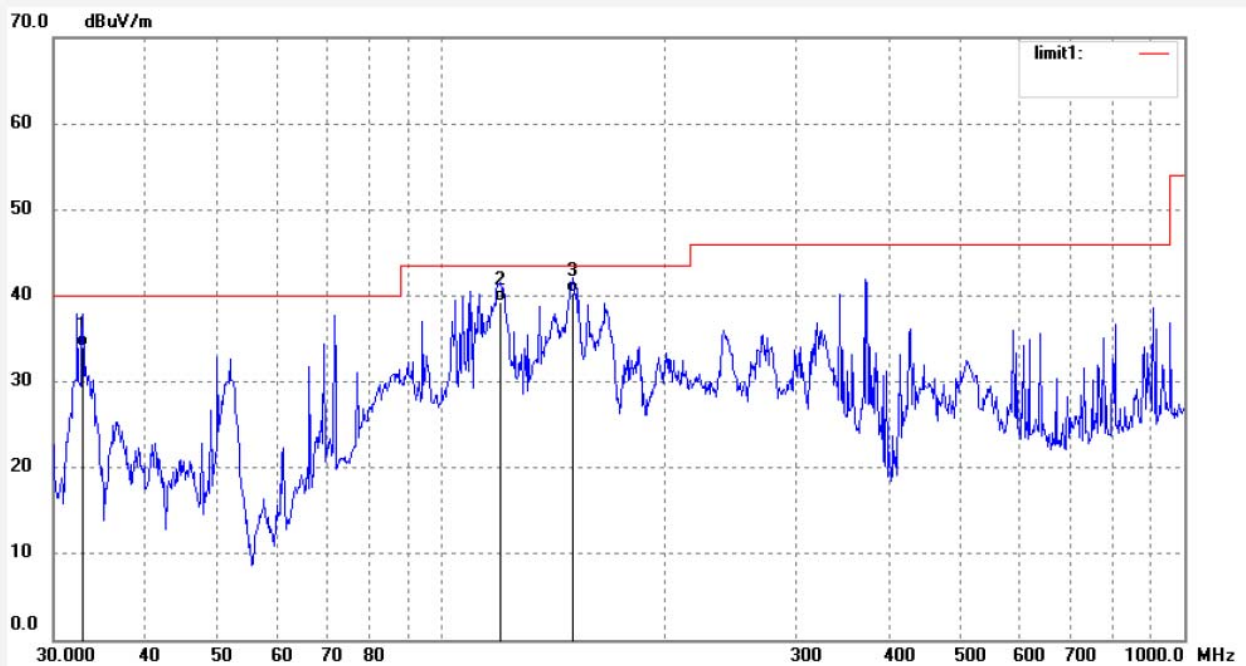

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.8697	51.23	-17.21	34.02	40.00	-5.98	QP			
2	120.1888	60.70	-21.34	39.36	43.50	-4.14	QP			
3	150.4953	62.67	-22.27	40.40	43.50	-3.10	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2015 #1088	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/07/02
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13:57:52
EUT: REMOTE CONTROL	Engineer Signature:
Mode: ON	Distance: 3m
Model: FAN52R-M60	
Manufacturer: Carewell	

Note: Report No.:ATE20151412

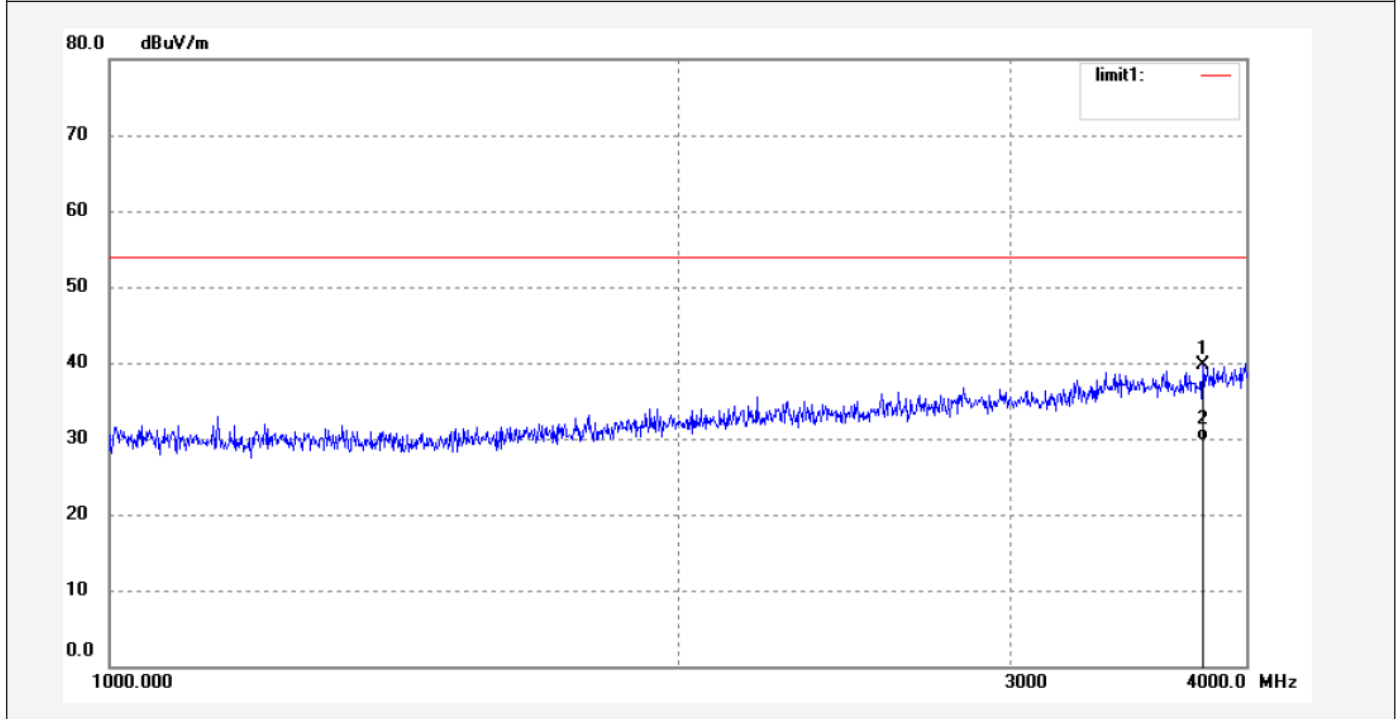

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3793.531	43.50	-3.79	39.71	54.00	-14.29	peak			
2	3793.531	33.54	-3.79	29.75	54.00	-24.25	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2015 #1089
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: REMOTE CONTROL
Mode: ON
Model: FAN52R-M60
Manufacturer: Carewell

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2015/07/02
Time: 13:58:21
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20151412

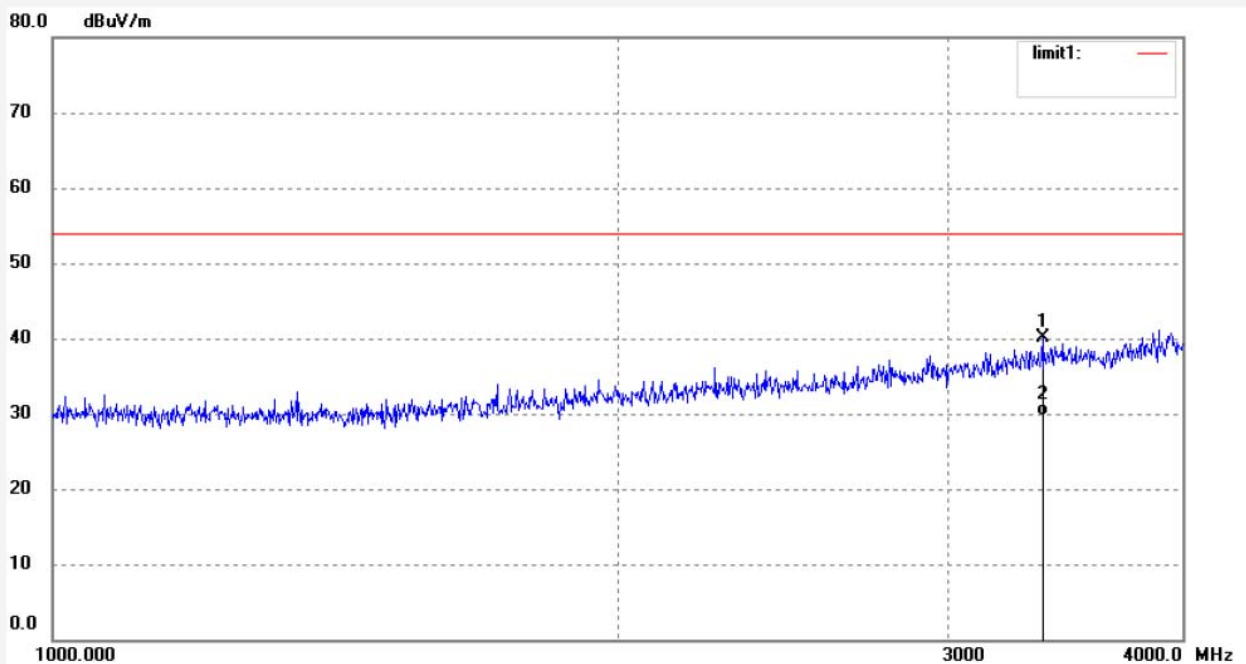

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3369.455	45.00	-4.94	40.06	54.00	-13.94	peak			
2	3369.455	34.67	-4.94	29.73	54.00	-24.27	AVG			