

FCC PART 15.231
EMI MEASUREMENT AND TEST REPORT

For

Shenzhen Highstar Electrical Co.,Ltd

Building 6, Highstar Industrial zone, Gangtou, Bantian Street,Longgang District,ShenZhen

FCC ID:2AAZRHSD7730BT

April. 15, 2014

This Report Concerns: Original Report	Equipment Type: Remote weather station alarm
Test Engineer:	Lisa Chen <i>Lisa Chen</i>
Report No.:	BSL14030425Y-1ER-3
Receive EUT Date/Test Date:	March. 21, 2014 / March. 21-April.15, 2014
Reviewed By:	Sky Zhang <i>Sky Zhang</i>
Prepared By:	BSL Testing Co.,LTD. NO. 24, ZH Park, Nantou, Shenzhen, 518000 China Tel: 86- 755-26508703 Fax: 86- 755-26508703

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of BSL Testing Co.,LTD.
This report must not be used by the client to claim product certification,approval,or
endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	3
1.1.	Report information	3
1.2.	Measurement Uncertainty	3
2.	PRODUCT DESCRIPTION	4
2.1.	EUT Description	4
2.2.	Block Diagram of EUT Configuration.....	5
2.3.	Support Equipment List	5
2.4.	Test Conditions	5
3.	TEST RESULTS SUMMARY	6
	Modifications	6
4.	TEST EQUIPMENT USED	7
5.	ANTENNA REQUIREMENT	8
5.1.	Standard Applicable.....	8
5.2.	Antenna Connected Construction	8
5.3.	Result	8
6.	CONDUCTED POWER LINE TEST	9
6.1.	Test Equipment	9
6.2.	Test Procedure	9
6.3.	Test Setup.....	9
6.4.	Conducted Power line Emission Limits.....	9
6.5.	Conducted Power Line Test Result.....	10
7.	RADIATED EMISSION TEST	11
7.1.	Test Equipment	11
7.2.	Test Procedure	11
7.3.	Radiated Test Setup	11
7.4.	Radiated Emission Limit.....	13
7.5.	Radiated Emission Test Result	15
8.	20DB OCCUPIED BANDWIDTH	19
8.1.	Test Equipment	19
8.2.	Test Procedure	19
8.3.	FCC 15.231(c) 20dB Bandwidth Limit.....	19
8.4.	Test Result	20
9.	DEACTIVATION TESTING.....	21
9.1.	Test Equipment	21
9.2.	Test Procedure	21
9.3.	Deactivation Testing Requirement	21
9.4.	Test Result	22

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BSL approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BSL in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BSL therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BSL, unless the applicant has authorized BSL in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of BSL Testing Co.,LTD.

(FCC Registered Test Site Number: 191509) on

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

The Test Site is constructed and calibrated to meet the FCC requirements.

1.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	+/-1.25dB
2	RF Power, Conducted	+/-0.20dB
3	Spurious emissions, conducted	+/-0.33dB
4	All emissions, radiated (<1G)	+/-3.47dB
5	All emissions, radiated (>1G)	+/-3.82dB
6	Temperature	+/-0.5°CdB
7	Humidity	+/-2%

2. PRODUCT DESCRIPTION

2.1. EUT Description

Description	: Remote weather station alarm
Trade Name	: HIGHSTAR
Applicant	: Shenzhen Highstar Electrical Co.,Ltd Building 6, Highstar Industrial zone, Gangtou, Bantian Street,Longgang District,ShenZhen
Manufacturer	: Shenzhen Highstar Electrical Co.,Ltd Building 6, Highstar Industrial zone, Gangtou, Bantian Street,Longgang District,ShenZhen
Model Number	: HSD7730B
Modulation type	: ASK
Antenna gain	: 1dBi
Frequency	: 433.878MHz
Number of Channels	: 1 Channel
Power Supply	: DC 3V battery (The new battery is used during the measurement)

2.2. Block Diagram of EUT Configuration



2.3. Support Equipment List

Name	Model No	S/N	Manufacturer	Used (Y/N)

2.4. Test Conditions

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-25
Humidity (%RH)	25-75	50-63
Barometric pressure (mbar)	860-1060	950-1000

3. TEST RESULTS SUMMARY

Standard Section	Test Item	Judgment
15.207	Conducted Emission	N/A
15.203	Antenna Requirement	Pass
15.231b,e	Radiated Spurious Emission	Pass
15.231c	Occupied Bandwidth	Pass
15.231a,e	Deactivation Testing	Pass

Remark: "N/A" means "Not applicable".

Statement: All testing was performed using the test procedures found in ANSI C63.4-2003.

Modifications

No modification was made.

4. TEST EQUIPMENT USED

EQUIPMENT/FACILITIES	MANUFACTURER	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERVAL
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	Aug. 23 2013	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCI3	BSL001	Sep. 28 2013	1 Year
BiConiLog Antenna	Rohde & Schwarz	HL562	BSL009	Sep. 28 2013	1 Year
Double -ridged waveguide horn	Rohde & Schwarz	9120D	BSL008	Aug. 27 2013	1 Year
Horn Antenna	ETS-LINDGREN	3160	BSL072	Dec. 28 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL045	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL046	Aug. 27 2013	1 Year
Cable	Rohde & Schwarz	N/A	BSL047	Aug. 27 2013	1 Year
Amplifier(100kHz-40G Hz)	R&S	SMR40	BSL007	Sep. 28 2013	1 Year
Band filter	Amindeon	82346	BSL049	Aug. 27 2013	1 Year
Active Loop Antenna	EMTES	EM15	BSL011	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
Spectrum analyzer	Rohde & Schwarz	FSP40	BSL049	Sep. 28 2013	1 Year
Shielding Room	zhongyu Electron	7.0(L)x3.0(W)x3.0(H)	BSL085	Sep. 28 2013	1 Year
EMI Test Receiver	R&S	ESPI	BSL002	Sep. 28 2013	1 Year
10dB Pulse Limita	R&S	N/A	BSL003	Sep. 28 2013	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2013	1 Year
LISN	Rohde & Schwarz	ESH3-Y5	BSL005	Sep. 28 2013	1 Year
Coaxial Cable	YUANFANG	N/A	BSL048	Aug. 27 2013	1 Year
EMI TEST SOFTWARE	AUDIX	E3	N/A	N/A	N/A

5. ANTENNA REQUIREMENT

5.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2. Antenna Connected Construction

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The antenna used in this product is Spring antenna. The antenna is permanently attached. Refer to the product photo.

5.3. Result

Compliance

6. CONDUCTED POWER LINE TEST

6.1. Test Equipment


Please refer to section 4 this report.

6.2. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uh coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uh coupling impedance with 50ohm termination.

Both sides of A.C. Line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ASIN C63.4:2003 on conducted measurement. Conducted emissions were measured over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

6.3. Test Setup

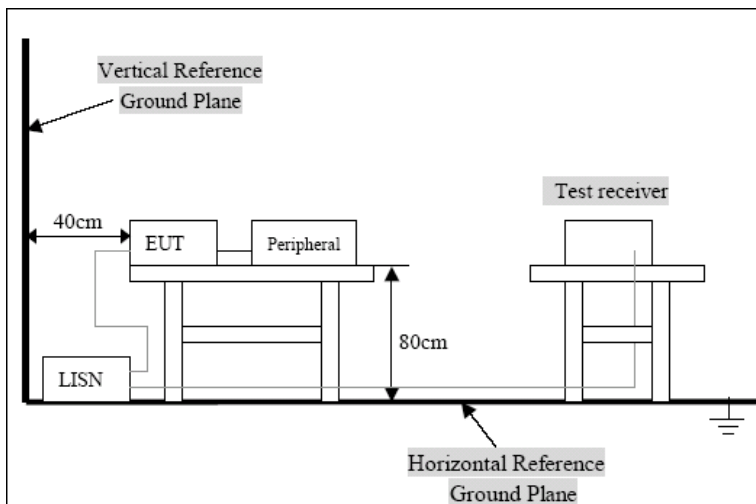

For the actual test configuration, please refer to the related items-Photos of testing

6.4. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHZ)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	65-56/56-46
0.5-5.0	73/60	56-46
5.0-3.0	73/60	60-50

Note: In the above table, the tighter limit applies at the band edges.

6.5. Conducted Power Line Test Result

Note: It is powered by the battery,Conduction emission test is not applicable.

7. RADIATED EMISSION TEST

7.1. Test Equipment

Please refer to section 4 this report.

7.2. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level.

Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.


The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.


Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit. And Y direction is worst mode

7.3. Radiated Test Setup


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

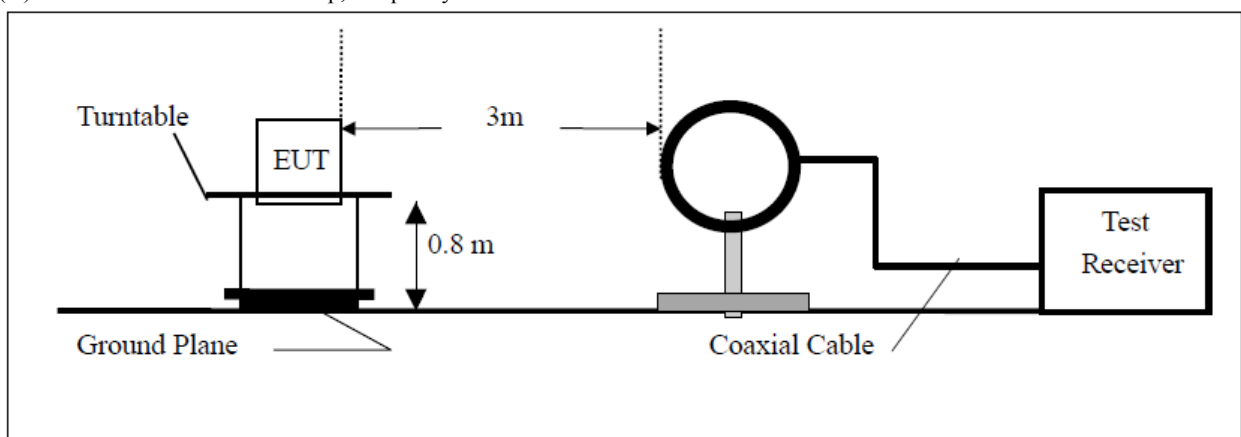

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

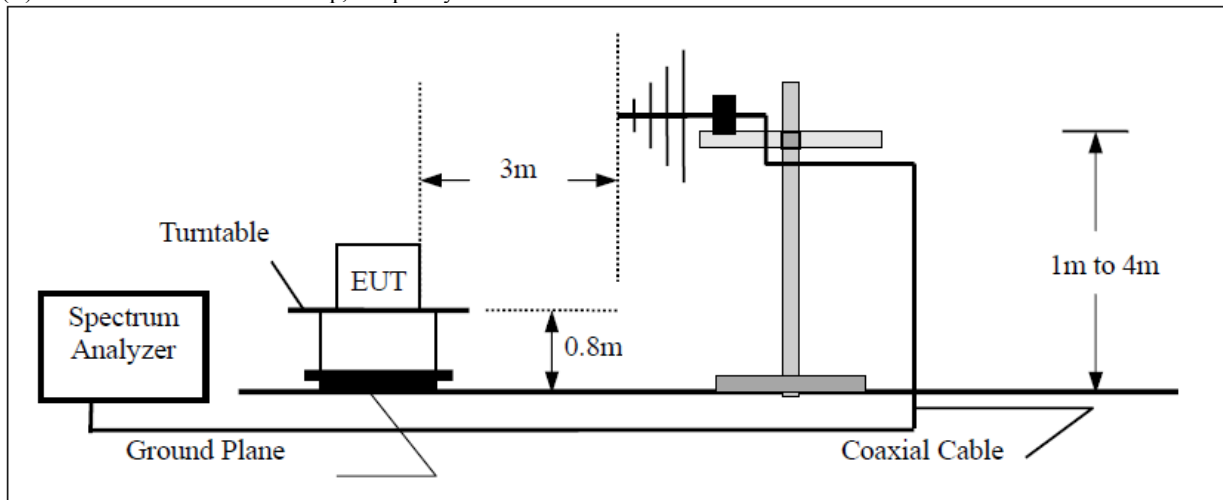

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

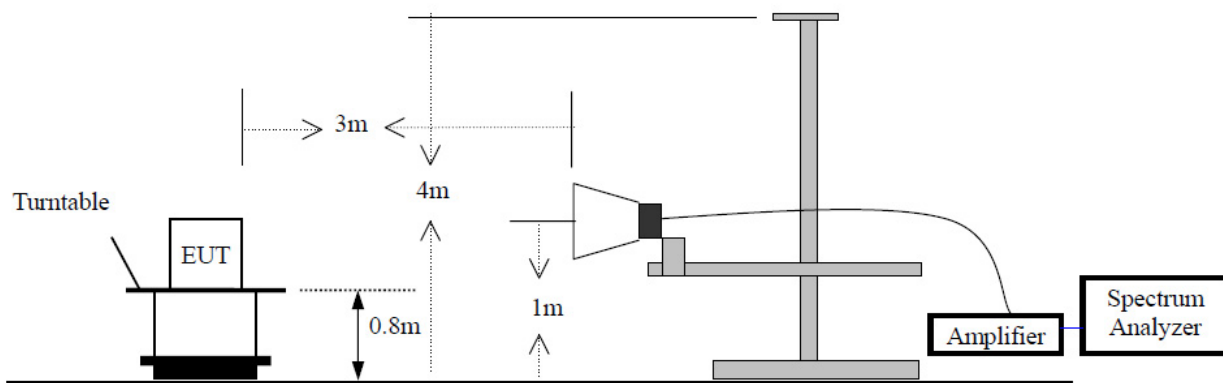

7.4. Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

A. Fundamental and Harmonics Radiated Emissions FCC 15.231(b) Limit

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	2250.00	225.00
70 - 130	1250.00	125.00
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3750.00	375.00
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12500.00	1250.00

B. Fundamental and Harmonics Radiated Emissions FCC 15.231(e) Limit

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	1000	100
70 - 130	500	50
130 - 174	500-1500	50-150
174 - 260	1500	150
260 - 470	1500-5000	150-500
Above 470	5000	500

Note:

- (1) RF Voltage (dBuV) = 20 log Voltage (uV)
- (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

C. Spurious Radiated Emissions.

Frequency (MHz)	Limit			The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB μ V/m)	Measurement distance (m)	
0.009 - 0.490	2400/F(kHz)	/	300	
0.490 - 1.705	24000/F(kHz)	/	30	
1.705-30	30	29.5	30	
30 - 88	100	40	3	
88 - 216	150	43.5	3	
216 - 960	200	46	3	
Above 960	500	54	3	

Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)

(2) In the Above Table,the tighter limit applies at the band edges.


(3) Distaqnce refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.5. Radiated Emission Test Result

Pass


1.

The period time

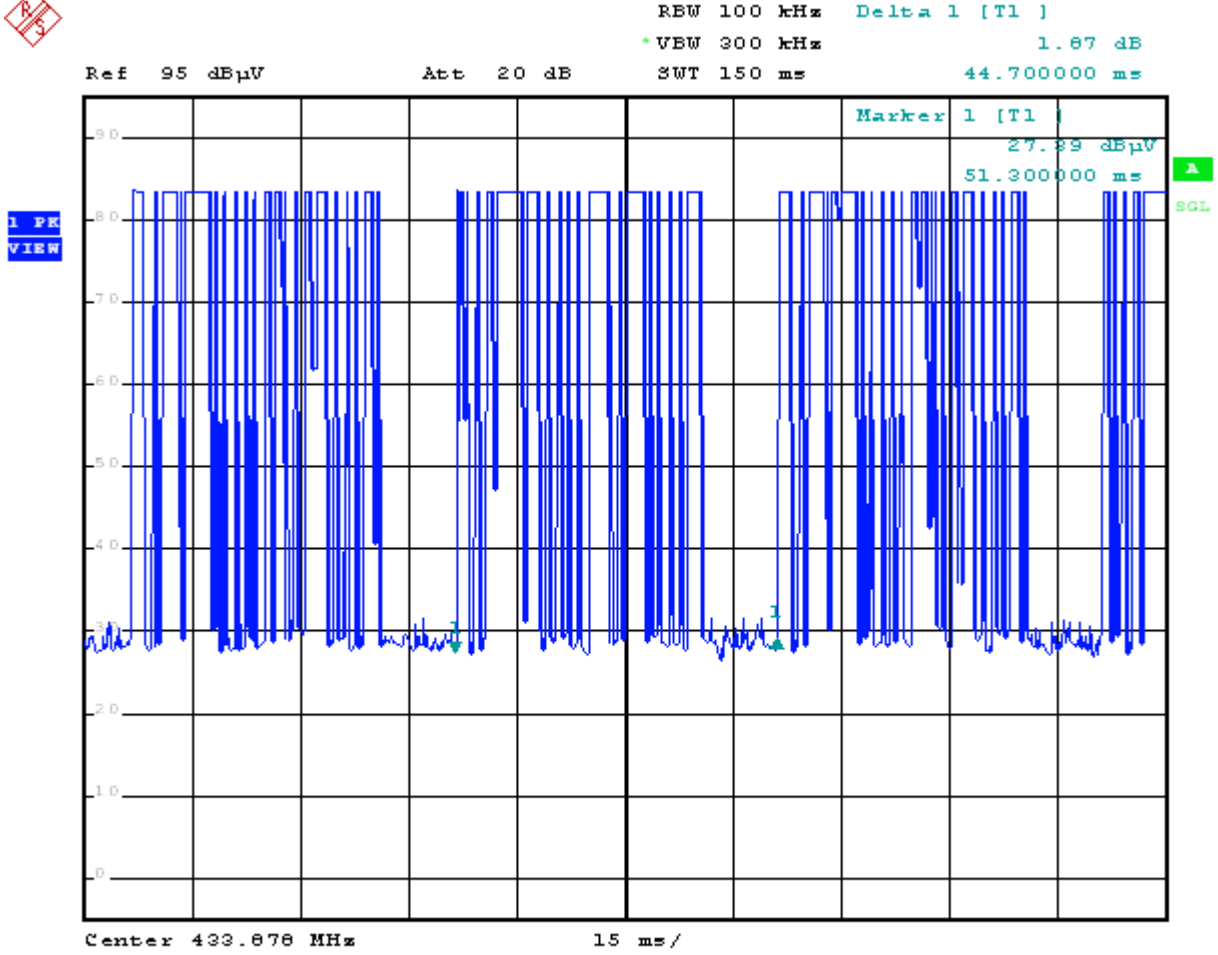


Date: 26.MAR.2014 01:56:26

long signal and short signal time

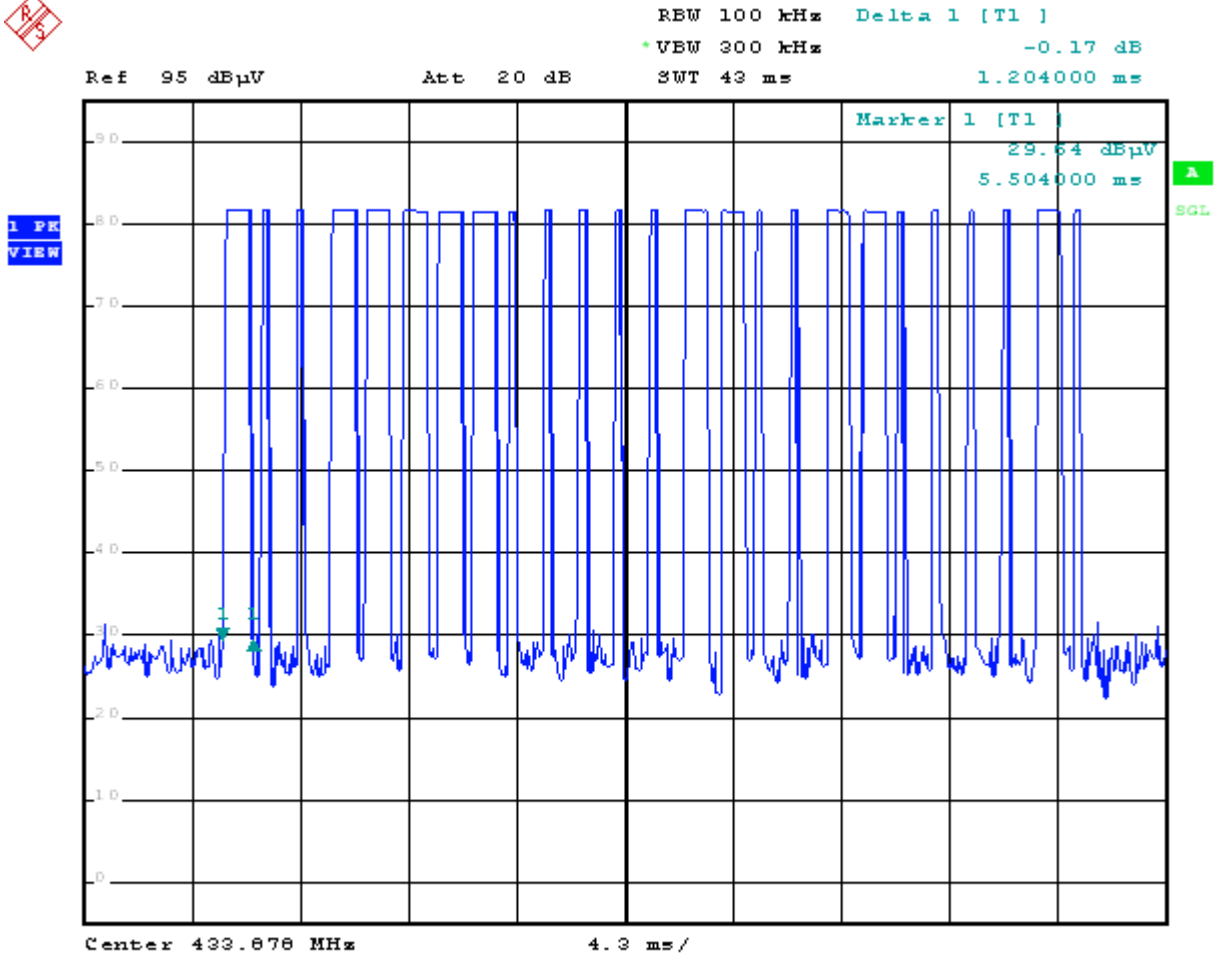

Date: 26.MAR.2014 01:59:24

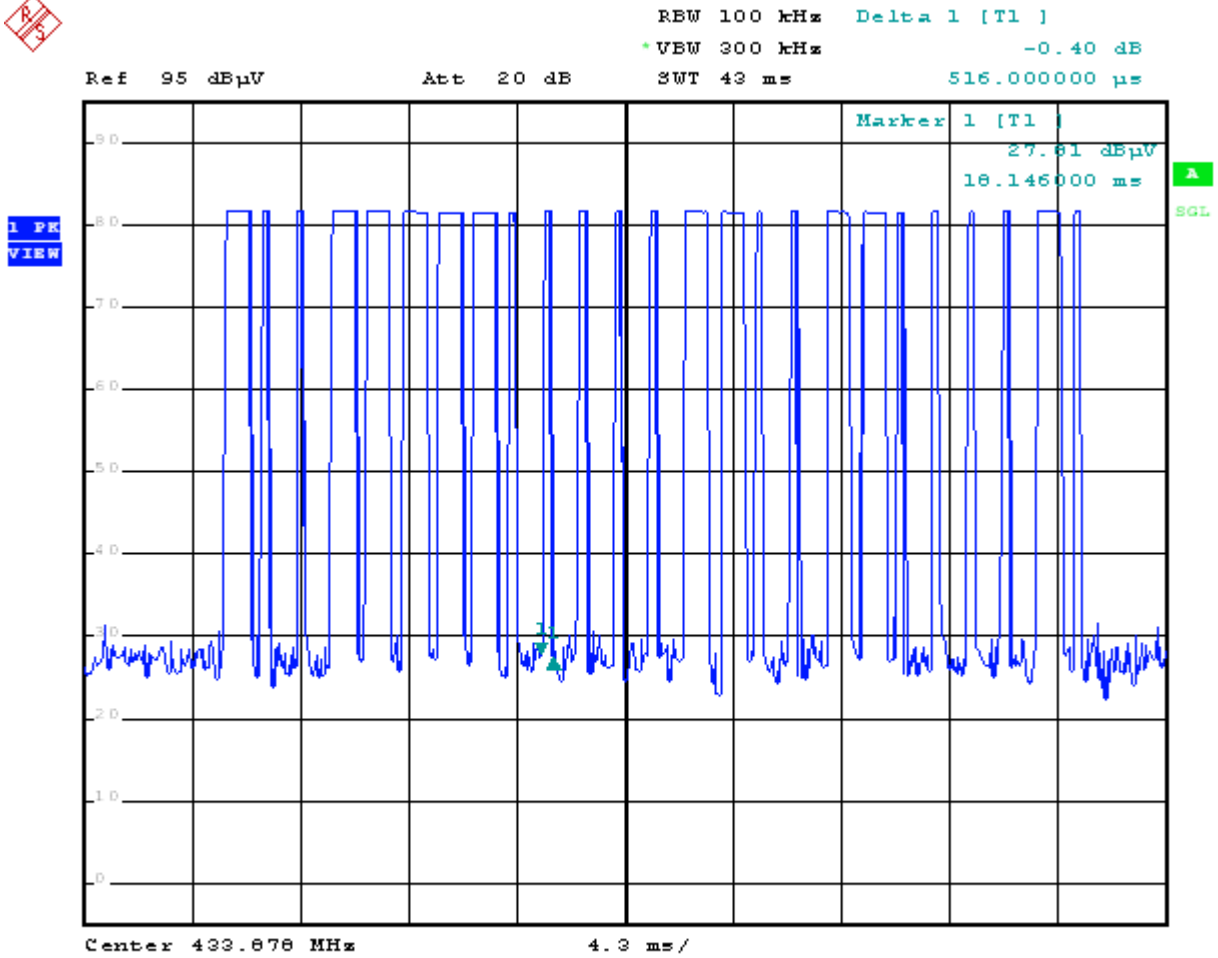

Date: 26.MAR.2014 02:00:37

The period time =44.7ms
 Ton1=1.204ms
 Ton2=0.516 ms
 Ton of The period time = 1.204 *11ms +0.516*14 ms=20.468ms
 The duty cycle = Ton / The period time =20.468ms/ 44.7ms=0.458 ms
 Therefore, the average factor is found by 20log (The duty cycle) =20log (0.458)= -6.78dB

Note: The relevant operational modes of this EUT are already performed, and only the worst evaluated results are recorded in this report.

Radiated Emissions Data

Test Result:PASS

For below 9kHz-30MHz Spurious

Freq. (MHz)	Emission(dBuV/m) PK / AV	Limits(dBuV/m) PK / AV	Margin (dB)
-	-	-	-
-	-	-	-

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The relevant operational modes of this EUT are already performed, and only the worst evaluated results are recorded in this report.

For 30M-5GHz Spurious

Frequency (MHz)	Average Factor	Result (dBμV/m)		Limit (dBμV/m)		Margin(dB)		Polarization
	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
433.878	--	73.45	80.23	80.8	100.8	-7.35	-20.57	Vertical
867.756	--	45.69	52.47	60.8	80.8	-15.11	-28.33	
*1301.634	--	43.74	50.52	54.0	74.0	-10.26	-23.48	
1735.512	--	38.58	45.36	60.8	80.8	-22.22	-35.44	
2169.390	--	39.65	46.43	60.8	80.8	-21.15	-34.37	
433.878	--	74.45	81.23	80.8	100.8	-6.35	-19.57	Horizontal
867.756	--	48.14	54.92	60.8	80.8	-12.66	-25.88	
*1301.634	--	44.58	51.36	54.0	74.0	-9.42	-22.64	
1735.512	--	39.75	46.53	60.8	80.8	-21.05	-34.27	
2169.390	--	40.12	46.90	60.8	80.8	-20.68	-33.9	

NOTE:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. FCC Limit for Average Measurement = $41.6667(433.9)-7083.3333 = 10995.85\mu\text{V/m} = 80.8\text{dB}\mu\text{V/m}$
4. PK results are lower than the AV limit, the AV measurement and Duty Cycle evaluation is not required So the AV results is compliance
5. The relevant operational modes of this EUT are already performed, and only the worst evaluated results are recorded in this report.

8. 20DB OCCUPIED BANDWIDTH

8.1. Test Equipment

Please refer to Section 4 this report.

8.2. Test Procedure

1. The EUT was tested according C63.4-2003. The radiated test was performed at FCC Registration laboratory.
2. With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

8.3. FCC 15.231(c) 20dB Bandwidth Limit

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Therefore, the bandwidth of the emission limit is $433.878\text{MHz} \times 0.25\% = 1.085\text{MHz}$. Bandwidth is determined at the points 20 dB down from the modulated carrier.


8.4. Test Result

Temperature : **25°C** Humidity: 55%RH
 Limit = 433.878MHz*0.25% = 1.085MHz
 Test data: 128 kHz Test Result: **PASS**



*RBW 30 kHz Marker 1 [T1]
 *VBW 100 kHz 84.05 dBμV
 Ref 95 dBμV Att 20 dB SWT 2.5 ms 433.876000000 MHz

1 PK
VIEW

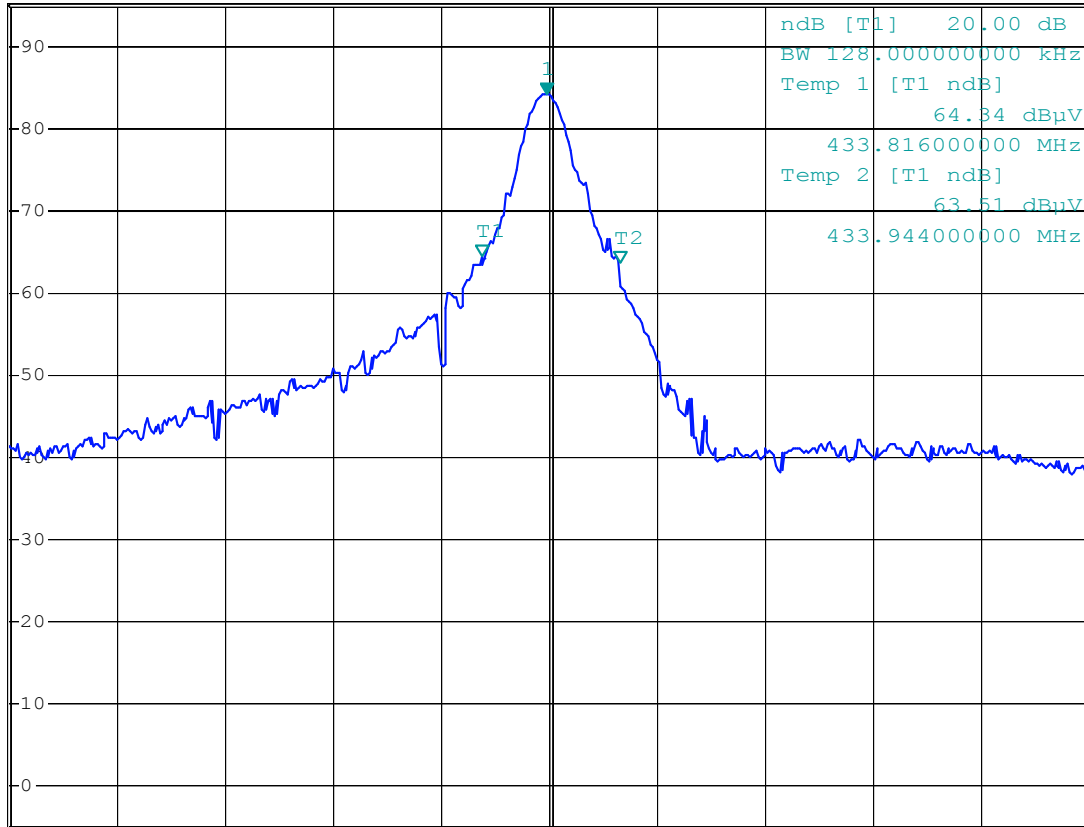

A

Center 433.878 MHz 100 kHz/ Span 1 MHz

Date: 26.MAR.2014 01:46:24

9. DEACTIVATION TESTING

9.1. Test Equipment

Please refer to Section 5 this report.

9.2. Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Set center frequency=433.878MHz

Set SPAN=0Hz

Set RBW=100kHz

Set VBW=300kHz

Set SWEET TIME>5s

And

Set center frequency=433.878MHz

Set SPAN=0Hz

Set RBW=100kHz

Set VBW=300kHz

transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds

9.3. Deactivation Testing Requirement

Per 15.231(a) (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Per 15.231(e) devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds

9.4. Test Result

Temperature: **25°C**

Humidity: 55%RH


The transmitter transmitting time not more than 5 seconds

Test time: 437.5ms

Test Result: **PASS**



Ref 95 dBµV Att 20 dB RBW 100 kHz Marker 1 [T1]
 *VBW 300 kHz 30.99 dBµV
 SWT 5 = 1.272500 =

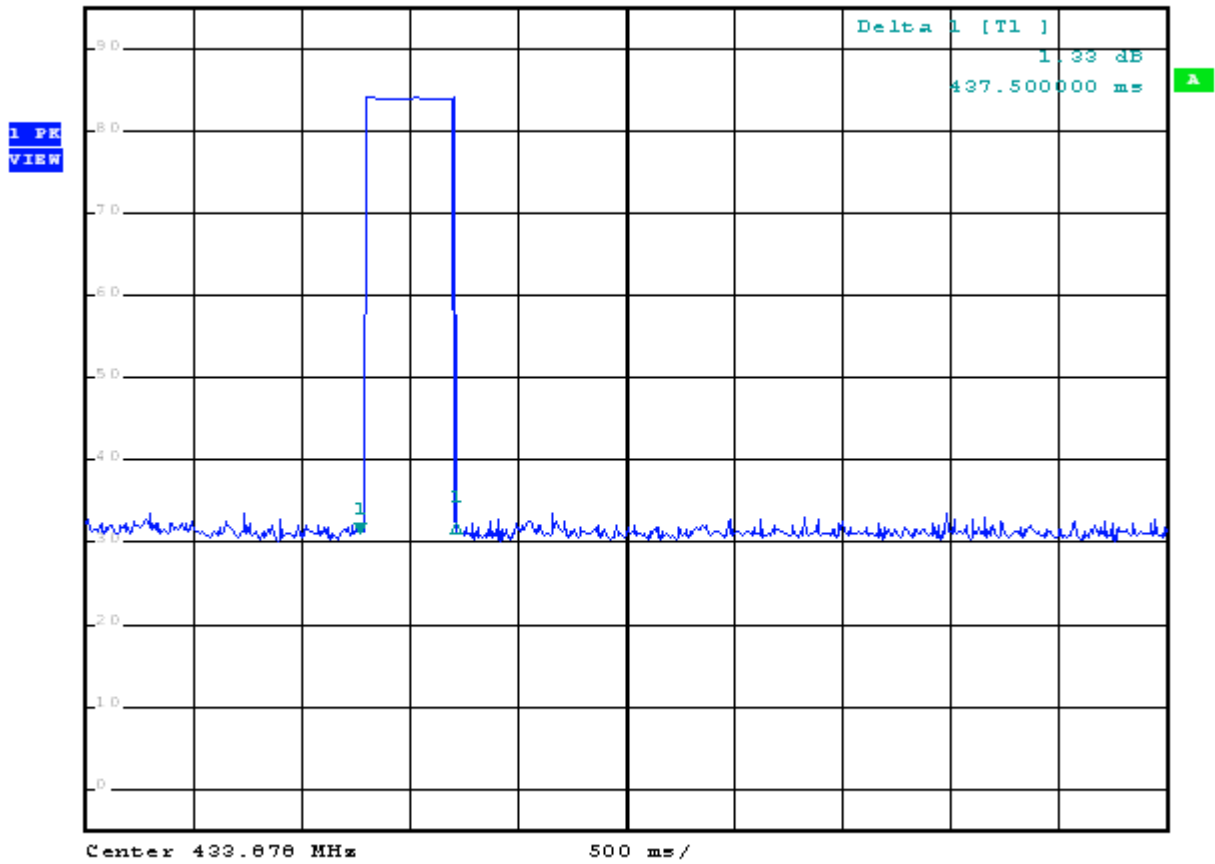

Date: 26.MAR.2014 01:51:16

End Of The Report