




SKU# 1000 000 000
Model# HLNHB270-NP09BM

USE AND CARE GUIDE

ROUND LED HIGH BAY FIXTURE

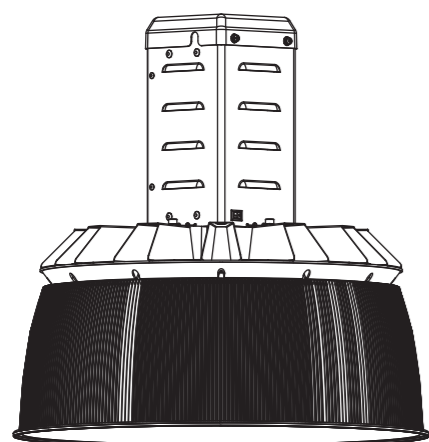

Questions, problems, missing parts? Before returning to the store, call Commercial Electric Customer Service 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

THANK YOU

We appreciate the trust and confidence you have placed in Commercial Electric through the purchase of this Round LED High Bay. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Commercial Electric!

Table of Contents

Table of Contents	2	Pre-Installation	3
Safety Information	2	Tools Required	3
Warranty	3	Hardware Included	3
Electrical Ratings	3	Installation	4-6

Safety Information

For your safety, always remember to:

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.
- Account for small parts and destroy packing material, as these may be hazardous to children.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.

WARNING: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: MIN 75°C SUPPLY CONDUCTORS.

CAUTION: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

NOTICE: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

ISED STATEMENT

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. Cet appareil est conforme avec Industrie Canada RSS exemptes de licence standard(s). Son fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne peut pas provoquer d'interférences, et (2) cet appareil doit accepter toute interférence, y compris celles pouvant causer un mauvais fonctionnement de l'appareil. This Class B digital apparatus complies with Canadian ICES-005 Cet appareil numérique de la classe B est conforme à la norme NMB-005 du Canada.

Installation (continued)

5 Attaching the hook/boom adapter to the Fixture

- Install the hook(F)/boom adapter(E) with washer and screw nut. Need to use wrench to lock tight of screw nut.

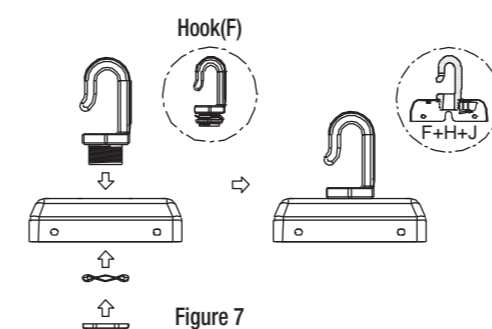


Figure 7

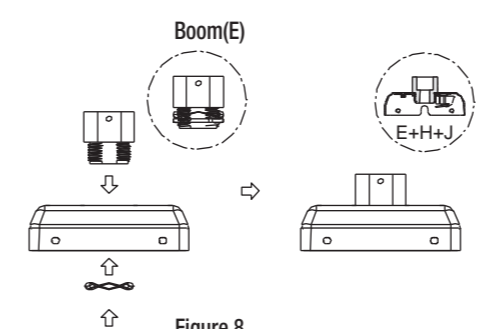


Figure 8

6 Installing the rear cover back to fixture

- Lock with screws.

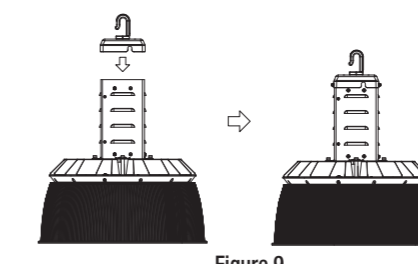


Figure 9

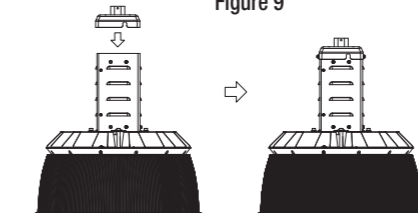


Figure 10

7 Attaching fixture to the ceiling

- Hook: After hook in the ceiling, please lock the hook with screw.
- Boom adapter: Lock the boom with screw (J).
- Note: The distance between light fixture and ceiling must at least 1.97 in.

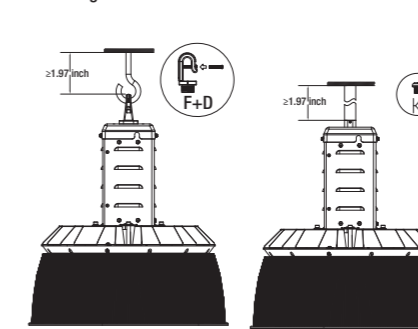


Figure 11

Features To Motion Sensor

1 Motion Sensor On/Off Setting

- Control the sensor by the on/off switch. Press the button "o" then the sensor on, press the button "o" then the sensor off.




Figure 12

2 Detection Range

- Under the ideal mounting height of 24ft-35ft (suspension mount only), the detects motion up to 39ft.

3 How The Motion sensor Work

- The sensor detects the motion by microwave. The fixture light up when detects the motion, after the hold time the light off.

4 Hold Time

- The time period the light will be ON after the last detection is 15 minutes.

5 Sensor Technical Data

Operating voltage	120-277 VAC 50/60Hz
Switching capacity	Electronic/magnetic ballast, 120V, 50/60Hz, 3A;
Standby power	<1W
Detection area	10%/50%/75%/100%
Hold-time	5s/90s/5min/15min
Daylight threshold	2Lux/10Lux/50Lux/Disable
Microwave frequency	5.815GHz
Microwave power	<0.3mW
Interfaces	4-pole pluggable clamp terminal(L,N,N, L')for 1.5mm ² cable
Mounting height	Max.6m(ceiling mounted),Max.3m(wall mounted)
Detection range	Max.14m6m(ceiling mounted),Max.10m(wall mounted)
Operating temperature	-20°C~+60°C
IP rating	IP20
Size	80.2X36.6X23mm
Certificate	cULus listed,FCC

Warranty

LIMITED WARRANTY


This product is warranted to be free from defects in workmanship and materials for up to 5 years from date of purchase. If it fails to do so, please contact the Customer Service Team at 1-877-527-0313 or visit www.HomeDepot.com.

Electrical Ratings

Volts (V)	Frequency (HZ)	Watts (W)	Current (mA)	Color Temperature (K)	Lumen (lm)	Life (Hrs)
120-277	60	270	2300	5000	30000	60000


Pre-Installation

TOOLS REQUIRED

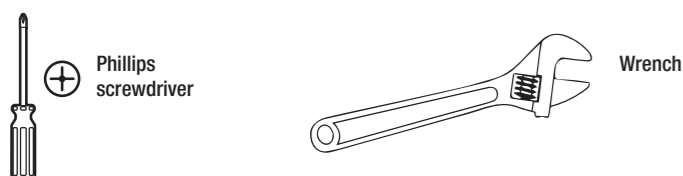

HARDWARE INCLUDED

NOTE: Hardware not shown to actual size.

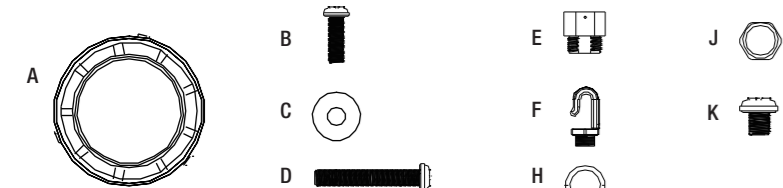

Part	Description	Quantity
A	cover	1
B	screw (M4X16)	3
C	flat washer (M4)	3
D	Screw (M4X25)	1
E	Boom Adapter	1

Part	Description	Quantity
F	Hook	1
H	Wave washer	1
J	Nut (3/4"-14)	1
K	Screw bolt (M4X6)	1

Installation

1 Disassemble the package and take the fixture out

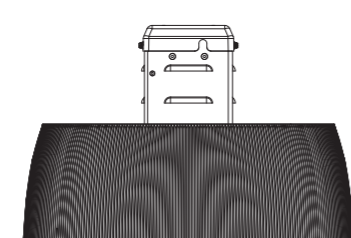


Figure 1

2 Attaching the Cover(A) to Fixture

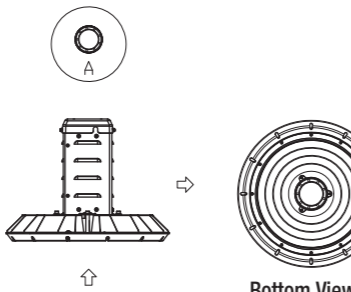


Figure 2

3 Screwing the shroud to the fixture

- Make sure mounting holes in the fixture align with three holes in the shroud. Screw the mounting screws(B) and washer (C) with washer (C) as picture.

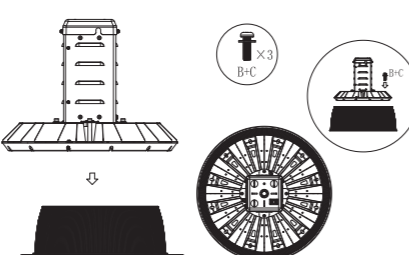


Figure 3

4 Connect the electrical wires from the power supply to the LED high bay fixture power supply, and 0-10V dimmer.

- Remove the rear cover from fixture as picture (Figure 3). Use a screw driver to open the knockout.
- Connect the live, neutral and ground wires through tube from power supply circuit to the terminal (L-Black, G-Green, N-White), lock the wires by screw driver (Figure 5).

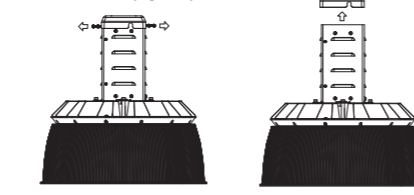


Figure 4

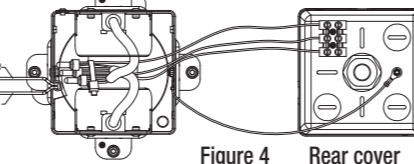


Figure 5


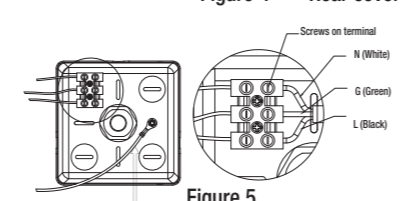


Figure 6

- When making connections, please do keep the ground wire locking tight in the terminal as arrow shows. Note: The terminal could only accept solid wire or strand wire with braid copper end.
- 0-10V dimmer connection: Connect the two 0-10V dimming wires (Purple+ and gray-) through knockout and connect with compatible 0-10V dimmer (Figure 6). See 0-10V dimming schematic on page 6.

0-10V Dimming Schematic

REMARK: Please reference the dimmers manufacturer wiring diagrams for correct wiring of 0-10 Volt Dimmer.

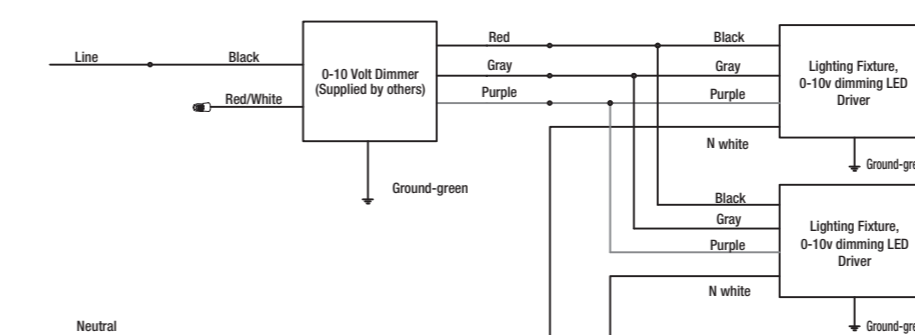

WARNING: Refer to Local and National Electrical codes for correctly sizing wire gauge and making the proper electrical connections and ground connections to prevent electrical shock and risk of fire. Installation requires knowledge of luminaires and electrical systems. If not qualified, do not attempt installation. Contact a qualified licensed electrician, to ensure wiring is correct and in compliance of local codes.

FCC compliance information is listed as below:
Responsible party: Leedarsen America, Inc.
Responsible party address: 300 Technology Court SE Suite 100, Smyrna, GA 30082
Telephone number: (678) 293-8382