

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

INDOOR CAMERA, OUTDOOR CAMERA

MODEL NUMBER: SCS11X, SCW11X

REPORT NUMBER: 4791354637-1-RF-1

FCC ID: 2AB2Q-SCS11X

ISSUE DATE: June 15, 2024

Prepared for

LEEDARSON LIGHTING CO., LTD

**Xingtai Industrial Park, Economic Development Zone of Changtai County,
Zhangzhou City, Fujian.**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 15, 2024	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>10</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>11</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED	12
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>15</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i>	<i>16</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>18</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i>	<i>20</i>
7.5. <i>DUTY CYCLE</i>	<i>22</i>
8. RADIATED TEST RESULTS	23
8.1. <i>RESTRICTED BANDEDGE</i>	<i>31</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>45</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>51</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>75</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>78</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>80</i>
9. ANTENNA REQUIREMENT	82
10. AC POWER LINE CONDUCTED EMISSION	83
11. TEST DATA	87

Appendix A: Duty Cycle	87
Appendix B: Maximum Conducted Output Power	90
Appendix C: -6dB Bandwidth.....	91
Appendix D: Occupied Channel Bandwidth	96
Appendix E: Maximum Power Spectral Density Level	101
Appendix F: Band Edge.....	106
Appendix G: Conducted RF Spurious Emission.....	113

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD
Address: Xingtai Industrial Park, Economic Development Zone of Changtai County, Zhangzhou City, Fujian.

Manufacturer Information

Company Name: LEEDARSON LIGHTING CO., LTD
Address: Xingtai Industrial Park, Economic Development Zone of Changtai County, Zhangzhou City, Fujian.

EUT Information

EUT Name: INDOOR CAMERA
Series EUT Name: OUTDOOR CAMERA
Model: SCS11X
Series Model: SCW11X
Model Difference: Refer to declaration
Brand: Roku
Sample Received Date: June 6, 2024
Sample Status: Normal
Sample ID: 7291946
Date of Tested: June 6, 2024 to June 15, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Fanny Huang
Engineer Project Associate

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C , KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	INDOOR CAMERA
Series EUT Name	OUTDOOR CAMERA
Model	SCS11X
Series Model	SCW11X
Model Difference	Refer to declaration

Frequency Band:	2400 MHz to 2483.5 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps/125kbps/500kbps
Normal Test Voltage:	AC 120 V, 60 Hz

5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/

5.3. MAXIMUM POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
LE 1M	2402 ~ 2480	0-39[40]	14.18
LE 2M	2402 ~ 2480	0-39[40]	13.48
LE 125k	2402 ~ 2480	0-39[40]	12.46
LE 500k	2402 ~ 2480	0-39[40]	12.60

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 125k	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 500k	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		sscom5.13.1		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	1	15	15	15
GFSK(2Mbps)	1	15	15	15
GFSK (LE 125k)	1	15	15	15
GFSK (LE 500k)	1	15	15	15

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	2.22

Test Mode	Transmit and Receive Mode	Description
LE 1M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 125k	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 500k	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
Note: 1.BLE&WLAN 2.4G can't transmit simultaneously. (declared by client)		

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	UART	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description	Remark
1	AC Power Adapter	Roku	HFS005A	Input: 100-240V 50/60Hz 0.2A Output: 5V 1A	For indoor camera
2	AC Power Adapter	Roku	GQ06A-050100-ZUU	Input: 100-240V 50/60Hz 0.3A Output: 5V 1A	For indoor camera
3	AC Power Adapter	Roku	HFS008J-0501500U	Input: 100-240V 50/60Hz 0.5A Output: 5V 1.5A	For outdoor camera

Note: We have pre-test these three AC Power Adapter, only the worst data on GQ06A-050100-ZUU AC Power Adapter usage was recorded in the report.

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

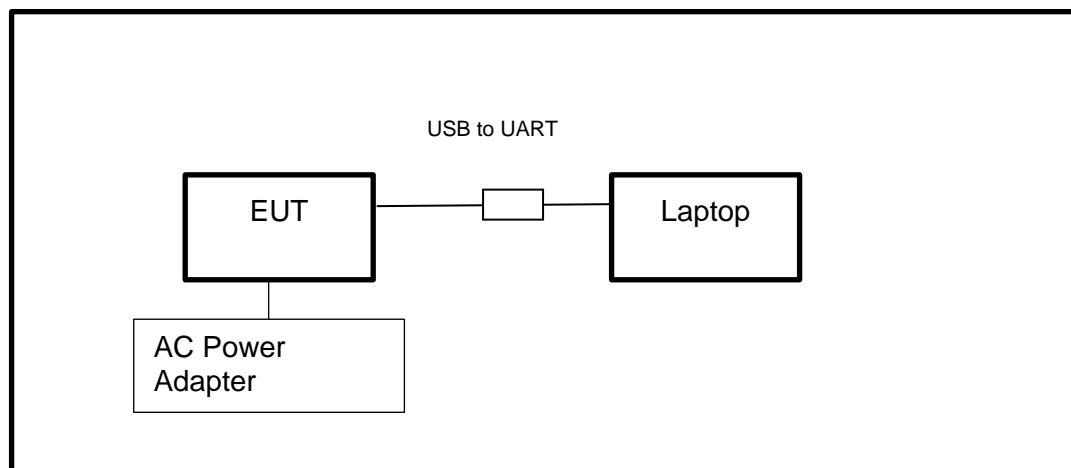

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer		Name	Version	
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Conduct Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).
Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	58.7%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 6, 2024	Test By	Walker Yuan
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP**TEST ENVIRONMENT**

Temperature	24.5℃	Relative Humidity	58.7%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 6, 2024	Test By	Walker Yuan
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C&D

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

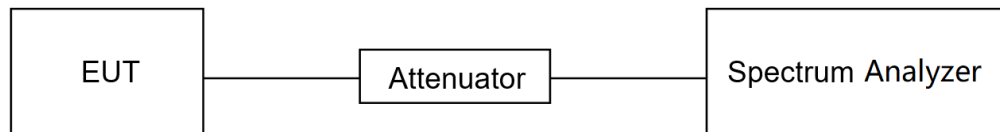

TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	58.7%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 6, 2024	Test By	Walker Yuan
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

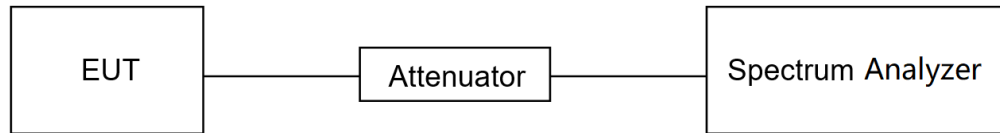TEST SETUP**TEST ENVIRONMENT**

Temperature	24.5°C	Relative Humidity	58.7%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 6, 2024	Test By	Walker Yuan
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F&G

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

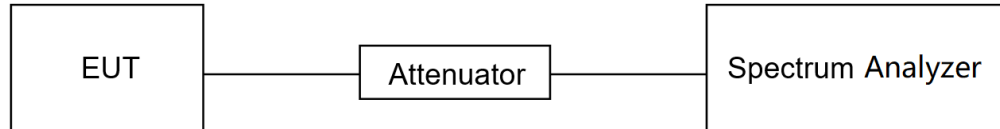

TEST ENVIRONMENT

Temperature	24.5°C	Relative Humidity	58.7%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 6, 2024	Test By	Walker Yuan
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

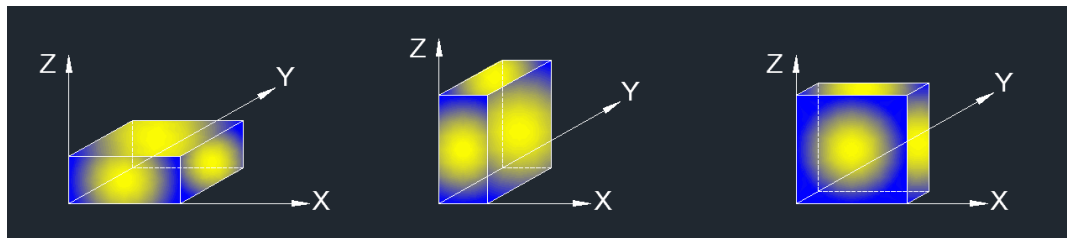

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

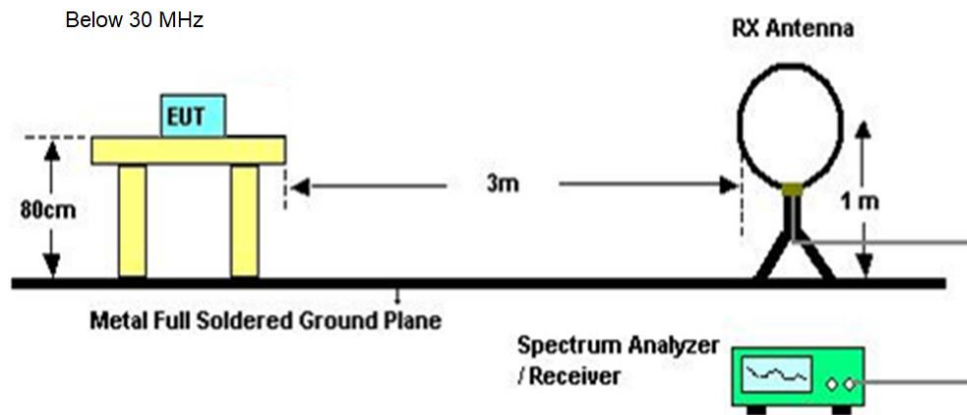

Below 1 GHz and above 30 MHz



Above 1 GHz

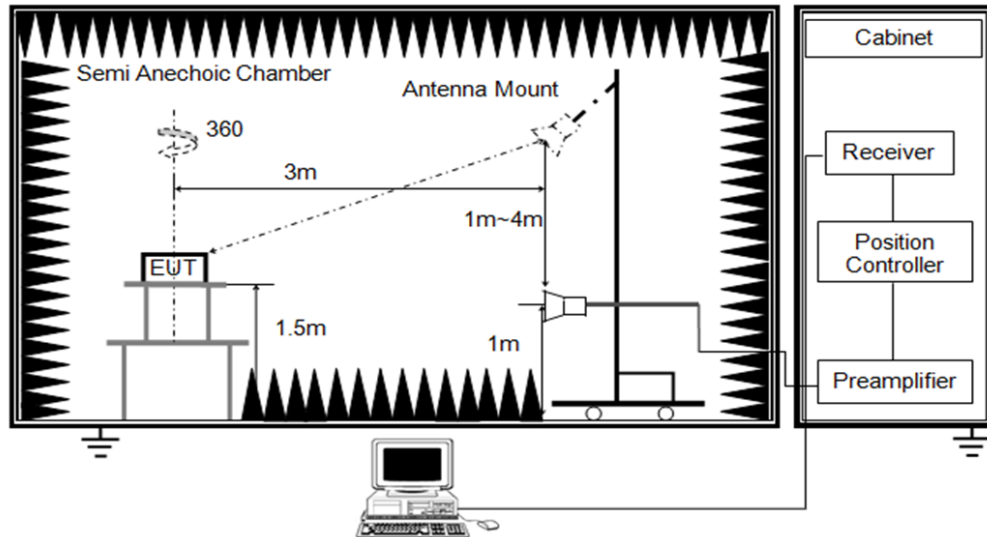

TEST ENVIRONMENT

Temperature	22.6°C	Relative Humidity	61.7%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	June 15, 2024	Test By	Mason Wang
-----------	---------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

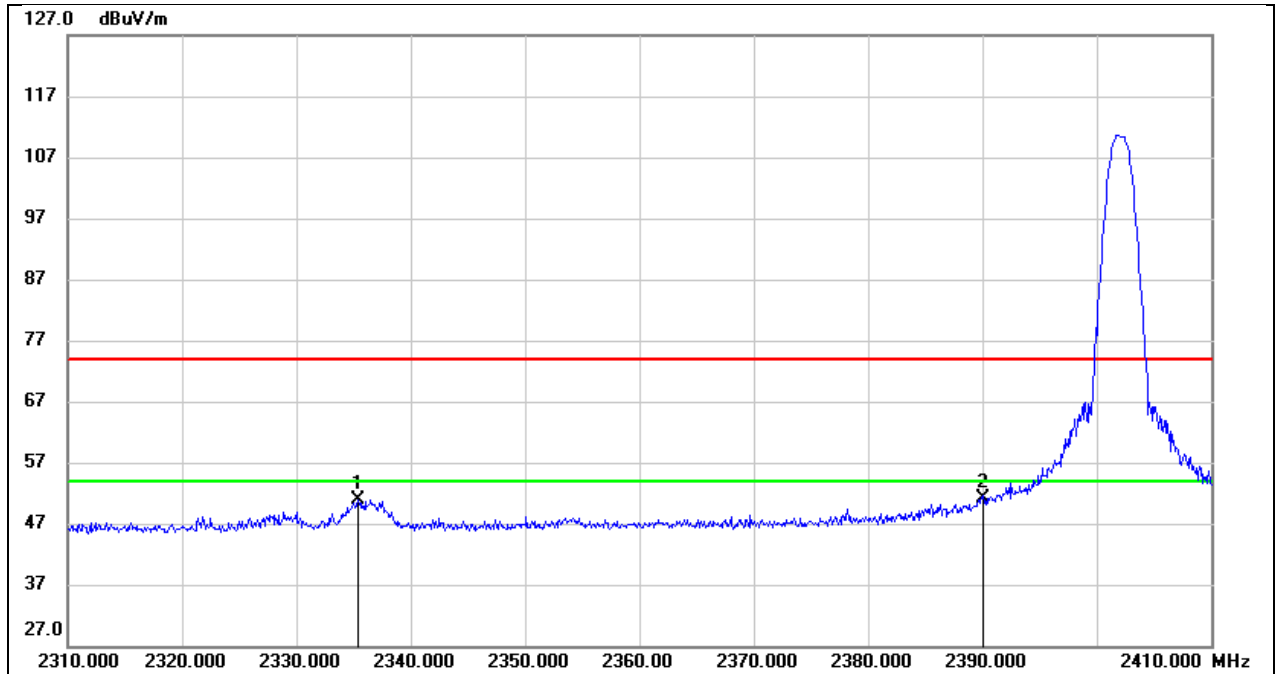


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2335.400	18.22	32.62	50.84	74.00	-23.16	peak
2	2390.000	18.09	32.92	51.01	74.00	-22.99	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

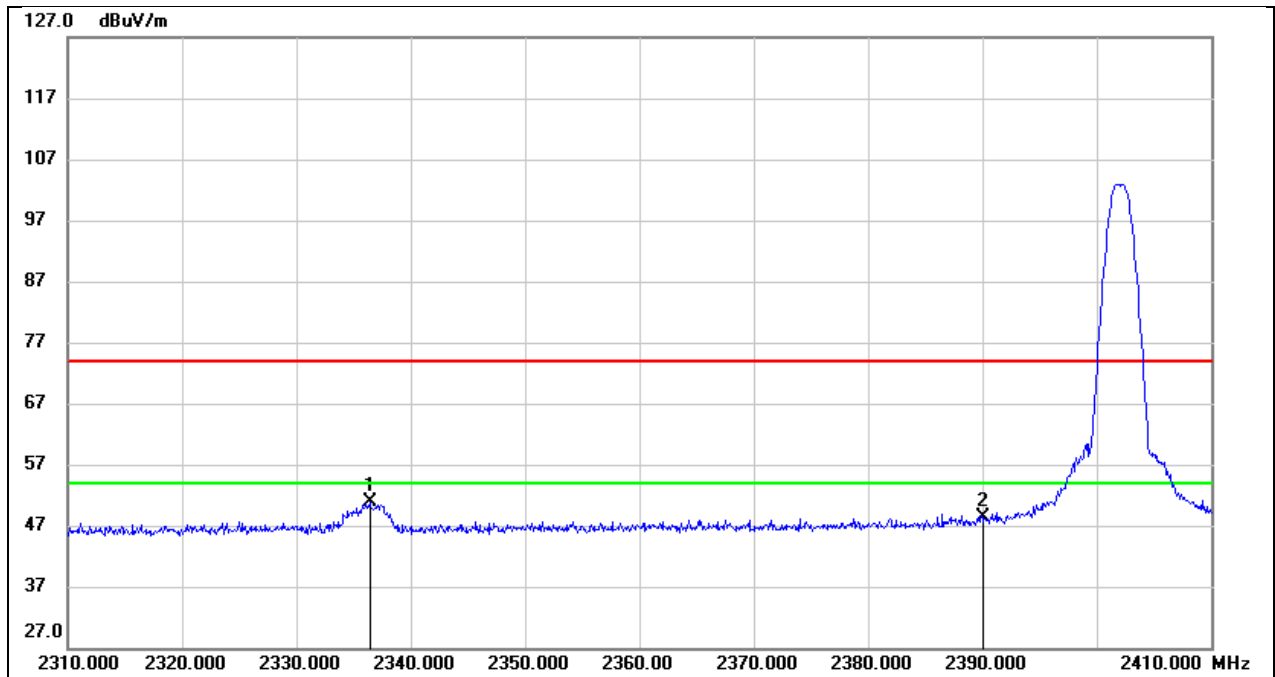


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.400	18.31	32.63	50.94	74.00	-23.06	peak
2	2390.000	15.50	32.92	48.42	74.00	-25.58	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

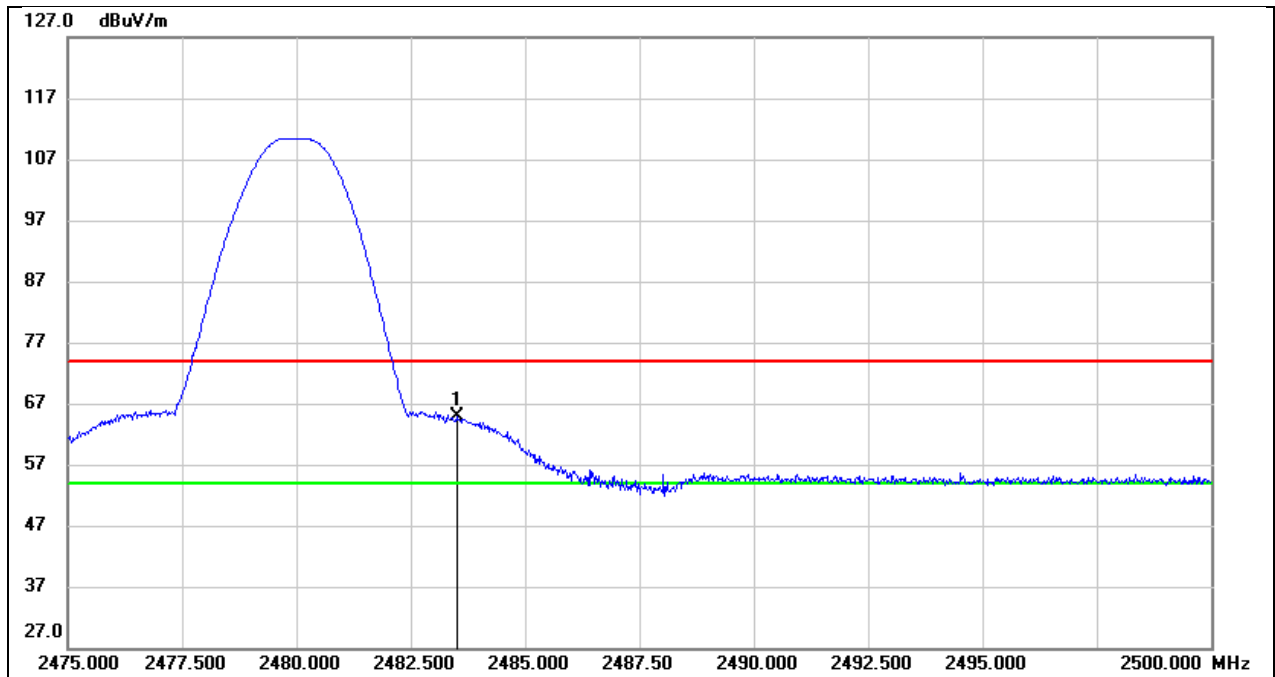


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.86	32.94	64.80	74.00	-9.20	peak

Test Mode:	BLE 1M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

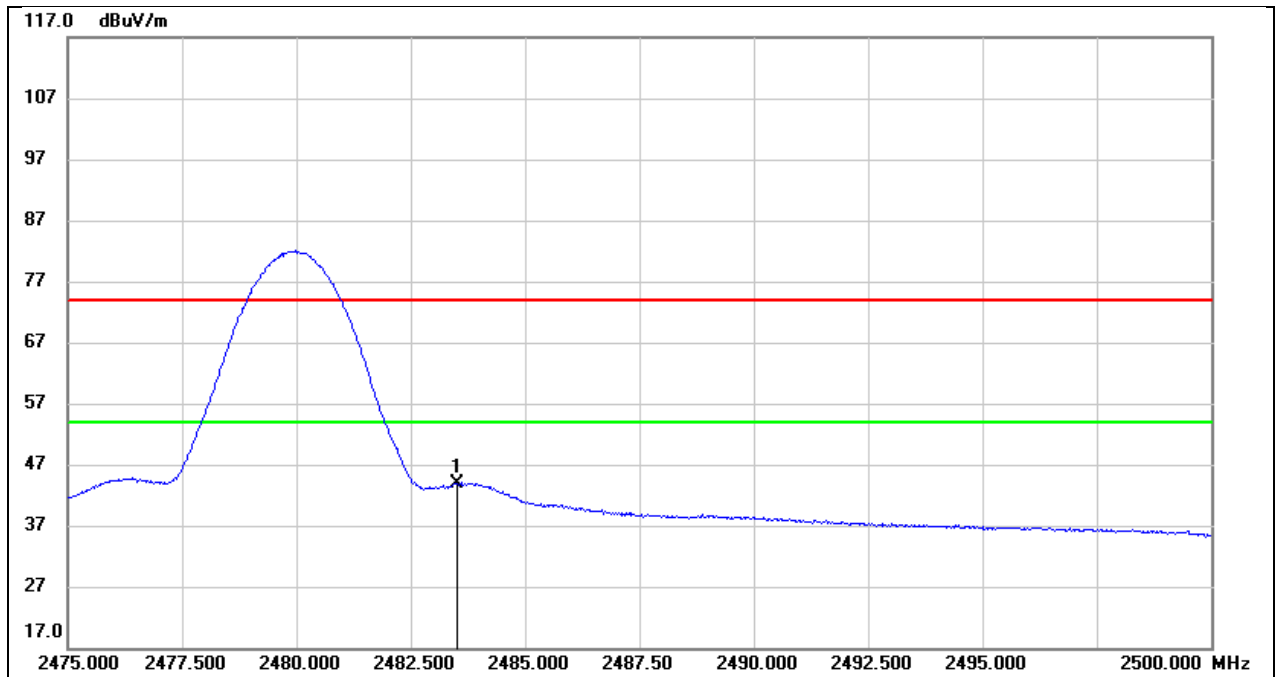


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.94	32.94	43.88	54.00	-10.12	AVG

Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

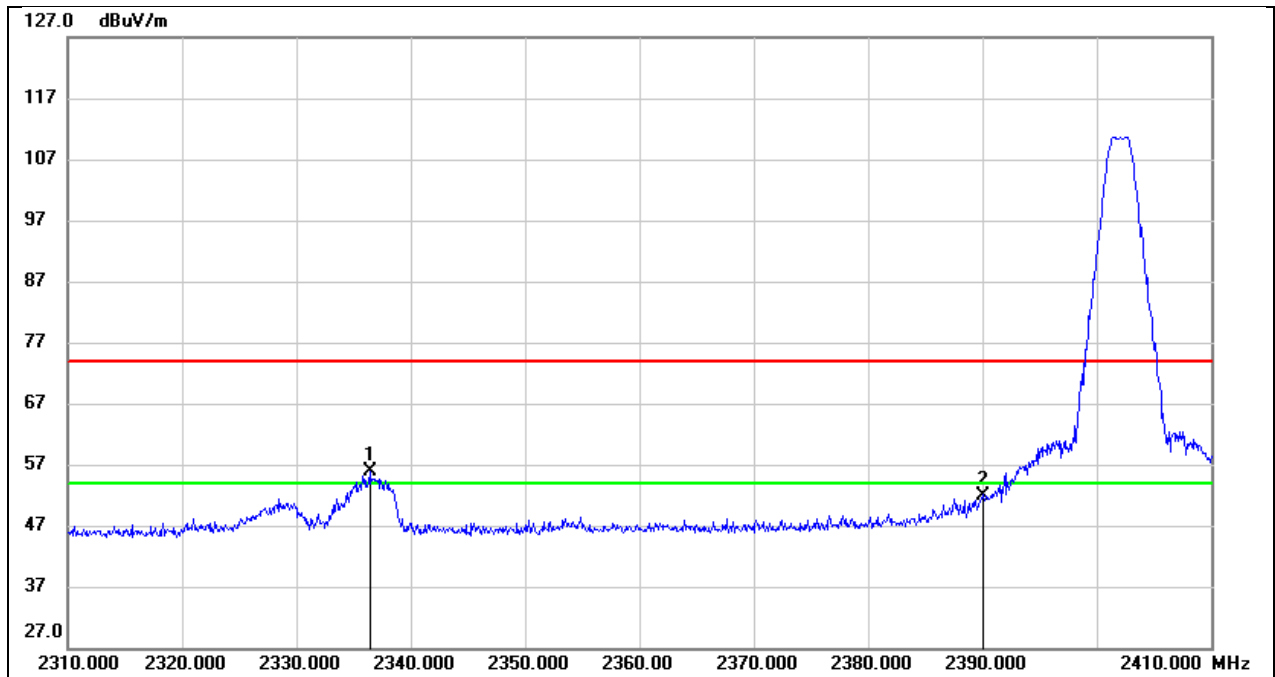


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.400	23.32	32.63	55.95	74.00	-18.05	peak
2	2390.000	19.00	32.92	51.92	74.00	-22.08	peak

Test Mode:	BLE 2M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

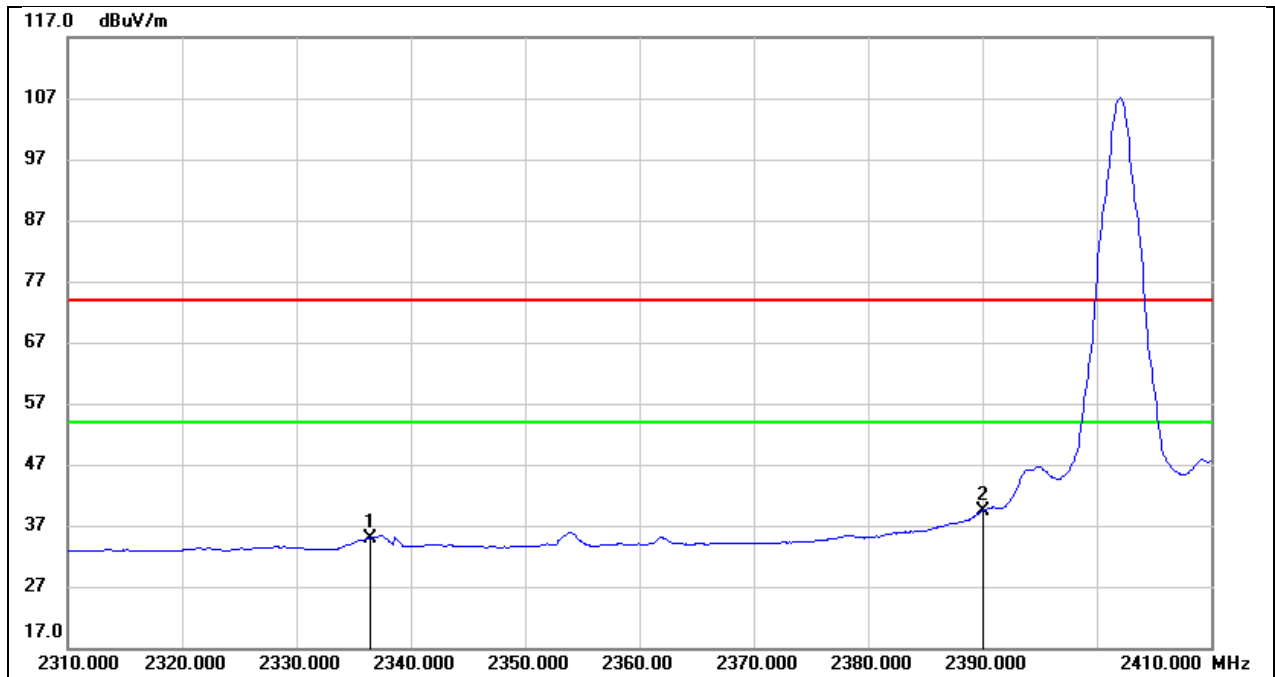


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.400	2.33	32.63	34.96	54.00	-19.04	AVG
2	2390.000	6.50	32.92	39.42	54.00	-14.58	AVG

Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

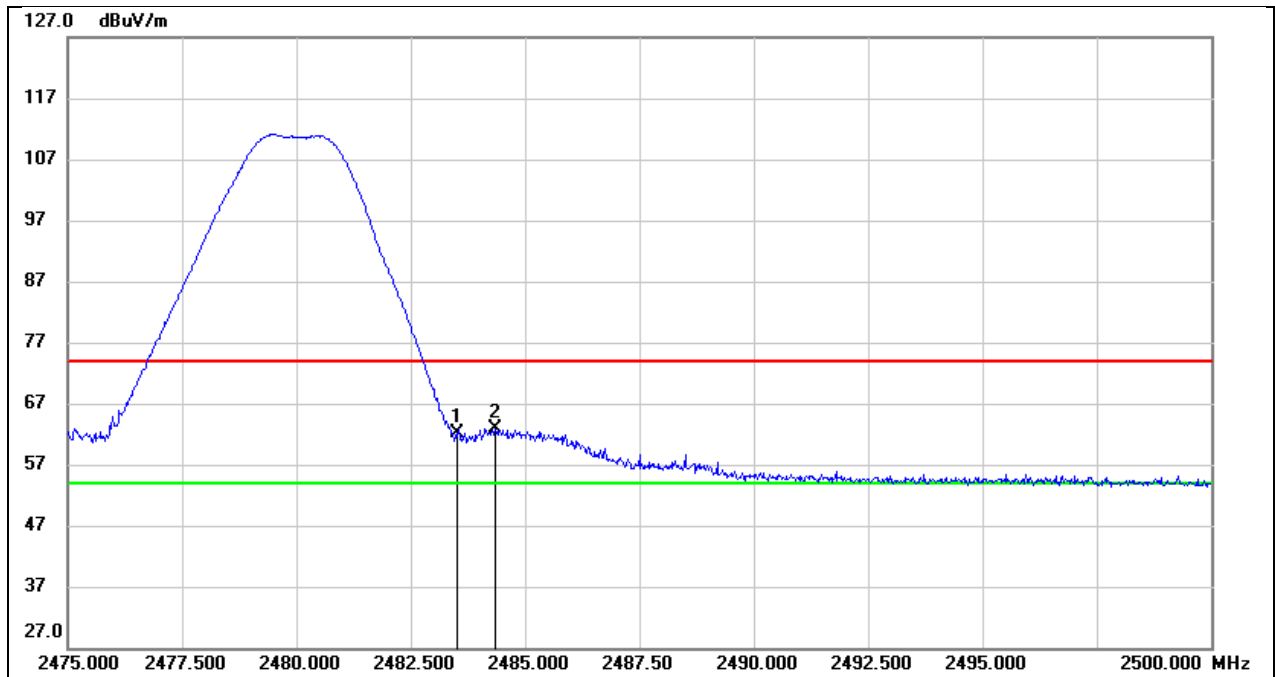


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	29.25	32.94	62.19	74.00	-11.81	peak
2	2484.350	29.96	32.94	62.90	74.00	-11.10	peak

Test Mode:	BLE 2M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

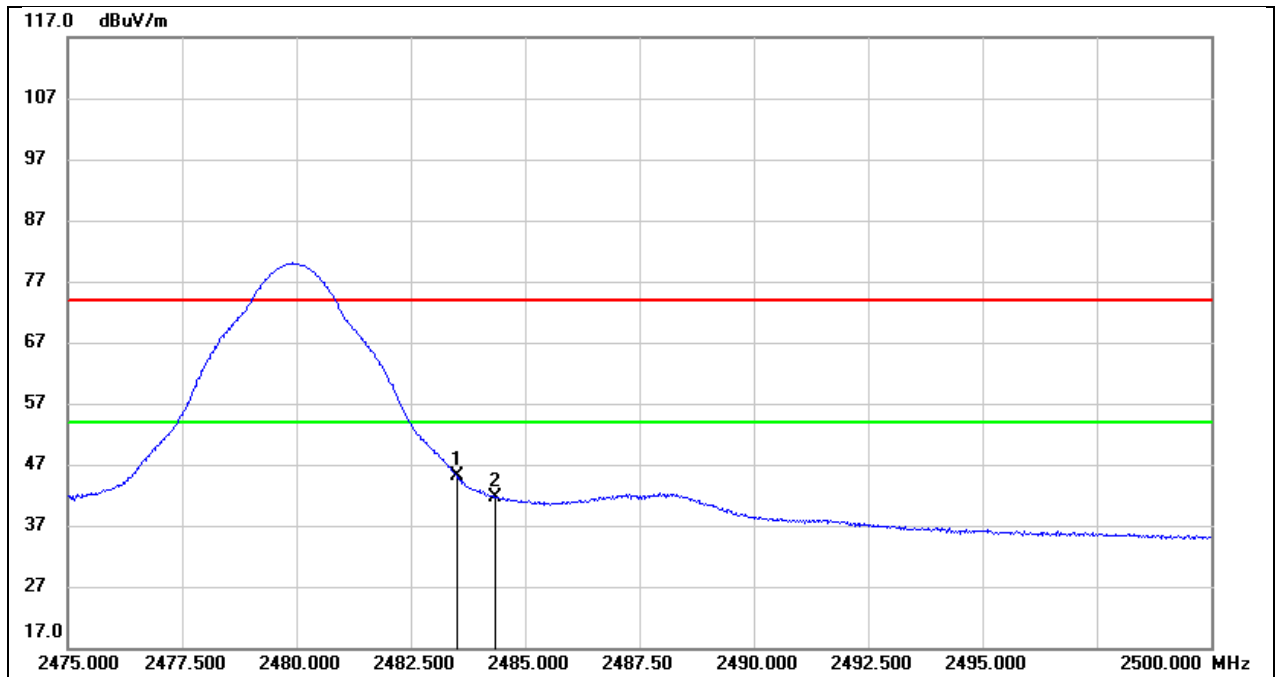


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.21	32.94	45.15	54.00	-8.85	AVG
2	2484.350	8.76	32.94	41.70	54.00	-12.30	AVG

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

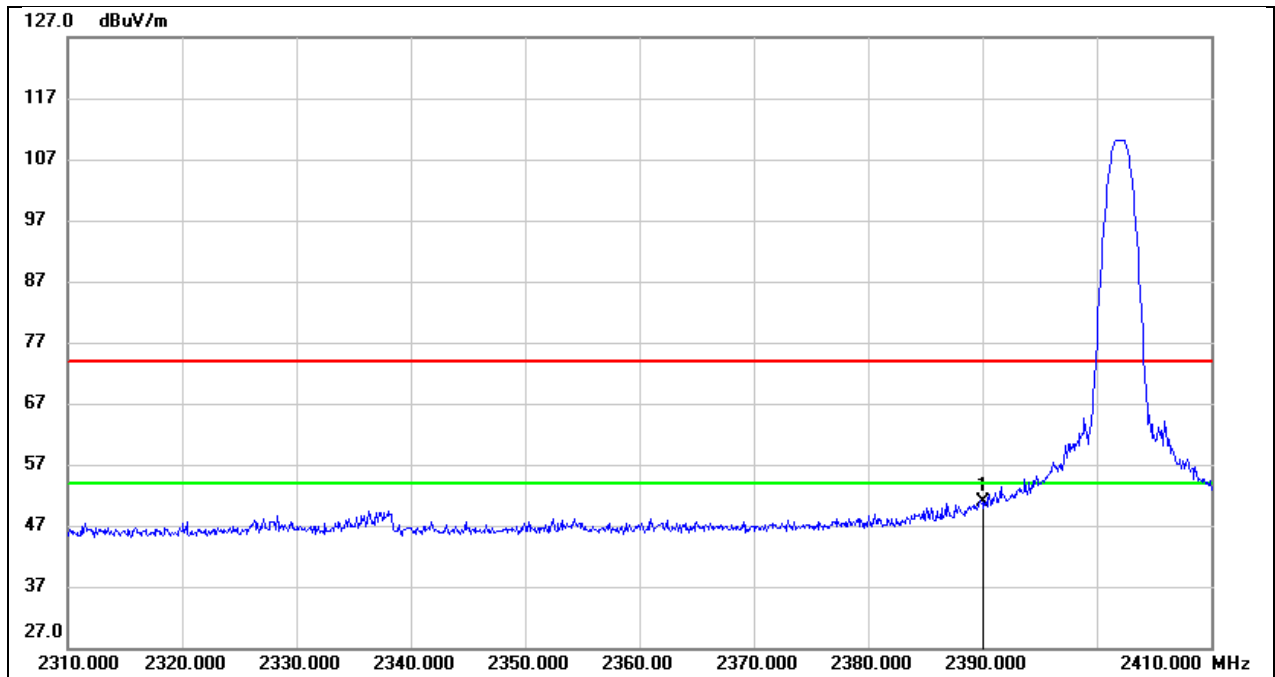


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.01	32.92	50.93	74.00	-23.07	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

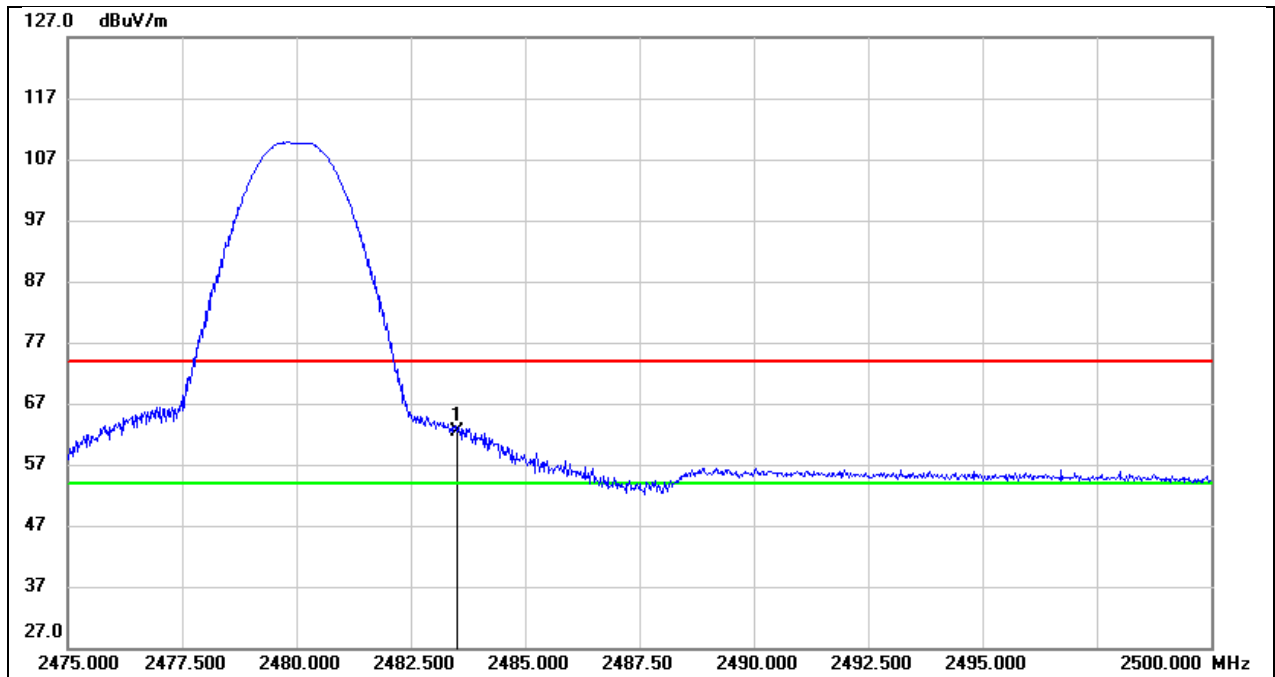


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	29.52	32.94	62.46	74.00	-11.54	peak

Test Mode:	BLE 125kHz AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

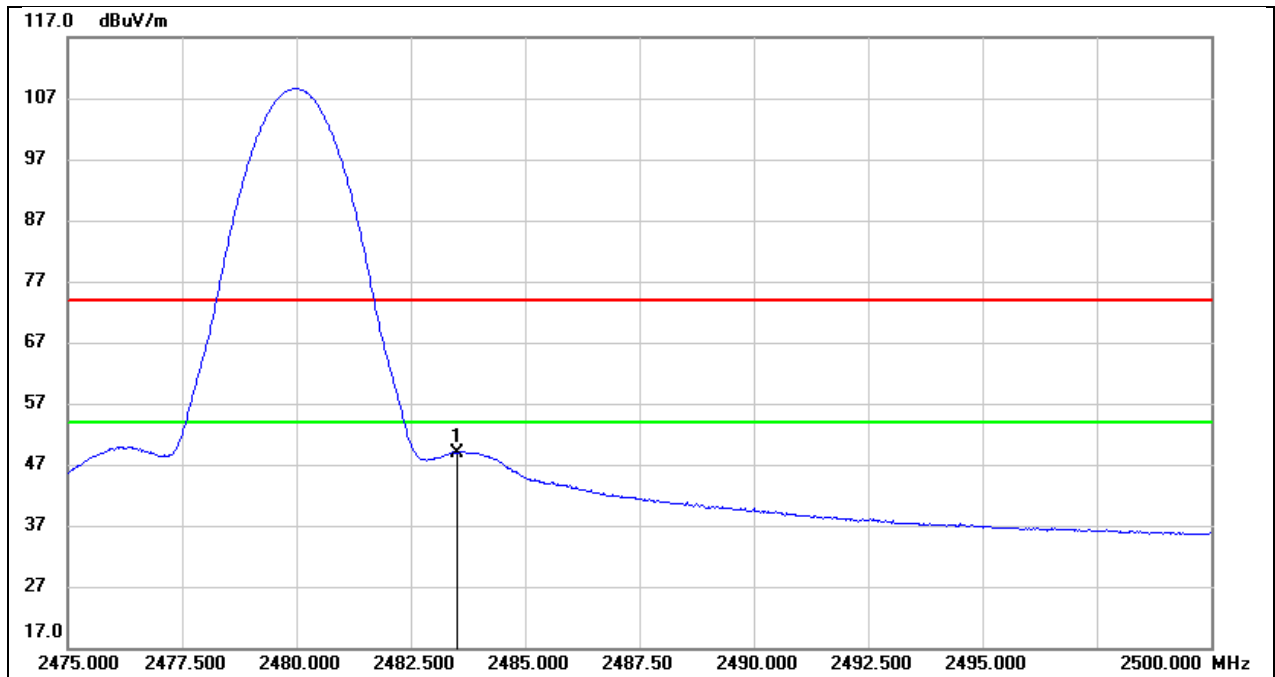


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.95	32.94	48.89	54.00	-5.11	AVG

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

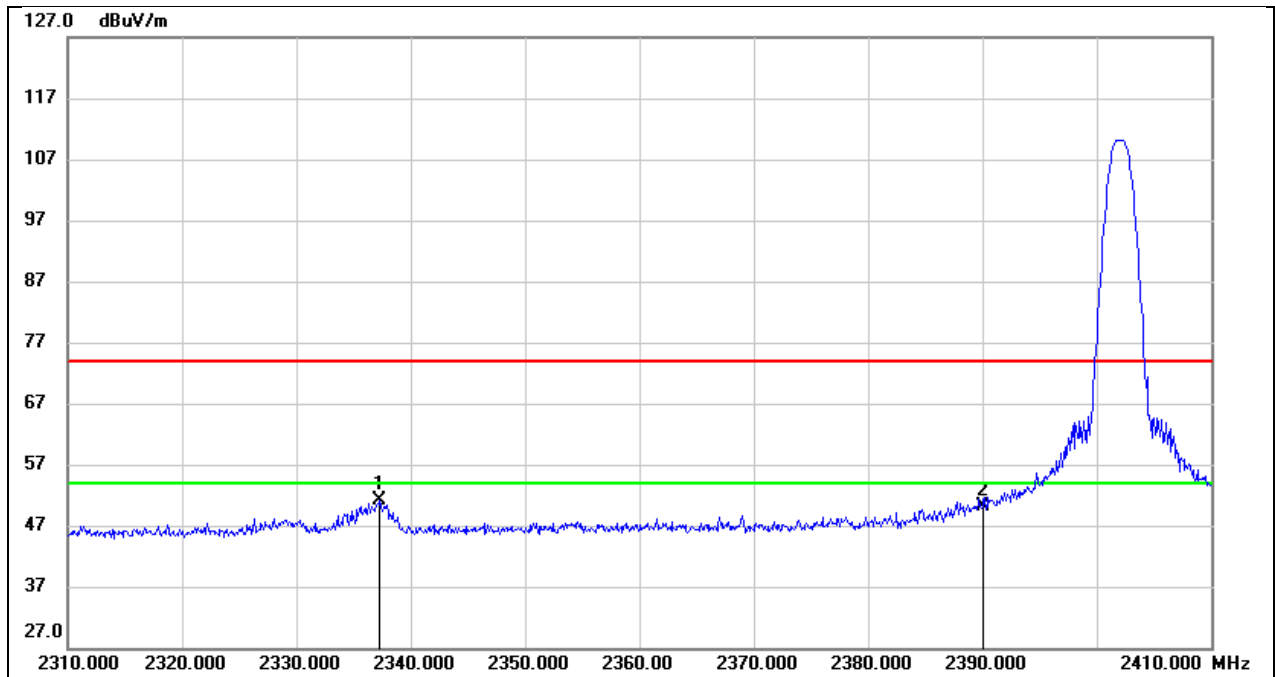


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2337.300	18.42	32.64	51.06	74.00	-22.94	peak
2	2390.000	17.30	32.92	50.22	74.00	-23.78	peak

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

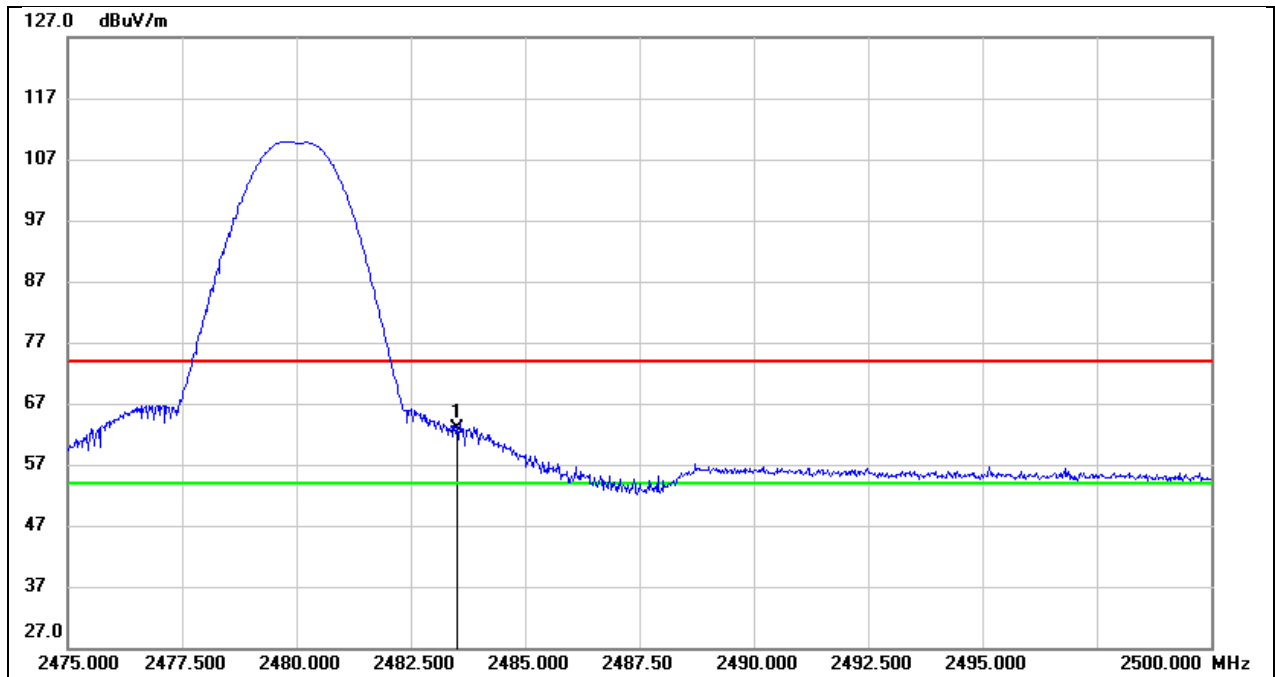

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	29.95	32.94	62.89	74.00	-11.11	peak


Test Mode:	BLE 500kHz AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

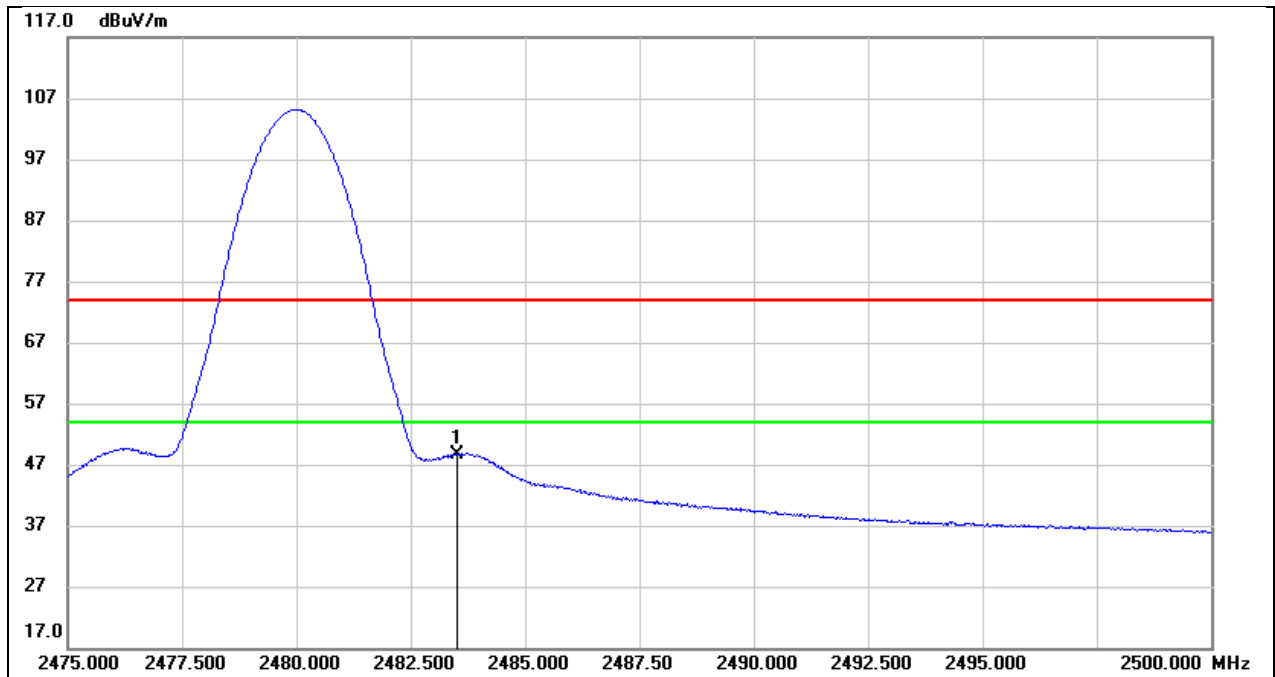

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.67	32.94	48.61	54.00	-5.39	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

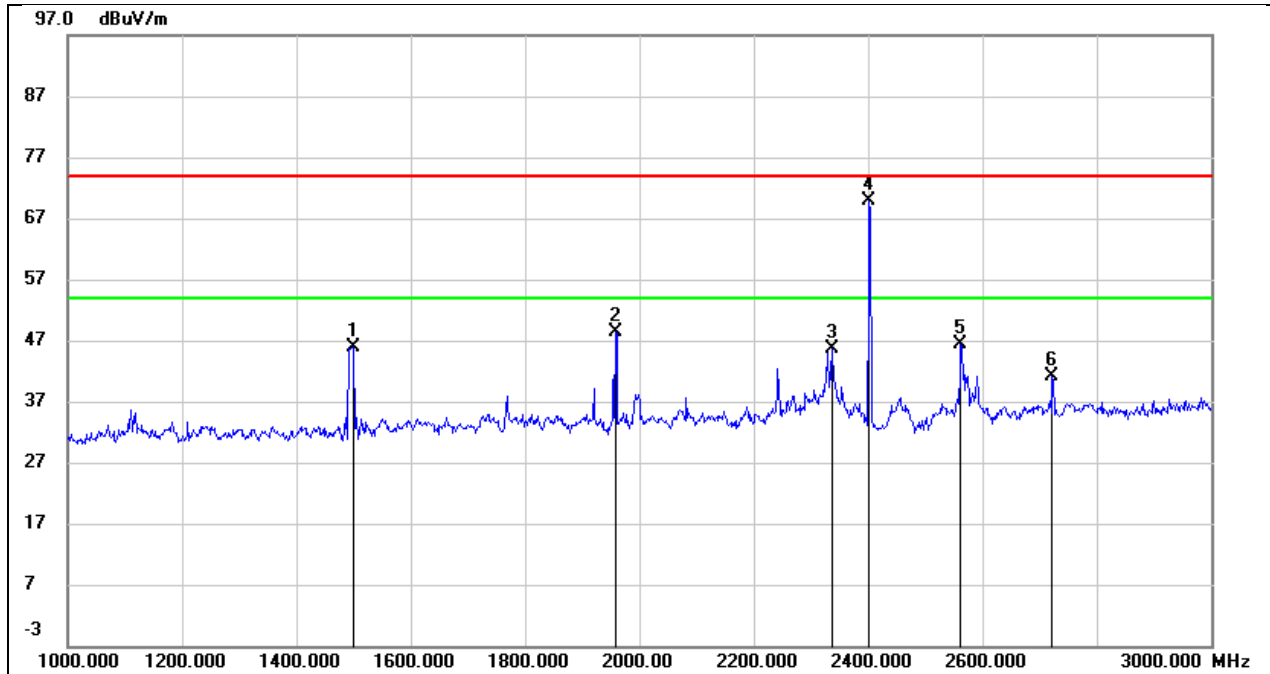


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.000	57.68	-11.74	45.94	74.00	-28.06	peak
2	1958.000	58.50	-10.14	48.36	74.00	-25.64	peak
3	2336.000	53.54	-7.87	45.67	74.00	-28.33	peak
4	2402.000	77.19	-7.40	69.79	/	/	fundamental
5	2562.000	54.05	-7.62	46.43	74.00	-27.57	peak
6	2722.000	48.39	-7.14	41.25	74.00	-32.75	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

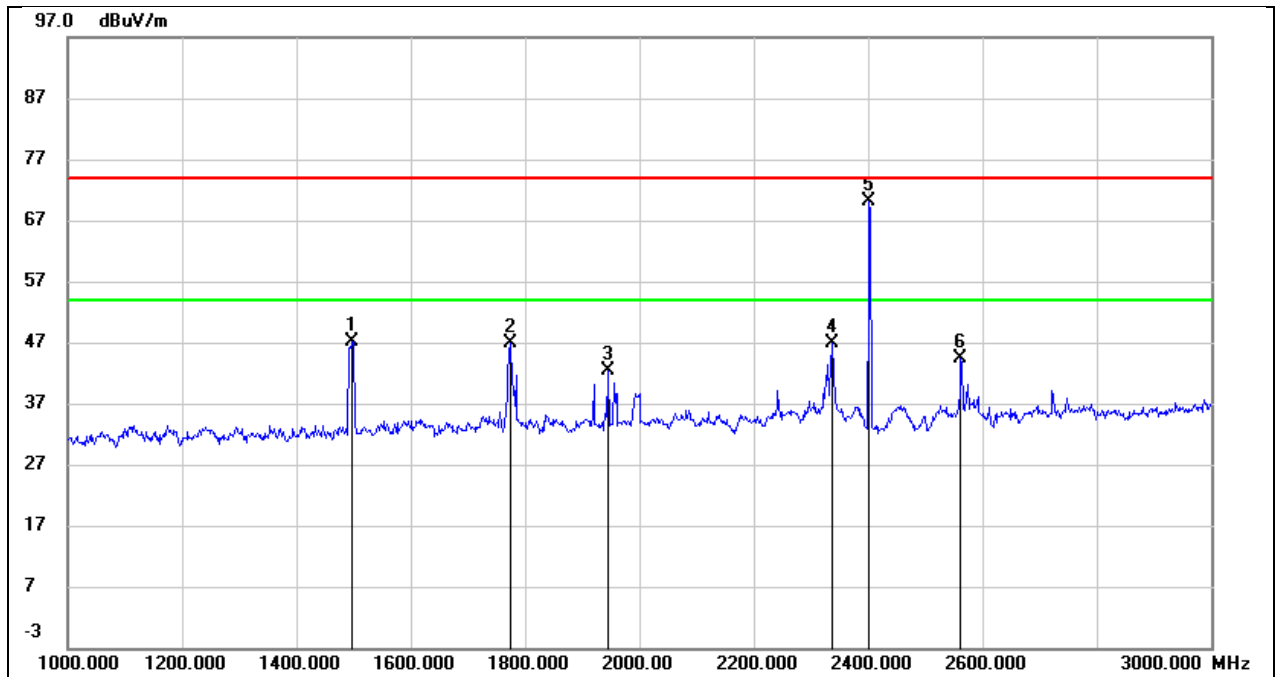


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1498.000	58.83	-11.76	47.07	74.00	-26.93	peak
2	1774.000	57.26	-10.36	46.90	74.00	-27.10	peak
3	1946.000	52.58	-10.15	42.43	74.00	-31.57	peak
4	2338.000	54.68	-7.85	46.83	74.00	-27.17	peak
5	2402.000	77.57	-7.40	70.17	/	/	fundamental
6	2562.000	52.03	-7.62	44.41	74.00	-29.59	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

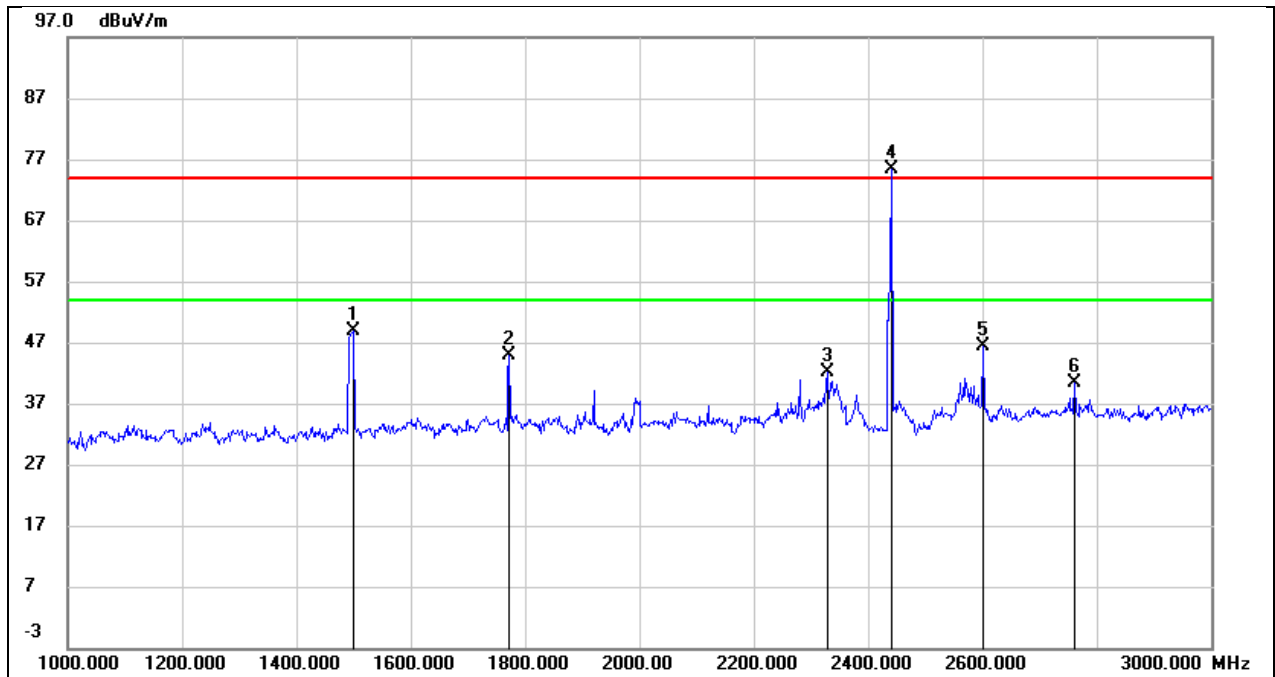


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.000	60.54	-11.74	48.80	74.00	-25.20	peak
2	1772.000	55.20	-10.37	44.83	74.00	-29.17	peak
3	2328.000	50.05	-7.94	42.11	74.00	-31.89	peak
4	2440.000	82.92	-7.44	75.48	/	/	fundamental
5	2602.000	54.07	-7.68	46.39	74.00	-27.61	peak
6	2762.000	47.45	-6.97	40.48	74.00	-33.52	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

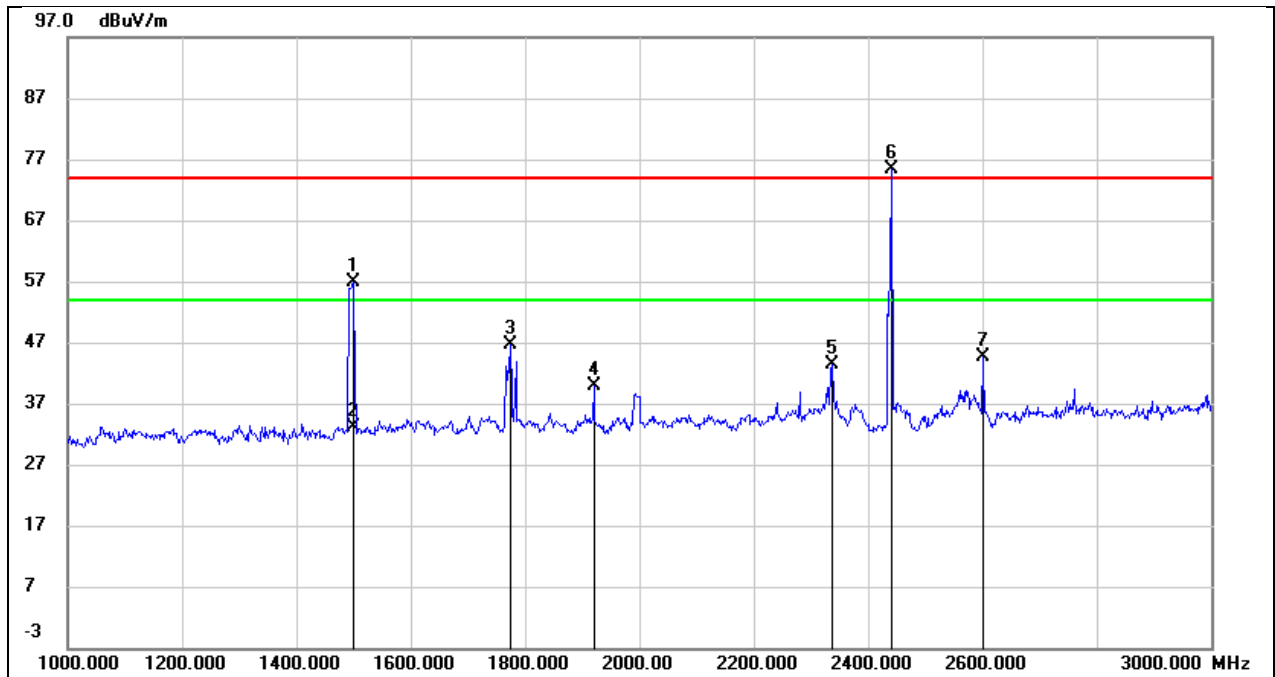


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.000	68.64	-11.74	56.90	74.00	-17.10	peak
2	1500.000	44.84	-11.74	33.10	54.00	-20.90	AVG
3	1774.000	57.10	-10.36	46.74	74.00	-27.26	peak
4	1920.000	50.09	-10.16	39.93	74.00	-34.07	peak
5	2338.000	51.34	-7.85	43.49	74.00	-30.51	peak
6	2440.000	82.92	-7.44	75.48	/	/	fundamental
7	2600.000	52.23	-7.68	44.55	74.00	-29.45	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

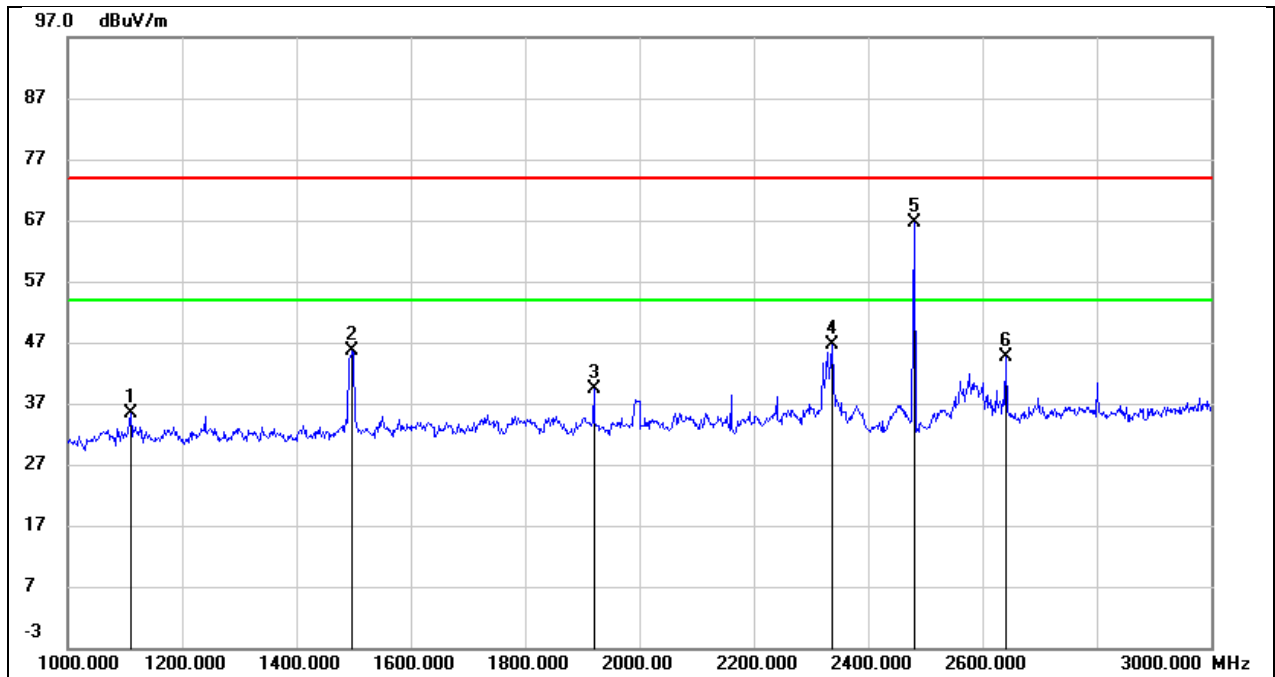

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1110.000	48.73	-13.44	35.29	74.00	-38.71	peak
2	1498.000	57.36	-11.76	45.60	74.00	-28.40	peak
3	1920.000	49.60	-10.16	39.44	74.00	-34.56	peak
4	2338.000	54.36	-7.85	46.51	74.00	-27.49	peak
5	2480.000	74.21	-7.47	66.74	/	/	fundamental
6	2640.000	52.19	-7.50	44.69	74.00	-29.31	peak


Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

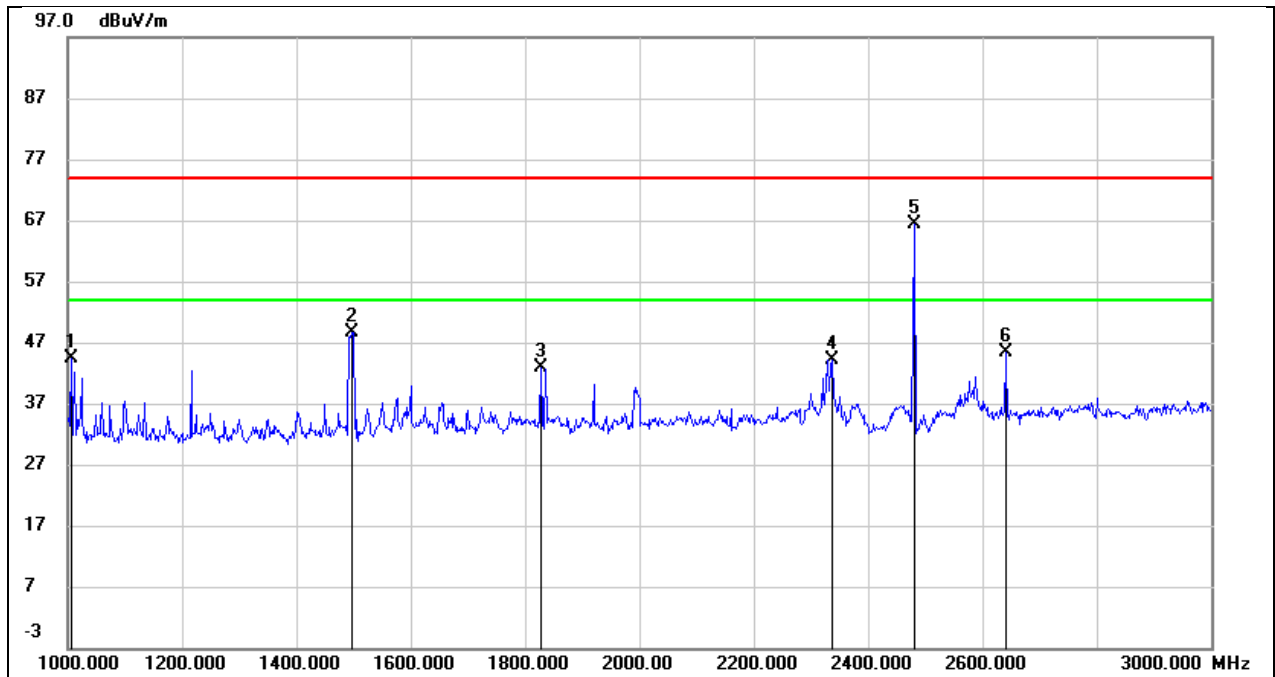

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1006.000	58.81	-14.36	44.45	74.00	-29.55	peak
2	1498.000	60.49	-11.76	48.73	74.00	-25.27	peak
3	1828.000	53.12	-10.22	42.90	74.00	-31.10	peak
4	2336.000	52.09	-7.87	44.22	74.00	-29.78	peak
5	2480.000	73.89	-7.47	66.42	/	/	fundamental
6	2640.000	52.96	-7.50	45.46	74.00	-28.54	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

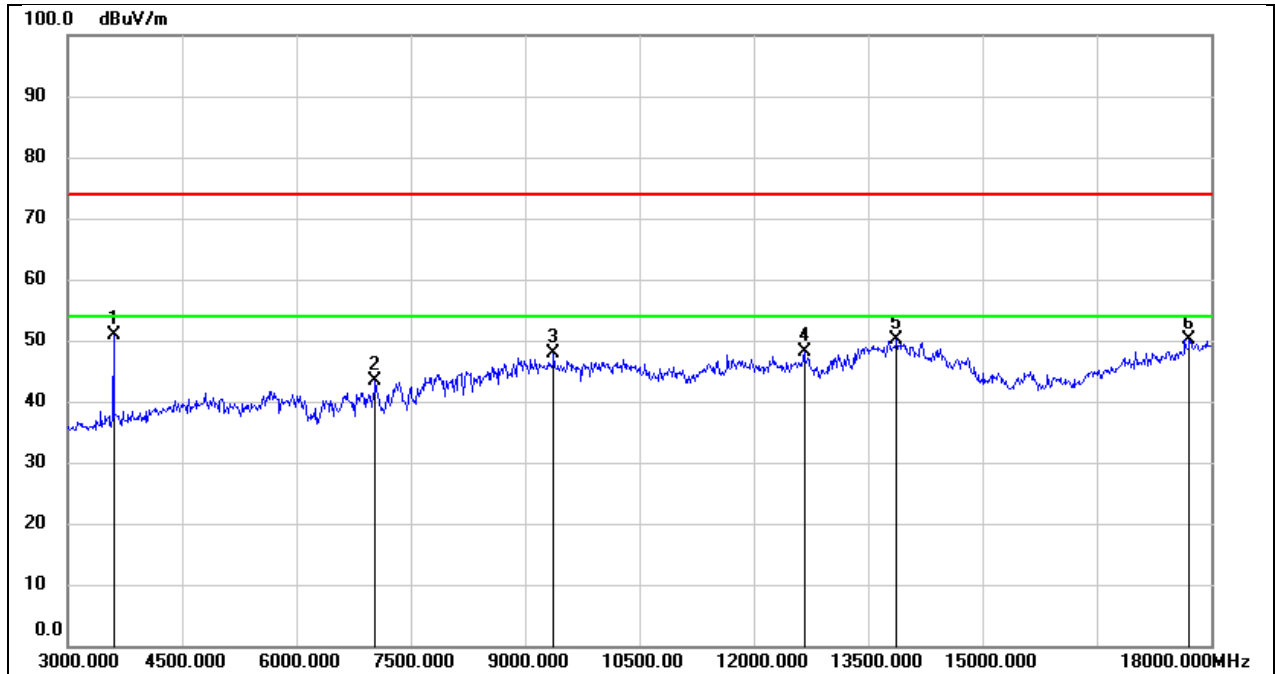


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	54.12	-3.28	50.84	74.00	-23.16	peak
2	7035.000	36.07	7.28	43.35	74.00	-30.65	peak
3	9375.000	37.56	10.40	47.96	74.00	-26.04	peak
4	12660.000	29.61	18.49	48.10	74.00	-25.90	peak
5	13875.000	27.41	22.68	50.09	74.00	-23.91	peak
6	17715.000	24.74	25.31	50.05	74.00	-23.95	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

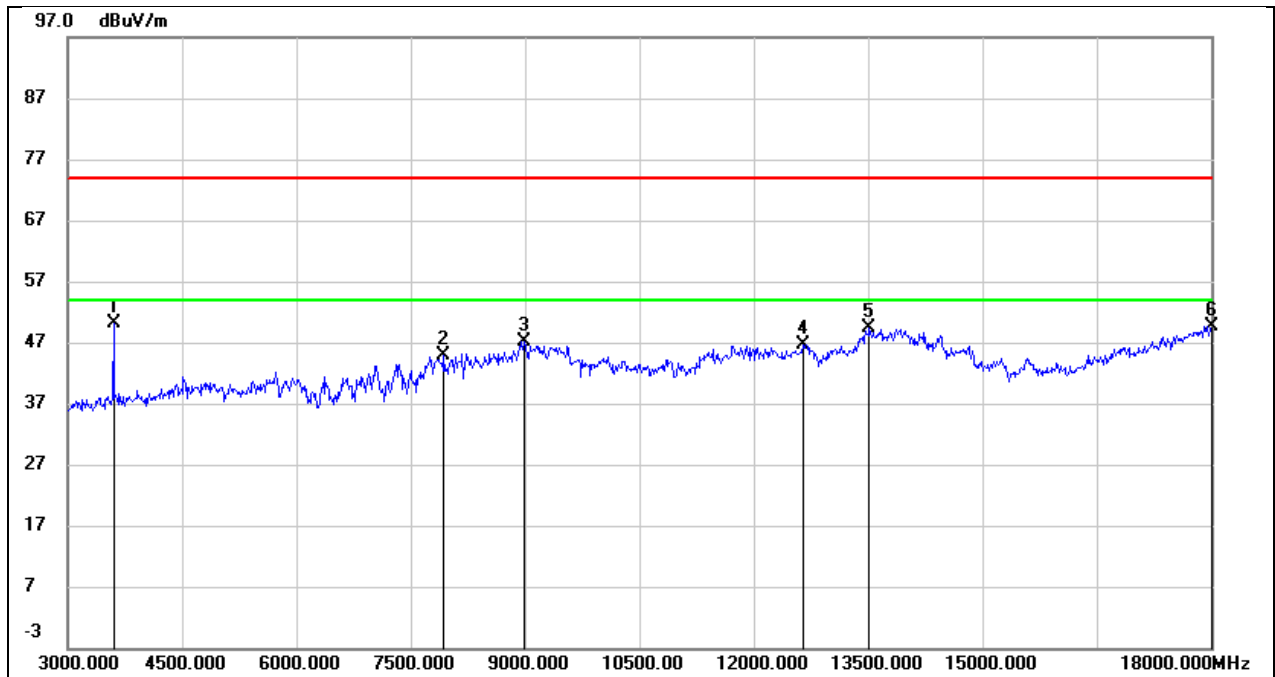


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	53.47	-3.28	50.19	74.00	-23.81	peak
2	7935.000	37.61	7.17	44.78	74.00	-29.22	peak
3	8985.000	36.15	10.97	47.12	74.00	-26.88	peak
4	12645.000	28.16	18.44	46.60	74.00	-27.40	peak
5	13515.000	27.59	21.69	49.28	74.00	-24.72	peak
6	18000.000	22.78	26.83	49.61	74.00	-24.39	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

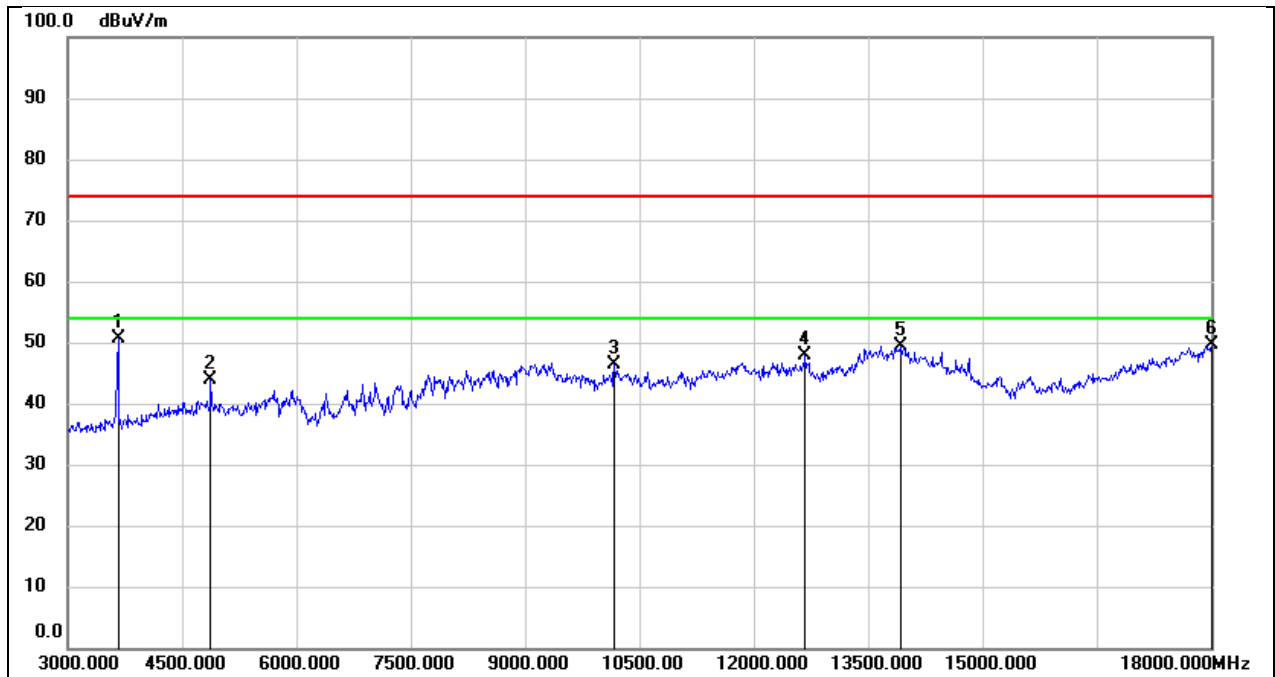


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	53.91	-3.17	50.74	74.00	-23.26	peak
2	4875.000	43.32	0.61	43.93	74.00	-30.07	peak
3	10170.000	33.99	12.48	46.47	74.00	-27.53	peak
4	12675.000	29.27	18.54	47.81	74.00	-26.19	peak
5	13920.000	26.78	22.71	49.49	74.00	-24.51	peak
6	18000.000	22.78	26.83	49.61	74.00	-24.39	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

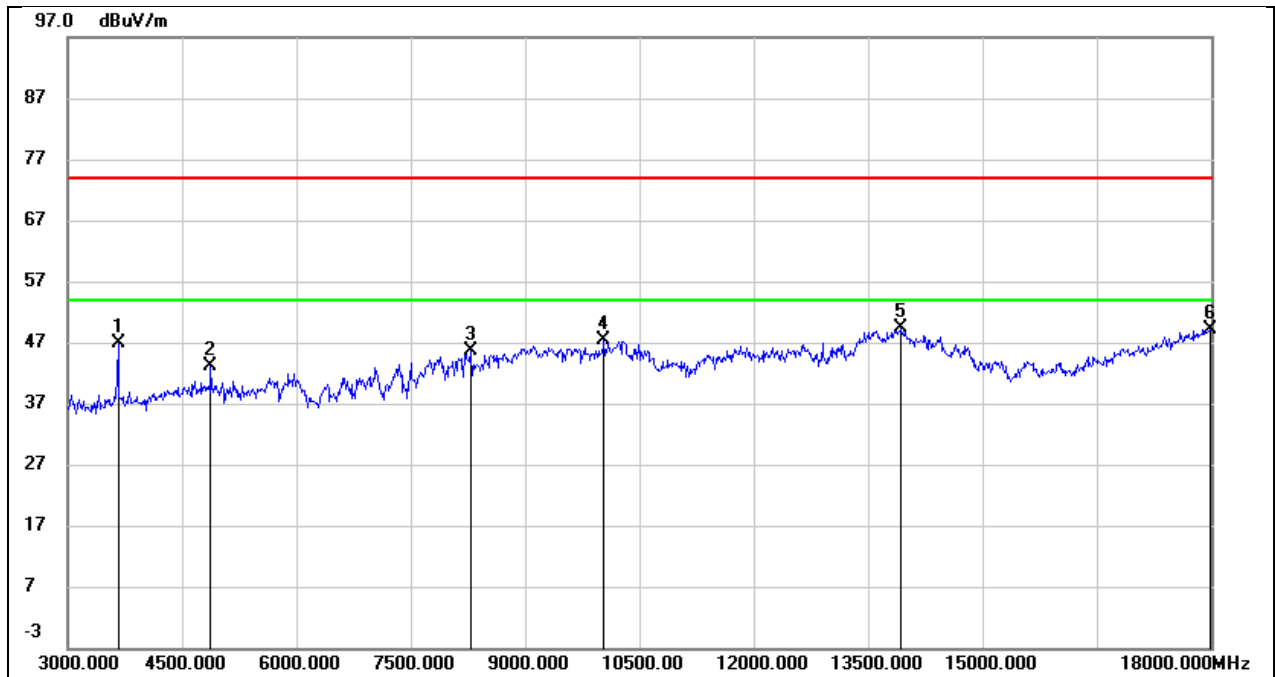


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	50.01	-3.17	46.84	74.00	-27.16	peak
2	4875.000	42.41	0.61	43.02	74.00	-30.98	peak
3	8280.000	37.11	8.46	45.57	74.00	-28.43	peak
4	10035.000	34.82	12.48	47.30	74.00	-26.70	peak
5	13935.000	26.68	22.72	49.40	74.00	-24.60	peak
6	17985.000	22.31	26.77	49.08	74.00	-24.92	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

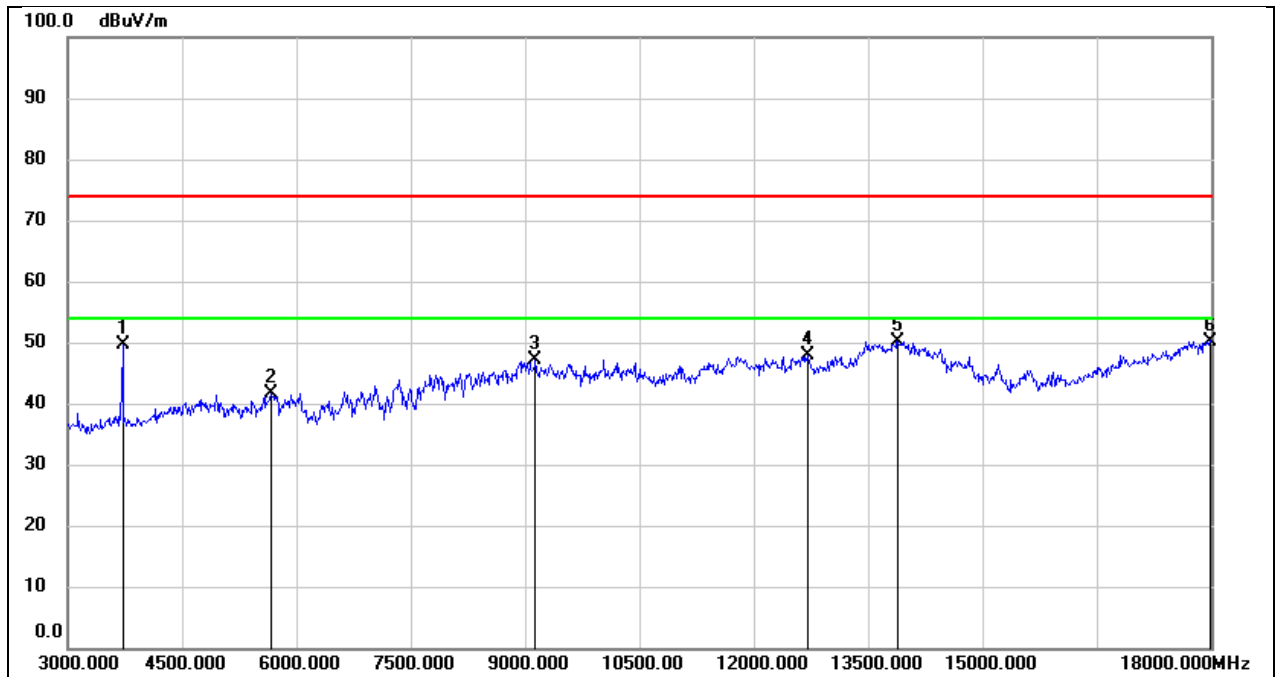


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	52.57	-3.05	49.52	74.00	-24.48	peak
2	5670.000	38.96	2.62	41.58	74.00	-32.42	peak
3	9135.000	36.64	10.39	47.03	74.00	-26.97	peak
4	12705.000	29.24	18.66	47.90	74.00	-26.10	peak
5	13890.000	27.48	22.69	50.17	74.00	-23.83	peak
6	17985.000	23.48	26.77	50.25	74.00	-23.75	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

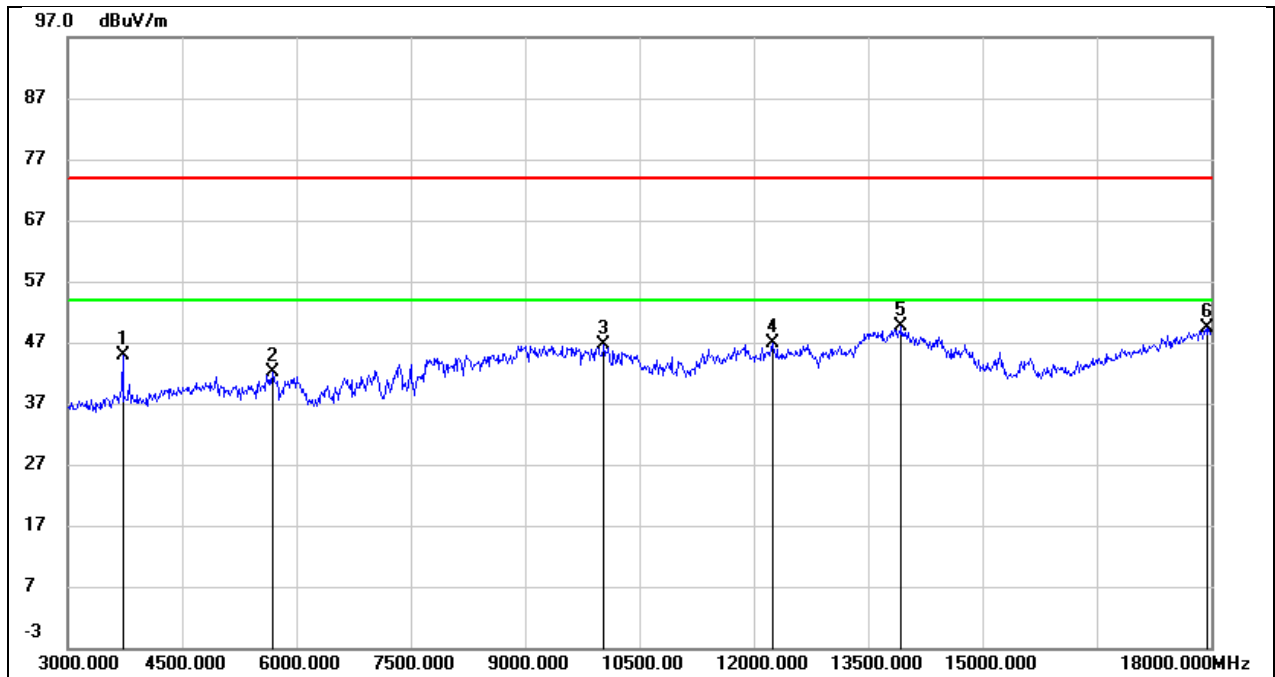


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	48.04	-3.05	44.99	74.00	-29.01	peak
2	5685.000	39.63	2.59	42.22	74.00	-31.78	peak
3	10035.000	34.19	12.48	46.67	74.00	-27.33	peak
4	12240.000	28.52	18.46	46.98	74.00	-27.02	peak
5	13935.000	26.88	22.72	49.60	74.00	-24.40	peak
6	17940.000	22.77	26.61	49.38	74.00	-24.62	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

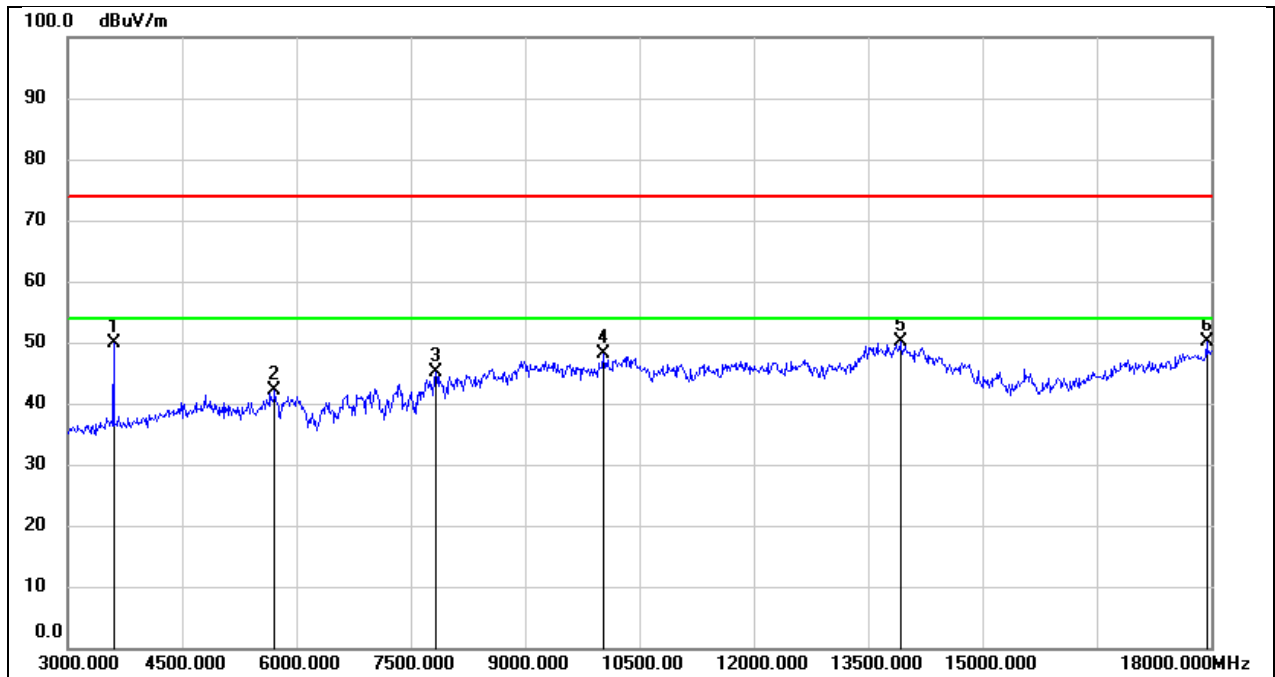


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	53.23	-3.28	49.95	74.00	-24.05	peak
2	5715.000	39.63	2.50	42.13	74.00	-31.87	peak
3	7830.000	37.76	7.46	45.22	74.00	-28.78	peak
4	10020.000	35.61	12.48	48.09	74.00	-25.91	peak
5	13920.000	27.30	22.71	50.01	74.00	-23.99	peak
6	17940.000	23.44	26.61	50.05	74.00	-23.95	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

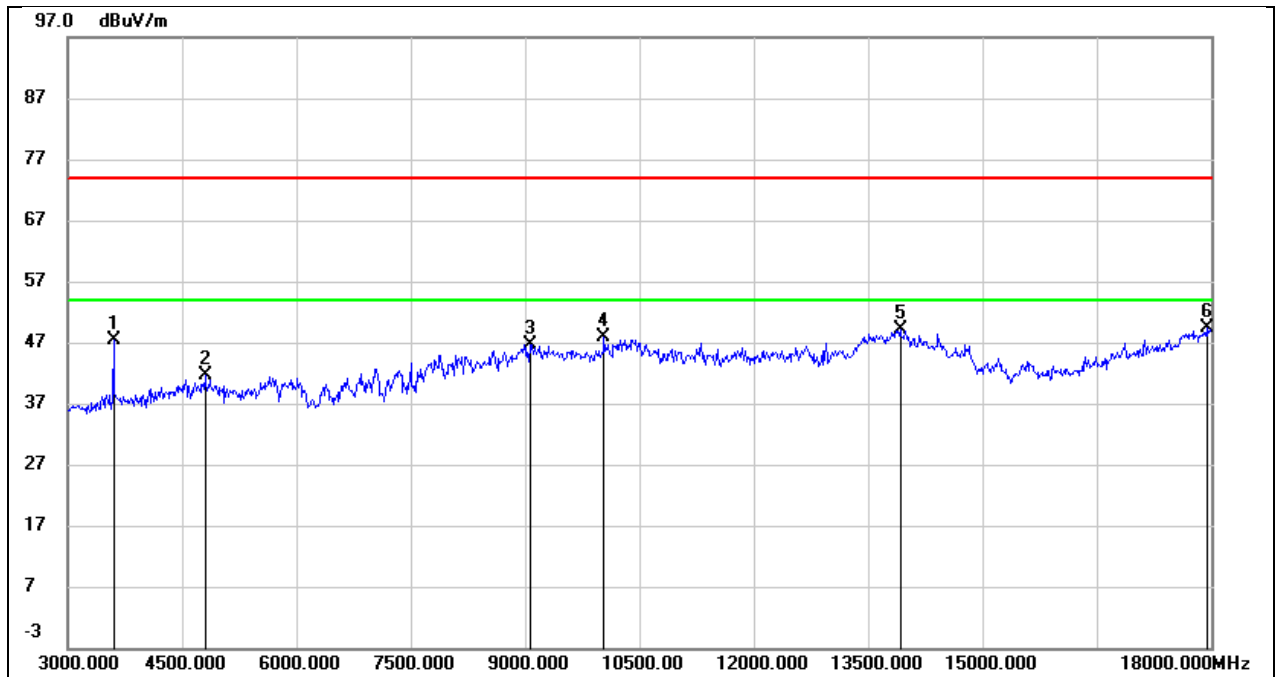


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	50.71	-3.28	47.43	74.00	-26.57	peak
2	4800.000	41.18	0.46	41.64	74.00	-32.36	peak
3	9060.000	35.92	10.82	46.74	74.00	-27.26	peak
4	10035.000	35.36	12.48	47.84	74.00	-26.16	peak
5	13920.000	26.42	22.71	49.13	74.00	-24.87	peak
6	17940.000	22.75	26.61	49.36	74.00	-24.64	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

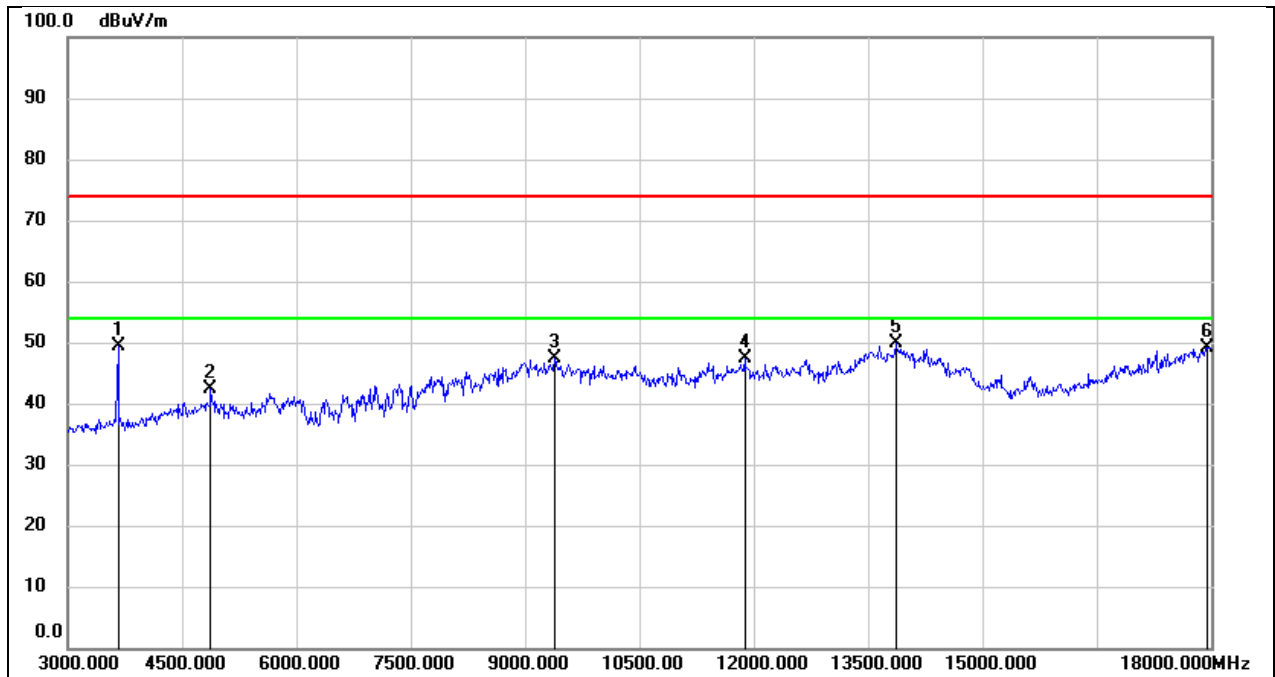


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	52.55	-3.17	49.38	74.00	-24.62	peak
2	4875.000	41.80	0.61	42.41	74.00	-31.59	peak
3	9390.000	36.98	10.43	47.41	74.00	-26.59	peak
4	11880.000	29.47	17.97	47.44	74.00	-26.56	peak
5	13860.000	27.12	22.68	49.80	74.00	-24.20	peak
6	17955.000	22.44	26.66	49.10	74.00	-24.90	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

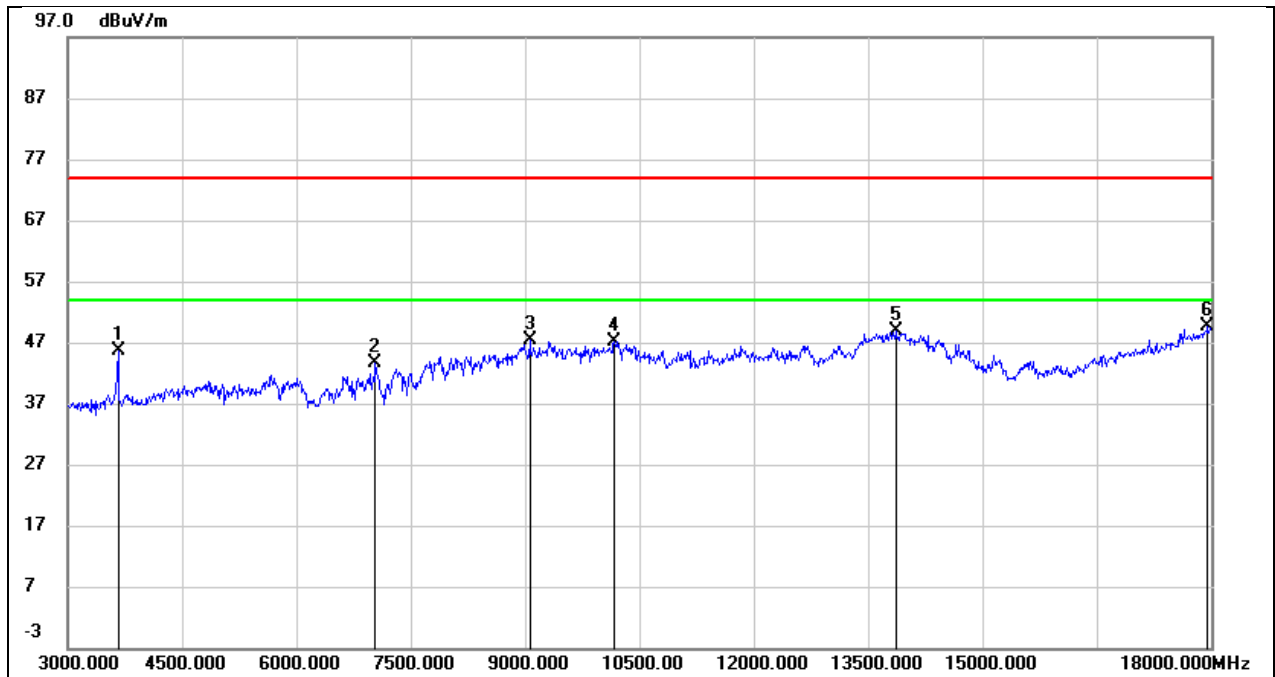


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	48.73	-3.17	45.56	74.00	-28.44	peak
2	7035.000	36.33	7.28	43.61	74.00	-30.39	peak
3	9060.000	36.62	10.82	47.44	74.00	-26.56	peak
4	10170.000	34.75	12.48	47.23	74.00	-26.77	peak
5	13860.000	26.14	22.68	48.82	74.00	-25.18	peak
6	17955.000	22.93	26.66	49.59	74.00	-24.41	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

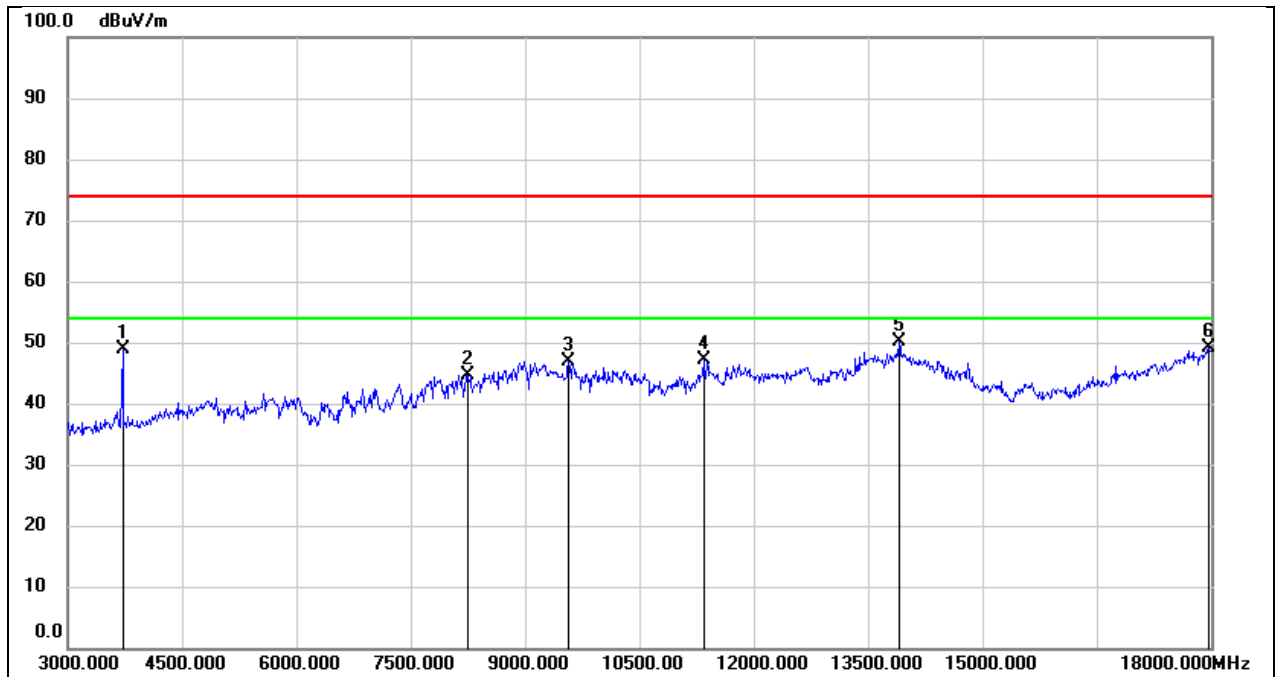


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	52.01	-3.05	48.96	74.00	-25.04	peak
2	8250.000	36.12	8.61	44.73	74.00	-29.27	peak
3	9570.000	35.98	10.98	46.96	74.00	-27.04	peak
4	11340.000	30.99	16.19	47.18	74.00	-26.82	peak
5	13905.000	27.35	22.70	50.05	74.00	-23.95	peak
6	17970.000	22.47	26.72	49.19	74.00	-24.81	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

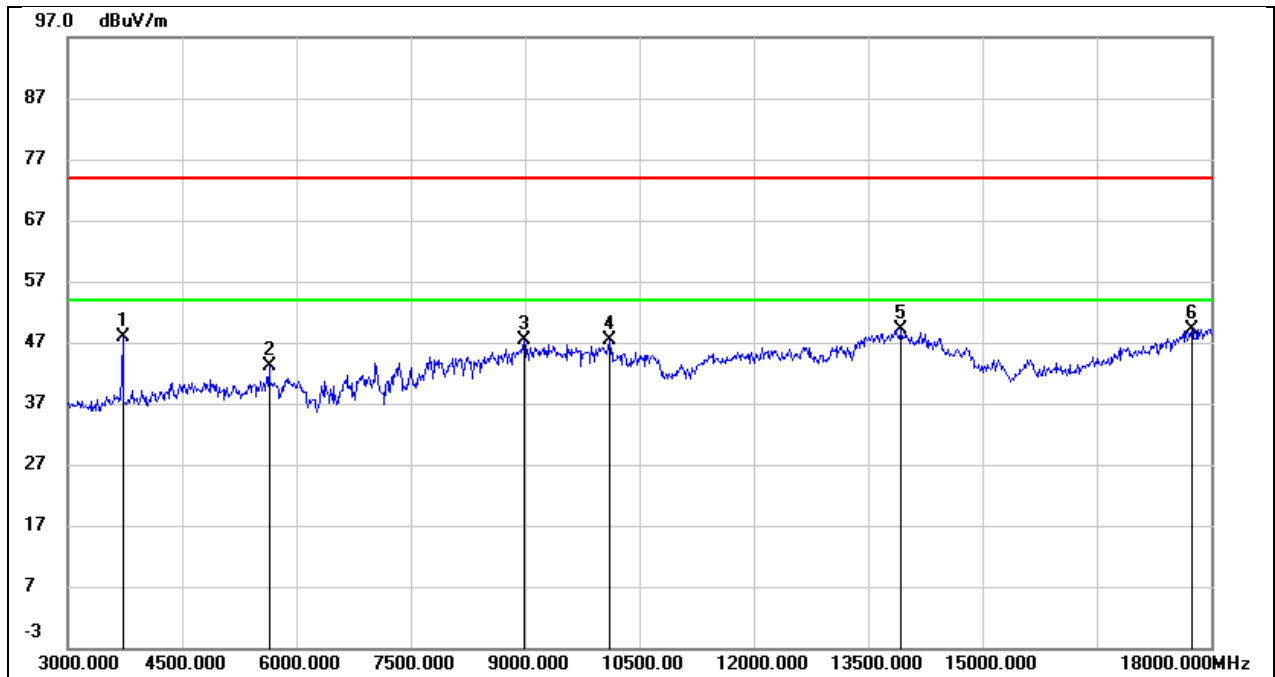


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	50.90	-3.05	47.85	74.00	-26.15	peak
2	5640.000	40.45	2.70	43.15	74.00	-30.85	peak
3	8985.000	36.38	10.97	47.35	74.00	-26.65	peak
4	10110.000	34.80	12.47	47.27	74.00	-26.73	peak
5	13935.000	26.34	22.72	49.06	74.00	-24.94	peak
6	17745.000	23.62	25.58	49.20	74.00	-24.80	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

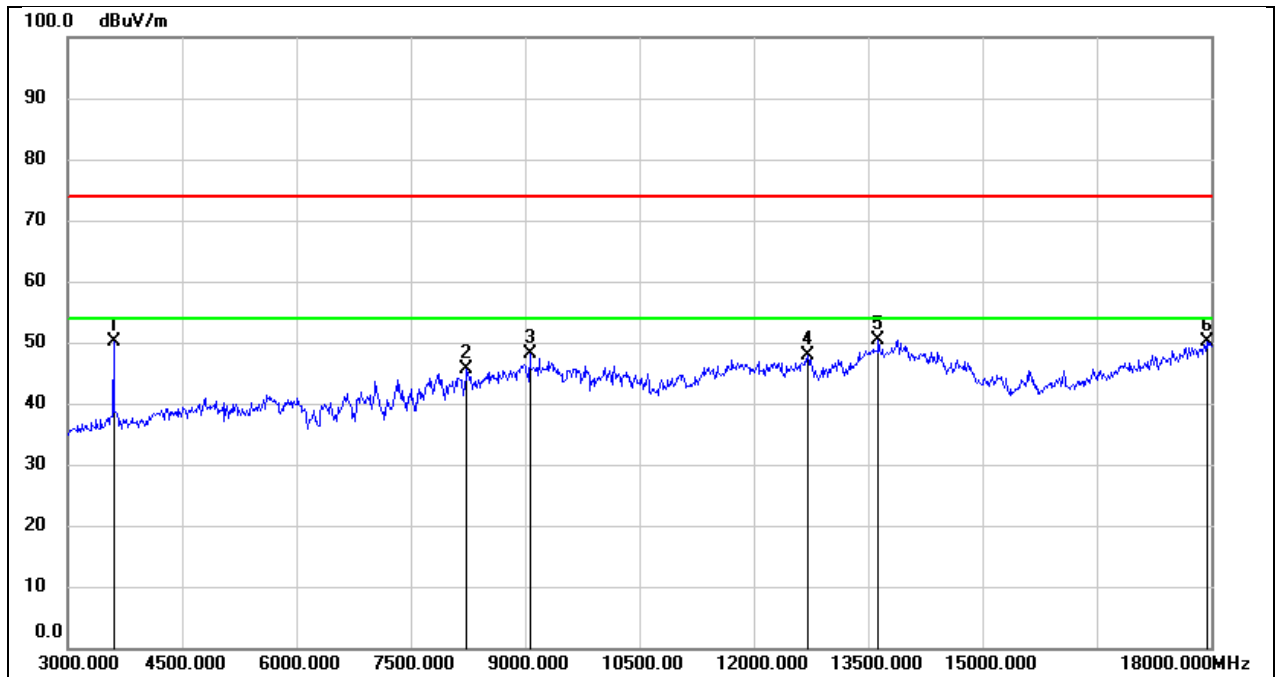


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	53.37	-3.28	50.09	74.00	-23.91	peak
2	8235.000	37.01	8.70	45.71	74.00	-28.29	peak
3	9060.000	37.21	10.82	48.03	74.00	-25.97	peak
4	12705.000	29.19	18.66	47.85	74.00	-26.15	peak
5	13635.000	28.52	21.83	50.35	74.00	-23.65	peak
6	17940.000	23.43	26.61	50.04	74.00	-23.96	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

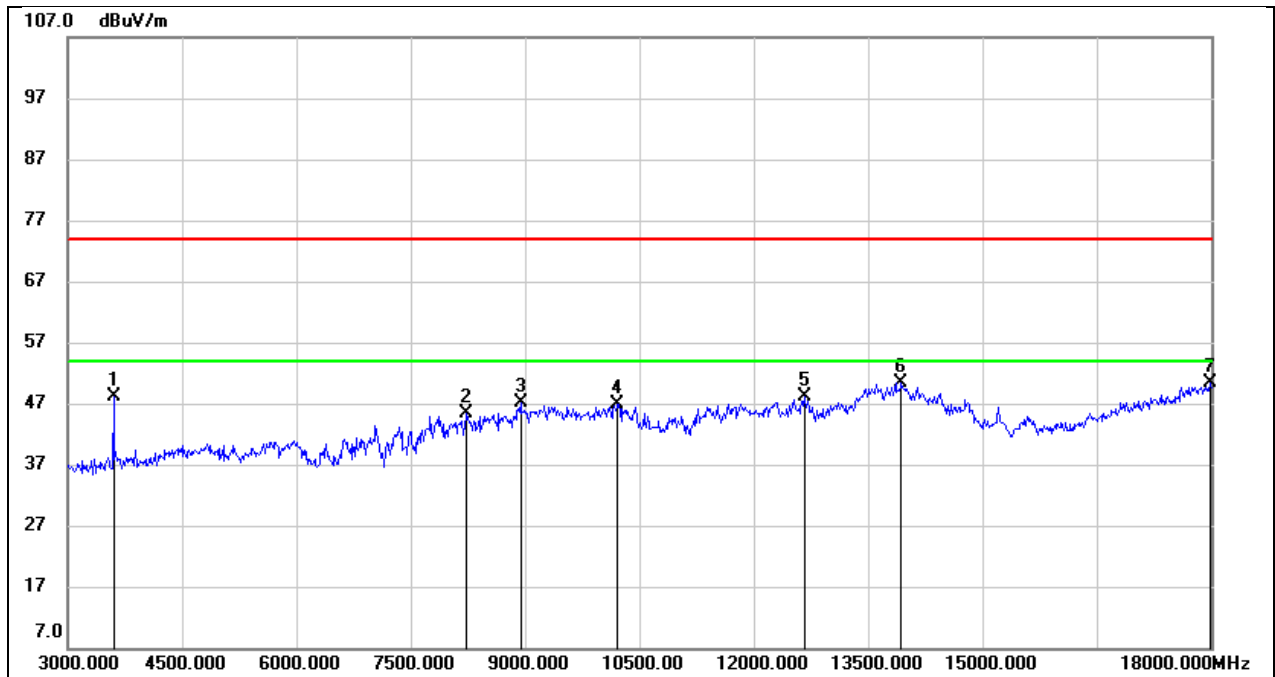


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	51.32	-3.28	48.04	74.00	-25.96	peak
2	8235.000	36.57	8.70	45.27	74.00	-28.73	peak
3	8940.000	36.86	10.35	47.21	74.00	-26.79	peak
4	10215.000	34.42	12.56	46.98	74.00	-27.02	peak
5	12660.000	29.75	18.49	48.24	74.00	-25.76	peak
6	13935.000	27.72	22.72	50.44	74.00	-23.56	peak
7	17985.000	23.53	26.77	50.30	74.00	-23.70	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

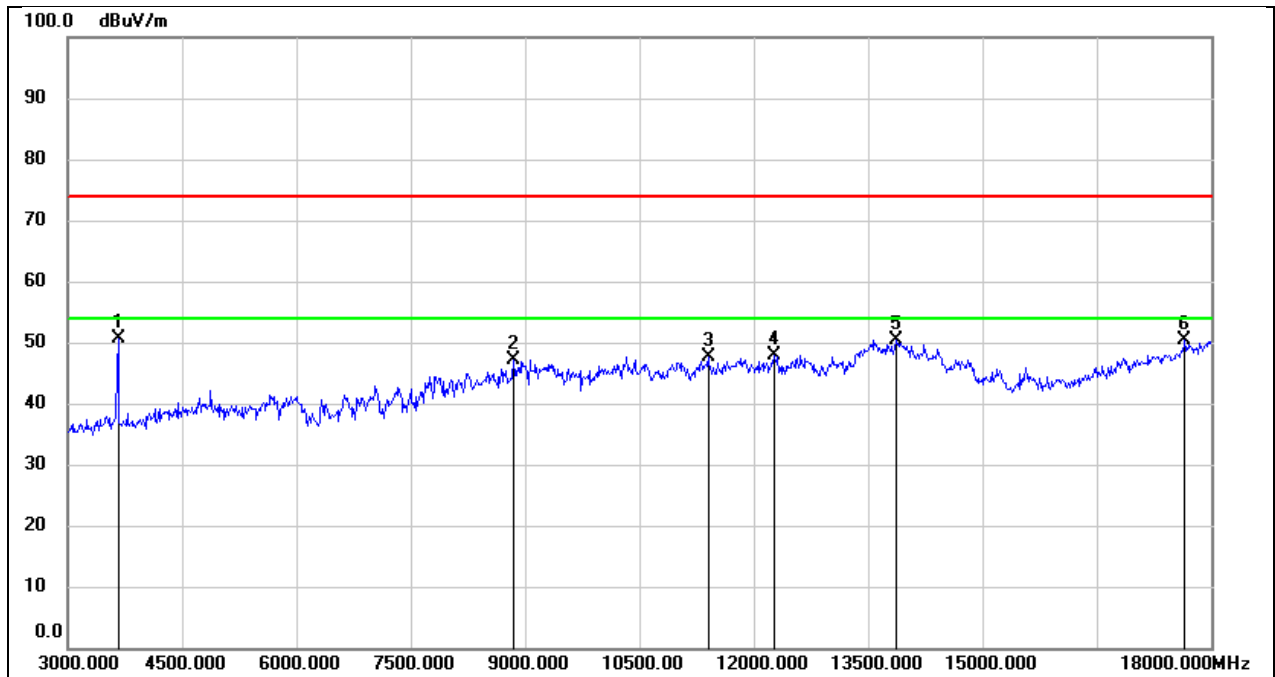


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	53.78	-3.17	50.61	74.00	-23.39	peak
2	8850.000	38.06	9.11	47.17	74.00	-26.83	peak
3	11400.000	31.06	16.54	47.60	74.00	-26.40	peak
4	12270.000	29.34	18.55	47.89	74.00	-26.11	peak
5	13875.000	27.69	22.68	50.37	74.00	-23.63	peak
6	17655.000	25.58	24.75	50.33	74.00	-23.67	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

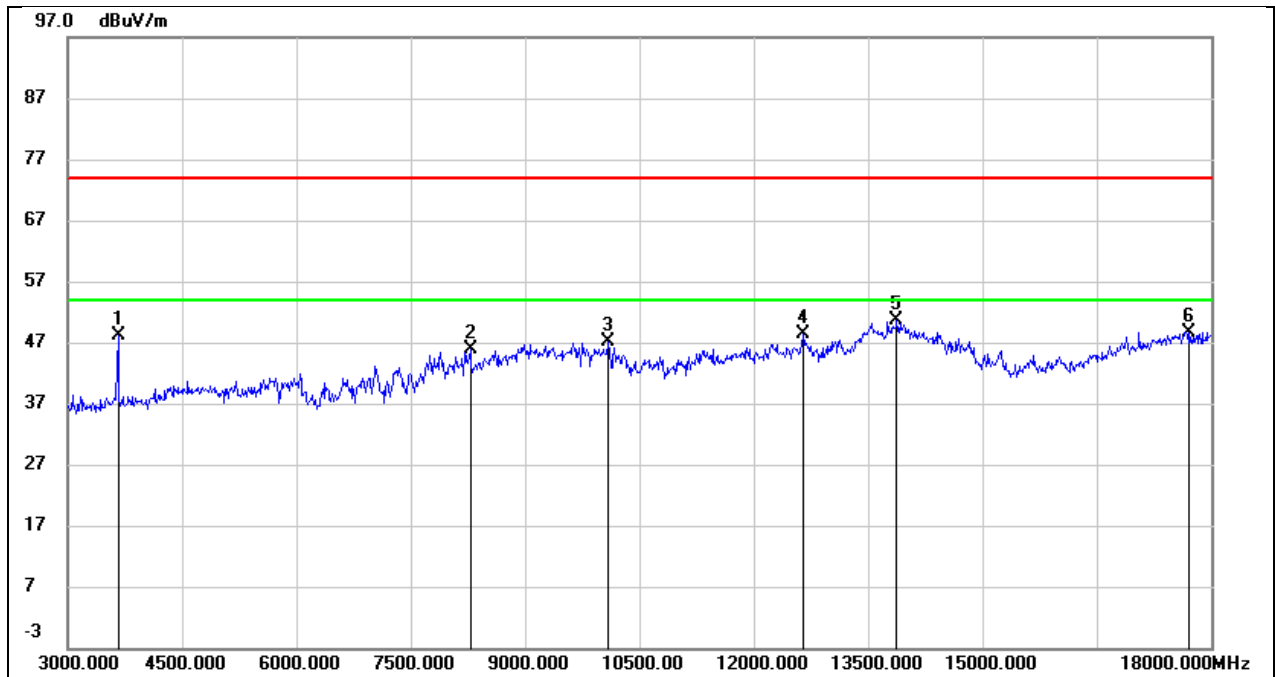


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	51.22	-3.17	48.05	74.00	-25.95	peak
2	8280.000	37.33	8.46	45.79	74.00	-28.21	peak
3	10095.000	34.76	12.48	47.24	74.00	-26.76	peak
4	12645.000	30.01	18.44	48.45	74.00	-25.55	peak
5	13875.000	27.87	22.68	50.55	74.00	-23.45	peak
6	17715.000	23.43	25.31	48.74	74.00	-25.26	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

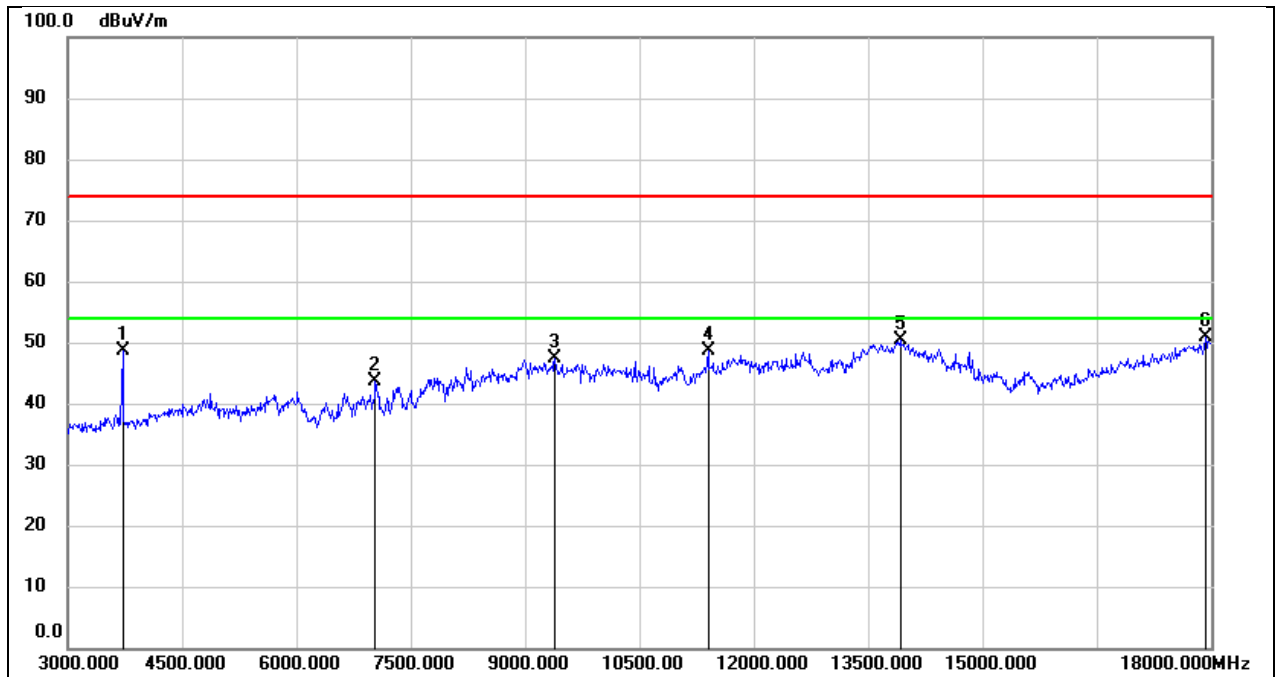


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	51.57	-3.05	48.52	74.00	-25.48	peak
2	7035.000	36.32	7.28	43.60	74.00	-30.40	peak
3	9390.000	37.07	10.43	47.50	74.00	-26.50	peak
4	11400.000	31.99	16.54	48.53	74.00	-25.47	peak
5	13920.000	27.59	22.71	50.30	74.00	-23.70	peak
6	17925.000	24.44	26.55	50.99	74.00	-23.01	peak

Test Mode:	BLE 125kHz PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

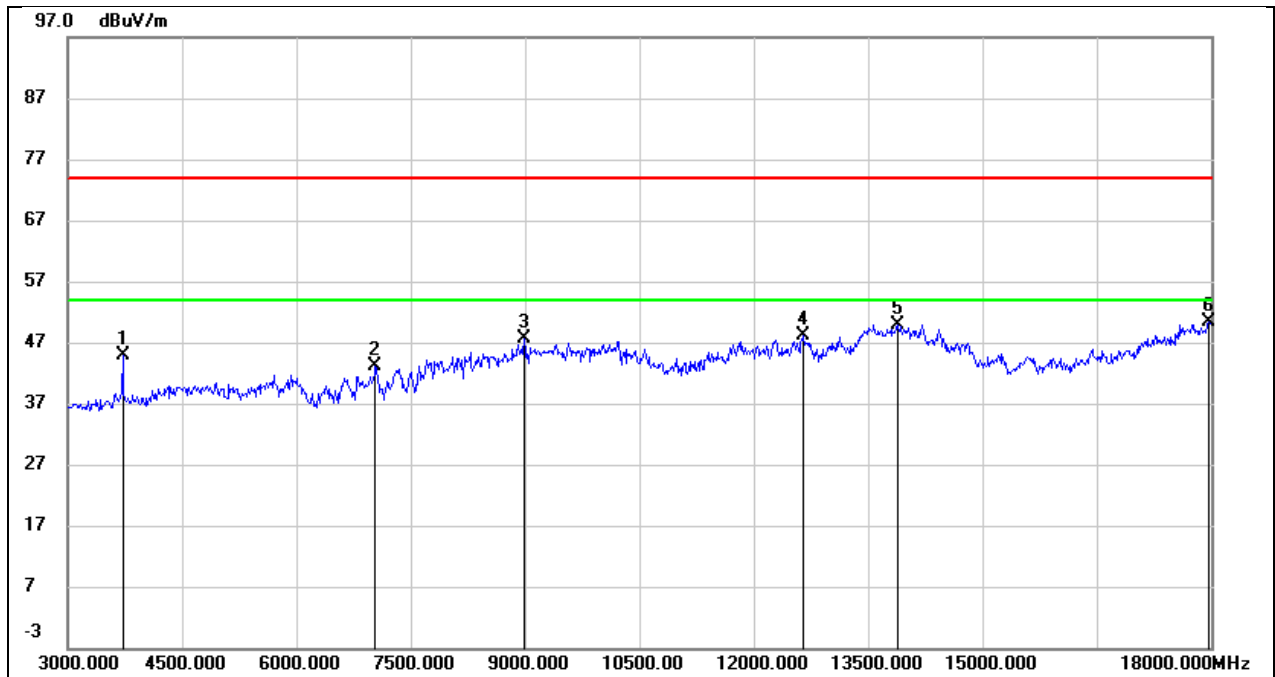


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	47.95	-3.05	44.90	74.00	-29.10	peak
2	7035.000	35.81	7.28	43.09	74.00	-30.91	peak
3	8985.000	36.54	10.97	47.51	74.00	-26.49	peak
4	12645.000	29.59	18.44	48.03	74.00	-25.97	peak
5	13890.000	27.27	22.69	49.96	74.00	-24.04	peak
6	17970.000	23.75	26.72	50.47	74.00	-23.53	peak

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

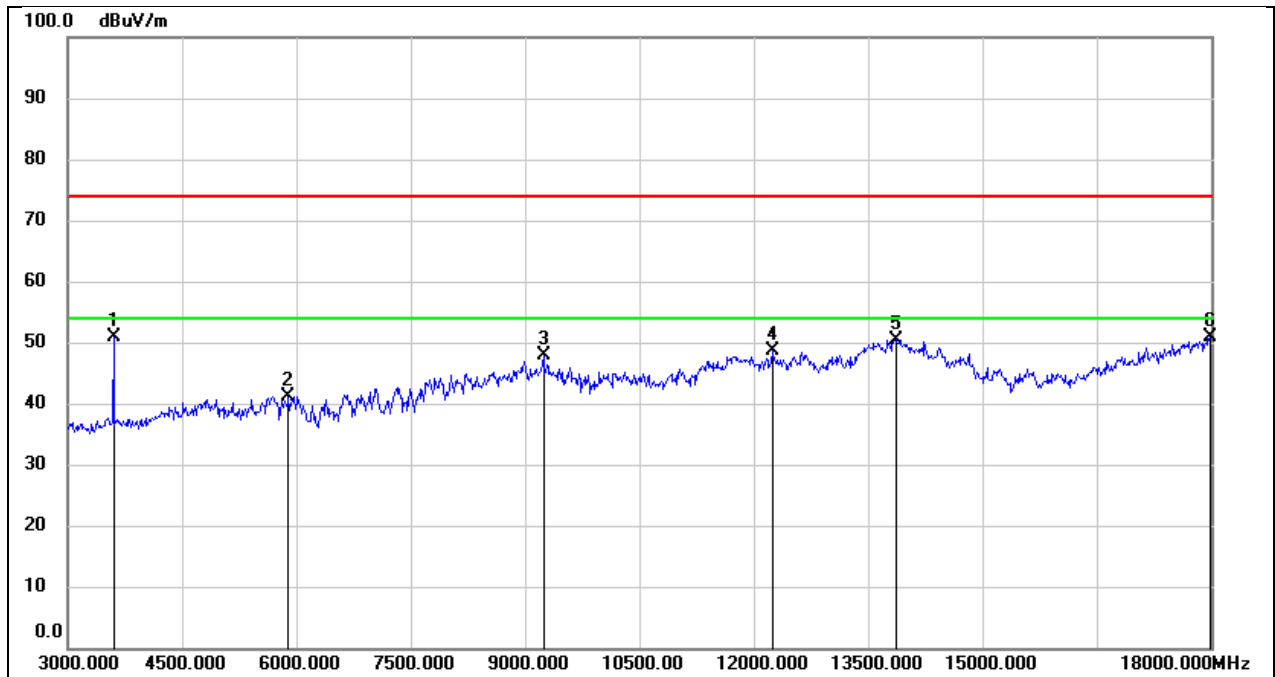


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	54.15	-3.28	50.87	74.00	-23.13	peak
2	5895.000	38.58	2.67	41.25	74.00	-32.75	peak
3	9240.000	37.84	10.10	47.94	74.00	-26.06	peak
4	12240.000	30.08	18.46	48.54	74.00	-25.46	peak
5	13875.000	27.75	22.68	50.43	74.00	-23.57	peak
6	17985.000	24.21	26.77	50.98	74.00	-23.02	peak

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

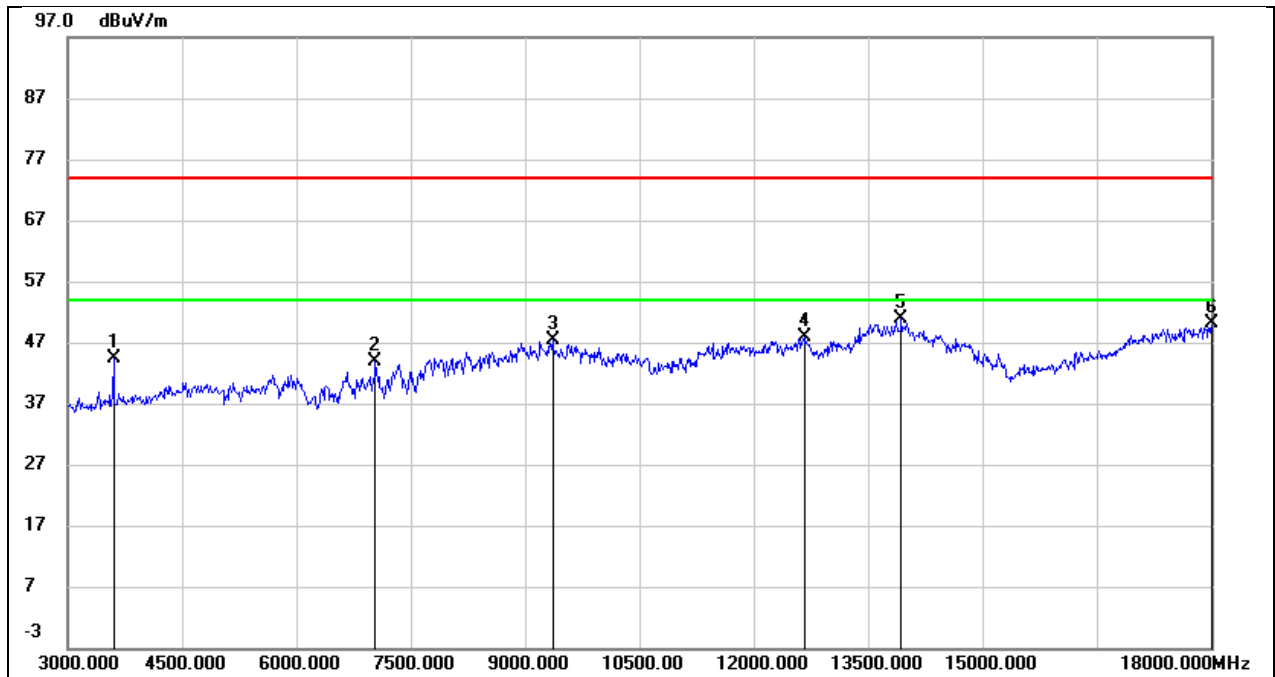


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3600.000	47.66	-3.28	44.38	74.00	-29.62	peak
2	7035.000	36.66	7.28	43.94	74.00	-30.06	peak
3	9360.000	36.96	10.36	47.32	74.00	-26.68	peak
4	12660.000	29.48	18.49	47.97	74.00	-26.03	peak
5	13935.000	28.13	22.72	50.85	74.00	-23.15	peak
6	18000.000	23.21	26.83	50.04	74.00	-23.96	peak

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

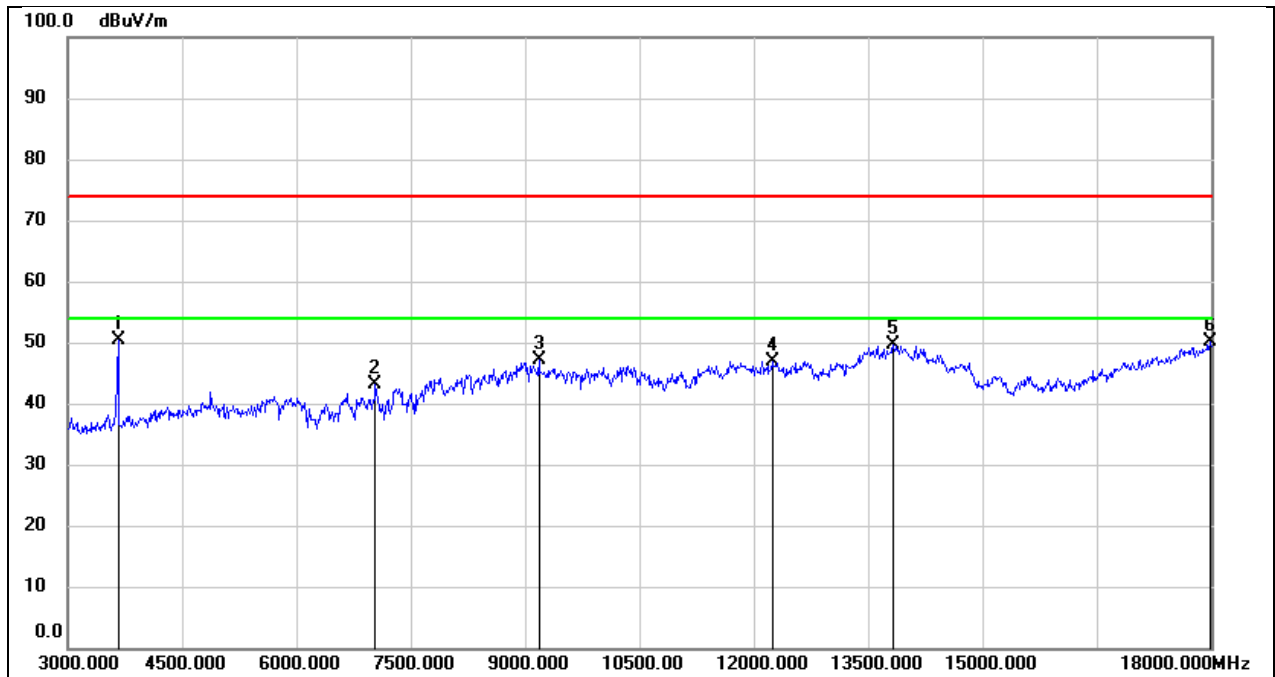


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	53.66	-3.17	50.49	74.00	-23.51	peak
2	7035.000	35.95	7.28	43.23	74.00	-30.77	peak
3	9180.000	37.10	10.13	47.23	74.00	-26.77	peak
4	12240.000	28.52	18.46	46.98	74.00	-27.02	peak
5	13830.000	27.01	22.66	49.67	74.00	-24.33	peak
6	17985.000	23.38	26.77	50.15	74.00	-23.85	peak

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

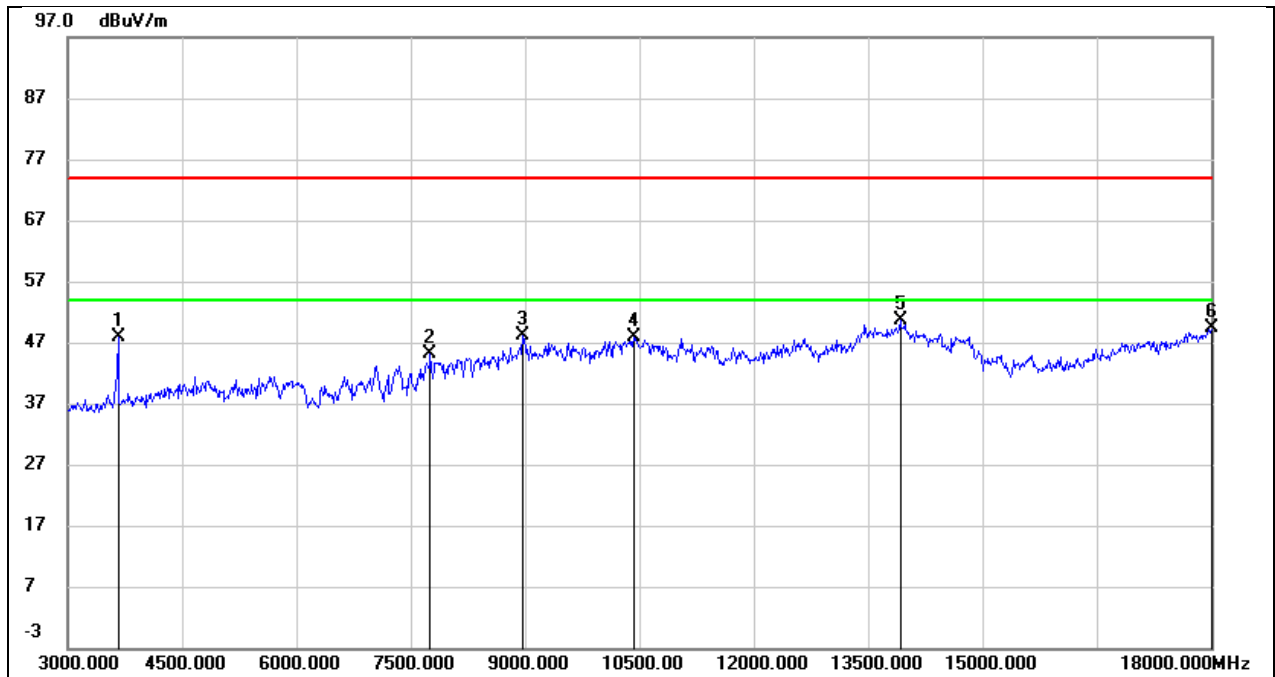


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3660.000	50.94	-3.17	47.77	74.00	-26.23	peak
2	7755.000	37.74	7.38	45.12	74.00	-28.88	peak
3	8970.000	37.40	10.75	48.15	74.00	-25.85	peak
4	10425.000	34.33	13.51	47.84	74.00	-26.16	peak
5	13920.000	27.82	22.71	50.53	74.00	-23.47	peak
6	18000.000	22.64	26.83	49.47	74.00	-24.53	peak

Test Mode:	BLE 500kHz PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

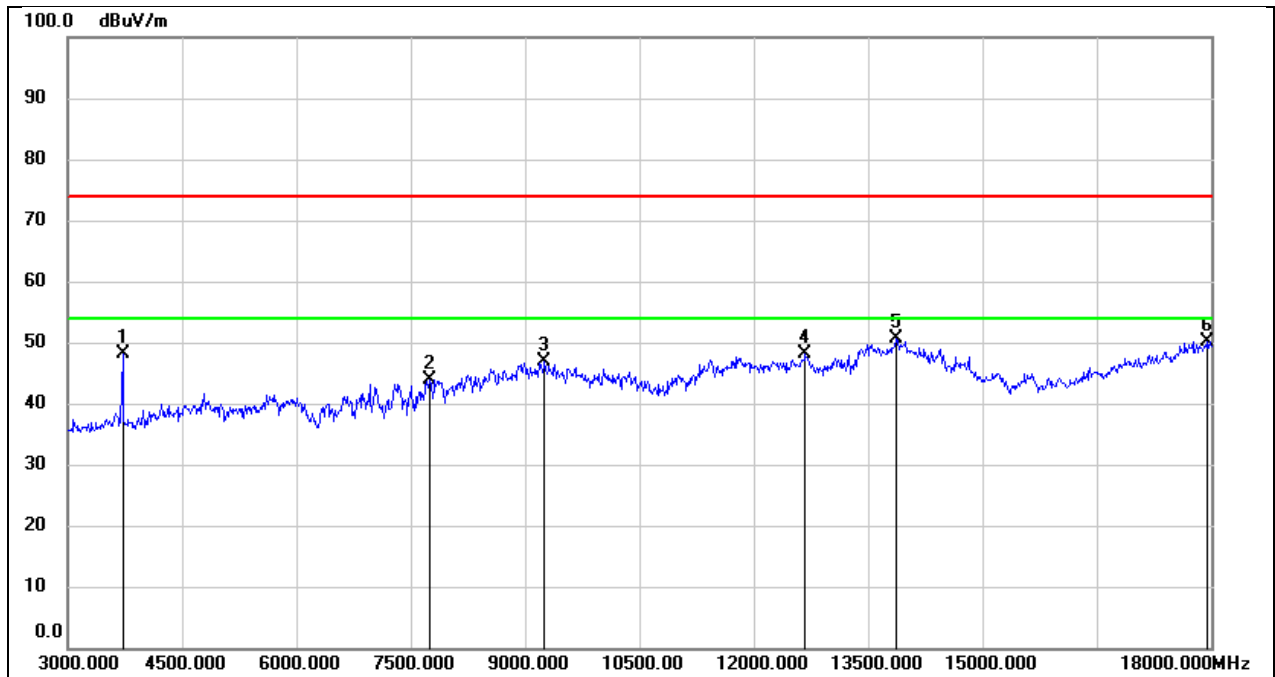

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	51.15	-3.05	48.10	74.00	-25.90	peak
2	7755.000	36.59	7.38	43.97	74.00	-30.03	peak
3	9255.000	36.73	10.14	46.87	74.00	-27.13	peak
4	12675.000	29.57	18.54	48.11	74.00	-25.89	peak
5	13860.000	27.94	22.68	50.62	74.00	-23.38	peak
6	17955.000	23.46	26.66	50.12	74.00	-23.88	peak


Test Mode:	BLE 500kHz PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

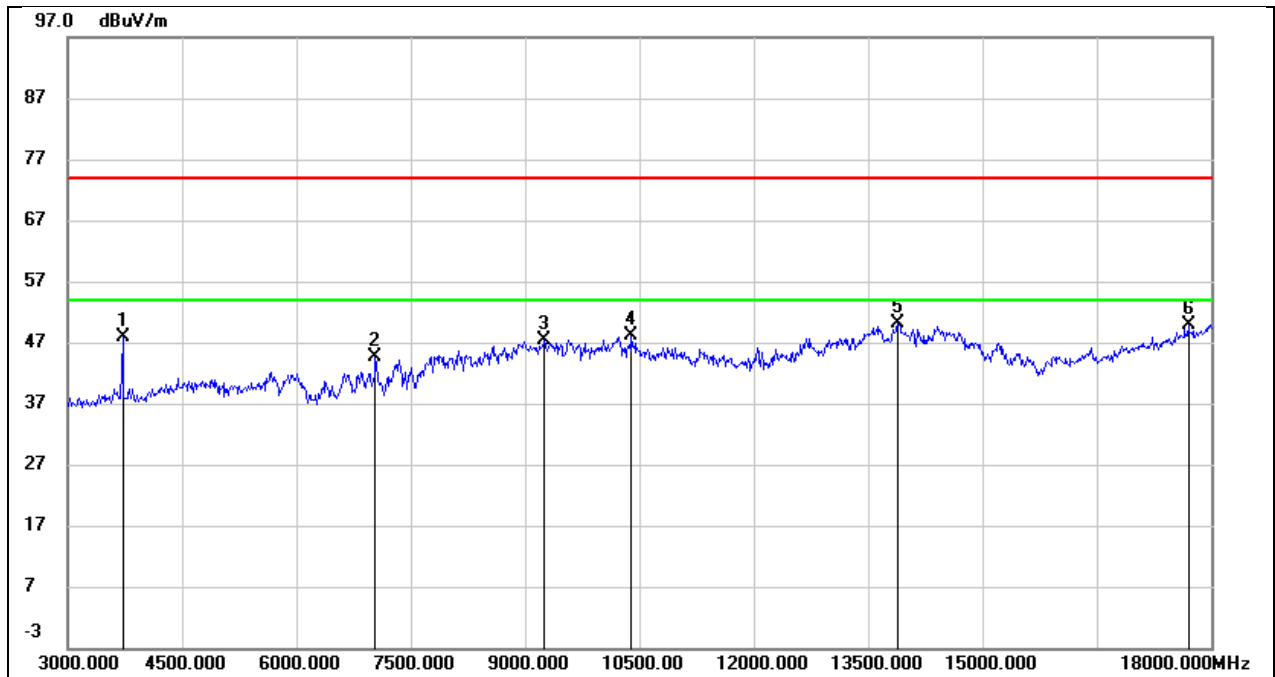

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3720.000	50.89	-3.05	47.84	74.00	-26.16	peak
2	7035.000	37.30	7.28	44.58	74.00	-29.42	peak
3	9255.000	37.28	10.14	47.42	74.00	-26.58	peak
4	10395.000	34.69	13.43	48.12	74.00	-25.88	peak
5	13890.000	27.35	22.69	50.04	74.00	-23.96	peak
6	17700.000	24.79	25.17	49.96	74.00	-24.04	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

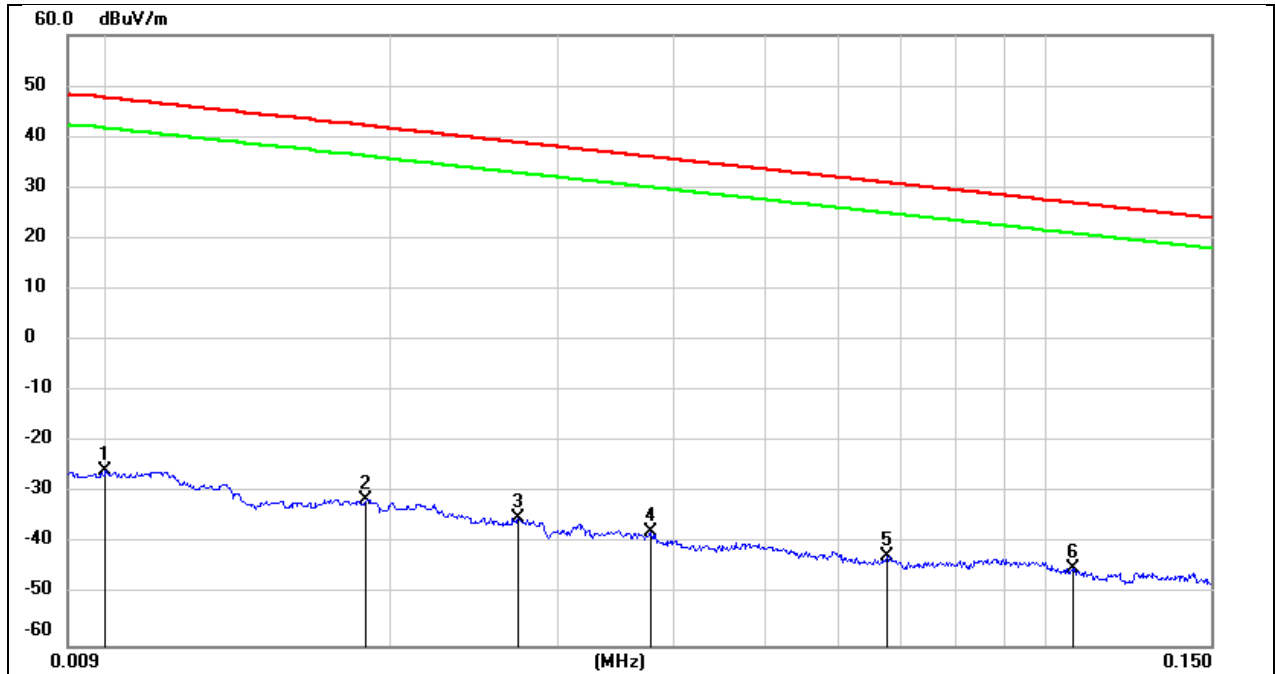


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	75.72	-101.40	-25.68	47.60	-73.28	peak
2	0.0188	70.14	-101.35	-31.21	42.12	-73.33	peak
3	0.0273	66.49	-101.38	-34.89	38.88	-73.77	peak
4	0.0378	63.75	-101.42	-37.67	36.05	-73.72	peak
5	0.0675	59.14	-101.56	-42.42	31.02	-73.44	peak
6	0.1067	56.88	-101.77	-44.89	27.04	-71.93	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

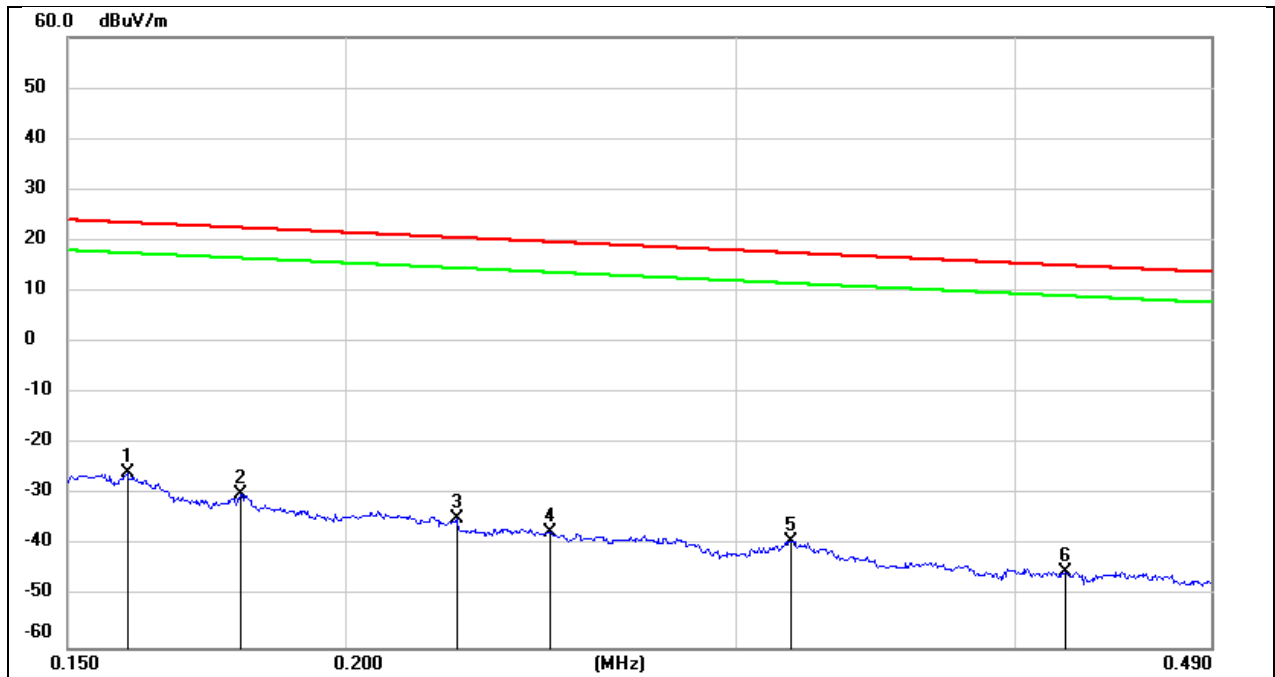

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	75.86	-101.65	-25.79	23.55	-49.34	peak
2	0.1794	71.77	-101.68	-29.91	22.53	-52.44	peak
3	0.2245	66.96	-101.75	-34.79	20.58	-55.37	peak
4	0.2472	64.45	-101.80	-37.35	19.74	-57.09	peak
5	0.3173	62.76	-101.87	-39.11	17.57	-56.68	peak
6	0.4218	56.87	-101.98	-45.11	15.10	-60.21	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

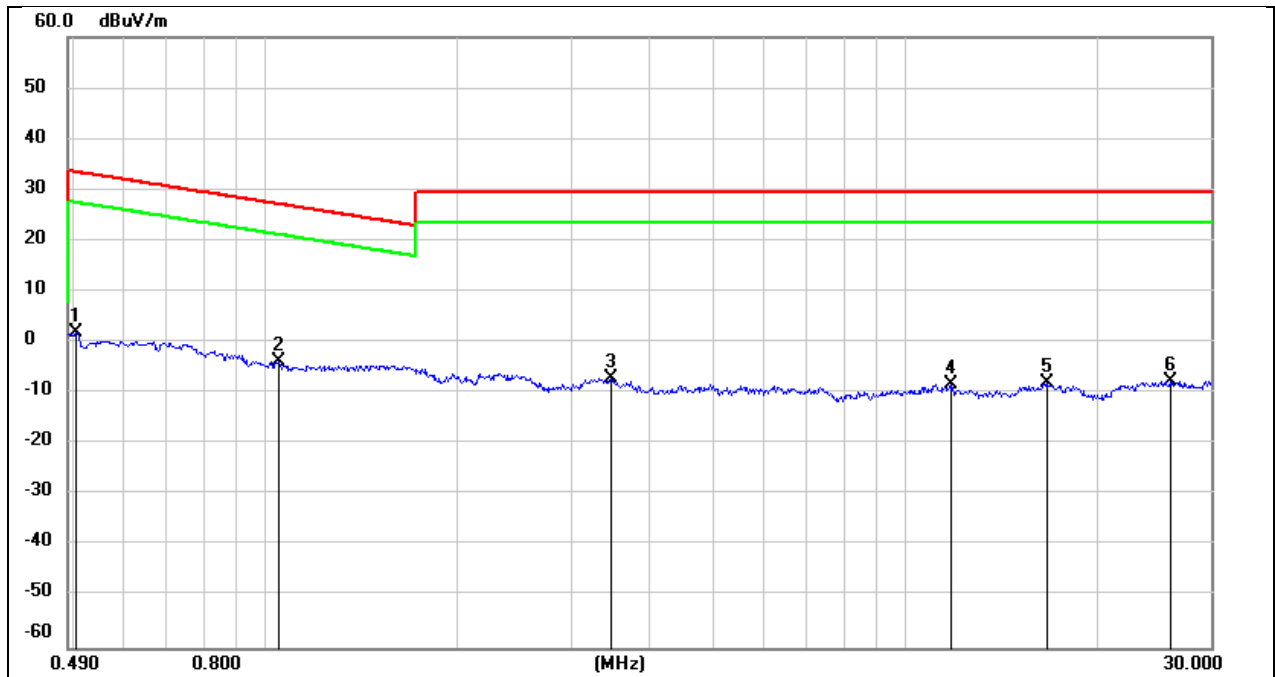

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-31.70	peak
2	1.0443	58.53	-62.25	-3.72	27.23	-30.95	peak
3	3.4704	54.35	-61.46	-7.11	29.54	-36.65	peak
4	11.7628	52.53	-60.88	-8.35	29.54	-37.89	peak
5	16.6021	53.02	-60.96	-7.94	29.54	-37.48	peak
6	25.8978	52.76	-60.36	-7.60	29.54	-37.14	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

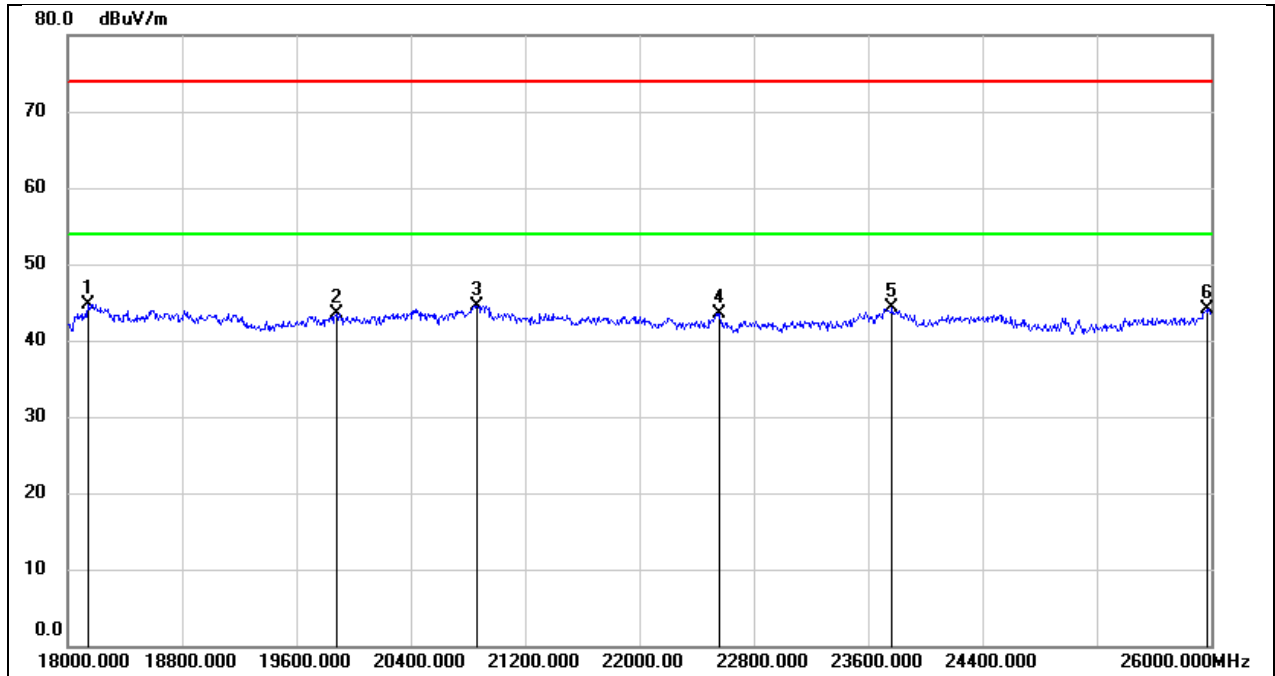

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	19880.000	48.86	-5.36	43.50	74.00	-30.50	peak
3	20864.000	49.60	-5.00	44.60	74.00	-29.40	peak
4	22560.000	47.28	-3.83	43.45	74.00	-30.55	peak
5	23768.000	47.56	-3.16	44.40	74.00	-29.60	peak
6	25968.000	45.13	-1.00	44.13	74.00	-29.87	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

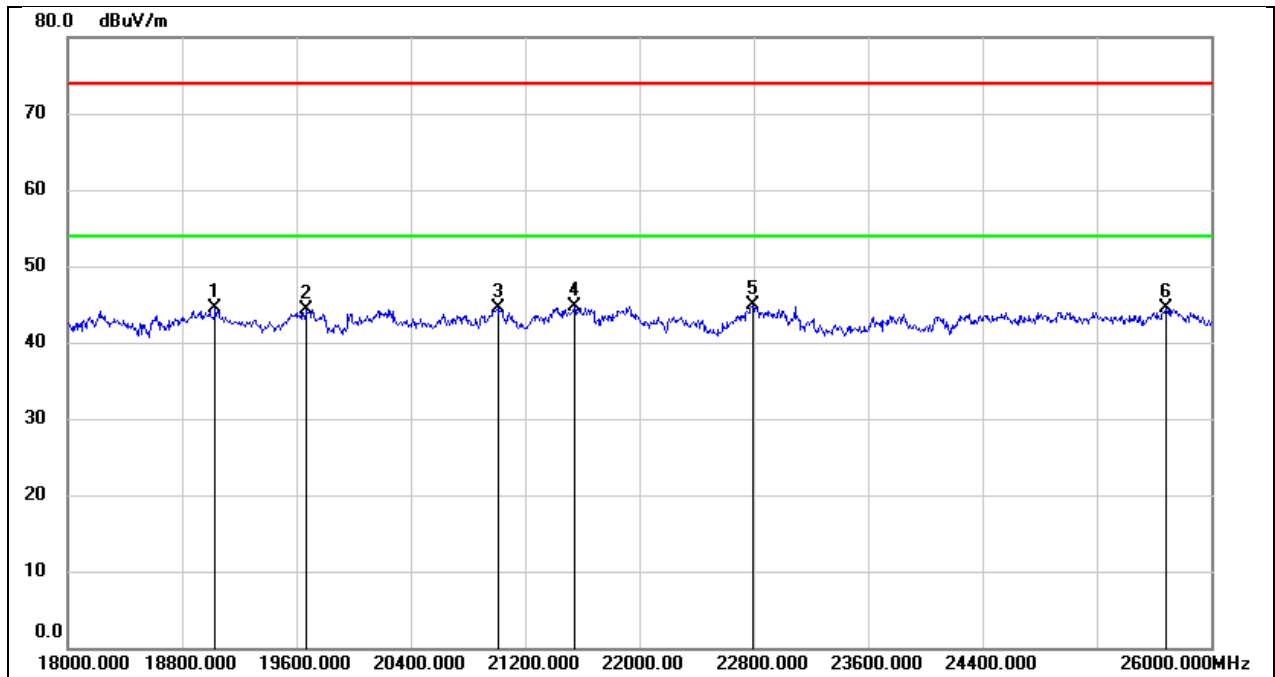

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19032.000	49.68	-5.27	44.41	74.00	-29.59	peak
2	19672.000	49.62	-5.34	44.28	74.00	-29.72	peak
3	21008.000	49.32	-4.88	44.44	74.00	-29.56	peak
4	21544.000	49.26	-4.63	44.63	74.00	-29.37	peak
5	22792.000	48.61	-3.65	44.96	74.00	-29.04	peak
6	25688.000	45.31	-0.90	44.41	74.00	-29.59	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

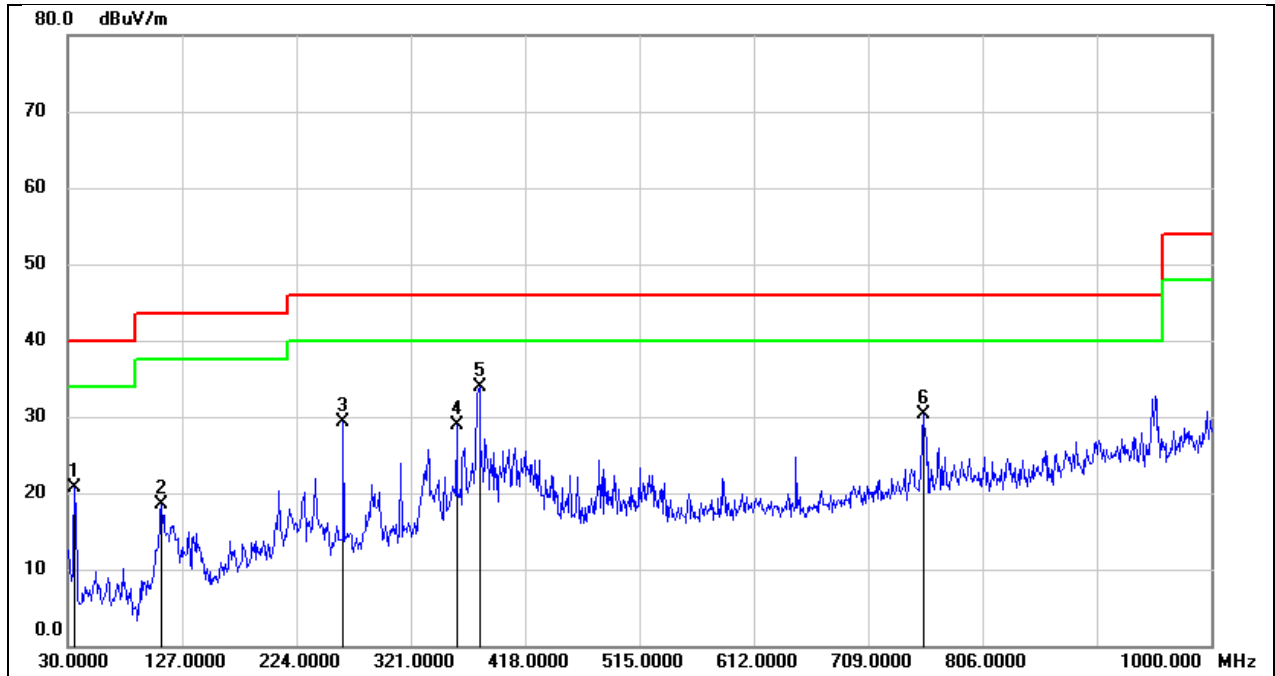

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	35.67	-14.88	20.79	40.00	-19.21	QP
2	109.5400	33.93	-15.46	18.47	43.50	-25.03	QP
3	263.7700	43.09	-13.74	29.35	46.00	-16.65	QP
4	359.8000	38.59	-9.60	28.99	46.00	-17.01	QP
5	379.2000	43.81	-9.82	33.99	46.00	-12.01	QP
6	755.5600	33.77	-3.49	30.28	46.00	-15.72	QP

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC120V_60Hz

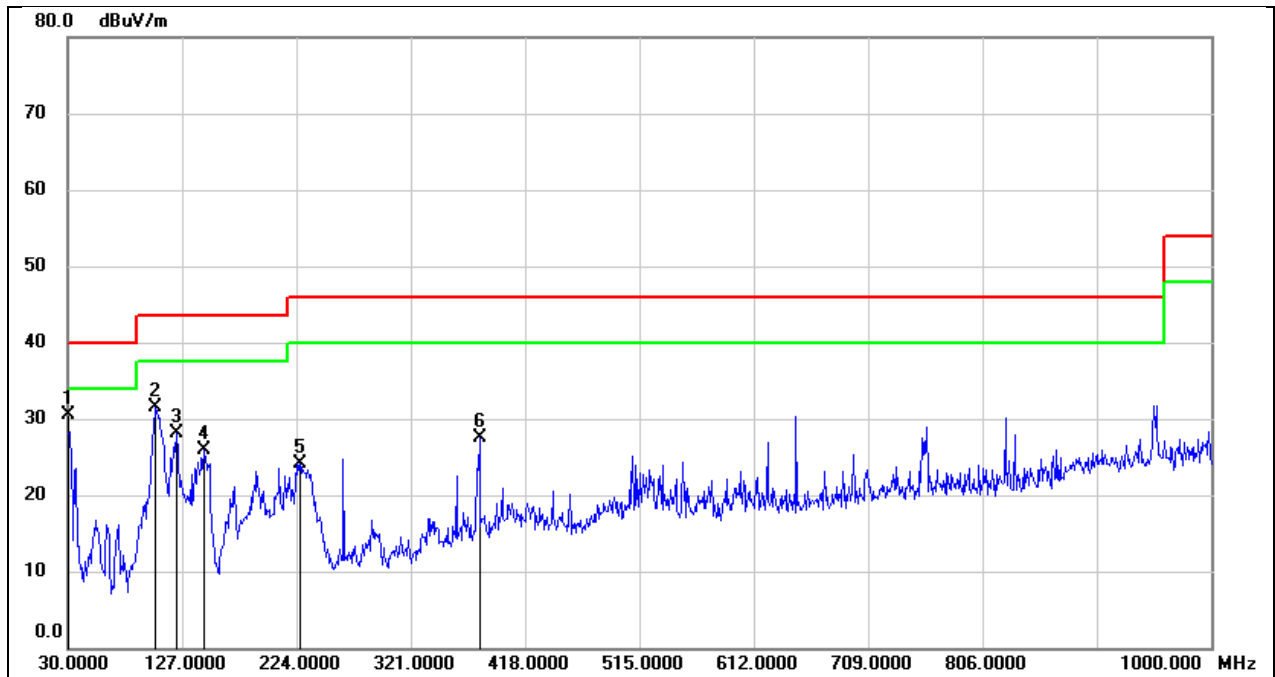

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	44.55	-14.04	30.51	40.00	-9.49	QP
2	104.6900	47.36	-15.81	31.55	43.50	-11.95	QP
3	122.1500	42.77	-14.75	28.02	43.50	-15.48	QP
4	145.4299	39.56	-13.70	25.86	43.50	-17.64	QP
5	226.9100	37.43	-13.32	24.11	46.00	-21.89	QP
6	379.2000	37.24	-9.82	27.42	46.00	-18.58	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a).


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

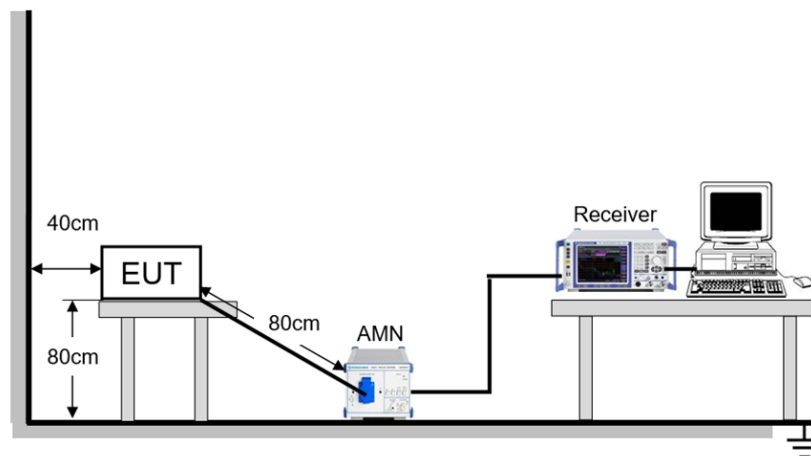

TEST ENVIRONMENT


Temperature	24.3°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	June 15, 2024	Test By	Fanny Huang
-----------	---------------	---------	-------------

TEST RESULTS

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

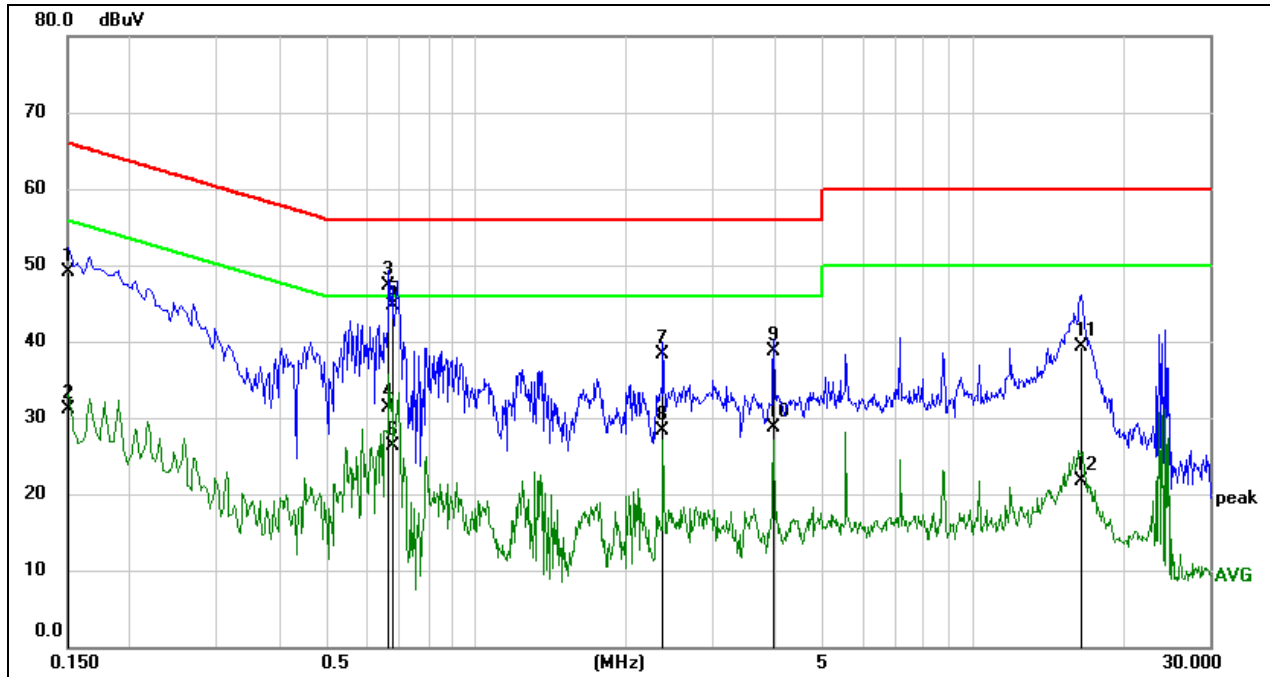


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1501	38.78	10.34	49.12	65.99	-16.87	QP
2	0.1501	20.83	10.34	31.17	55.99	-24.82	AVG
3	0.6695	37.01	10.23	47.24	56.00	-8.76	QP
4	0.6695	21.14	10.23	31.37	46.00	-14.63	AVG
5	0.6856	34.56	10.23	44.79	56.00	-11.21	QP
6	0.6856	16.04	10.23	26.27	46.00	-19.73	AVG
7	2.3799	28.37	10.00	38.37	56.00	-17.63	QP
8	2.3799	18.35	10.00	28.35	46.00	-17.65	AVG
9	3.9665	28.54	10.22	38.76	56.00	-17.24	QP
10	3.9665	18.47	10.22	28.69	46.00	-17.31	AVG
11	16.4700	28.72	10.63	39.35	60.00	-20.65	QP
12	16.4700	11.08	10.63	21.71	50.00	-28.29	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

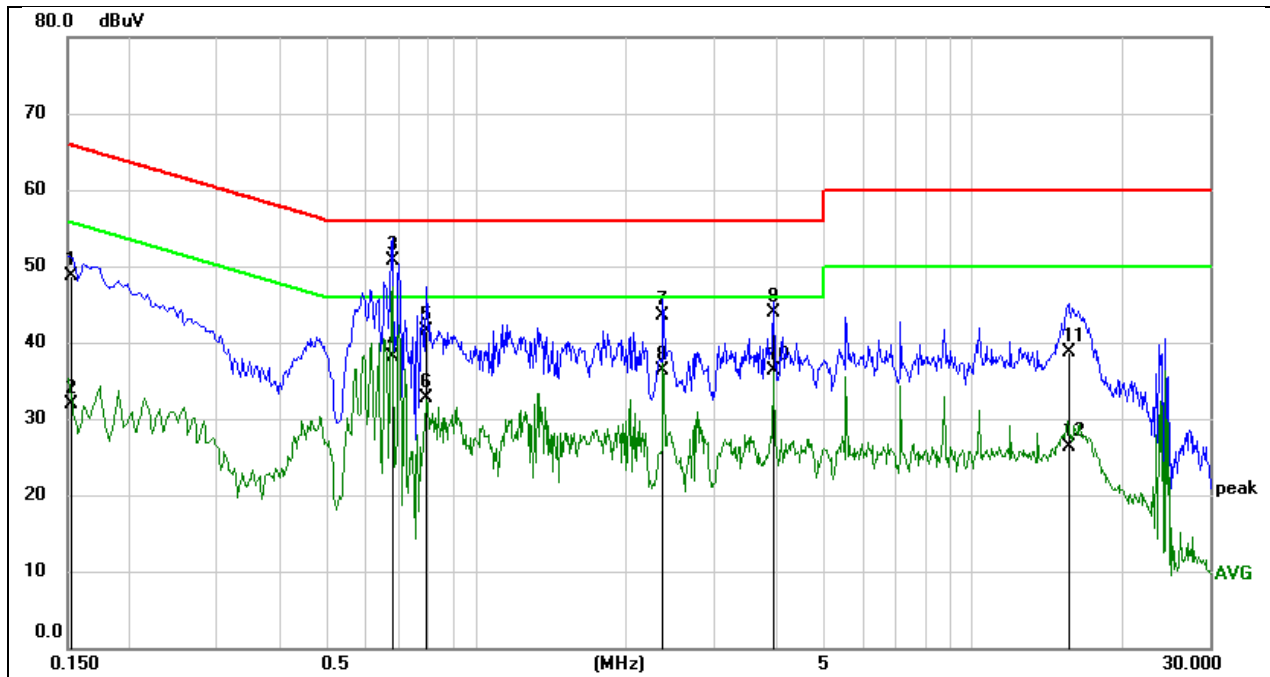

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1526	38.48	10.23	48.71	65.86	-17.15	QP
2	0.1526	21.76	10.23	31.99	55.86	-23.87	AVG
3	0.6817	40.77	10.03	50.80	56.00	-5.20	QP
4	0.6817	27.98	10.03	38.01	46.00	-7.99	AVG
5	0.7948	31.55	9.97	41.52	56.00	-14.48	QP
6	0.7948	22.78	9.97	32.75	46.00	-13.25	AVG
7	2.3807	33.50	10.10	43.60	56.00	-12.40	QP
8	2.3807	26.19	10.10	36.29	46.00	-9.71	AVG
9	3.9678	33.52	10.33	43.85	56.00	-12.15	QP
10	3.9678	26.04	10.33	36.37	46.00	-9.63	AVG
11	15.5926	27.96	10.68	38.64	60.00	-21.36	QP
12	15.5926	15.60	10.68	26.28	50.00	-23.72	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

Appendix A: Duty Cycle

Test Mode	M1 (msec)	M2 (msec)	M3 (msec)	M3-M2 (msec)	M3-M1 (msec)
125K	5.475	6.228	23.27	17.042	17.795
500K	0.321	1.074	5.622	4.548	5.301
BLE 1M	0.582	1.256	3.383	2.127	2.801
BLE 2M	0.503	1.609	2.678	1.069	2.175

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
125K	17.042	17.795	0.9577	95.77	0.19	0.06	0.1
500K	4.548	5.301	0.8580	85.80	0.67	0.22	1
BLE 1M	2.127	2.801	0.7594	75.94	1.20	0.47	1
BLE 2M	1.069	2.175	0.4915	49.15	3.08	0.94	1

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

On Time=M3-M2

Period=M3-M1

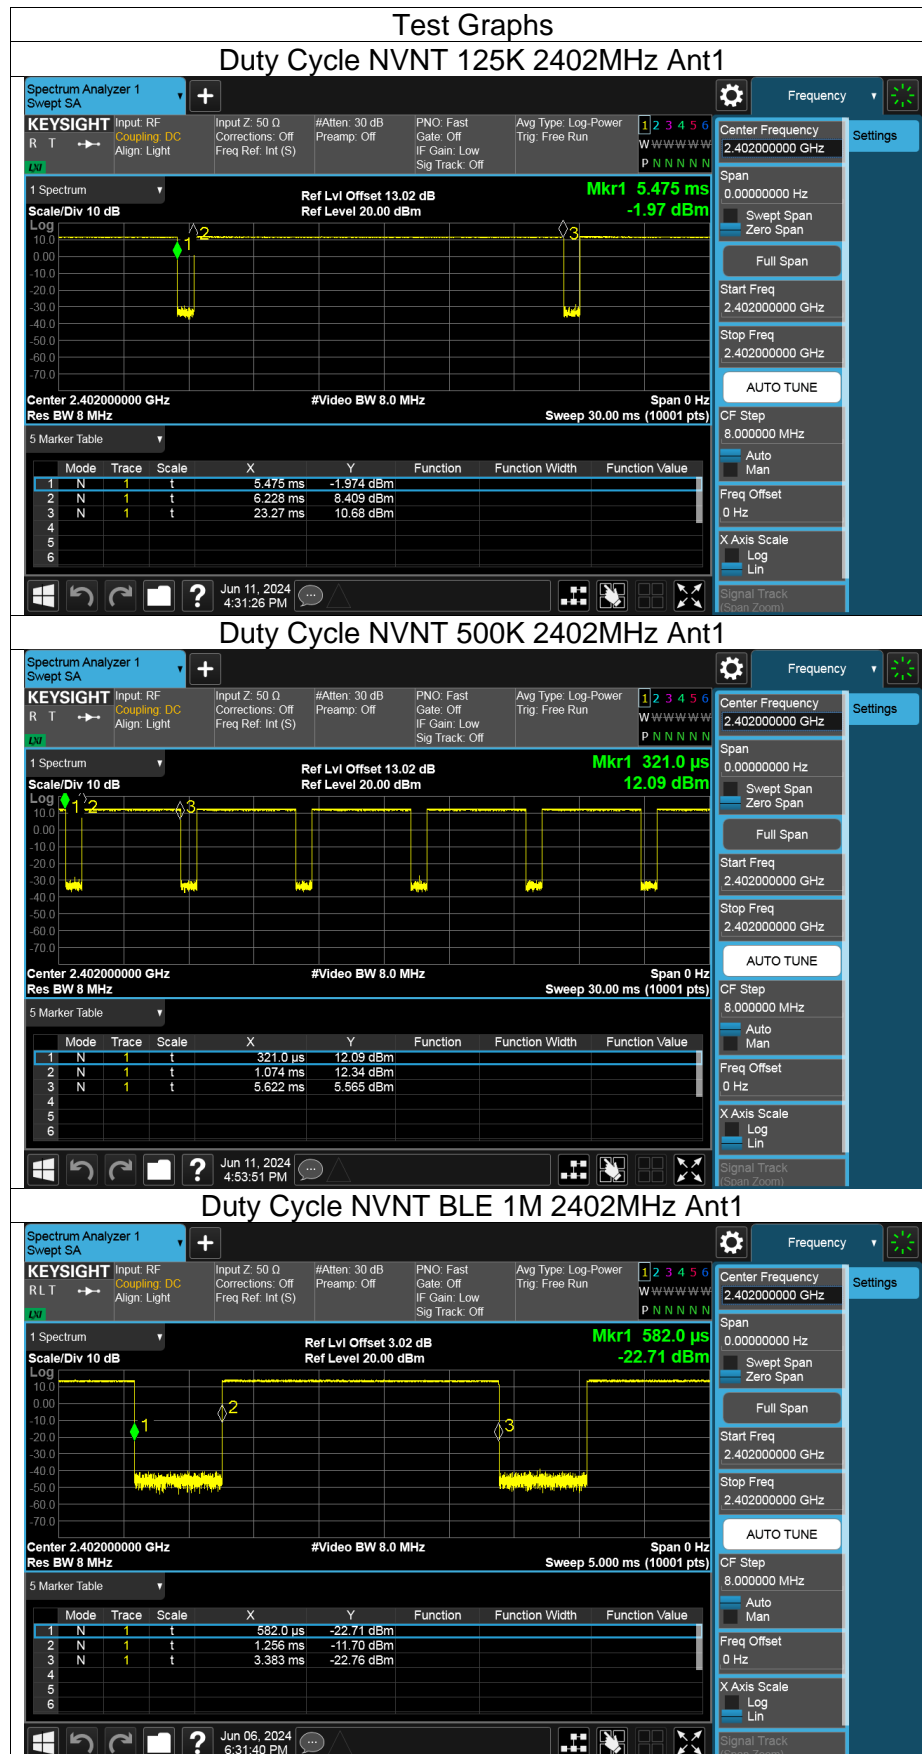

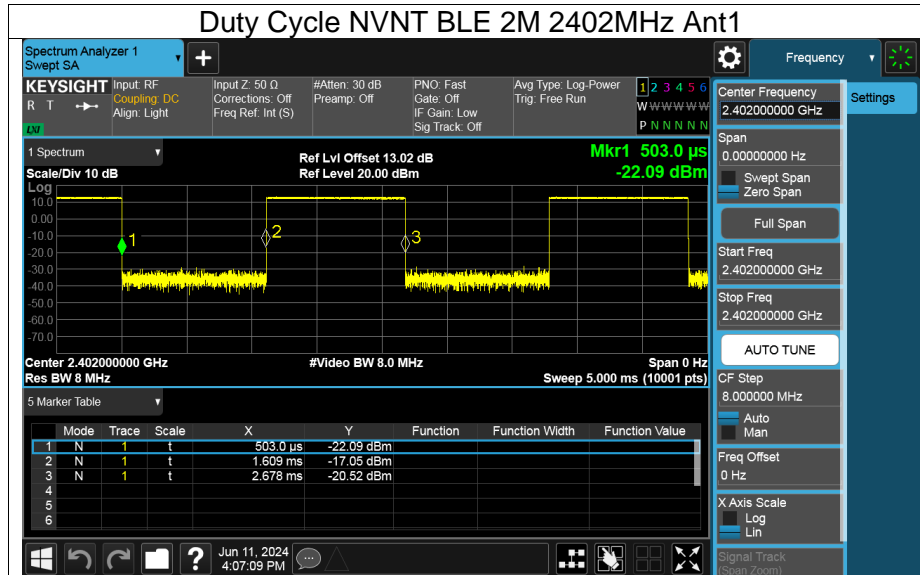


Appendix B: Maximum Conducted Output Power


Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
125K	2402	Ant1	12.12	≤30	Pass
125K	2440	Ant1	12.25	≤30	Pass
125K	2480	Ant1	12.46	≤30	Pass
500K	2402	Ant1	12.38	≤30	Pass
500K	2440	Ant1	12.28	≤30	Pass
500K	2480	Ant1	12.60	≤30	Pass
BLE 1M	2402	Ant1	13.93	≤30	Pass
BLE 1M	2440	Ant1	14.18	≤30	Pass
BLE 1M	2480	Ant1	14.00	≤30	Pass
BLE 2M	2402	Ant1	12.95	≤30	Pass
BLE 2M	2440	Ant1	13.24	≤30	Pass
BLE 2M	2480	Ant1	13.48	≤30	Pass


Appendix C: -6dB Bandwidth

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
125K	2402	Ant1	0.66	≥ 0.5	Pass
	2440		0.66	≥ 0.5	Pass
	2480		0.65	≥ 0.5	Pass
500K	2402		0.67	≥ 0.5	Pass
	2440		0.65	≥ 0.5	Pass
	2480		0.70	≥ 0.5	Pass
BLE 1M	2402		0.71	≥ 0.5	Pass
	2440		0.65	≥ 0.5	Pass
	2480		0.67	≥ 0.5	Pass
BLE 2M	2402		1.22	≥ 0.5	Pass
	2440		1.32	≥ 0.5	Pass
	2480		1.17	≥ 0.5	Pass



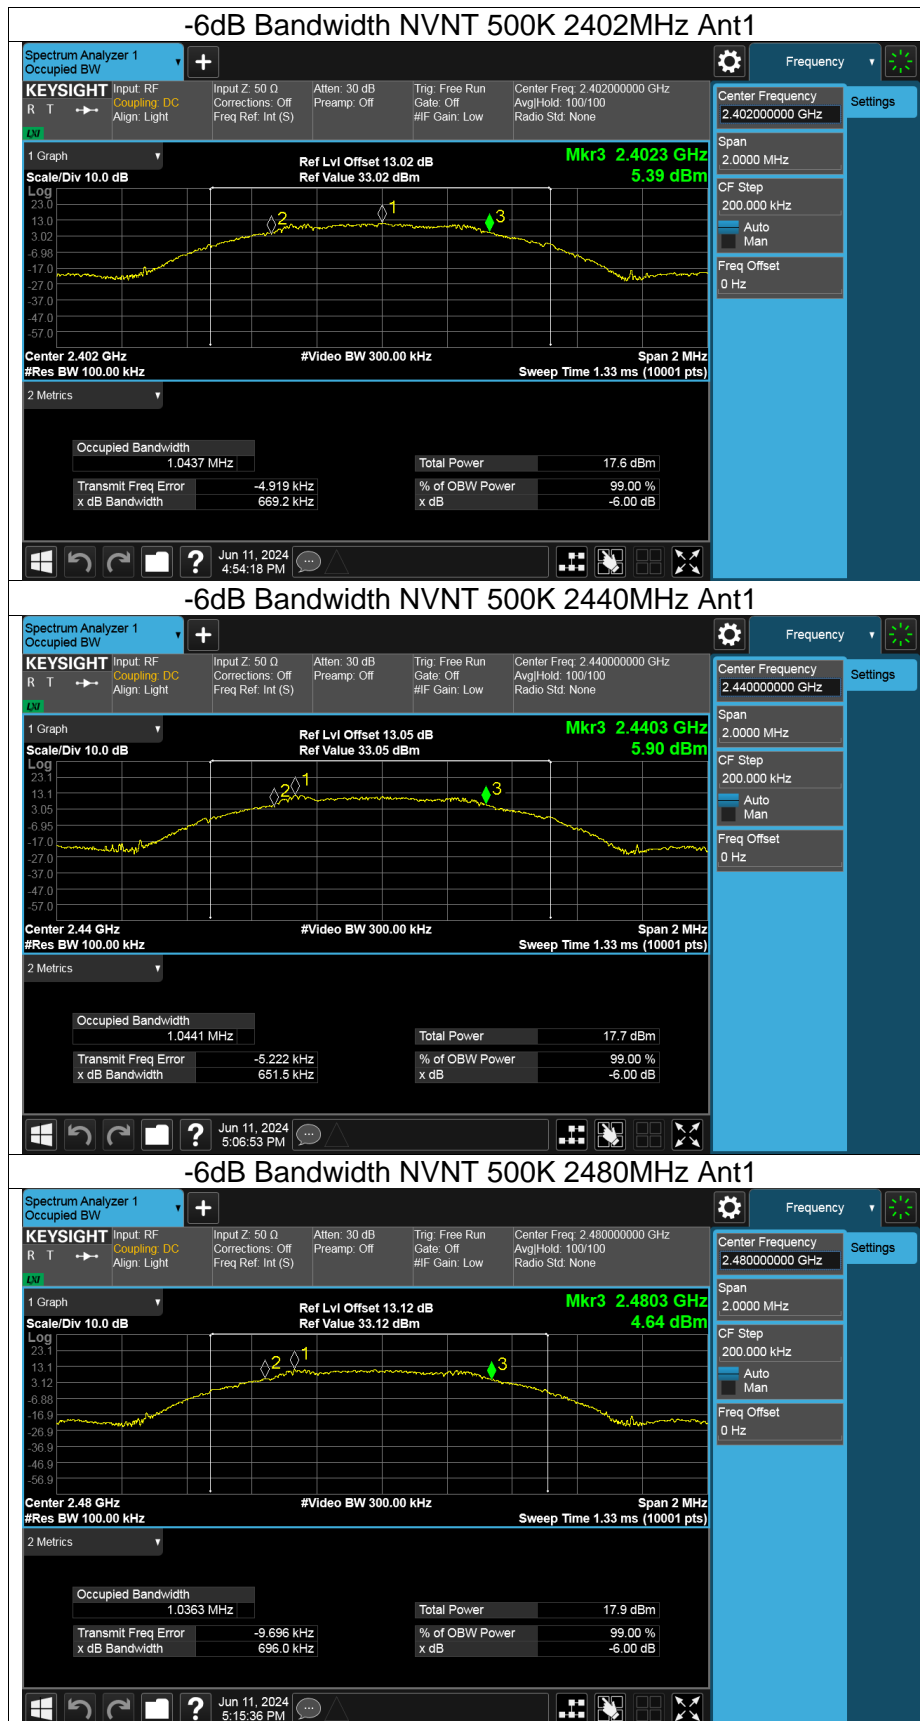

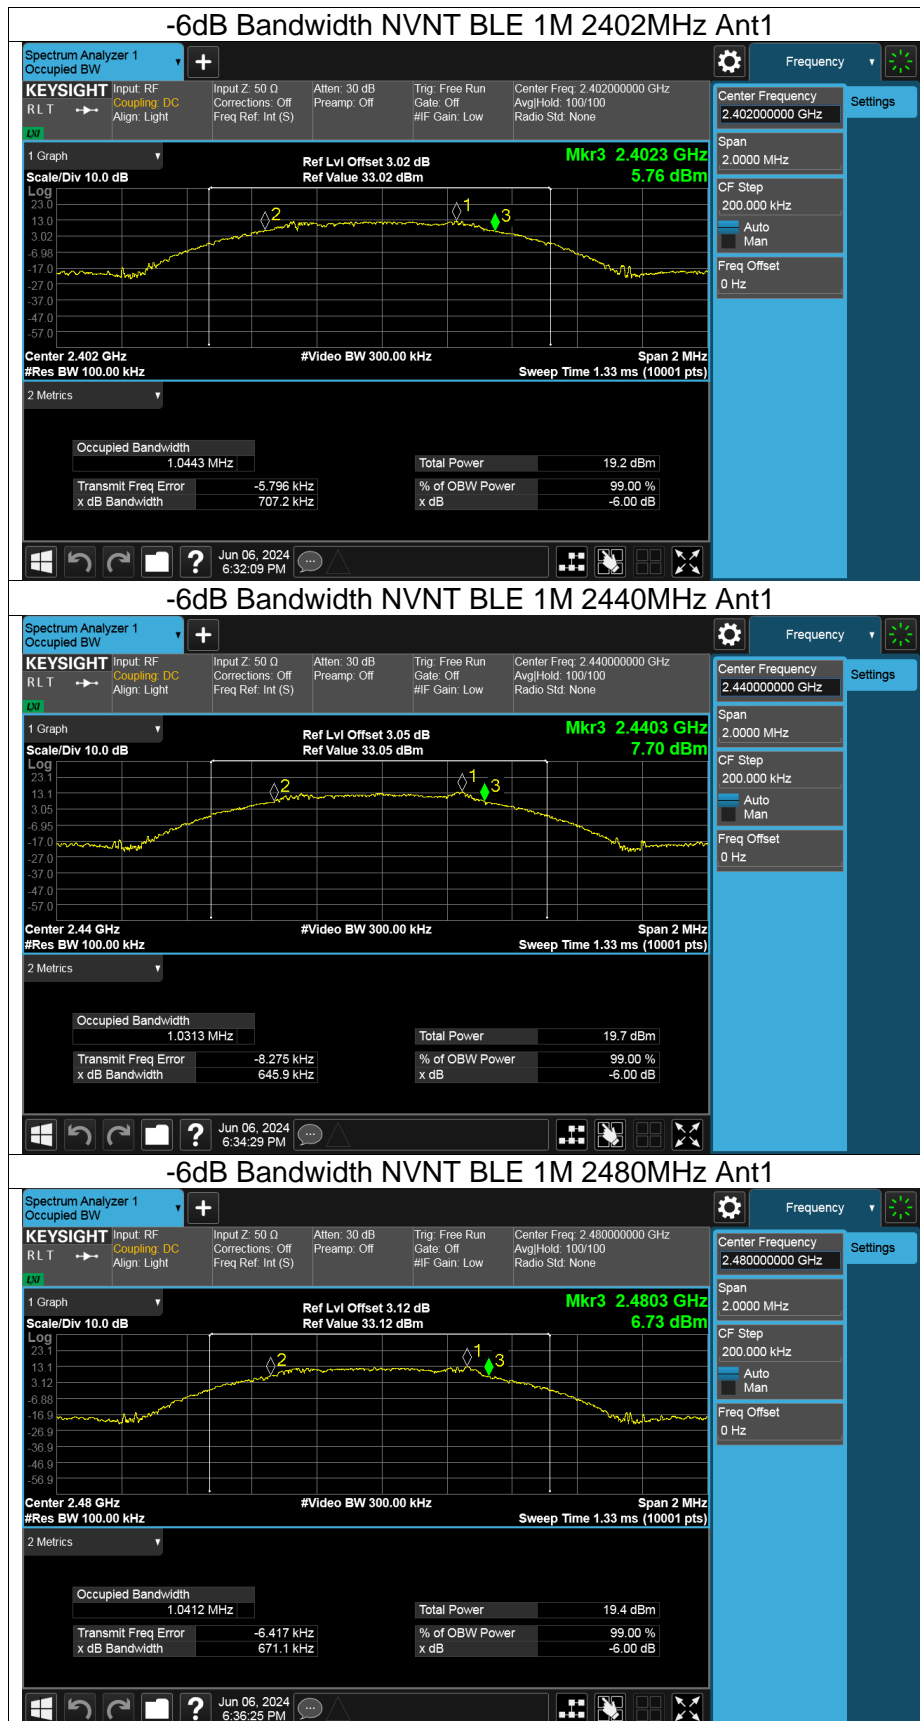

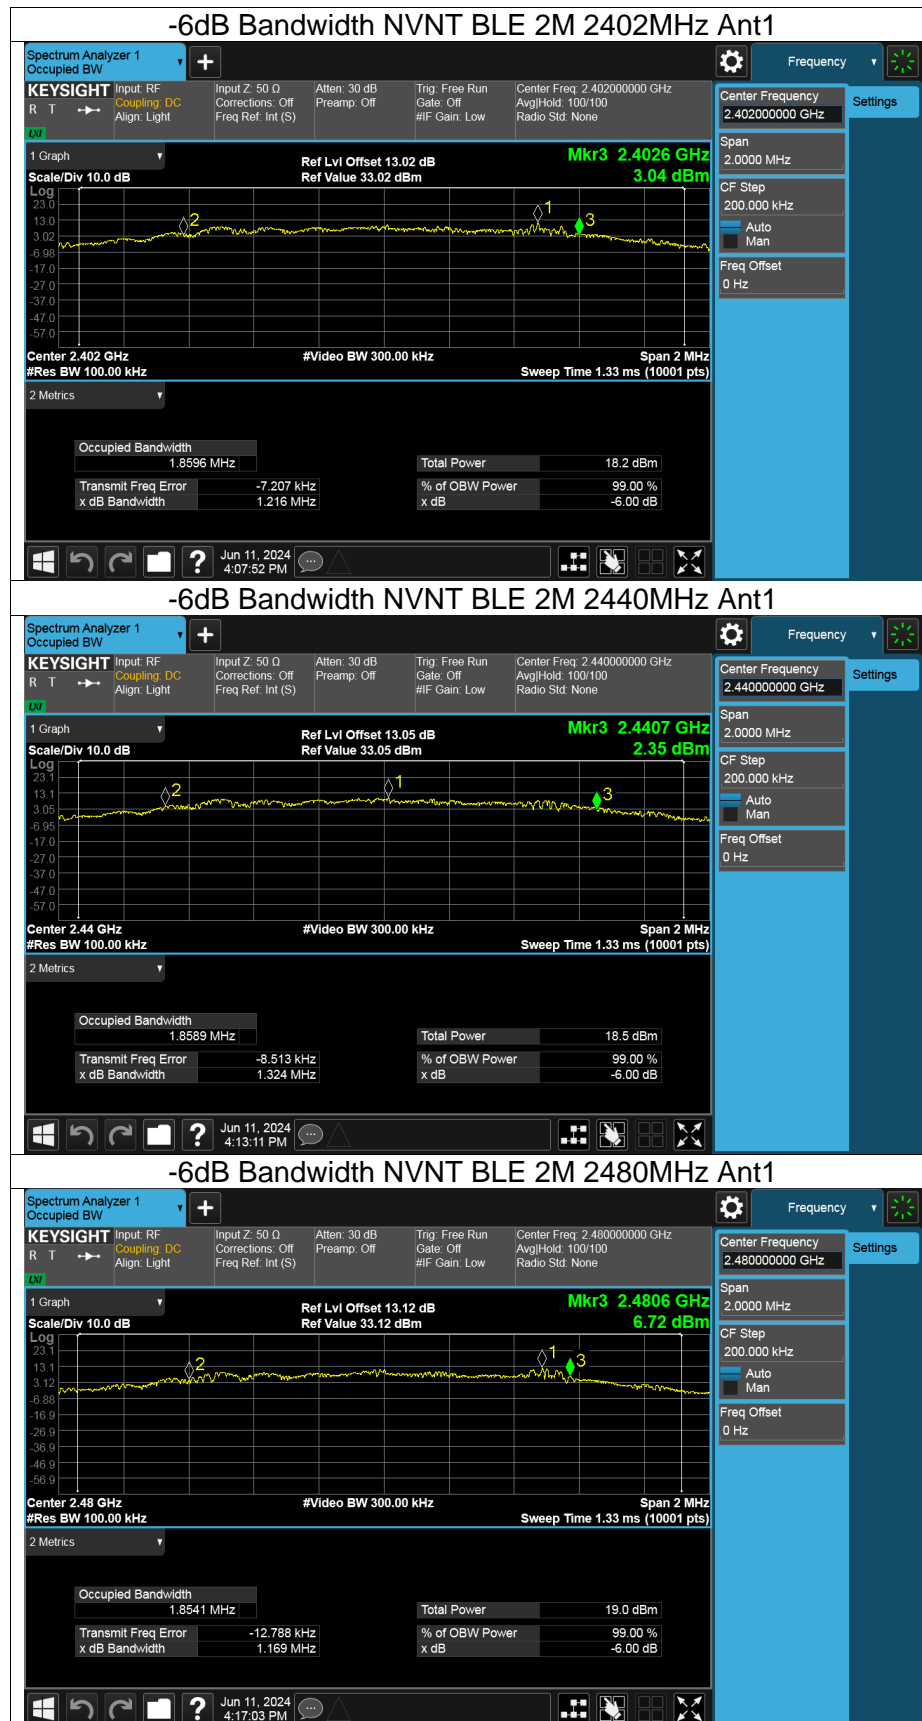

Appendix D: Occupied Channel Bandwidth

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
125K	2402	Ant1	1.053
	2440		1.053
	2480		1.051
500K	2402		1.015
	2440		1.017
	2480		1.022
BLE 1M	2402		1.040
	2440		1.037
	2480		1.040
BLE 2M	2402		2.045
	2440		2.058
	2480		2.055









Appendix E: Maximum Power Spectral Density Level

Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
125K	2402	Ant1	5.15	≤8	Pass
125K	2440	Ant1	5.39	≤8	Pass
125K	2480	Ant1	5.56	≤8	Pass
500K	2402	Ant1	5.42	≤8	Pass
500K	2440	Ant1	5.38	≤8	Pass
500K	2480	Ant1	5.68	≤8	Pass
BLE 1M	2402	Ant1	-1.06	≤8	Pass
BLE 1M	2440	Ant1	-1.01	≤8	Pass
BLE 1M	2480	Ant1	-1.25	≤8	Pass
BLE 2M	2402	Ant1	-5.41	≤8	Pass
BLE 2M	2440	Ant1	-5.45	≤8	Pass
BLE 2M	2480	Ant1	-5.48	≤8	Pass

