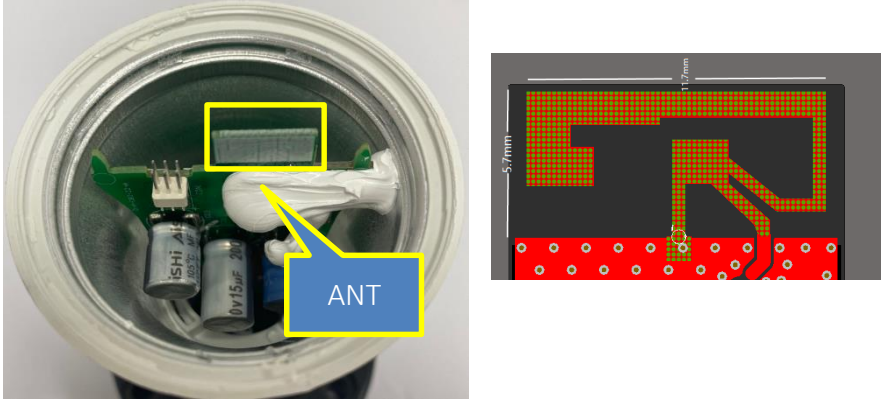



Antenna Specification

Antenna picture	 <p>The image shows the internal components of a light bulb. A yellow box highlights the antenna structure on the PCB. A blue box labeled 'ANT' points to the antenna. To the right is a PCB layout diagram with dimensions: 5.7mm and 4.7mm.</p>
Antenna Type	Internal inverted F PCB antenna
Antenna Peak Gain	1.58 dBi
Operating Band	2400 MHz ~ 2483.5 MHz
Test laboratory name and Address	IoT Antenna Test Laboratory, 11 / F, LEEDARSON LIGHTING CO., LTD. Xingtai Industrial Park, Changtai Economic Development Zone, Zhangzhou, 363900, China
Antenna Manufacturer	LEEDARSON LIGHTING CO., LTD.
Model name	A667-B DIM NA
DUT photo	 <p>A photograph of the external light bulb, showing its standard E27 base and frosted glass enclosure.</p>
Test Date	2024-4-16
Test Conductor	Xiaokun Lin

OTA measurement

Test System

The SY-16 OTA system and RayZone2800 OTA system are anechoic chambers, which can measure antenna passive data such as antenna efficiency, antenna gain, and 2D&3D pattern. The systems are shown as follows:



Figure 1 SY-16 OTA system



Figure 2 RayZone2800 OTA system

Equipment List

Table 1 Equipment List

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
<input checked="" type="checkbox"/>	Network Analyzer	Keysight	E5071C	MY46527808	2024/1/9	2025/1/8
<input type="checkbox"/>	Network Analyzer	Keysight	E5071C	MY46108051	2024/4/19	2025/4/18
<input checked="" type="checkbox"/>	Anechoic Chamber	Sunyield	SY-16	SI1727	2024/4/28	2025/4/27
<input type="checkbox"/>	Anechoic Chamber	General Test System	RayZone2800	CT10121244 B5079	2024/5/10	2025/5/9

Test Method

Table 2 Test Method

Name	Antenna Performance				
Parameter	Radiation Efficiency				
Test Method	IEEE Standard Test Procedures for Antennas				
Standard No.	ANSI/IEEE Std 149-2021				
Test Software	PMS-V2.8.5	<input checked="" type="checkbox"/>	MaxSign-V1.4.3	<input type="checkbox"/>	

Test Result

Efficiency and Gain

Table 3 Antenna Efficiency and Gain

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	1.42	-3.93	40.44
2410	1.42	-3.96	40.19
2420	1.29	-4.03	39.53
2430	1.43	-4.05	39.34
2440	1.47	-3.96	40.21
2450	1.58	-4.09	39.00
2460	1.43	-4.12	38.73
2470	1.21	-4.14	38.59
2480	1.38	-4.05	39.38
2490	1.32	-4.06	39.22
2500	1.02	-4.17	38.28

Radiation Pattern

Table 4 Product coordinates

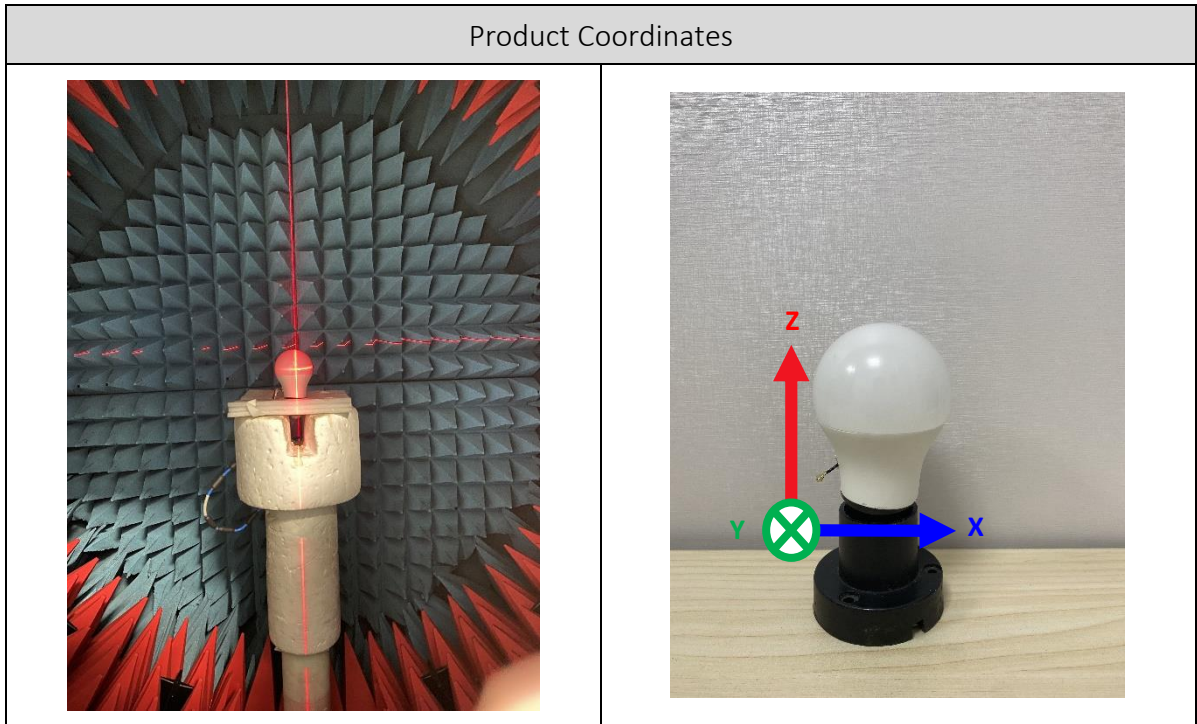


Table 5 3D radiation pattern

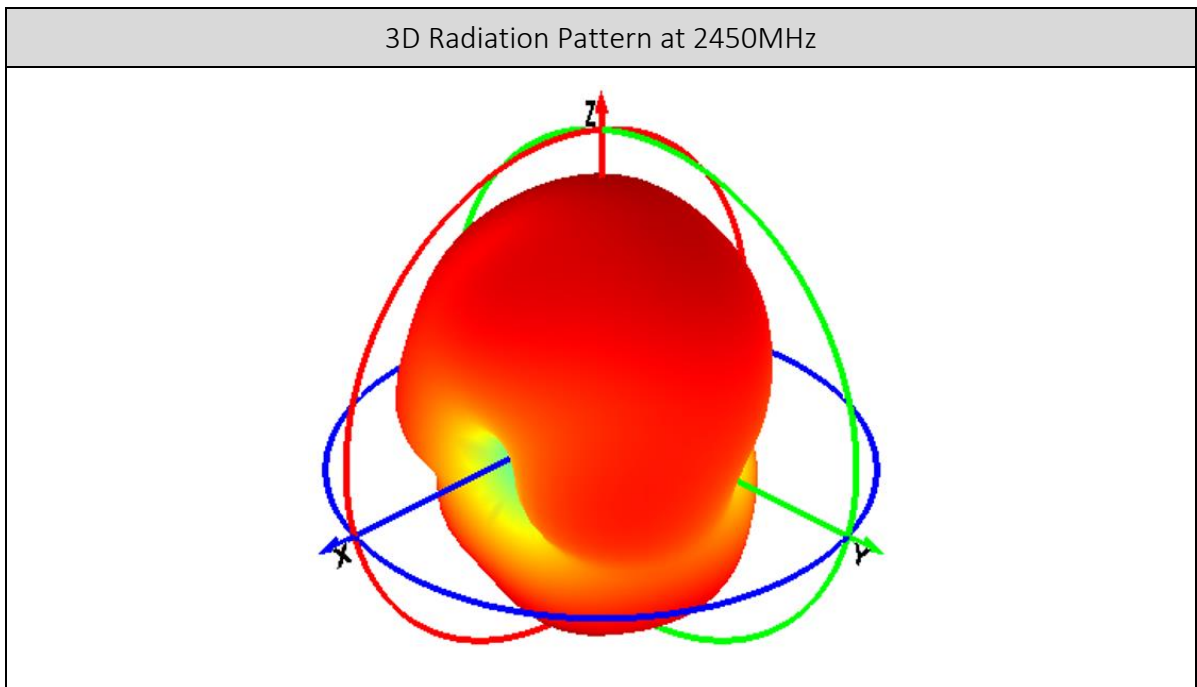


Table 6 Radiation pattern in XY Plane

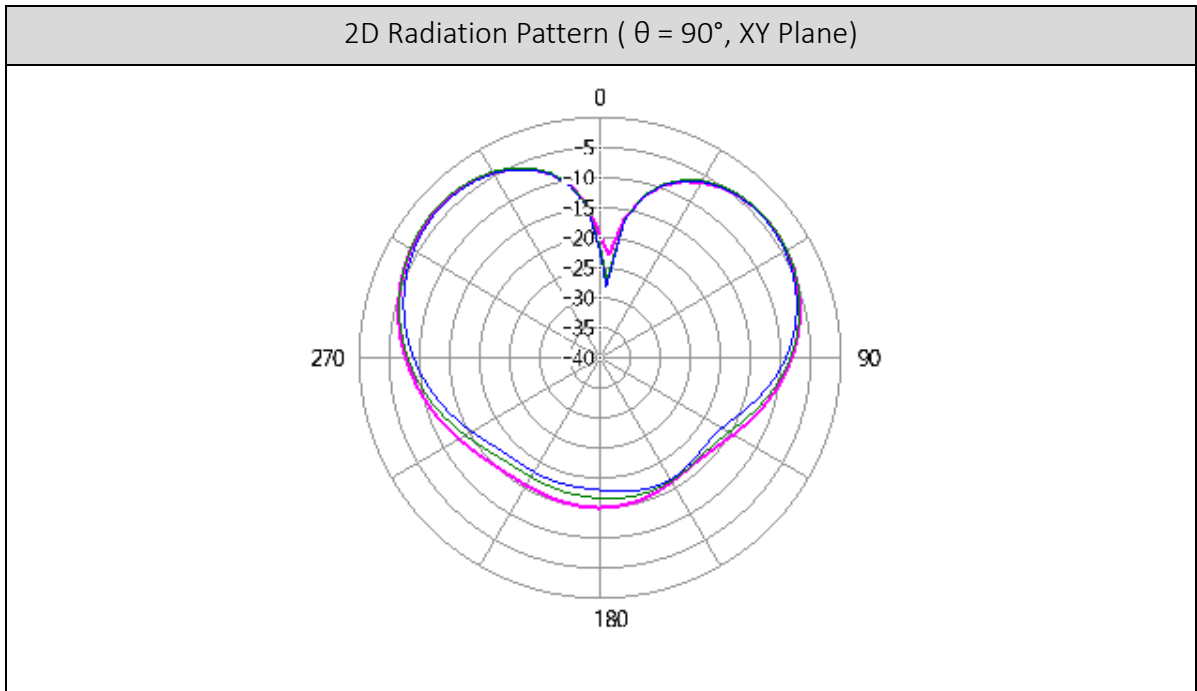


Table 7 Radiation pattern in XZ Plane

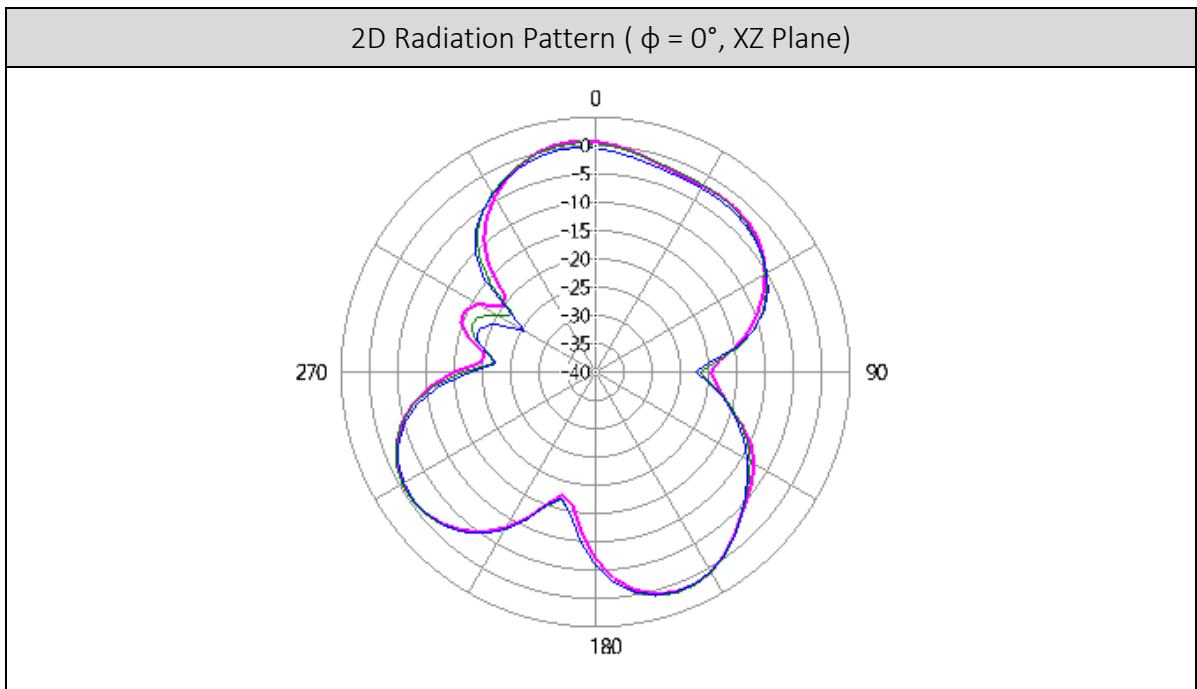


Table 8 Radiation pattern in YZ Plane

