

EDC15S Antenna specification sheet


Characteristic

1. Onboard microstrip patch antenna, integrated transceiver antenna;
2. Antenna metal patch: 11.2 * 11.2mm;
3. Antenna GND: 20 * 20mm;
4. Low energy loss, high antenna efficiency, and good consistency;
5. Low and high temperature environments have minimal impact and high stability;

Application

Mainly used for antenna applications in the 5.8GHz frequency band


Structure

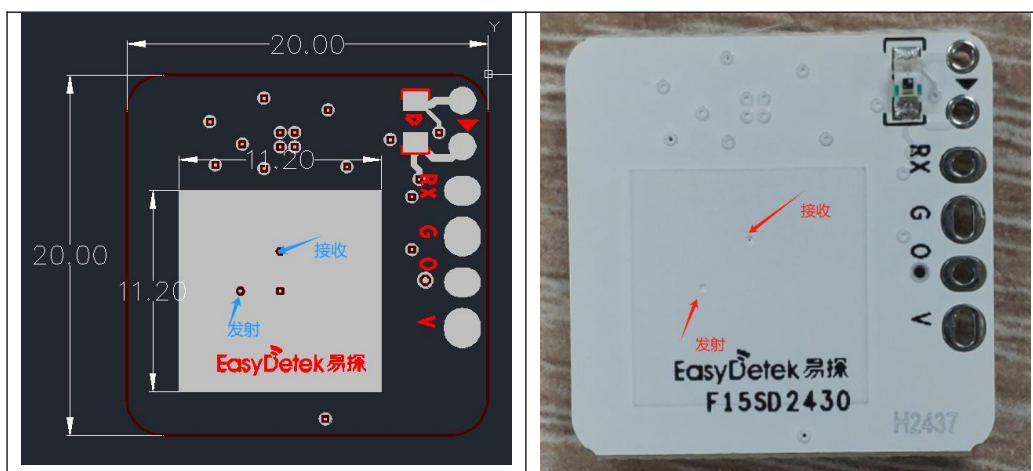

Size

- 1、Antenna size 11.2 * 11.2mm; Antenna PCB copper foil thickness: 0.035mm;
- 2、Back of antenna (CB inner grounding layer) length and width: 20 * 20mm;



Thickness of copper foil in PCB grounding layer:

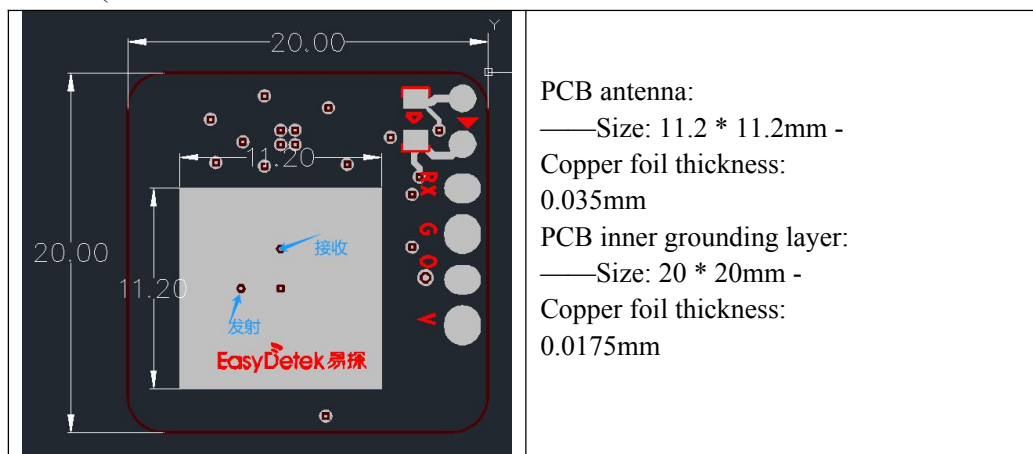

Electrical characteristics


EDC15F antenna	参数范围/Parameter range
工作频率范围 Working Frequency	5725MHz-5825MHz
初始频段 (GHz)	5800MHz
带宽 Band Width	CW > 1MHz
阻抗 Impedance	50 Ω
增益 Gain(dBi)	Max 1.4dBi
驻波比 VSWR	>2
工作温度 Operation Temperature	-20~85℃

2D/3D gain chart

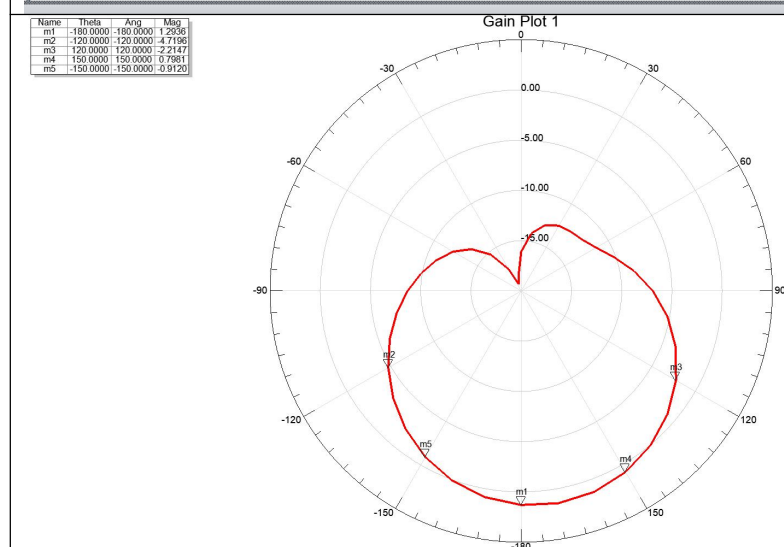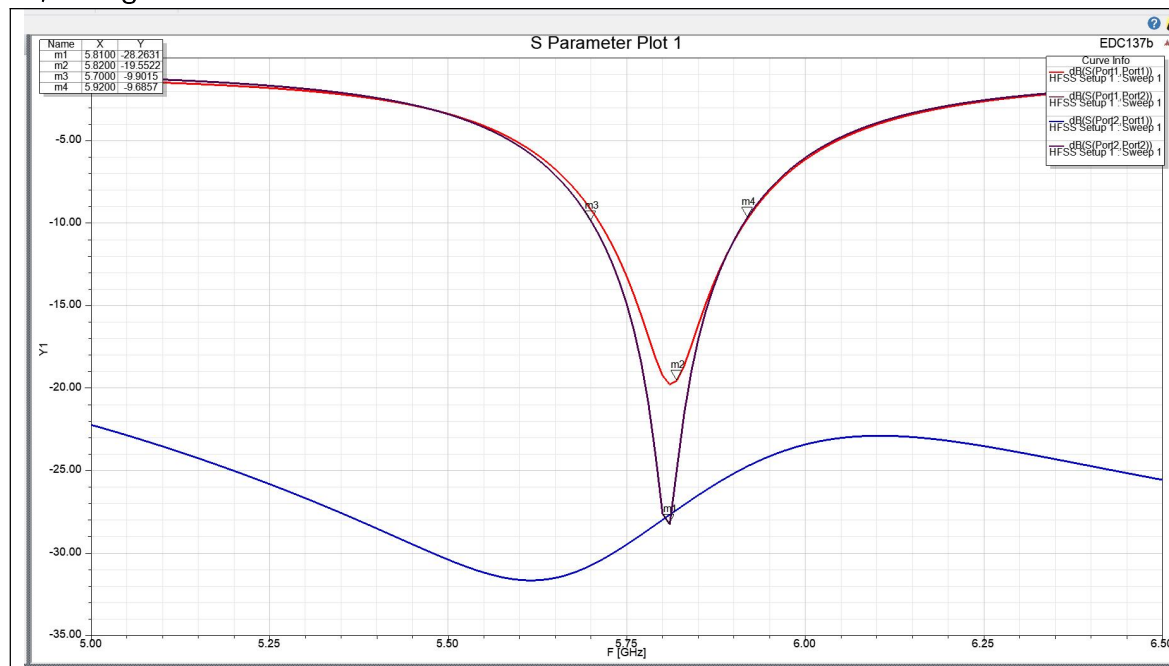



Gain Plot 2

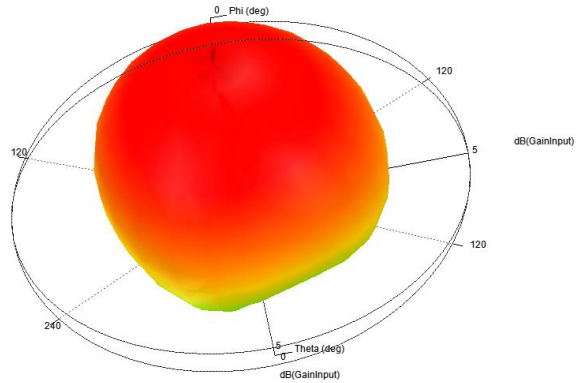

2D/3D Simulation Data Sheet

S11:5.81GHz @-28dBi

Gain: max1.4dBi

Welding, packaging, and storage environment

1. Due to being an onboard planar antenna, it follows the entire radar sensor as a whole and cannot be separated separately; All the soldering is directly pressed together during the PCB board manufacturing process, without the need for separate soldering;
2. Packaging and storage environment, refer to physical products.



易探科技

<http://www.easydetek.com/>

Phone: 0755-2778-8421

Email: sales@easydetek.com

Address: Room 402, Building B, Chentian Hangcheng Industrial Zone, Xixiang Street, Bao'an District, Shenzhen