


Appendix D. SAR Test Setup Photos



Next-to-Mouth condition: EUT Front, Test Separation 1 cm

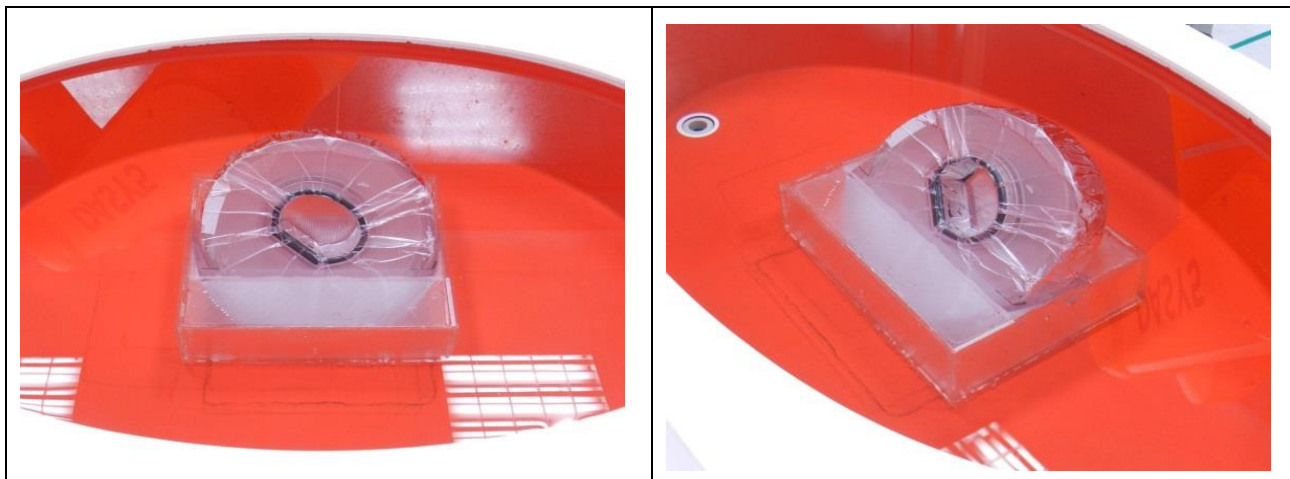

Wrist-Worn condition: Inner wrist band with test separation 0mm for WWAN




The watch rotates 30 ° counterclockwise, tilted backwards 40° and reverse 0°



The watch rotates 30 ° counterclockwise, tilted backwards 40° and reverse 180°

Note :

1. When the device at reverse 0°, RF exposure evaluation for GSM1900 / WCDMA Band 2.
2. When the device at reverse 180°, RF exposure evaluation for GSM850 / WCDMA Band 5.

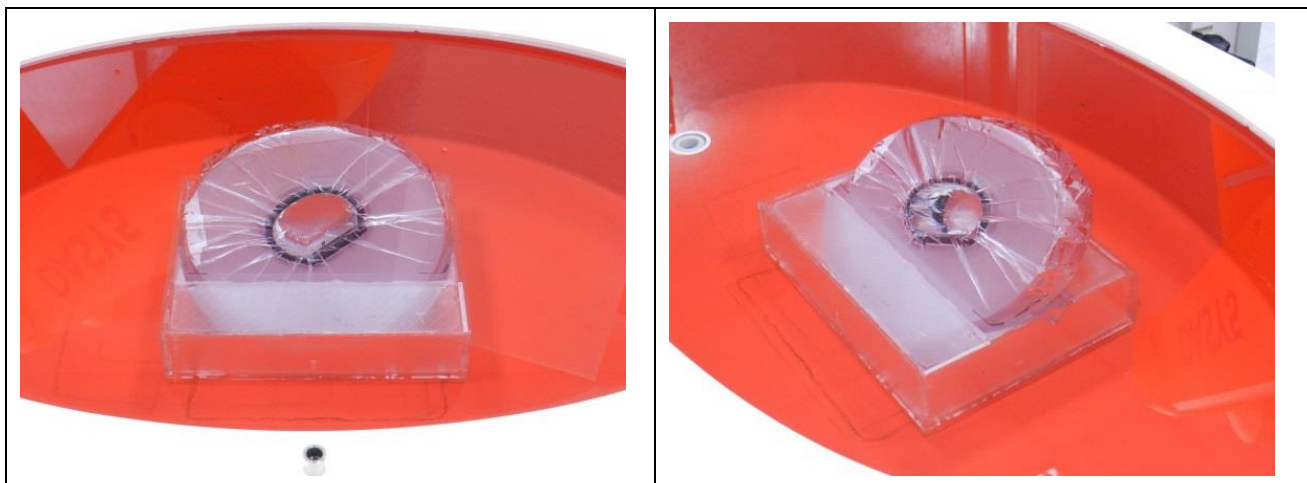

Wrist-Worn condition: Inner wrist band with test separation 0mm for WLAN



The watch rotates 150° clockwise, tilted backwards 40°, and reverse 0°