



FCC AND ISED CERTIFICATION TEST REPORT

Applicant	:	ION Audio, LLC
Address of Applicant	:	200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
Manufacturer	:	ION Audio, LLC
Address of Manufacturer	:	200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
Equipment under Test	:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS
Model No.	:	iPA178, Total PA™ Freedom
HVIN	:	Total PA™ Freedom
FCC ID	:	2AB3E-IPA178
IC	:	10541A-IPA178
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE23092205-2E01
Issue Date	:	2023/12/18
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd.
Address of Laboratory	:	Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT.....	9
2.3.	Assistant equipment used for test.....	9
2.4.	Block diagram of EUT configuration for test	9
2.5.	Deviations of test standard.....	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	11
2.8.	Measurement uncertainty.....	11
3.	Equipment Used During Conductive Test.....	12
4.	20 dB Bandwidth	13
4.1.	Block diagram of test setup.....	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	14
5.	99% Bandwidth	18
5.1.	Block diagram of test setup.....	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test Result	18
5.5.	Test Graphs.....	19
6.	Maximum Peak Output Power	22
6.1.	Block diagram of test setup.....	22
6.2.	Limits	22
6.3.	Test procedure	22
6.4.	Test Result	23
6.5.	Test graphs	23
7.	Carrier Frequency Separation.....	27
7.1.	Block diagram of test setup.....	27
7.2.	Limits	27
7.3.	Test procedure	27
7.4.	Test result.....	27
7.5.	Test graphs	28
8.	Dwell Time.....	29

8.1.	Block diagram of test setup.....	29
8.2.	Limits	29
8.3.	Test procedure	29
8.4.	Test result.....	30
8.5.	Test graphs	30
9.	Number of Hopping Channel	37
9.1.	Block diagram of test setup.....	37
9.2.	Limits	37
9.3.	Test procedure	37
9.4.	Test result.....	37
9.5.	Test graphs	38
10.	Band Edge Compliance (Conducted Method)	39
10.1.	Block diagram of test setup.....	39
10.2.	Limit	39
10.3.	Test procedure	39
10.4.	Test result.....	39
10.5.	Test graphs	40
11.	RF Conducted Spurious Emissions	44
11.1.	Block diagram of test setup.....	44
11.2.	Limits	44
11.3.	Test procedure	44
11.4.	Test result.....	45
11.5.	Test graphs	45
12.	Radiated Emission	55
12.1.	Test equipment.....	55
12.2.	Block diagram of test setup.....	56
12.3.	Limit	58
12.4.	Test procedure	60
12.5.	Test result.....	61
13.	Band Edge Compliance (Radiated Method)	70
13.1.	Test equipment.....	70
13.2.	Block diagram of test setup.....	70
13.3.	Limit	70
13.4.	Test procedure	70
13.5.	Test result.....	71
14.	Power Line Conducted Emission	84
14.1.	Test equipment.....	84
14.2.	Block diagram of test setup.....	84

14.3. Power line conducted emission limits 84

14.4. Test procedure 84

14.5. Test result..... 85

15. Antenna Requirements 88

15.1. Limit 88

15.2. Result 88

16. Test Setup Photograph 89

17. Photos of the EUT 91

Test Report Declare

Applicant	:	ION Audio, LLC
Address of Applicant	:	200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
Equipment under Test	:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS
Model No.	:	iPA178, Total PA™ Freedom
HVIN	:	Total PA™ Freedom
Manufacturer	:	ION Audio, LLC
Address of Manufacturer	:	200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above standards.

Report No.:	DDT-RE23092205-2E01		
Date of Receipt:	2023/10/16	Date of Test:	2023/10/16 ~ 2023/11/23

Prepared By:

Approved By:

Tiger Mo

Damon Hu

Tiger Mo/Engineer

Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2023/12/18	

1. Summary of Test Results

Description of Test Item	Standard	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) RSS-247 Issue 3 clause 5.4(b)	Pass
20 dB Bandwidth	FCC Part 15: 15.247(a)(1) RSS-247 Issue 3 clause 5.1(a)	Pass
99% Bandwidth	RSS-Gen Issue 5 clause 6.7	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) RSS-247 Issue 3 clause 5.1(b)	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) RSS-247 Issue 3 clause 5.1(d)	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) RSS-247 Issue 3 clause 5.1(d)	Pass
RF Conducted Spurious Emissions	FCC Part 15: 15.247(d) RSS-247 Issue 3 clause 5.5	Pass
Radiated Emission	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-247 Issue 3 clause 5.5 RSS-Gen Issue 5 clause 8.9 RSS-Gen Issue 5 clause 8.10	Pass
Band Edge Compliance	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-247 Issue 3 clause 5.5 RSS-Gen Issue 5 clause 8.9 RSS-Gen Issue 5 clause 8.10	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207(a) RSS-Gen Issue 5 clause 8.8	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5 clause 6.8	Pass

2. General Test Information

2.1. Description of EUT

EUT Name	: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS
Model Number	: iPA178, Total PA™ Freedom
Difference of models	: iPA178, Total PA™ FREEDOM, iPA178*****, Total PA™ FREEDOM*****(" * " can be "0-9", "a-z", "A-Z", "blank", "-", "+", or any character, symbol, alphanumeric for marketing purpose). Above models are identical in schematic, appearance and structure, only the Model Number is different for all the models, therefore the test performed on the Total PA™ Freedom.
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 100-120V/60Hz
Radio Specification	: Bluetooth V5.0 (BR/EDR/LE),
Operation Frequency	: Bluetooth (BR/EDR/LE): 2402 MHz-2480 MHz
Modulation	: Bluetooth BR/EDR: GFSK, $\pi/4$ -DQPSK, 8DPSK Bluetooth LE: GFSK

Note 1: "☒" means to be chosen or applicable; "☐" means don't to be chosen or not applicable; This note applies to entire report.

Note 2: This report only for Bluetooth BR/EDR Ant1.

Note 3: Antenna information:

Bluetooth Antenna information	
Antenna Type	: FPC
Antenna Gain(dBi)	: 2.51

Note 4: Channel information:

Bluetooth BR/EDR Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466

11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Note 5: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
NoteBook	Lenovo	I7-4810MQ	N/A	00331-1000-00001-AA816

2.4. Block diagram of EUT configuration for test



Test software: FrequencyTools v0.3.2.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	-4dBm	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	-4dBm	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	-4dBm	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	-4dBm	CH0	2402
	-4dBm	CH39	2441
	-4dBm	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	-4dBm	CH0	2402
	-4dBm	CH39	2441
	-4dBm	CH78	2480
8DPSK hopping off Tx mode	-4dBm	CH0	2402
	-4dBm	CH39	2441
	-4dBm	CH78	2480

Worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method)
	5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
<input checked="" type="checkbox"/> RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2024/04/26
Wideband Radio Communication Tester	R&S	CMW500	120259	2024/07/14
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2024/04/26
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2024/04/26
RF Control Unit	Tonsend	JS0806-2	158060010	2024/04/26
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2024/05/14
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

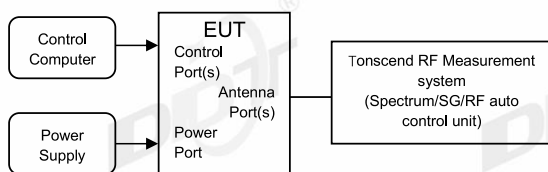

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold



- (5) Measure and record the results in the report.




4.4. Test result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6°C,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	1.00
		2441	0.98
		2480	1.02
2DH5	Ant1	2402	1.31
		2441	1.34
		2480	1.33
3DH5	Ant1	2402	1.32
		2441	1.33
		2480	1.34

4.5. Test graphs

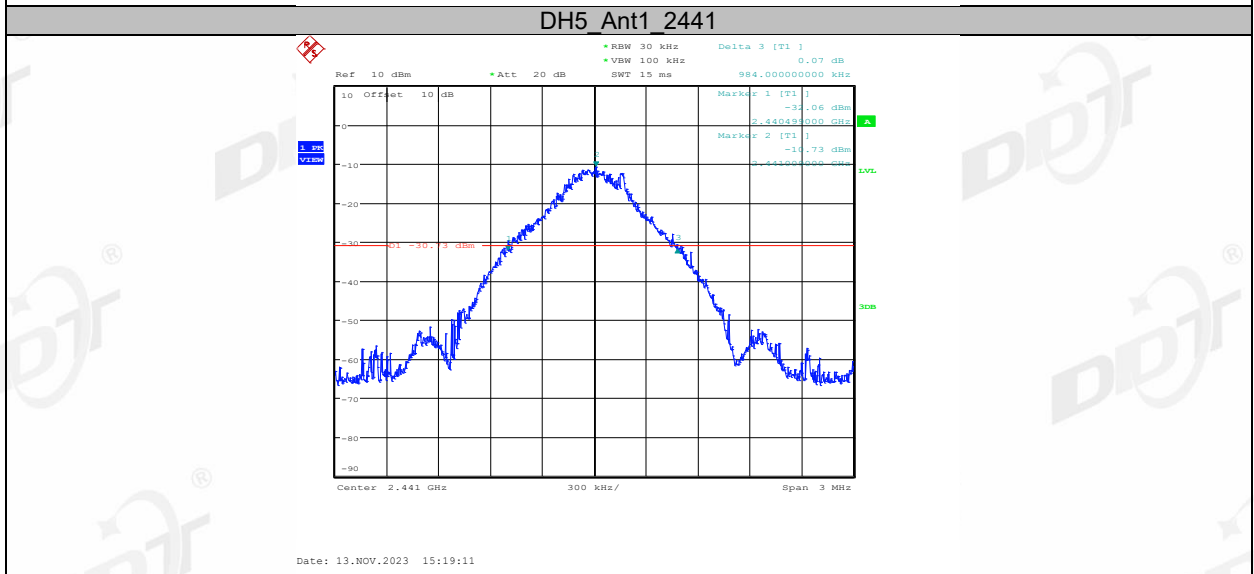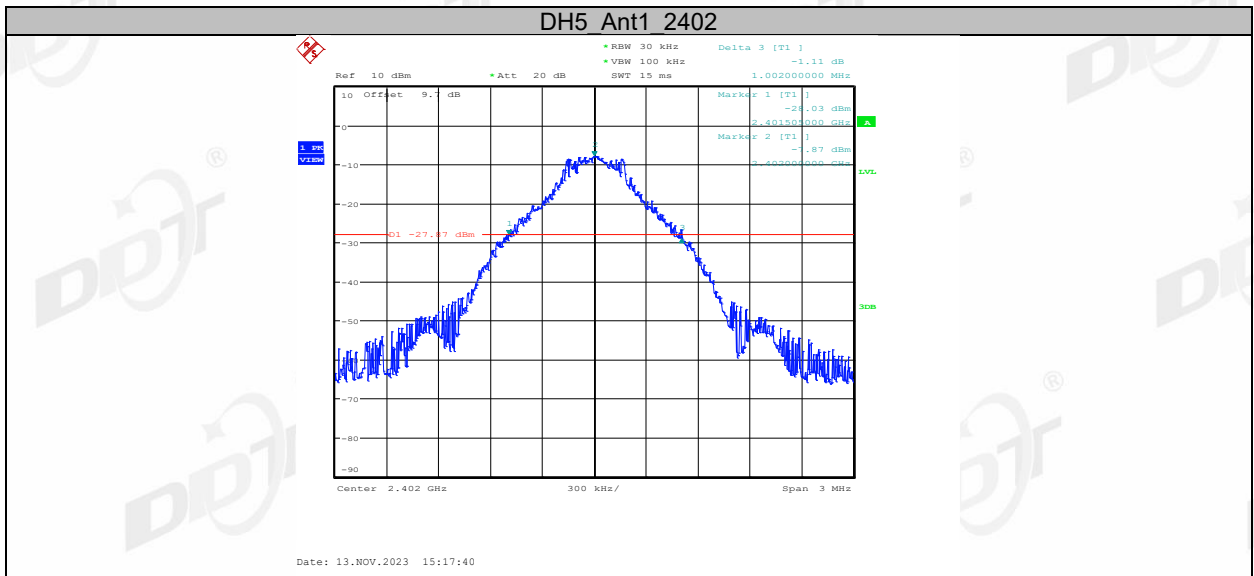


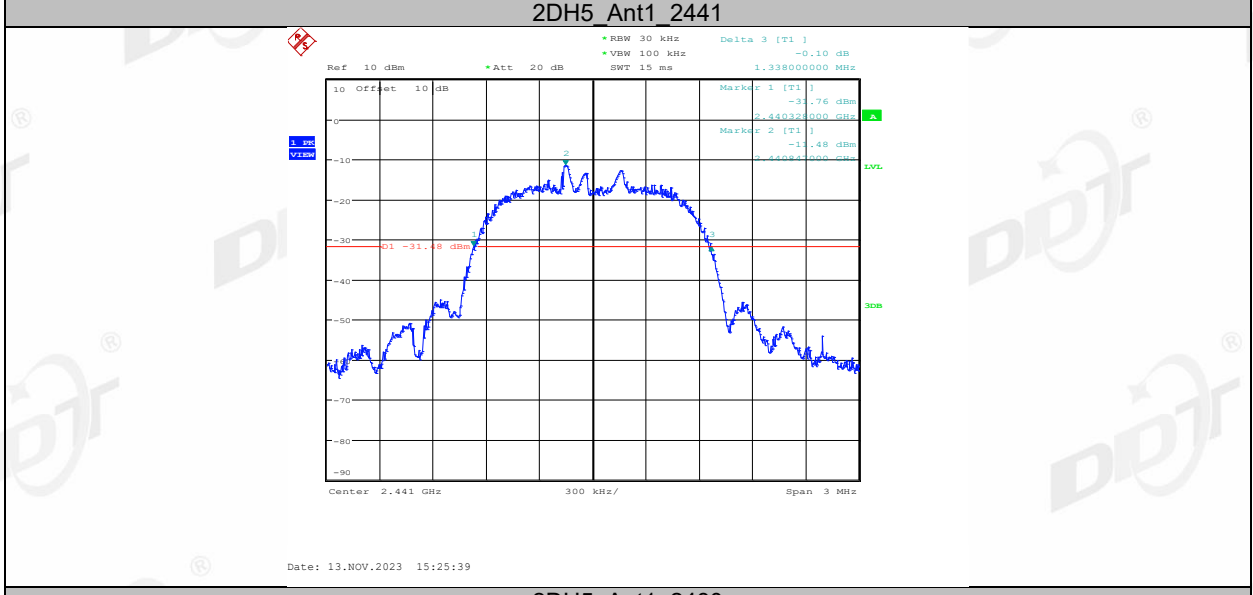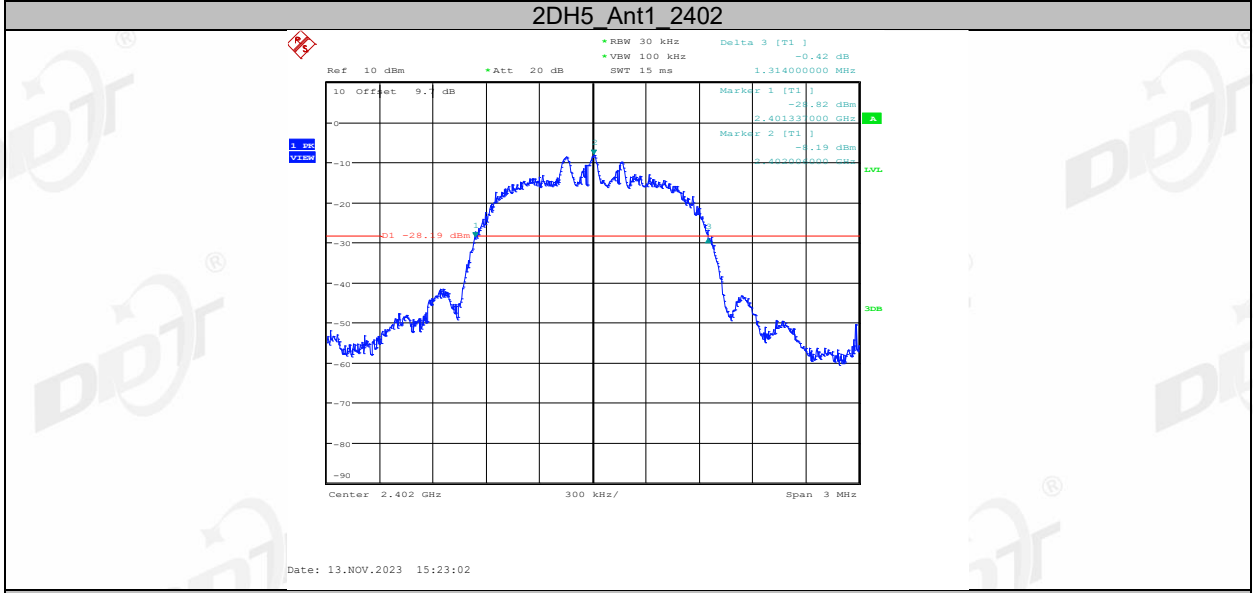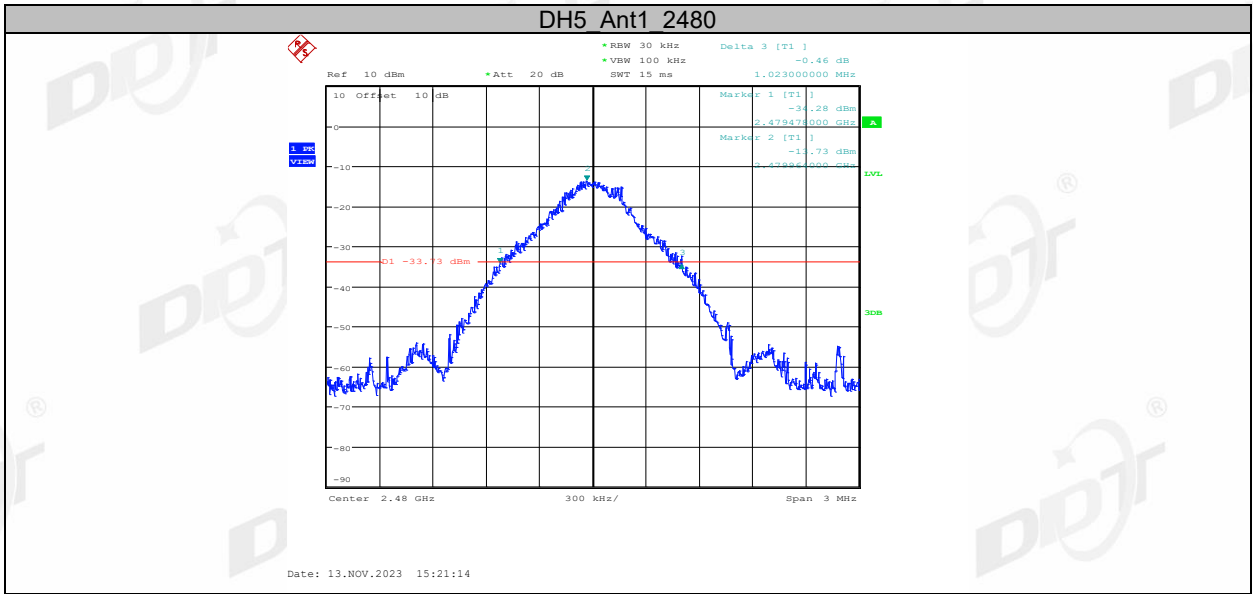


2DH5 Ant1_2480

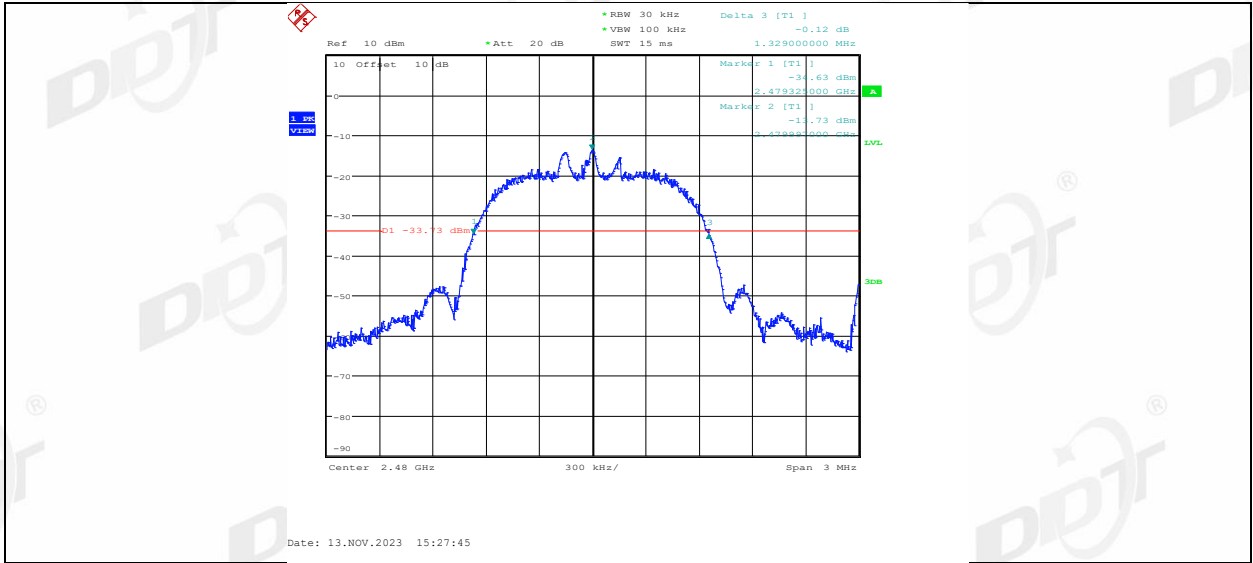


3DH5_Ant1_2402

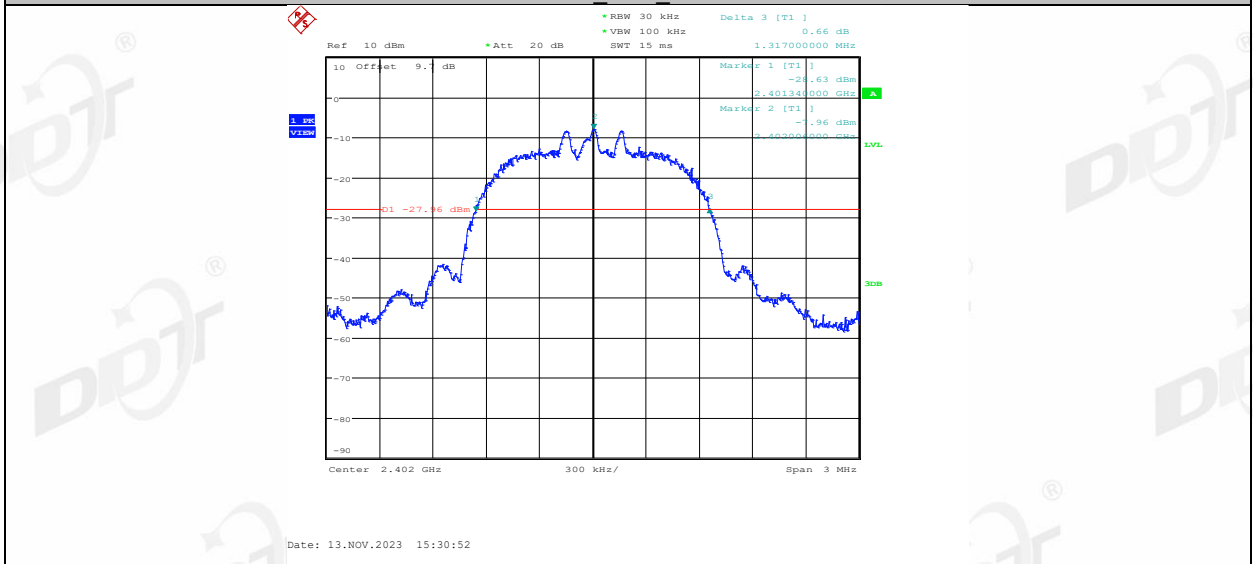

3DH5_Ant1_2441

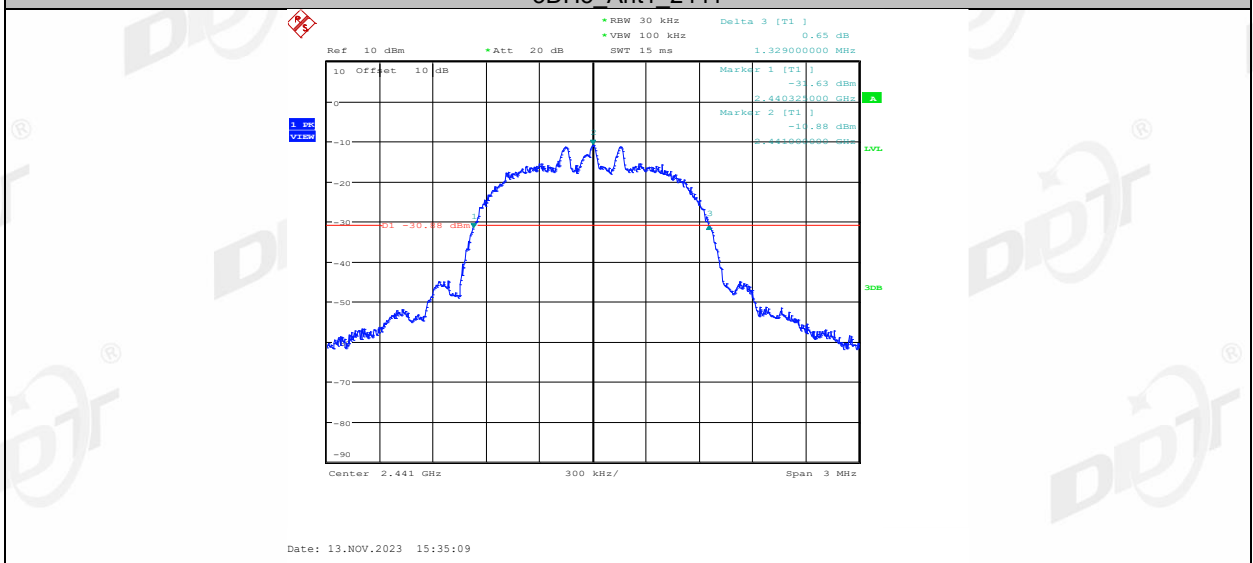


3DH5_Ant1_2480

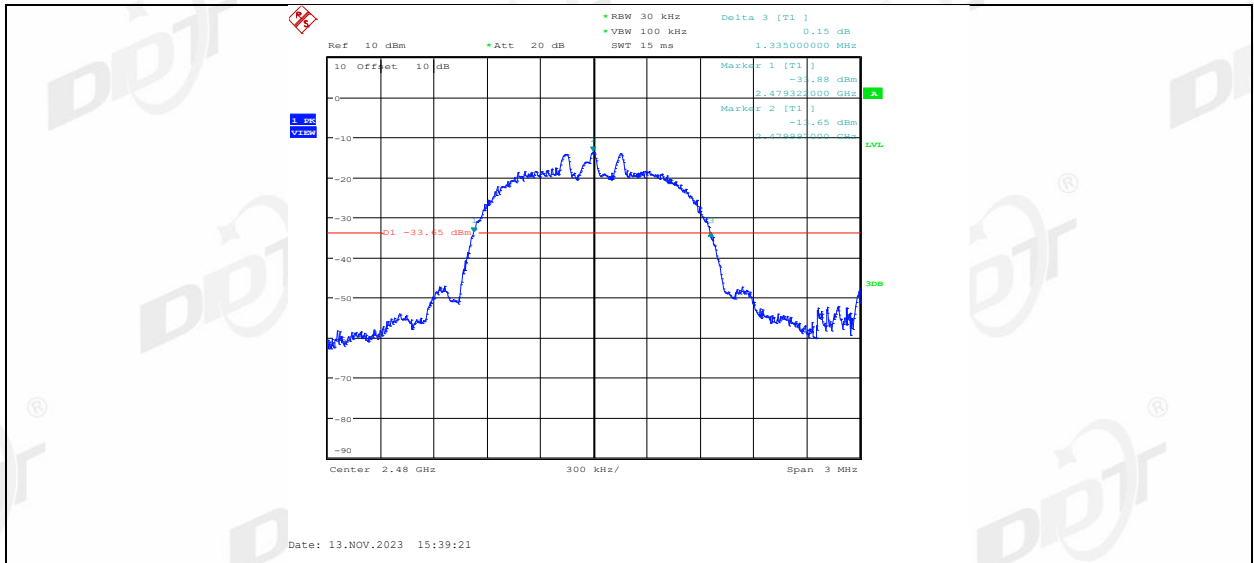

5. 99% Bandwidth

5.1. Block diagram of test setup

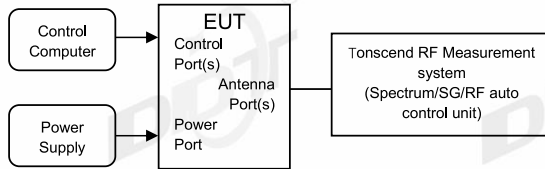

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:


RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.

5.4. Test Result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6℃,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.87	2401.5650	2402.4350
		2441	0.873	2440.5590	2441.4320
		2480	0.882	2479.5500	2480.4320
2DH5	Ant1	2402	1.197	2401.3970	2402.5940
		2441	1.191	2440.4000	2441.5910
		2480	1.194	2479.3970	2480.5910
3DH5	Ant1	2402	1.191	2401.4060	2402.5970
		2441	1.197	2440.3970	2441.5940
		2480	1.194	2479.3940	2480.5880

5.5. Test Graphs

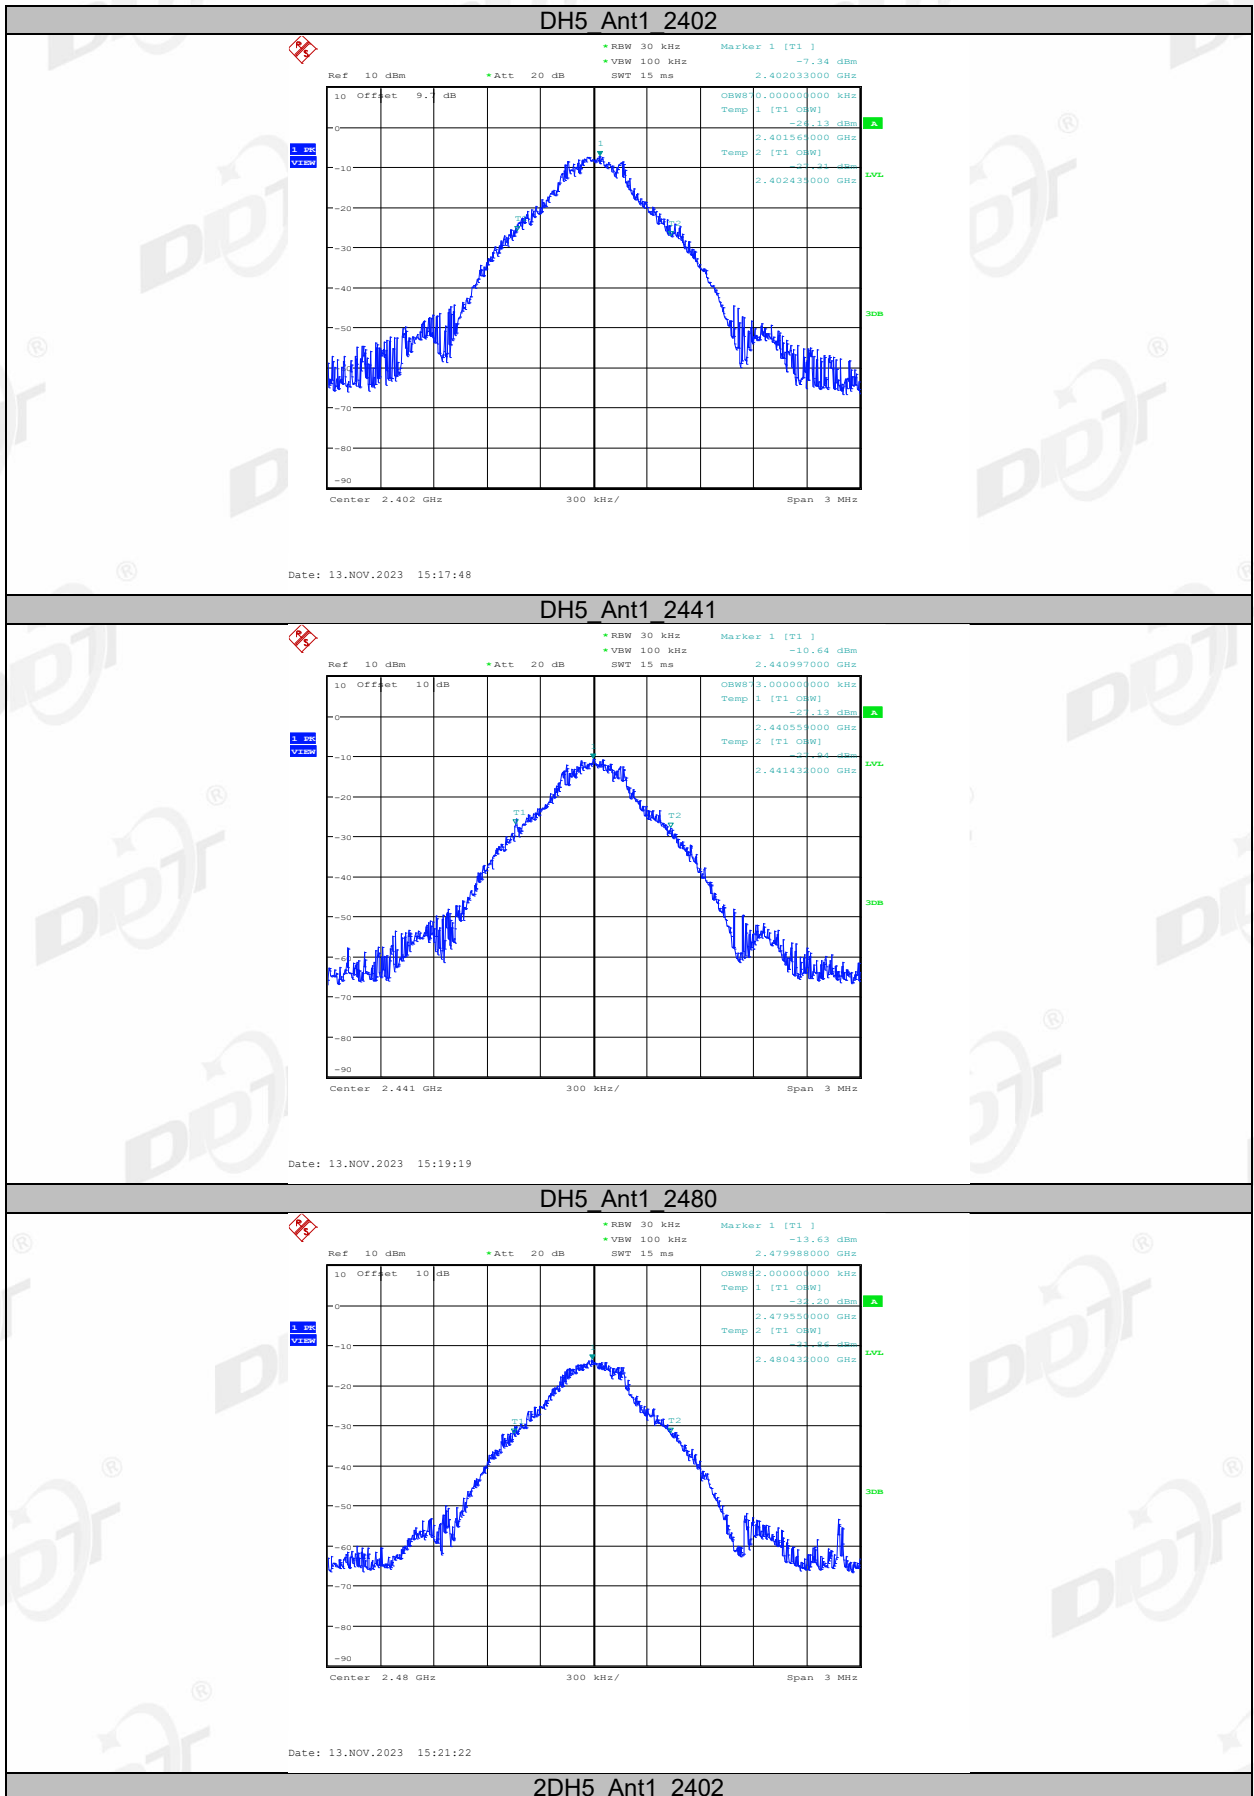





2DH5_Ant1_2441

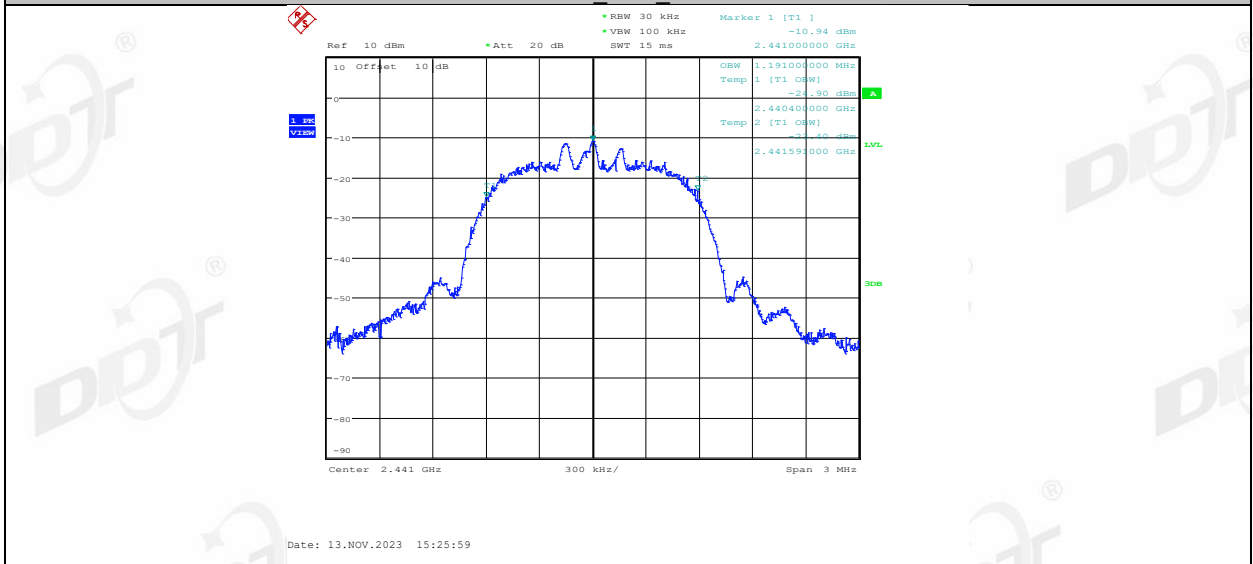


2DH5_Ant1_2480

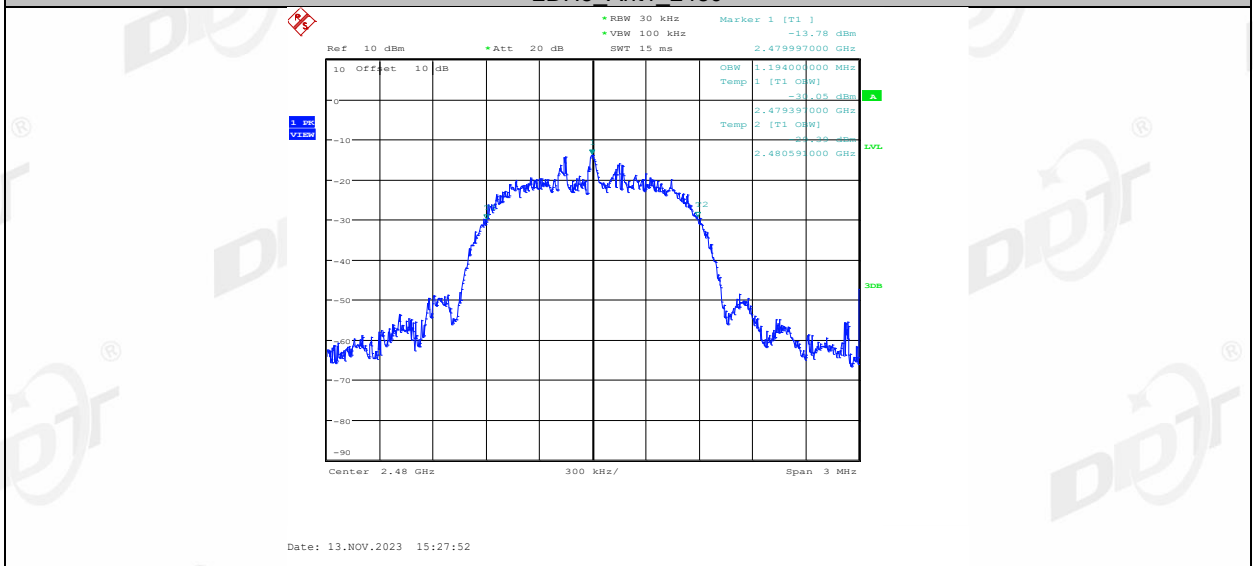


3DH5_Ant1_2402

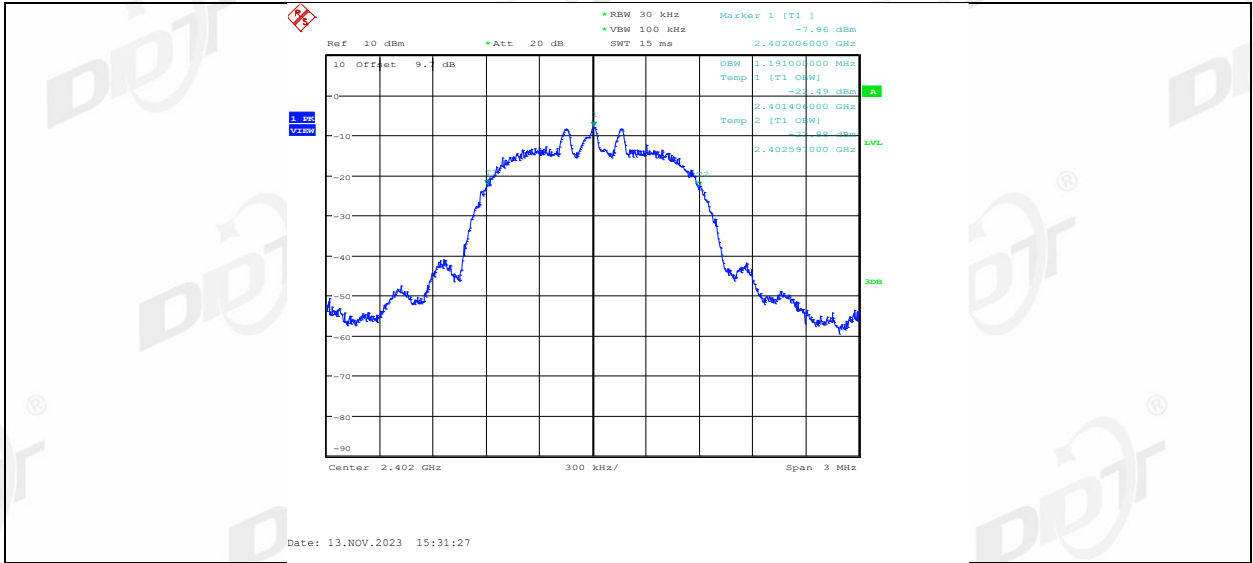

3DH5_Ant1_2441

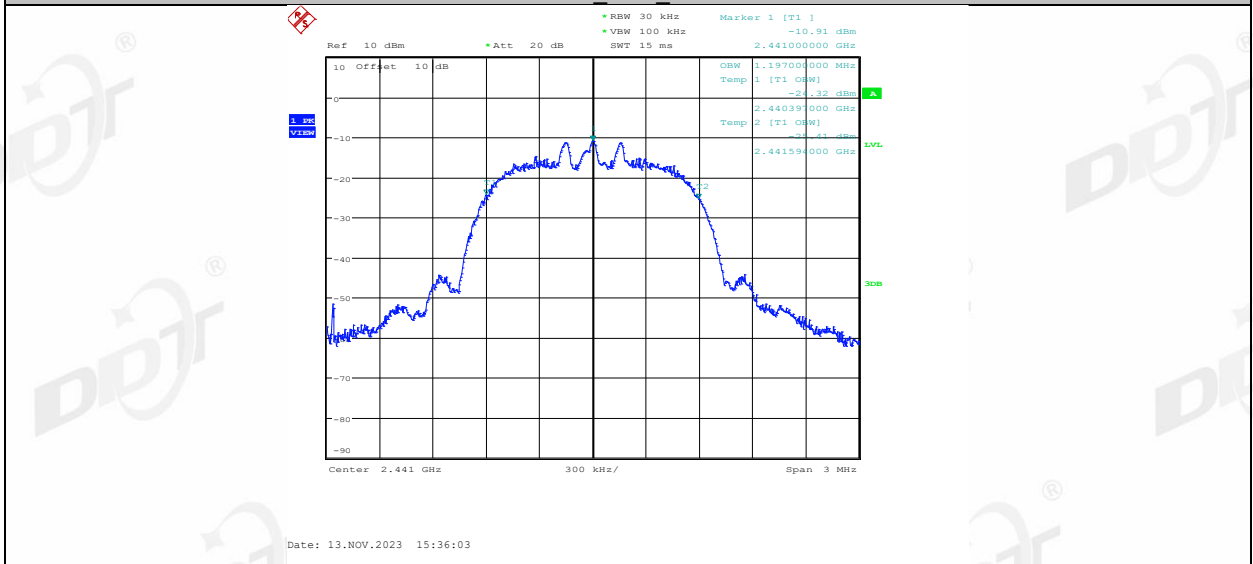


3DH5_Ant1_2480

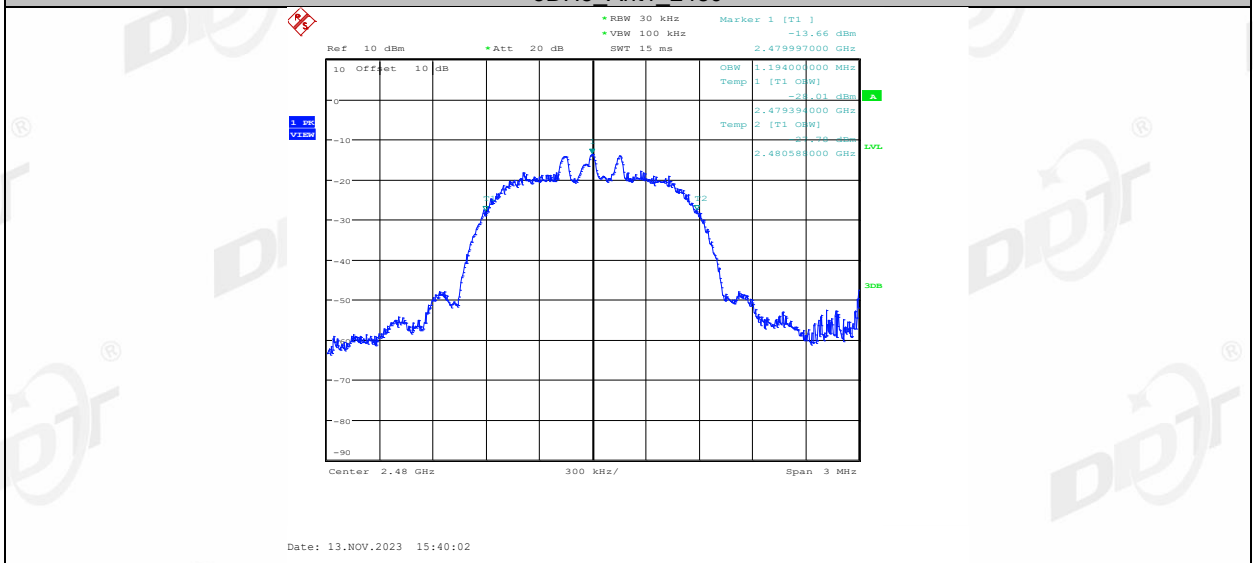

6. Maximum Peak Output Power

6.1. Block diagram of test setup

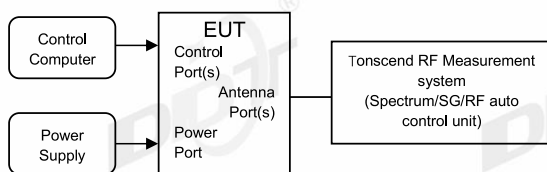

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW \geq RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test Result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6°C,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	-4.57	≤20.97	-2.06	≤30	PASS
		2441	-8.07	≤20.97	-5.56	≤30	PASS
		2480	-10.55	≤20.97	-8.04	≤30	PASS
2DH5	Ant1	2402	-4.61	≤20.97	-2.10	≤30	PASS
		2441	-8.13	≤20.97	-5.62	≤30	PASS
		2480	-10.73	≤20.97	-8.22	≤30	PASS
3DH5	Ant1	2402	-4.22	≤20.97	-1.71	≤30	PASS
		2441	-7.70	≤20.97	-5.19	≤30	PASS
		2480	-10.20	≤20.97	-7.69	≤30	PASS

6.5. Test graphs

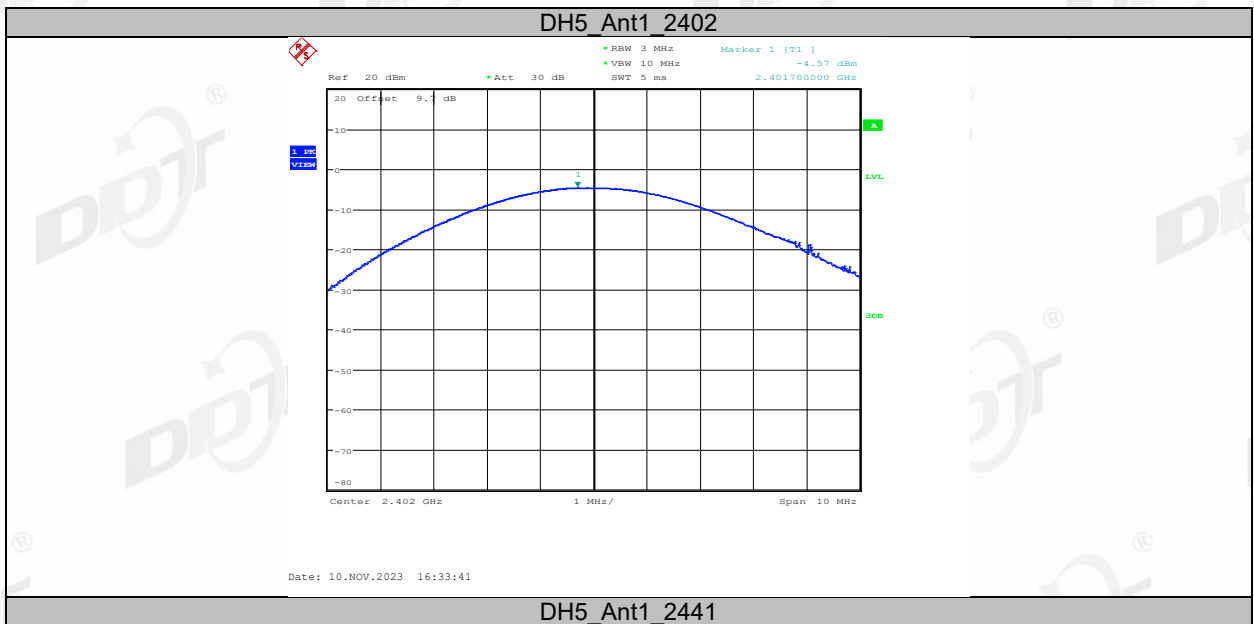


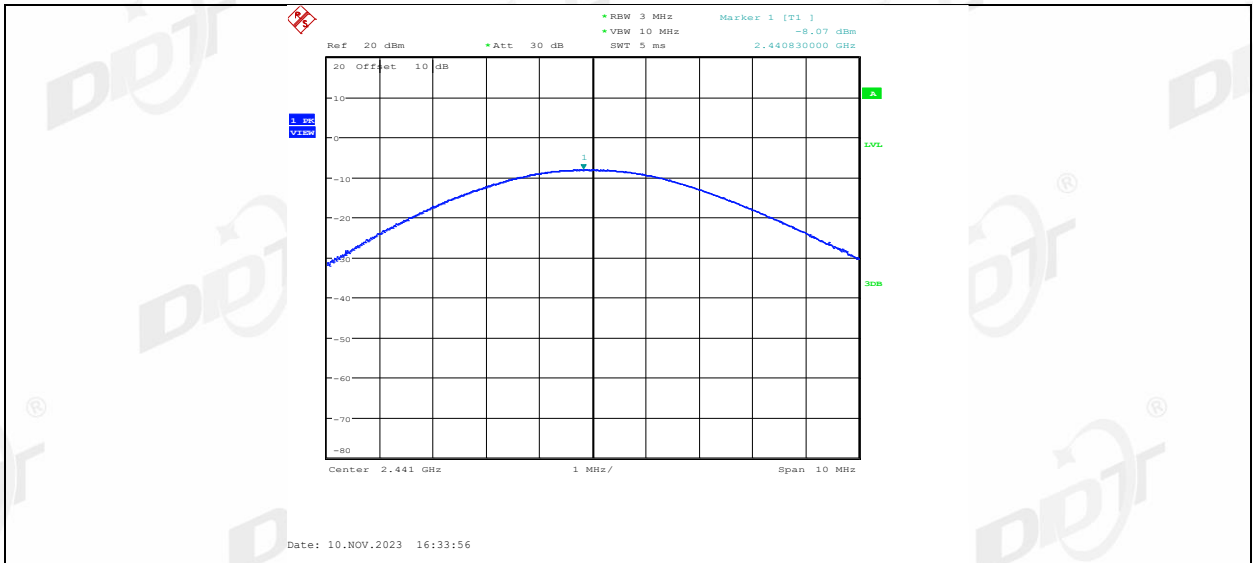


DH5_Ant1_2480

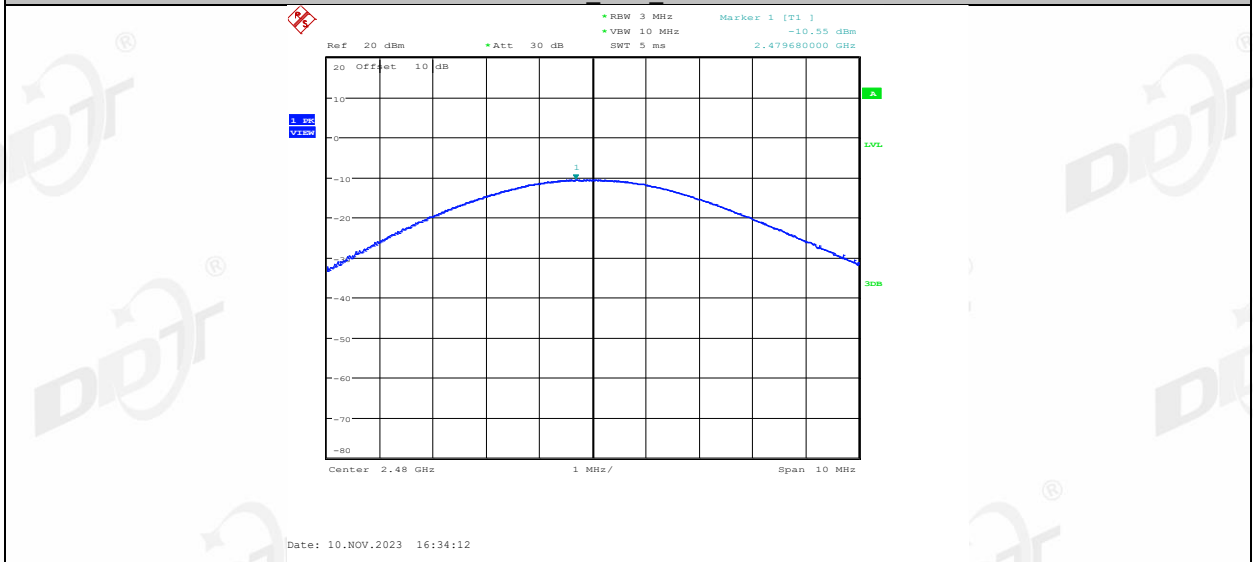


2DH5_Ant1_2402

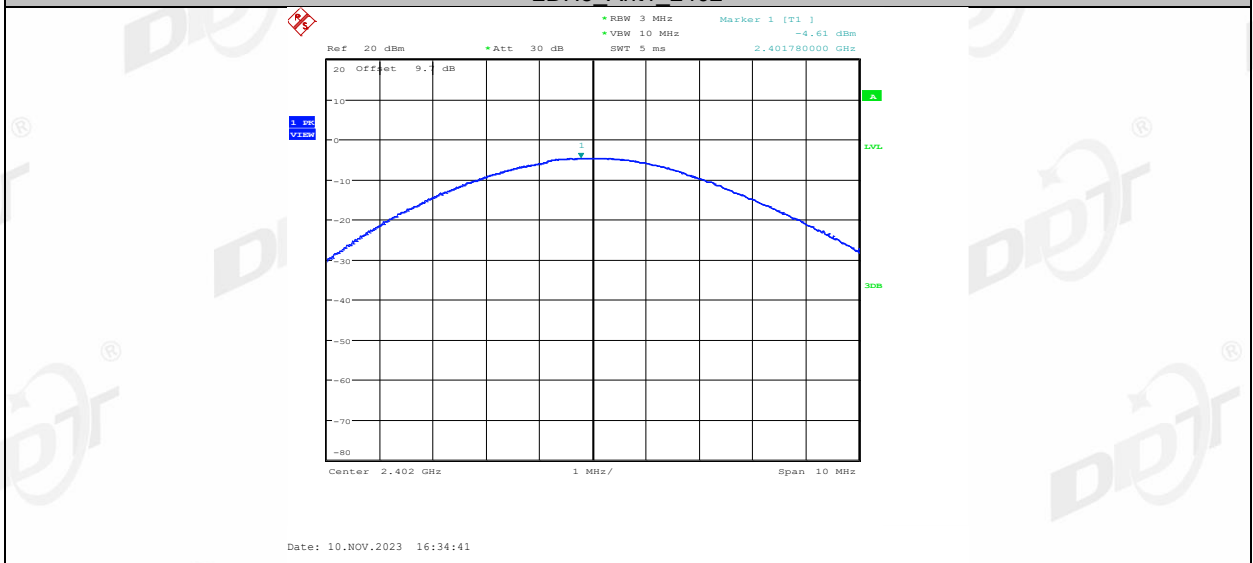


2DH5_Ant1_2441

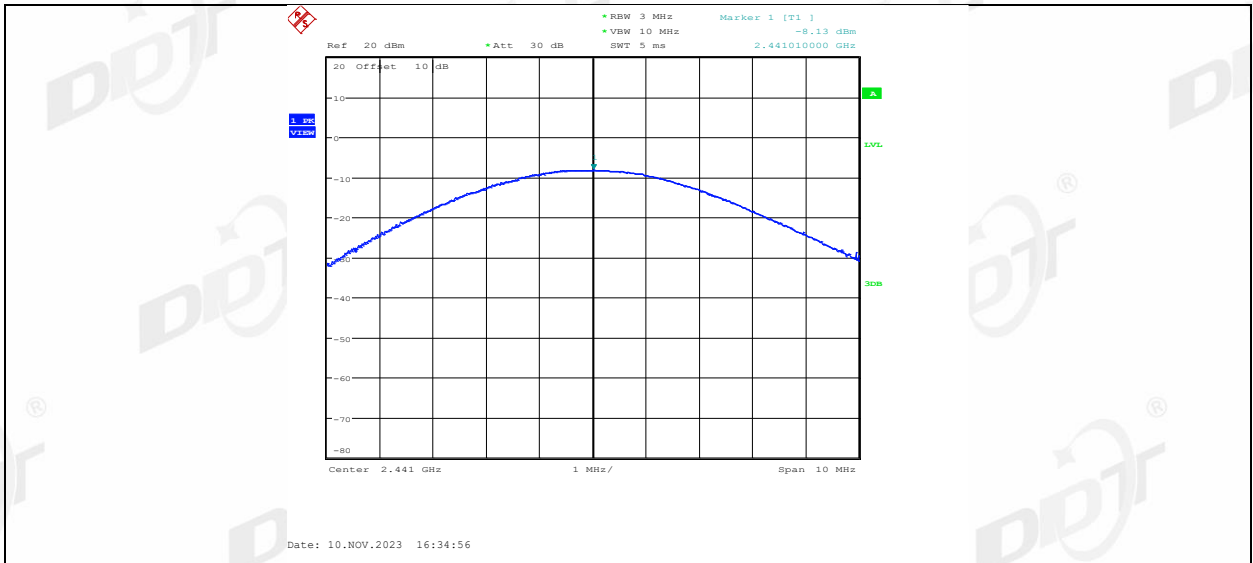


2DH5_Ant1_2480

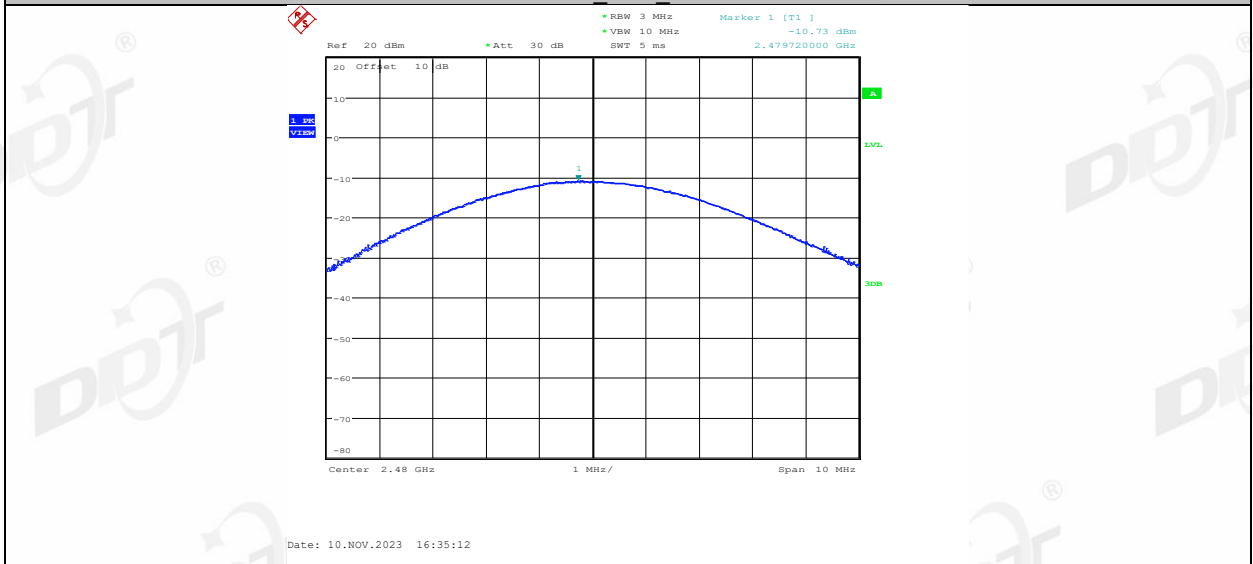


3DH5_Ant1_2402

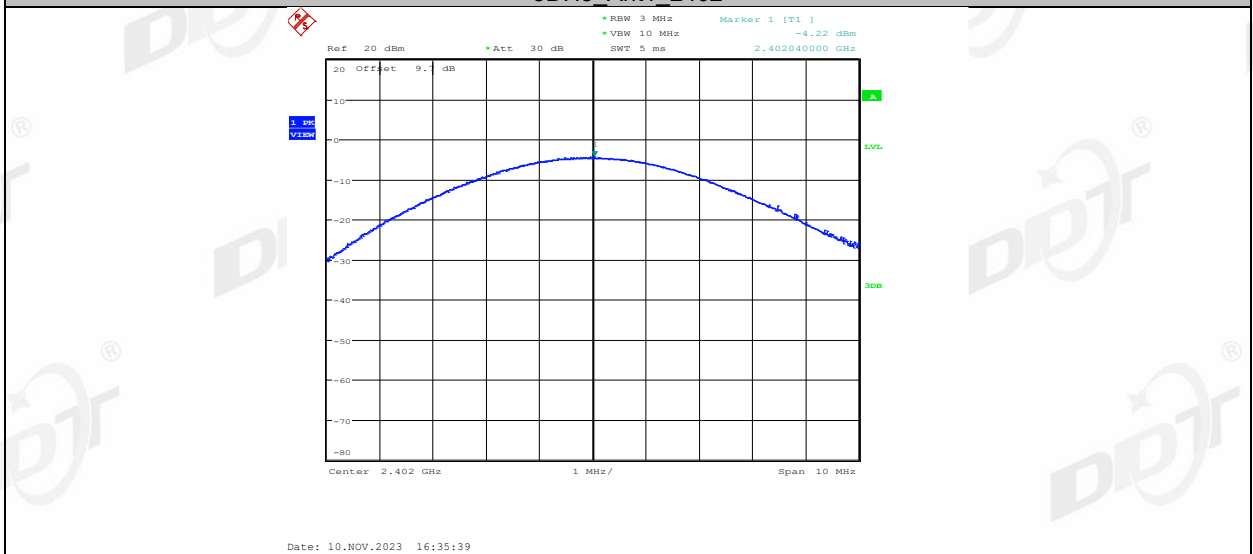

3DH5_Ant1_2441

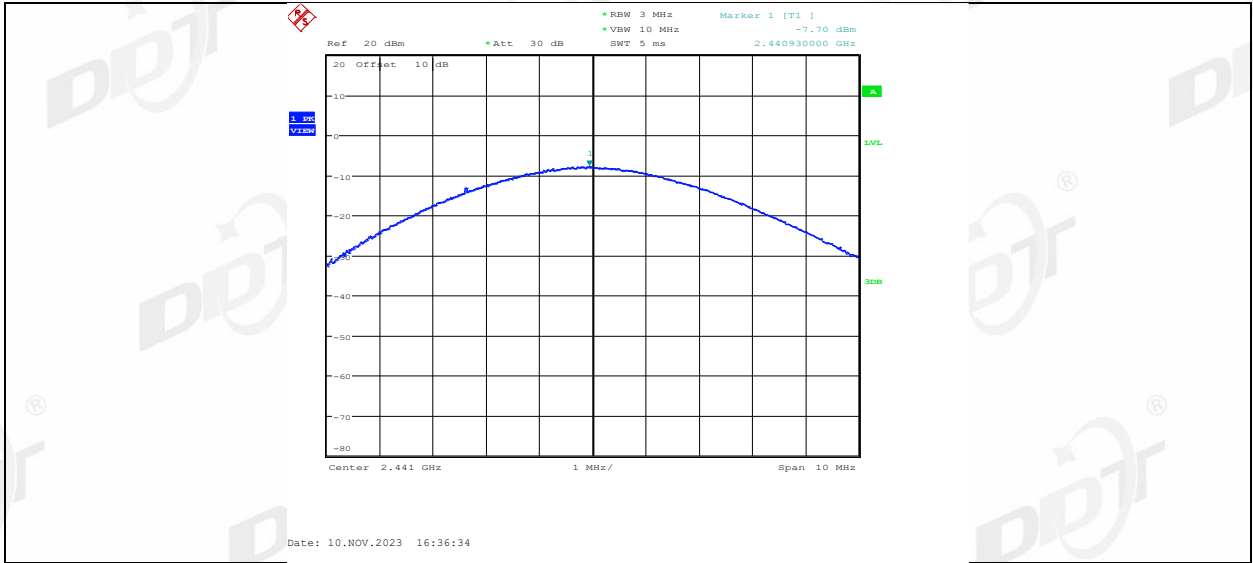


3DH5_Ant1_2480

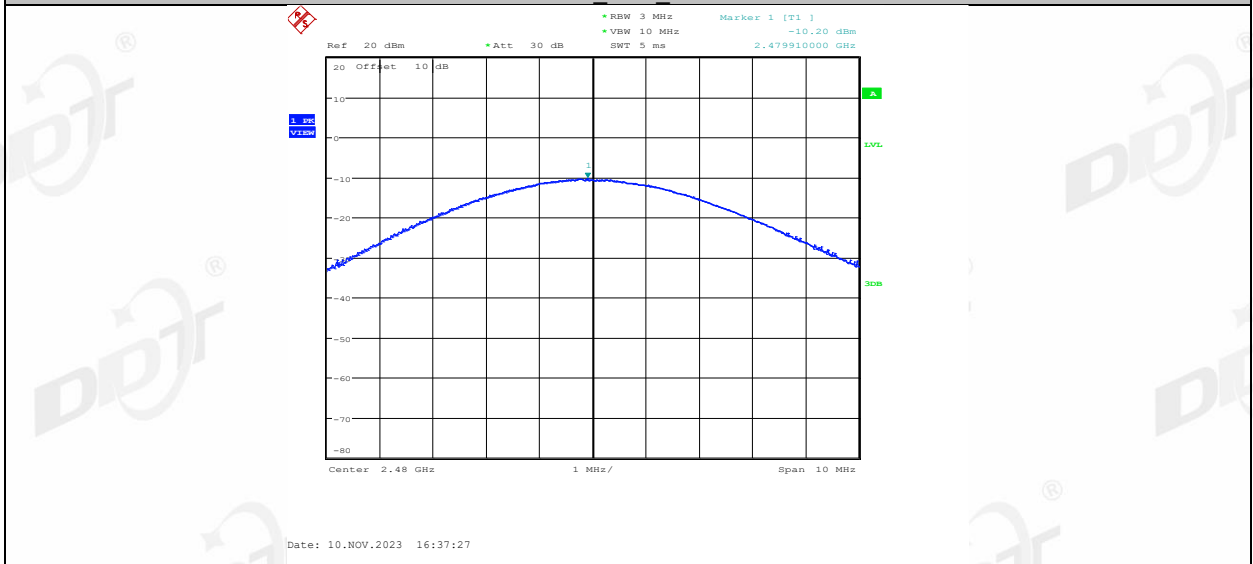

7. Carrier Frequency Separation

7.1. Block diagram of test setup

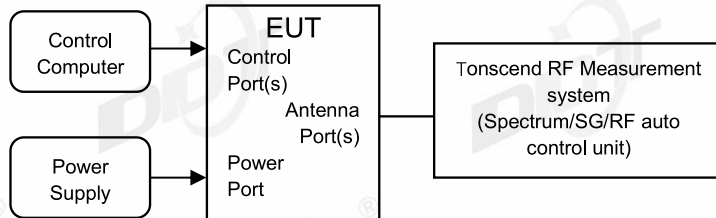

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure




- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 - RBW: approximately 30% of the channel spacing
 - VBW: $VBW \geq RBW$.
 - Span: Wide enough to capture the peaks of two adjacent channels.
 - Detector Mode: Peak
 - Sweep time: Auto
 - Trace mode: Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6°C,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.003	≥ 0.680	PASS
2DH5	Ant1	Hop	1.000	≥ 0.893	PASS
3DH5	Ant1	Hop	1.003	≥ 0.893	PASS

7.5. Test graphs

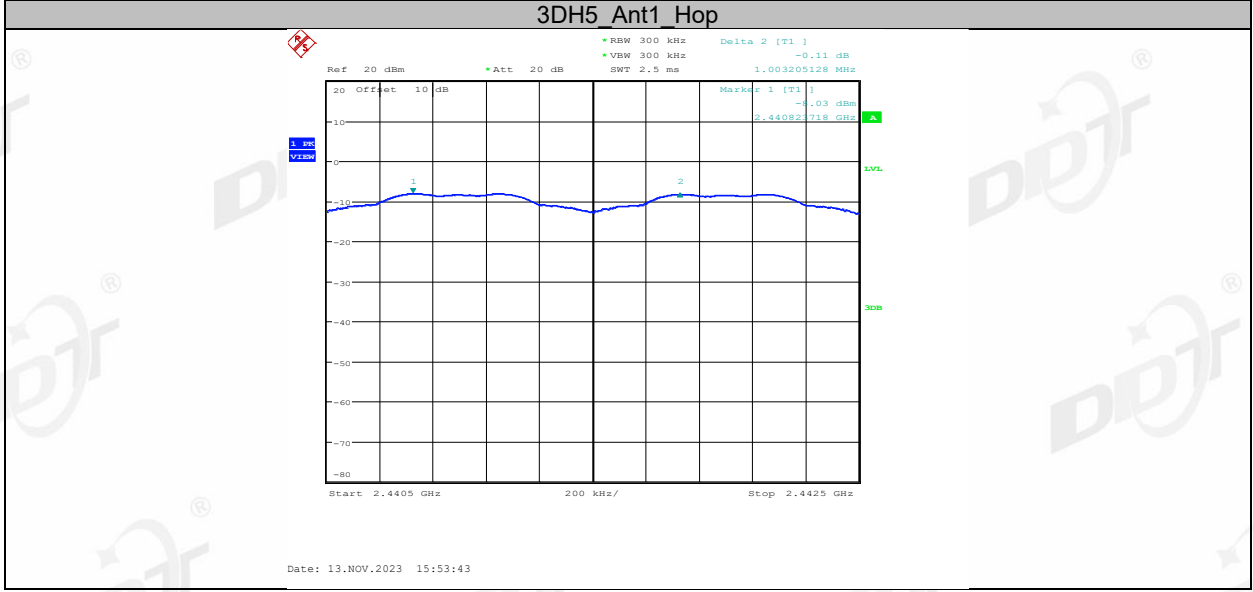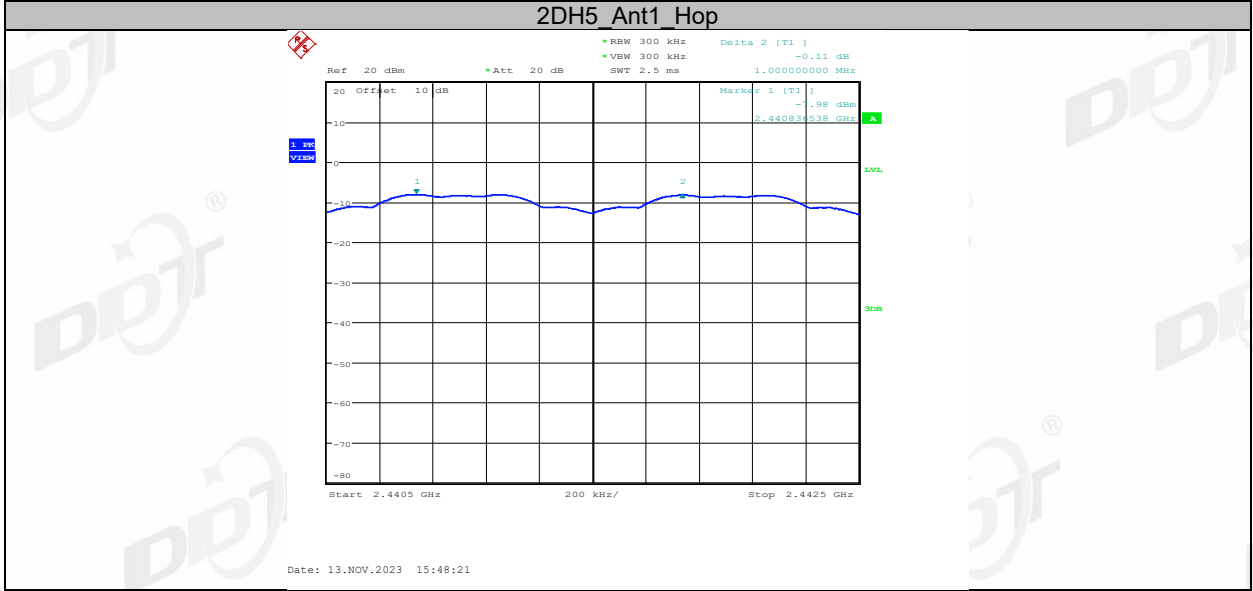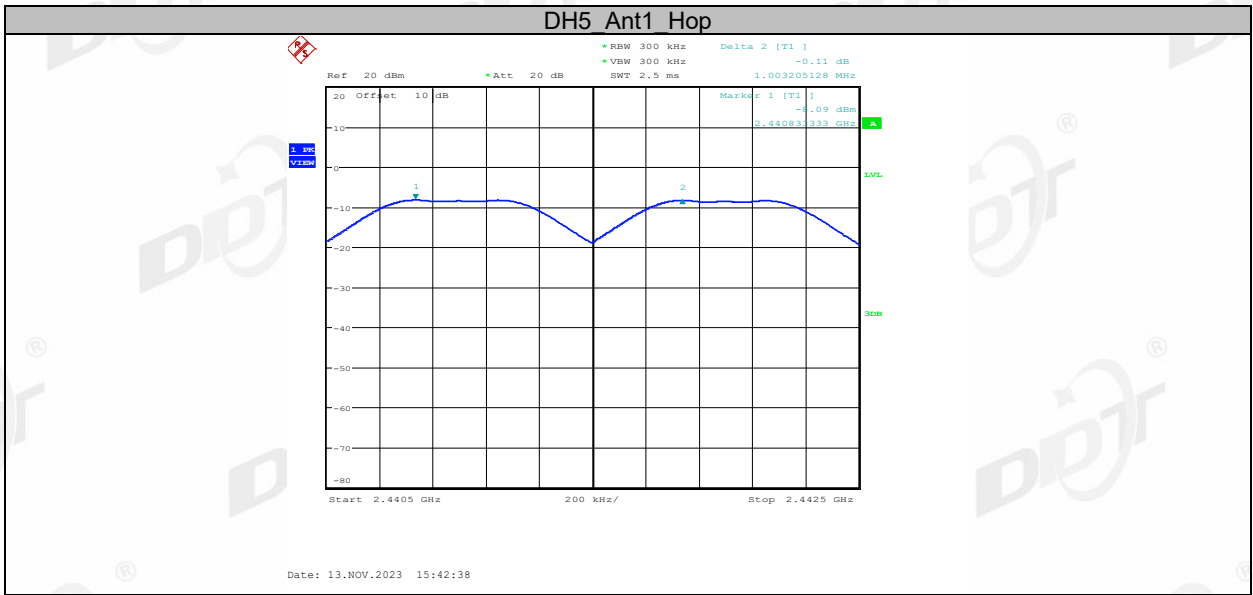

8. Dwell Time

8.1. Block diagram of test setup

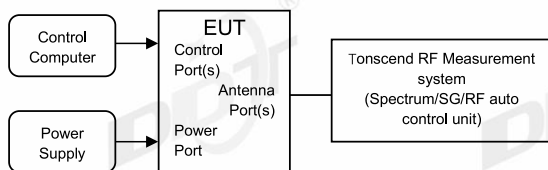

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	≤ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.
- (7) Measure and record the results in the report.




8.4. Test result


Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6°C,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.360	313	0.113	≤0.4	PASS
DH3	Ant1	Hop	1.630	173	0.282	≤0.4	PASS
DH5	Ant1	Hop	2.880	109	0.314	≤0.4	PASS
2DH1	Ant1	Hop	0.370	312	0.115	≤0.4	PASS
2DH3	Ant1	Hop	1.620	173	0.28	≤0.4	PASS
2DH5	Ant1	Hop	2.865	103	0.295	≤0.4	PASS
3DH1	Ant1	Hop	0.370	313	0.116	≤0.4	PASS
3DH3	Ant1	Hop	1.630	179	0.292	≤0.4	PASS
3DH5	Ant1	Hop	2.870	101	0.29	≤0.4	PASS


8.5. Test graphs



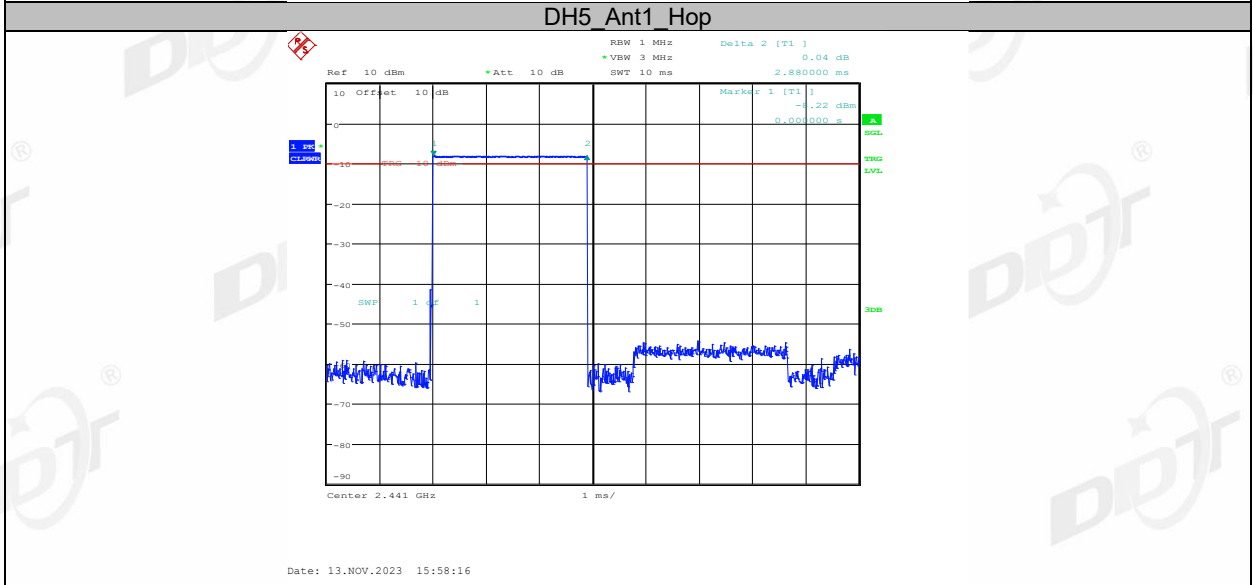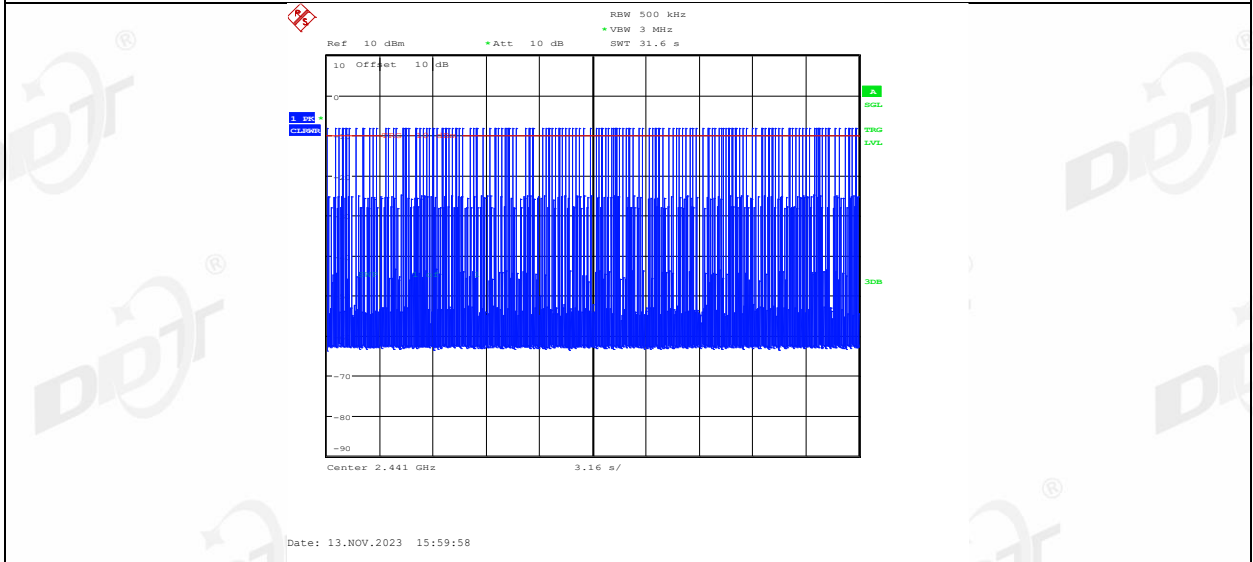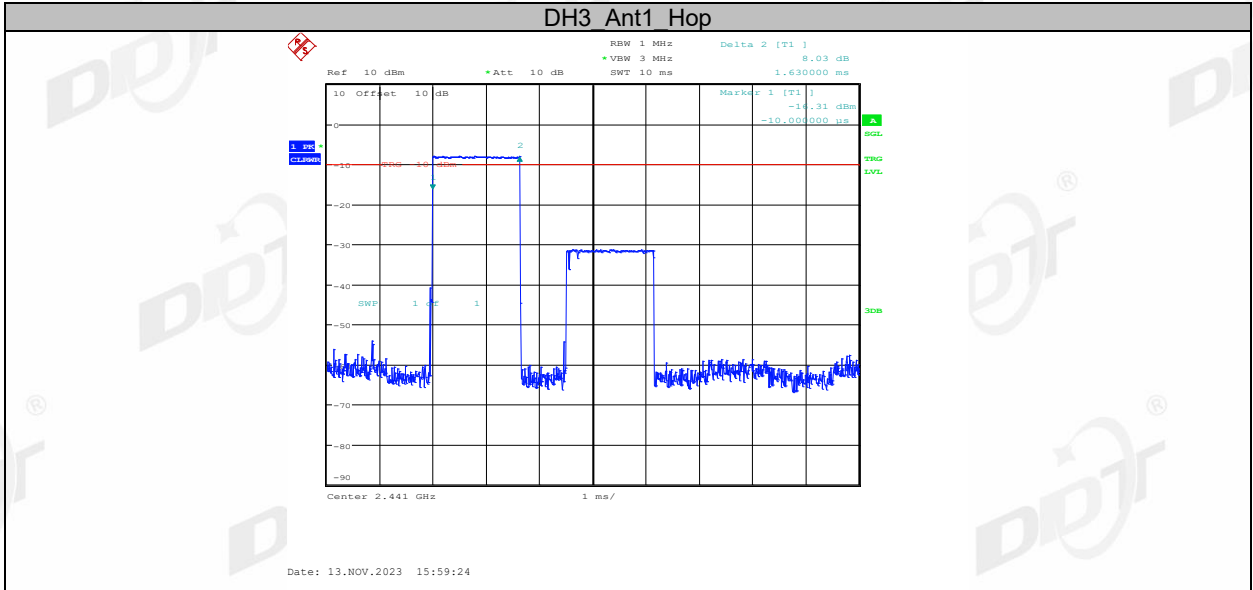



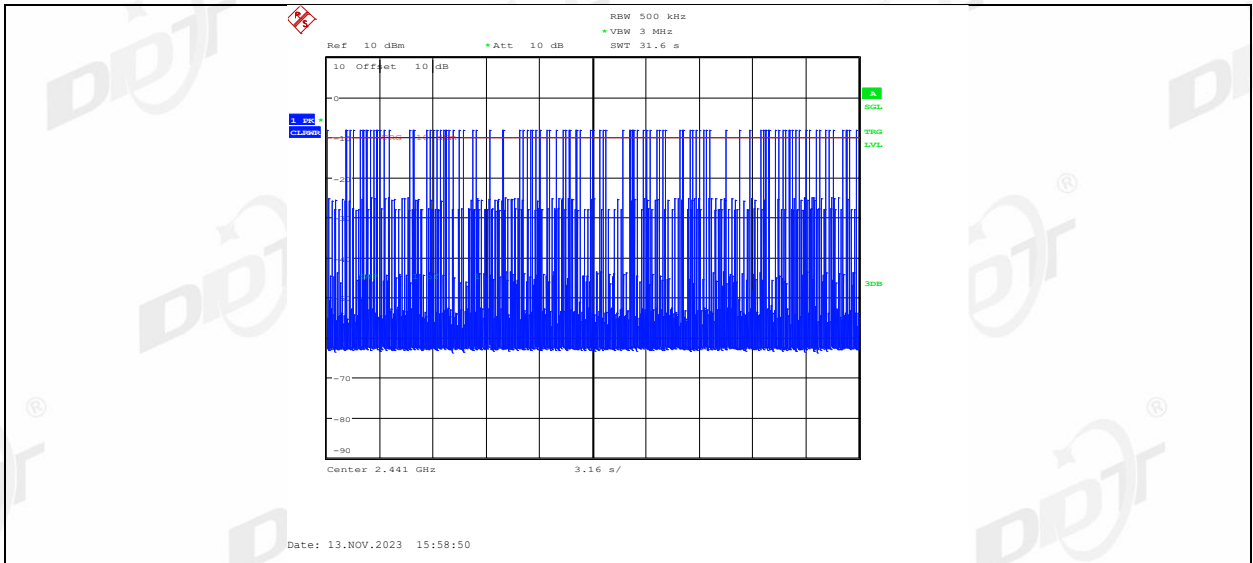


2DH1_Ant1_Hop

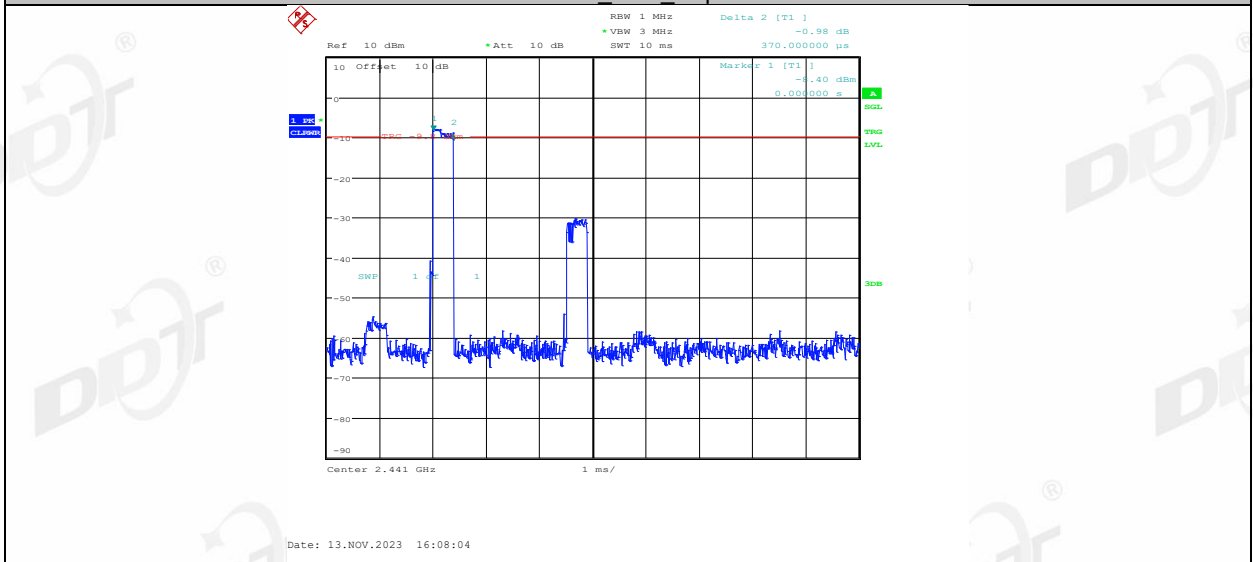



2DH3_Ant1_Hop

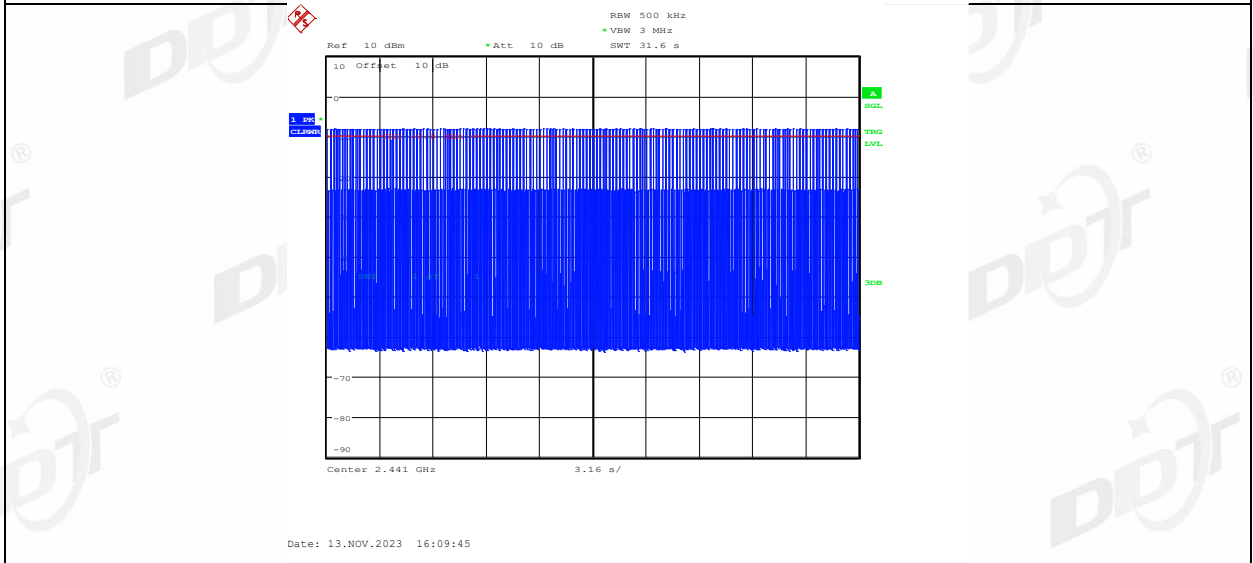

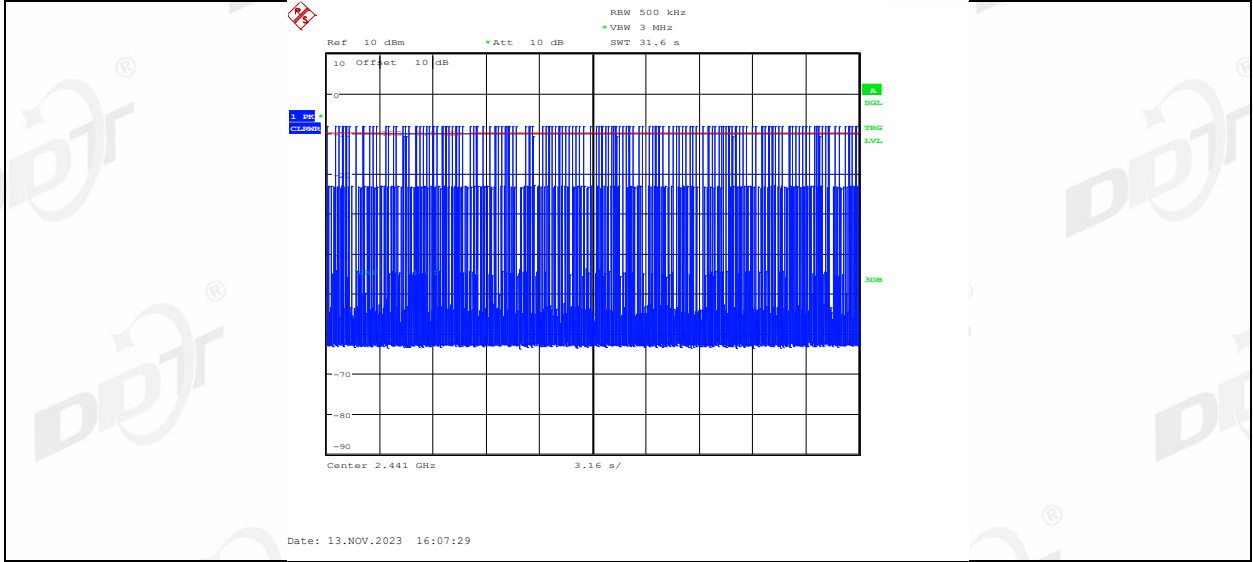
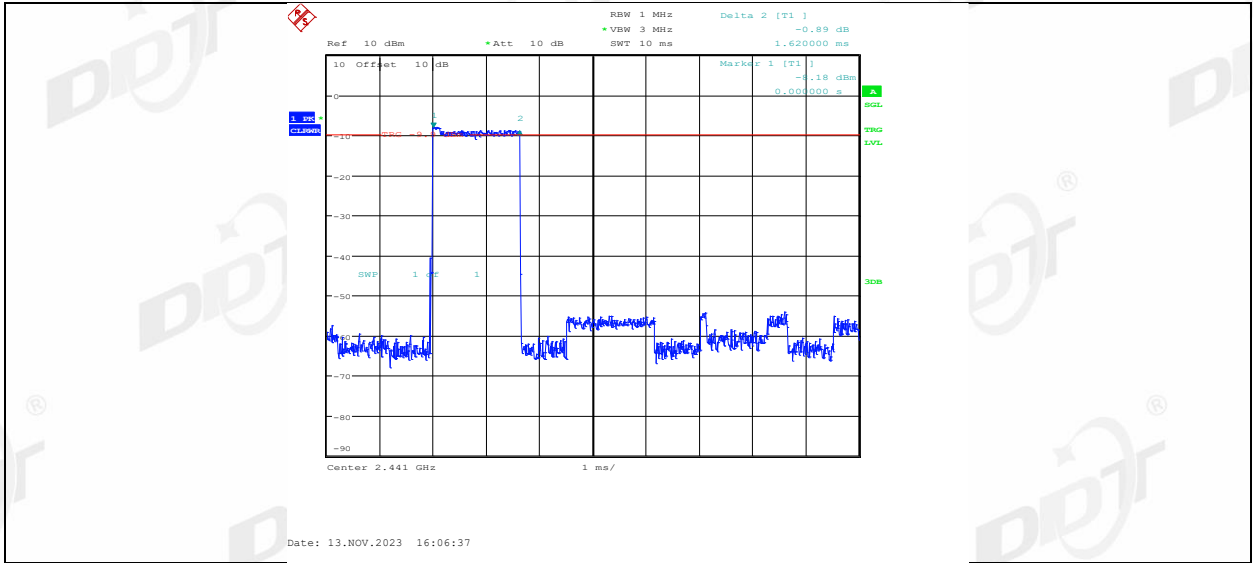


2DH5_Ant1_Hop


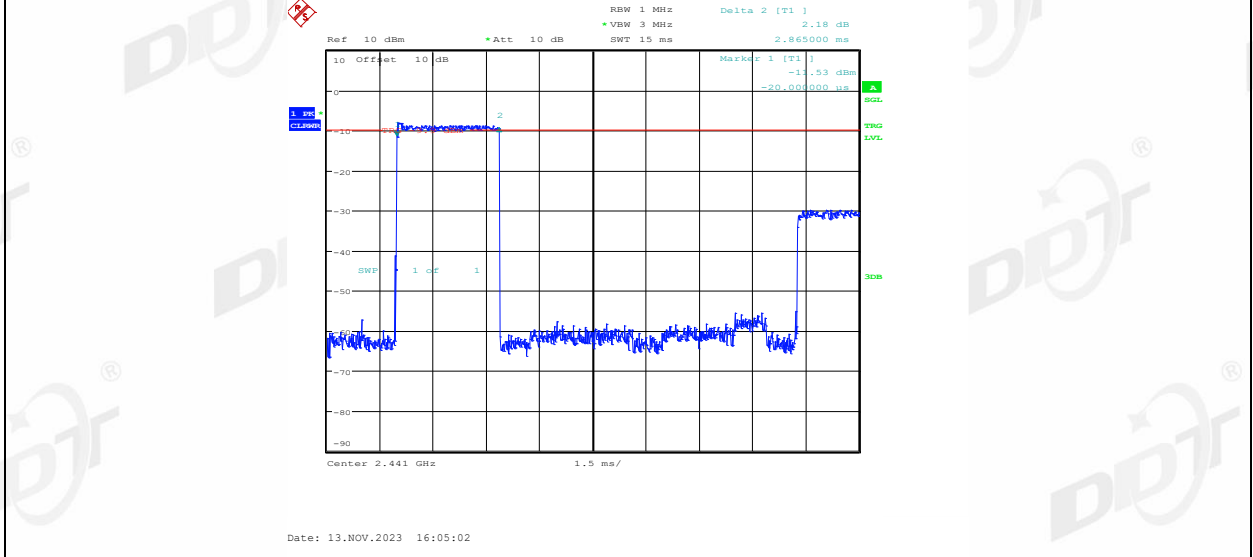


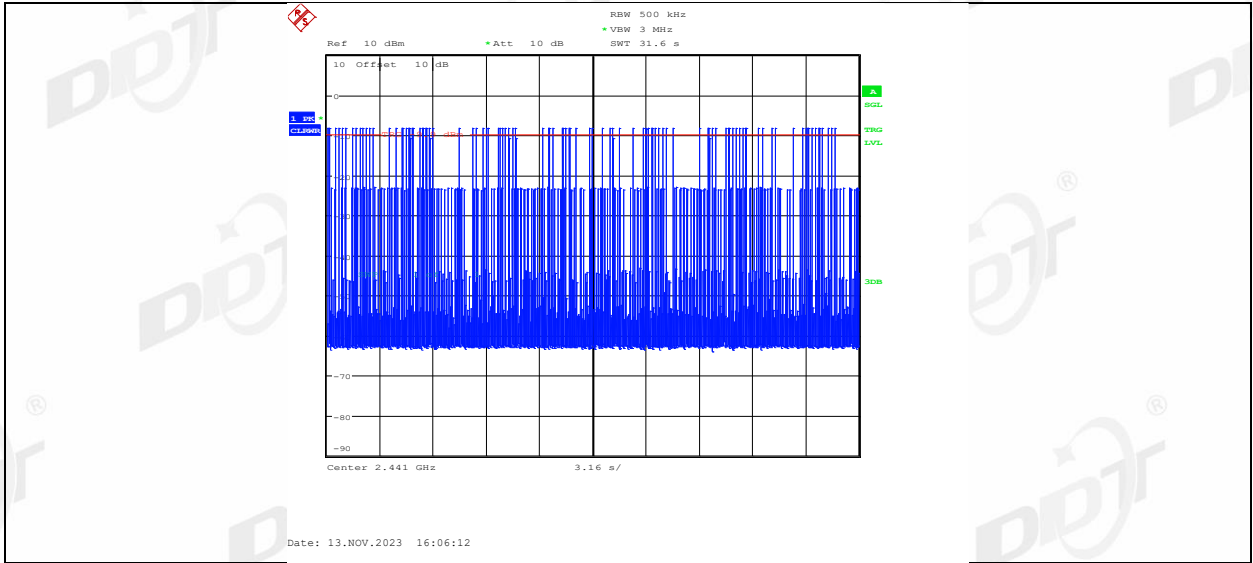


3DH1_Ant1_Hop

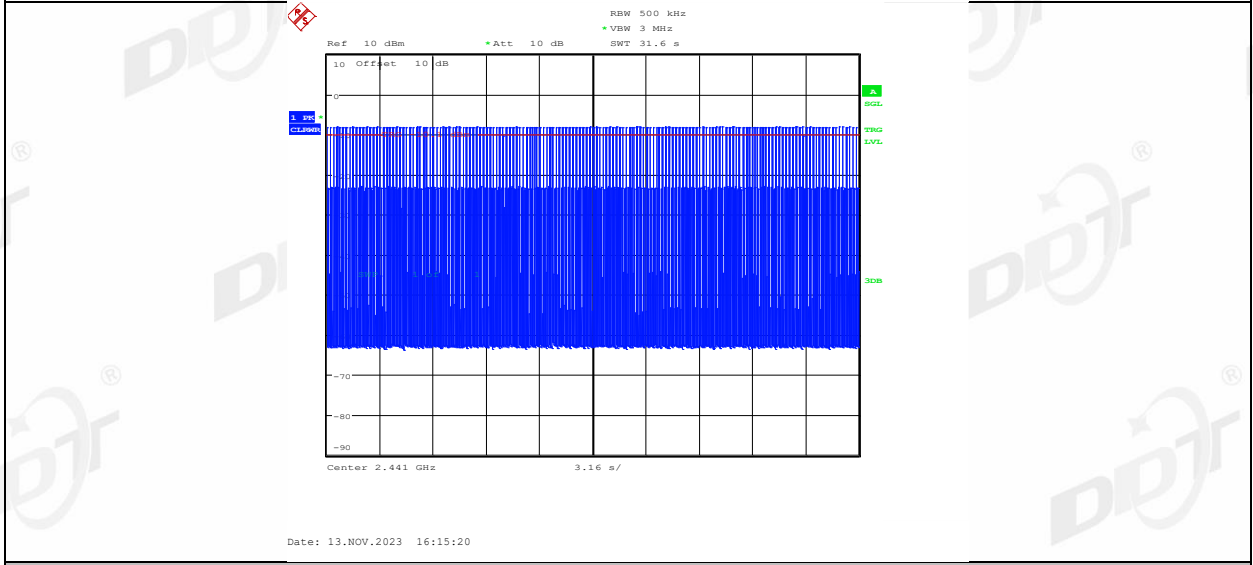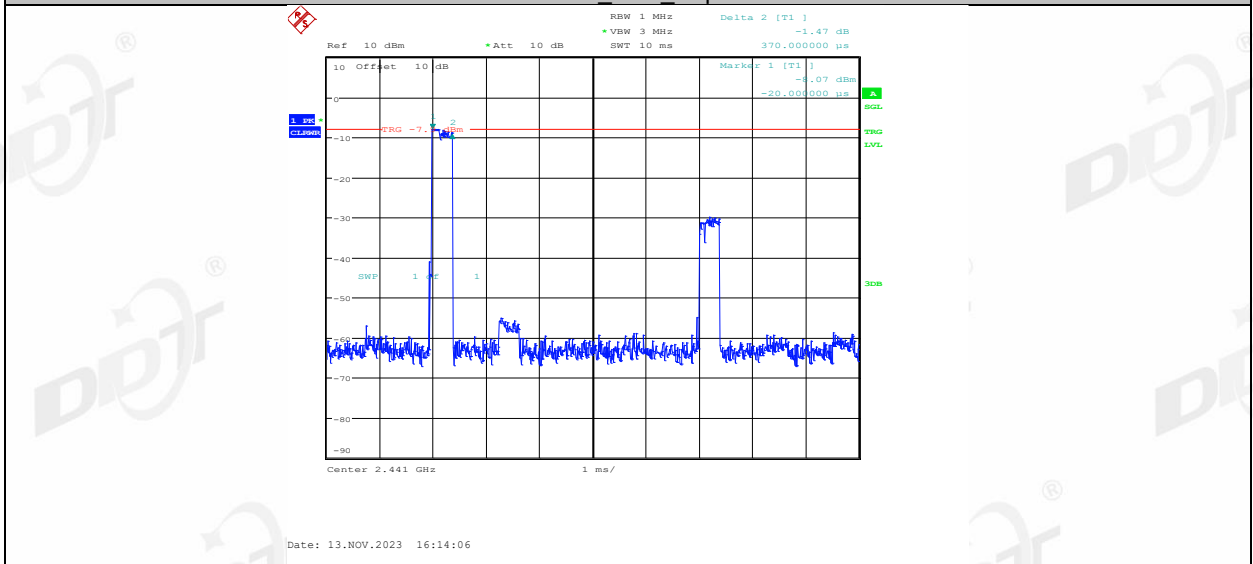


3DH3_Ant1_Hop

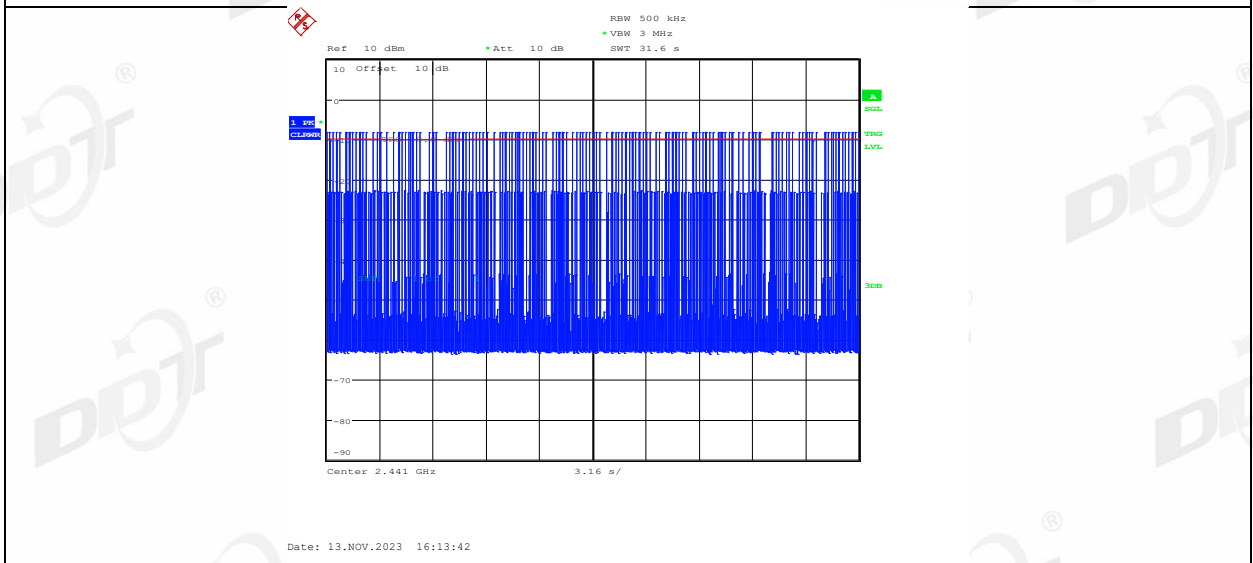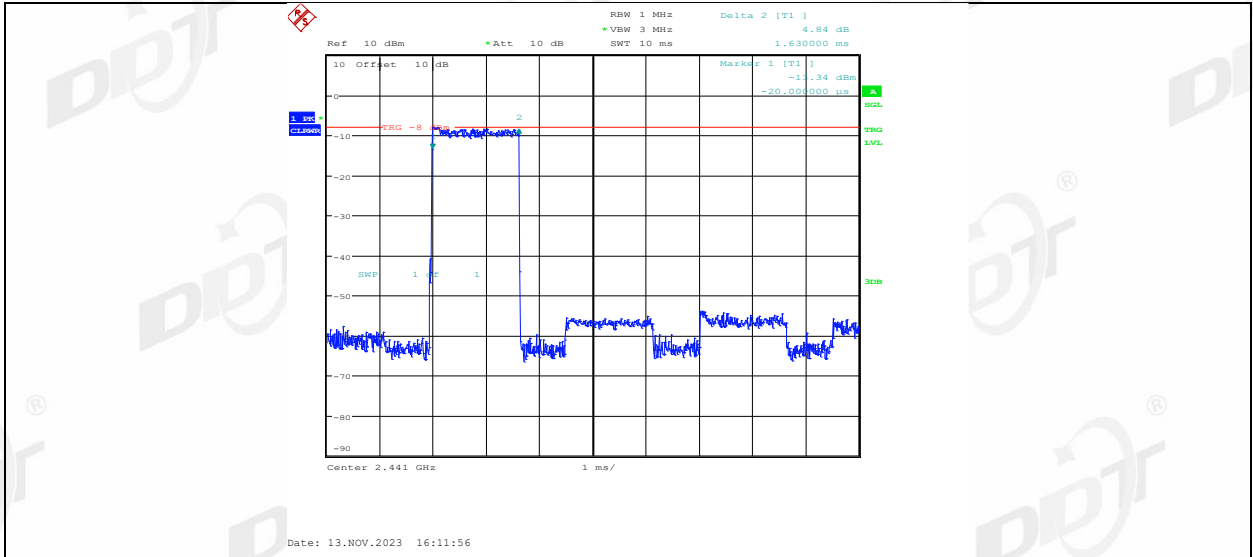


3DH5_Ant1_Hop

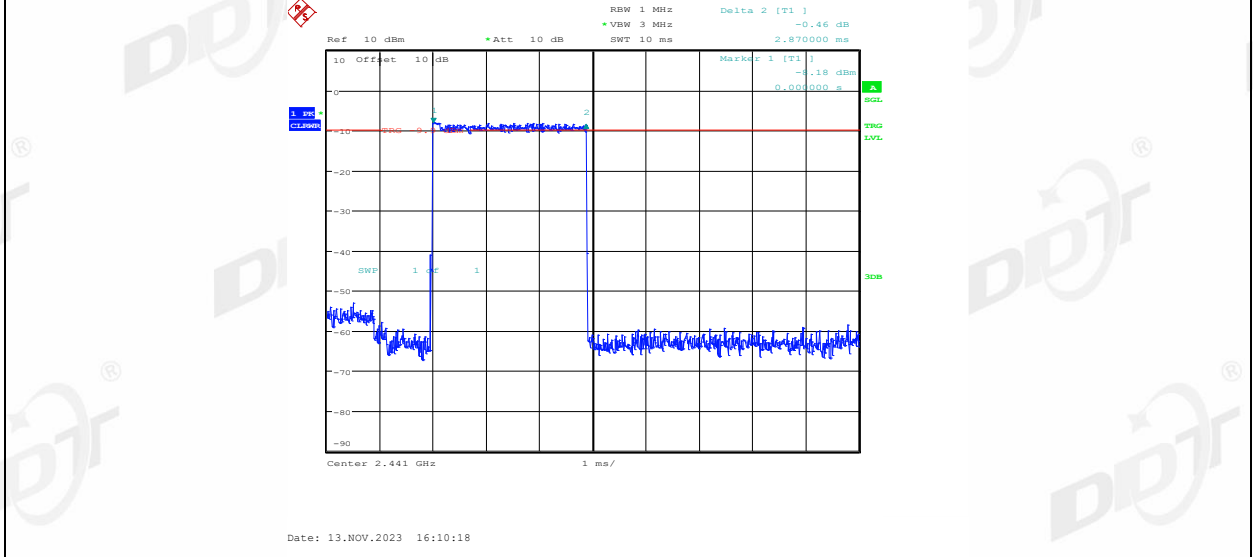

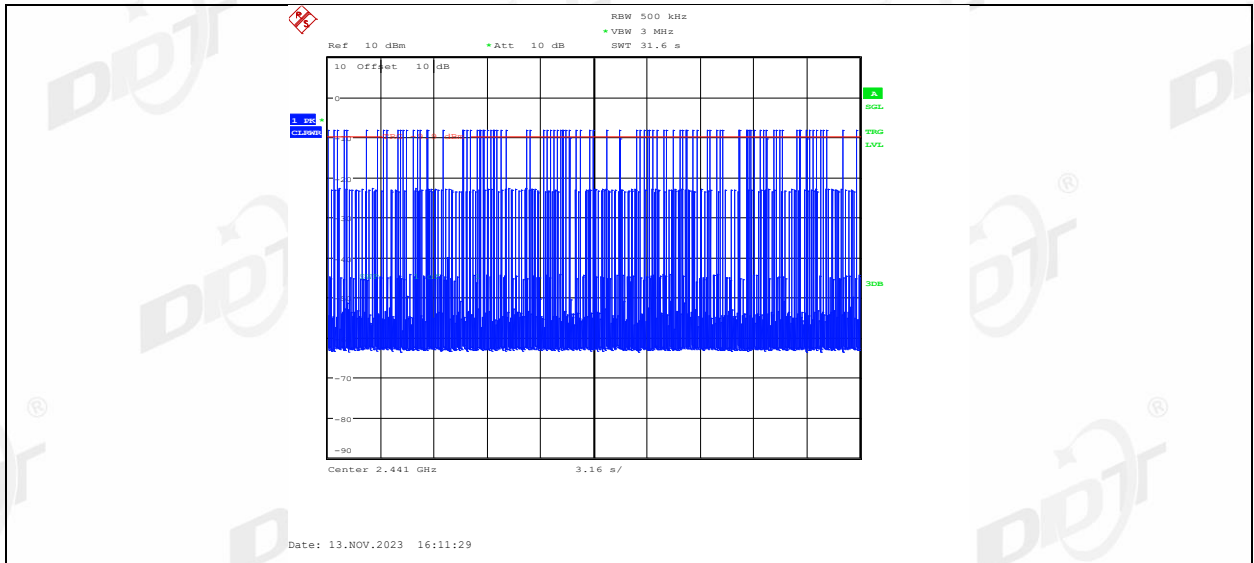

9. Number of Hopping Channel

9.1. Block diagram of test setup

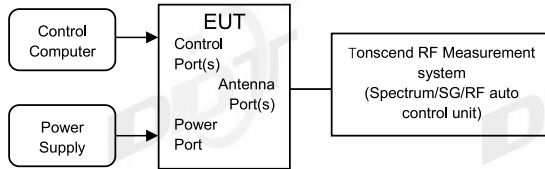

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW \geq RBW.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold




- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6°C,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

9.5. Test graphs

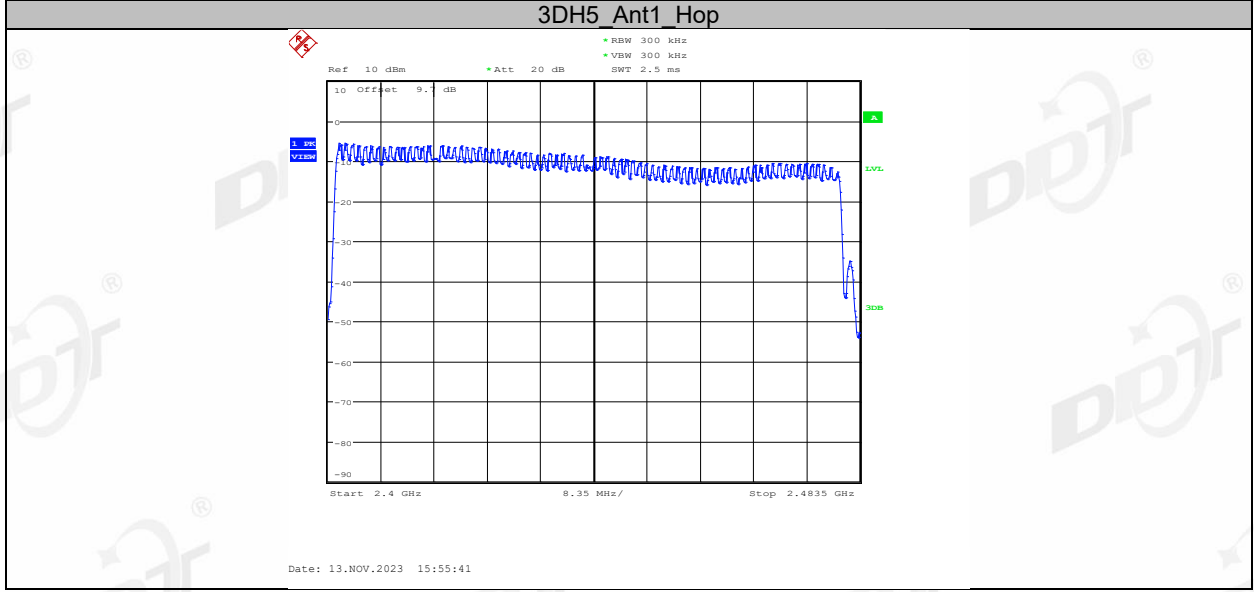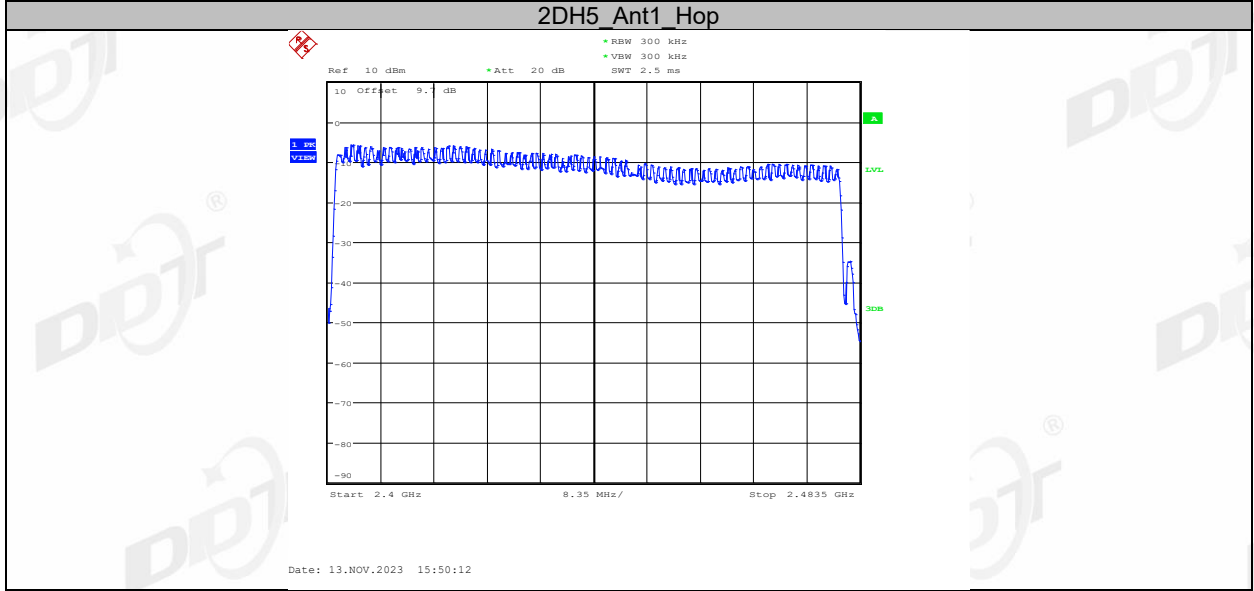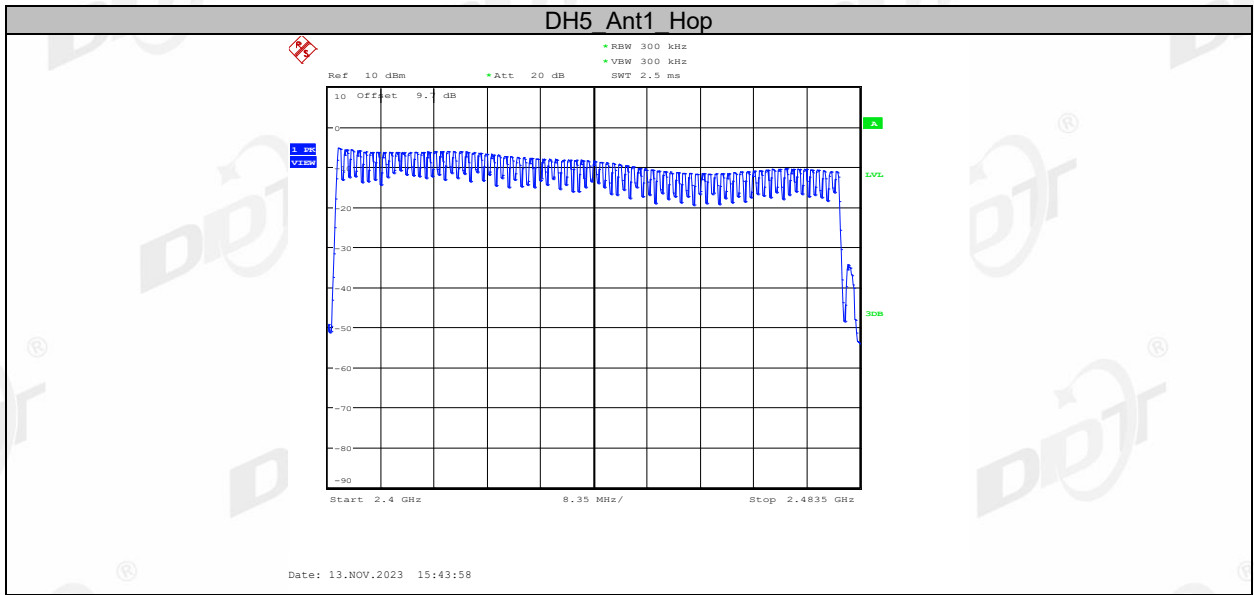

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

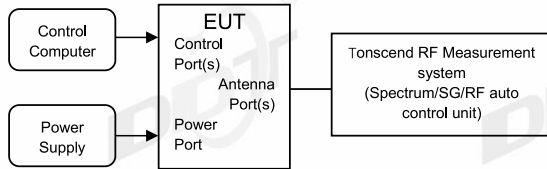

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:
 - RBW: 100 kHz
 - VBW: 300 kHz
 - Span Encompass frequency range to be measured
 - Detector Mode: Peak
 - Sweep time: Auto
 - Trace mode Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.23
Ambient Condition:	24.6℃,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs

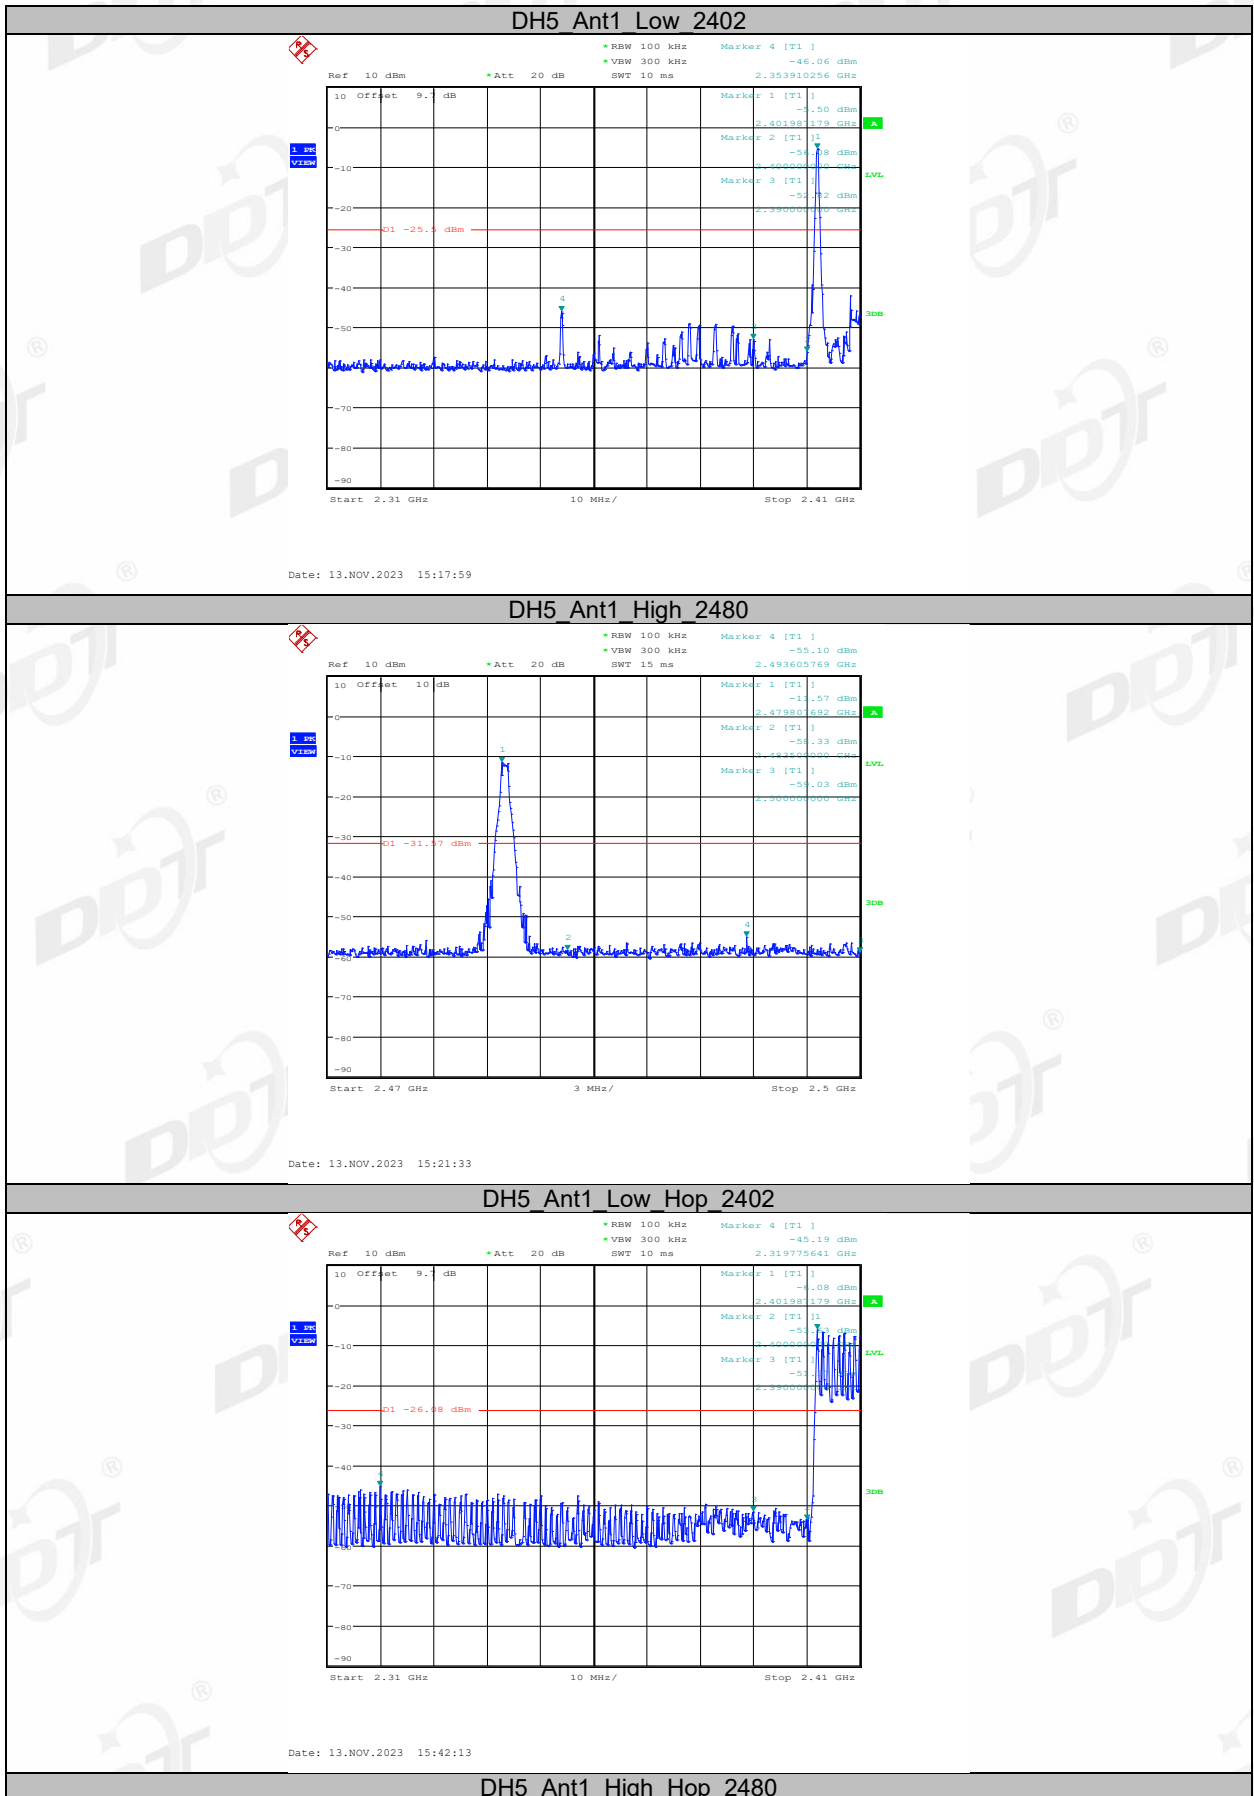


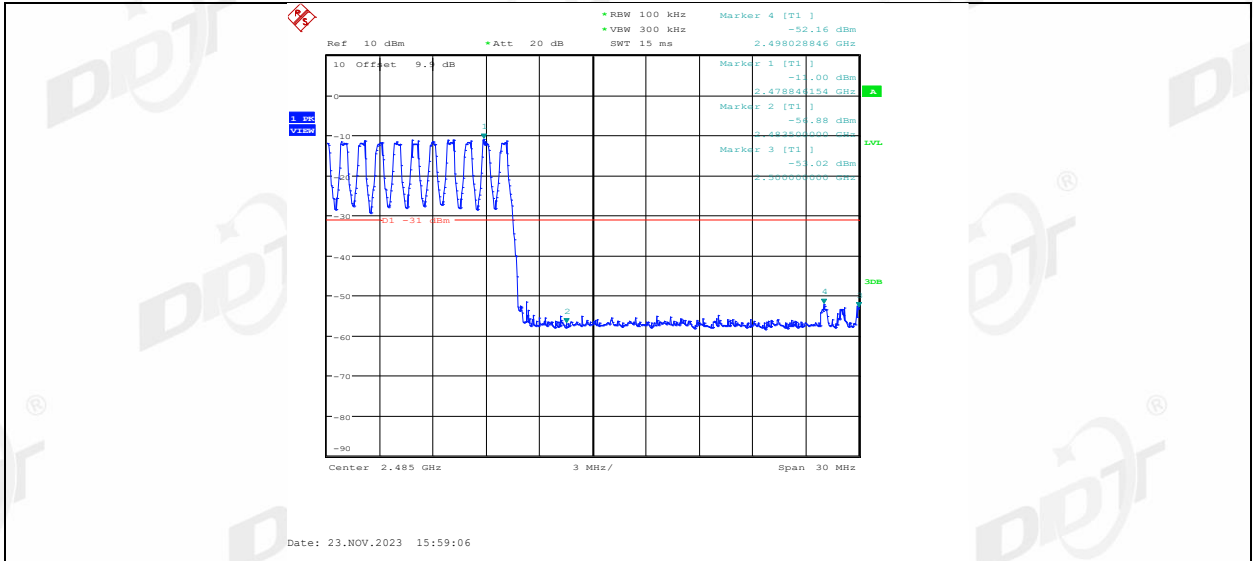




2DH5_Ant1_Low_2402



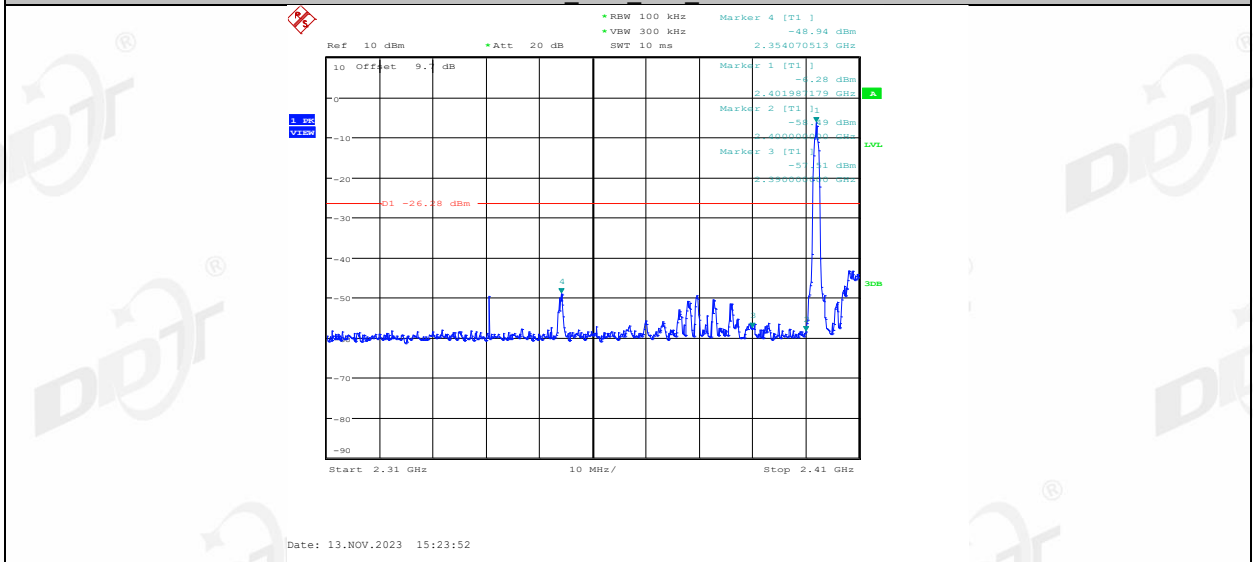


2DH5_Ant1_High_2480

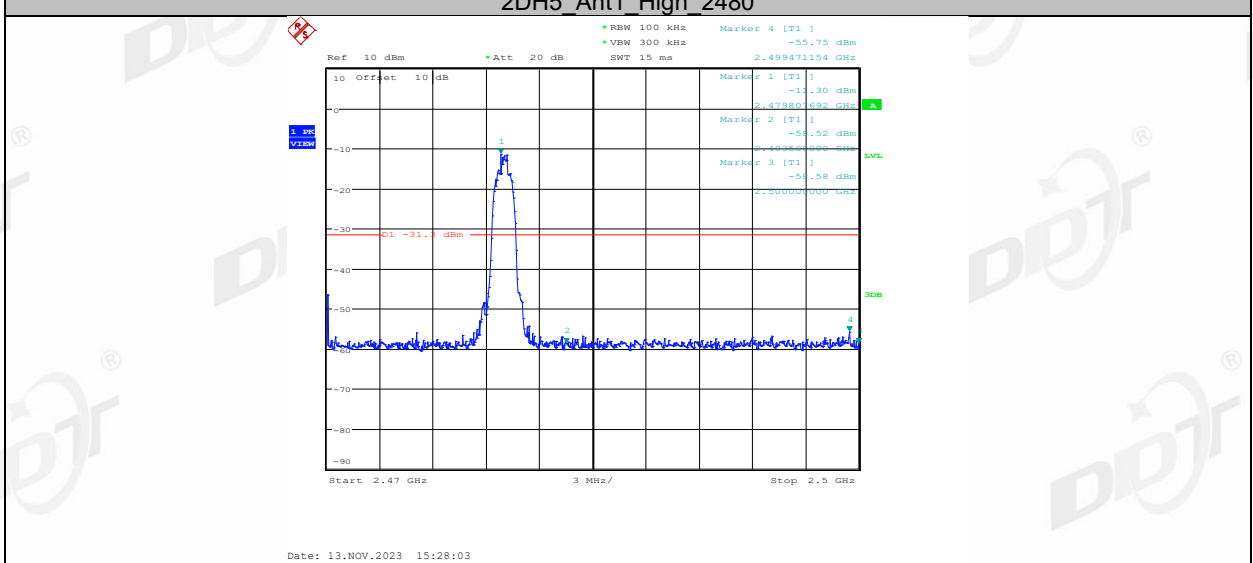


2DH5_Ant1_Low_Hop_2402

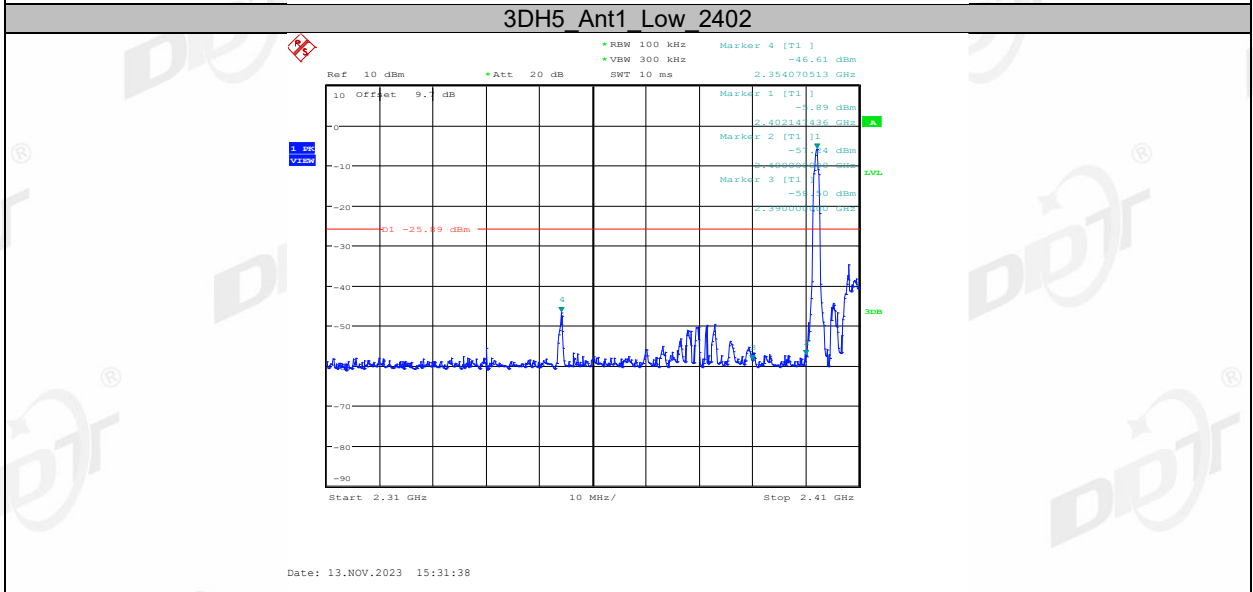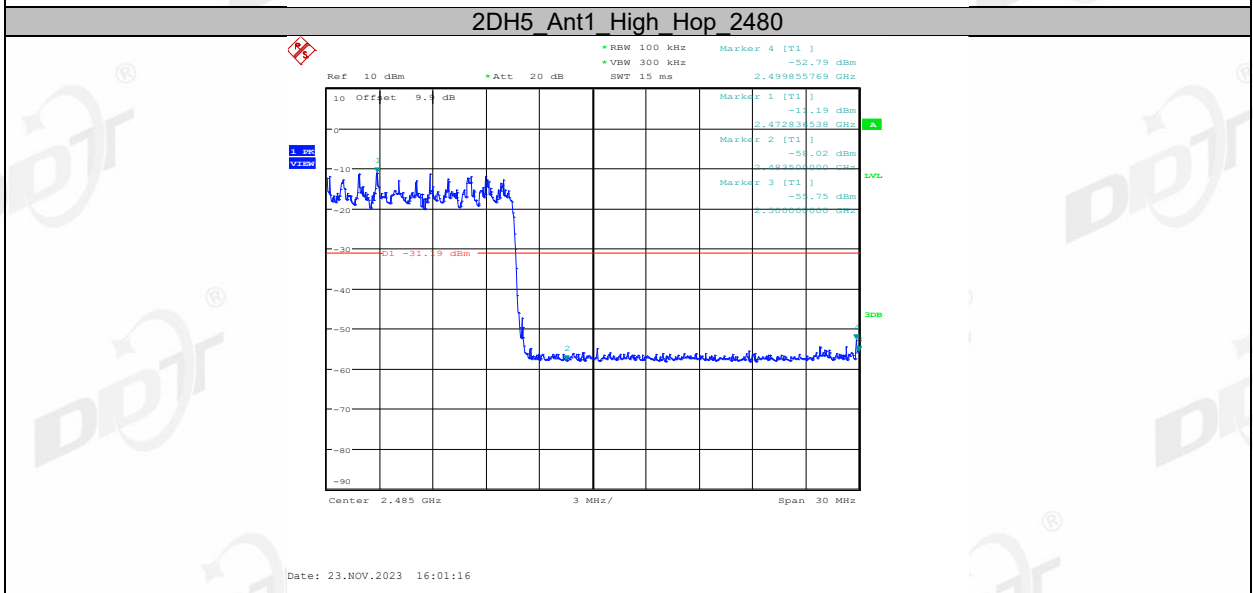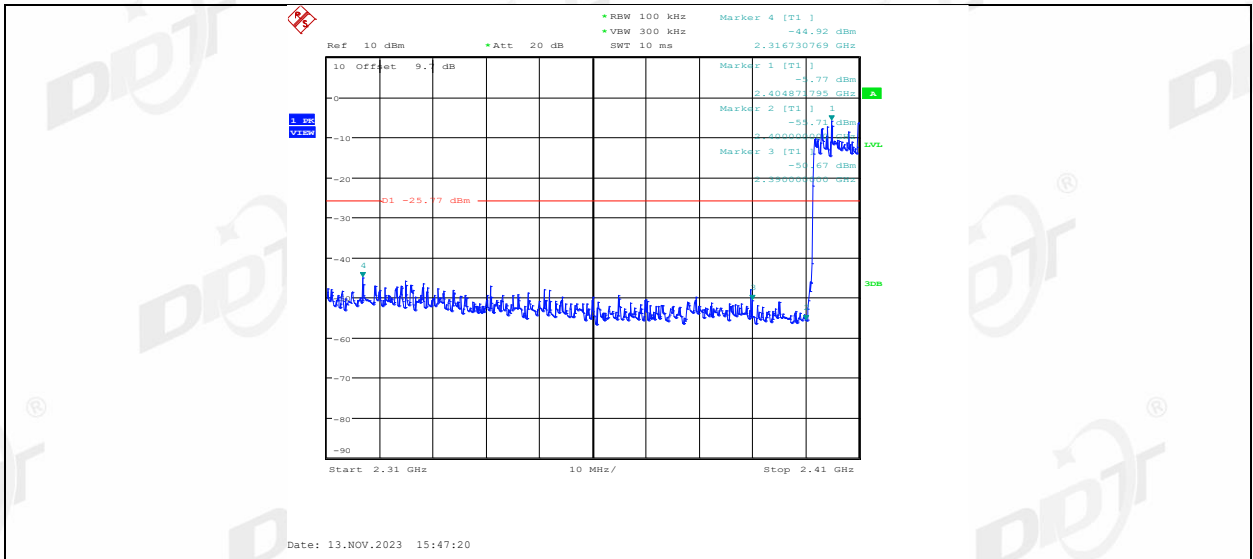

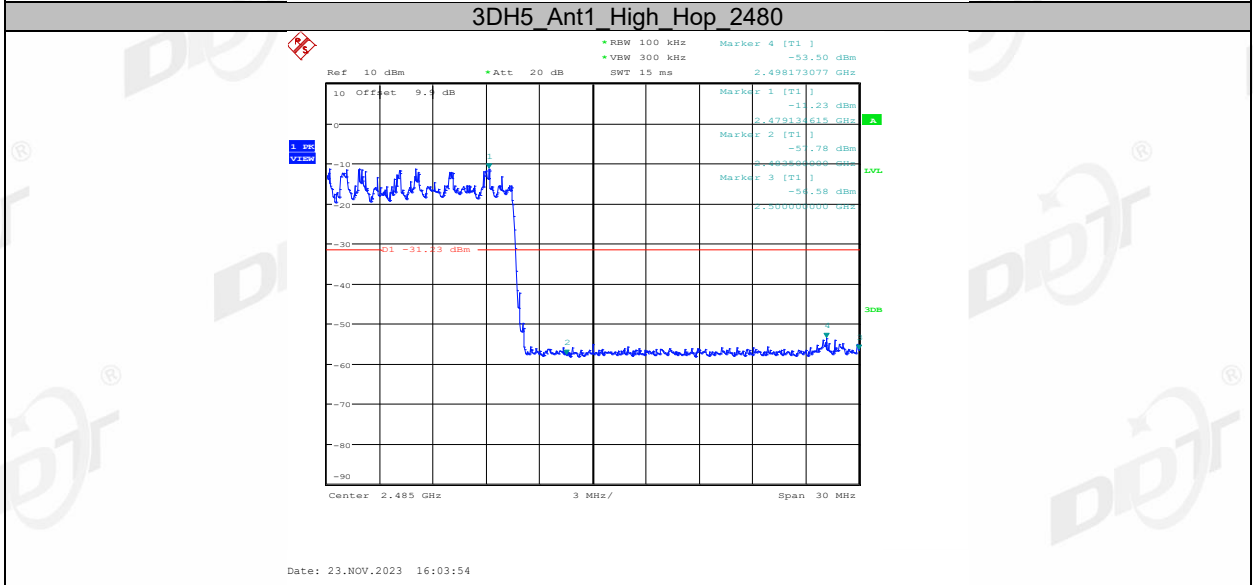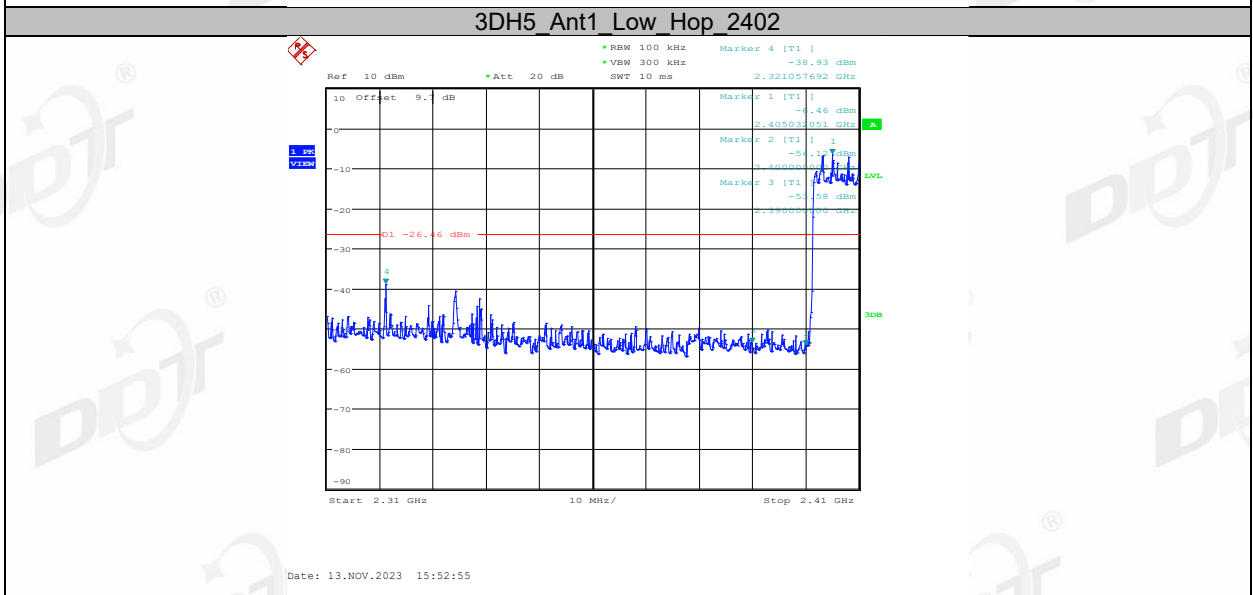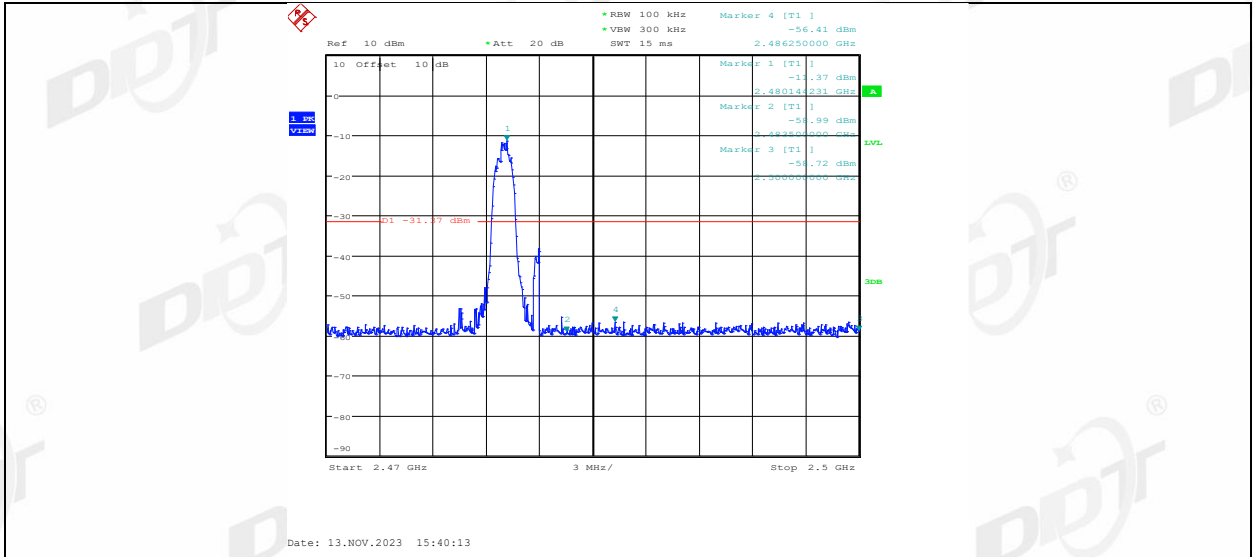

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

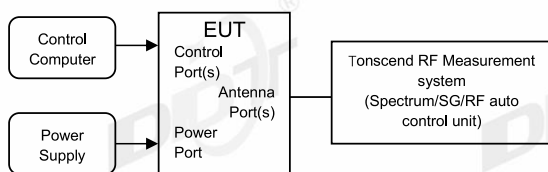

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Test Site:	RF Measurement System 1#	Test Date:	2023.11.10-2023.11.13
Ambient Condition:	24.6°C,46.2%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS	Model No.:	TOTAL PA™ FREEDOM
Sample Number:	S23092205-03	Test Power Supply:	AC 120V/60HZ


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

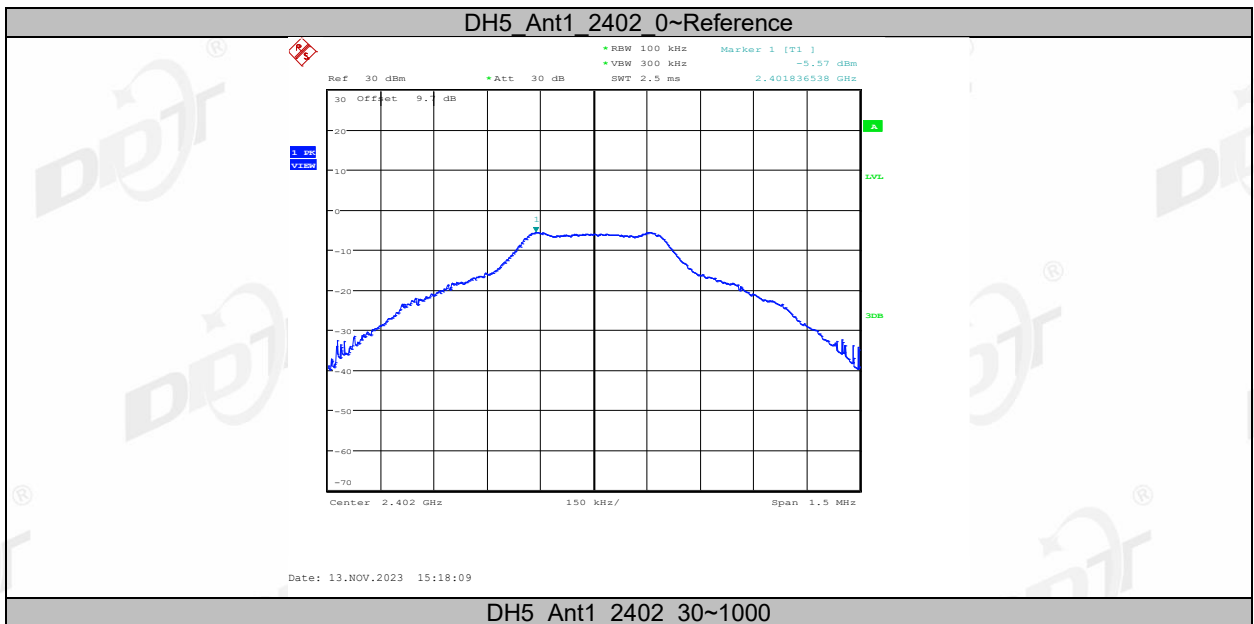


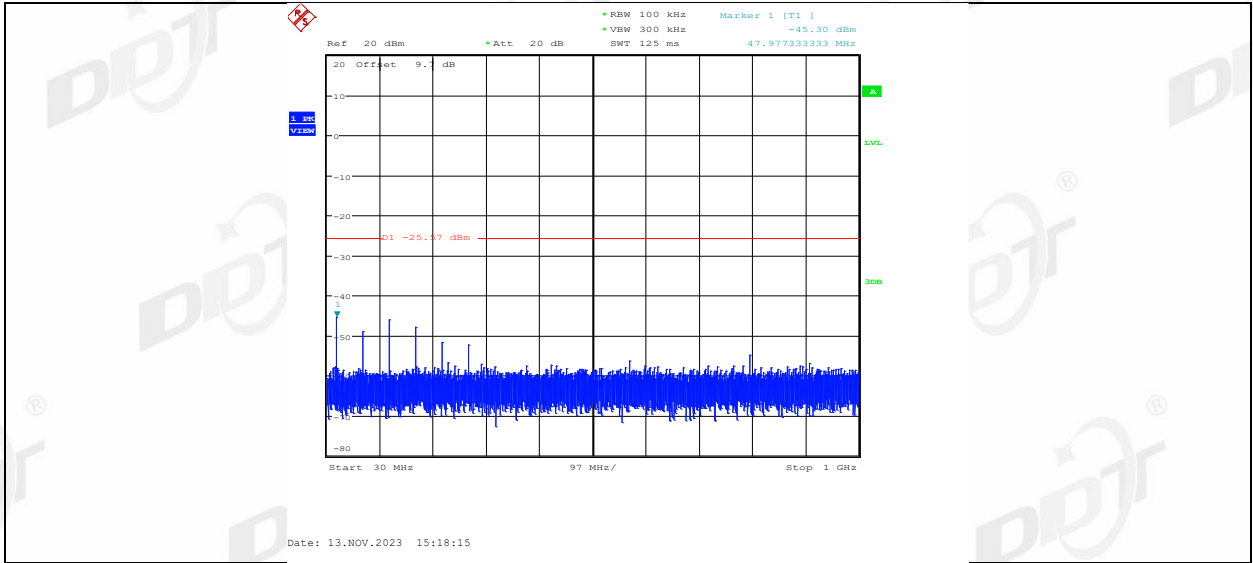


DH5_Ant1_2402_1000~26500

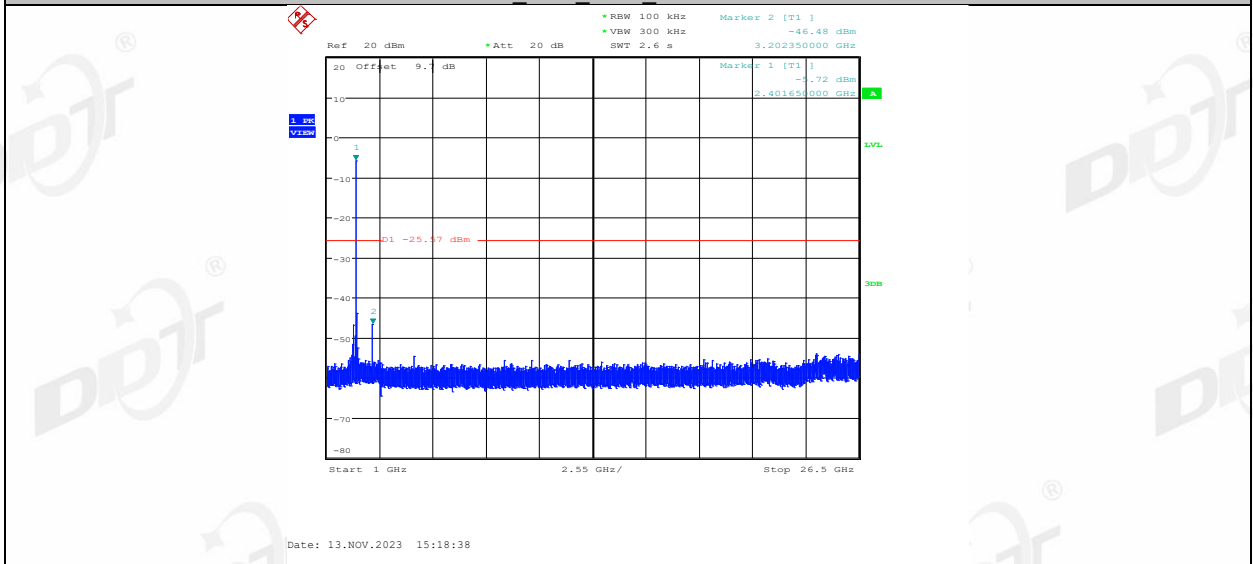


DH5_Ant1_2441_0~Reference

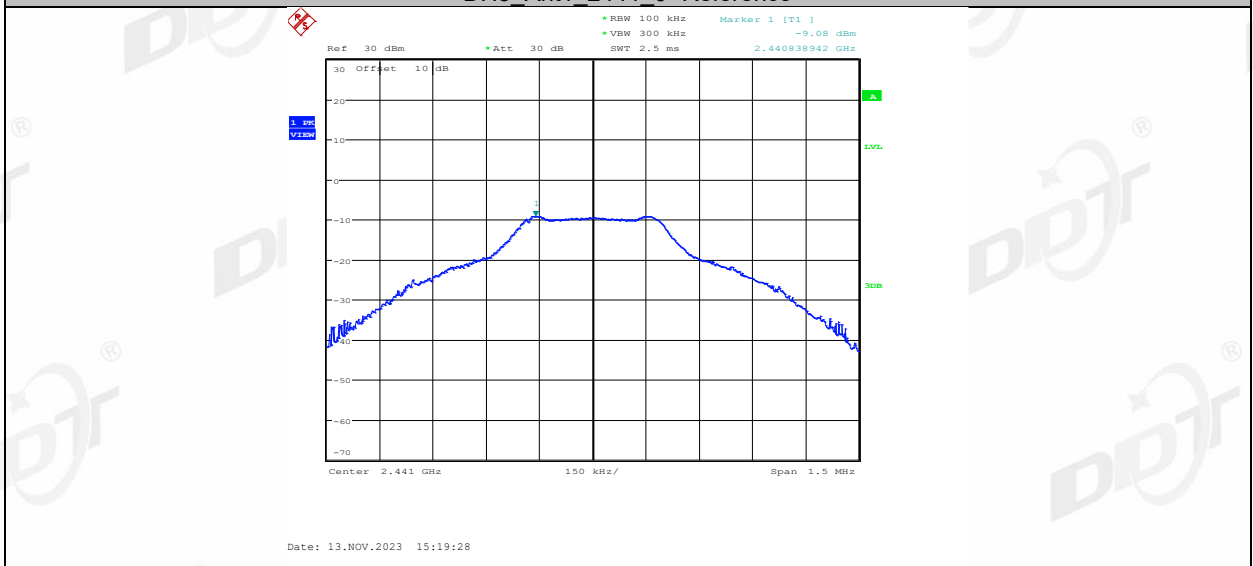


DH5_Ant1_2441_30~1000

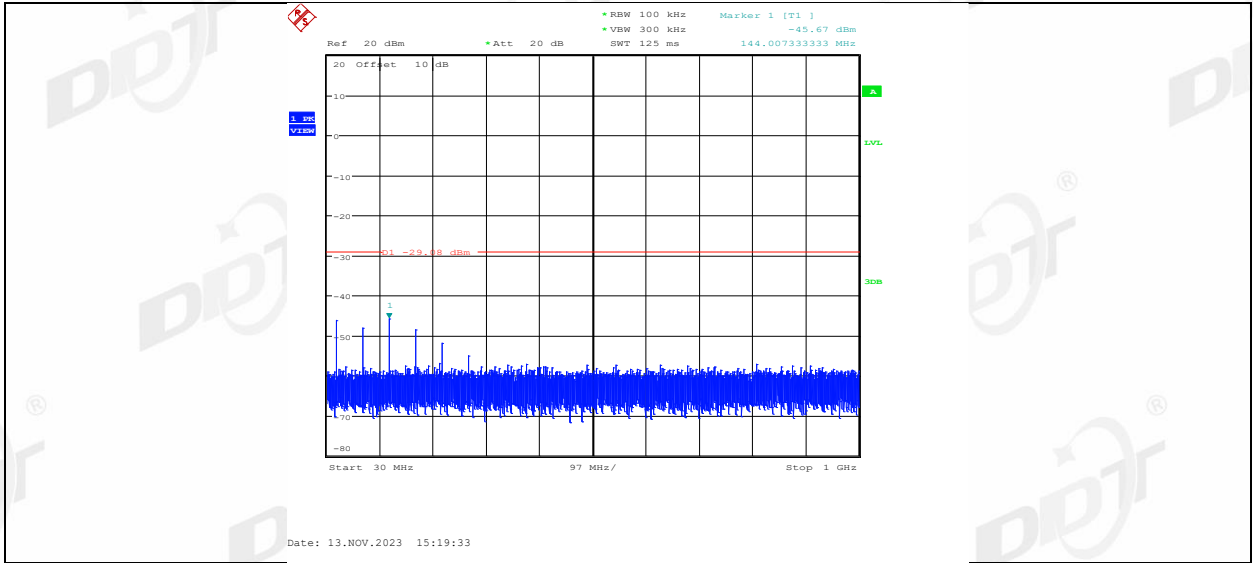


DH5_Ant1_2441_1000~26500

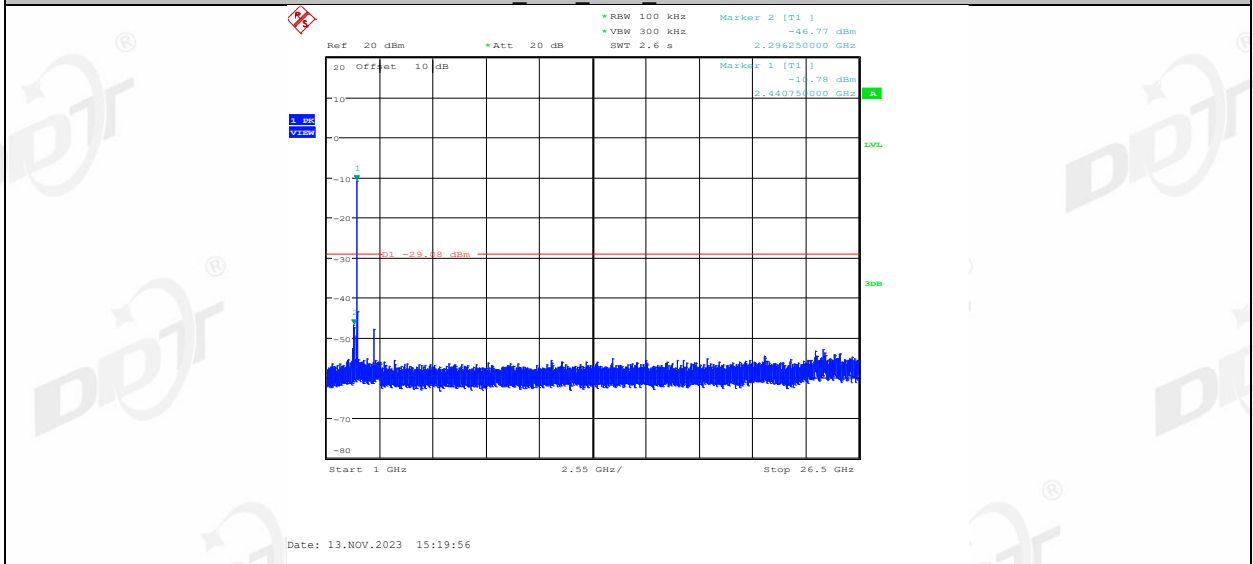


DH5_Ant1_2480_0~Reference

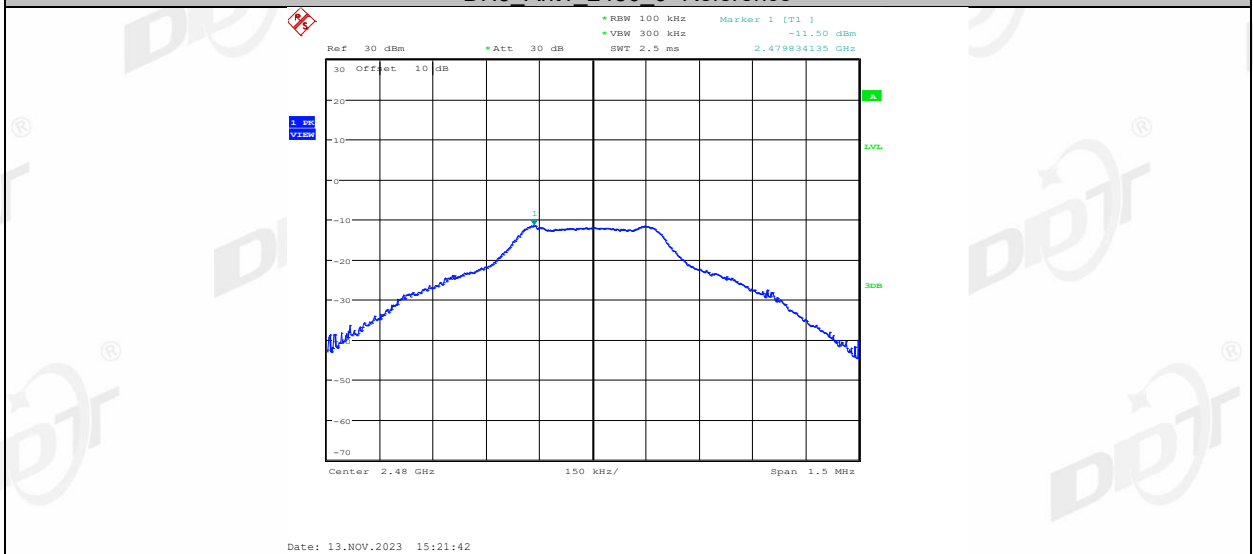


DH5_Ant1_2480_30~1000

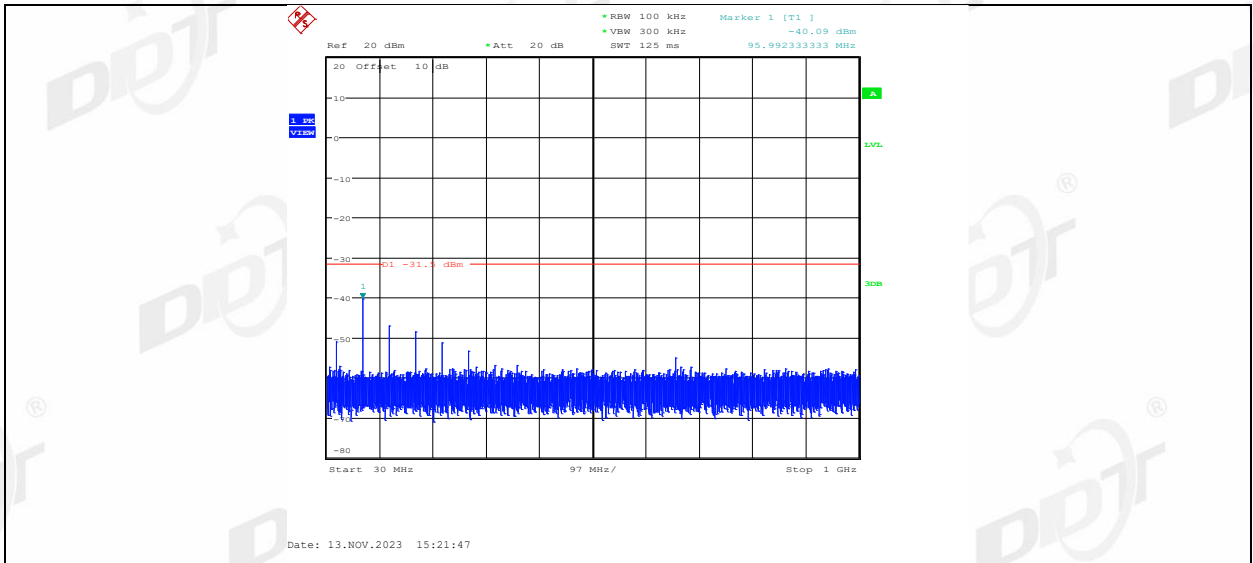


DH5_Ant1_2480_1000~26500

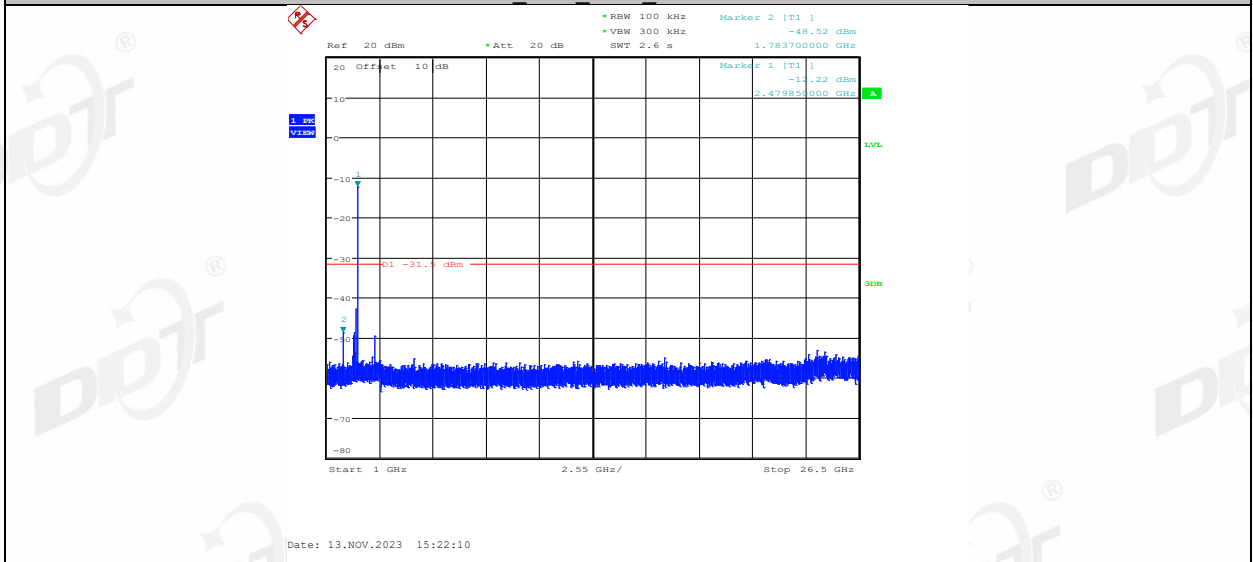


2DH5_Ant1_2402_0~Reference

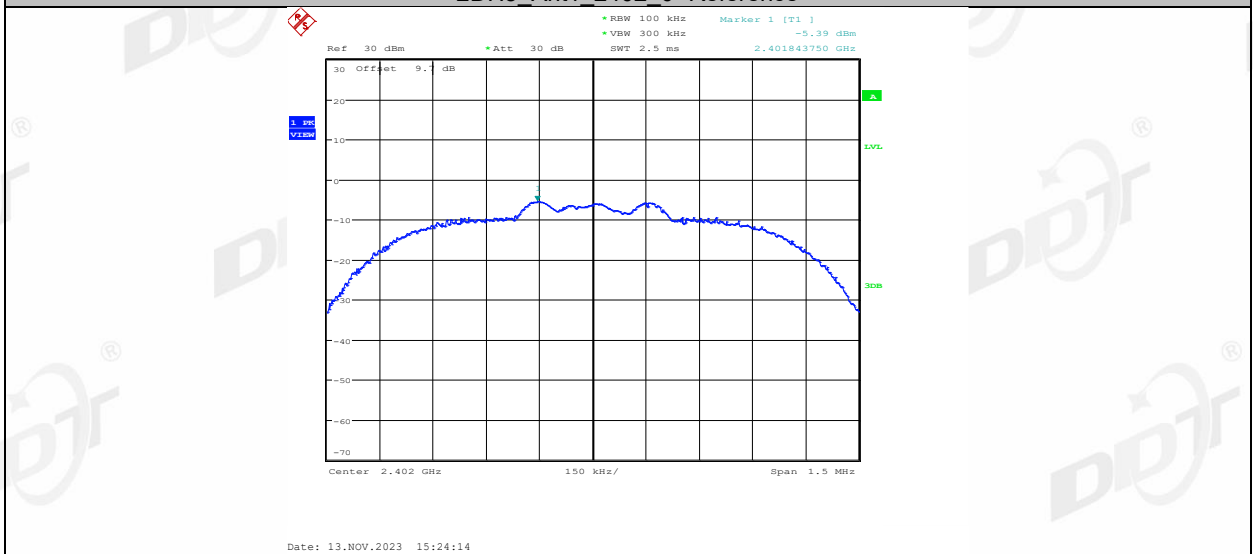


2DH5_Ant1_2402_30~1000

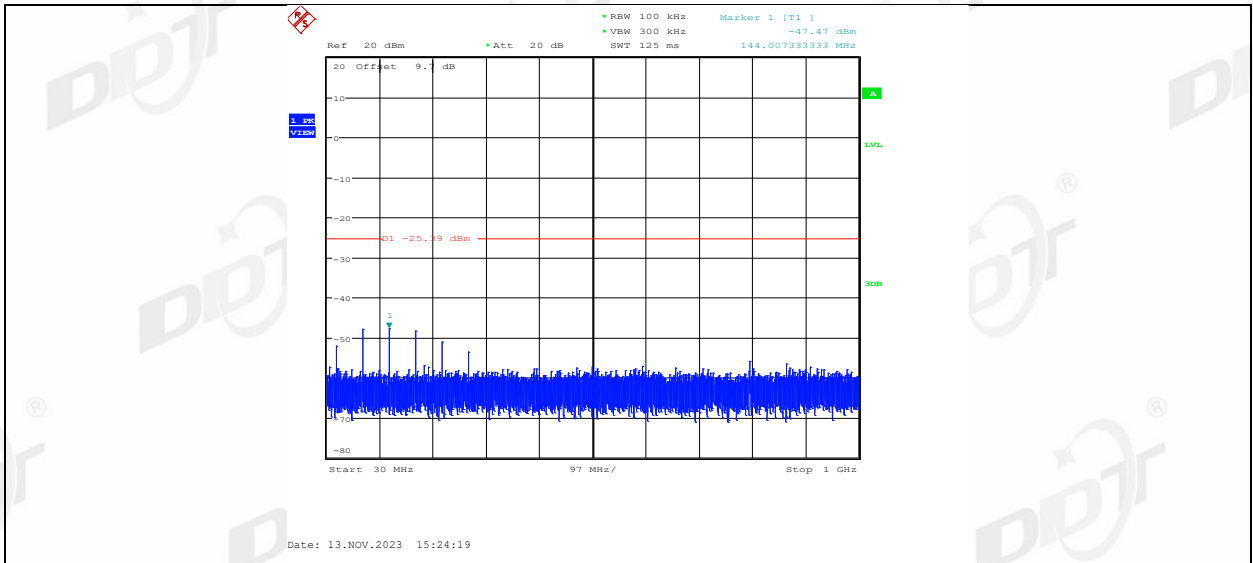




2DH5_Ant1_2402_1000~26500

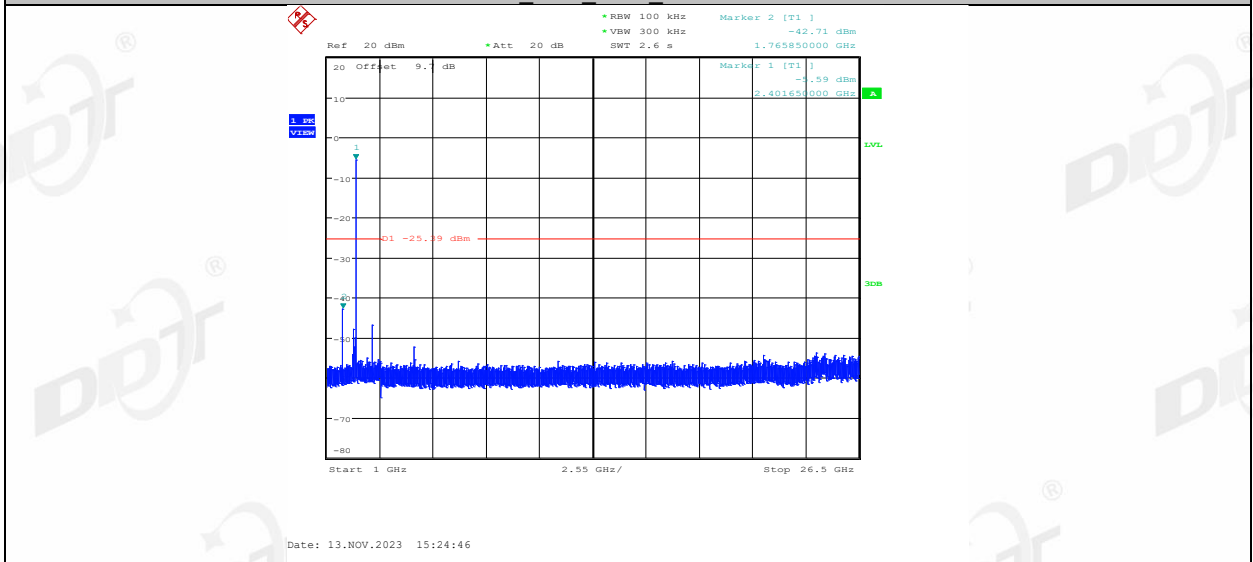


2DH5_Ant1_2441_0~Reference

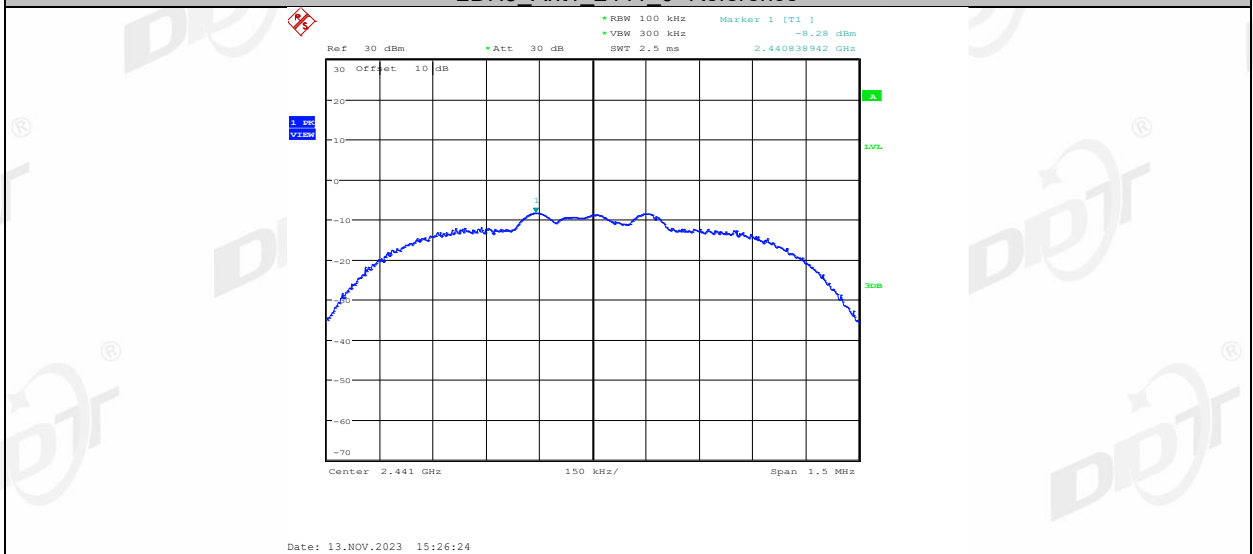


2DH5_Ant1_2441_30~1000

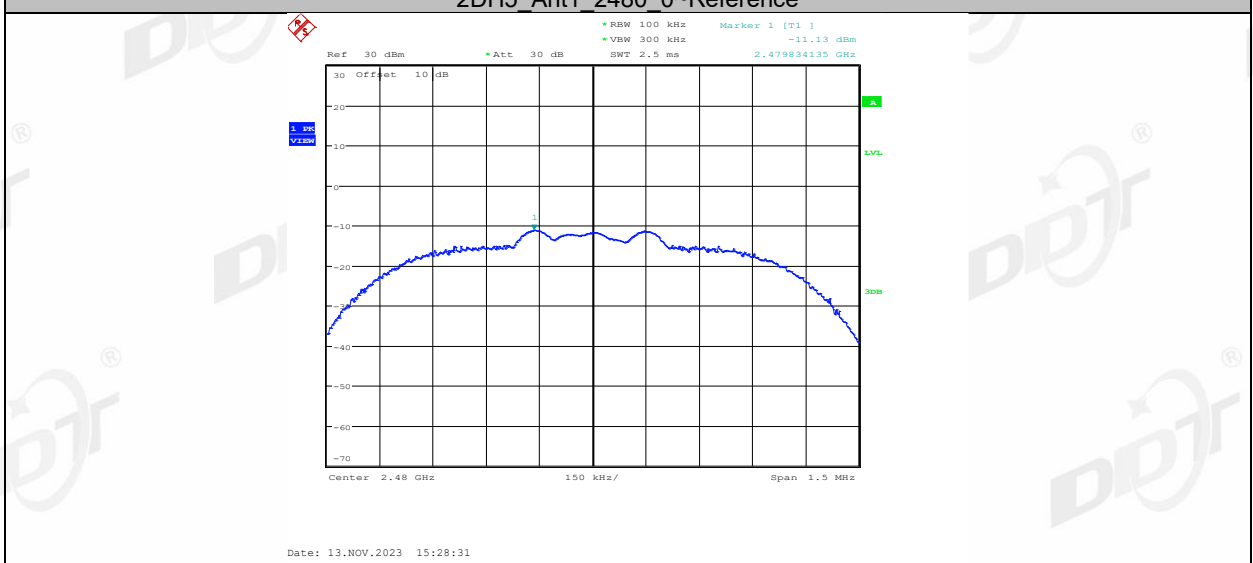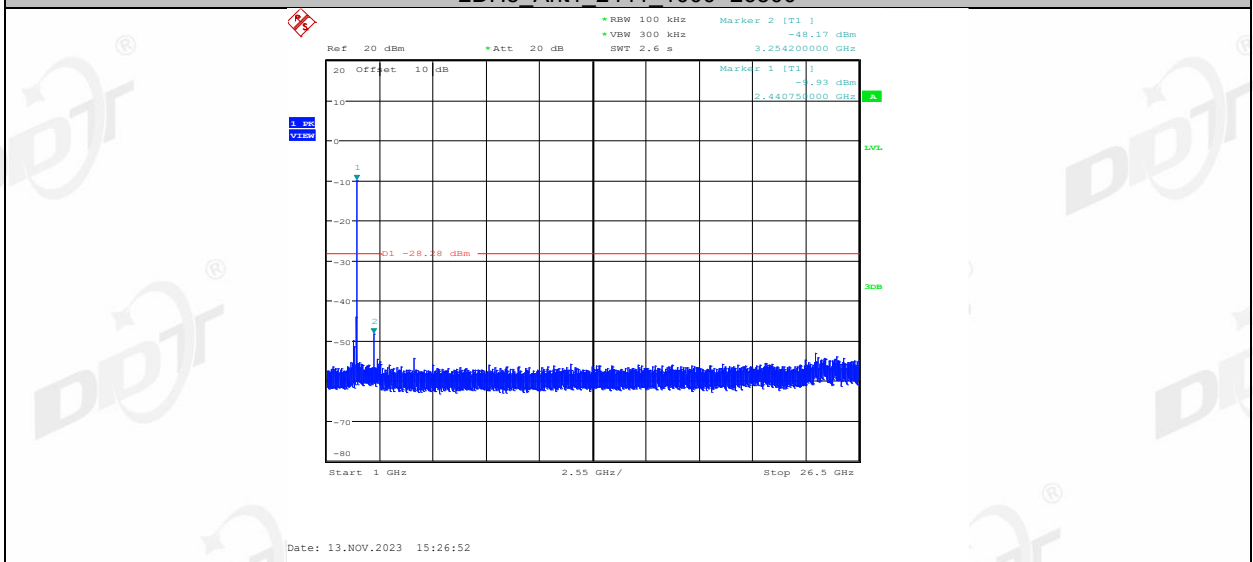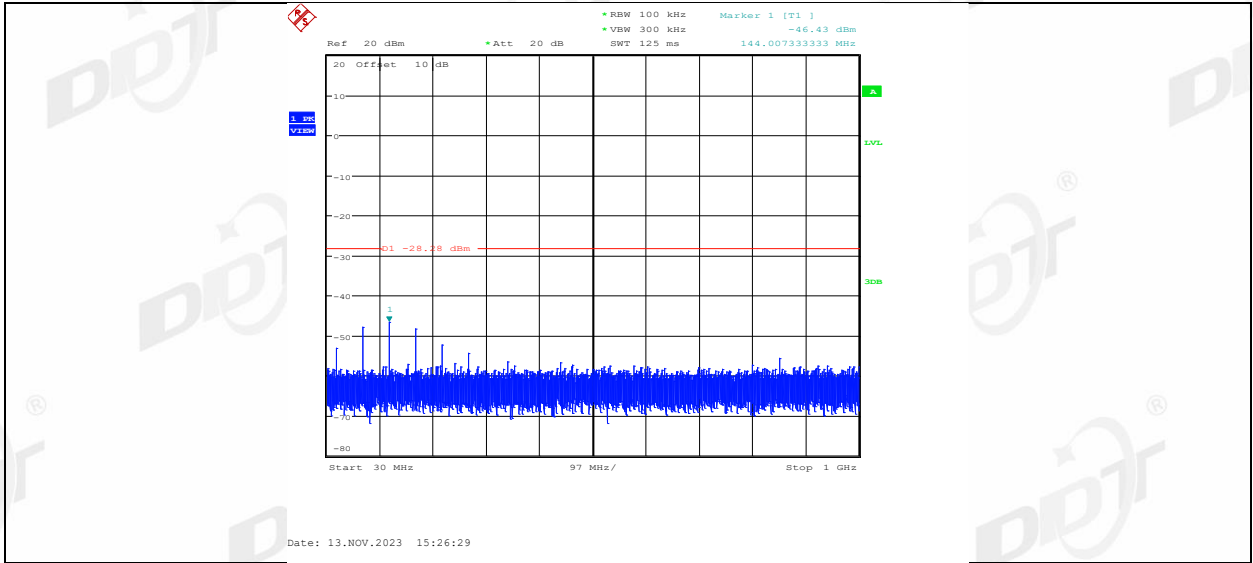


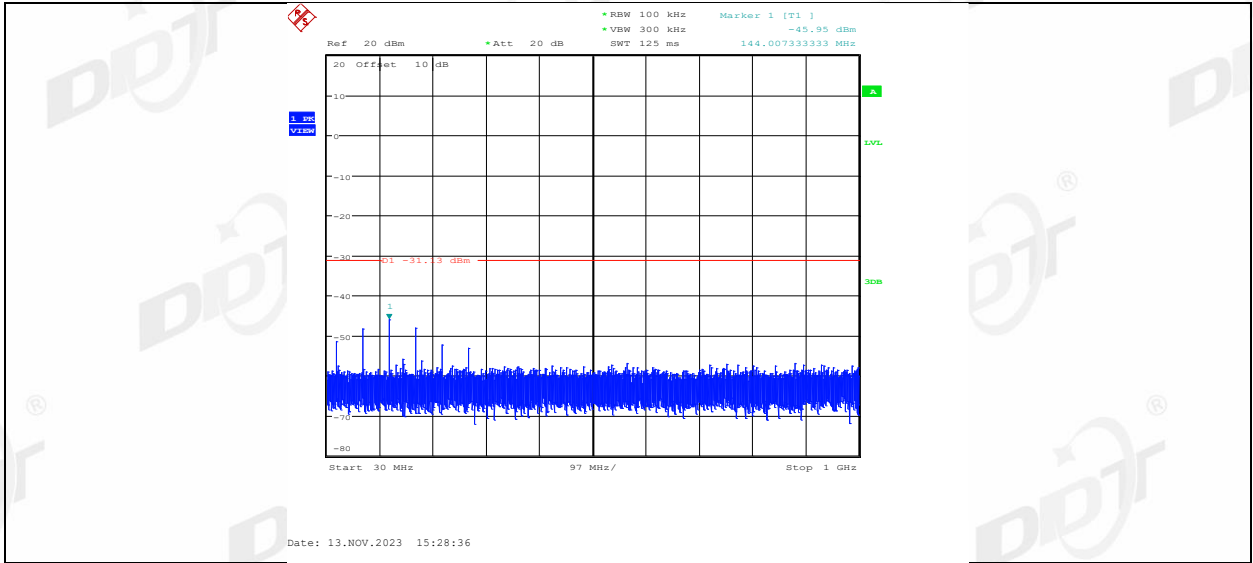




2DH5_Ant1_2480_1000~26500



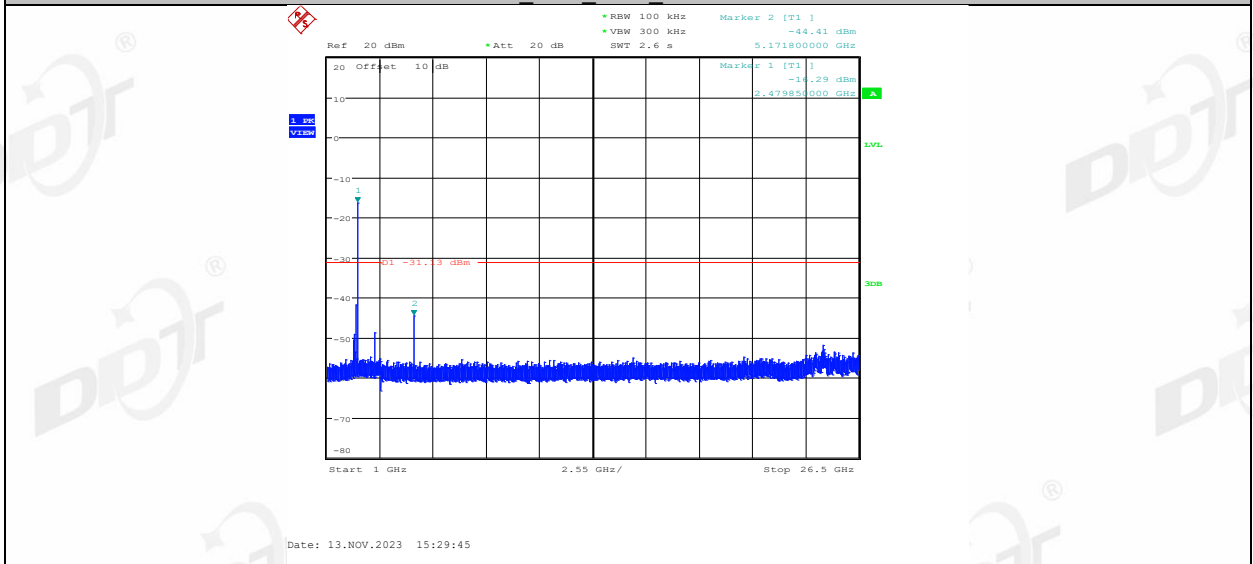


3DH5_Ant1_2402_0~Reference

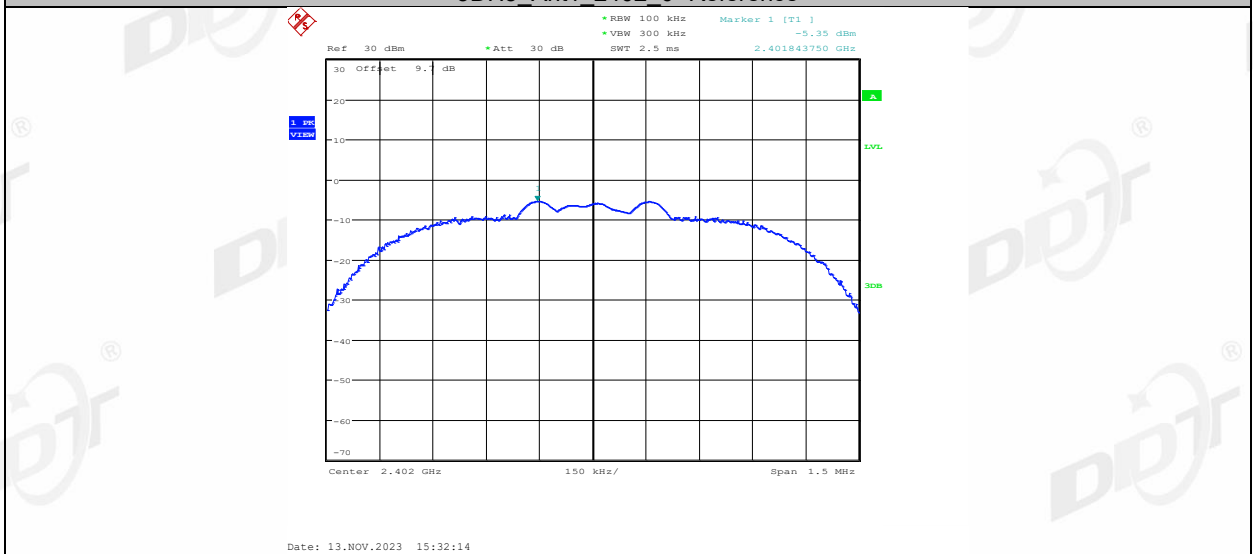


3DH5_Ant1_2402_30~1000

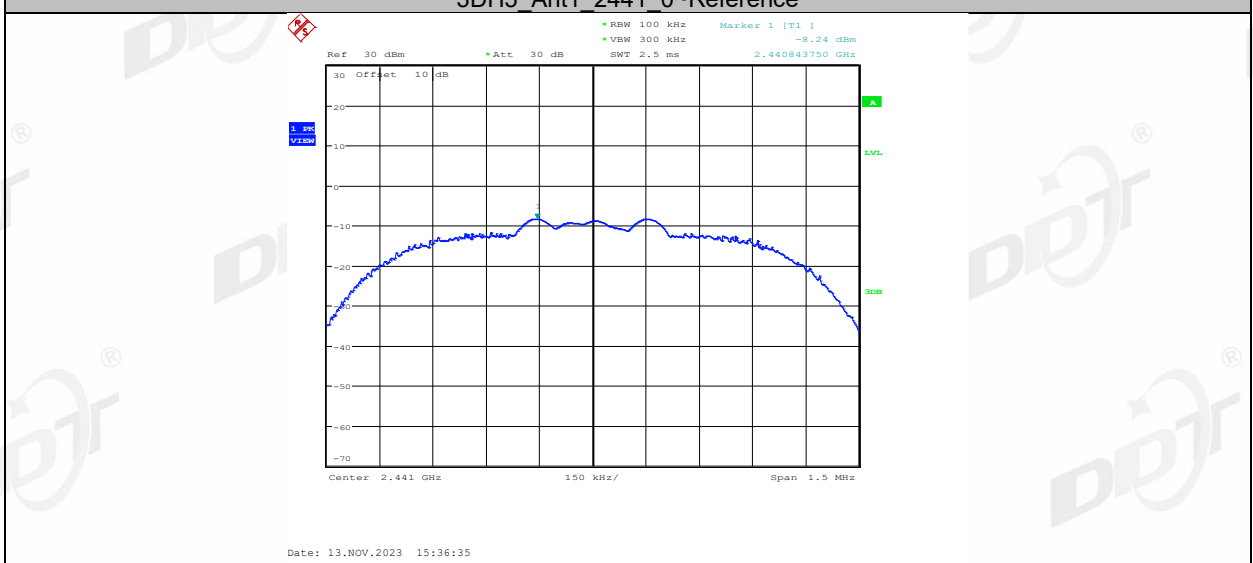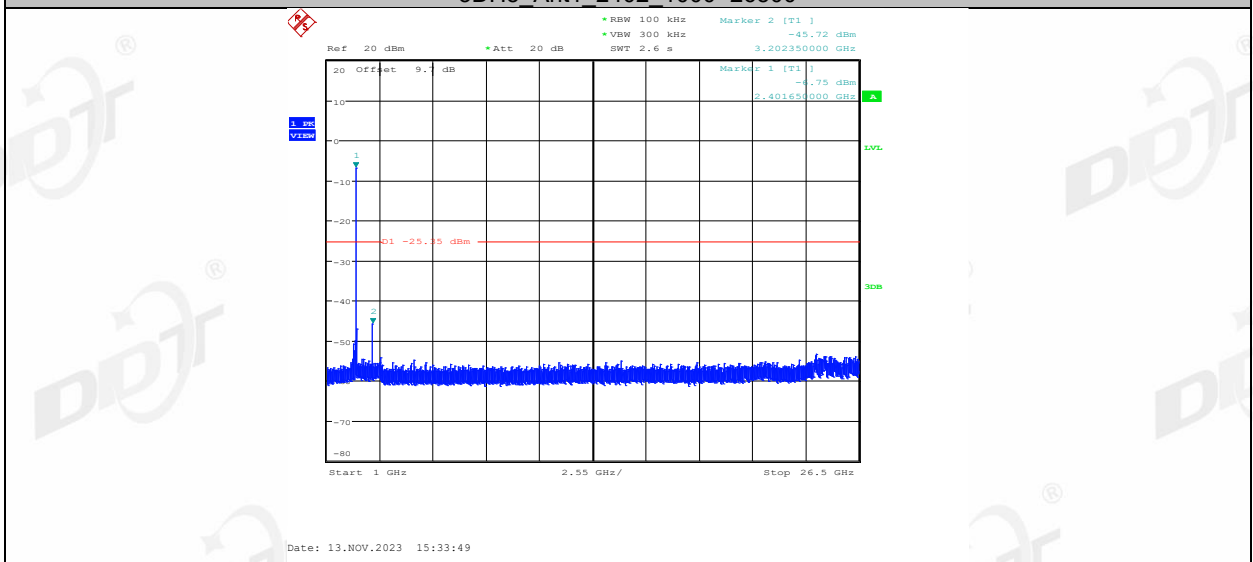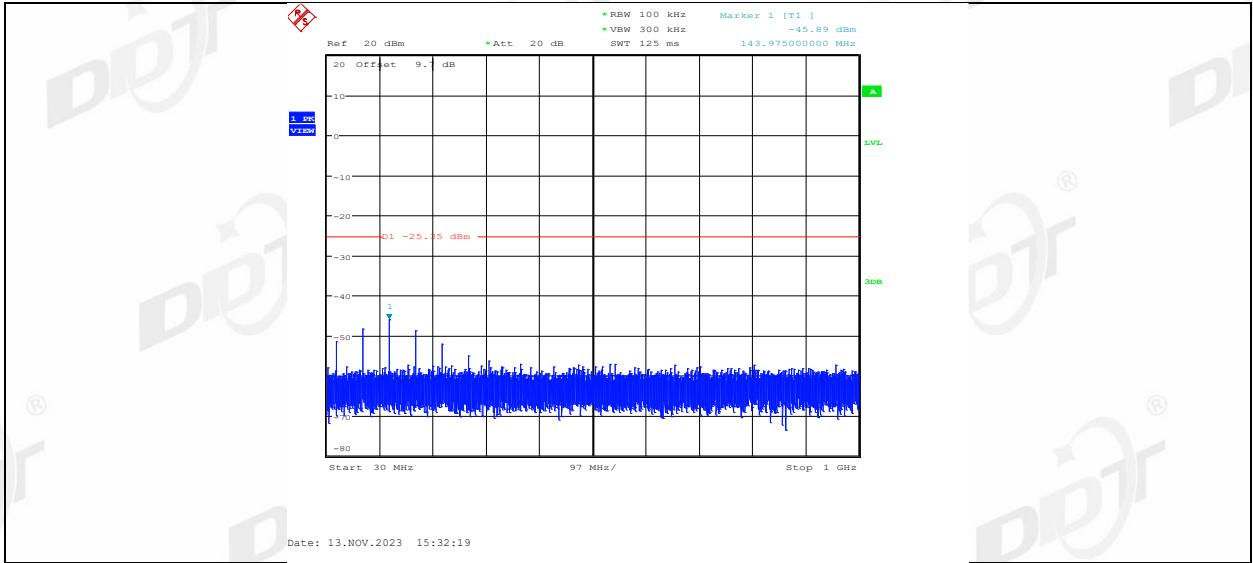


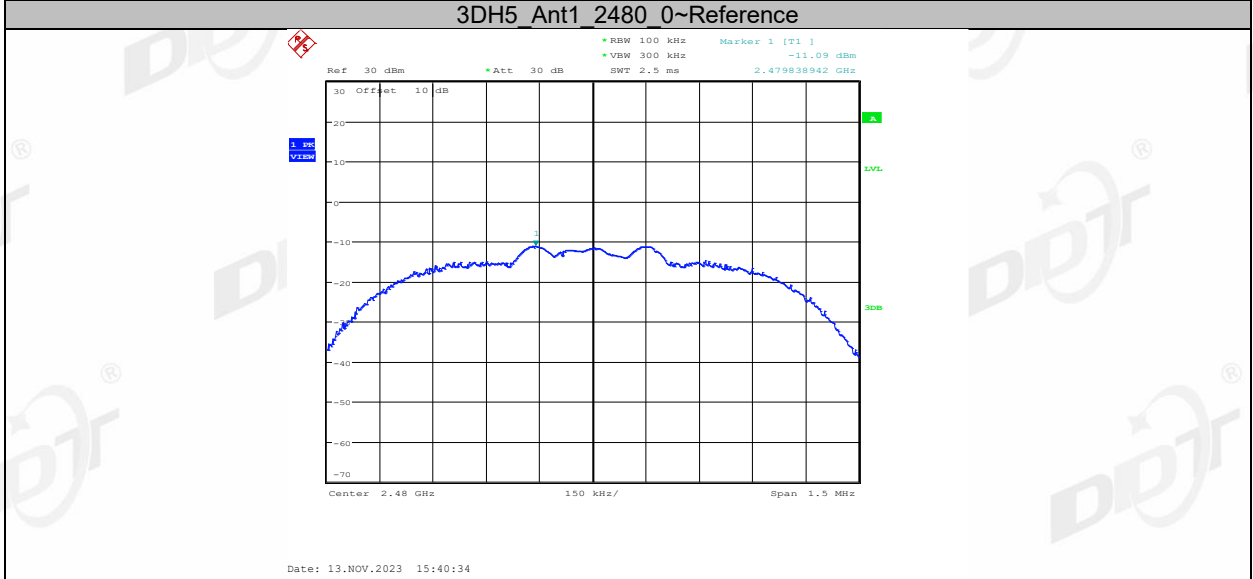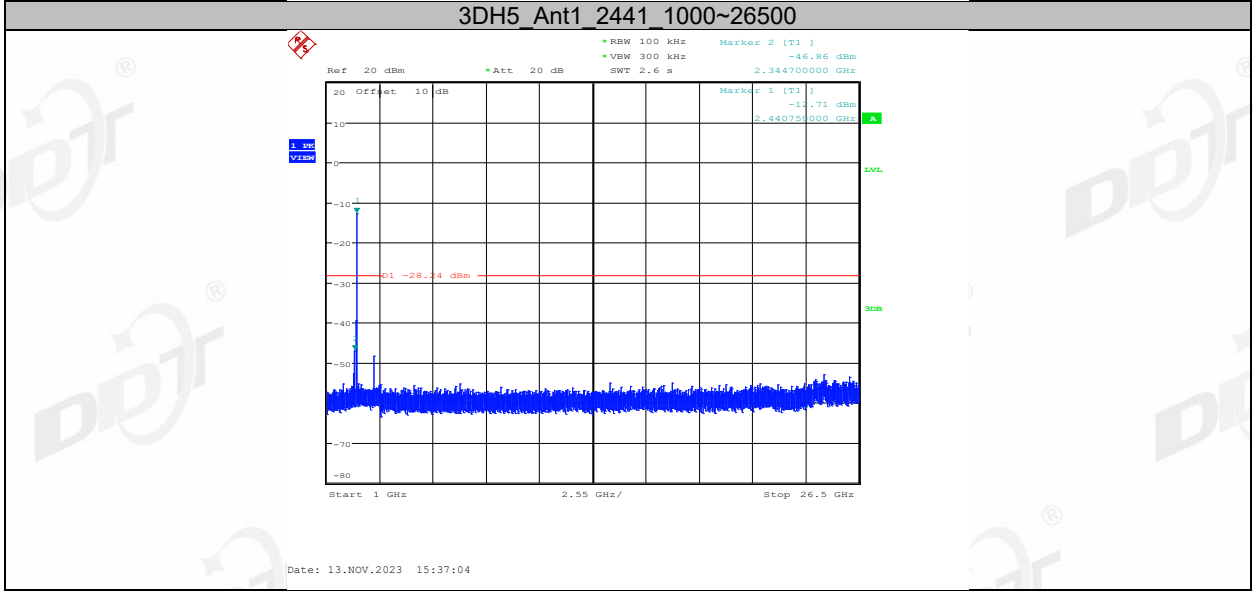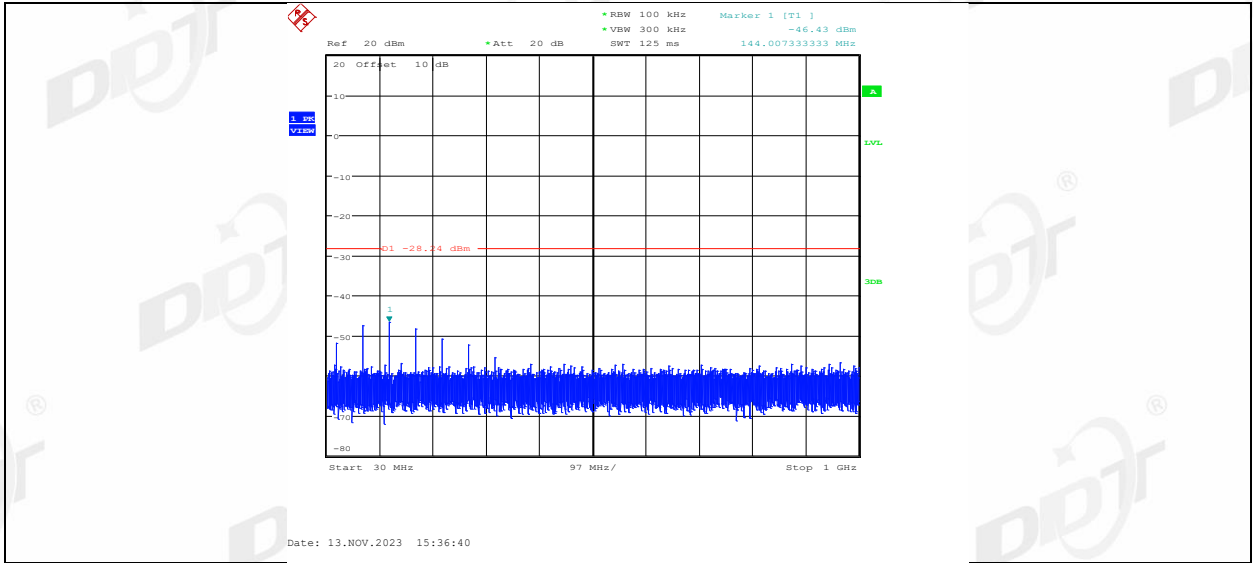

3DH5_Ant1_2480_30~1000

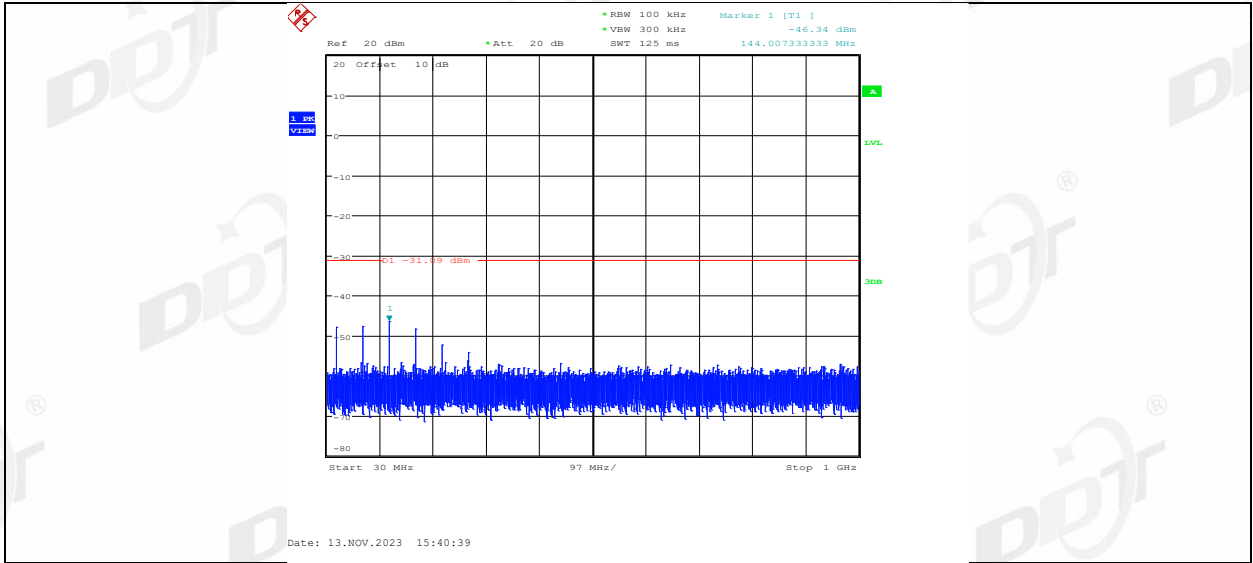

3DH5 Ant1_2480_1000~26500

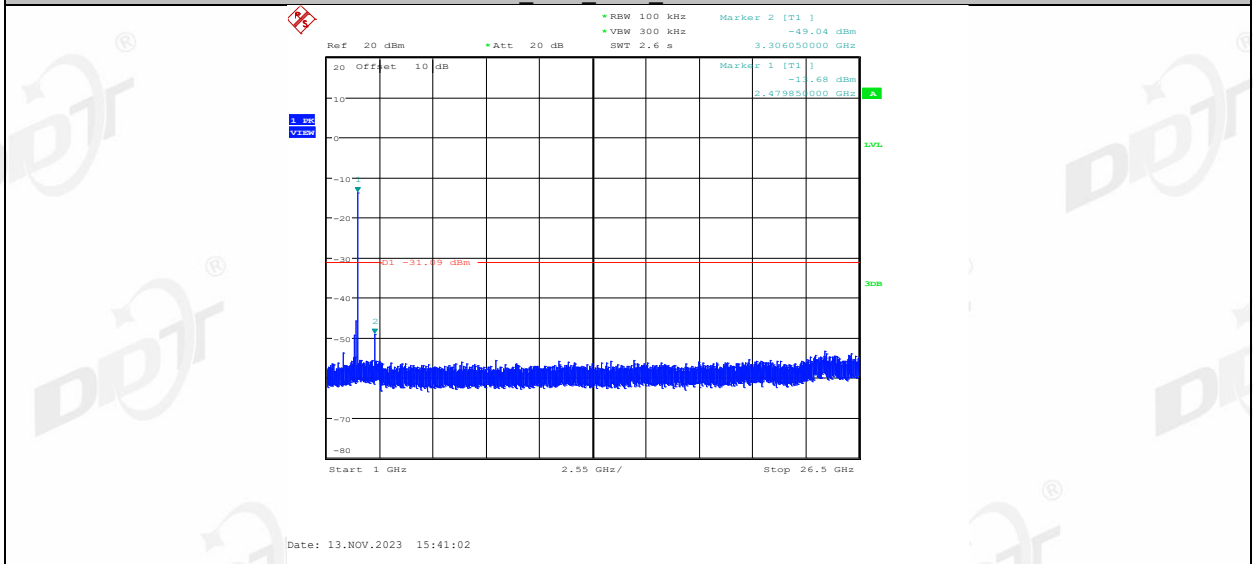


12. Radiated Emission

12.1. Test equipment


Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Radiation 3#Chamber				
EMI TEST RECEIVER	R&S	ESU26	100472	2024/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	MY50180031	2024/04/22
Active Loop Antenna	Schwarzbeck	FMZB-1519	1519-038	2024/09/10
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	2024/07/11
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	2024/09/17
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2024/04/25
Pre-amplifier	COM-POWER	PAM-118A	18040084	2024/07/14
Pre-amplifier	COM-POWER	PAM-840A	461369	2024/04/26
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ- 1.5M	4.5M+8M+1.5 M	2024/04/20
RF Cable	Yuhu	JCTB810-NJ-NJ- 9M+ ZT26S- SMAJ-SMAJ-1M	21123964	2024/04/22
Band Reject Filter(2400-2500 MHz)	REBES	BRM50702	G555	N/A
Test Software	Tonscend	JS32-RE	V 5.0.0.1	N/A

12.2. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz- 30 MHz:

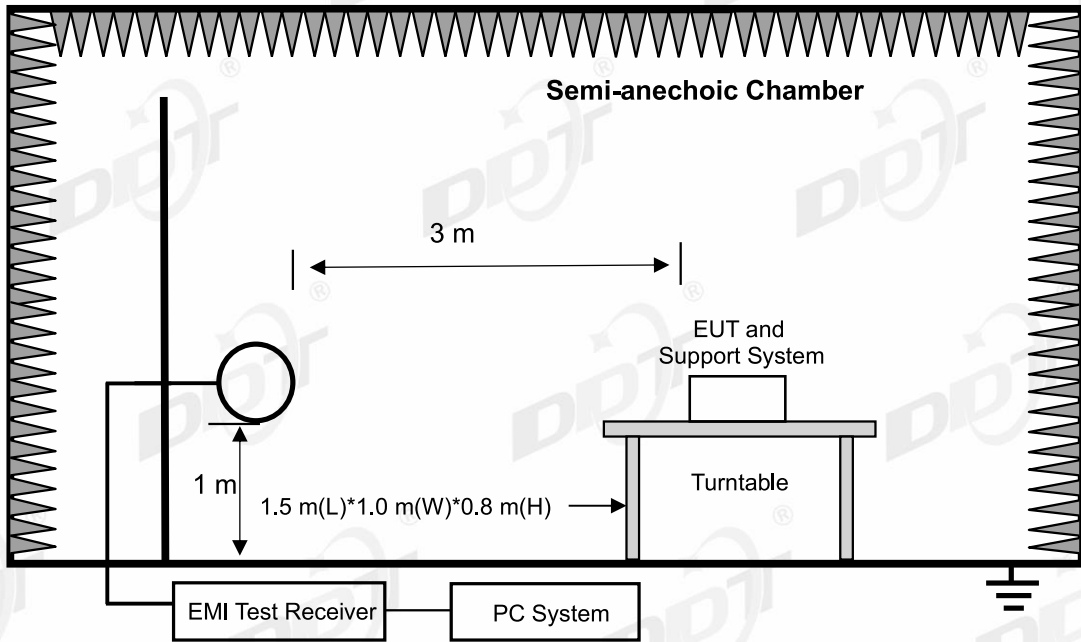

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

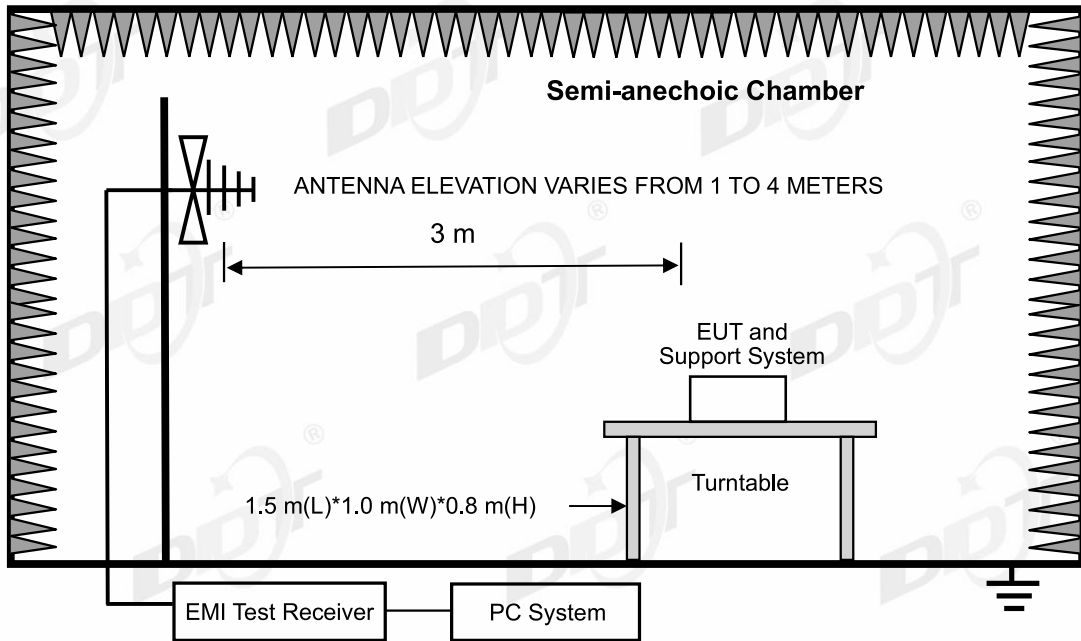

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

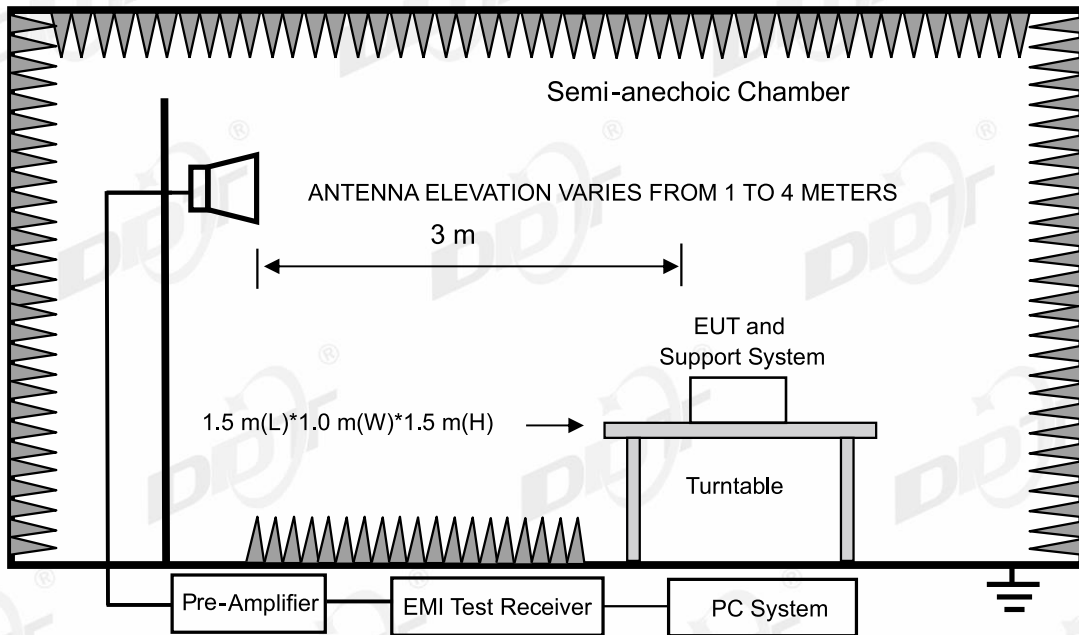

Note: Install an appropriate filter at the input of the measurement system power amplifier. This filter can attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter had been characterized, and the attenuation loss factors had been accounted for in the measurement results.

12.3. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than

that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the

antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

12.5. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK, the worst case is GFSK Mode)


Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in GFSK, Tx 2402 MHz mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission Test Result (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-08 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: BT TX **Power Supply:** AC 120V/60Hz
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC BELOW 1G\20231108-211456_H
Memo: Sample Number:S23092205-01 Power Setting:NA

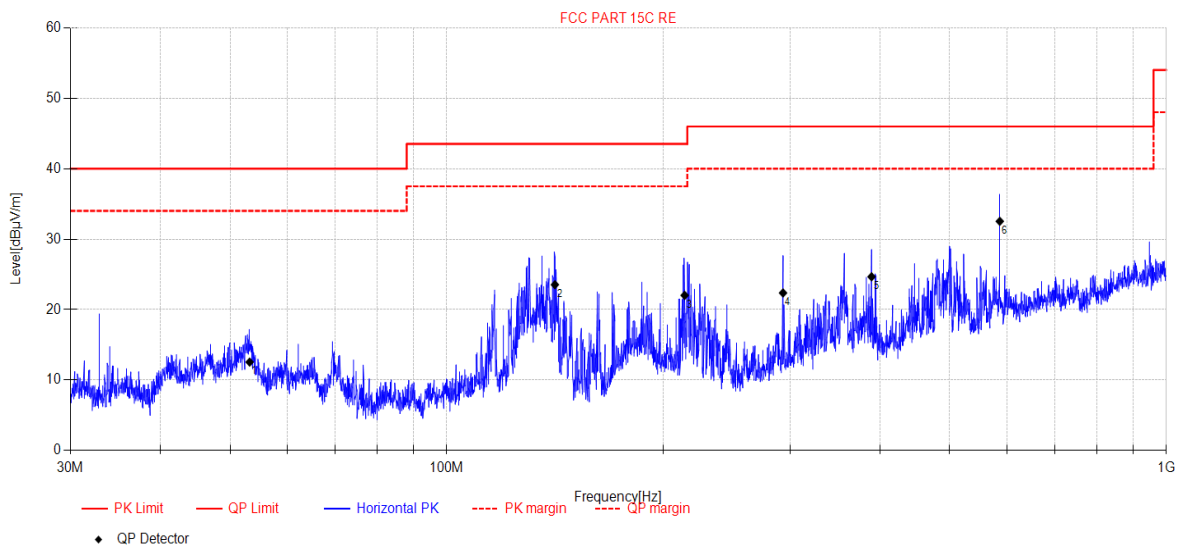


Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	53.24	25.21	13.29	4.74	-30.68	12.56	40.00	27.44	QP	Horizontal
2	141.39	40.85	8.19	5.28	-30.78	23.54	43.50	19.96	QP	Horizontal
3	214.13	36.13	10.67	5.79	-30.56	22.03	43.50	21.47	QP	Horizontal
4	293.36	33.71	12.86	6.12	-30.32	22.37	46.00	23.63	QP	Horizontal
5	389.43	32.41	15.74	6.64	-30.12	24.67	46.00	21.33	QP	Horizontal
6	586.91	36.77	18.38	7.28	-29.90	32.53	46.00	13.47	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-08 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: BT TX **Power Supply:** AC 120V/60Hz
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC BELOW 1G\20231108-211636_V
Memo: Sample Number:S23092205-01 Power Setting:NA

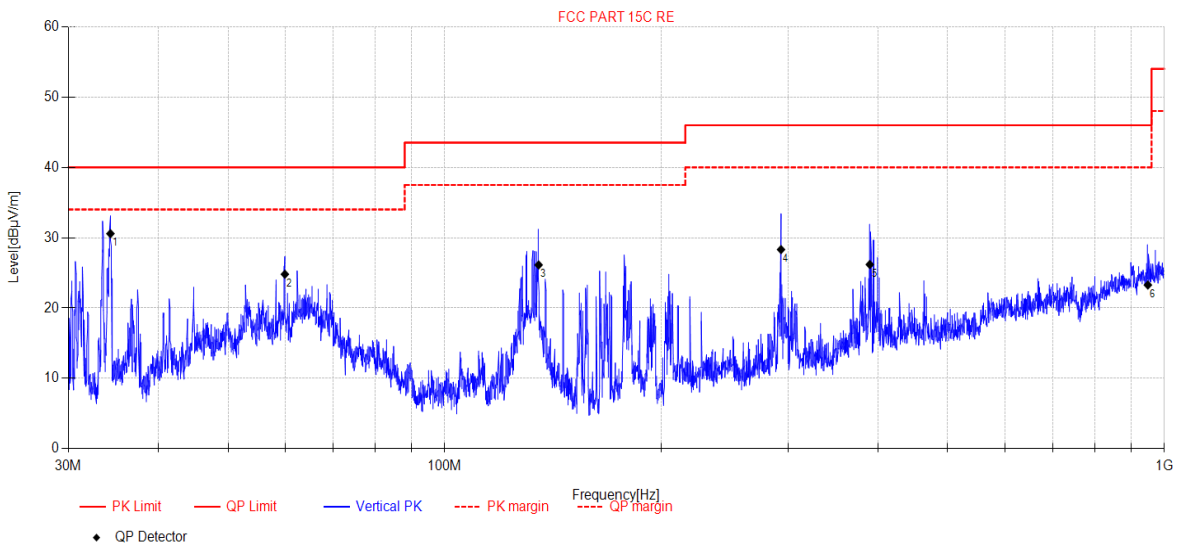

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	34.32	45.42	11.57	4.53	-30.94	30.58	40.00	9.42	QP	Vertical
2	59.98	37.89	12.79	4.76	-30.63	24.81	40.00	15.19	QP	Vertical
3	135.09	43.2	8.47	5.25	-30.79	26.13	43.50	17.37	QP	Vertical
4	293.36	39.66	12.86	6.12	-30.32	28.32	46.00	17.68	QP	Vertical
5	389.70	33.9	15.77	6.64	-30.12	26.19	46.00	19.81	QP	Vertical
6	948.77	20.92	22.41	8.51	-28.56	23.28	46.00	22.72	QP	Vertical


Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission Test Result (above 1 GHz) TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2402MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\140
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

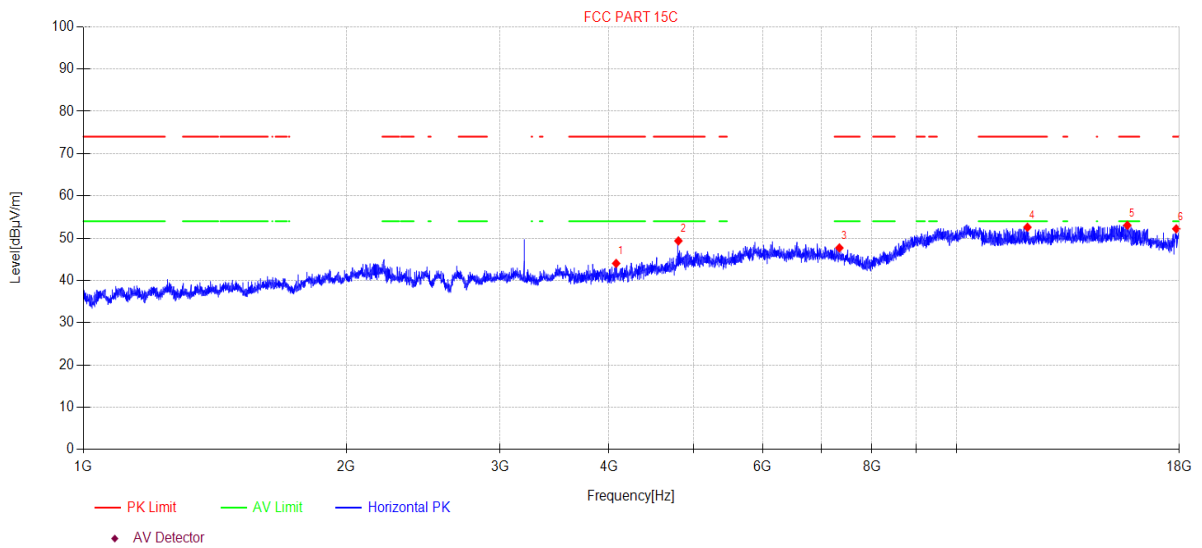

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4076.17	47.40	31.05	6.00	-40.42	44.03	74.00	29.97	PK	Horizontal
2	4803.36	49.45	32.59	7.47	-40.15	49.36	74.00	24.64	PK	Horizontal
3	7343.89	44.82	36.81	7.63	-41.56	47.70	74.00	26.30	PK	Horizontal
4	12058.94	42.36	39.26	10.54	-39.58	52.58	74.00	21.42	PK	Horizontal
5	15695.62	39.22	38.50	14.50	-39.18	53.04	74.00	20.96	PK	Horizontal
6	17854.93	39.93	41.40	12.96	-42.08	52.21	74.00	21.79	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2402MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\141
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

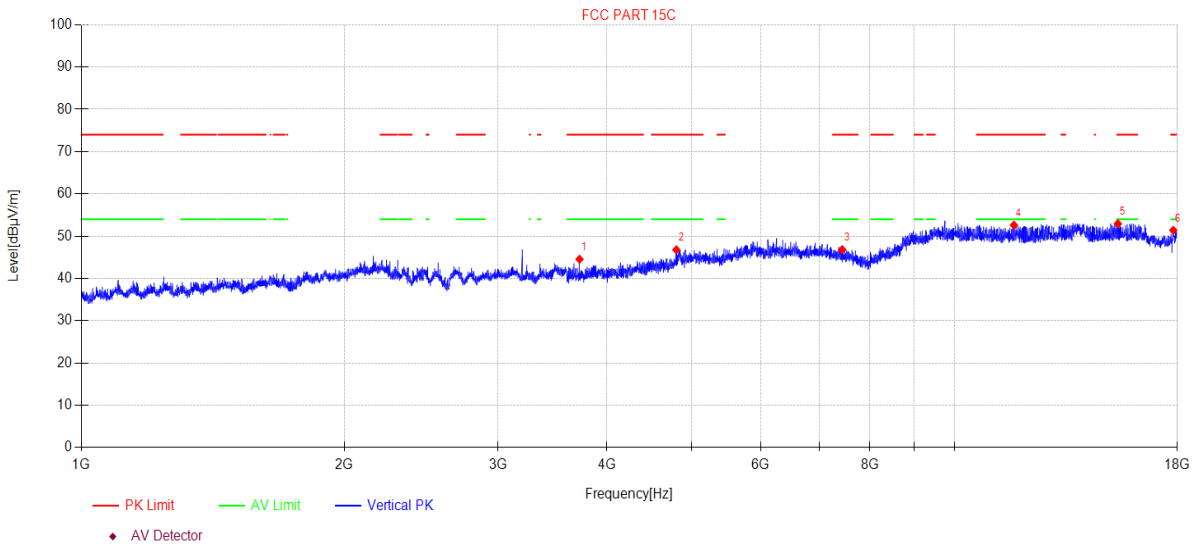

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3720.40	48.59	30.44	5.79	-40.28	44.54	74.00	29.46	PK	Vertical
2	4803.36	46.87	32.59	7.47	-40.15	46.78	74.00	27.22	PK	Vertical
3	7437.87	44.33	36.62	7.64	-41.79	46.80	74.00	27.20	PK	Vertical
4	11698.50	42.76	39.00	10.27	-39.42	52.61	74.00	21.39	PK	Vertical
5	15385.73	39.72	39.11	13.10	-38.99	52.94	74.00	21.06	PK	Vertical
6	17808.55	39.57	40.89	12.90	-41.97	51.39	74.00	22.61	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2441MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\142
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

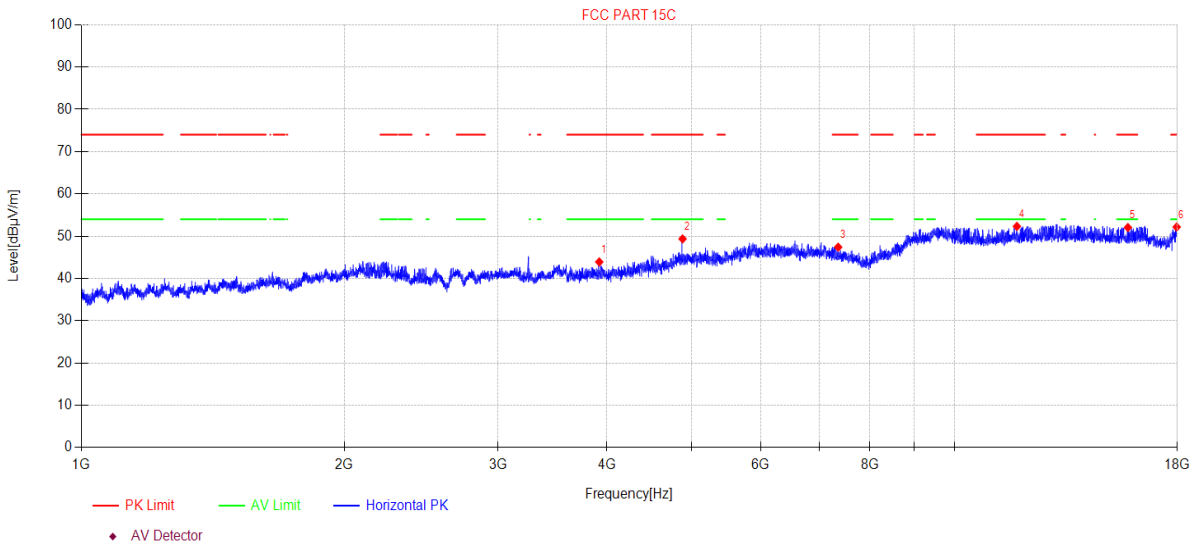

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3919.07	47.32	31.16	5.83	-40.40	43.91	74.00	30.09	PK	Horizontal
2	4881.73	48.55	33.29	7.63	-40.12	49.35	74.00	24.65	PK	Horizontal
3	7358.76	44.58	36.78	7.64	-41.60	47.40	74.00	26.60	PK	Horizontal
4	11790.14	42.51	38.91	10.35	-39.46	52.31	74.00	21.69	PK	Horizontal
5	15800.30	38.02	38.30	14.98	-39.24	52.06	74.00	21.94	PK	Horizontal
6	17968.81	39.17	42.24	13.09	-42.33	52.17	74.00	21.83	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2441MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\143
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

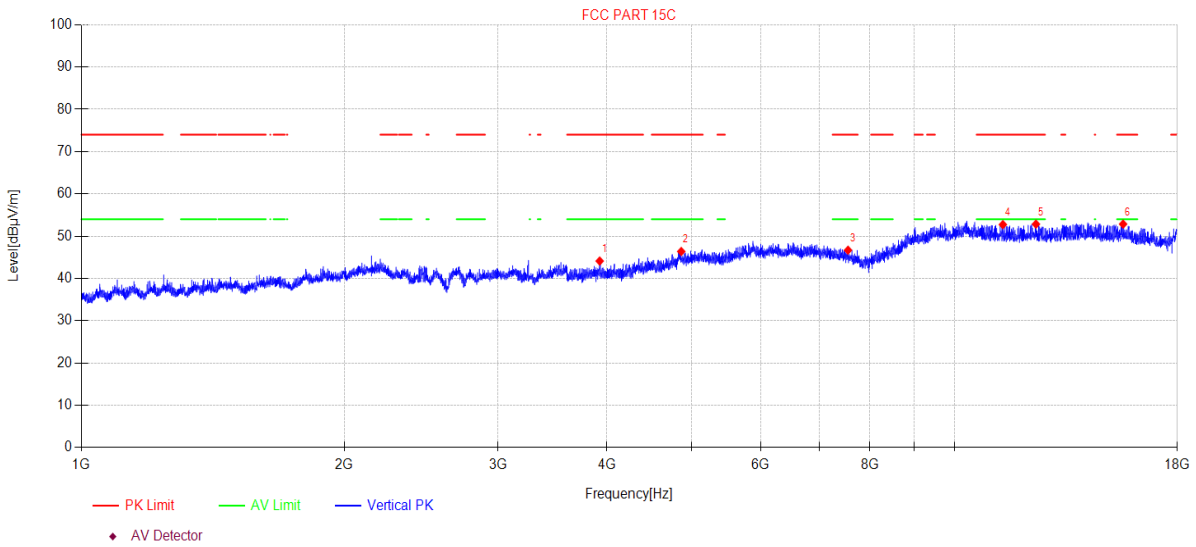

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3923.60	47.54	31.15	5.83	-40.40	44.12	74.00	29.88	PK	Vertical
2	4864.83	45.35	33.56	7.60	-40.13	46.38	74.00	27.62	PK	Vertical
3	7552.68	44.71	36.41	7.65	-42.08	46.69	74.00	27.31	PK	Vertical
4	11361.96	42.77	39.26	9.97	-39.26	52.74	74.00	21.26	PK	Vertical
5	12398.20	42.72	39.30	10.54	-39.72	52.84	74.00	21.16	PK	Vertical
6	15600.65	39.31	38.60	14.07	-39.12	52.86	74.00	21.14	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2480MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\144
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

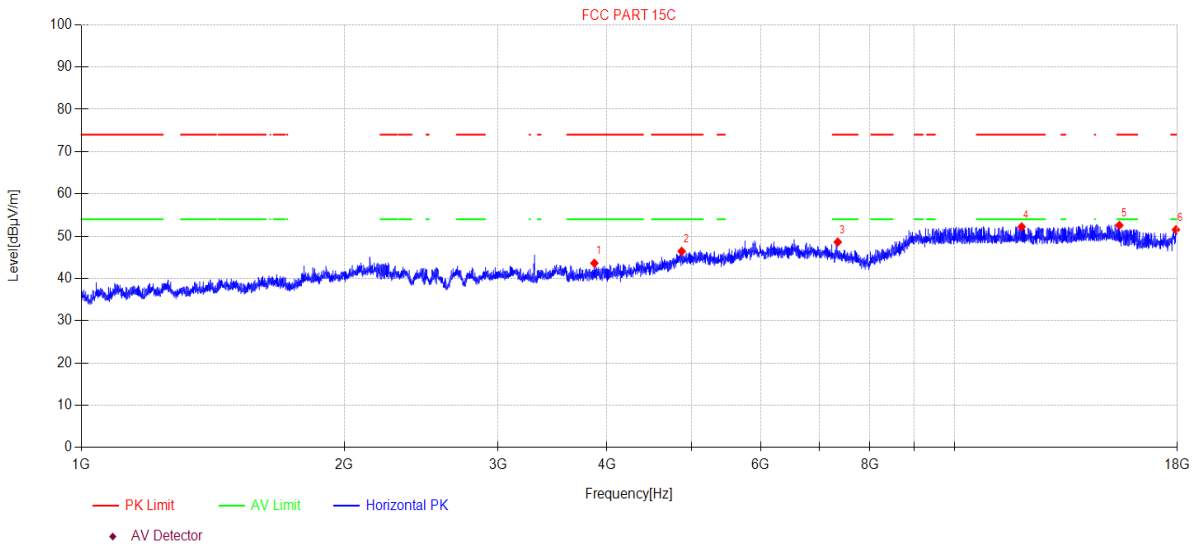

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3868.43	47.15	31.01	5.82	-40.37	43.61	74.00	30.39	PK	Horizontal
2	4870.45	45.48	33.47	7.61	-40.13	46.43	74.00	27.57	PK	Horizontal
3	7350.26	45.76	36.80	7.63	-41.58	48.61	74.00	25.39	PK	Horizontal
4	11937.58	42.26	39.01	10.48	-39.53	52.22	74.00	21.78	PK	Horizontal
5	15448.11	39.32	38.90	13.38	-39.03	52.57	74.00	21.43	PK	Horizontal
6	17932.50	38.68	42.06	13.05	-42.25	51.54	74.00	22.46	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2480MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\145
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

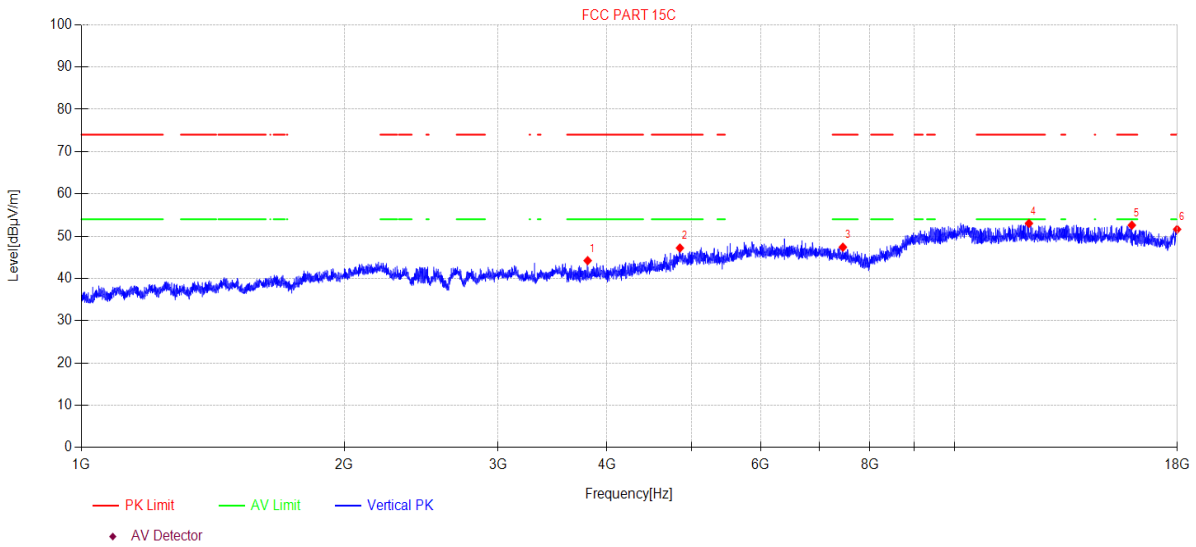

Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3800.83	48.03	30.70	5.81	-40.33	44.21	74.00	29.79	PK	Vertical
2	4847.99	46.03	33.75	7.56	-40.14	47.20	74.00	26.80	PK	Vertical
3	7450.78	44.98	36.60	7.64	-41.83	47.39	74.00	26.61	PK	Vertical
4	12170.98	42.82	39.30	10.54	-39.63	53.03	74.00	20.97	PK	Vertical
5	15965.55	38.18	38.03	15.72	-39.34	52.59	74.00	21.41	PK	Vertical
6	17989.60	38.53	42.35	13.12	-42.38	51.62	74.00	22.38	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


13. Band Edge Compliance (Radiated Method)

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Radiation 3#Chamber				
EMI TEST RECEIVER	R&S	ESU26	100472	2024/04/22
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	2024/09/17
Pre-amplifier	COM-POWER	PAM-118A	18040084	2024/07/14
RF Cable	Yuhu	JCTB810-NJ-NJ-9M+ ZT26S-SMAJ-SMAJ-1M	21123964	2024/04/22
Test Software	Tonscend	JS32-RE	V 5.0.0.1	N/A

13.2. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

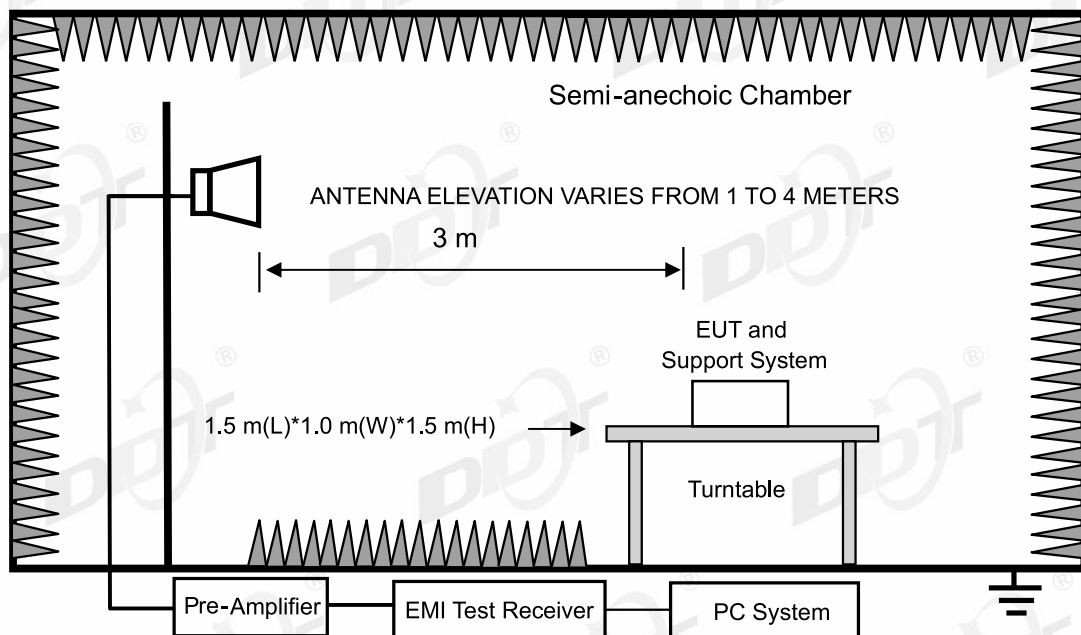

13.3. Limit

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

13.5. Test result


Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only. Scan with all mode, the worst case is recorded in this report.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2402MHz **Power Supply:** AC 120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\146
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

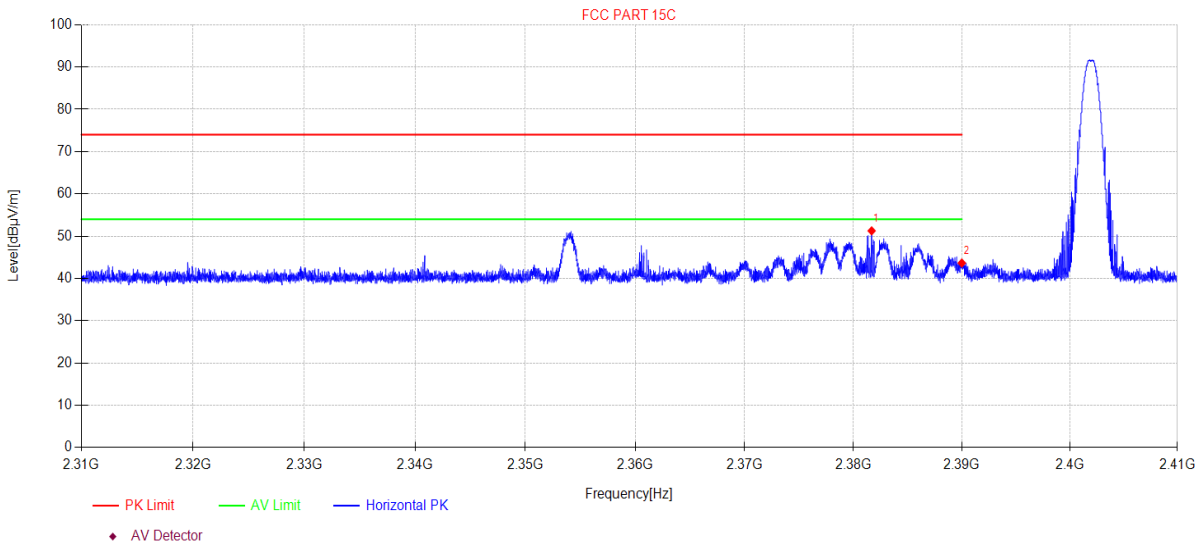

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2381.68	58.26	27.23	3.86	-38.09	51.26	74.00	22.74	PK	Horizontal
2	2390.00	50.62	27.26	3.87	-38.11	43.64	74.00	30.36	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2402MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\147
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

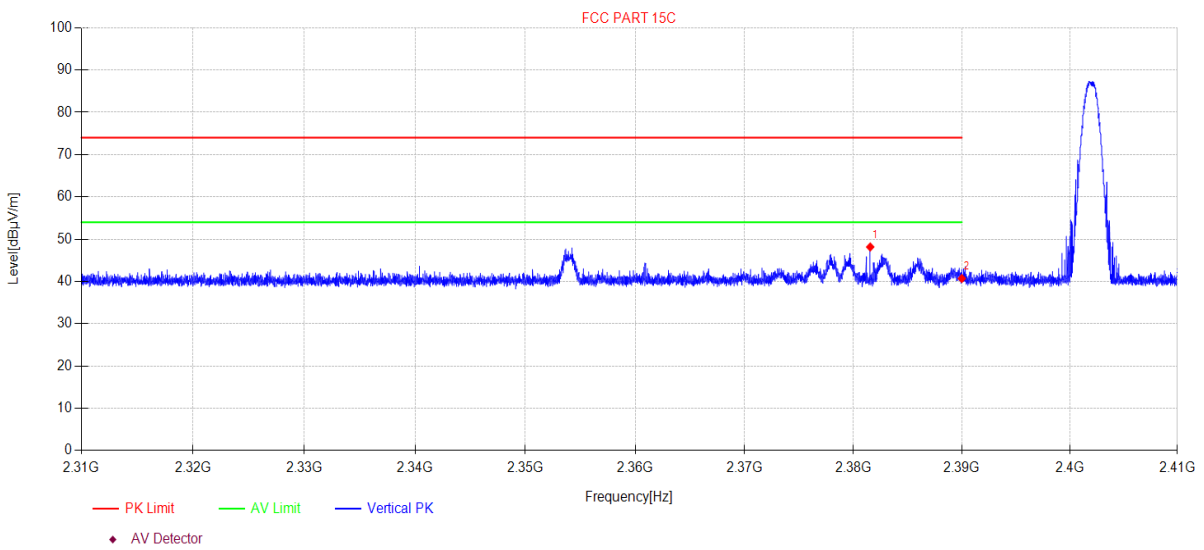

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2381.55	55.15	27.23	3.86	-38.09	48.15	74.00	25.85	PK	Vertical
2	2390.00	47.68	27.26	3.87	-38.11	40.70	74.00	33.30	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2480MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\152
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

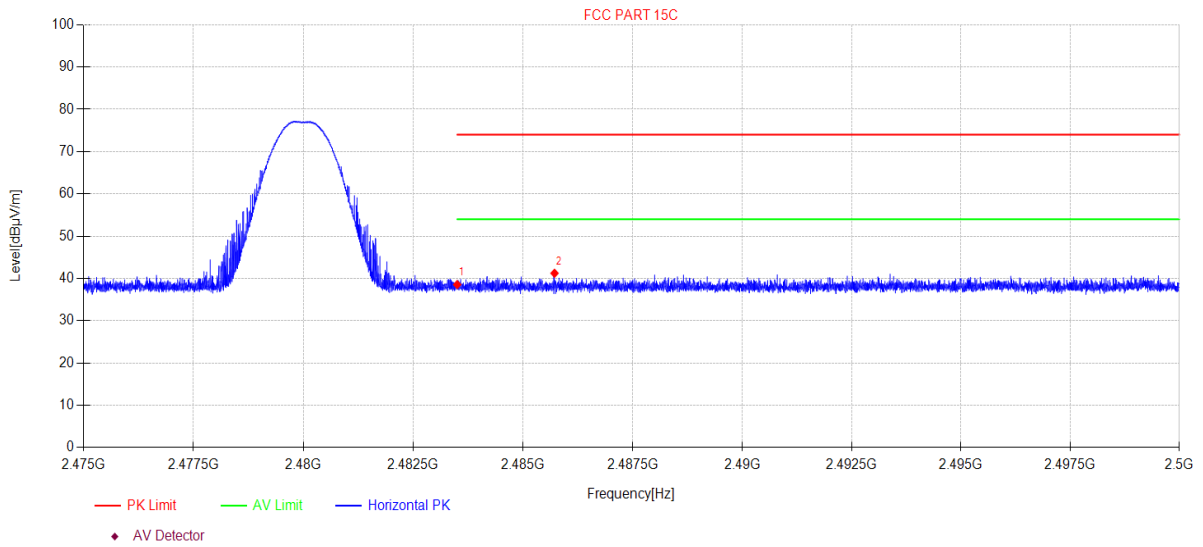

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.50	45.46	27.53	3.94	-38.38	38.55	74.00	35.45	PK	Horizontal
2	2485.72	48.13	27.54	3.94	-38.38	41.23	74.00	32.77	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: DH5 TX 2480MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\153
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

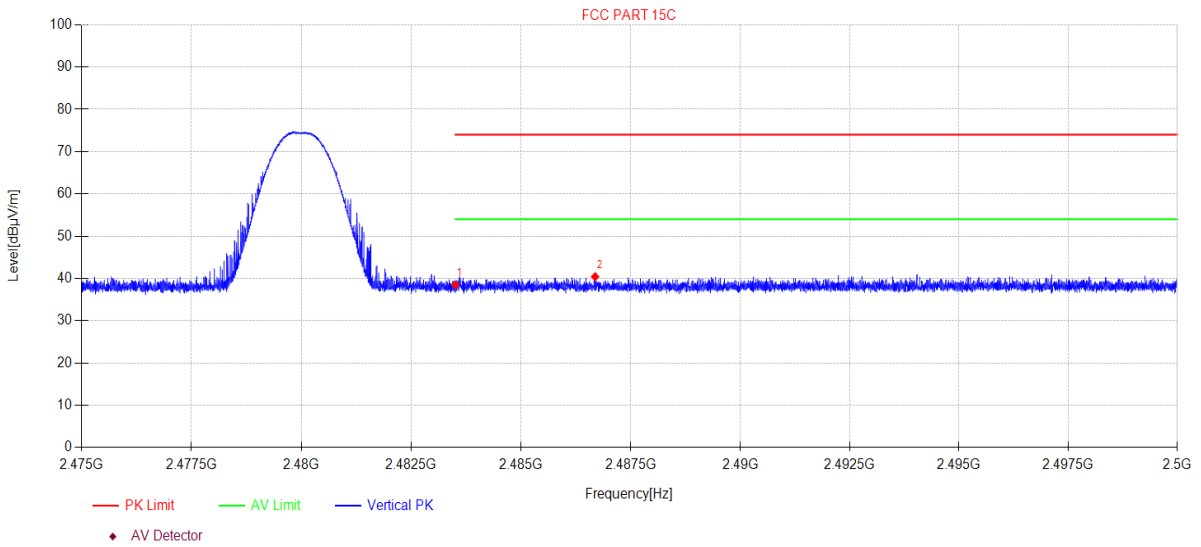

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	45.39	27.53	3.94	-38.38	38.48	74.00	35.52	PK	Vertical
2	2486.69	47.31	27.55	3.94	-38.39	40.41	74.00	33.59	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 2DH5 TX 2402MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\148
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

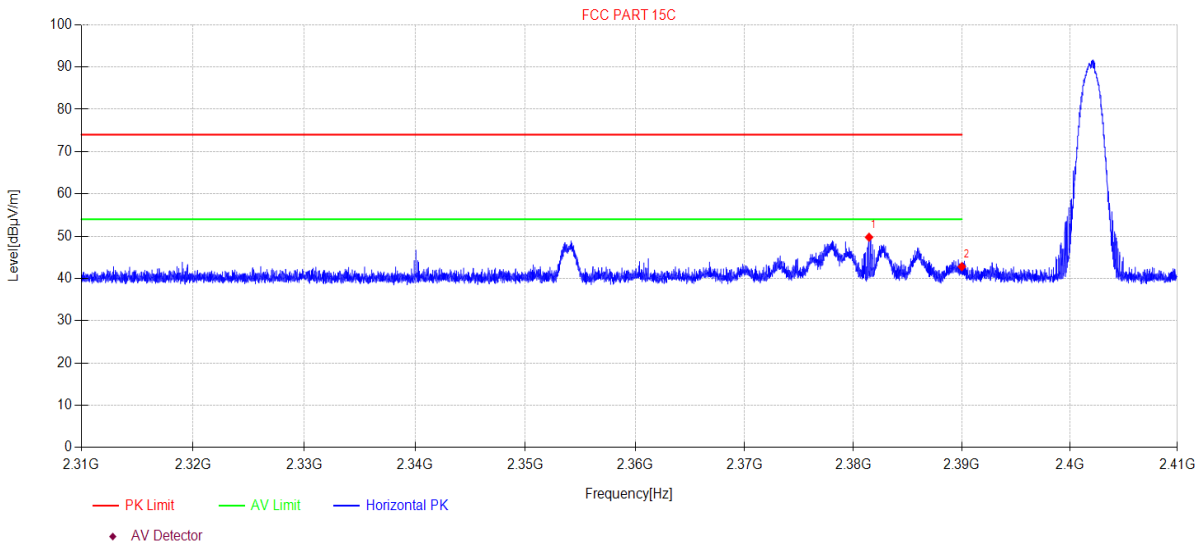

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2381.44	56.75	27.23	3.86	-38.09	49.75	74.00	24.25	PK	Horizontal
2	2390.00	49.76	27.26	3.87	-38.11	42.78	74.00	31.22	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 2DH5 TX 2402MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\149
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

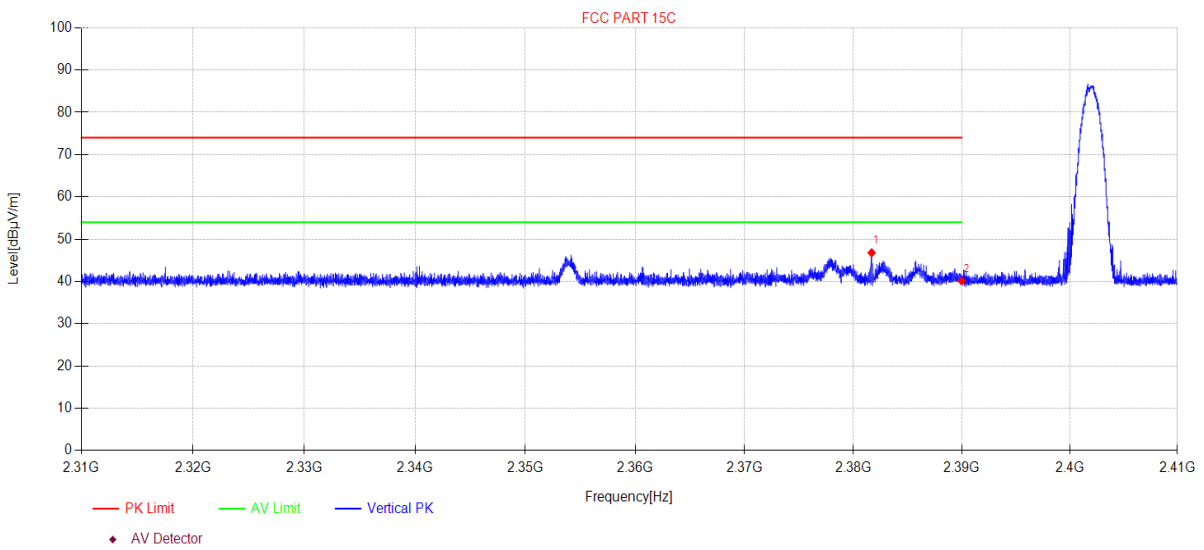

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2381.68	53.78	27.23	3.86	-38.09	46.78	74.00	27.22	PK	Vertical
2	2390.00	47.07	27.26	3.87	-38.11	40.09	74.00	33.91	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 2DH5 TX 2480MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\154
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

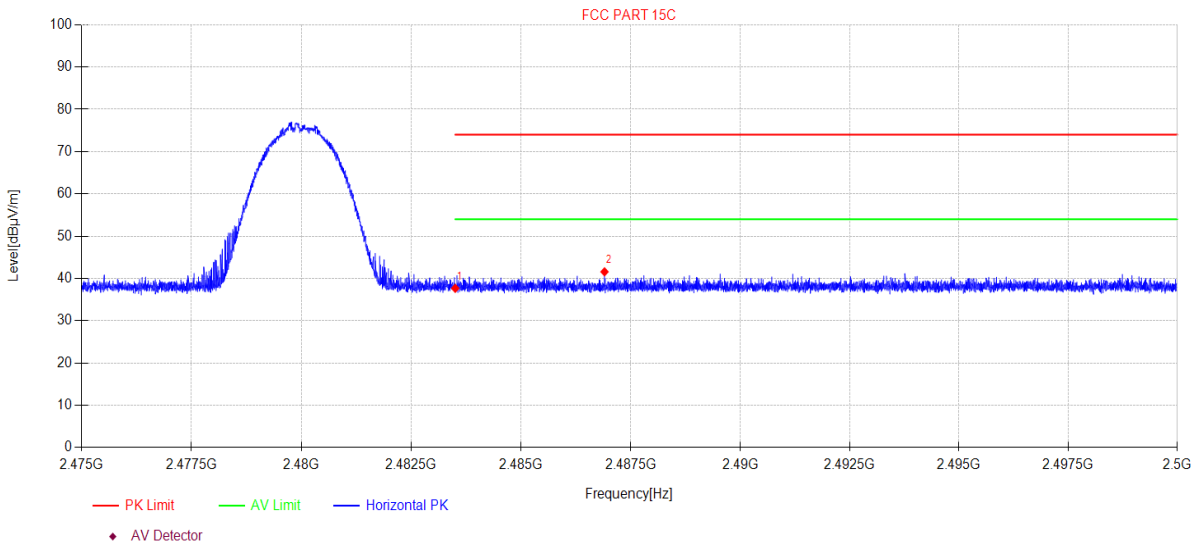

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.50	44.57	27.53	3.94	-38.38	37.66	74.00	36.34	PK	Horizontal
2	2486.90	48.47	27.55	3.94	-38.39	41.57	74.00	32.43	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 2DH5 TX 2480MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\155
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

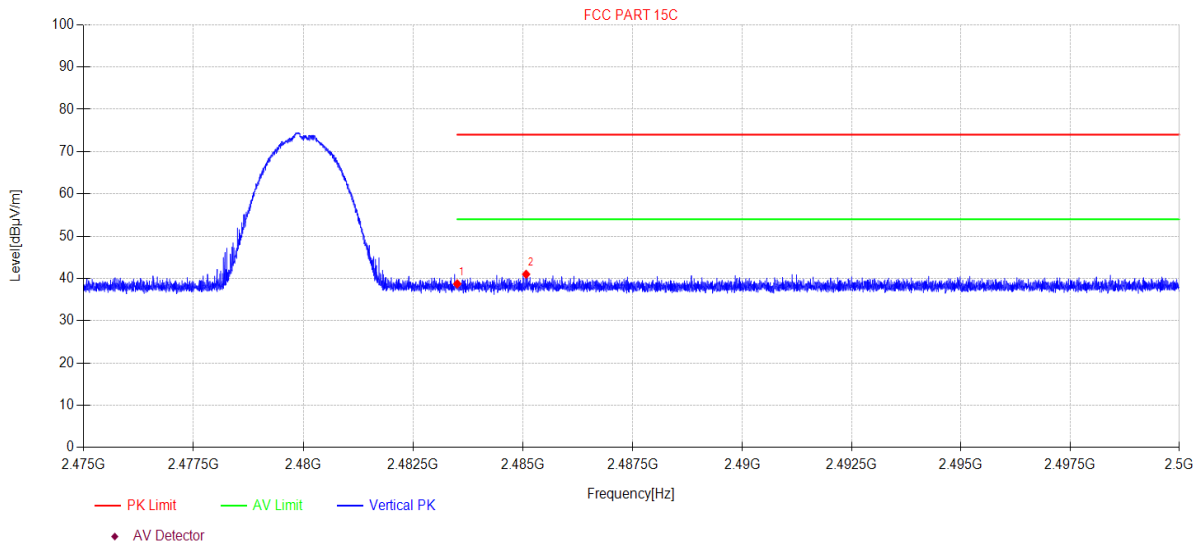

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.50	45.63	27.53	3.94	-38.38	38.72	74.00	35.28	PK	Vertical
2	2485.07	47.89	27.54	3.94	-38.38	40.99	74.00	33.01	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 3DH5 TX 2402MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\150
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

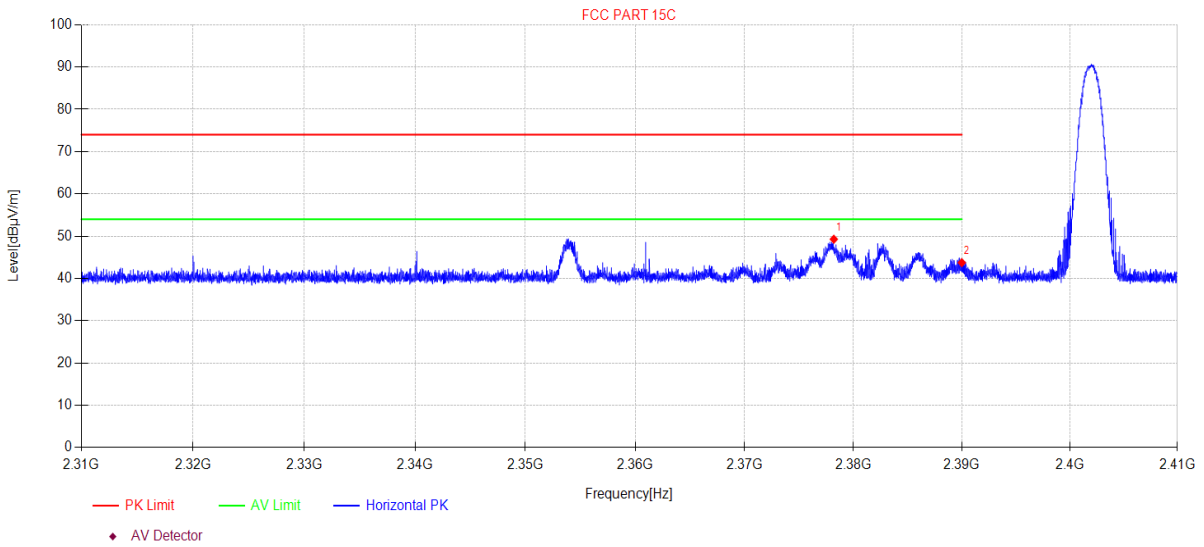

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2378.20	56.29	27.21	3.86	-38.08	49.28	74.00	24.72	PK	Horizontal
2	2390.00	50.71	27.26	3.87	-38.11	43.73	74.00	30.27	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 3DH5 TX 2402MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\151
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

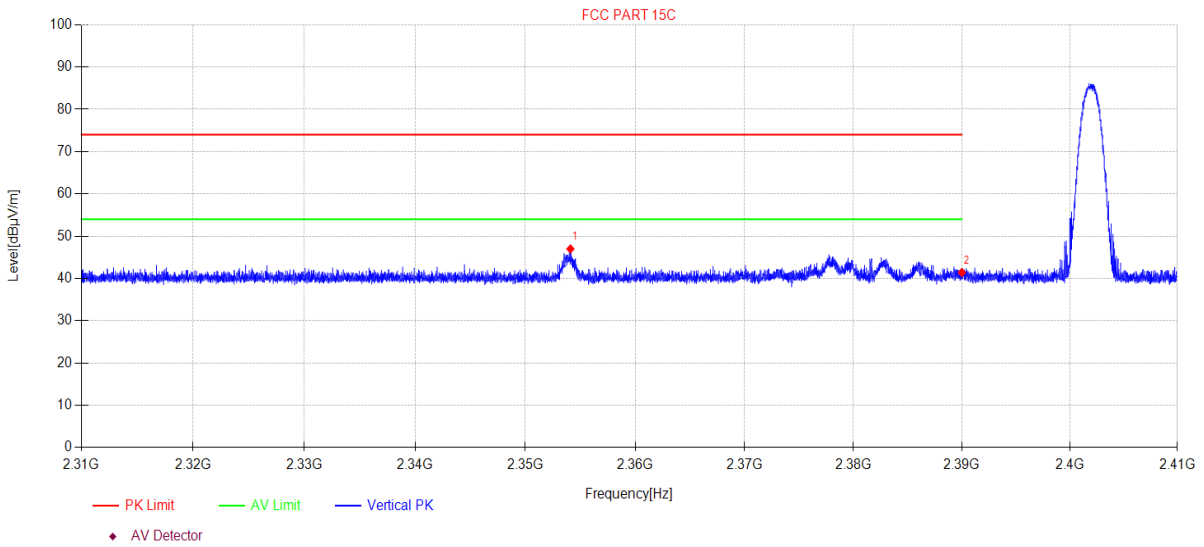

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2354.10	54.03	27.12	3.84	-38.01	46.98	74.00	27.02	PK	Vertical
2	2390.00	48.38	27.26	3.87	-38.11	41.40	74.00	32.60	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 3DH5 TX 2480MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\156
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

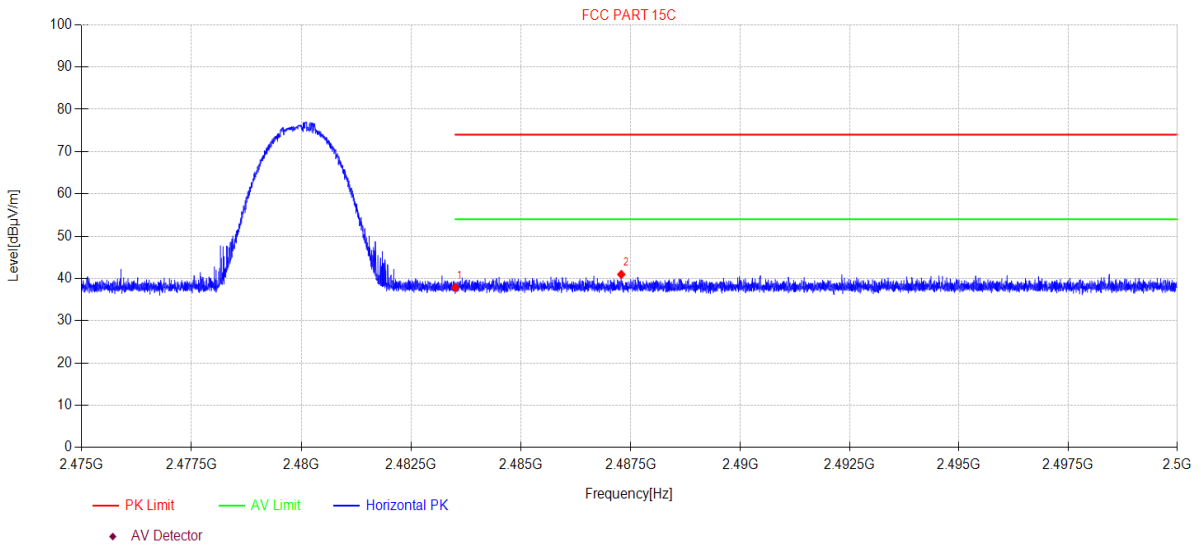

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.50	44.77	27.53	3.94	-38.38	37.86	74.00	36.14	PK	Horizontal
2	2487.29	47.86	27.55	3.94	-38.39	40.96	74.00	33.04	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-10 **Tested By:** Junchang Du
EUT: HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS **Model Number:** TOTAL PA™ FREEDOM
Test Mode: 3DH5 TX 2480MHz **Power Supply:** AC 100-120V/60HZ
Condition: Temp:23.1°C;Humi:64.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC ABOVE 1G\157
Memo: Sample Number:S23092205-01 Power Setting:-4

Test Graph

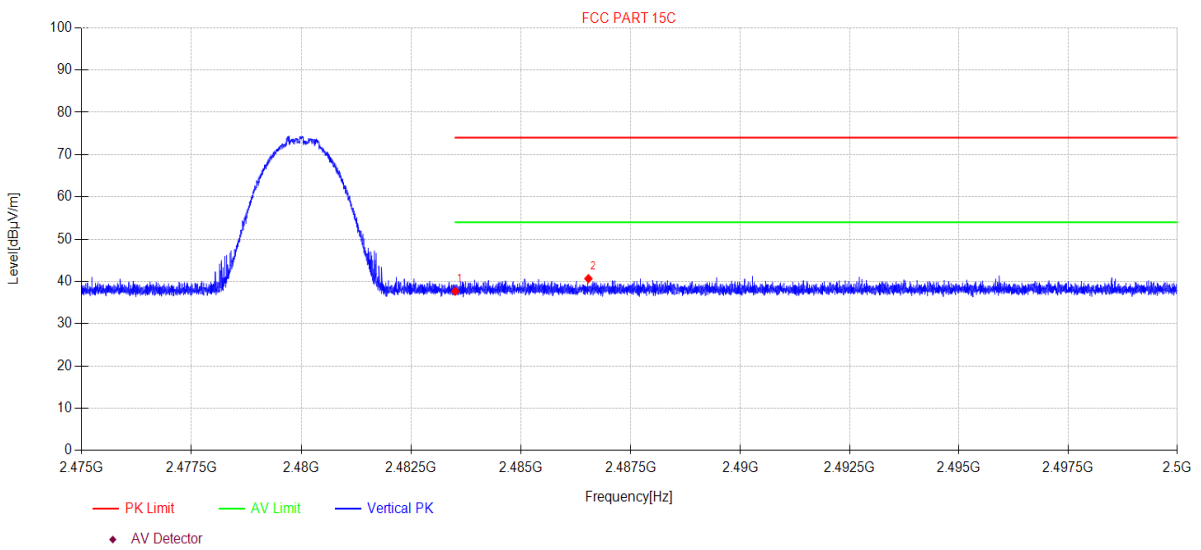

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.50	44.59	27.53	3.94	-38.38	37.68	74.00	36.32	PK	Vertical
2	2486.54	47.57	27.55	3.94	-38.39	40.67	74.00	33.33	PK	Vertical

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emission

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Power Line Conducted Emissions Test 1#				
Test Receiver	R&S	ESCI	100551	2024/07/10
LISN 1	R&S	ENV216	101109	2024/07/10
LISN 2	R&S	ESH2-Z5	100309	2024/07/11
Pulse Limiter	R&S	ESH3-Z2	101242	2024/07/14
CE Cable 1	HUBSER	N/A	W10.01	2024/07/14
Test software	Audix	E3	V 6.11111b	N/A

14.2. Block diagram of test setup

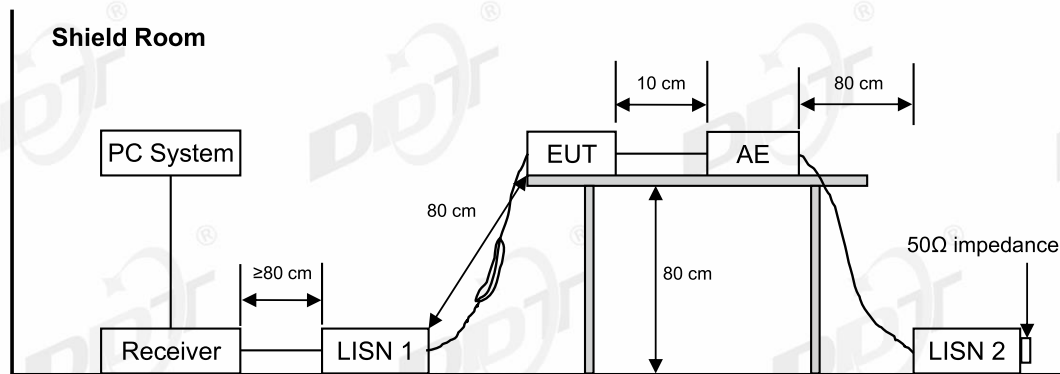

14.3. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.5. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2023-11-08
EUT : HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS
Power Supply : AC 120V/60Hz
Condition : TEMP:26.2°C, RH:62.9%
Memo : Sample Number:S23092205-01

D:\2023 CE report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC CE.EM6
Tested By : Bairong
Model Number : TOTAL PA™ FREEDOM
Test Mode : BT
LISN : 2023 1# ENV216/NEUTRAL

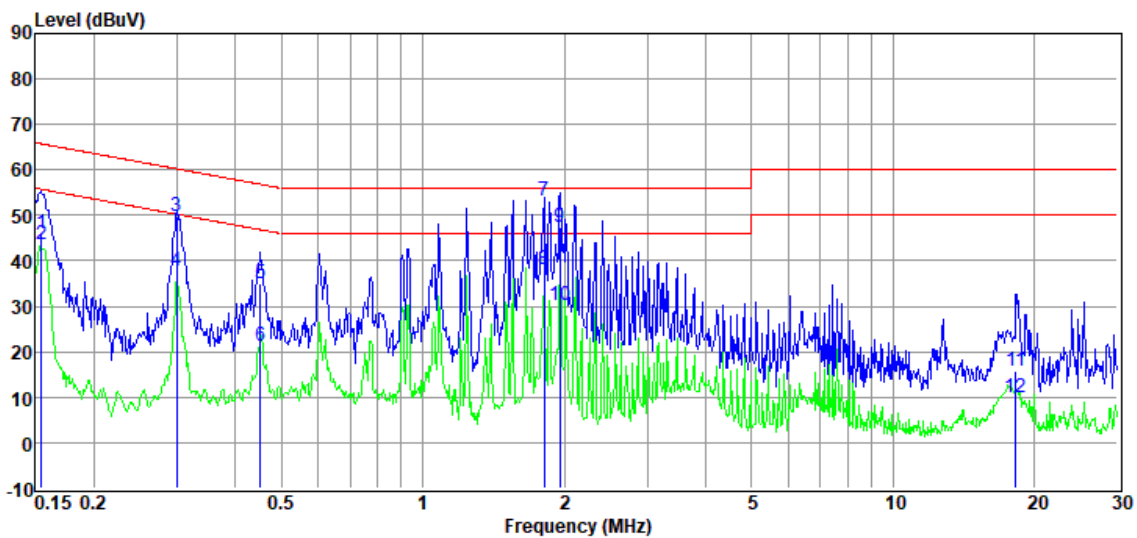

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	25.50	9.85	0.92	9.68	45.95	65.74	-19.79	QP	NEUTRAL
2	0.15	23.15	9.85	0.92	9.68	43.60	55.74	-12.14	Average	NEUTRAL
3	0.30	29.55	9.71	0.88	9.70	49.84	60.24	-10.40	QP	NEUTRAL
4	0.30	17.59	9.71	0.88	9.70	37.88	50.24	-12.36	Average	NEUTRAL
5	0.45	14.69	9.76	0.86	9.71	35.02	56.85	-21.83	QP	NEUTRAL
6	0.45	0.93	9.76	0.86	9.71	21.26	46.85	-25.59	Average	NEUTRAL
7	1.81	33.11	9.79	0.64	9.75	53.29	56.00	-2.71	QP	NEUTRAL
8	1.81	17.93	9.79	0.64	9.75	38.11	46.00	-7.89	Average	NEUTRAL
9	1.96	27.29	9.81	0.64	9.76	47.50	56.00	-8.50	QP	NEUTRAL
10	1.96	10.03	9.81	0.64	9.76	30.24	46.00	-15.76	Average	NEUTRAL
11	18.23	-4.22	9.85	0.32	9.91	15.86	60.00	-44.14	QP	NEUTRAL
12	18.23	-10.29	9.85	0.32	9.91	9.79	50.00	-40.21	Average	NEUTRAL

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2023-11-08
EUT : HIGH-POWER SPEAKER SYSTEM WITH WIRELESS MICROPHONE, ULTIMATE BASS™, AND EDGE-GLOW™ LIGHTS
Power Supply : AC 120V/60Hz
Condition : TEMP:26.2°C, RH:62.9%
Memo : Sample Number:S23092205-01

Model Number : TOTAL PA™ FREEDOM
Test Mode : BT
LISN : 2023 1# ENV216/LINE

D:\2023 CE report data\Q23092205-2E TOTAL PA™ FREEDOM\FCC CE.EM6
Tested By : Bairong

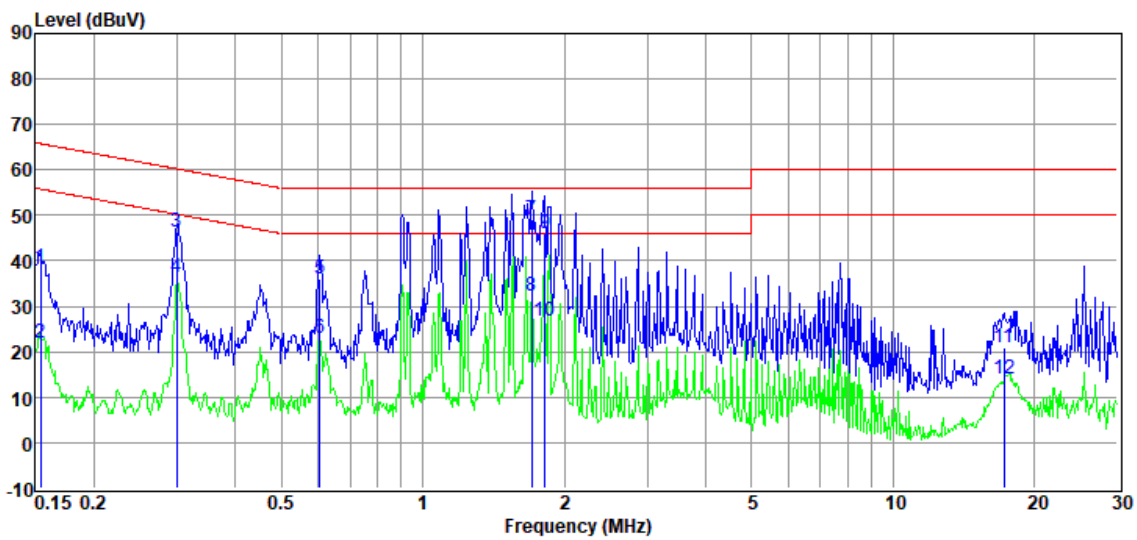

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	18.01	9.83	0.92	9.68	38.44	65.78	-27.34	QP	LINE
2	0.15	1.36	9.83	0.92	9.68	21.79	55.78	-33.99	Average	LINE
3	0.30	25.86	9.80	0.88	9.70	46.24	60.24	-14.00	QP	LINE
4	0.30	15.85	9.80	0.88	9.70	36.23	50.24	-14.01	Average	LINE
5	0.60	15.63	9.79	0.82	9.72	35.96	56.00	-20.04	QP	LINE
6	0.60	2.82	9.79	0.82	9.72	23.15	46.00	-22.85	Average	LINE
7	1.71	29.14	9.72	0.65	9.75	49.26	56.00	-6.74	QP	LINE
8	1.71	12.23	9.72	0.65	9.75	32.35	46.00	-13.65	Average	LINE
9	1.82	25.82	9.77	0.64	9.75	45.98	56.00	-10.02	QP	LINE
10	1.82	6.46	9.77	0.64	9.75	26.62	46.00	-19.38	Average	LINE
11	17.20	0.94	9.84	0.34	9.90	21.02	60.00	-38.98	QP	LINE
12	17.20	-6.08	9.84	0.34	9.90	14.00	50.00	-36.00	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

15. Antenna Requirements

15.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

15.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

17. Photos of the EUT

Please refer to appendix I.

END OF REPORT