

ION TOTAL PA

MEDIA PANEL

SD CARD USB

USB/SD/FM/BT

MODE

USB/SD BT FM

⏪ ⏩

Bluetooth Pairing Instructions

1. Use the Mode button to enter Bluetooth Mode - the Bluetooth logo and four dashes will appear.
2. The Bluetooth Logo will flash rapidly on the display to indicate pairing mode.
3. Enable Bluetooth on your device and select Total PA to connect.

MIC INPUT

MIN MAX

LINE INPUT

MIN MAX

AUX L R

EQUALIZER

0 +12 -12

HIGH

0 +12 -12


LOW

POWER CLIP

MIN MAX

MIX OUT

MEDIA PANEL VOLUME

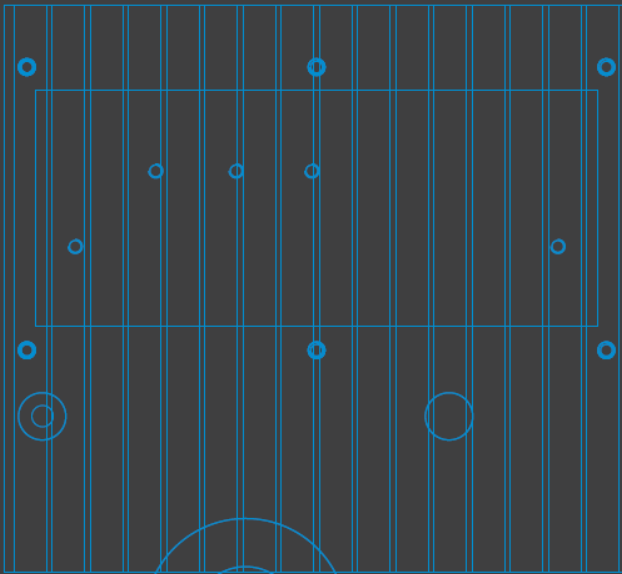

ON OFF

POWER

M/N: TOTAL PA
 FCC ID: 2B317C-PAE1
 NO: 105-41A-07A-61
 CMR FCC ID: 2B317C-PAE1-01
 MADE IN CHINA



intertek
 401929-3

CONFORME TO
 ANSUL STR-6085
 CERTIFIED TO
 CAN/CSA STD
 C22.2 NO. 60855

CAUTION PRUDENCE

RISK OF ELECTRIC SHOCK
 NO PART OPEN
 Risque de choc électrique
 Ne pas ouvrir

CAUTION TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE ANY COVER OR PANELS. NO USER SERVICEABLE PARTS INSIDE. RISK OF ELECTRIC SHOCK TO SERVICE PERSONNEL.

ATTENTION à réduire le risque de choc électrique:
 Ne pas retirer la couverture (ou l'écran).
 Aucune pièce réparabile pas l'utilisateur.
 respectez vous à des personnel qualifié.

ACT15V-60Hz 250W
 FUSE 5JSA 250V

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.



Labeling place