




M/N:TAILGATER iPA77

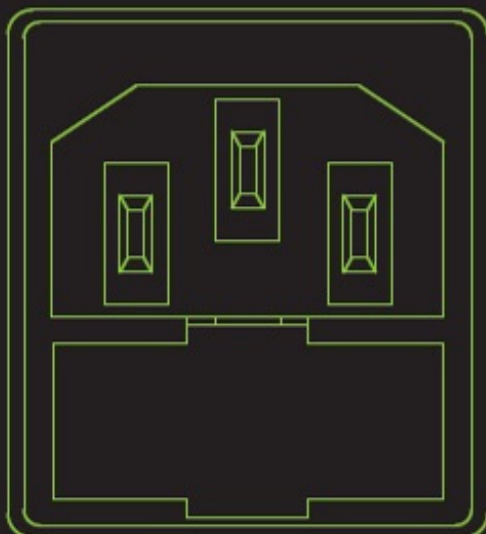

POWER

ON

OFF



AC FUSE INPUT RANGE

120V ~ 800mA 250V 100-240V~ 60Hz 50W

**FOR MAXIMUM BATTERY LIFE:**

- FULLY CHARGE BEFORE USING
- FULLY CHARGE BEFORE STORAGE
- FOR HELP VISIT IONAUDIO.COM



Intertek  
XXXXXXX

IC: 10541A-IPA77

FCC ID: 2AB3E-IPA77

CAN ICES-3 (B)/NMB-3(B)

CONFORMS TO ANSI/UL  
STD. 60065

SERTIFIED TO CAN/CSA  
STD. C22.2 NO.60065



**CAUTION**

RISK OF ELECTRIC SHOCK  
DO NOT OPEN



WARNING: SHOCK HAZARD - DO NOT OPEN  
AVIS: RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK  
DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE

AVIS: NE PAS EXPOSER CE MATÉRIEL À LA PLUIE OU L'HUMIDITE  
AFIN DE REDUIRE LE RISQUE D'INFLAMMATION OU DE CHOC ÉLECTRIQUE

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

MADE IN CHINA