

TEST REPORT

Product Name : Bluetooth Module
Brand Mark : N/A
Model No. : F-6988, RUITZA226AWZZQ
FCC ID : 2AB3N-F6988
Report Number : BLA-EMC-202106-A3101
Date of Sample Receipt : 2021/6/9
Date of Test : 2021/6/9 to 2021/6/21
Date of Issue : 2021/7/1
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

S&O ELECTRONICS (MALAYSIA) SDN. BHD.
LOT 202 , BAKAR ARANG INDUSTRIAL ESTATE, 08000 SUNGAI PETANI,
KEDAH, MALAYSIA.

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu .

Review by:

Sweel

Approved by:

Emen Li

Date:

2021/7/1



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/7/1	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	7
3 GENERAL DESCRIPTION OF E.U.T.....	7
4 TEST ENVIRONMENT	8
5 TEST MODE	8
6 MEASUREMENT UNCERTAINTY	8
7 DESCRIPTION OF SUPPORT UNIT.....	9
8 LABORATORY LOCATION.....	9
9 TEST INSTRUMENTS LIST.....	10
10 ANTENNA REQUIREMENT	14
10.1 CONCLUSION	14
11 CONDUCTED SPURIOUS EMISSIONS	15
11.1 LIMITS	15
11.2 BLOCK DIAGRAM OF TEST SETUP	15
11.3 TEST DATA.....	16
12 CONDUCTED BAND EDGES MEASUREMENT.....	17
12.1 LIMITS	17
12.2 BLOCK DIAGRAM OF TEST SETUP	17
12.3 TEST DATA.....	18
13 DWELL TIME.....	19
13.1 LIMITS	19
13.2 BLOCK DIAGRAM OF TEST SETUP	19
13.3 EST DATA.....	19
14 HOPPING CHANNEL NUMBER	20
14.1 LIMITS	20
14.2 BLOCK DIAGRAM OF TEST SETUP	20
14.3 TEST DATA.....	20
15 CARRIER FREQUENCIES SEPARATION	21
15.1 LIMITS	21

15.2	BLOCK DIAGRAM OF TEST SETUP	21
15.3	TEST DATA.....	21
16	20DB BANDWIDTH.....	22
16.1	BLOCK DIAGRAM OF TEST SETUP	22
16.2	TEST DATA.....	22
17	CONDUCTED PEAK OUTPUT POWER	23
17.1	LIMITS	23
17.2	BLOCK DIAGRAM OF TEST SETUP	23
17.3	TEST DATA.....	24
18	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	25
18.1	LIMITS	25
18.2	BLOCK DIAGRAM OF TEST SETUP	25
18.3	PROCEDURE	25
18.4	TEST DATA.....	27
19	RADIATED SPURIOUS EMISSIONS.....	29
19.1	LIMITS	29
19.2	BLOCK DIAGRAM OF TEST SETUP	30
19.3	PROCEDURE	30
19.4	TEST DATA.....	32
20	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	40
20.1	LIMITS	40
20.2	BLOCK DIAGRAM OF TEST SETUP	41
20.3	PROCEDURE	41
20.4	TEST DATA.....	43
21	APPENDIX 1:	47
21.1	MAXIMUM CONDUCTED OUTPUT POWER	47
21.2	-20DB BANDWIDTH.....	52
21.3	OCCUPIED CHANNEL BANDWIDTH.....	57
21.4	BAND EDGE	62
21.5	BAND EDGE(HOPPING)	69
21.6	CONDUCTED RF SPURIOUS EMISSION	76
21.7	CARRIER FREQUENCIES SEPARATION	86
21.8	NUMBER OF HOPPING CHANNEL	88

21.9 Dwell Time	90
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	94
APPENDIX B: PHOTOGRAPHS OF EUT	96

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	S&O ELECTRONICS (MALAYSIA) SDN. BHD.
Address	LOT 202, BAKAR ARANG INDUSTRIAL ESTATE, 08000 SUNGAI PETANI, KEDAH, MALAYSIA.
Manufacturer	S&O ELECTRONICS (MALAYSIA) SDN. BHD.
Address	LOT 202, BAKAR ARANG INDUSTRIAL ESTATE, 08000 SUNGAI PETANI, KEDAH, MALAYSIA.
Factory	SHENZHENSHE XINZHONGXIN TECHNOLOGY Co., Ltd.
Address	BLOCK 3, DONG HUAN INDUSTRIAL PARK, SHA JING TOWN, BAO'AN DISTRICT, SHENZHEN CITY, GUANGDONG, CHINA.
Product Name	Bluetooth Module
Test Model No.	F-6988

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi(Provided by the applicant)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25 °C	3.3Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: DH1, DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned only 8-DPSK worse case is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A
DC power supply (LODESTAR)	LODESTAR	LP305DE	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China

Telephone: TEL: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Dwell Time					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Hopping Channel Number					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Carrier Frequencies Separation

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11

Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11
------------------	---------	--------	------------	------------	------------

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Radiated Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

10 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


10.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

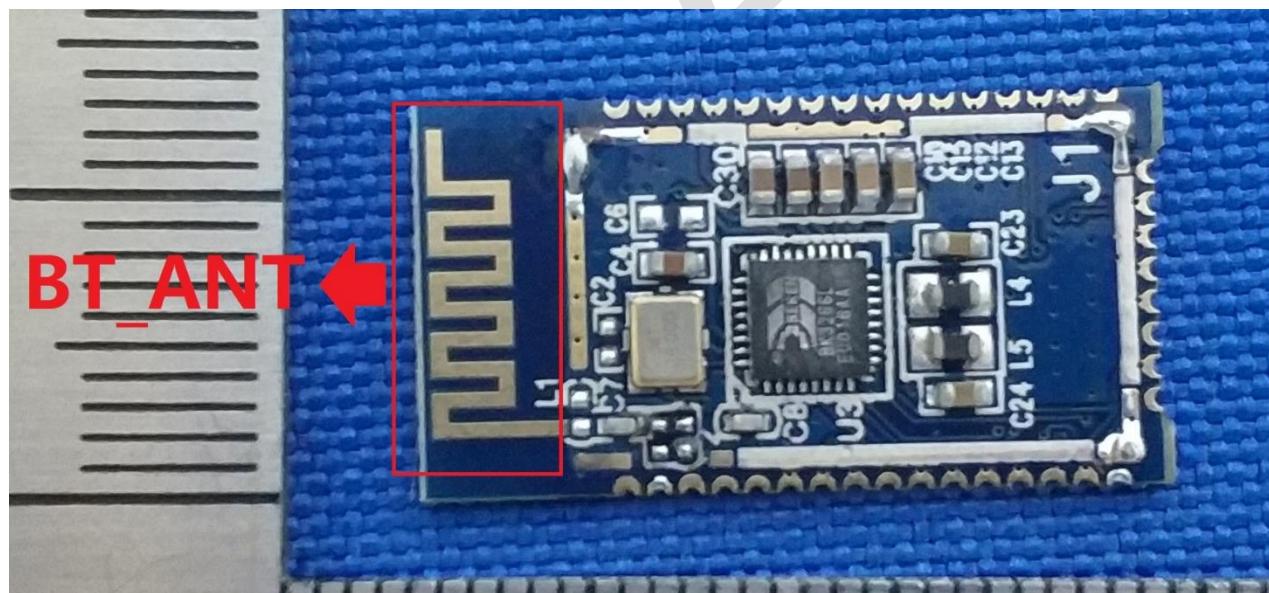


11 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

11.2 BLOCK DIAGRAM OF TEST SETUP

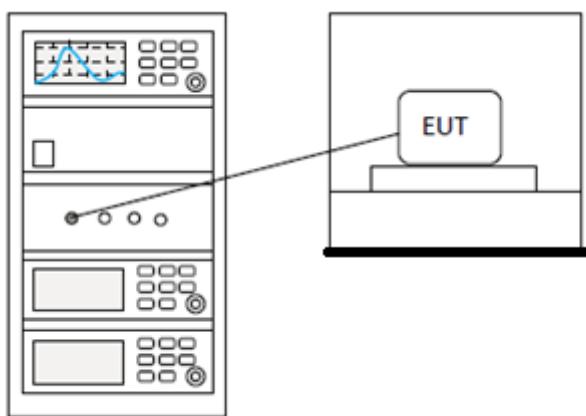

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


12 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

12.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

12.2 BLOCK DIAGRAM OF TEST SETUP

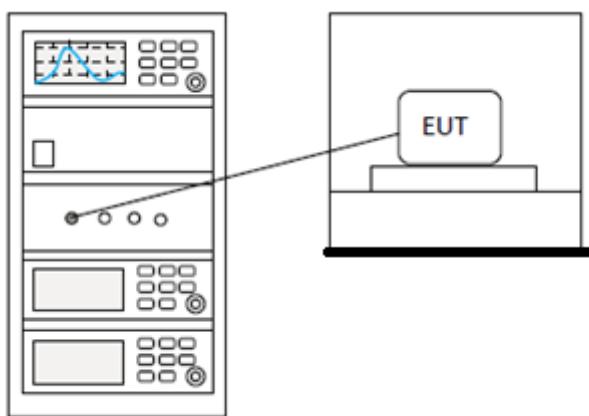

12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


13 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

13.2 BLOCK DIAGRAM OF TEST SETUP

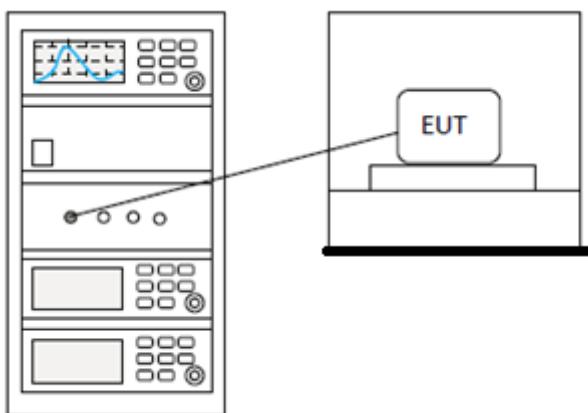

13.3 EST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--


14 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

14.2 BLOCK DIAGRAM OF TEST SETUP

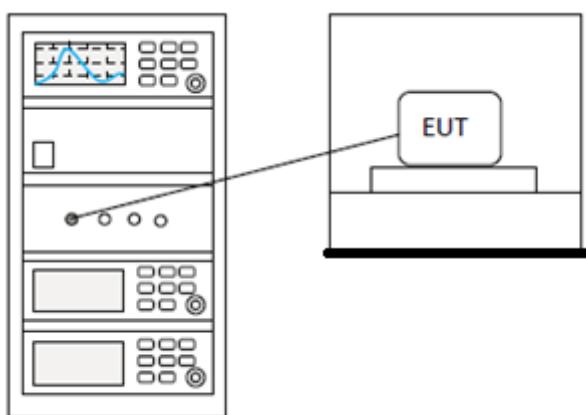

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


15 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

15.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

15.2 BLOCK DIAGRAM OF TEST SETUP

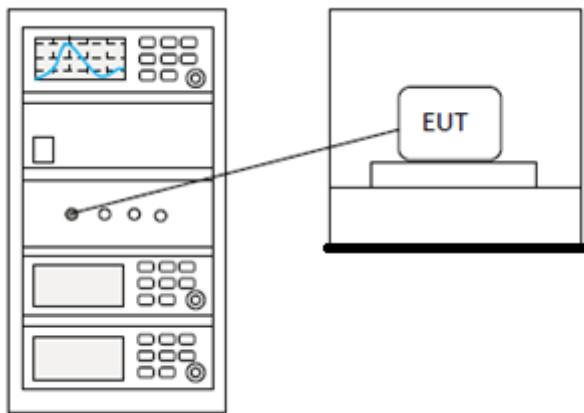


15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

16 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

16.1 BLOCK DIAGRAM OF TEST SETUP

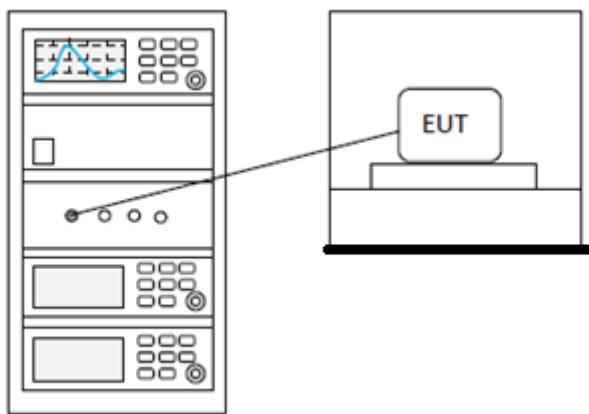

16.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

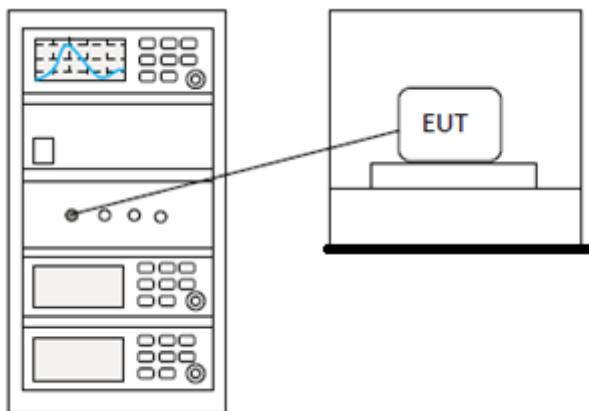

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--

BlueAsia

18 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	Transmitting mode
Test Mode (Final Test)	Transmitting mode
Tester	Jozu
Temperature	25 °C
Humidity	60%

18.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

18.2 BLOCK DIAGRAM OF TEST SETUP

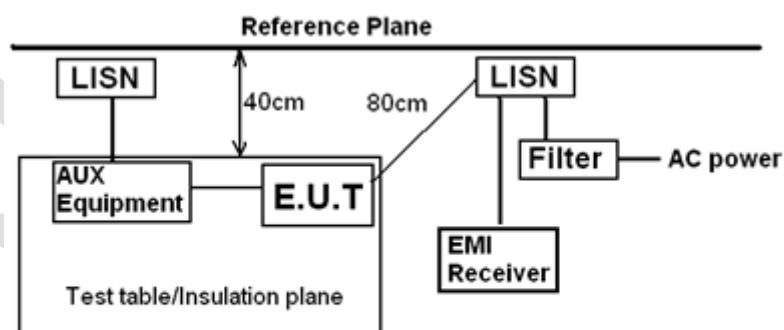

Remark
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

18.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 50hm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

18.4 TEST DATA

[TestMode: BT mode]; [Line: Line][Power:AC120V/60Hz]

Conducted Emission Measurement

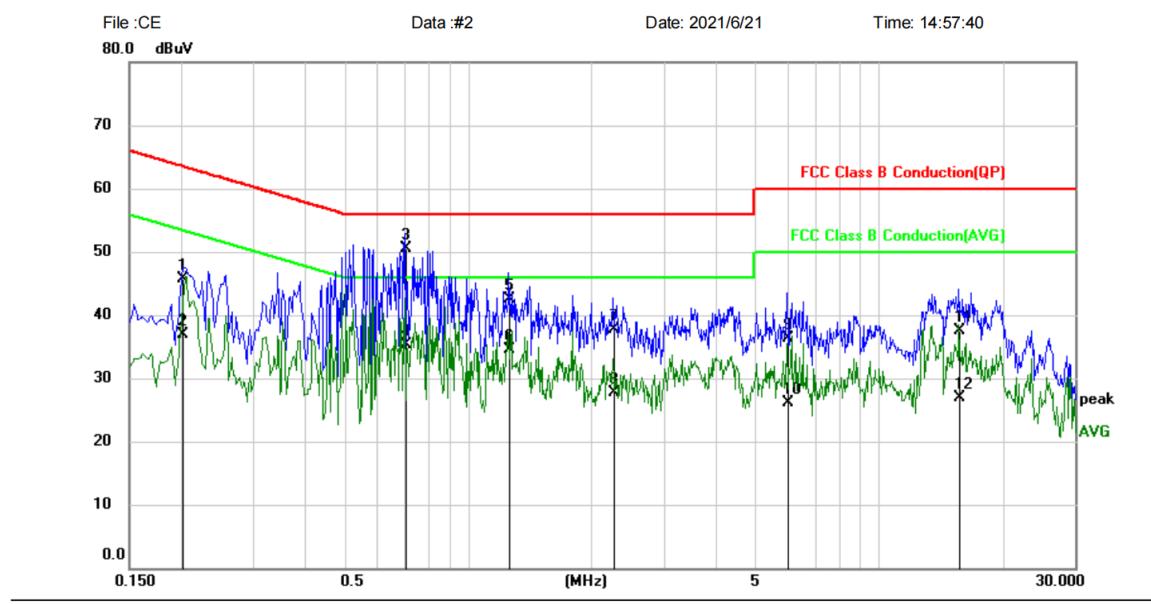


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over Detector	Comment
1		0.2020	35.89	9.83	45.72	63.53	-17.81	QP
2		0.2020	27.16	9.83	36.99	53.53	-16.54	AVG
3 *		0.7019	40.59	9.89	50.48	56.00	-5.52	QP
4		0.7019	25.44	9.89	35.33	46.00	-10.67	AVG
5		1.2579	32.49	9.93	42.42	56.00	-13.58	QP
6		1.2579	24.57	9.93	34.50	46.00	-11.50	AVG
7		2.2500	27.81	9.94	37.75	56.00	-18.25	QP
8		2.2500	17.86	9.94	27.80	46.00	-18.20	AVG
9		5.9899	26.18	10.05	36.23	60.00	-23.77	QP
10		5.9899	16.12	10.05	26.17	50.00	-23.83	AVG
11		15.7020	27.22	10.34	37.56	60.00	-22.44	QP
12		15.7020	16.50	10.34	26.84	50.00	-23.16	AVG

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

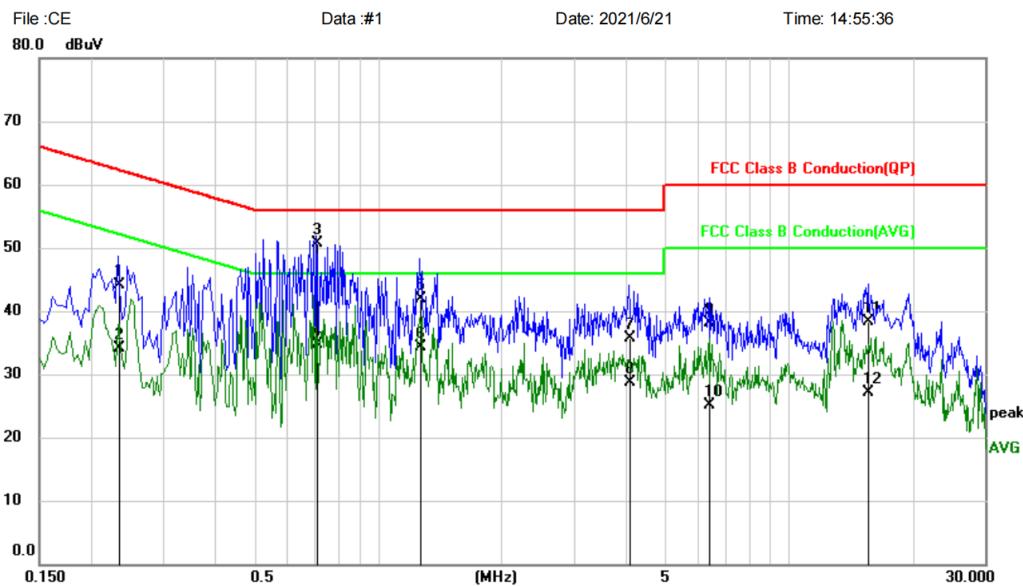[TestMode: BT mode]; [Line: Neutral] [Power:AC120V/60Hz]
Conducted Emission Measurement


Site Phase: **N** Temperature:

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Module

M/N: F-6988

Mode: BT mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dB _u V	dB	dB _u V	dB	Detector	Comment
1		0.2340	34.42	9.76	44.18	62.31	-18.13	QP
2		0.2340	24.44	9.76	34.20	52.31	-18.11	AVG
3 *		0.7100	40.86	9.82	50.68	56.00	-5.32	QP
4		0.7100	24.97	9.82	34.79	46.00	-11.21	AVG
5		1.2660	32.08	9.85	41.93	56.00	-14.07	QP
6		1.2660	24.48	9.85	34.33	46.00	-11.67	AVG
7		4.0780	25.71	9.91	35.62	56.00	-20.38	QP
8		4.0780	18.76	9.91	28.67	46.00	-17.33	AVG
9		6.3940	28.06	9.99	38.05	60.00	-21.95	QP
10		6.3940	15.18	9.99	25.17	50.00	-24.83	AVG
11		15.5660	28.05	10.31	38.36	60.00	-21.64	QP
12		15.5660	16.71	10.31	27.02	50.00	-22.98	AVG

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

19 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

19.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

19.2 BLOCK DIAGRAM OF TEST SETUP

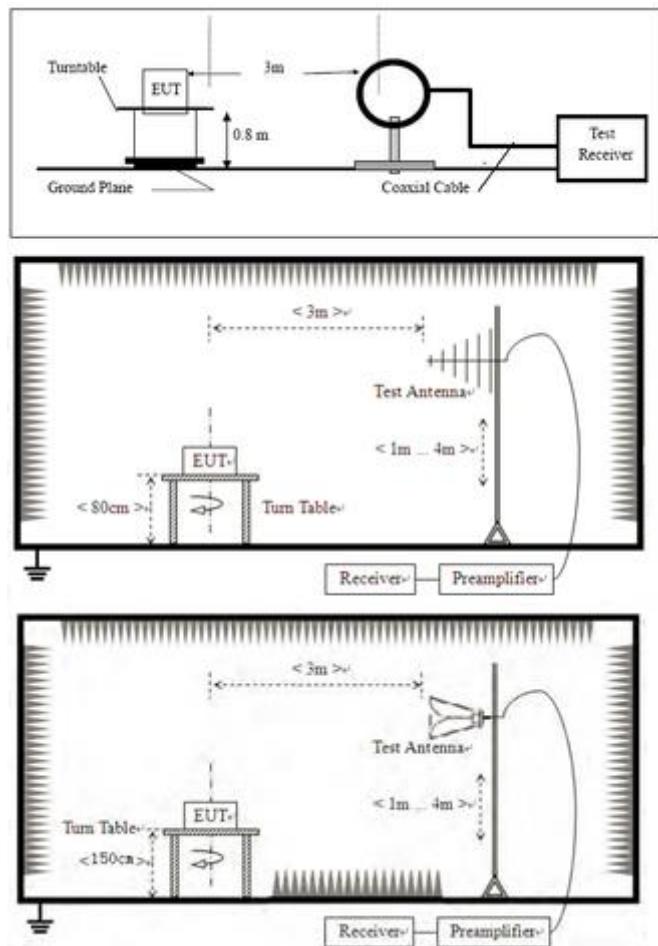

19.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

19.4 TEST DATA

[TestMode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

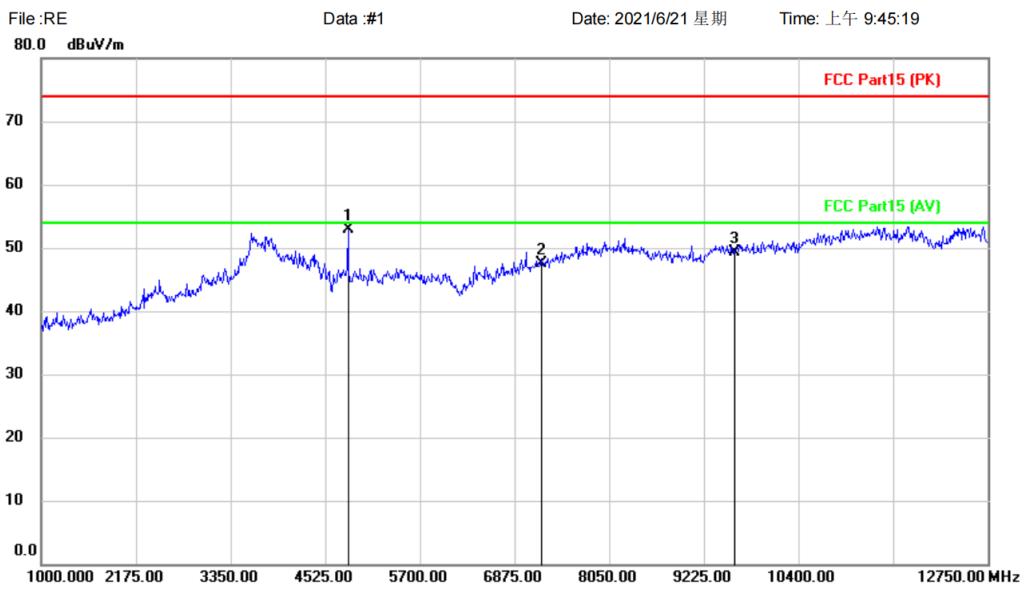

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-L


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4807.000	49.28	3.71	52.99	74.00	-21.01	peak		
2		7206.000	41.48	5.96	47.44	74.00	-26.56	peak		
3		9608.000	39.98	9.29	49.27	74.00	-24.73	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

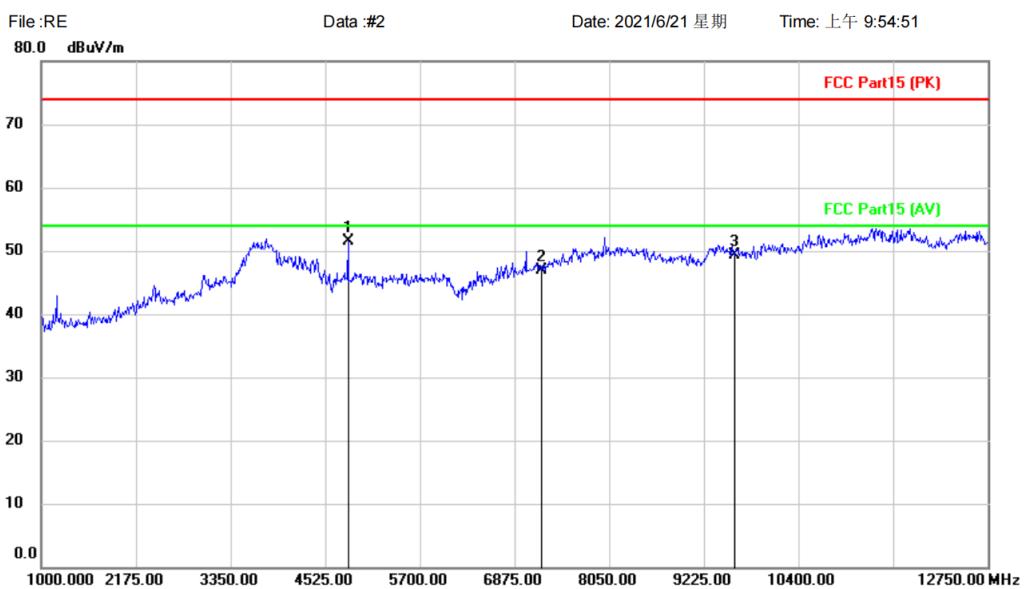[TestMode: TX Low channel]; [Polarity: Vertical]
Radiated Emission Measurement


Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-L

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	4807.000	47.81	3.71	51.52	74.00	-22.48	peak			
2		7206.000	40.91	5.96	46.87	74.00	-27.13	peak			
3		9608.000	39.93	9.29	49.22	74.00	-24.78	peak			


*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Vertical]

Radiated Emission Measurement

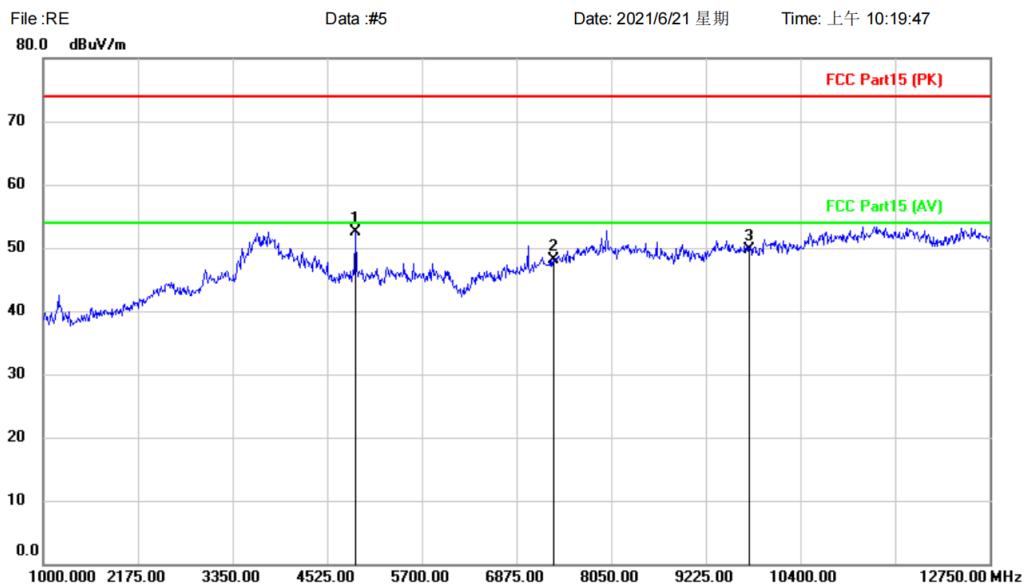

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-M

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4877.500	49.12	3.37	52.49	74.00	-21.51	peak		
2		7323.000	41.61	6.43	48.04	74.00	-25.96	peak		
3		9764.000	40.03	9.63	49.66	74.00	-24.34	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Horizontal]

Radiated Emission Measurement

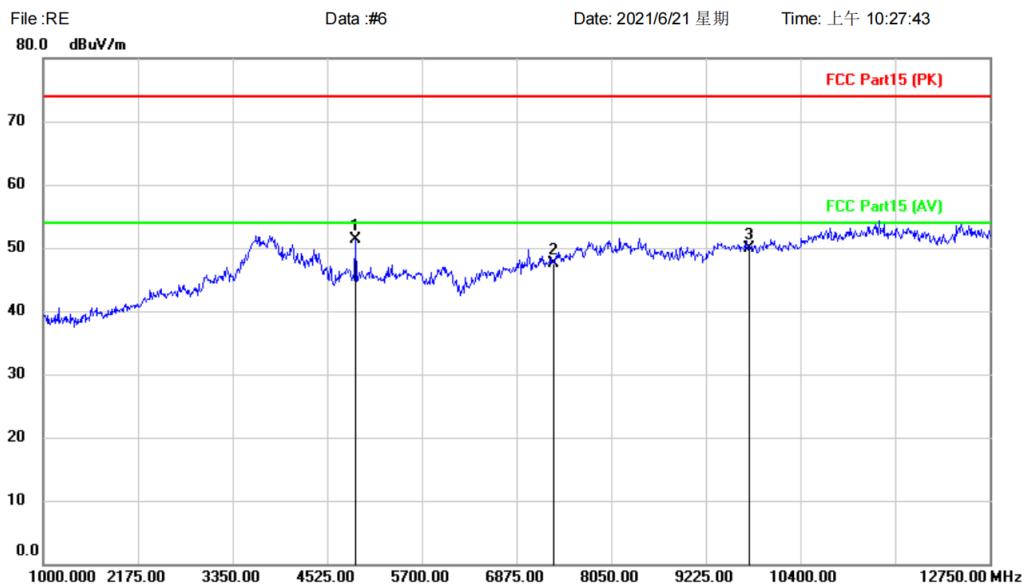

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-M


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4877.500	48.03	3.37	51.40	74.00	-22.60	peak		
2		7323.000	41.17	6.43	47.60	74.00	-26.40	peak		
3		9764.000	40.33	9.63	49.96	74.00	-24.04	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

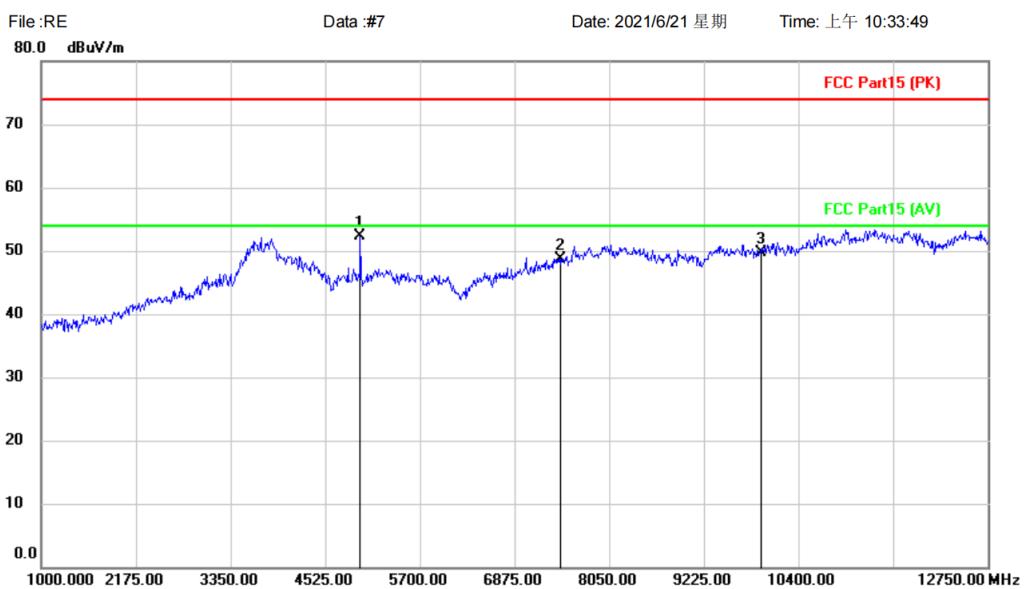[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement


Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dB _{uV}	Correct Factor dB	Measure- ment dB _{uV/m}	Limit dB _{uV/m}	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	4959.750	48.65	3.75	52.40	74.00	-21.60	peak			
2		7440.000	41.85	6.86	48.71	74.00	-25.29	peak			
3		9920.000	39.53	10.16	49.69	74.00	-24.31	peak			


*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :RE Data :#8 Date: 2021/6/21 星期一 Time: 上午 10:40:37

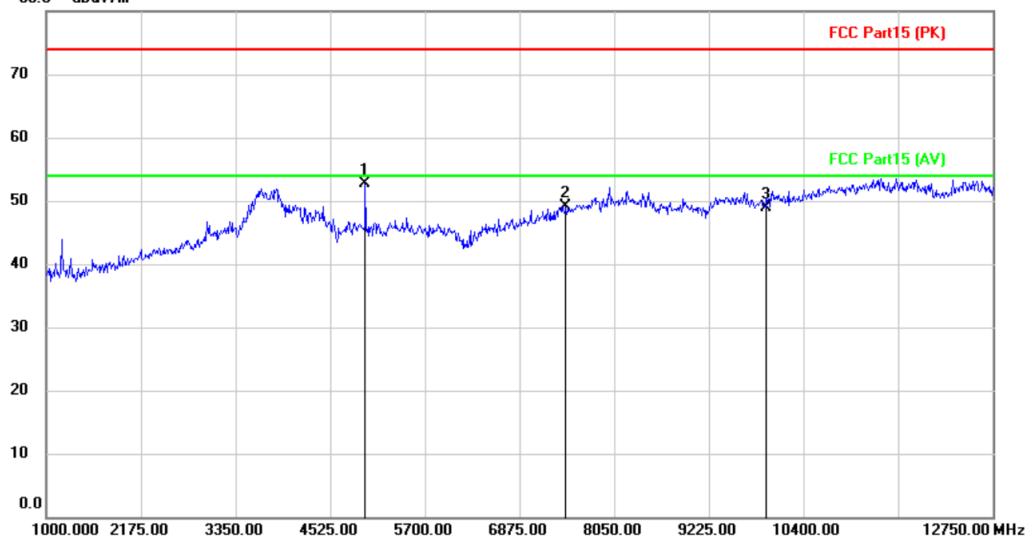

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	4959.750	48.89	3.75	52.64	74.00	-21.36	peak			
2		7440.000	42.25	6.86	49.11	74.00	-24.89	peak			
3		9920.000	38.80	10.16	48.96	74.00	-25.04	peak			


*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: 202106-A31
EUT: Bluetooth Module	Test Engineer: Charlie
M/N: F-6988	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-06-21 14:15:43

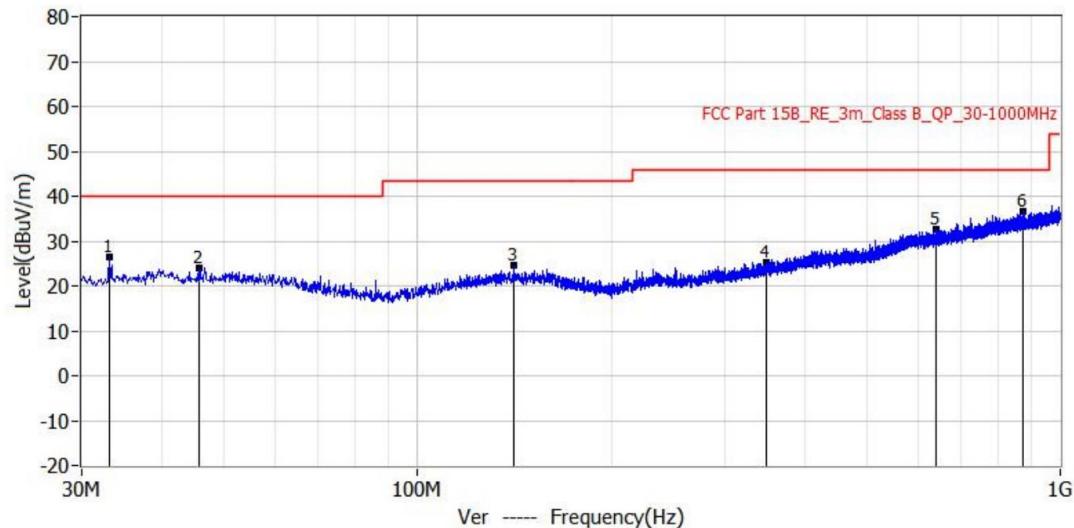


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	33.153MHz	40.0	26.6	-13.4	3.5	23.1	QP	Ver	100.0	325.0
2*	45.763MHz	40.0	24.0	-16.0	0.1	23.9	QP	Ver	100.0	213.0
3*	141.308MHz	43.5	24.5	-19.0	0.8	23.7	QP	Ver	100.0	217.0
4*	348.160MHz	46.0	25.2	-20.8	-0.4	25.6	QP	Ver	100.0	334.0
5*	640.979MHz	46.0	32.6	-13.4	1.1	31.5	QP	Ver	100.0	0.0
6*	876.931MHz	46.0	36.5	-9.5	1.7	34.8	QP	Ver	100.0	270.0

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: 202106-A31
EUT: Bluetooth Module	Test Engineer: Charlie
M/N: F-6988	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-06-21 14:17:49

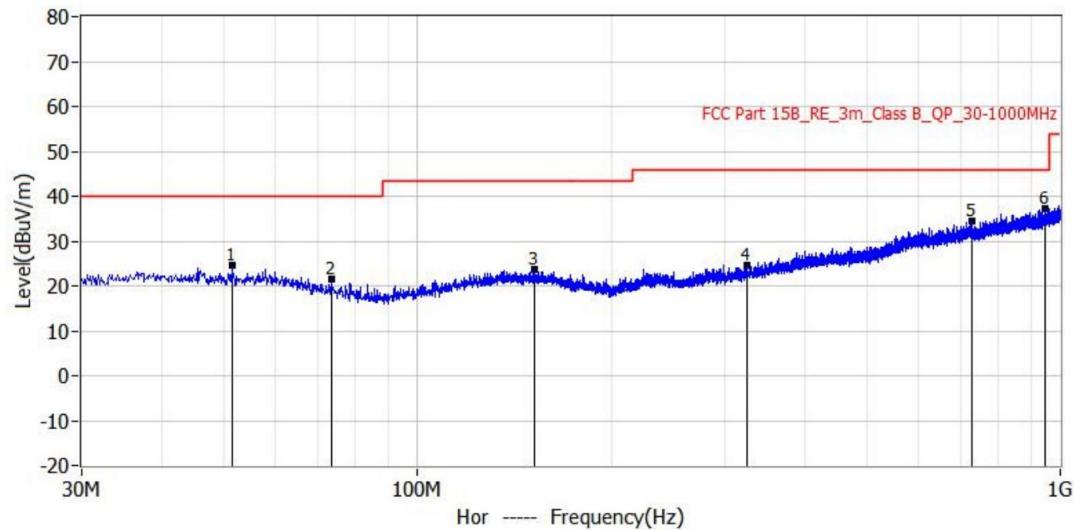

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	51.340MHz	40.0	24.5	-15.5	0.7	23.8	QP	Hor	100.0	298.0
2*	73.286MHz	40.0	21.5	-18.5	0.6	20.9	QP	Hor	100.0	78.0
3*	151.978MHz	43.5	23.8	-19.7	0.3	23.5	QP	Hor	100.0	182.0
4*	325.123MHz	46.0	24.6	-21.4	-0.3	24.9	QP	Hor	100.0	304.0
5*	729.734MHz	46.0	34.5	-11.5	1.9	32.6	QP	Hor	100.0	304.0
6*	948.226MHz	46.0	37.1	-8.9	1.5	35.6	QP	Hor	100.0	74.0

Test Result: Pass

20 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

20.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

20.2 BLOCK DIAGRAM OF TEST SETUP

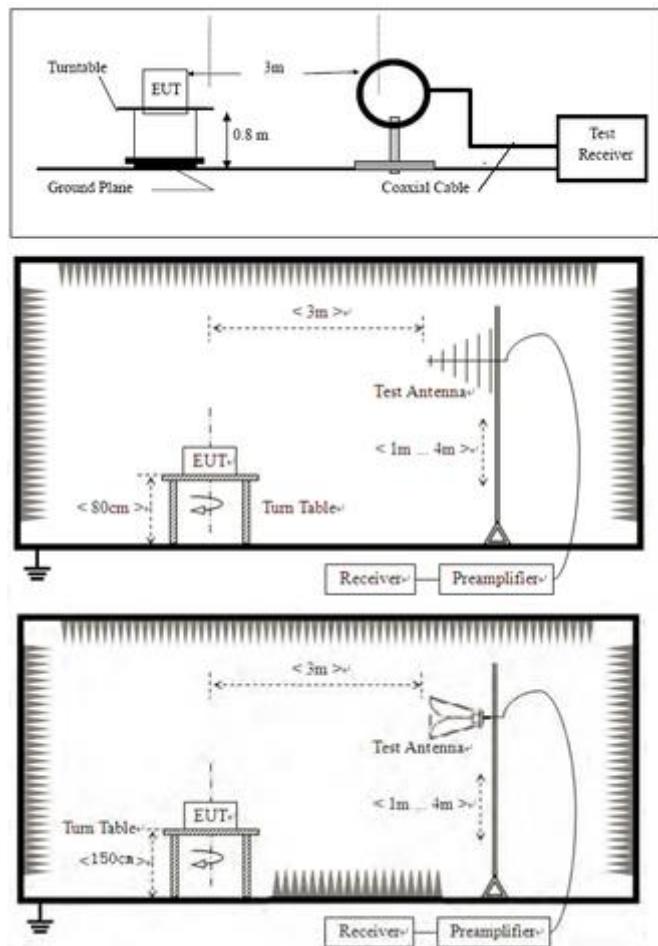

20.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

20.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

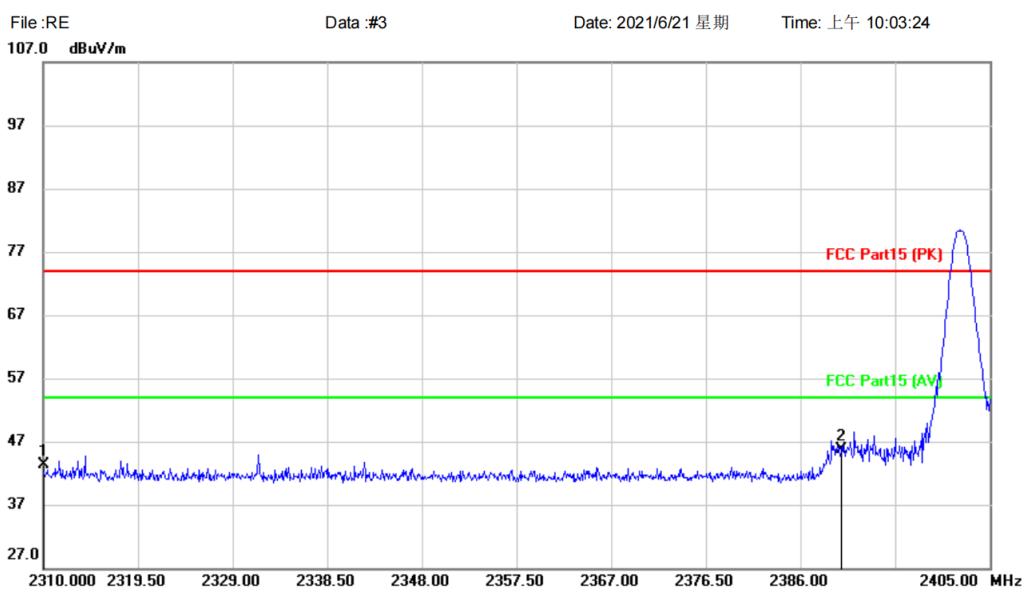


Site Polarization: **Vertical** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Bluetooth Module Distance:
M/N: F-6988
Mode: TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	47.91	-4.61	43.30	74.00	-30.70	peak			
2	*	2390.000	50.01	-4.27	45.74	74.00	-28.26	peak			

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

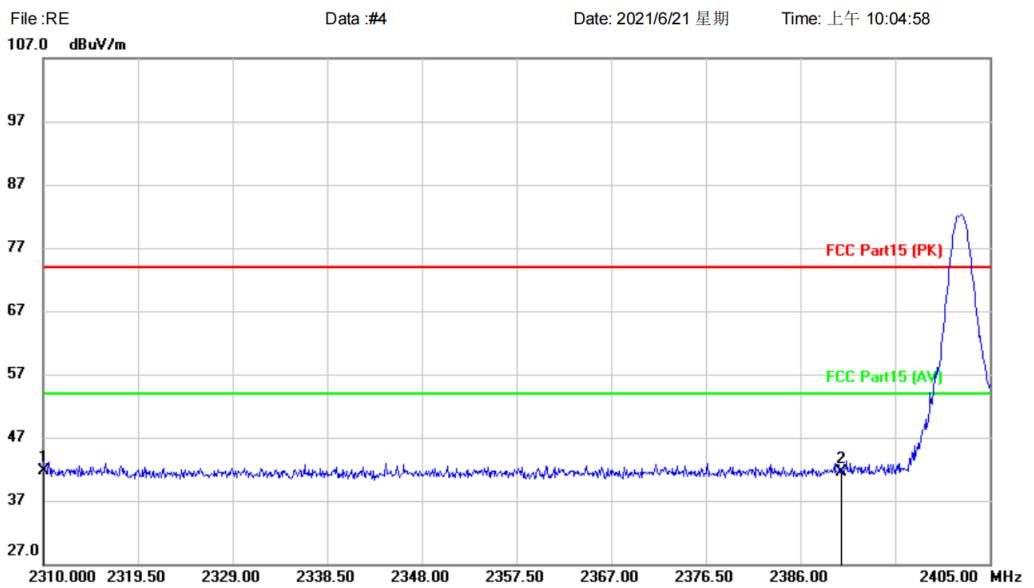[TestMode: TX low channel]; [Polarity: Horizontal]
Radiated Emission Measurement


Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-L


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2310.000	46.37	-4.61	41.76	74.00	-32.24	peak		
2		2390.000	45.78	-4.27	41.51	74.00	-32.49	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

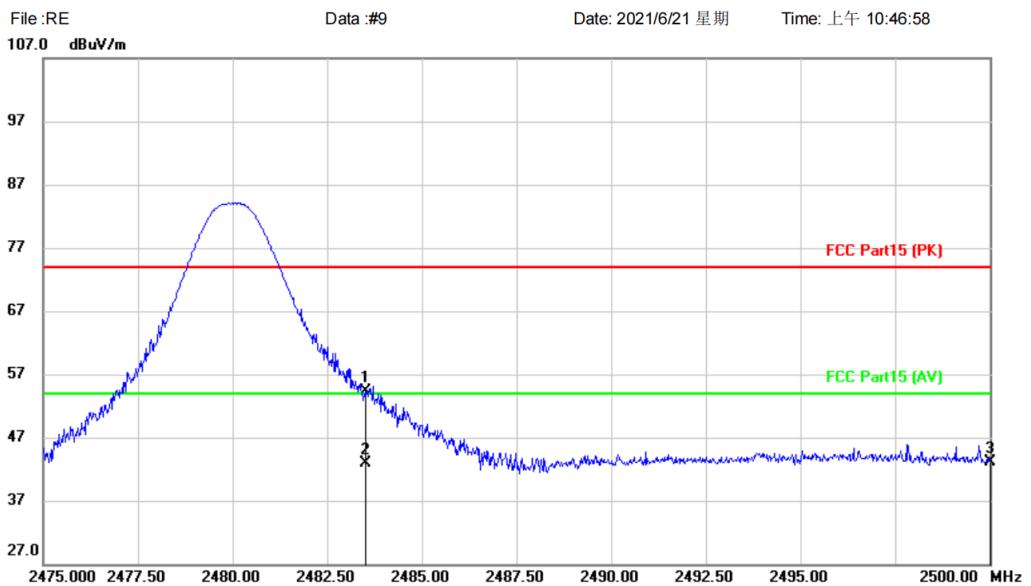[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement


Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-H


Note:

No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.500	58.21	-3.84	54.37	74.00	-19.63	peak		
2	*	2483.500	46.67	-3.84	42.83	54.00	-11.17	AVG	150	360
3		2500.000	46.82	-3.78	43.04	74.00	-30.96	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only>

Test Result: Pass

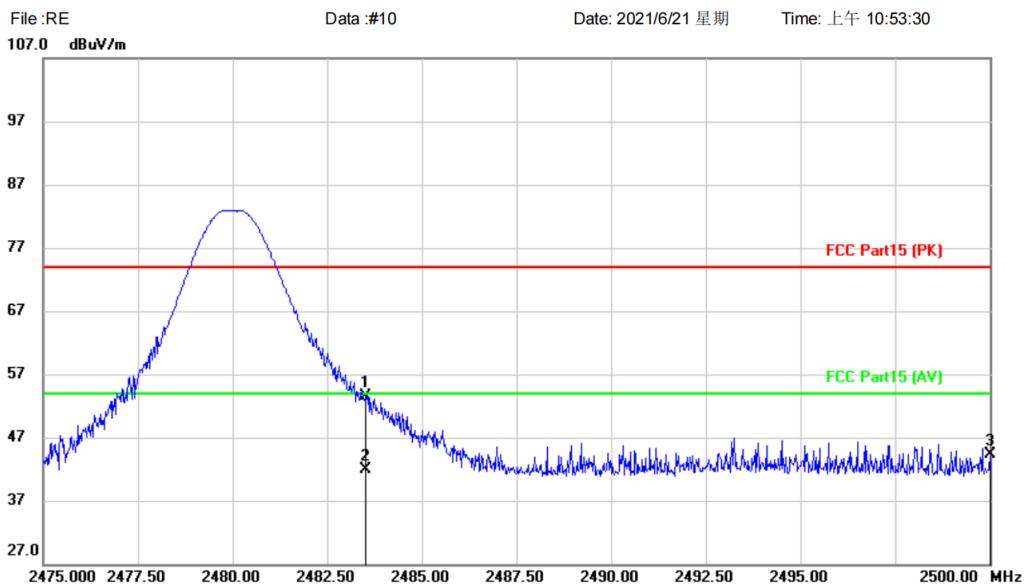[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement


Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth Module

Distance:

M/N: F-6988

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	57.40	-3.84	53.56	74.00	-20.44	peak		
2	*	2483.500	45.73	-3.84	41.89	54.00	-12.11	AVG	150	360
3		2500.000	48.13	-3.78	44.35	74.00	-29.65	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only>


Test Result: Pass

21 APPENDIX 1:


21.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-1.325	21	Pass
NVNT	1-DH1	2441	Ant1	-1.577	21	Pass
NVNT	1-DH1	2480	Ant1	-1.117	21	Pass
NVNT	2-DH1	2402	Ant1	0.896	21	Pass
NVNT	2-DH1	2441	Ant1	0.684	21	Pass
NVNT	2-DH1	2480	Ant1	1.102	21	Pass
NVNT	3-DH1	2402	Ant1	1.337	21	Pass
NVNT	3-DH1	2441	Ant1	1.005	21	Pass
NVNT	3-DH1	2480	Ant1	1.493	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

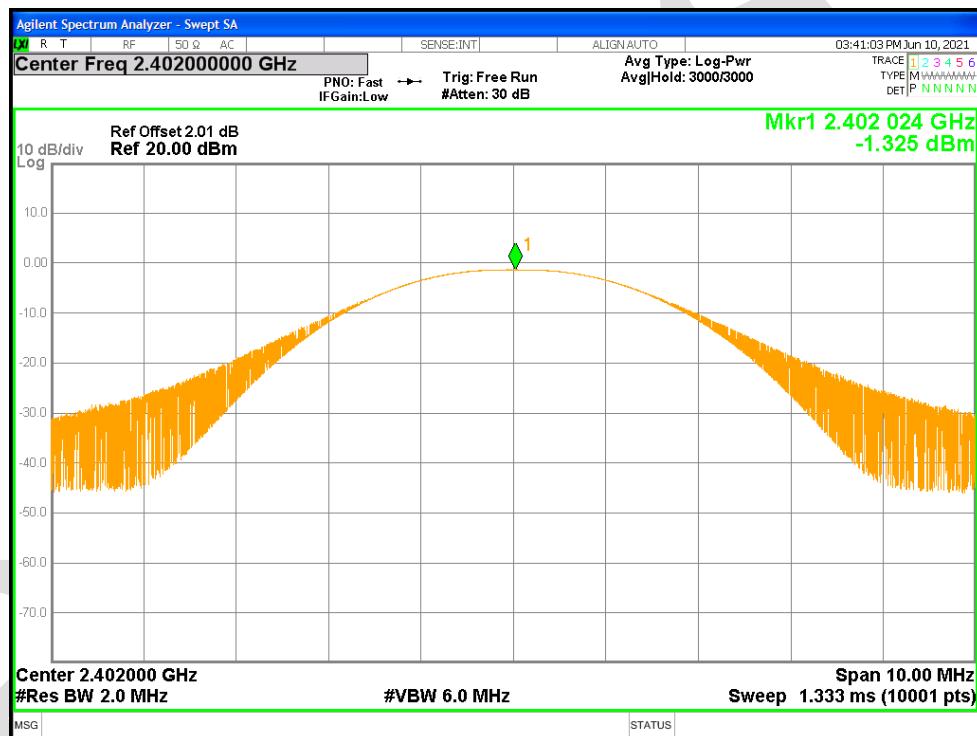


Power NVNT 1-DH1 2441MHz Ant1

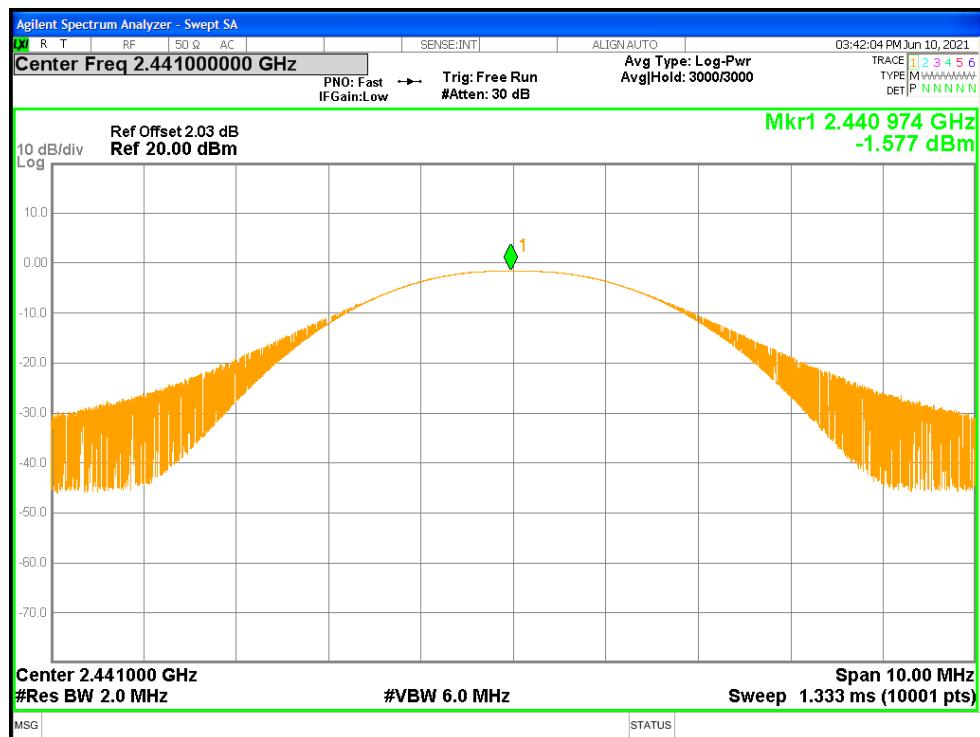


Power NVNT 1-DH1 2480MHz Ant1

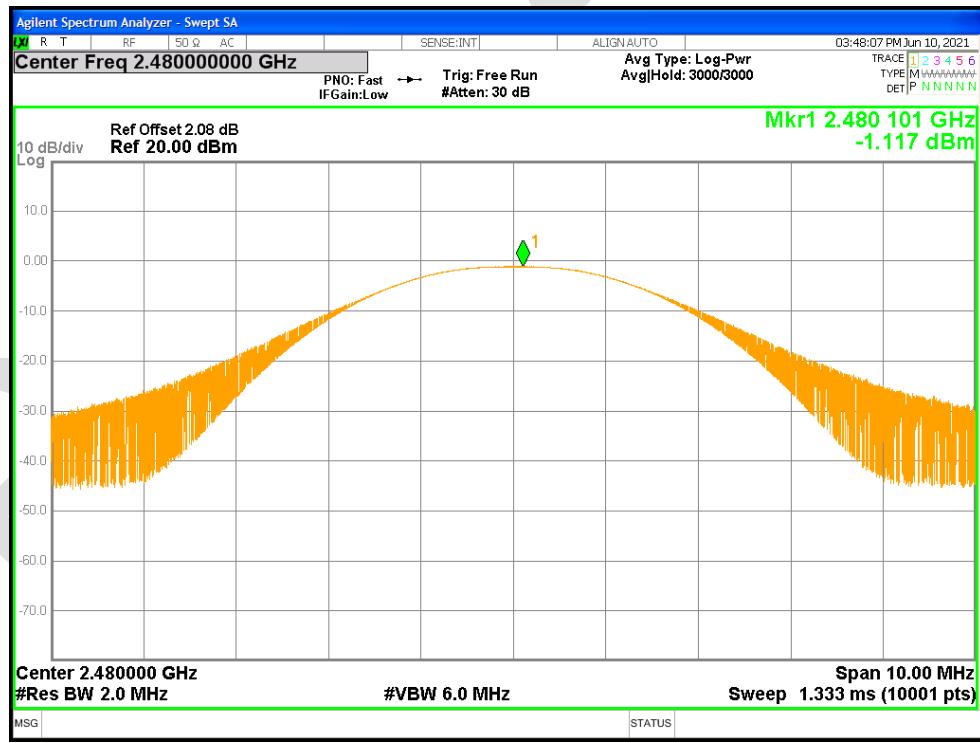


Power NVNT 2-DH1 2402MHz Ant1

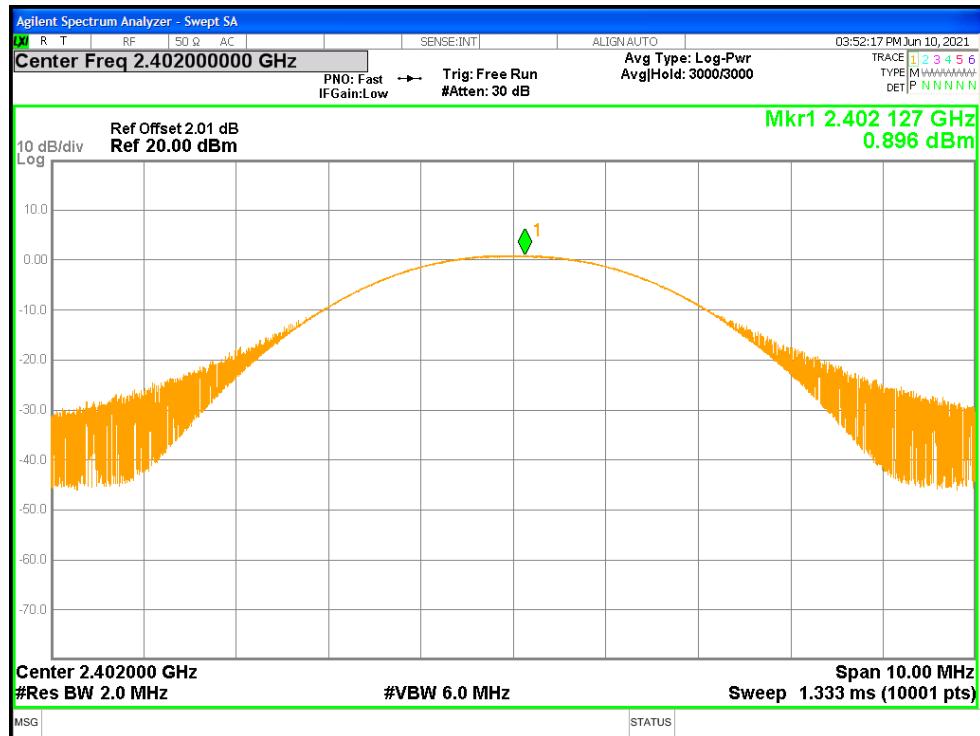


Power NVNT 2-DH1 2441MHz Ant1

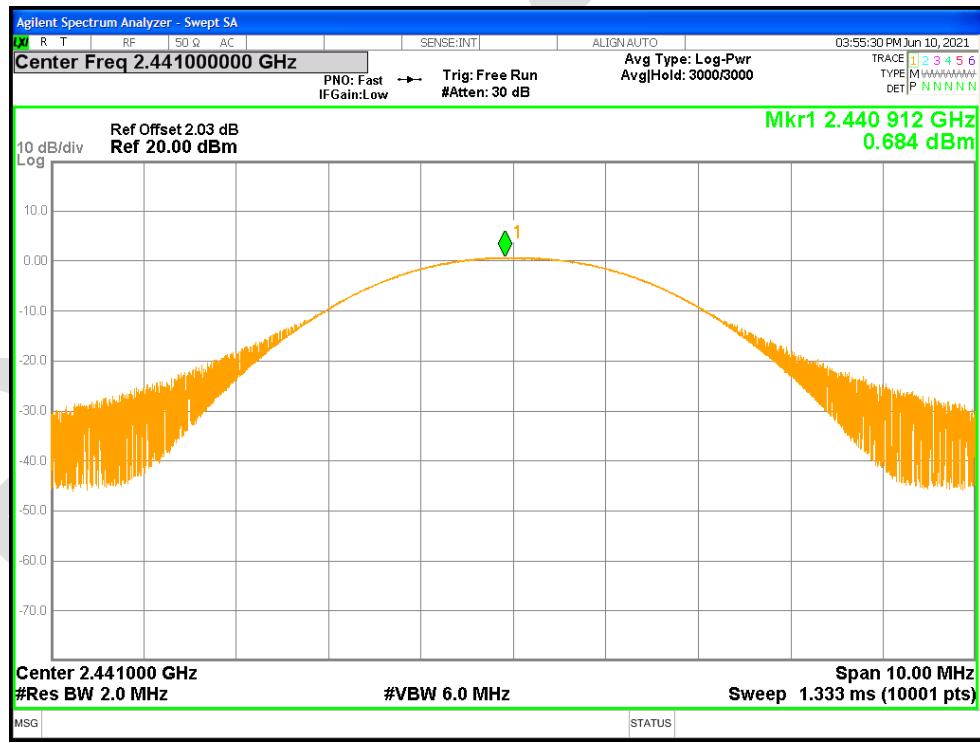


Power NVNT 2-DH1 2480MHz Ant1

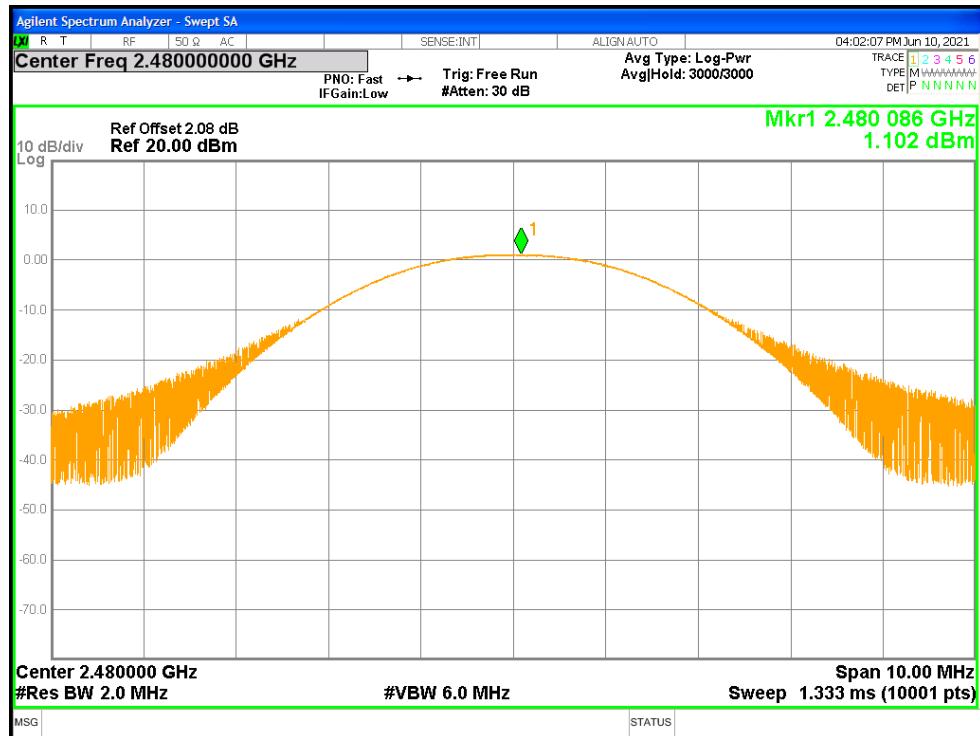


Power NVNT 3-DH1 2402MHz Ant1

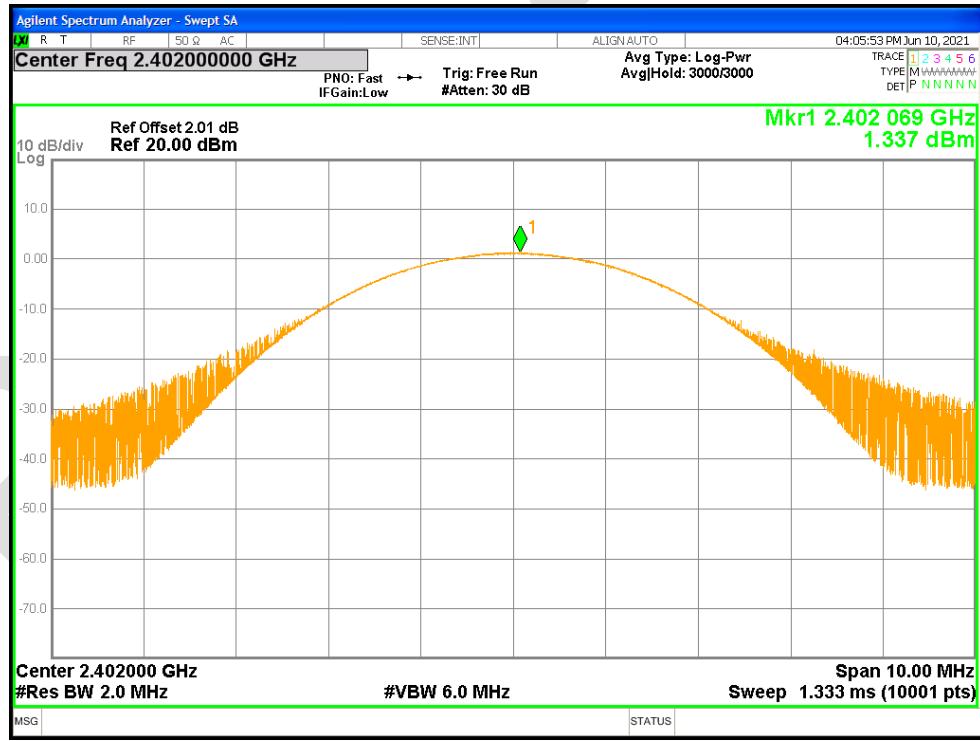

Power NVNT 3-DH1 2441MHz Ant1

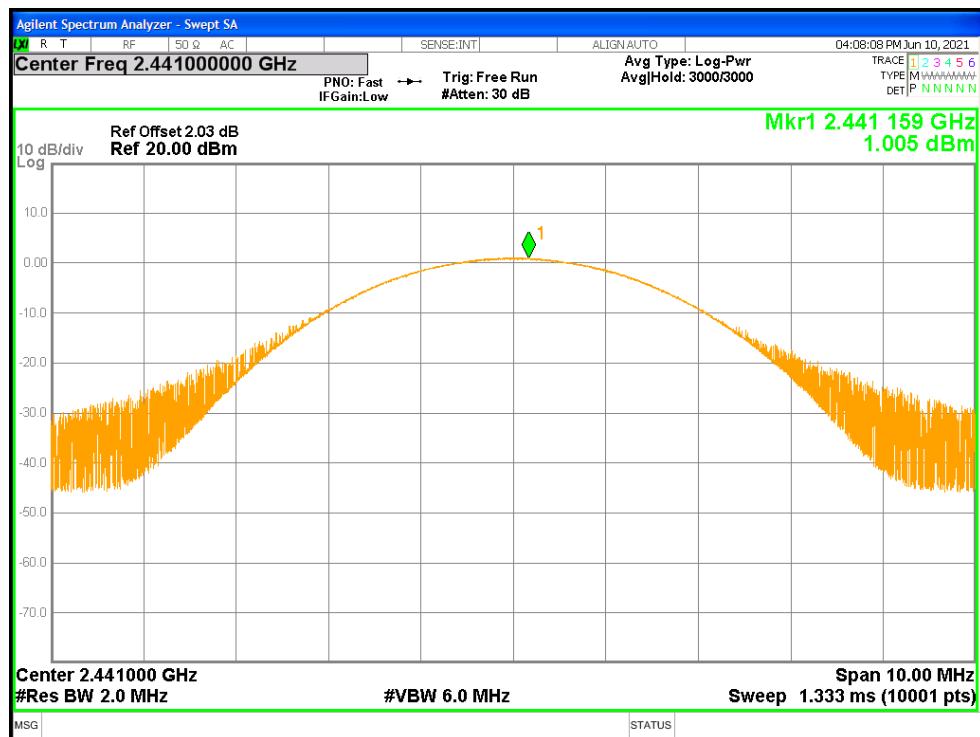


Power NVNT 3-DH1 2480MHz Ant1

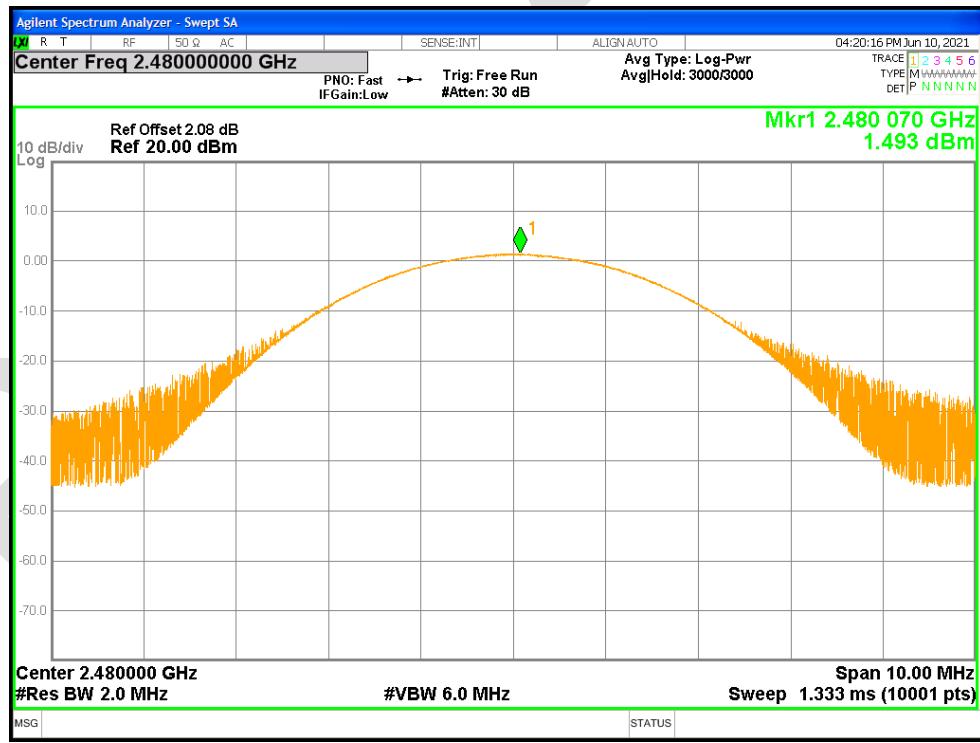

21.2 -20DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.03	0	Pass
NVNT	1-DH1	2441	Ant1	1.029	0	Pass
NVNT	1-DH1	2480	Ant1	1.01	0	Pass
NVNT	2-DH1	2402	Ant1	1.341	0	Pass
NVNT	2-DH1	2441	Ant1	1.352	0	Pass
NVNT	2-DH1	2480	Ant1	1.355	0	Pass
NVNT	3-DH1	2402	Ant1	1.332	0	Pass
NVNT	3-DH1	2441	Ant1	1.319	0	Pass
NVNT	3-DH1	2480	Ant1	1.341	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

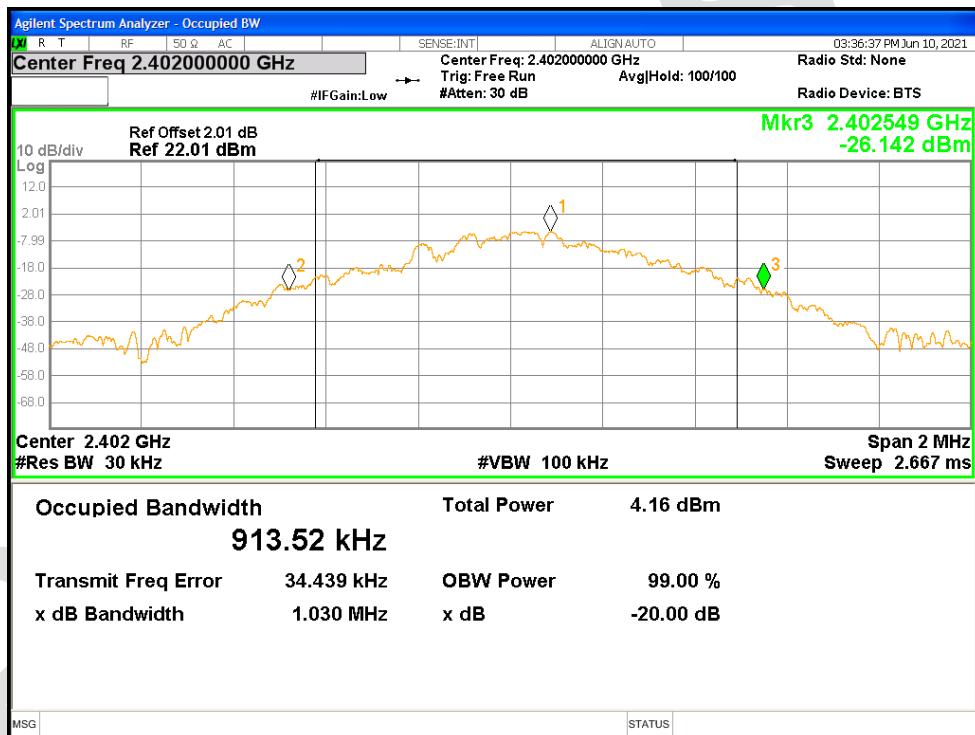


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

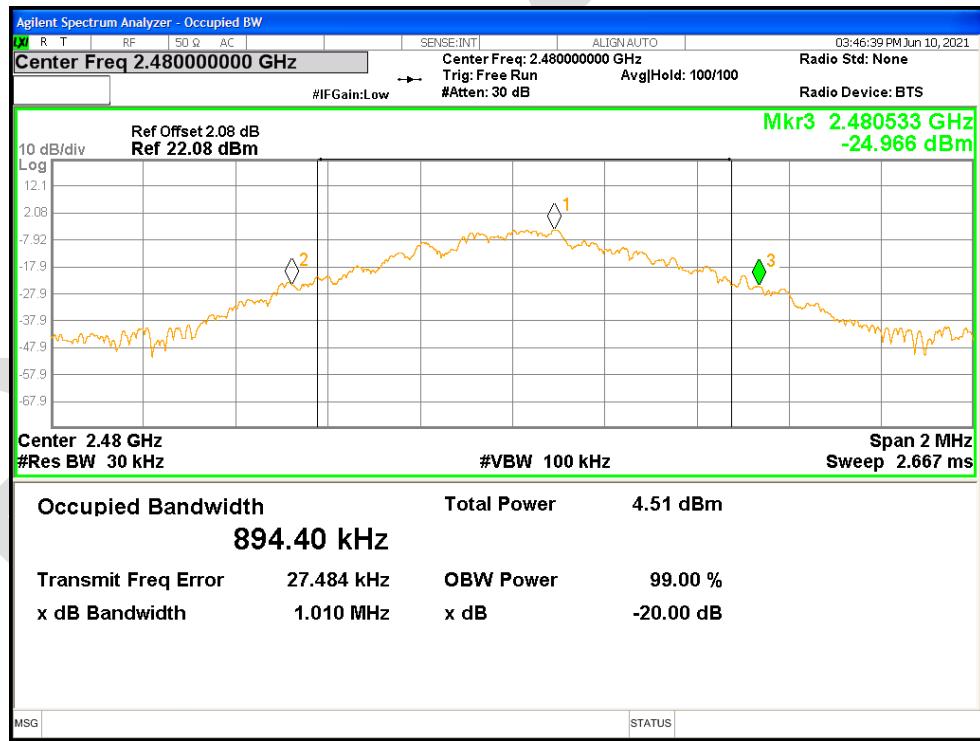


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

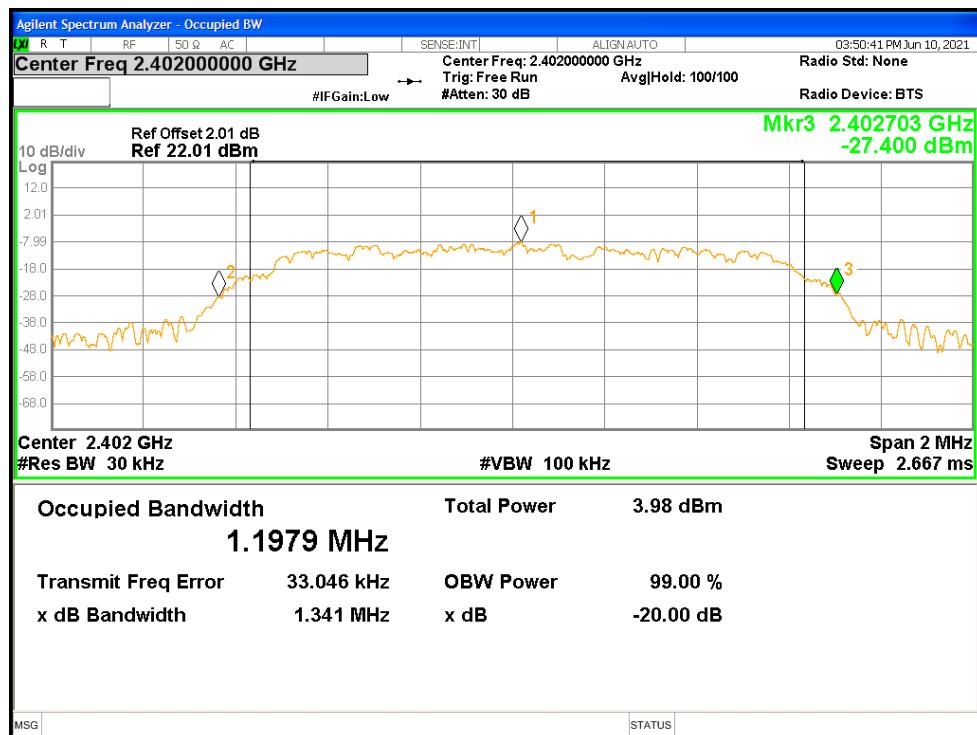


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

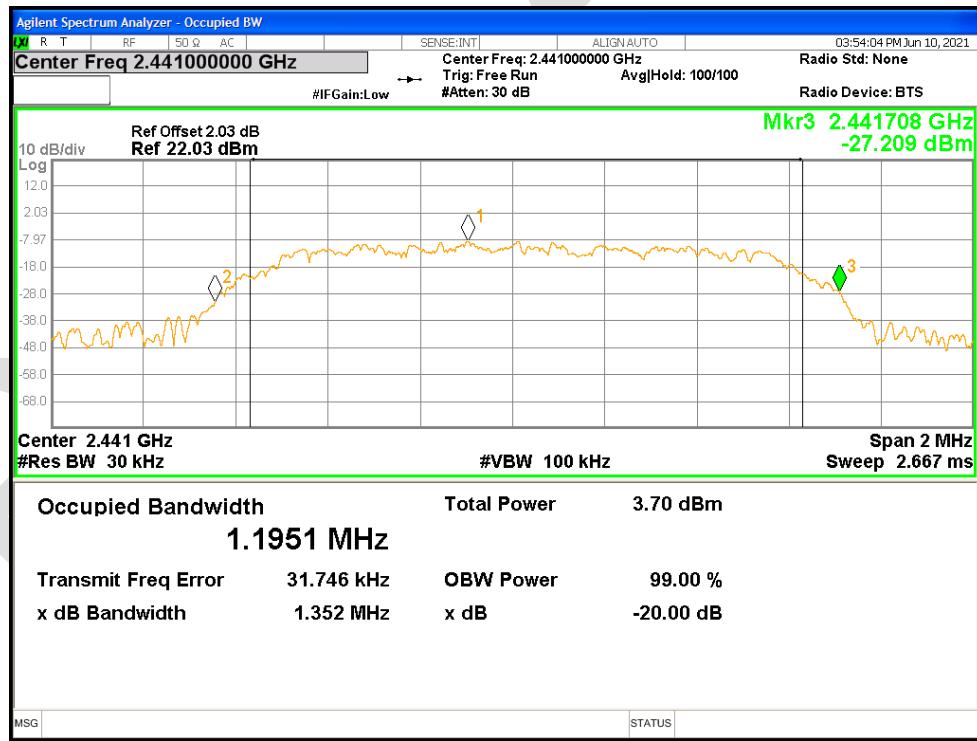

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

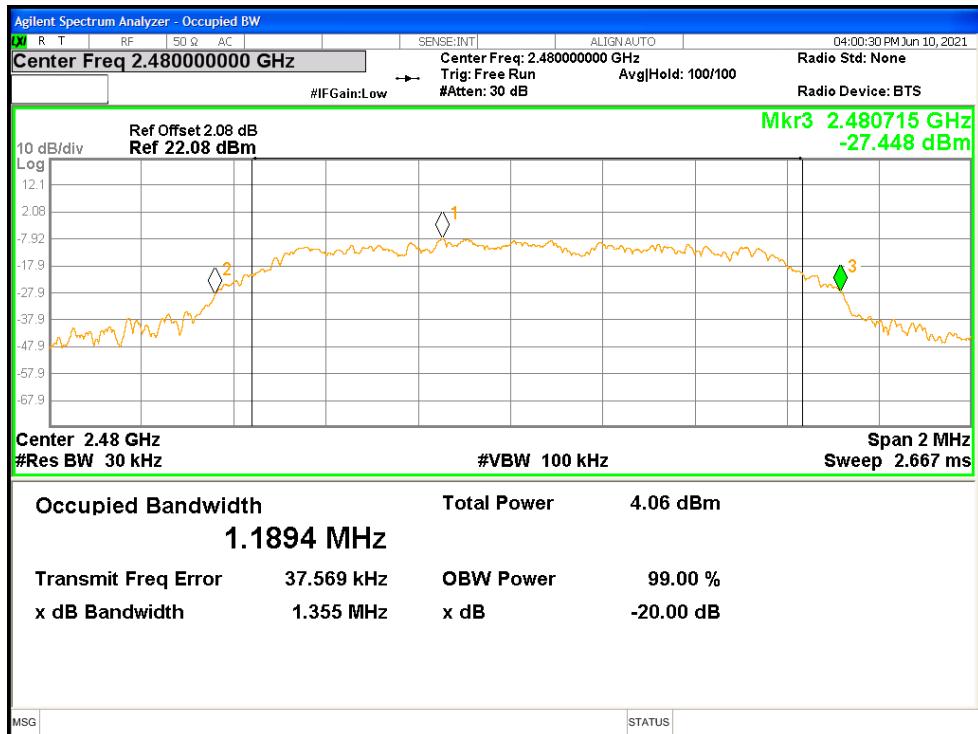

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

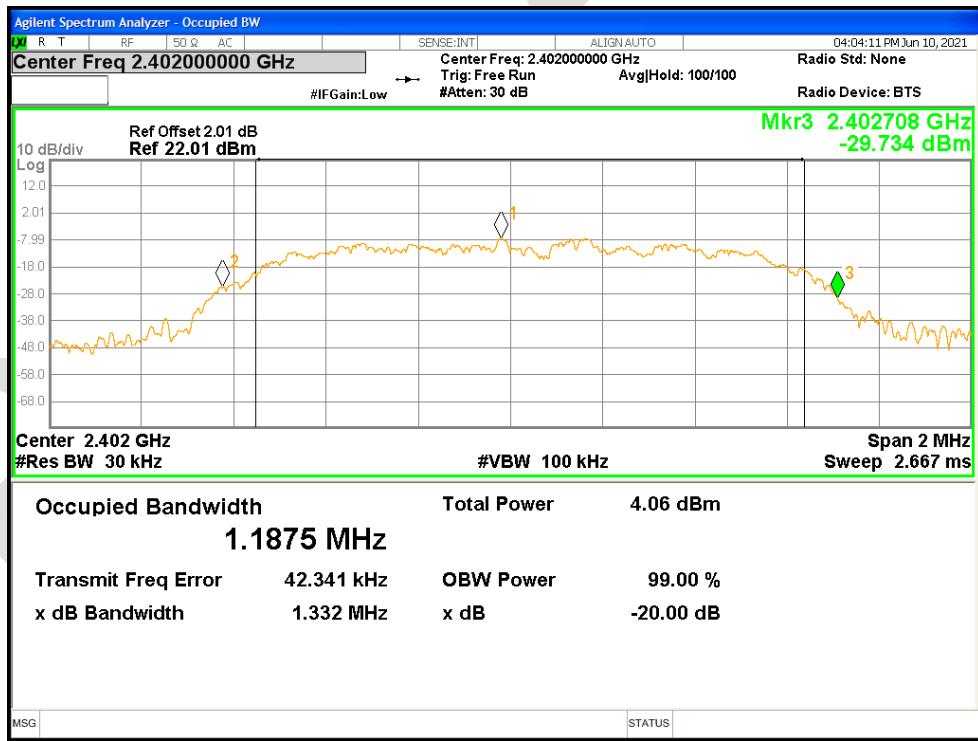

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1