

FCC

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR

SwipeSense Wireless module

ISSUED TO
SwipeSense, Inc

4619 N. Ravenswood Ave Suite 202 Chicago IL 60640



Prepared by: li hongmei
CERTIFICATION CONSULTING
Date Jun. 24, 2015
BALUN
Approved by: Liao Jianming
(Technical Director)
Date Jun. 24, 2015

Report No.: BL-SZ1560088-601
EUT Type: SwipeSense Wireless module
Model Name: 1.1
Brand Name: SwipeSense
Test Standard: 47 CFR Part 15 Subpart C
FCC ID: 2AB5RMOD001
Test conclusion: Pass
Test Date: Jun. 14, 2015 ~Jun. 22, 2015
Date of Issue: Jun. 24, 2015

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

Version	Issue Date	Revisions
Rev. 01	Jun. 24, 2015	Initial Issue

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant	5
2.2	Manufacturer	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	5
2.5	Ancillary Equipment	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Verdict	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Environments	7
4.2	Test Equipment List	7
4.3	Test Configurations	8
4.4	Description of Test Setup	8
4.4.1	For Antenna Port Test	8
4.4.2	For AC Power Supply Port Test	8
4.4.3	For Radiated Test (Below 30 MHz)	9
4.4.4	For Radiated Test (30 MHz-1 GHz)	9
4.4.5	For Radiated Test (Above 1 GHz)	10

4.5	Test Conditions	10
5	TEST ITEMS.....	11
5.1	Antenna Requirements	11
5.1.1	Standard Applicable	11
5.1.2	Antenna Anti-Replacement Construction	11
5.1.3	Antenna Gain	11
5.2	20 dB Bandwidth	12
5.2.1	Limit.....	12
5.2.2	Test Procedure.....	12
5.3	Conducted Emission	13
5.3.1	Limit.....	13
5.3.2	Test Procedure.....	13
5.4	Radiated Spurious Emission	14
5.4.1	Limit.....	14
5.4.2	Test Procedure.....	14
5.5	Band Edge	15
5.5.1	Limit.....	15
5.5.2	Test Procedure.....	15
ANNEX A	TEST RESULT	16
A.1	20dB bandwidth	16
A.2	Radiated Emission	17
A.3	Band Edge	29

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6683 3402
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory has met the requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89), has demonstrated compliance with ISO/IEC Standard 17025:2005. The accreditation certificate number is TL-588.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Announce

- (1) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (2) The test report is invalid if there is any evidence and/or falsification.
- (3) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (4) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	SwipeSense, Inc
Address	4619 N. Ravenswood Ave Suite 202 Chicago IL 60640

2.2 Manufacturer

Manufacturer	Nordic Semiconductor
Address	Nordic Semiconductor ASA P.O. Box 436, Skøyen 0213 Oslo Norway

2.3 General Description for Equipment under Test (EUT)

EUT Type	SwipeSense Wireless module
Model Name	1.1
Hardware Version	nRF24L01+
Software Version	1.1
Network and Wireless connectivity	2.4G ISM Band, GFSK modulation
About the Product	The equipment is a 2.4 GHz ISM band transmitter, operating at 2480 MHz.

2.4 Technical Information

TX/ RX Operating Range	2480 MHz
Modulation Type	GFSK
Antenna Type	PCB Antenna
Antenna Gain	0 dBi

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	Panasonic
	Model No	CR2430
	Serial No	(N/A. marked #1 by test site)
	Capacitance	280 mAh
	Rated Voltage	3.0 V
	Extreme Voltage	Low: 2.6 V / High: 3.5 V
Ancillary Equipment 2	Host 1	
	Model No	2003.0
Ancillary Equipment 3	Host 2	
	Model No	4004.0
Ancillary Equipment 4	Host 3	

	Model No	BAD001
--	----------	--------

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-14 Edition)	Intentional Radiators
3	ANSI C63.4-2009	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note1}
2	20 dB Bandwidth	15.215(c)	ANNEX A.1	Pass
3	Conducted Emission	15.207	ANNEX A.2	N/A ^{Note2}
4	Radiated Spurious Emission	15.249(a)	ANNEX A.3	Pass
5	Band Edge	15.249(a)	ANNEX A.4	Pass

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: The EUT is supported by battery only.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%				
Atmospheric Pressure	100 kPa - 102 kPa				
Temperature	NT (Normal Temperature)				+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)				3. 0 to 6.0 V

4.2 Test Equipment List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2014.07.10	2015.07.09
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	177746	2014.07.09	2015.07.08
Signal Generator	ROHDE&SCHWARZ	SMB100A	260592	2014.07.21	2015.07.20
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2014.07.23	2015.07.22
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2014.10.18	2015.10.17
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2014.07.07	2015.07.06
LISN	SCHWARZBECK	NSLK 8127	8127-687	2014.07.07	2015.07.06
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2014.07.07	2015.07.06
Power Splitter	KMW	DCPD-LDC	1305003215	2014.07.07	2015.07.06
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2014.07.07	2015.07.06
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2014.07.09	2015.07.08
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2014.07.07	2015.07.06
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2013.07.02	2015.07.01
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2013.07.03	2015.07.02
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2013.07.02	2015.07.01
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2013.07.02	2015.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2015.02.28	2016.02.27
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Configurations

Test Configurations (TC) NO.	Description	
	Signal Description	Operating Frequency
Transmitter		
TC01	GFSK modulation	2462 MHz


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

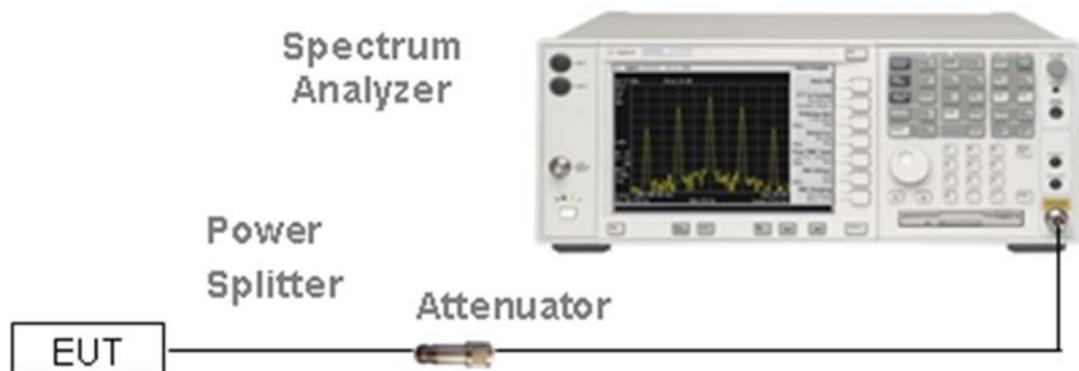


(Diagram 1)

4.4.2 For AC Power Supply Port Test

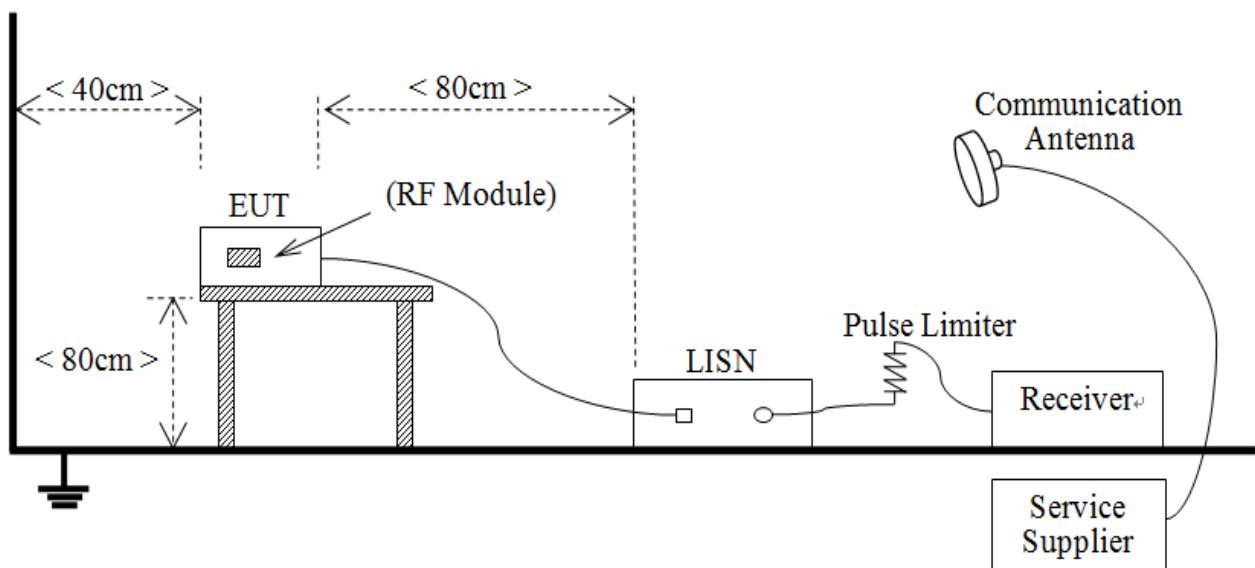


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

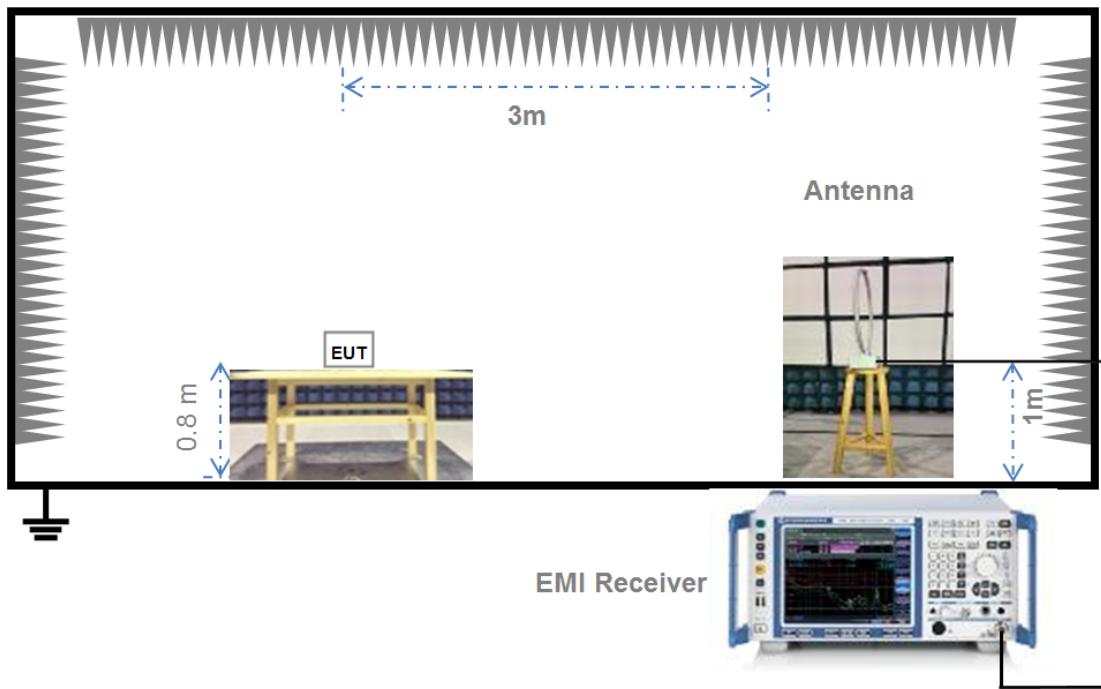


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

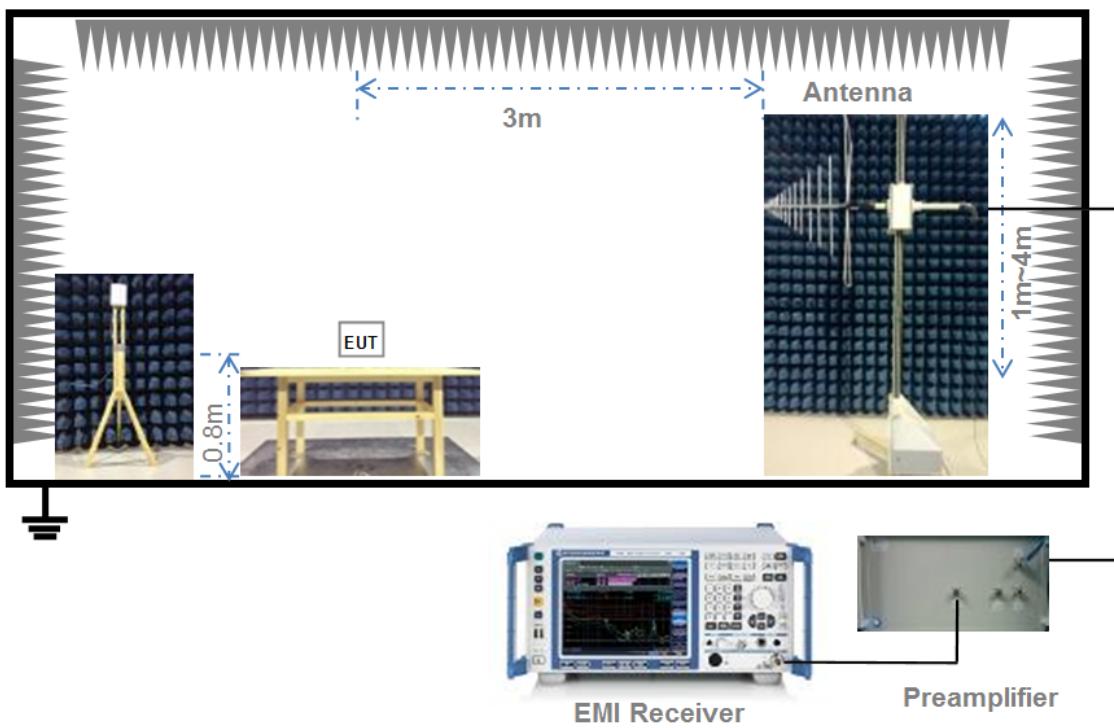

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

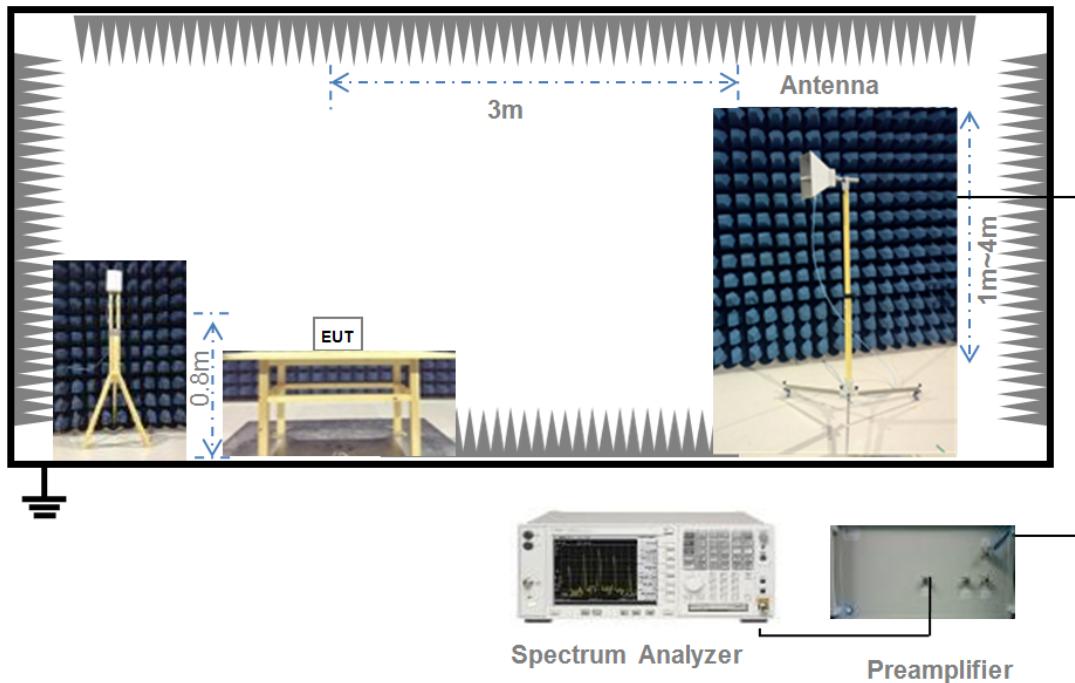

(Diagram 5)

4.5 Test Conditions

Test Case	Test Conditions		
	Test Env.	Test Setup ^{Note 1}	Test Configuration ^{Note 2}
20dB Bandwidth	NTNV	Test Setup 1	TC01
Radiated Emission	NTNV	Test Setup 3 Test Setup 4 Test Setup 5	TC01
Band Edge	NTNV	Test Setup 5	TC01

Note:

1. Please refer to section 4.4 for test setup details.
2. Please refer to section 4.3 for test configuration details.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Standard Applicable

FCC §15.203 & 15.247(b)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	An embedded-in antenna design is used.

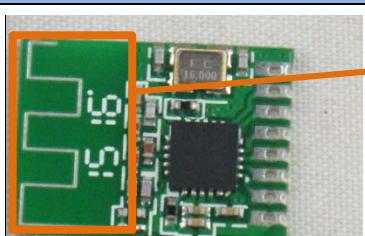Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 20 dB Bandwidth

5.2.1 Limit

FCC §15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.2.2 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.3 Conducted Emission

5.3.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.3.2 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Note: this device powered by battery, conducted emission at main port is not request.

5.4 Radiated Spurious Emission

5.4.1 Limit

FCC §15.249(a)

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (μV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dB_{AV}/m@3m (AV) and 74dB_{PK}/m@3m (PK).

5.4.2 Test Procedure

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5 Band Edge

5.5.1 Limit

FCC §15.249(a)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak /AV

Trace = max hold

Allow the trace to stabilize.

$E [dB\mu V/m] = UR + AT + AFactor [dB]; AT = LCable loss [dB] - Gpreamp [dB]$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

ANNEX A TEST RESULT

A.1 20dB bandwidth

Test Data

Frequency (MHz)	20 dB Bandwidth (MHz)
2480	1.454

Test plots



A.2 Radiated Emission

Note 1: The symbol of “--” in the table which means not application.


Note 2: For the test data above 1 GHz, According the ANSI C63.4-2009, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data and Plots

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Host 1-BAD001

30 MHz to 1 GHz, ANT V

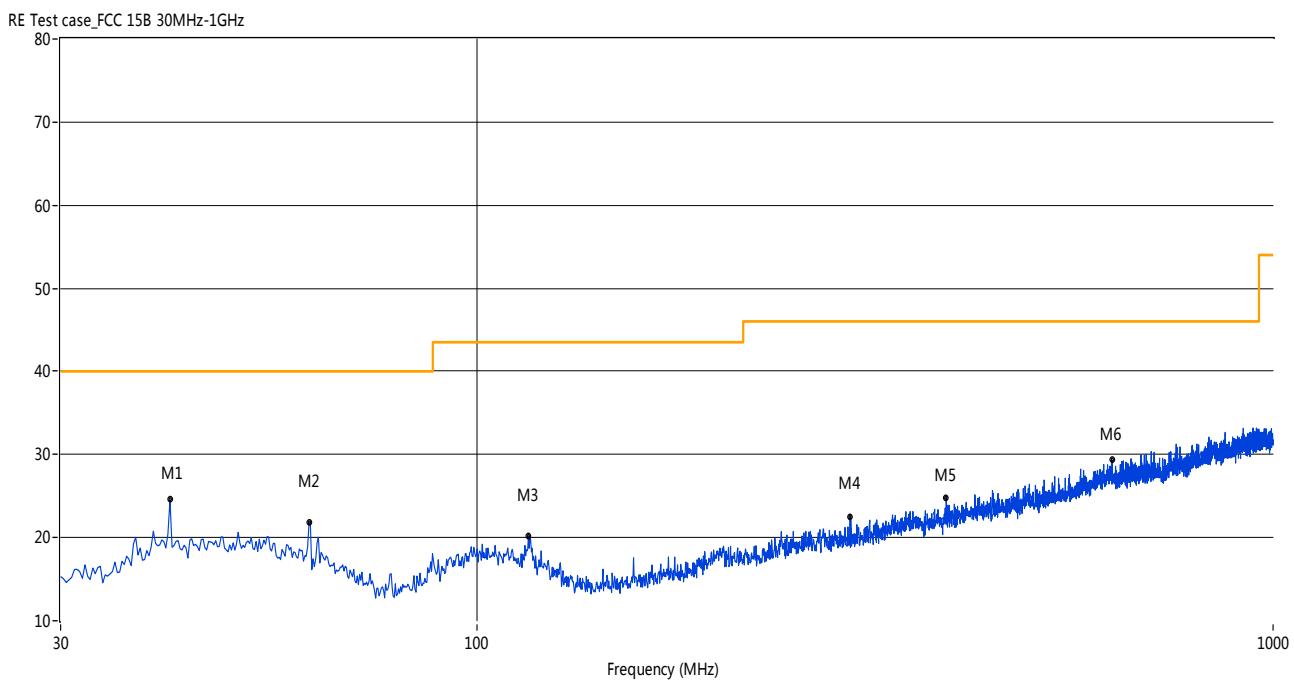

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	41.15	24.56	-19.34	40.0	15.44	Peak	275.50	100	Vertical	Pass
2	61.52	21.84	-20.23	40.0	18.16	Peak	242.30	100	Vertical	Pass
3	116.07	20.15	-21.12	43.5	23.35	Peak	49.90	100	Vertical	Pass
4	294.26	22.51	-17.81	46.0	23.49	Peak	208.90	100	Vertical	Pass
5	388.57	24.86	-15.49	46.0	21.14	Peak	61.30	100	Vertical	Pass
6	627.61	29.35	-10.23	46.0	16.65	Peak	334.50	100	Vertical	Pass


30 MHz to 1 GHz, ANT H

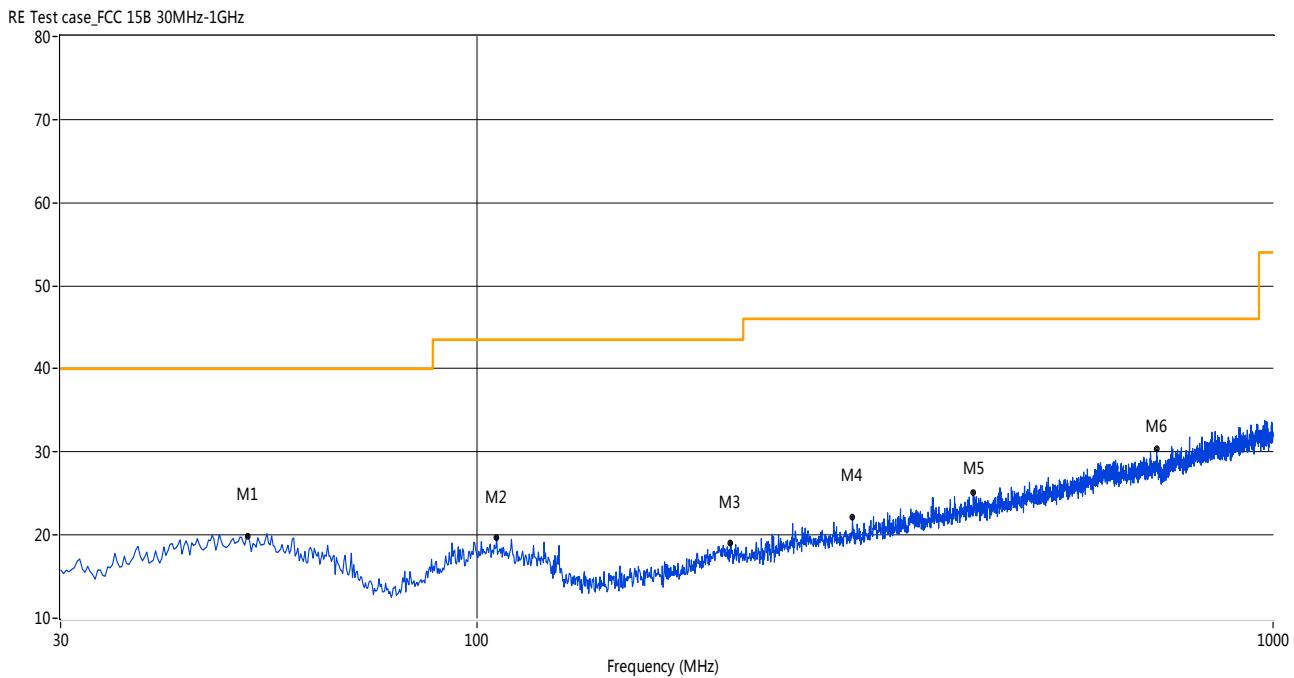

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	51.58	19.93	-18.74	40.0	20.07	Peak	81.30	100	Horizontal	Pass
2	105.88	19.69	-20.22	43.5	23.81	Peak	173.00	100	Horizontal	Pass
3	208.19	19.02	-20.10	43.5	24.48	Peak	125.20	100	Horizontal	Pass
4	296.20	22.21	-17.74	46.0	23.79	Peak	356.90	100	Horizontal	Pass
5	420.08	25.14	-14.64	46.0	20.86	Peak	154.80	100	Horizontal	Pass
6	714.16	30.31	-8.89	46.0	15.69	Peak	11.30	100	Horizontal	Pass


Host 2-4004.0

30 MHz to 1 GHz, ANT V

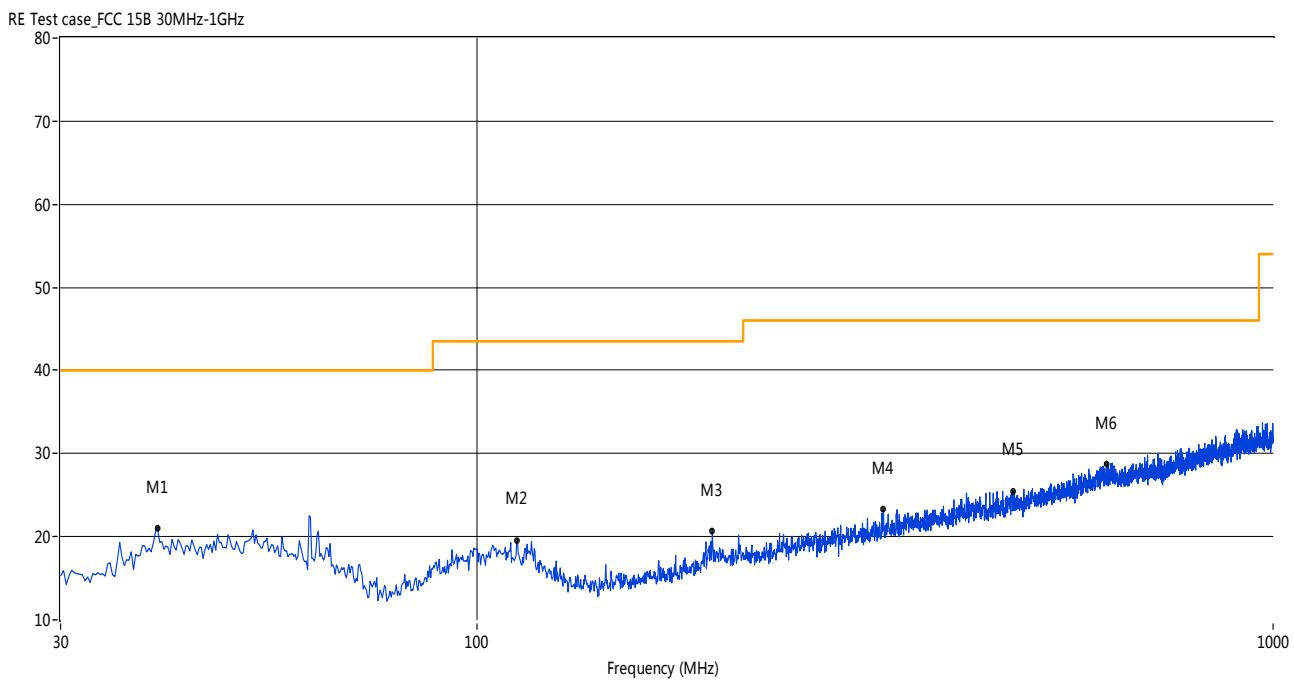

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	39.70	21.02	-19.83	40.0	18.98	Peak	248.50	100	Vertical	Pass
2	112.43	19.58	-20.54	43.5	23.92	Peak	166.50	100	Vertical	Pass
3	197.53	20.60	-20.45	43.5	22.90	Peak	251.90	100	Vertical	Pass
4	324.08	23.23	-16.92	46.0	22.77	Peak	251.90	100	Vertical	Pass
5	471.24	25.46	-13.97	46.0	20.54	Peak	270.60	100	Vertical	Pass
6	618.64	28.76	-10.22	46.0	17.24	Peak	89.20	100	Vertical	Pass


30 MHz to 1 GHz, ANT H

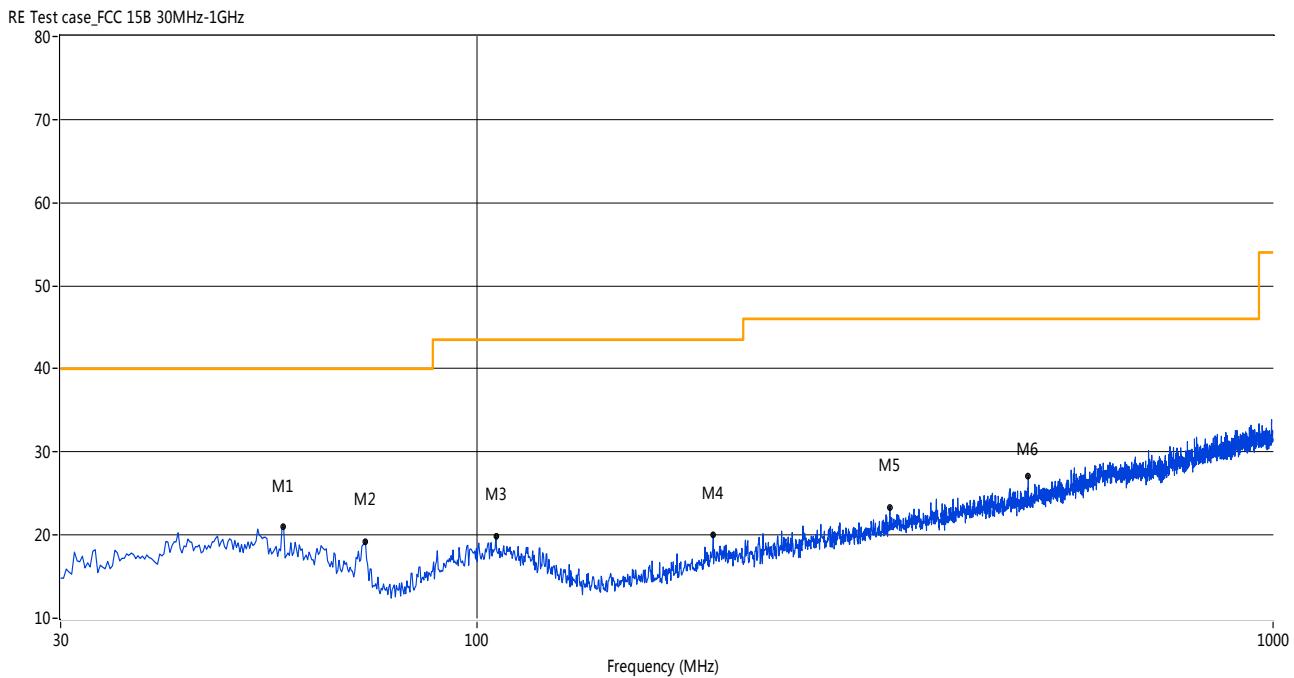

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	57.15	21.02	-19.54	40.0	18.98	Peak	131.40	100	Horizontal	Pass
2	72.43	19.23	-23.63	40.0	20.77	Peak	164.70	100	Horizontal	Pass
3	105.64	19.87	-20.24	43.5	23.63	Peak	142.50	100	Horizontal	Pass
4	198.01	20.04	-20.38	43.5	23.46	Peak	205.00	100	Horizontal	Pass
5	330.14	23.36	-16.59	46.0	22.64	Peak	260.60	100	Horizontal	Pass
6	492.57	27.14	-13.39	46.0	18.86	Peak	90.60	100	Horizontal	Pass


Host 3-2003.0

30 MHz to 1 GHz, ANT V

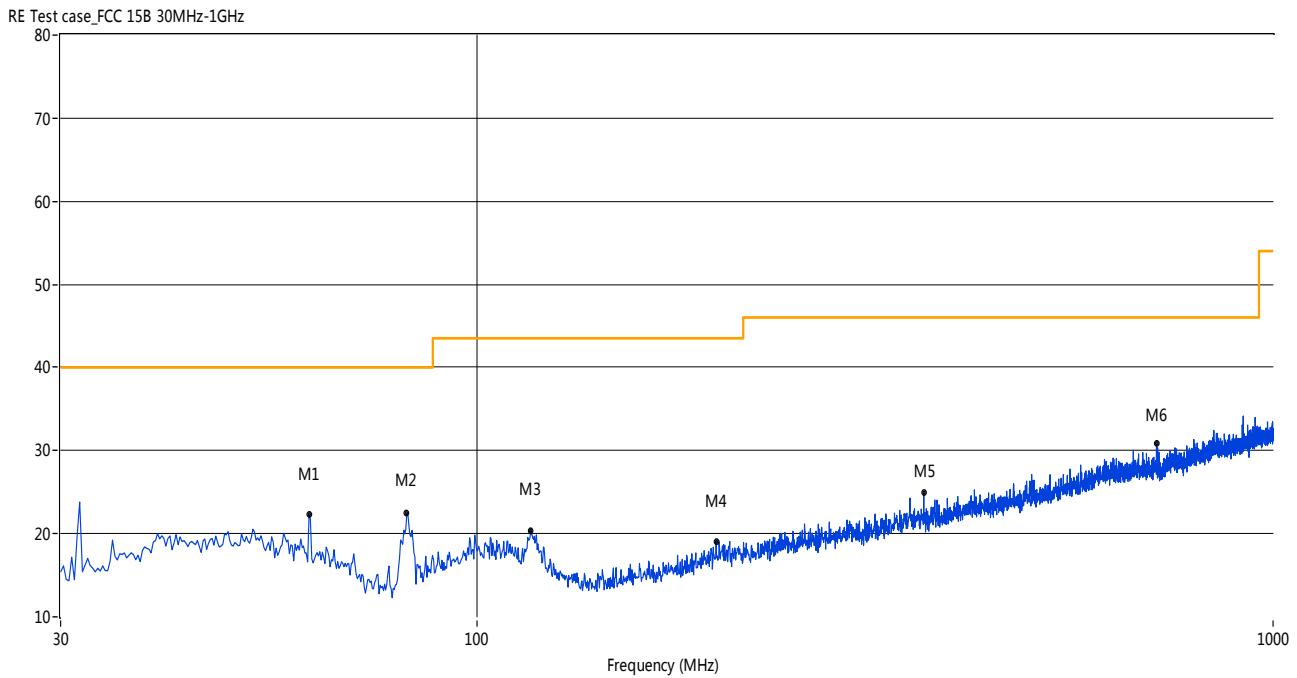

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	61.52	22.29	-20.23	40.0	17.71	Peak	4.00	100	Vertical	Pass
2	81.64	22.48	-24.19	40.0	17.52	Peak	217.30	100	Vertical	Pass
3	116.79	20.37	-21.18	43.5	23.13	Peak	235.80	100	Vertical	Pass
4	199.71	19.04	-20.23	43.5	24.46	Peak	161.70	100	Vertical	Pass
5	364.08	25.03	-16.17	46.0	20.97	Peak	146.90	100	Vertical	Pass
6	713.92	30.90	-8.88	46.0	15.10	Peak	135.90	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

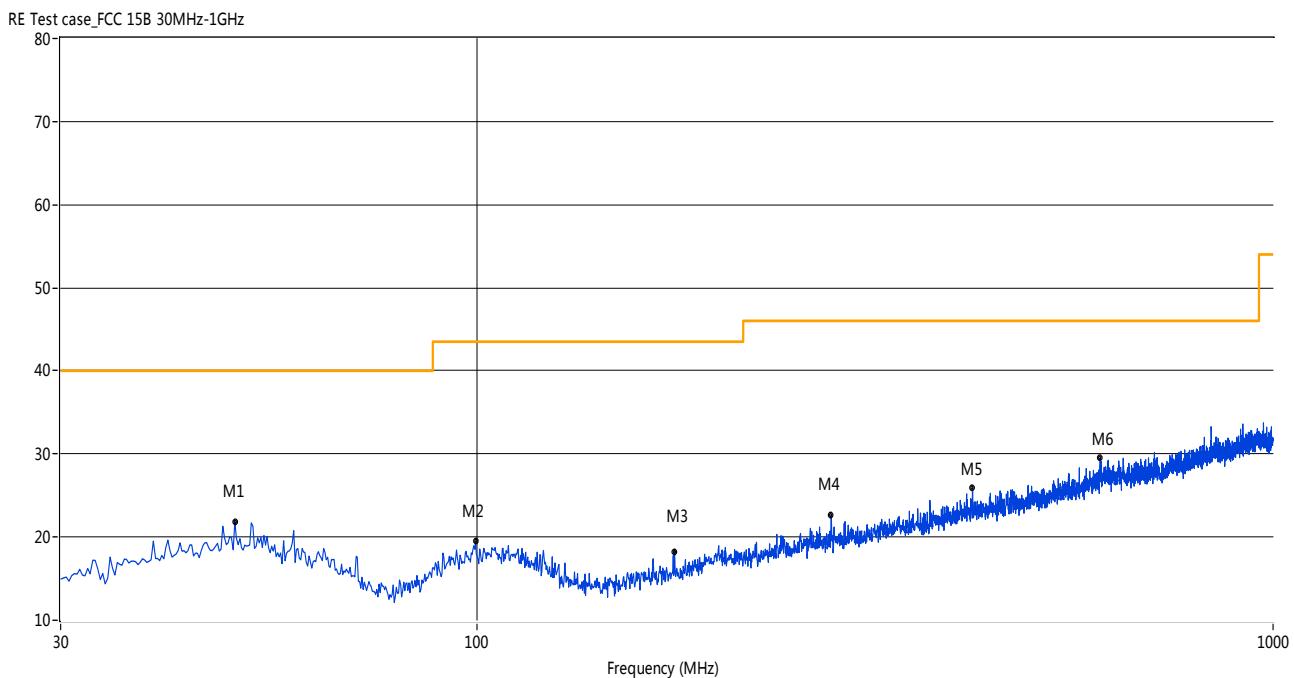


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	49.64	21.85	-18.67	40.0	18.15	Peak	152.40	100	Horizontal	Pass
2	99.58	19.47	-20.22	43.5	24.03	Peak	230.30	100	Horizontal	Pass
3	176.92	18.25	-22.30	43.5	25.25	Peak	22.80	100	Horizontal	Pass
4	278.50	22.59	-18.43	46.0	23.41	Peak	234.20	100	Horizontal	Pass
5	419.12	25.94	-14.69	46.0	20.06	Peak	19.10	100	Horizontal	Pass
6	606.52	29.47	-10.62	46.0	16.53	Peak	249.00	100	Horizontal	Pass

Note: The marked spikes near 2480 MHz with circle should be ignored because they are Fundamental signal.

Test Data and Plots (1 GHz ~ 10th Harmonic)

Host 1- BAD001


1 GHz to 25 GHz, ANT V

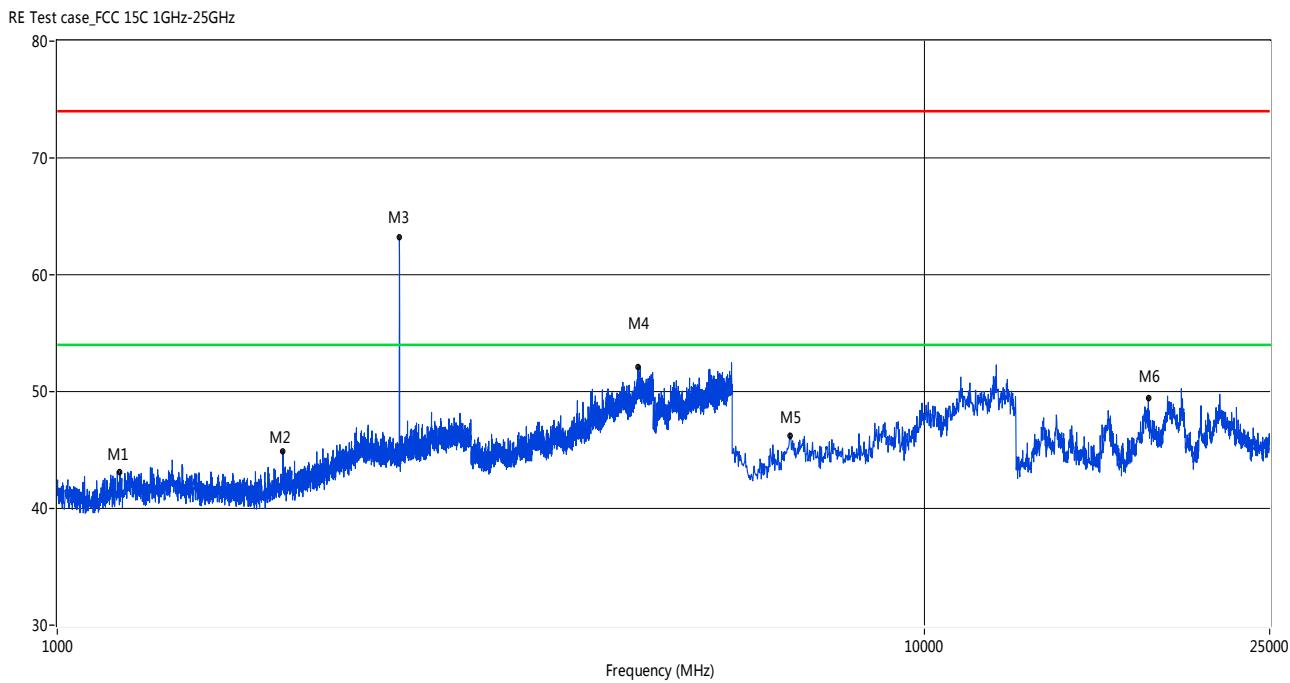

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1180.95	43.06	-5.50	74.0	30.94	Peak	93.00	100	Vertical	Pass
2	1820.80	44.90	-3.54	74.0	29.10	Peak	13.40	100	Vertical	Pass
3	2480.13	63.17	-0.60	74.0	10.83	Peak	353.80	100	Vertical	N/A
4	4672.83	52.07	13.16	74.0	21.93	Peak	91.60	100	Vertical	Pass
5	6988.35	46.23	14.42	74.0	27.77	Peak	207.90	100	Vertical	Pass
6	18116.06	49.45	12.97	74.0	24.55	Peak	359.30	100	Vertical	Pass

1 GHz to 25 GHz, ANT H

RE Test case_FCC 15C 1GHz-25GHz

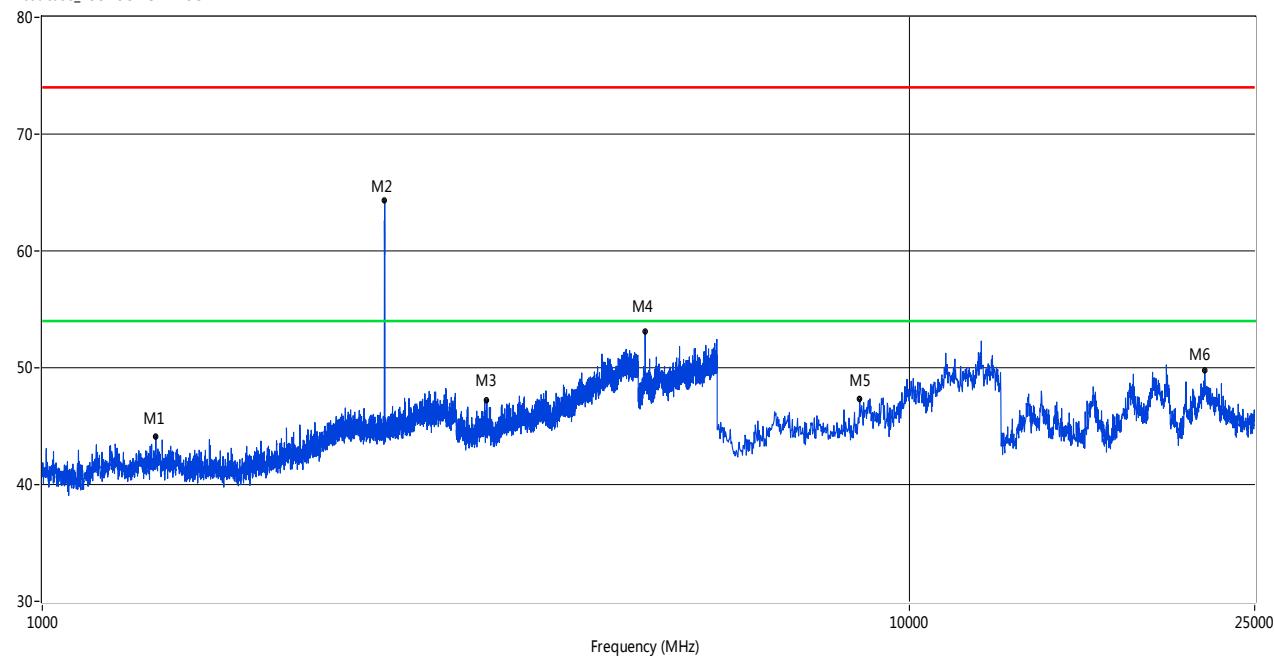


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)		Table (o)	Height (cm)	ANT	Verdict
1	1351.41	44.16	-4.58	74.0	29.84	Peak	61.20	100	Horizontal	Pass
2	2482.13	64.31	-0.59	74.0	9.69	Peak	108.90	100	Horizontal	N/A
3	3254.94	47.20	9.05	74.0	26.80	Peak	305.30	100	Horizontal	Pass
4	4956.26	53.13	14.11	74.0	20.87	Peak	163.70	100	Horizontal	Pass
5	8762.90	47.28	16.24	74.0	26.72	Peak	95.30	100	Horizontal	Pass
6	21895.17	49.78	12.59	74.0	24.22	Peak	-0.20	100	Horizontal	Pass

Host 2-4004.0

1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

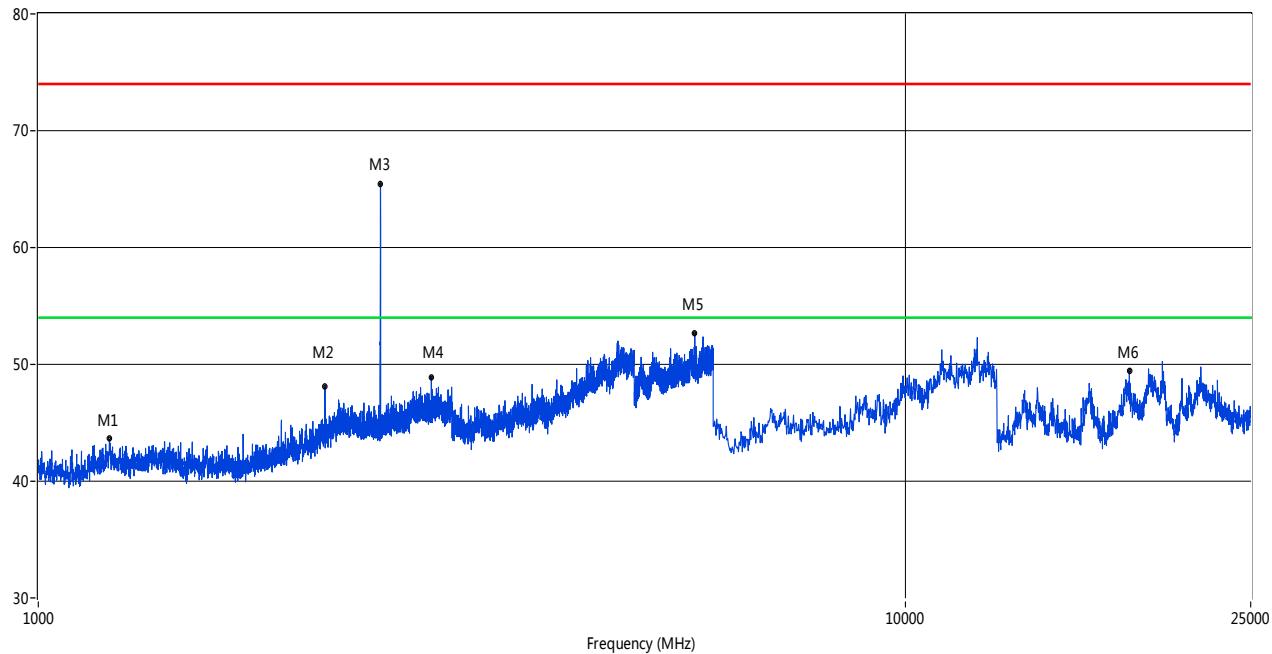

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1207.95	43.61	-5.17	74.0	30.39	Peak	341.00	100	Vertical	Pass
2	2140.22	48.11	-1.16	74.0	25.89	Peak	331.90	100	Vertical	Pass
3	2479.63	65.42	-0.63	74.0	8.58	Peak	76.70	100	Vertical	N/A
4	2838.54	48.89	1.89	74.0	25.11	Peak	244.50	100	Vertical	Pass
5	5714.32	52.66	15.42	74.0	21.34	Peak	340.00	100	Vertical	Pass
6	18116.06	49.45	12.97	74.0	24.55	Peak	169.00	100	Vertical	Pass

1 GHz to 25 GHz, ANT H

RE Test case_FCC 15C 1GHz-25GHz

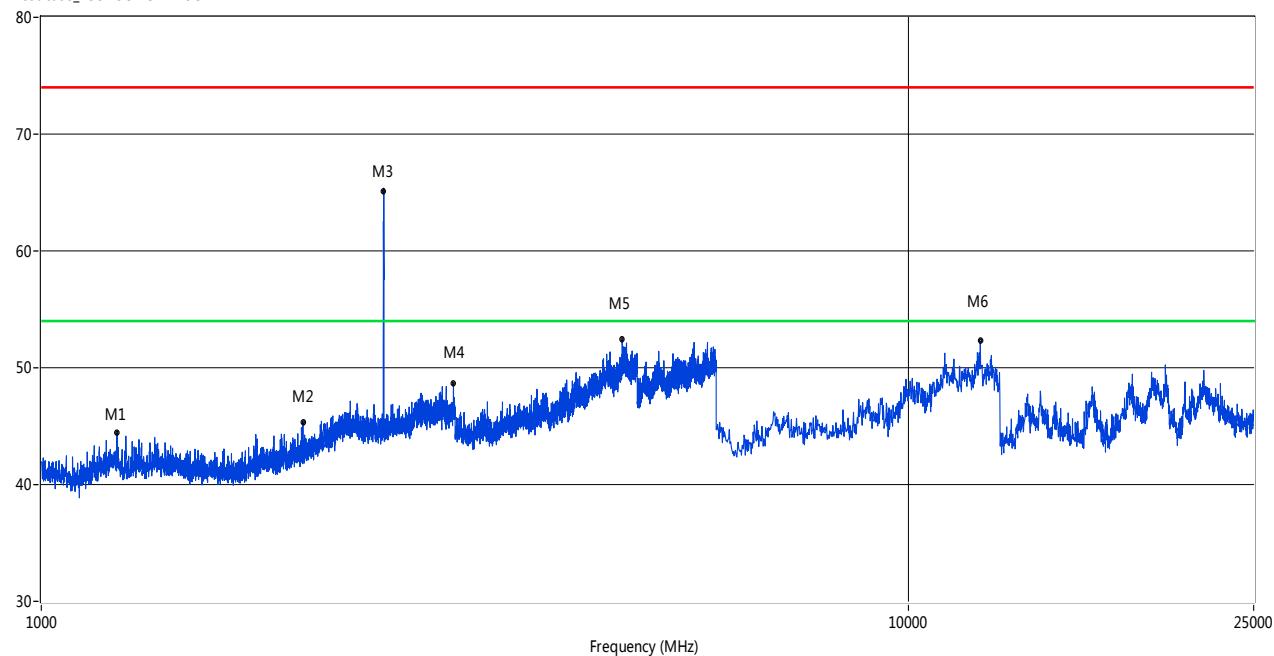


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1222.44	44.46	-5.22	74.0	29.54	Peak	307.50	100	Horizontal	Pass
2	2002.75	45.38	-2.35	74.0	28.62	Peak	331.10	100	Horizontal	Pass
3	2481.63	65.12	-0.56	74.0	8.88	Peak	108.60	100	Horizontal	N/A
4	2986.50	48.65	2.41	74.0	25.35	Peak	100.80	100	Horizontal	Pass
5	4675.08	52.41	13.13	74.0	21.59	Peak	347.60	100	Horizontal	Pass
6	12098.59	52.28	20.77	74.0	21.72	Peak	355.00	100	Horizontal	Pass

Host 3-2003.0

1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

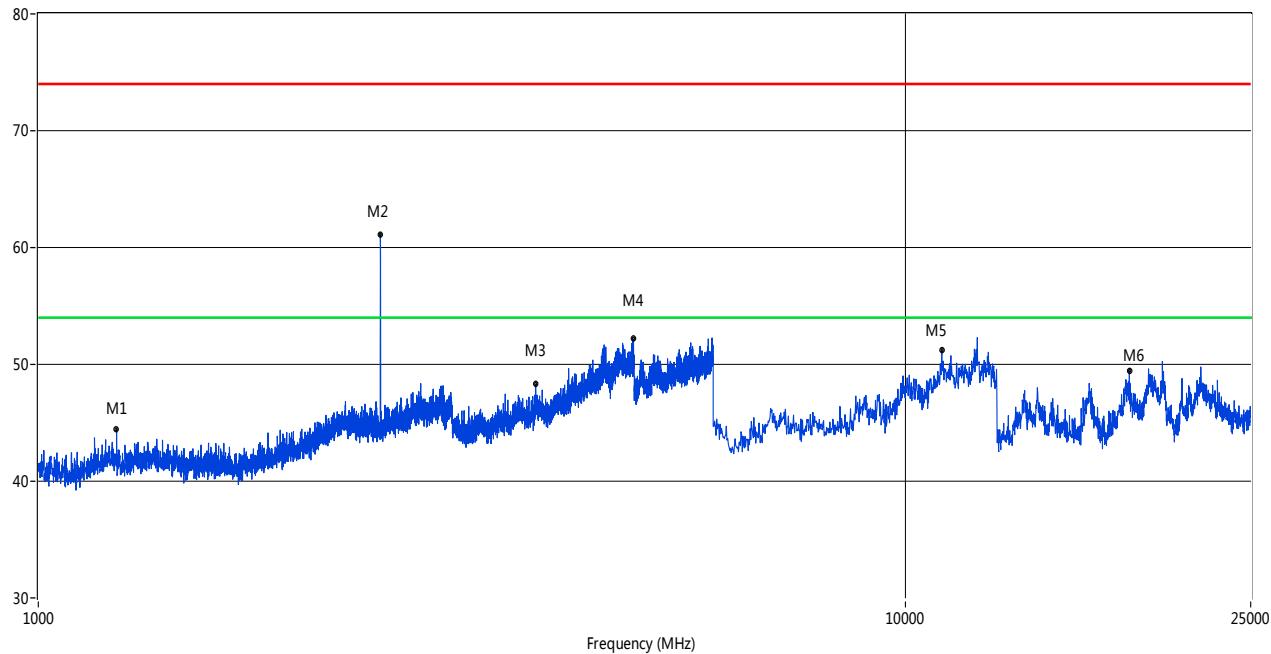

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1230.94	44.48	-5.22	74.0	29.52	Peak	122.10	100	Vertical	Pass
2	2479.63	61.13	-0.63	74.0	12.87	Peak	0.00	100	Vertical	N/A
3	3745.31	48.29	10.69	74.0	25.71	Peak	240.50	100	Vertical	Pass
4	4856.54	52.18	13.56	74.0	21.82	Peak	354.60	100	Vertical	Pass
5	11009.15	51.24	20.13	74.0	22.76	Peak	63.20	100	Vertical	Pass
6	18116.06	49.45	12.97	74.0	24.55	Peak	359.30	100	Vertical	Pass

1 GHz to 25 GHz, ANT H

RE Test case_FCC 15C 1GHz-25GHz

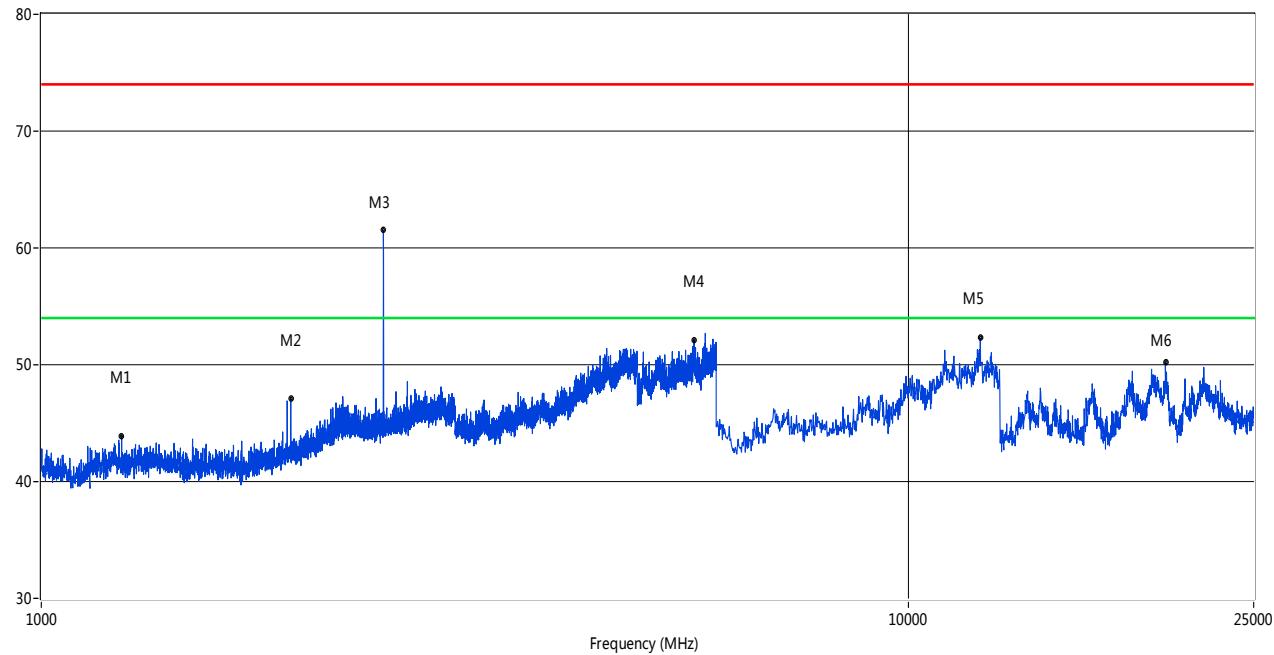

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1237.44	43.91	-5.22	74.0	30.09	Peak	100.90	100	Horizontal	Pass
2	1938.77	47.16	-2.38	74.0	26.84	Peak	1.30	100	Horizontal	Pass
3	2480.13	61.50	-0.60	74.0	12.50	Peak	132.70	100	Horizontal	N/A
4	5658.09	52.11	15.58	74.0	21.89	Peak	220.90	100	Horizontal	Pass
5	12098.59	52.28	20.77	74.0	21.72	Peak	355.00	100	Horizontal	Pass
6	19778.70	50.24	13.29	74.0	23.76	Peak	24.50	100	Horizontal	Pass


A.3 Band Edge

Test Data

The channel is tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Plots

ANT, PEAK

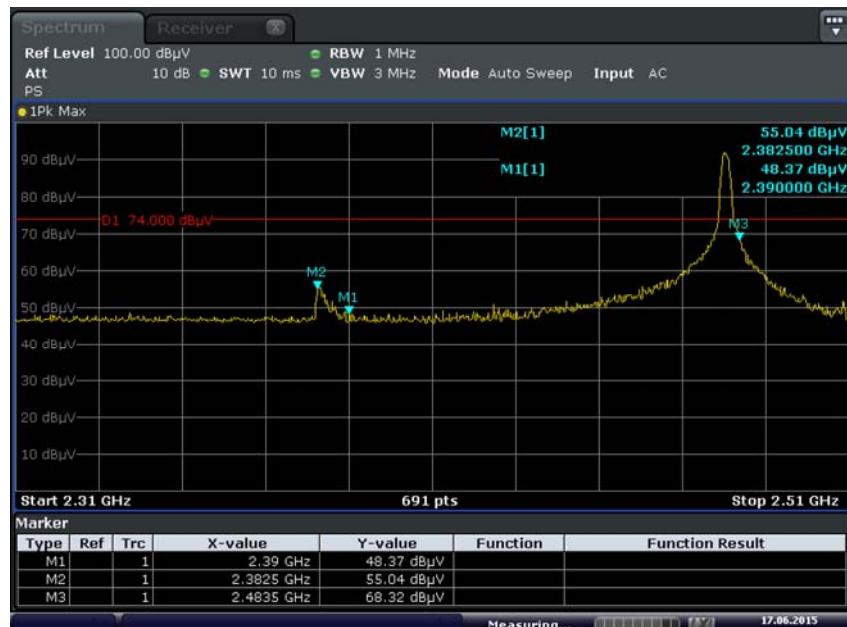

Date: 17.JUN.2015 10:03:13

ANT, AVERAGE



Date: 17.JUN.2015 10:04:34

--END OF REPORT--