





Emission Mask and Bandwidth

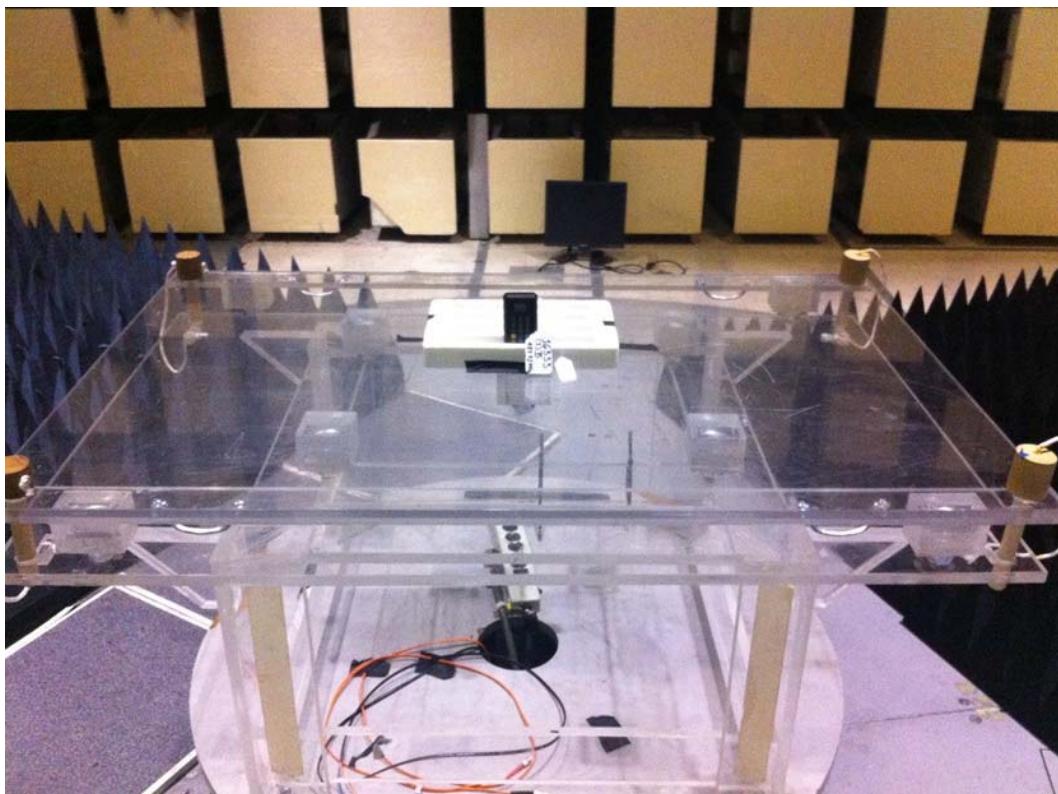


Radiated Spurious Emissions and Power, Front

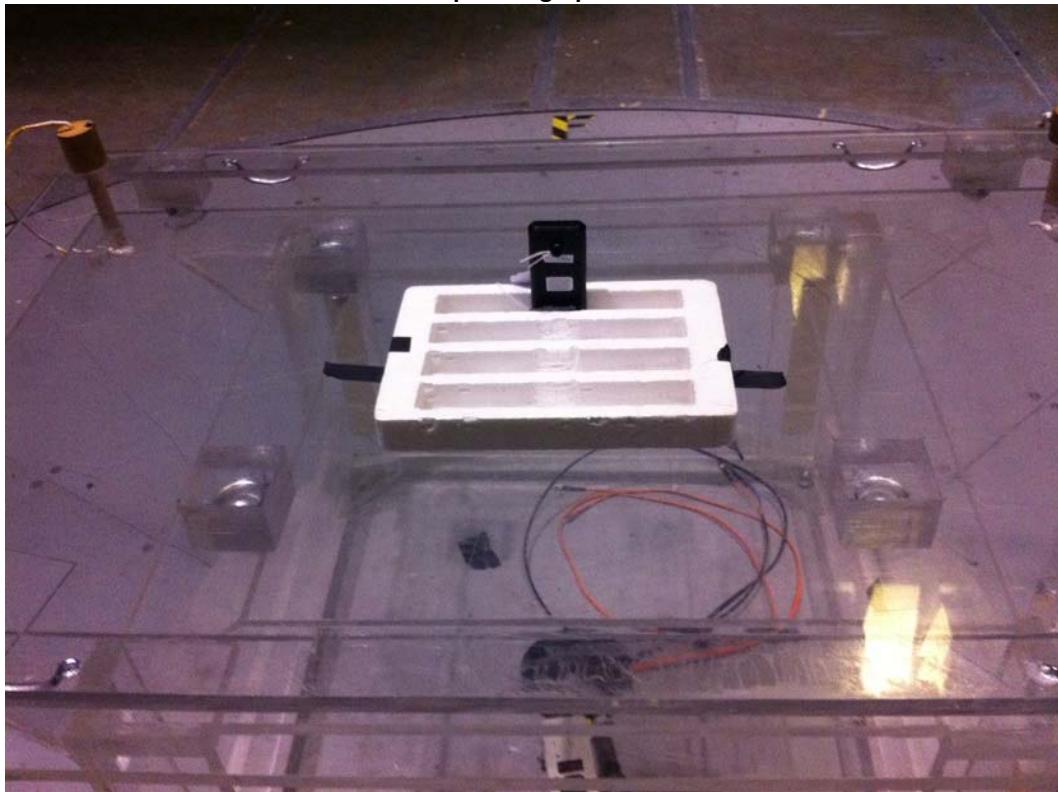

Radiated Spurious Emissions and Power, Back



Frequency Stability, Equipment/Chamber

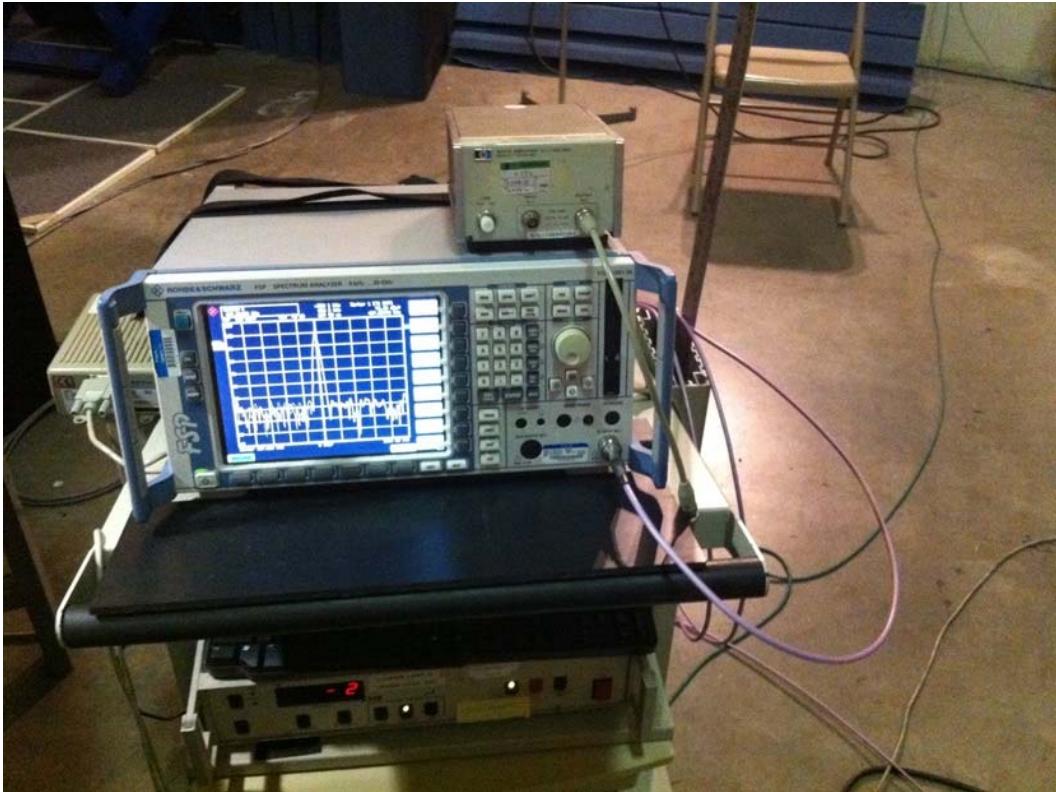

Frequency Stability, Equipment



Frequency Stability, EUT and Sense Antenna

Professional Testing, EMI, Inc.

Test Method:	ANSI C63.4-2009: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (incorporated by reference, FCC Part 15.207 - Code of Federal Regulations Part 47, Subpart C - Intentional Radiators, Conducted Emissions Limits)		
In accordance with:	FCC Part 15.207 - Code of Federal Regulations Part 47, Subpart C - Intentional Radiators, Conducted Emissions Limits		
Section:	15.207		
Test Date(s):	7/21/2015	EUT Serial #:	None
Customer:	Long Range Systems	EUT Part #:	Unit #4
Project Number:	16333-15	Test Technician:	Dave Kohutek
Purchase Order #:	NA	Supervisor:	Lisa Arndt
Equip. Under Test:	T14C	Witness' Name:	None

Conducted Emissions Photographs

Page: 1 of 1



Front View

Rear of Table View
