

FCC ID TEST REPORT

for

HD Wireless IP Camera

Model: FC2405P

FCC ID: 2AB72FC2403P-2405P

Prepared for: Shenzhen Fostar Electronic Co.,Ltd
2/F, Block 1 Vision Business Park, Nanshan District, Shenzhen

Prepared by: Shenzhen TCT Testing Technology Co.,Ltd
1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,
Baoan District, Shenzhen, Guangdong, China

TEL: +86-0755-27673339

FAX: +86-0755-27673332

Report Number: TCT140625035F2-1

Date of Test: July 05-July 18, 2014

Date of Report: July 18, 2014

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from TCT Testing Technology

Table of Contents

1.0 General Details	3
1.1 Test Lab Details	3
1.2 Applicant Details	3
1.4 Statement	4
1.5 Test Engineer	4
2.0 Test equipments and Associated Equipment used during the test.	5
2.1 Test Equipments.....	5
2.2 AE used during the test	5
3.0 Technical Details	6
3.1 Summary of test results	6
3.2 Test Standards	6
4.0 EUT Modification	6
5.0 Measurement Uncertainty (95% confidence levels, k=2)	6
6.0 Power Line Conducted Emission Test	7
7.0 Maximum Peak Output Power	11
8.0 6dB Bandwidth Measurement	17
9.0 Power Spectral Density Measurement	25
10.0 Band age Measurement	33
11.0 Spurious Emission Test	42
12.0 Antenna Requirement	69

1.0 General Details

1.1 Test Lab Details

Name :	Shenzhen Tongce Testing Lab
Address:	1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
Telephone:	13410377511
Fax:	--

The test facility is recognized, certified, or accredited by the following organizations:

FCC Registration Number: 572331

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab
The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.
Registration Number: 572331

Industry Canada (IC)

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing
Registration Number IC: 10668A-1

1.2 Applicant Details

Applicant:	Shenzhen Fostar Electronic Co.,Ltd
Address:	2/F, Block 1 Vision Business Park, Nanshan District, Shenzhen
Telephone:	13480189513
Fax:	0755-26979571

Manufacturer:	Shenzhen Fostar Electronic Co.,Ltd
Address:	2/F, Block 1 Vision Business Park, Nanshan District, Shenzhen
Telephone:	13480189513
Fax:	0755-26979571

1.3 Description of EUT

Product:	HD Wireless IP Camera
Model No.:	FC2405P
Additional Model No.:	FC2403P
Brand Name:	FOSTAR
Operation Frequency:	IEEE 802.11b: 2412-2462 MHz IEEE 802.11g: 2412-2462 MHz IEEE 802.11n: 2412-2462 MHz(HT 20), 2422-2452 MHz(HT 40)
Channel number:	IEEE 802.11b/g: 11, IEEE 802.11n: 11(HT 20), 7(HT 40)
Channel spacing:	5 MHz
Modulation Type:	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Antenna Designation:	Reverse-polarity SMA antenna, and the maximum gain is 2dBi.
Power supply:	Input: 100-240V ~50-60Hz Output: 5V-2000mA

1.4 Statement

All models above are identical in the circuit, PCB layout, internal structure, all of the housing are made of plastic material, and just the appearance are different ,different model names are different for the marketing requirement.

1.5 Test Engineer

The sample tested by



Printed name: Jack Kang

2.0 Test equipments and Associated Equipment used during the test.

2.1 Test Equipments

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 2, 2014	July 1, 2015
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 3, 2014	July 2, 2015
System Controller	CT	SC100	-	July 3, 2014	July 2, 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015
Pre-amplifier	Teseq	LAN6900	--	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8447D	83153007374	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8449B	3008A01738	July 3, 2014	July 2, 2015
Loop antenna	A.R.A.	PLA-1030/B	1029	July 3, 2014	July 2, 2015
Horn Antenna	ETS LINDGREN	3117	--	July 3, 2014	July 2, 2015
Horn Antenna	ETS LINDGREN	3160	--	July 3, 2014	July 2, 2015
EMI Test Receiver	R&S	ESCS30	100139	July 2, 2014	July 1, 2015
LISN	AFJ	LS16C	16010222119	July 2, 2014	July 1, 2015
Coaxial Cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015
Coaxial Cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015
Coaxial cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015
Coaxial Cable	TCT	N/A	N/A	July 2, 2014	July 1, 2015

2.2 AE used during the test

Equipment type	Manufacturer	Model

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:		
Test Item	CFR 47 Section	Result
AC Power Line Conducted Emission	15.207(a)	Complies
Maximum Peak Output Power	15.247(b)(3)	Complies
6 dB bandwidth	15.247 (a)(2)	Complies
Maximum Power Density	15.247(e)	Complies
Band age Measurement	15.247 (d), 15.205 (a), 15.209 (a)	Complies
Radiated Emission	15.209	Complies
Antenna Requirement	15.203,15.247(c)	Complies
RF Exposure	15.247(b), 1.1307(b)	Complies

3.2 Test Standards

FCC Part 15:2013 Subpart C, Paragraph 15.247

KDB 558074 D01 DTS Meas Guidance v03r02

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20) and 13.5 Mbps for 802.11n(H40). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.

4.0 EUT Modification

No modification by Shenzhen TCT Testing Technology Co., Ltd.

5.0 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	MU
1.	Radio Frequency	$\pm 1 \times 10^{-9}$
2.	Temperature	$\pm 0.1^{\circ}\text{C}$
3.	Humidity	$\pm 1.0\%$
4.	RF power, conducted	$\pm 0.34\text{dB}$
5.	RF power density, conducted	$\pm 1.45\text{dB}$
6.	Spurious emissions, conducted	$\pm 3.70\text{dB}$
7.	All emissions, radiated	$\pm 4.50\text{dB}$

Note: 1) For IEEE 802.11b/g/n (HT 20): Low channel: 2412MHz, Middle channel: 2437MHz,

High channel: 2462MHz


For IEEE 802.11n (HT 40): Low channel: 2422MHz, Middle channel: 2437MHz,

High channel: 2452MHz

FC2403P and FC2405P both should be pre-tested first and only the worst case was recorded in the test report. And we found the worst case is the model of FC2405P.

6.0 Power Line Conducted Emission Test

6.1 Schematics of the test

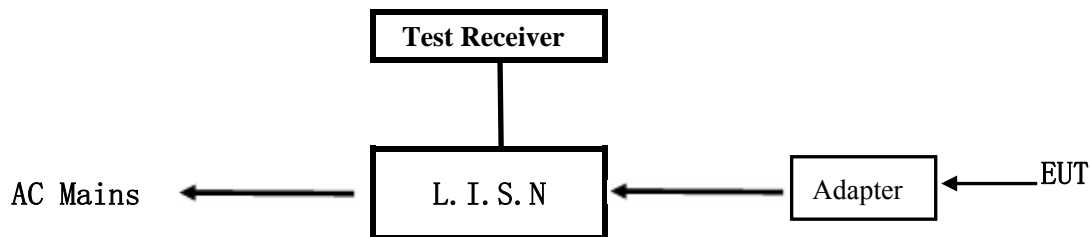


EUT: Equipment Under Test

6.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated.

Test Voltage: 120V~, 60Hz EUT

Block diagram of Test setup

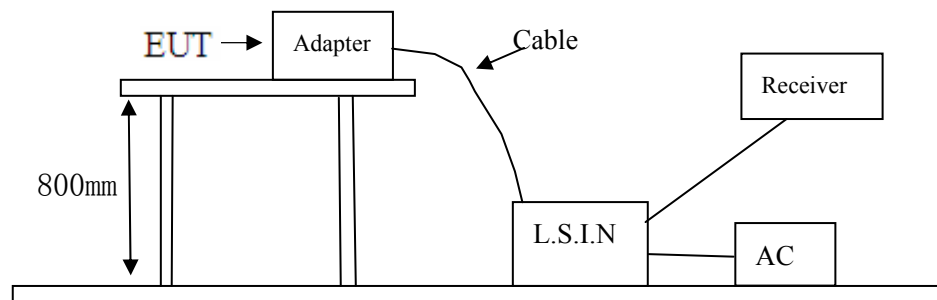

6.3 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009

- A Setup the EUT and simulators as shown on the following
- B Enable AF signal and confirm EUT active to normal condition

6.4 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCS30	100139	July 2, 2014	July 1, 2013
LISN	AFJ	LS16C	16010222119	July 2, 2014	July 1, 2013

6.5 Conducted Emission Limit

Frequency(MHz)	Class A Limits (dB μ V)		Class B Limits (dB μ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The tighter limit shall apply at the transition frequencies

6.6 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 51% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

The test was carried out in the following operation mode(s):

- Tx mode

6.7 Test result

Min. limit margin >10 dB from 0.15MHz to 30MHz


The requirements are FULFILLED

Remarks: According to FCC part 15.207.

A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT Description:	HD Wireless IP Camera
Operation Mode:	Tx mode
Tested By:	Beryl Zhao
Test date:	Jul. 05, 2014

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

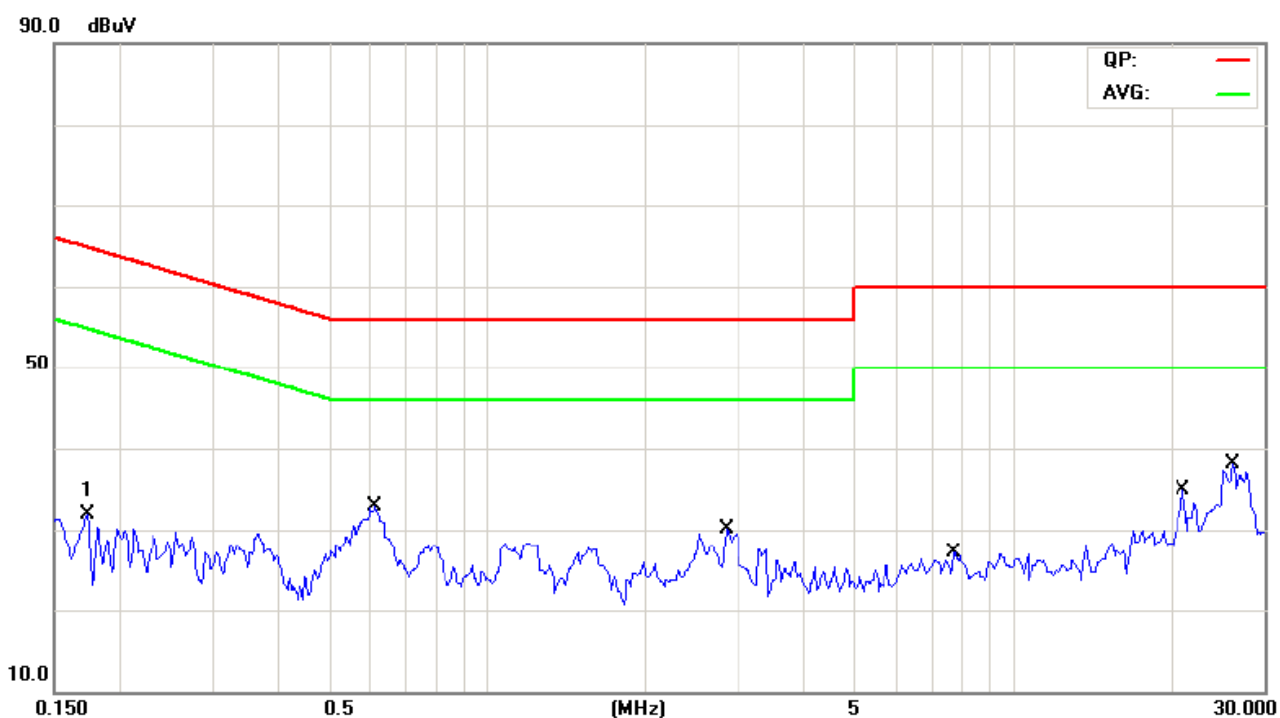


Frequency (MHz)	Reading(dB μ V)				Limit (dB μ V)	
	Live		Neutral		Quasi-peak	Average
	Quasi-peak	Average	Quasi-peak	Average		
0.1734	22.24	15.00	--	--	64.79	54.79
0.6109	28.56	15.25	--	--	56.00	46.00
2.8453	20.58	13.75	--	--	56.00	46.00
7.7070	17.92	12.80	--	--	60.00	50.00
21.0000	30.10	17.90	--	--	60.00	50.00
26.2266	29.65	16.08	--	--	60.00	50.00

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Description:	HD Wireless IP Camera
Operation Mode:	Tx mode
Tested By:	Beryl Zhao
Test Date:	Jul. 05, 2014


Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

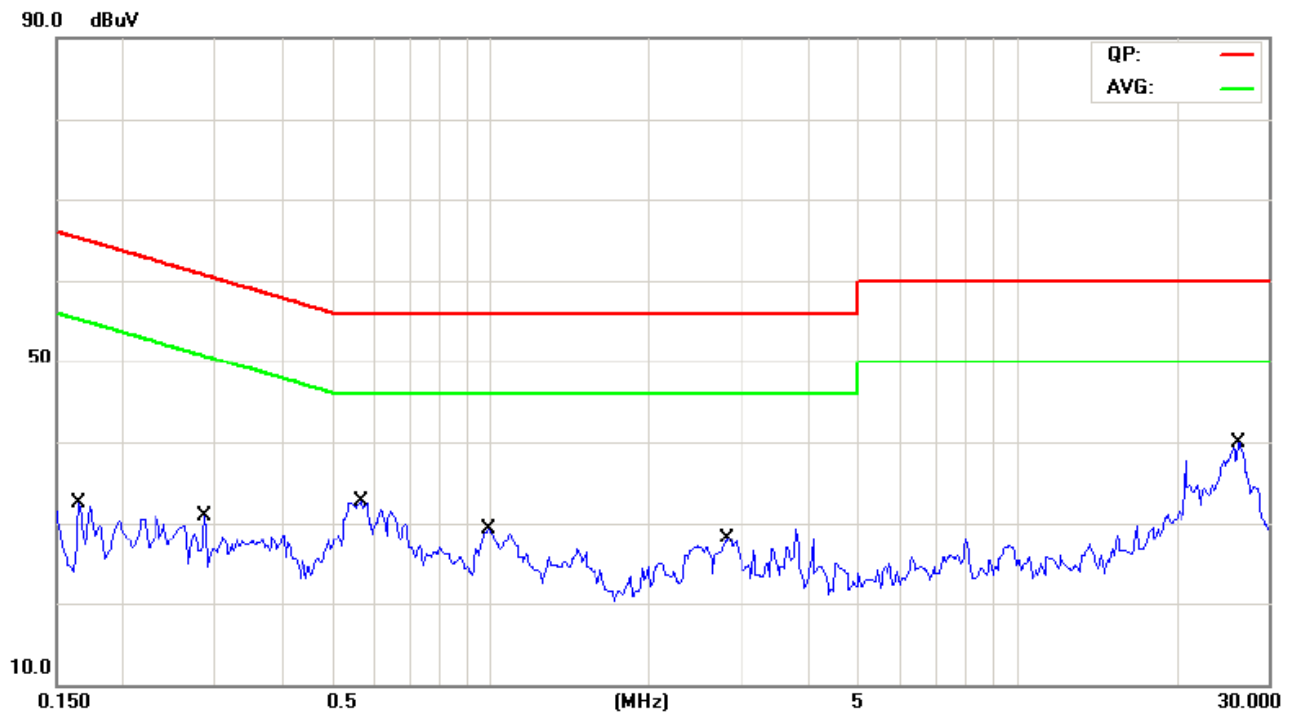

Frequency (MHz)	Reading(dB μ V)				Limit (dB μ V)	
	Live		Neutral			
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1655	--	--	26.45	14.11	65.18	55.18
0.2867	--	--	23.92	16.36	60.62	50.62
0.5680	--	--	29.41	16.61	56.00	46.00
0.9898	--	--	22.79	15.16	56.00	46.00
2.8219	--	--	21.41	13.33	56.00	46.00
26.4023	--	--	32.51	17.97	60.00	50.00

7.0 Maximum Peak Output Power

7.1 Test Setup

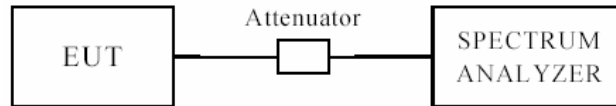

7.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

7.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02, the transmitter output was connected to the spectrum analyzer through an attenuator. The spectrum analyzer is setting as follows: RBW=1 MHz, VBW=3 MHz, Span=encompass the DTS bandwidth, Detector=peak, Sweep time=auto couple, Trace mode= max hold. Allow trace to fully stabilize. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges.

7.4 Test Equipment:


Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015

7.5 Test Result


IEEE 802.11b mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	6.83	30	Pass
Middle	7.38	30	Pass
Highest	6.50	30	Pass
IEEE 802.11g mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	14.82	30	Pass
Middle	15.66	30	Pass
Highest	13.40	30	Pass
IEEE 802.11n (HT 20) mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	14.74	30	Pass
Middle	15.42	30	Pass
Highest	15.50	30	Pass
IEEE 802.11n(HT 40) mode			
Test channel	Peak output power (dBm)	Limit (dBm)	Result
Lowest	13.64	30	Pass
Middle	16.72	30	Pass
Highest	15.27	30	Pass

Test Mode: IEEE 802.11b mode


Low Channel

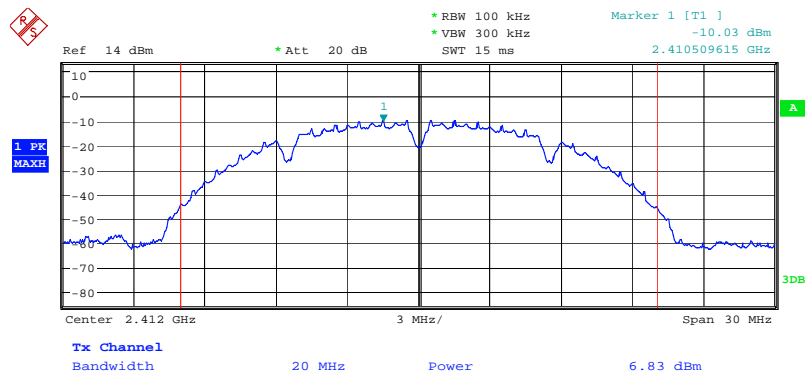

Middle channel

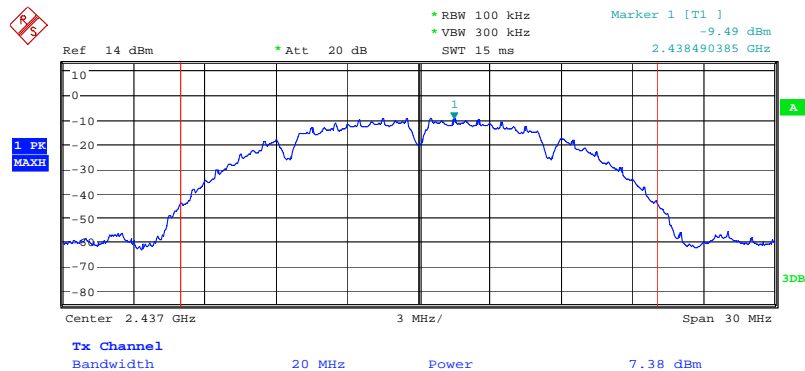


High channel

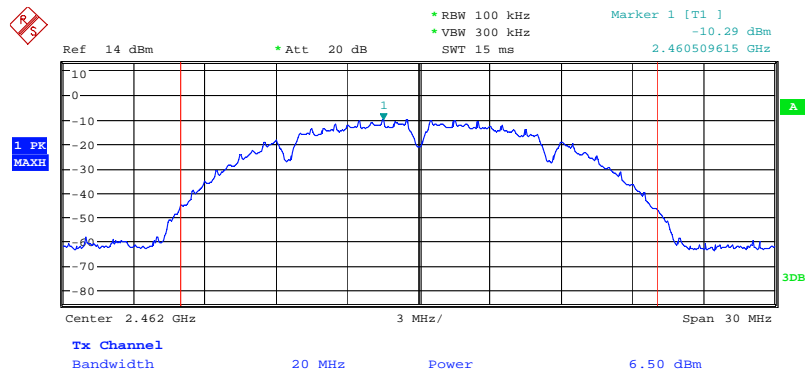


Test Mode: IEEE 802.11g mode


Low channel

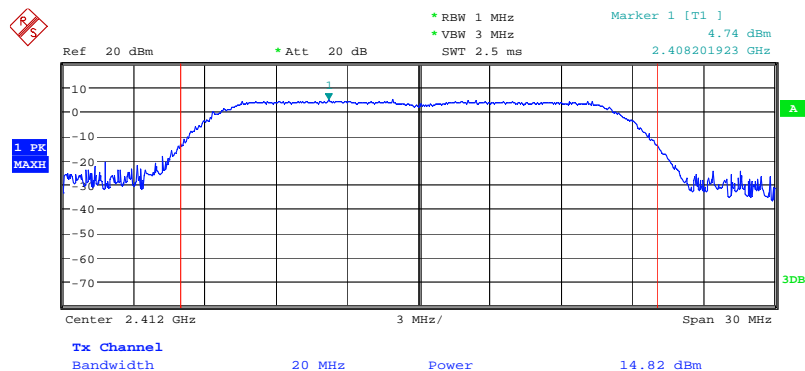

Middle channel

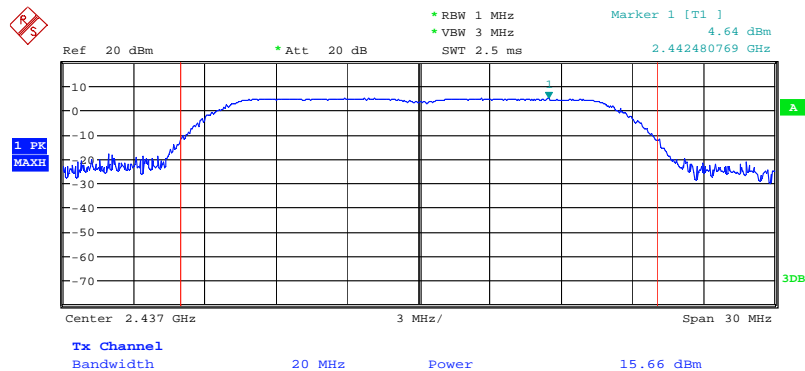


High channel

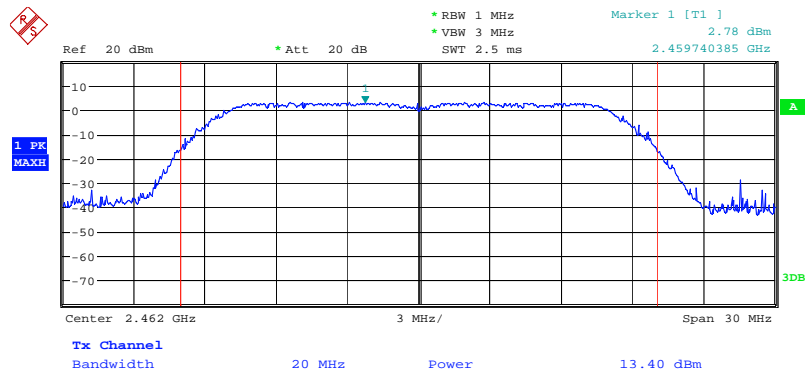


Test Mode: IEEE 802.11n (HT 20) mode


Low Channel

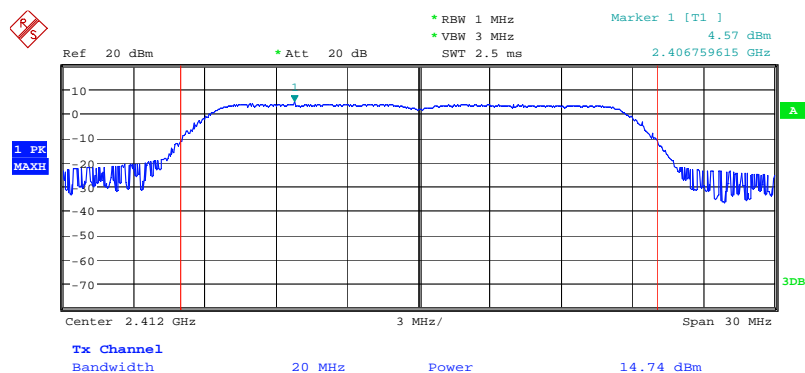

Middle channel

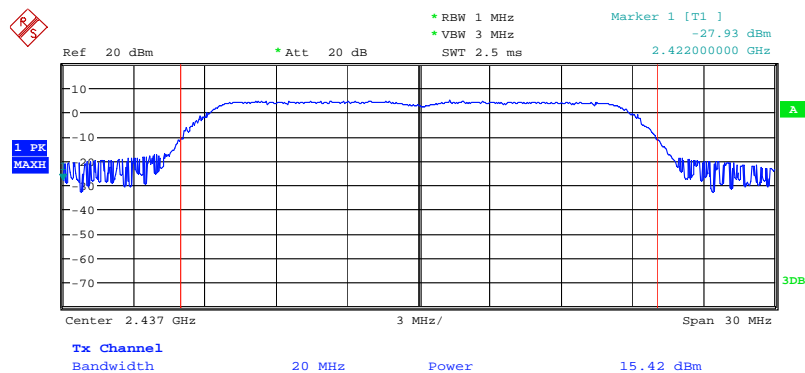


High channel

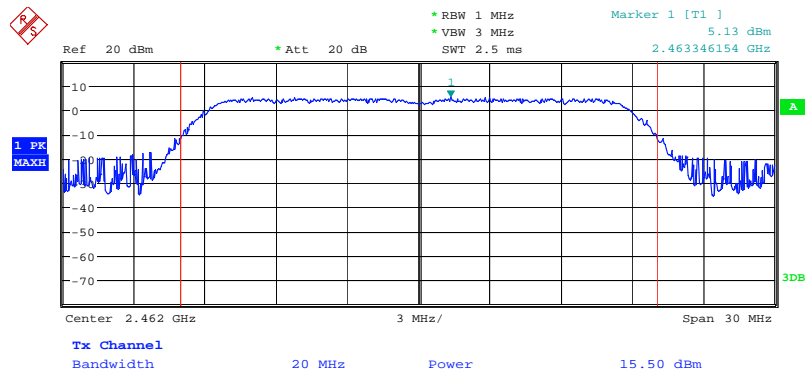


Test Mode: IEEE 802.11n (HT 40) mode


Low channel

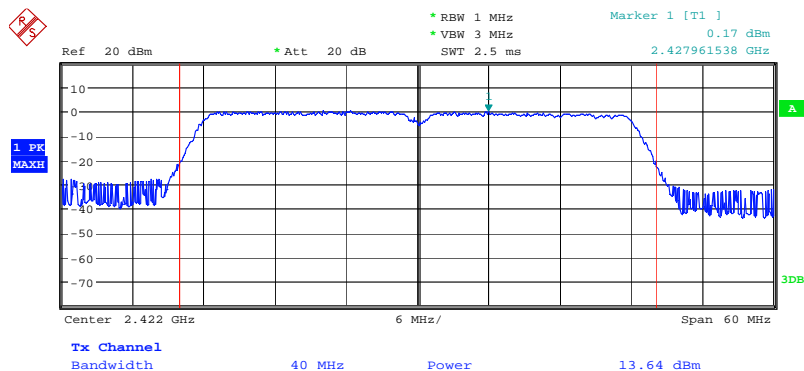

Middle channel

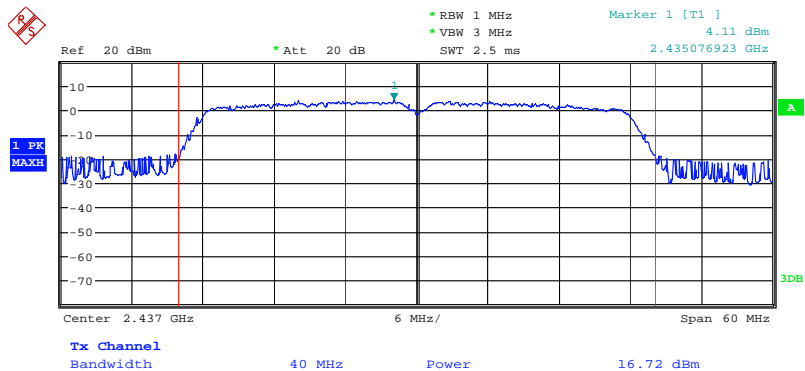


High channel

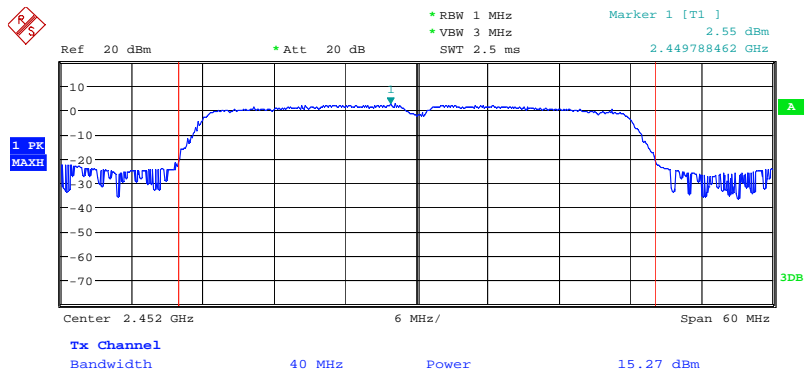

8.0 6dB Bandwidth Measurement

8.1 Test Setup

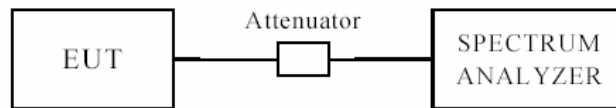

8.2 Limits of 6dB Bandwidth Measurement

The minimum of 6 dB Bandwidth is >500 kHz

8.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02, the transmitter output was connected to the spectrum analyzer through an attenuator. The spectrum analyzer is setting as follows: RBW=100 kHz, VBW=300 kHz, Detector=Peak, Trace mode=max hold, Sweep=auto couple. The 6dB bandwidth is defined as the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.4 Test Equipment:


Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015

8.5 Test Result

IEEE 802.11b mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	10.05	500	Pass
Middle	9.66	500	Pass
Highest	9.67	500	Pass
IEEE 802.11g mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	16.38	500	Pass
Middle	16.44	500	Pass
Highest	16.39	500	Pass
IEEE 802.11n(HT 20) mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	17.60	500	Pass
Middle	17.64	500	Pass
Highest	17.64	500	Pass
IEEE 802.11n(HT 40) mode			
Test channel	6 dB occupied bandwidth (MHz)	Limit (kHz)	Result
Lowest	35.18	500	Pass
Middle	35.34	500	Pass
Highest	35.18	500	Pass


Test Mode: IEEE 802.11b mode

Low channel

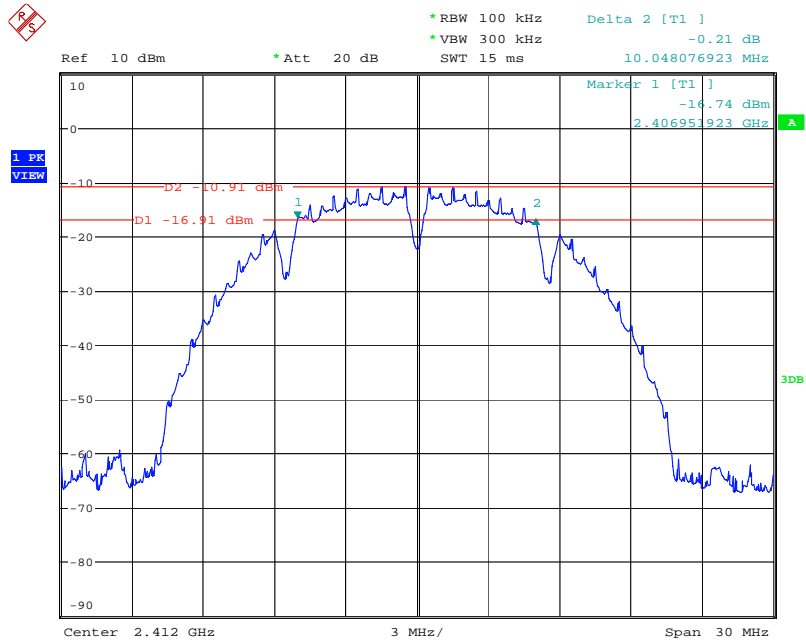


Date: 17.JUL.2014 19:51:54

Middle channel

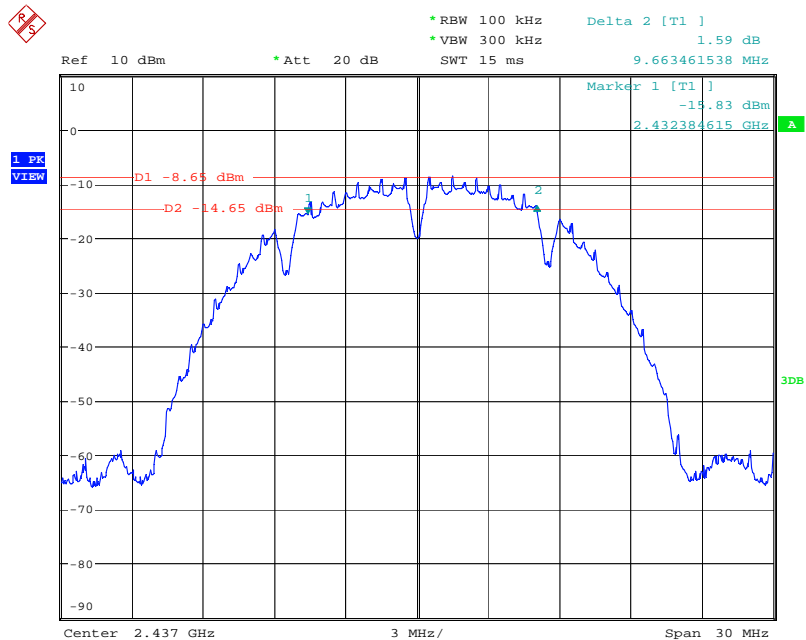

Date: 17.JUL.2014 19:54:42


High channel

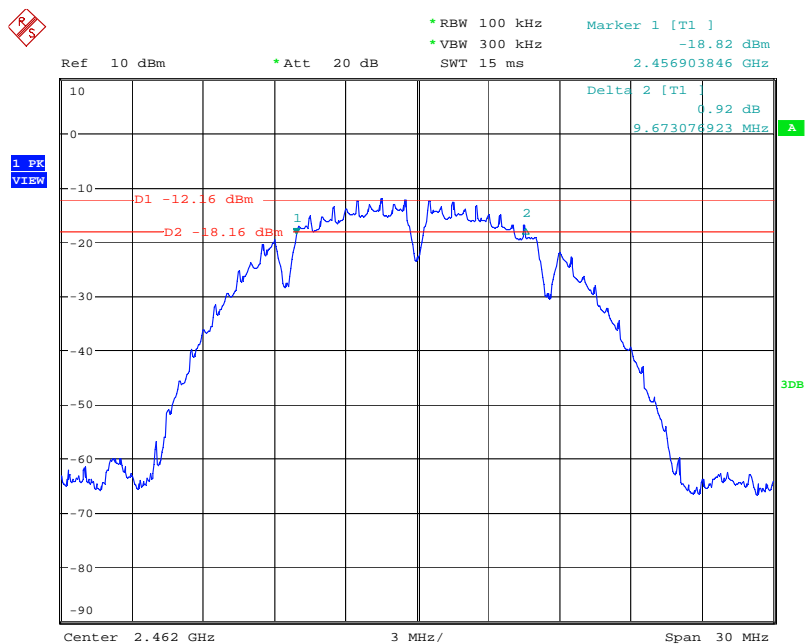

Date: 17.JUL.2014 19:57:13


Test Mode: IEEE 802.11g mode

Low channel

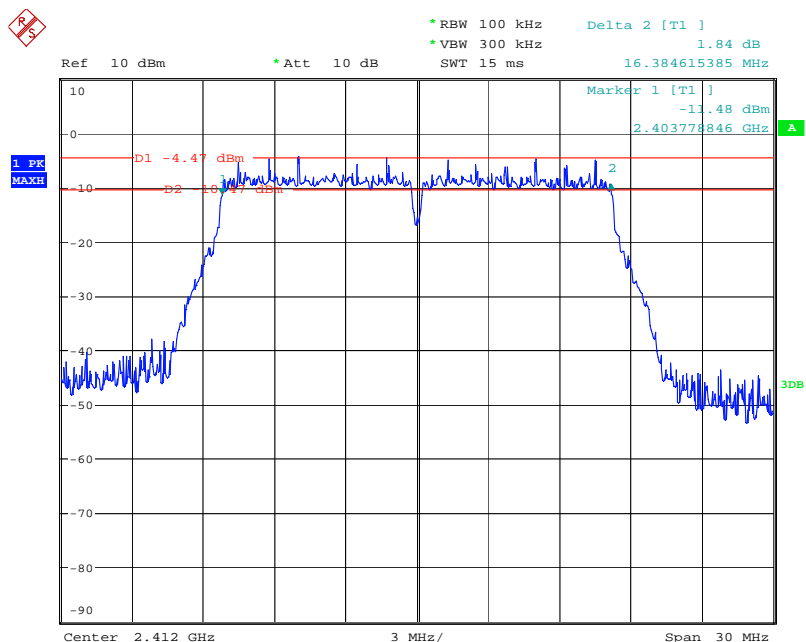


Date: 17.JUL.2014 20:29:42

Middle channel

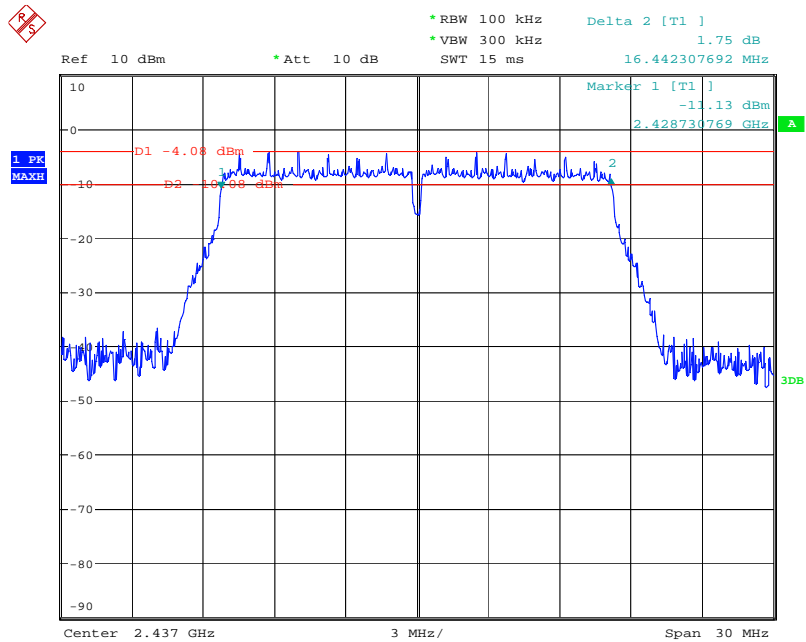

Date: 17.JUL.2014 20:31:32


High channel

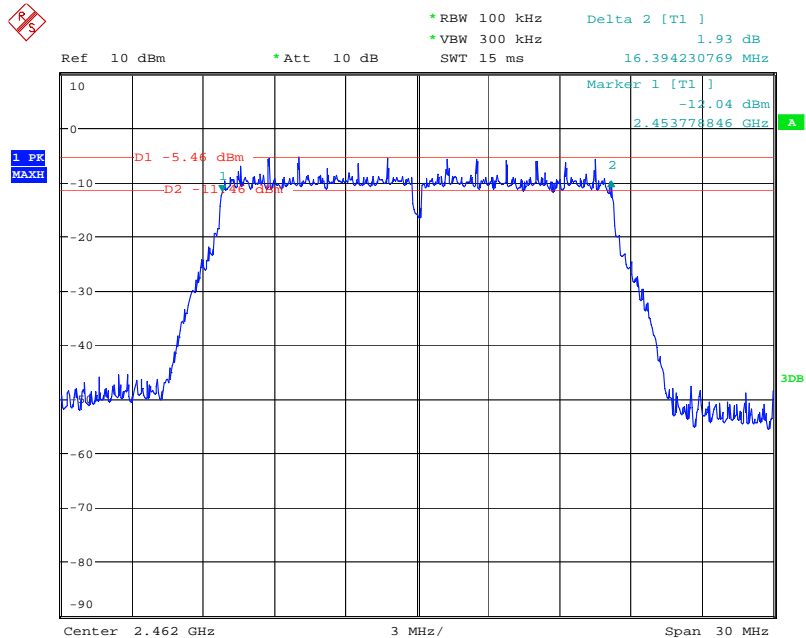

Date: 17.JUL.2014 20:33:37


Test Mode: IEEE 802.11n (HT 20) mode

Low channel

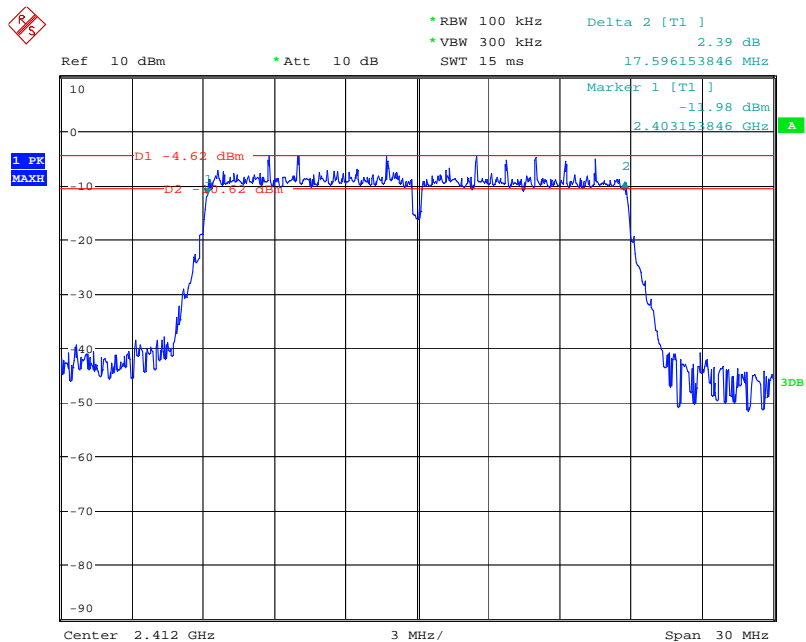


Date: 17.JUL.2014 20:35:45

Middle channel

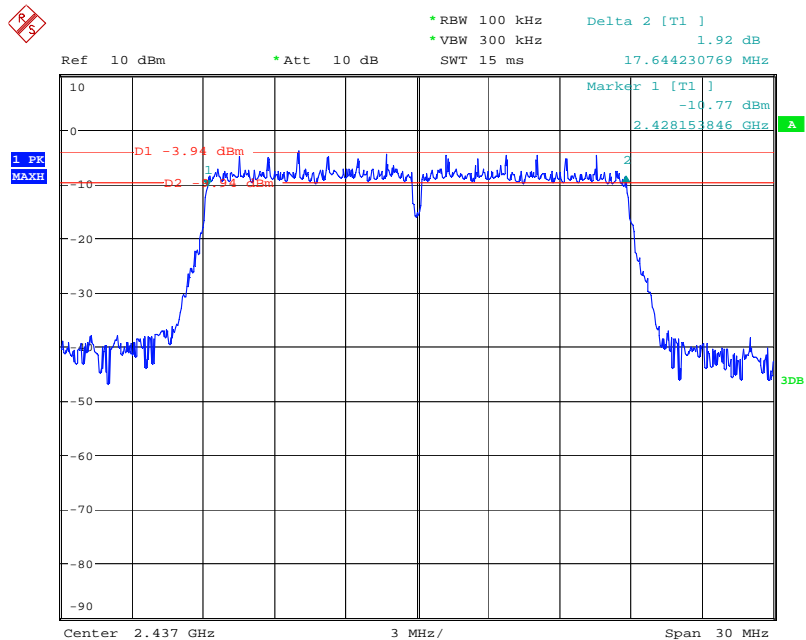

Date: 17.JUL.2014 20:37:10


High channel

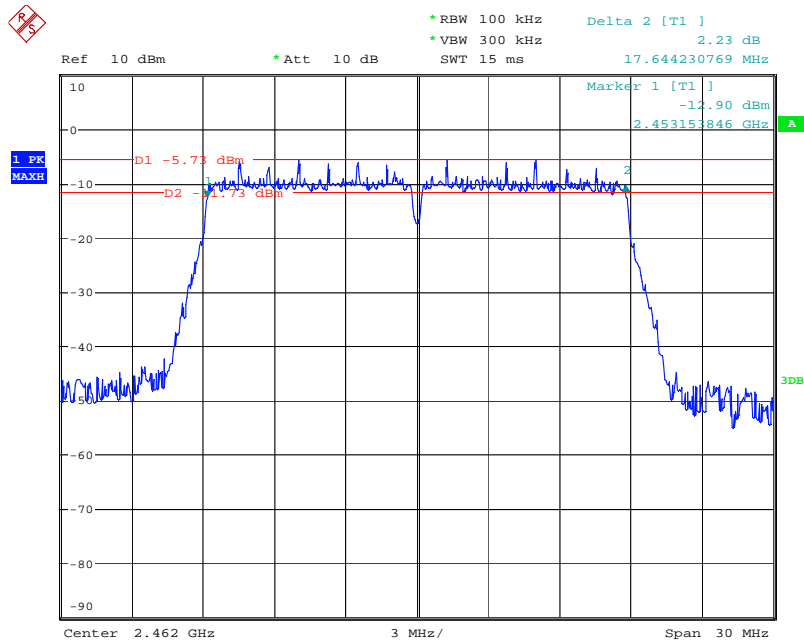

Date: 17.JUL.2014 20:38:30


Test Mode: IEEE 802.11n(HT 40) mode

Low channel

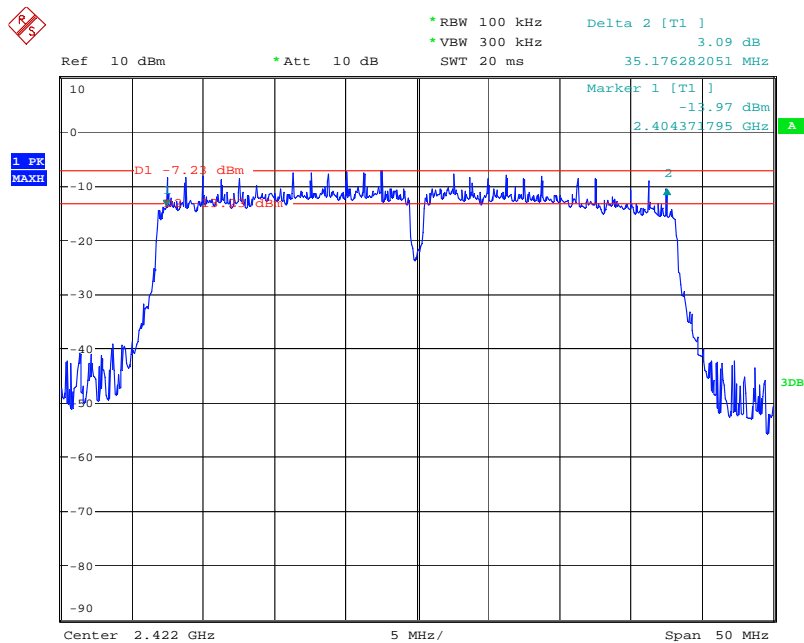


Date: 17.JUL.2014 20:40:44

Middle channel

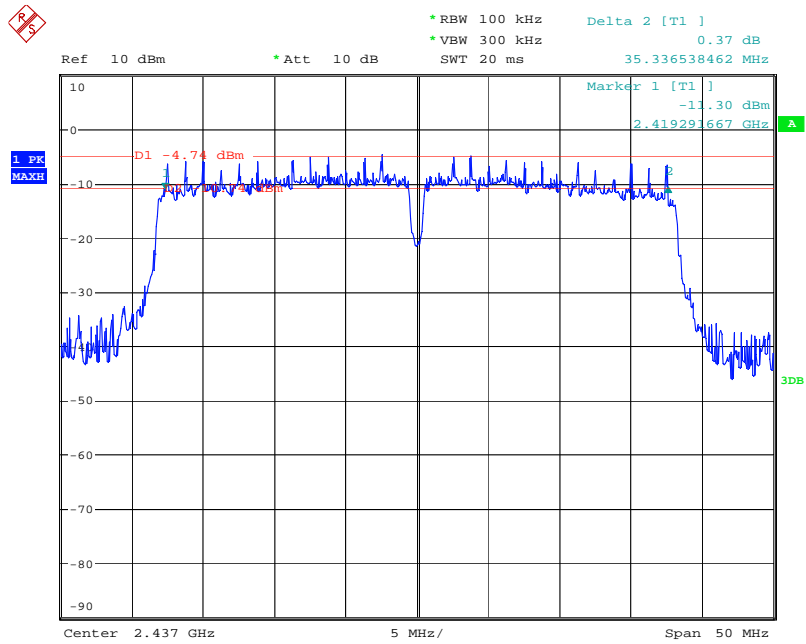

Date: 17.JUL.2014 20:41:45


High channel

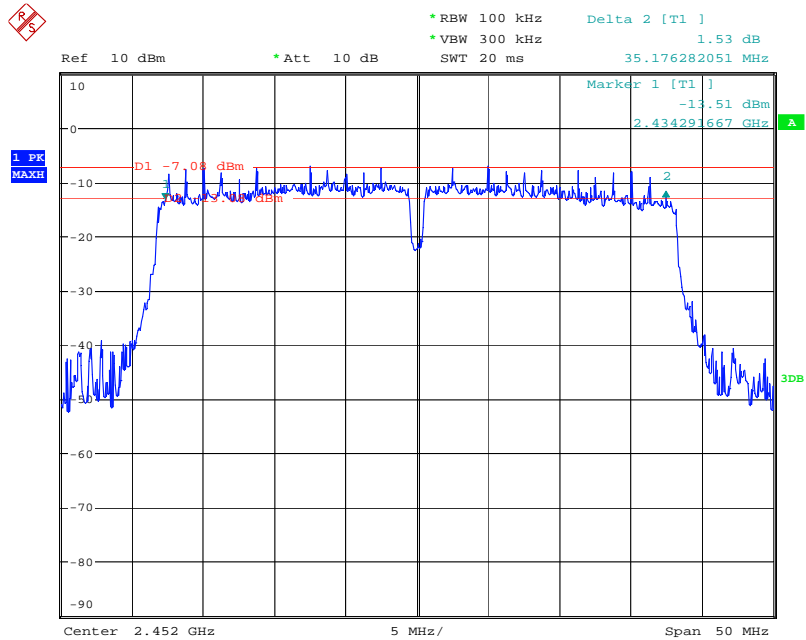

Date: 17.JUL.2014 20:42:59

9.0 Power Spectral Density Measurement

9.1 Test Setup

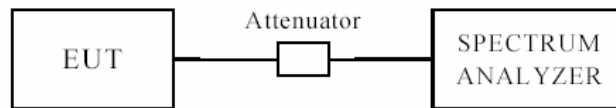

9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density is 8 dBm in any 3 kHz.

9.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02, the transmitter output was connected to the spectrum analyzer through an attenuator.

The spectrum analyzer is setting as follows:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the *DTS bandwidth*.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 Test Equipment:


Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015

9.5 Test Result

IEEE 802.11b mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-18.71	8	Pass
Middle	-18.62	8	Pass
Highest	-18.82	8	Pass
IEEE 802.11g mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-17.86	8	Pass
Middle	-17.93	8	Pass
Highest	-19.93	8	Pass
IEEE 802.11n(HT 20) mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-17.15	8	Pass
Middle	-18.31	8	Pass
Highest	-20.15	8	Pass
IEEE 802.11n(HT 40) mode			
Test channel	Peak Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-20.32	8	Pass
Middle	-20.09	8	Pass
Highest	-19.46	8	Pass


Test Mode: IEEE 802.11b mode

Low channel

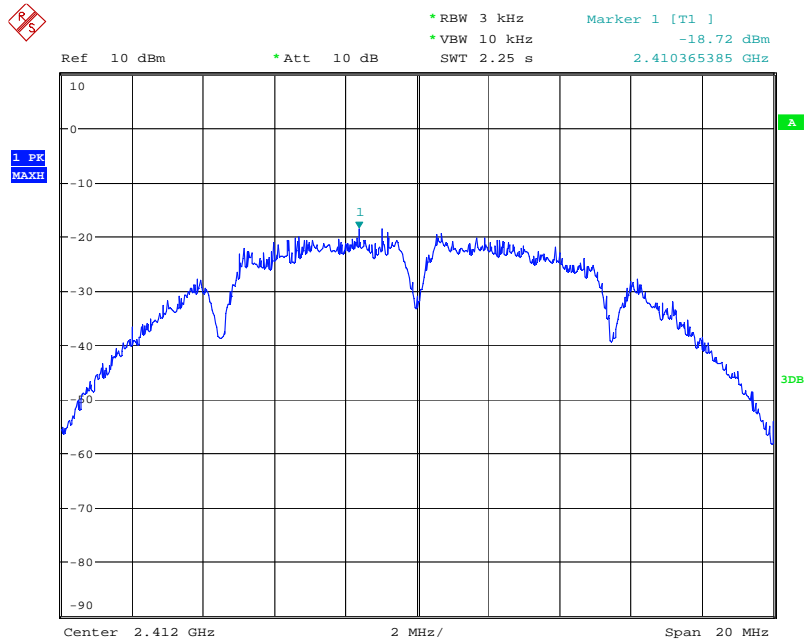


Date: 17.JUL.2014 20:54:23

Middle channel

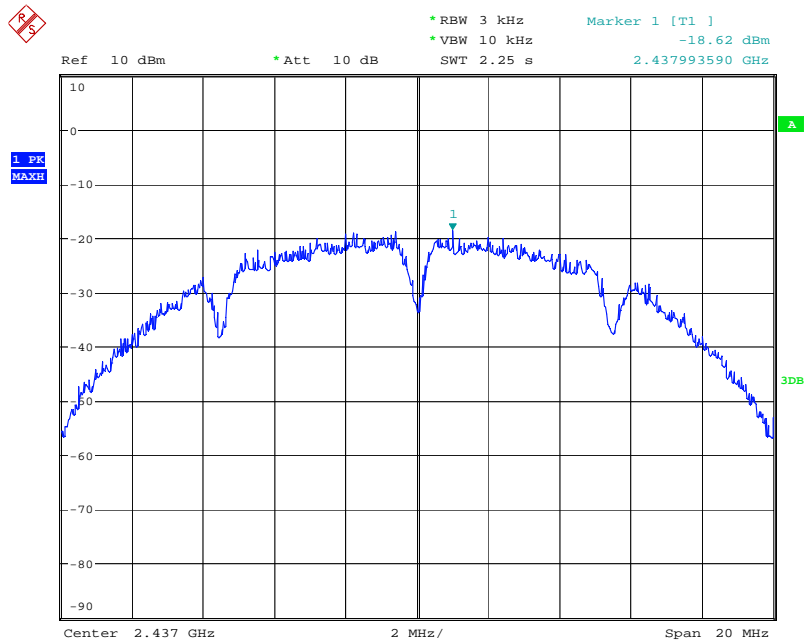

Date: 17.JUL.2014 20:55:08


High channel

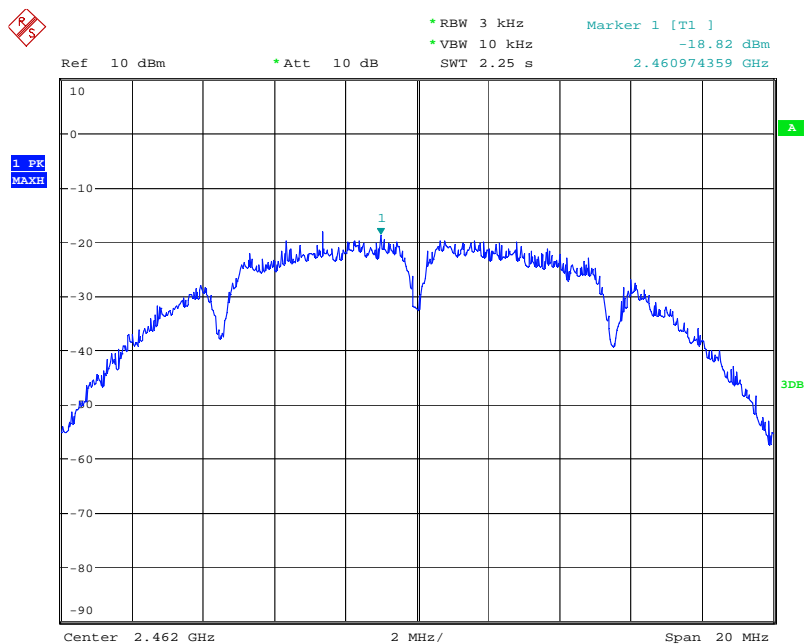

Date: 17.JUL.2014 20:55:57


Test Mode: IEEE 802.11g mode

Low channel

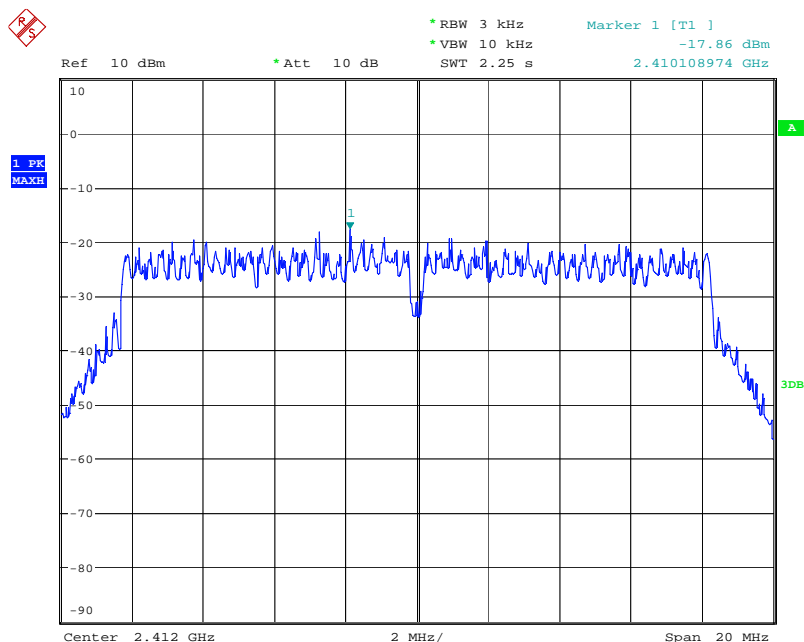


Date: 17.JUL.2014 20:45:11

Middle channel

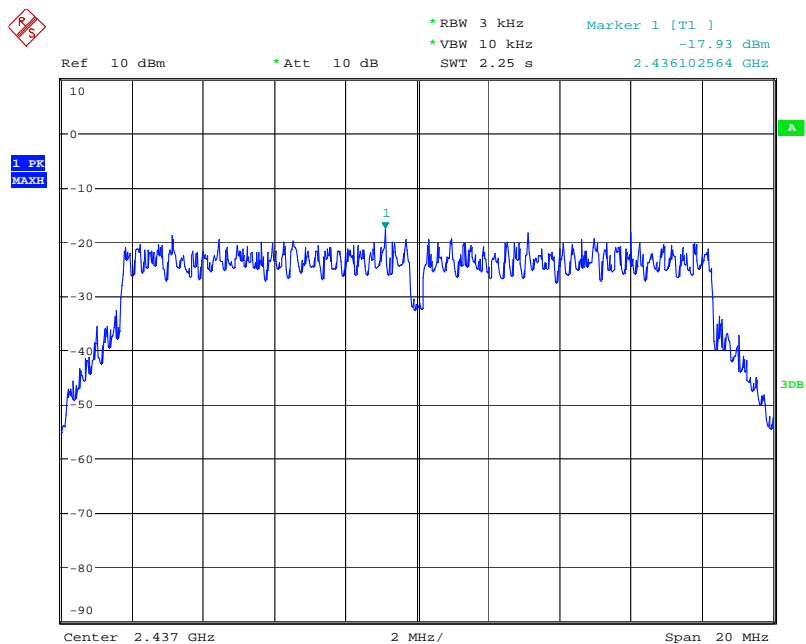

Date: 17.JUL.2014 20:45:52


High channel

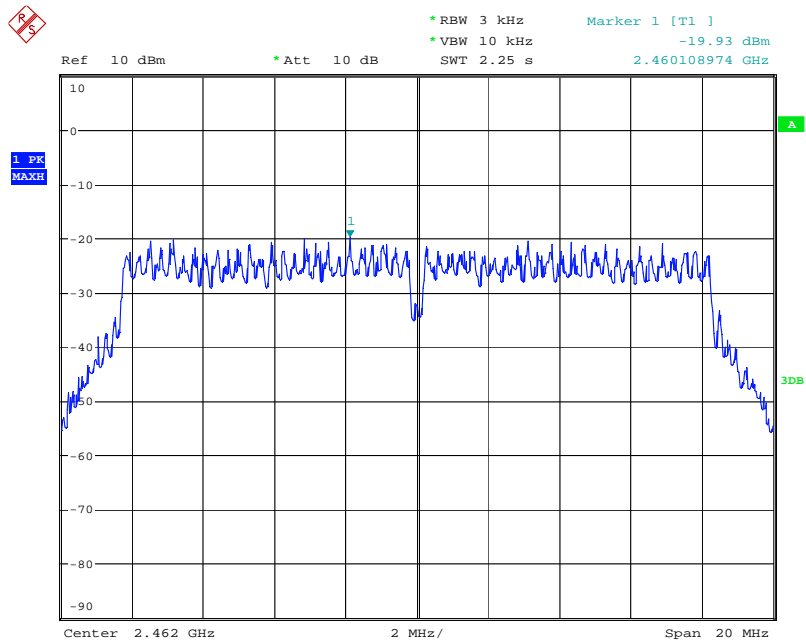

Date: 17.JUL.2014 20:46:37


Test Mode: IEEE 802.11n (HT 20) mode

Low channel

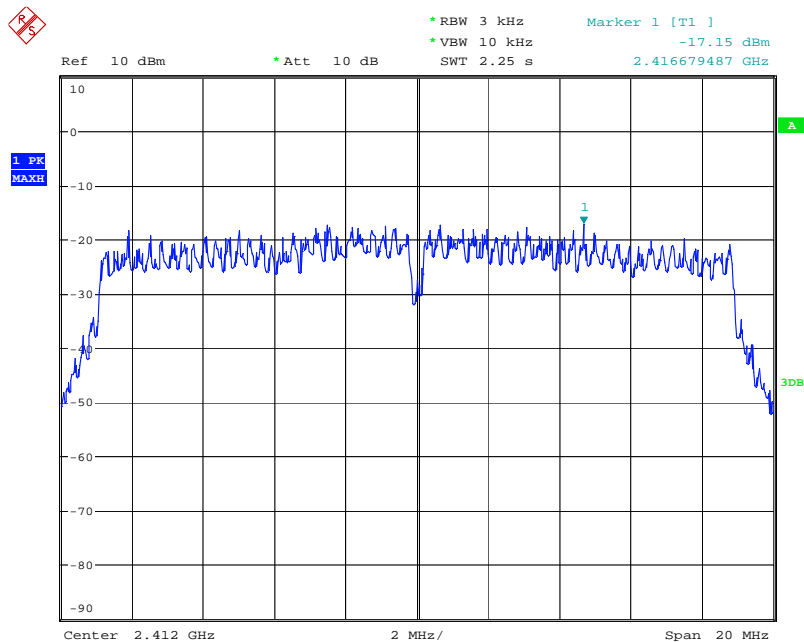


Date: 17.JUL.2014 20:47:18

Middle channel

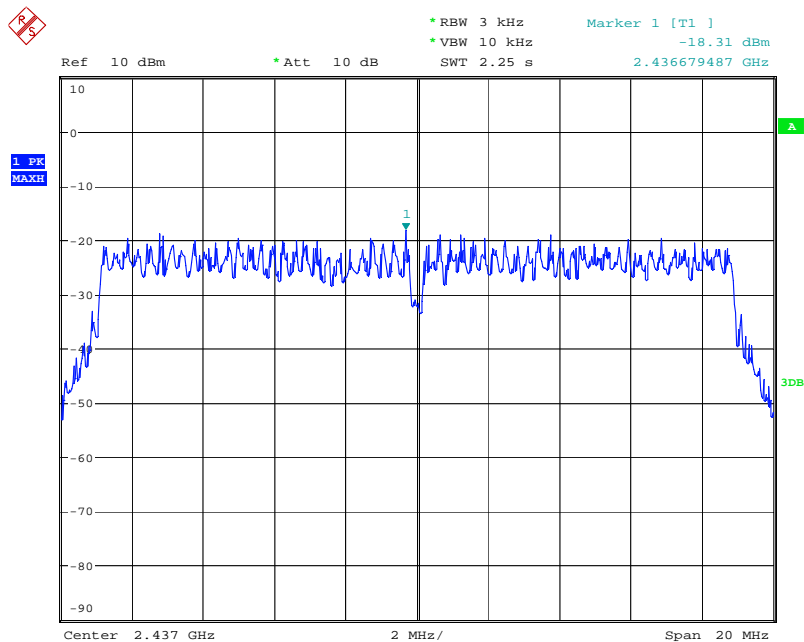

Date: 17.JUL.2014 20:47:49


High channel

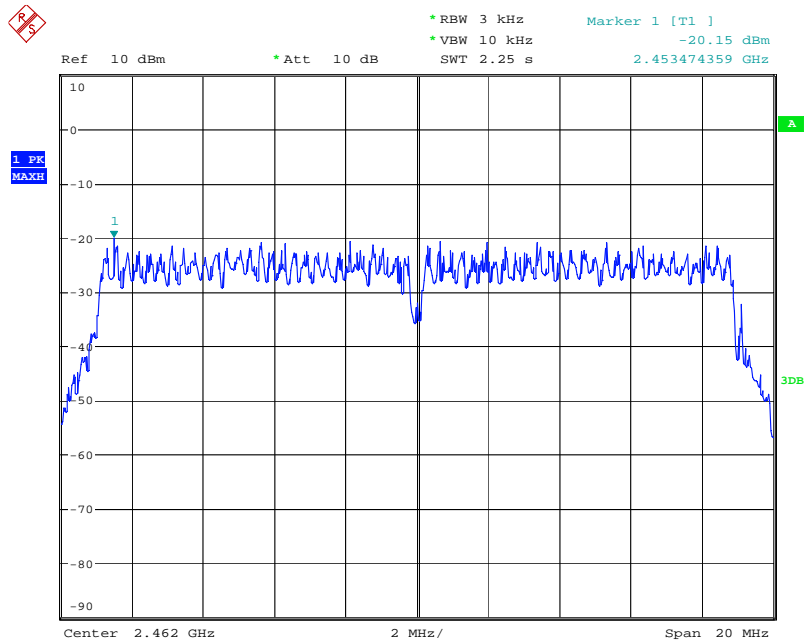

Date: 17.JUL.2014 20:48:25


Test Mode: IEEE 802.11n(HT 40) mode

Low channel

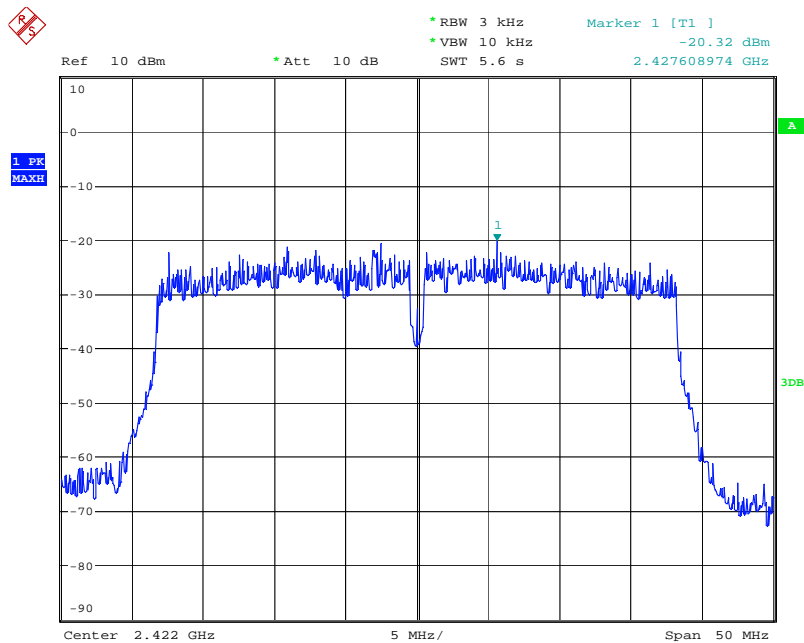


Date: 17.JUL.2014 20:52:08

Middle channel

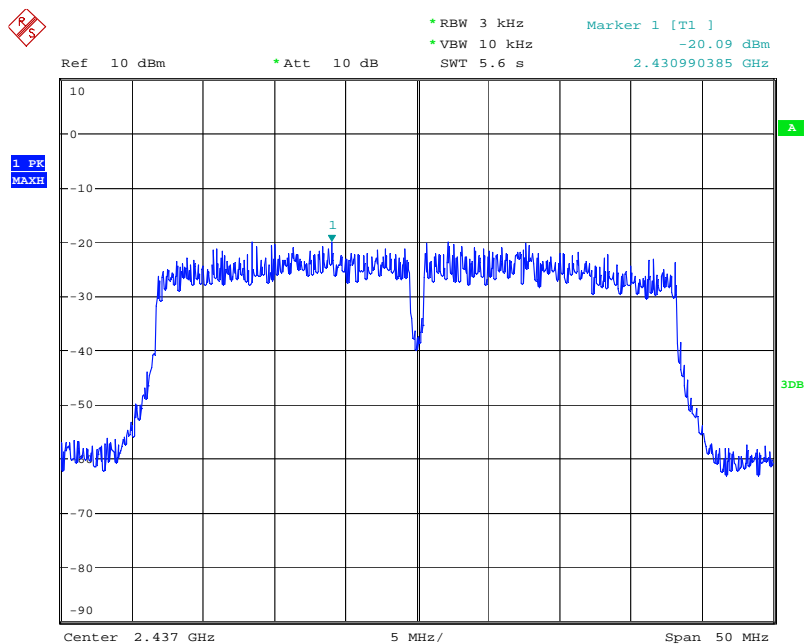

Date: 17.JUL.2014 20:52:45

High channel

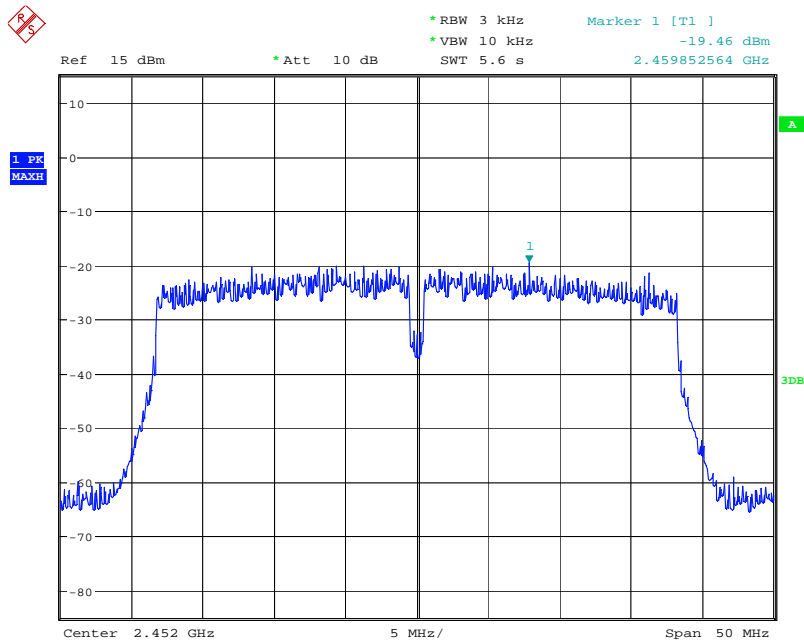

Date: 18.JUL.2014 11:23:41

10.0 Band age Measurement

10.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8449B	3008A01738	July 2, 2014	July 1, 2015
Horn Antenna	ETS LINDGREN	3117	--	July 1, 2014	July 1, 2015

10.2 Test specification:

Environmental conditions: Temperature 22° C Humidity: 50% Atmospheric pressure: 103kPa

10.3 Limit:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with
The radiated emission limits specified in 15.209(a)

10.4 Test Procedure

The EUT was setup according to ANSI C63.10:2009 and tested according to ANSI 63.10:2009 for compliance to FCC 47 CFR 15.247 requirements. The EUT is placed on a turn table which is 0.8 m above ground. The turn table is rotated 360 degrees to determine to the position of the maximum emission level. The EUT was positioned such That the distance from antenna to the EUT was 3 metres. The antenna is scanned from 1 metre to 4 metres to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

Spectrum analyzer parameters setting as shown below:


- 1): Peak: RBW=1MHz, VBW=1MHz, Sweep=Auto
- 2): Average: RBW=1MHz, VBW=10Hz, Sweep=Auto

10.5 Test Result:

Test plots:

Test Mode: IEEE 802.11b mode

Low channel

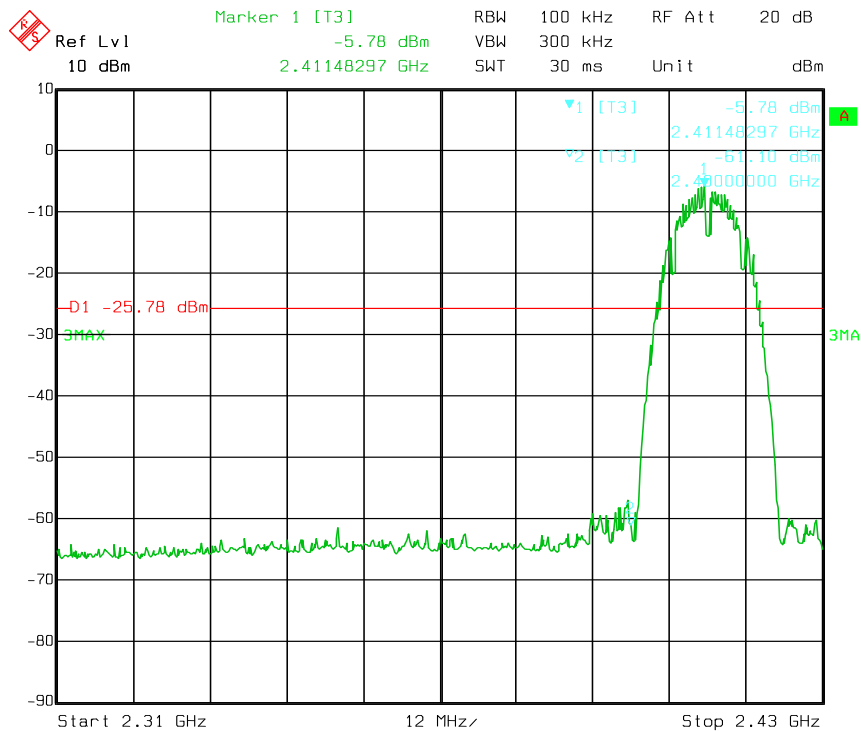


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 43.08 dBuV/m@3m at 2386.8MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

High channel

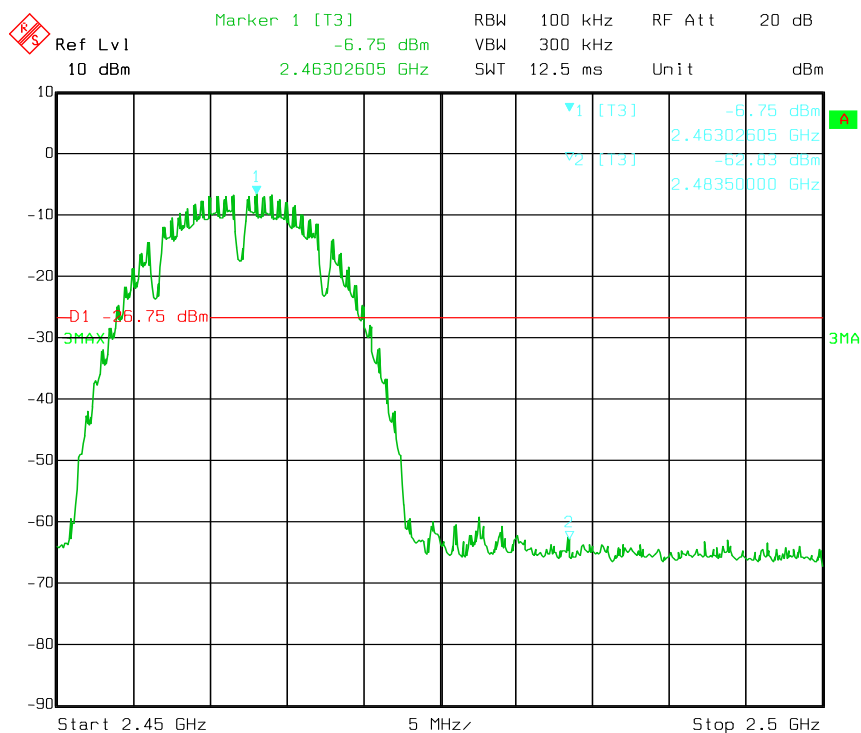


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 47.76 dBuV/m@3m at 2487.4MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Test Mode: IEEE 802.11g mode

Low channel

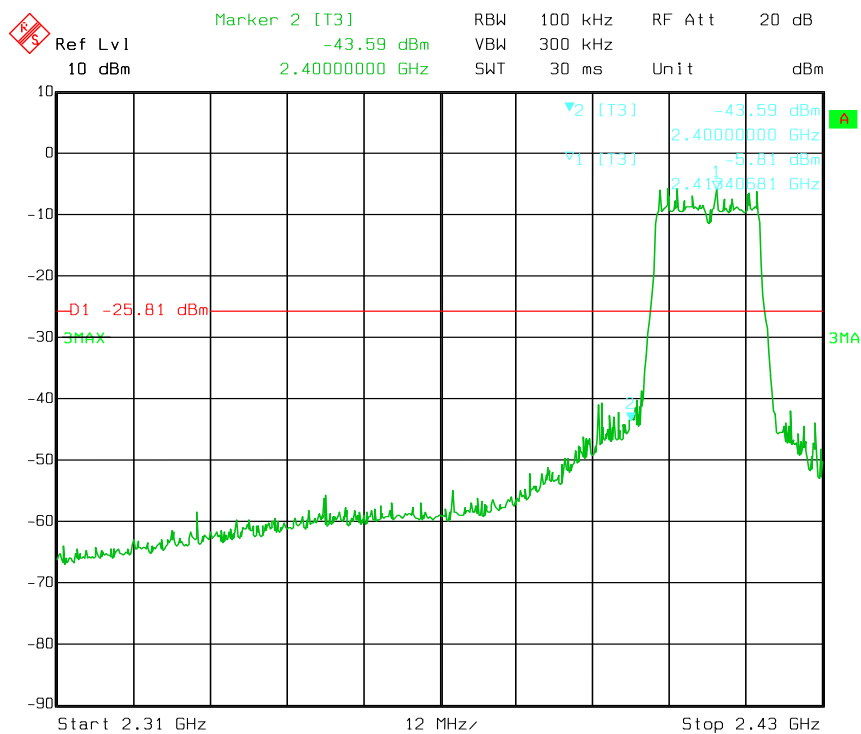

Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 43.28 dBuV/m@3m at 2359.8MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Ref Lvl 10 dBm

Marker 1 [T3] -5.53 dBm 2.46322645 GHz

RBW 100 kHz RF Att 20 dB

VBW 300 kHz

SWT 12.5 ms Unit dBm

▼1 [T3] -5.53 dBm 2.46322645 GHz

*2 [T3] -55.14 dBm 2.48350000 GHz

-D1 -25.53 dBm

3MA

3MA


Start 2.45 GHz 5 MHz/ Stop 2.5 GHz

2) The maximum emission was 48.36 dBuV/m@3m at 2485.7MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Test Mode: IEEE 802.11n (HT 20) mode

Low channel

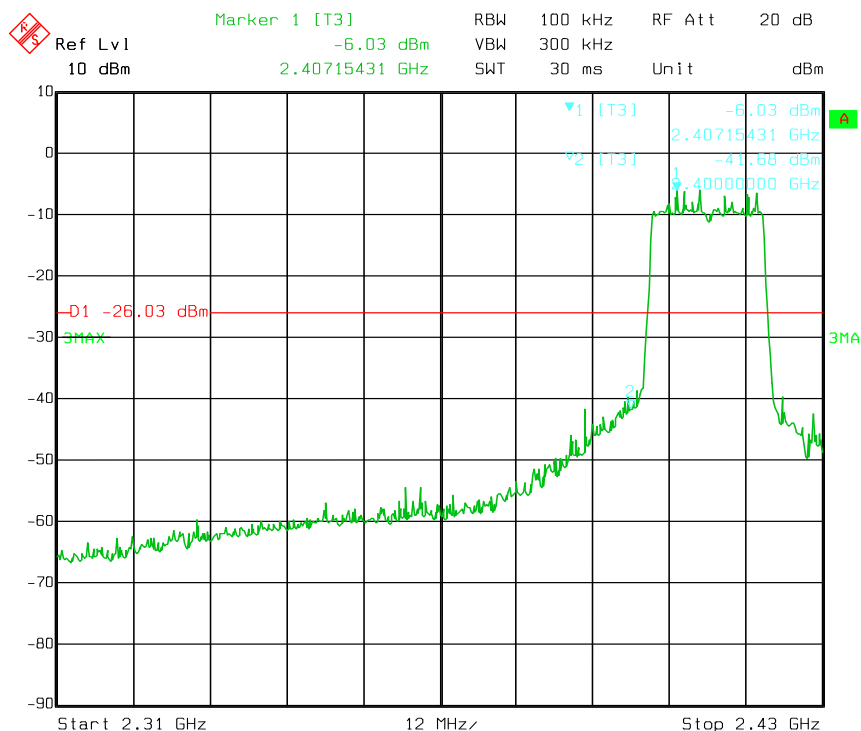


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 44.29 dBuV/m@3m at 2380.0MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

High channel

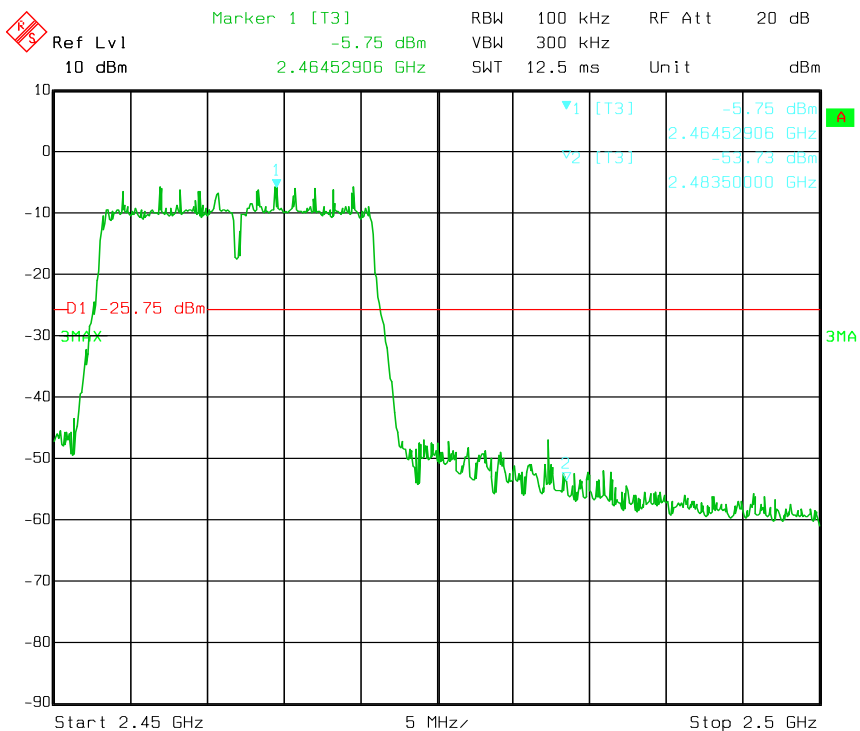


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 50.42 dBuV/m@3m at 2490.6MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

Test Mode: IEEE 802.11n (HT 40) mode

Low channel

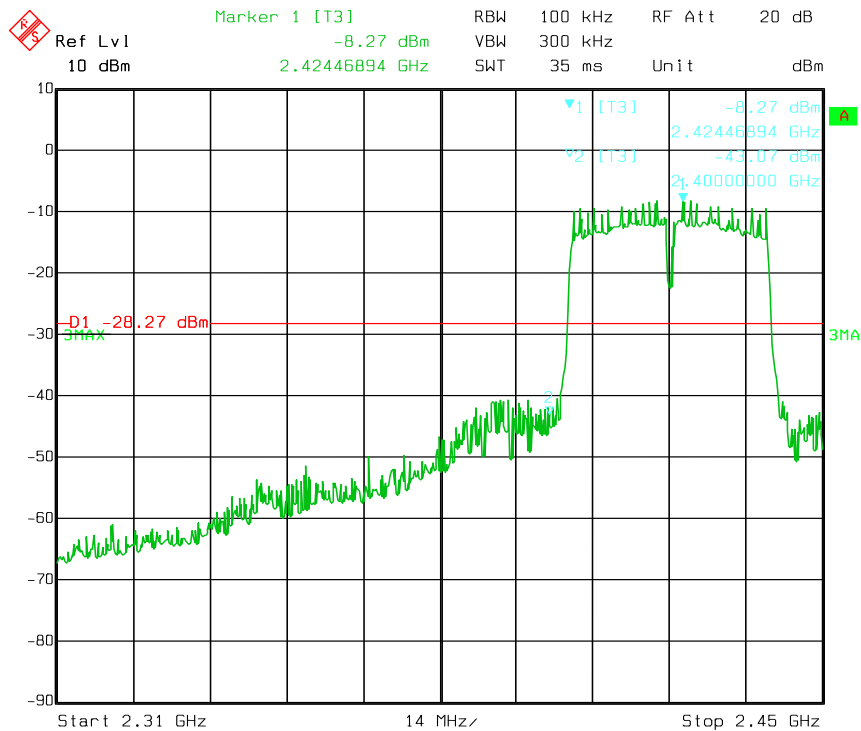


Remark: 1) The radiated measurement was made in horizontal and vertical polarity;

2) The maximum emission was 44.73 dBuV/m@3m at 2377.2MHz, which is less than the Average limit.

3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

High channel

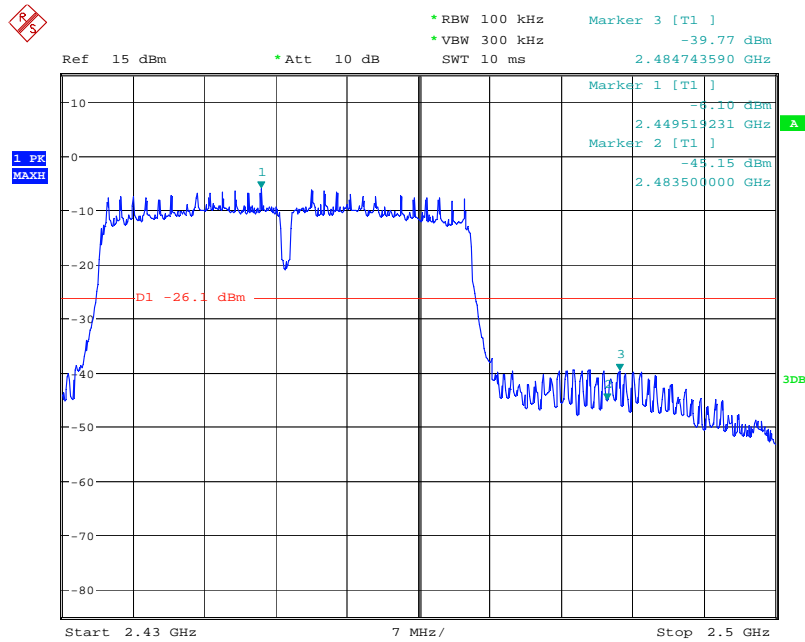


- Remark: 1) The radiated measurement was made in horizontal and vertical polarity;
- 2) The maximum emission was 44.11 dBuV/m@3m at 2484.9MHz, which is less than the Average limit.
- 3) Radiated emissions which fall in the restricted band, as defined in 15.205(a), comply with the radiated emission limits specified in 15.209(a).

11.0 Spurious Emission Test

11.1 Conducted emissions Measurement

11.1.1 Test configuration

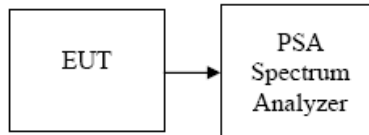

11.1.2 Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

11.1.3 Test procedure:

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz. Measurements are made over the 30MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

11.1.4 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015


11.1.5 Test Result:

Test plots please refer to next pages.

Note: Conducted emissions measurements below 30 MHz were made, and the maximum peak was detected, which is much less the limit. So it is not submitted in the report.


Test Mode: IEEE 802.11b mode

Low channel

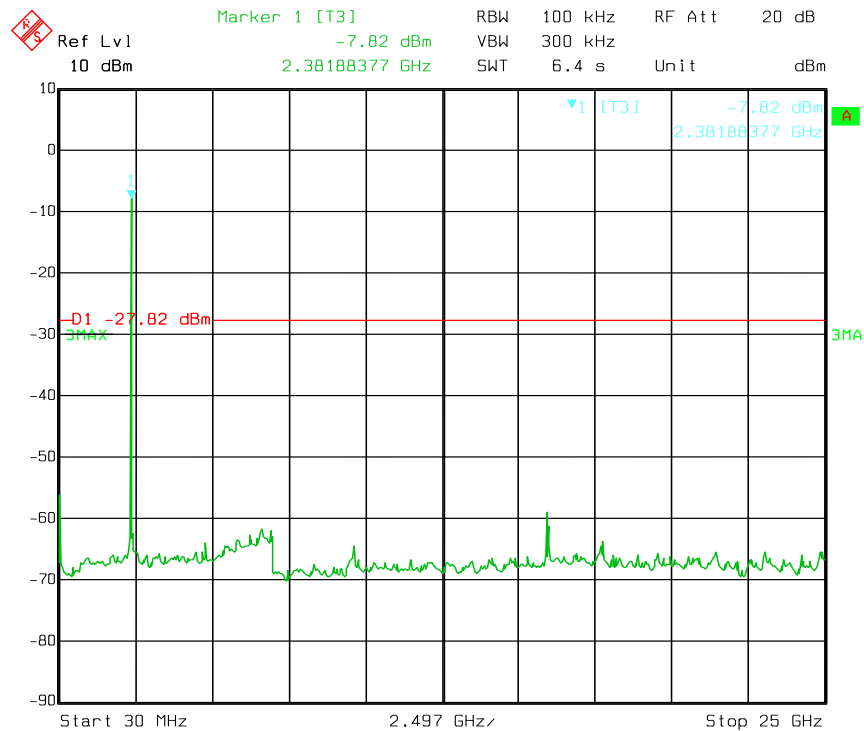


Note: Sweep points=1001pts

Middle channel

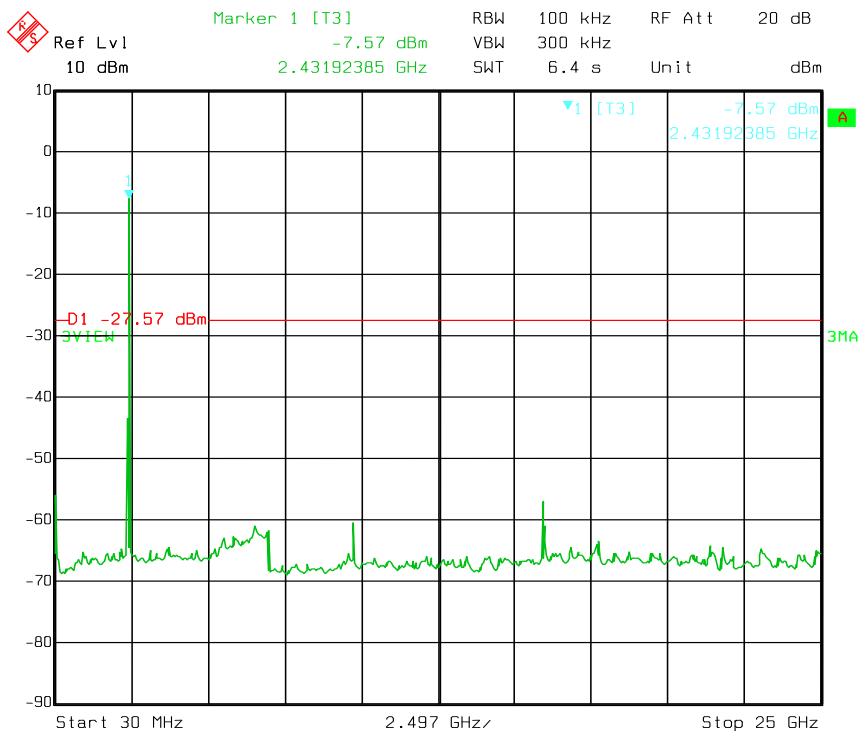

Note: Sweep points=1001pts


High channel

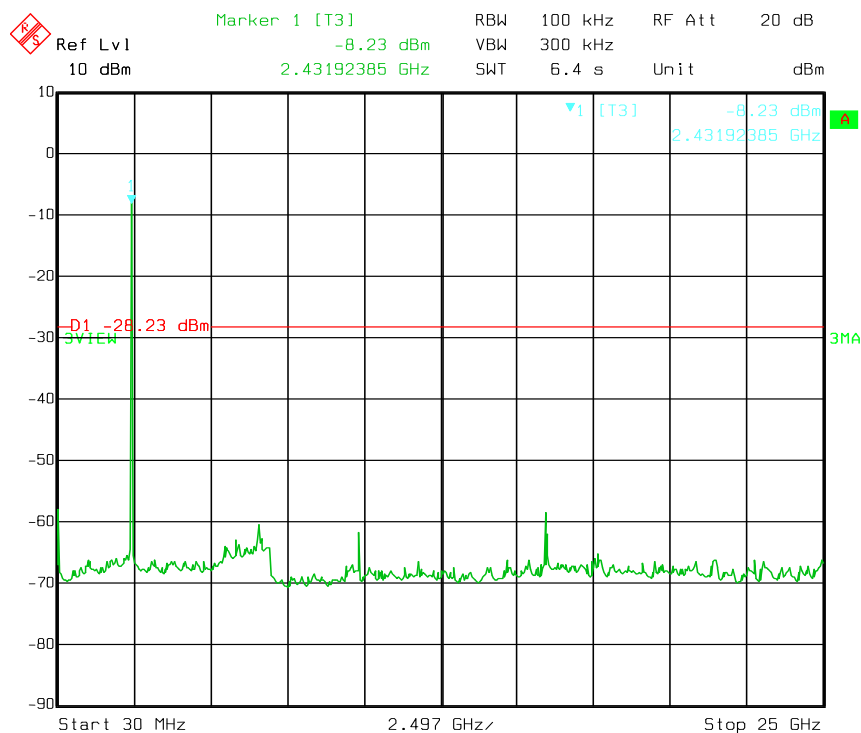

Note: Sweep points=1001pts


Test Mode: IEEE 802.11g mode

Low channel

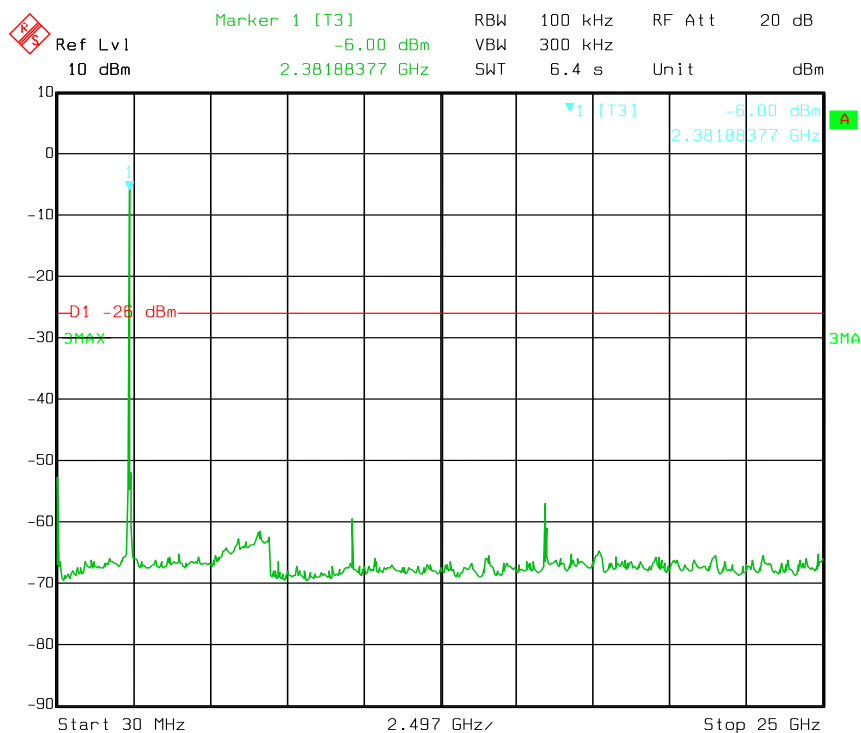


Note: Sweep points=1001pts

Middle channel

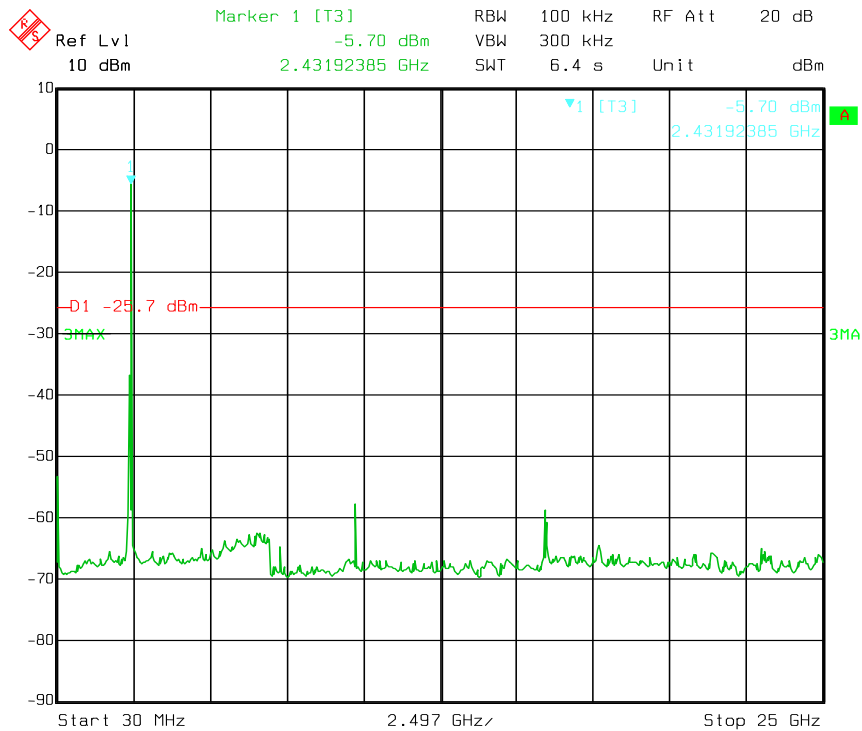

Note: Sweep points=1001pts


High channel

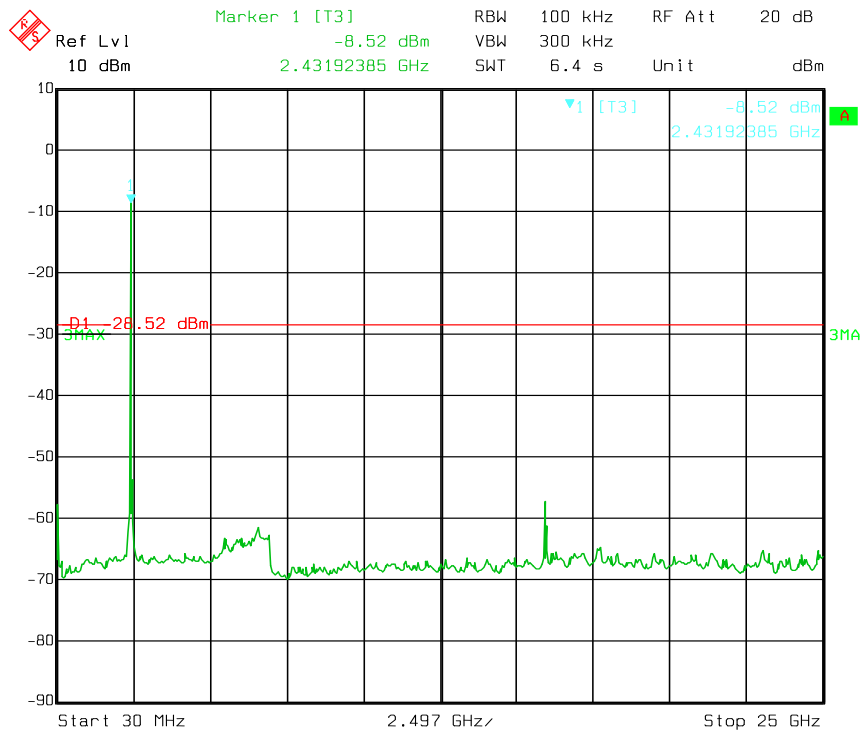

Note: Sweep points=1001pts


Test Mode: IEEE 802.11n(HT 20) mode

Low channel

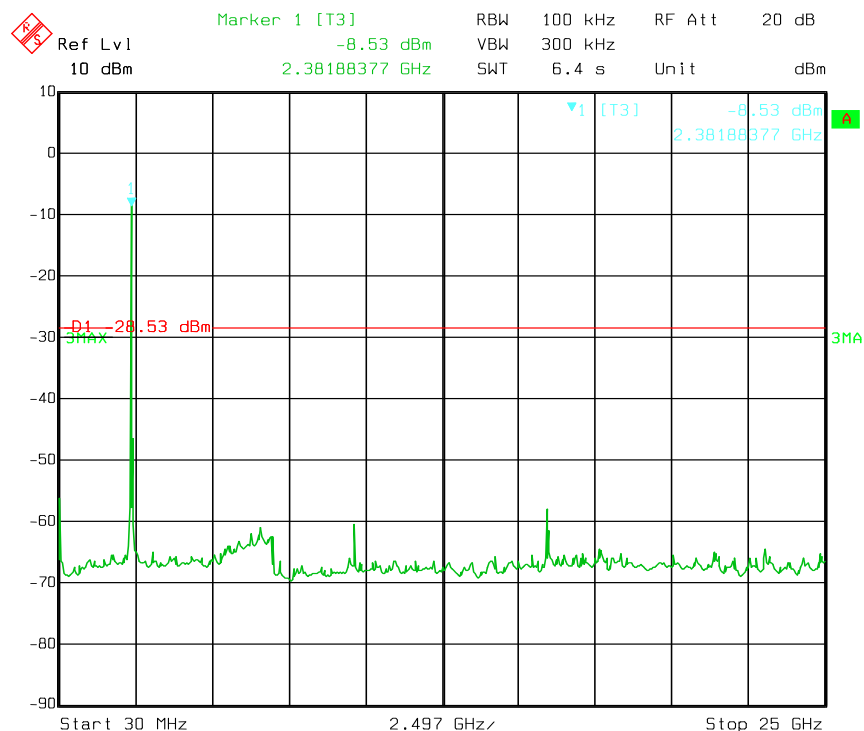


Note: Sweep points=1001pts

Middle channel

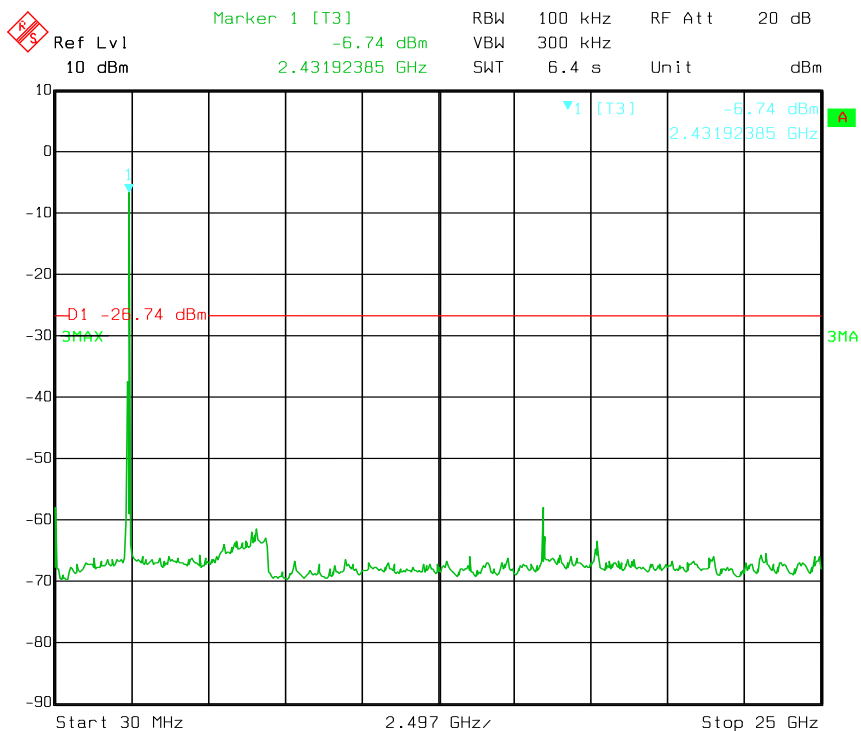

Note: Sweep points=1001pts


High channel

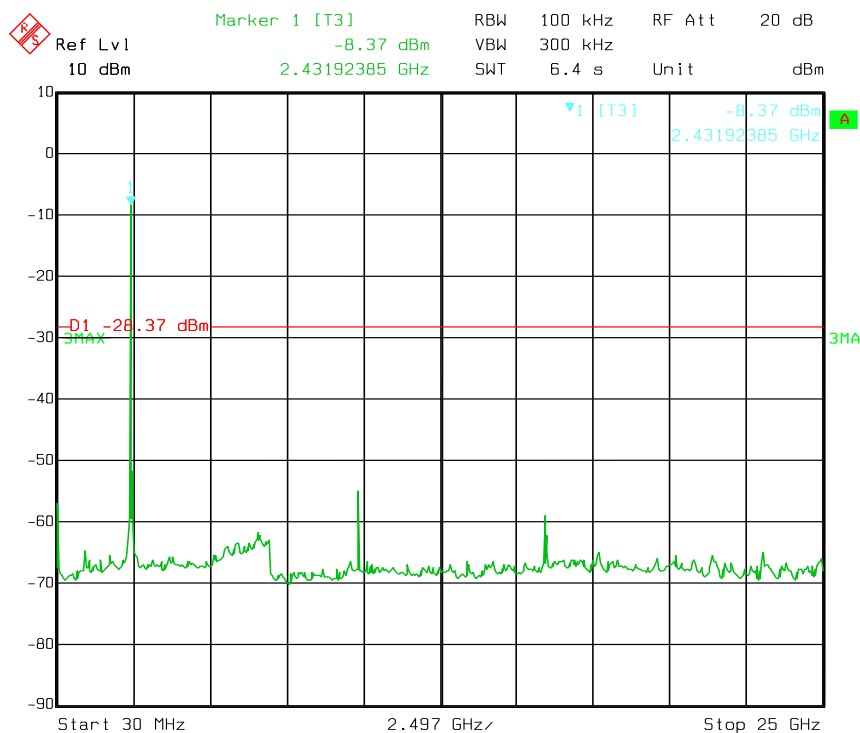

Note: Sweep points=1001pts


Test Mode: IEEE 802.11n(HT 40) mode

Low channel

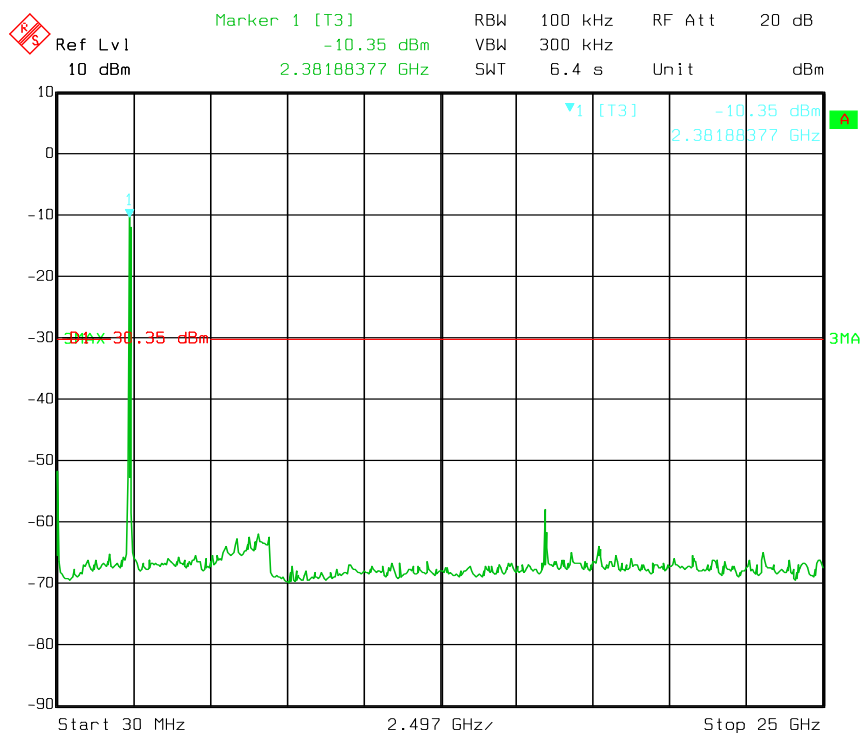


Note: Sweep points=1001pts

Middle channel

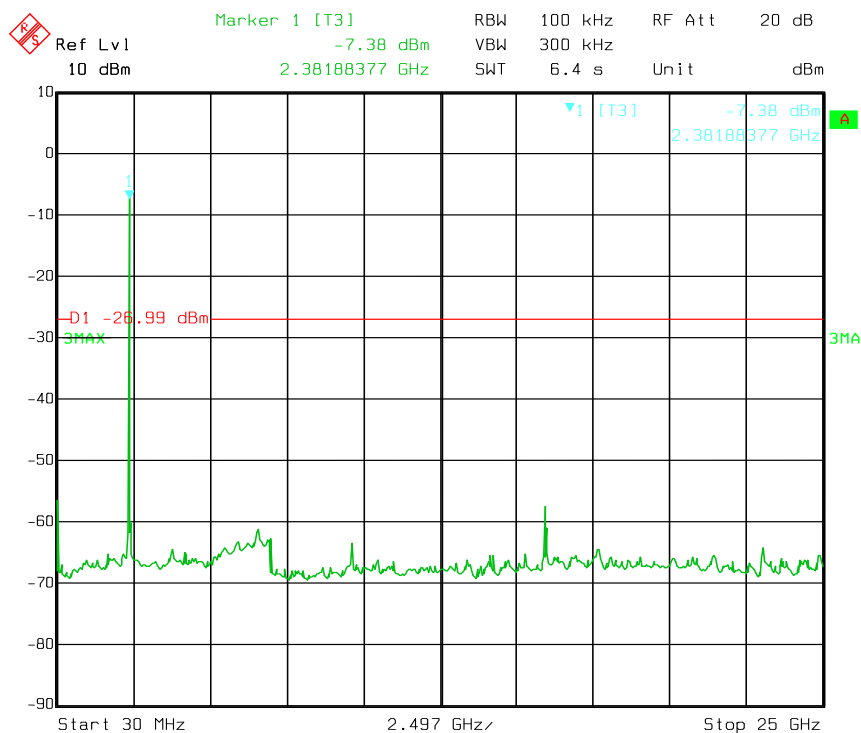

Note: Sweep points=1001pts

High channel

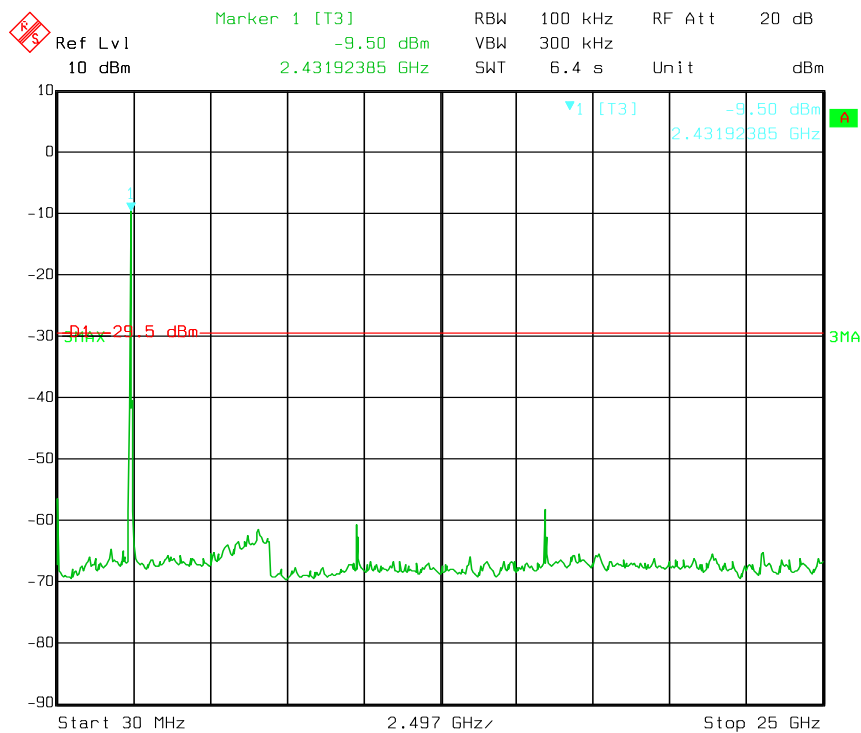


Note: Sweep points=1001pts

11.2 Radiated emissions Measurement


11.2.1 Test Method and test Procedure:

- 1) The EUT was tested according to ANSI C63.10 –2009.
- 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2009.
- 3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
- 4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- 5) The antenna polarization: Vertical polarization and Horizontal polarization.


Block diagram of Test setup

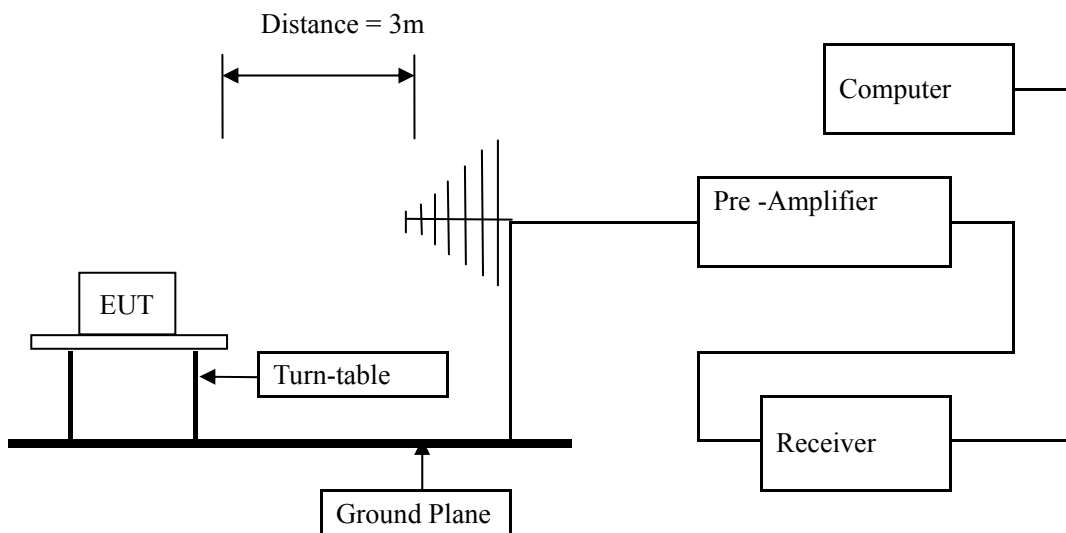

Block diagram of Test setup for frequency below 30MHz

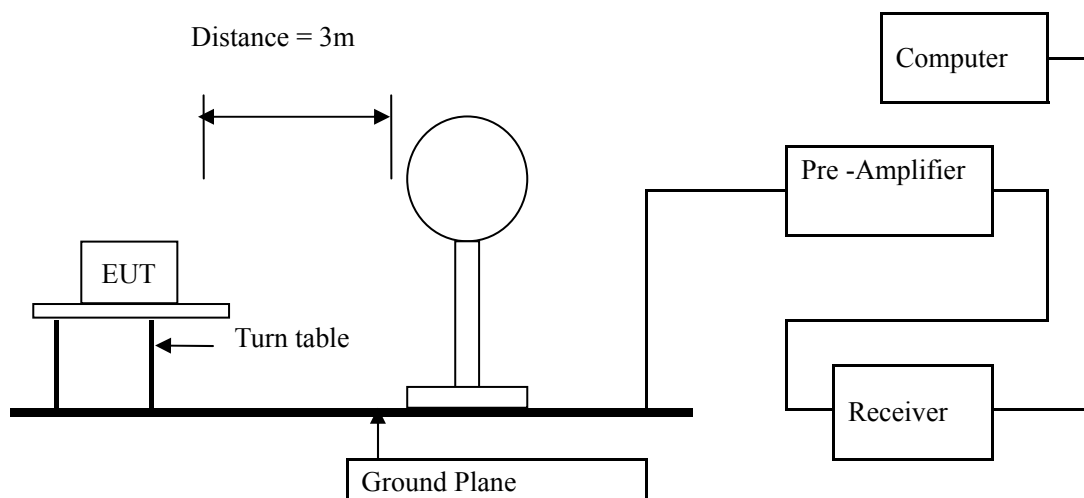

Block diagram of Test setup for frequency above 1GHz

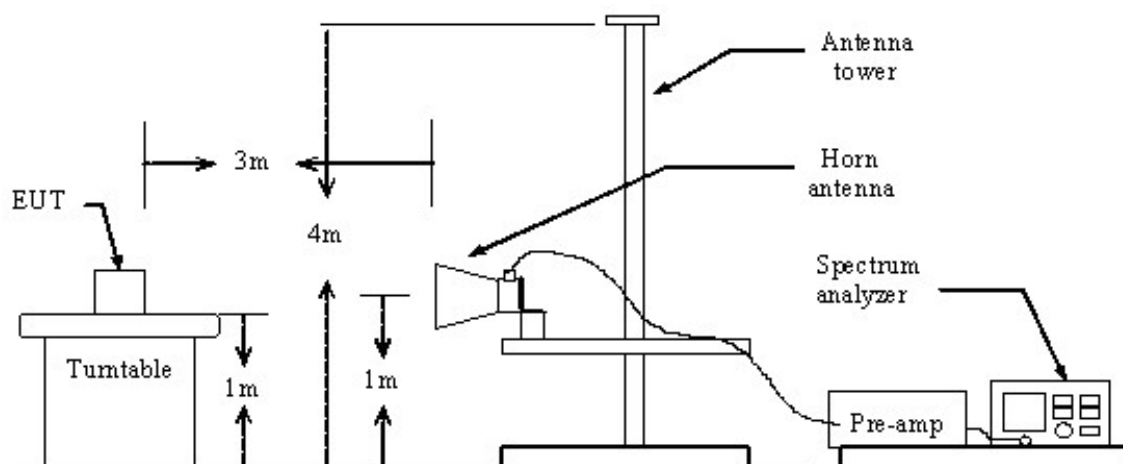

11.2.2 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009

11.2.3 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	$20\log 2400/F$ (kHz) + 80
0.490-1.705	3	$20\log 24000/F$ (kHz) + 40
1.705-30	3	$20\log 30$ + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:
- 1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
 - 2) In the Above Table, the tighter limit applies at the band edges.
 - 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
 - 4) This is a handheld device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
 - 5) All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz. As to 1G-25G, the final emission level got using PK and AV detector.
 - 6) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$

11.2.4 Test Equipment:

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 2, 2014	July 1, 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 3, 2014	July 2, 2015
Pre-amplifier	Teseq	LNA6900	--	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8447D	83153007374	July 3, 2014	July 2, 2015
Pre-amplifier	Agilent	8449B	3008A01738	July 3, 2014	July 2, 2015
Loop antenna	A.R.A.	PLA-1030/B	1029	July 3, 2014	July 2, 2015
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 3, 2014	July 2, 2015
Horn Antenna	ETS LINDGREN	3117	--	July 3, 2014	July 2, 2015
Horn Antenna	ETS LINDGREN	3160	--	July 3, 2014	July 2, 2015

11.2.5 Test specification:

Environmental conditions: Temperature 22° C Humidity: 51% Atmospheric pressure: 103kPa

11.2.6 Test result

A Radiated Emission (9 kHz----30 MHz)

Note: 1) Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor
2) The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Result: Pass


Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

B General Radiated Emissions Data

Please refer to following diagram for individual


Model: FC2405P

Radiated Emission In Horizontal (30MHz----1000MHz)

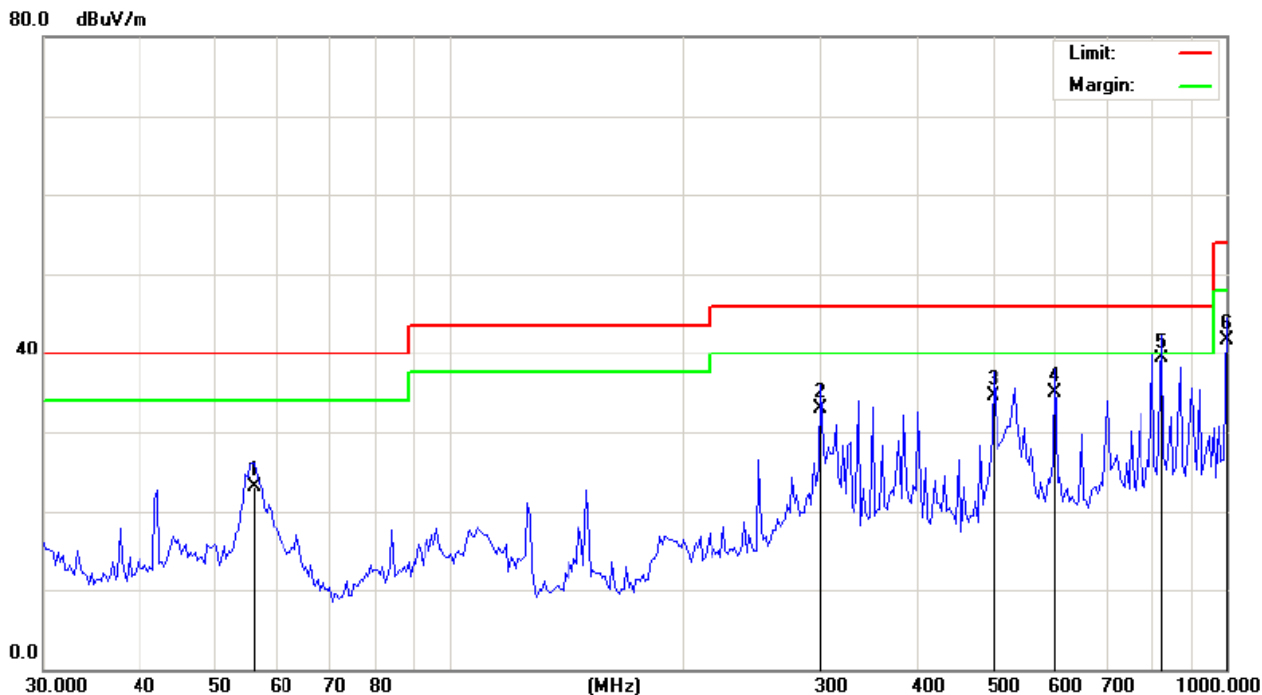

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
56.0708	23.14	H	40.00
300.6988	32.99	H	46.00
502.2473	34.42	H	46.00
602.9287	34.93	H	46.00
827.1795	39.38	H	46.00
1000.0000	41.73	H	54.00

Radiated Emission In Vertical (30MHz----1000MHz)

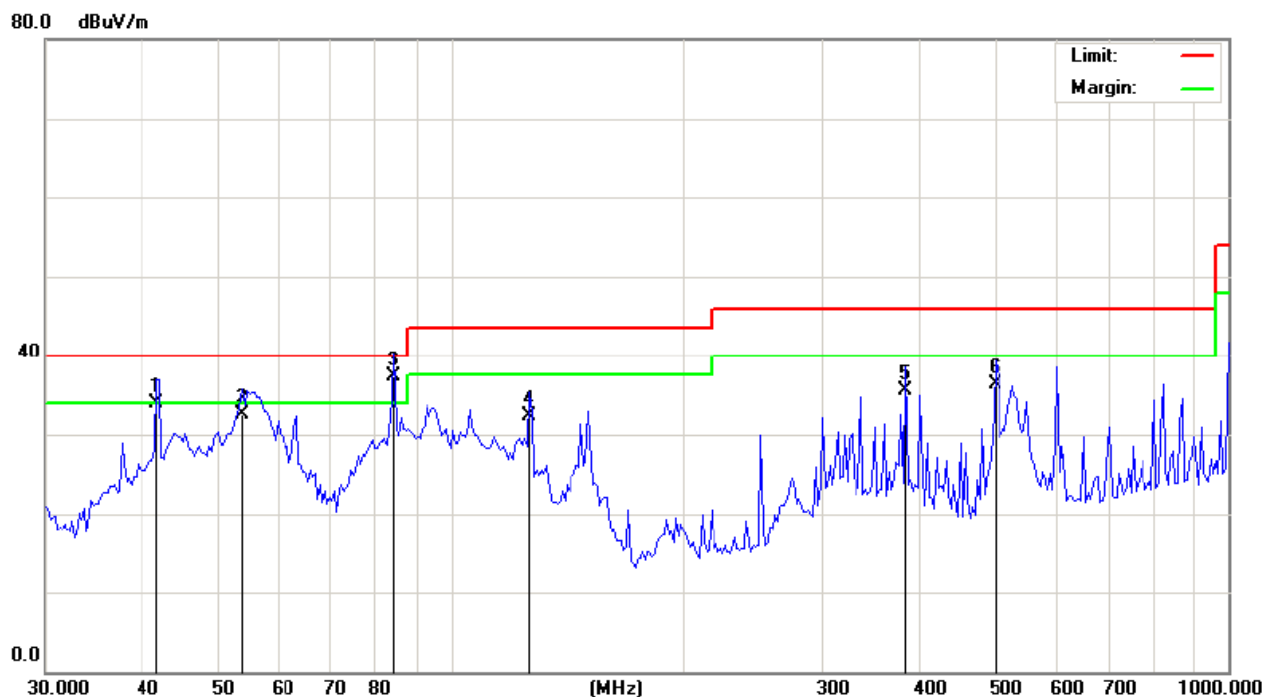


Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
41.7406	33.92	V	40.00
53.7560	32.52	V	40.00
84.2840	37.35	V	40.00
125.8060	32.28	V	43.50
384.5447	35.53	V	46.00
502.2473	36.35	V	46.00

Note: Measurements were conducted in all three channels (high, middle, low) with IEEE 802.11b mode, IEEE 802.11g mode, IEEE 802.11n(HT20), IEEE 802.11n(HT40), and the worst case (high channel in IEEE 802.11b mode) was submitted only.


Model: FC2403P

Radiated Emission In Horizontal (30MHz----1000MHz)

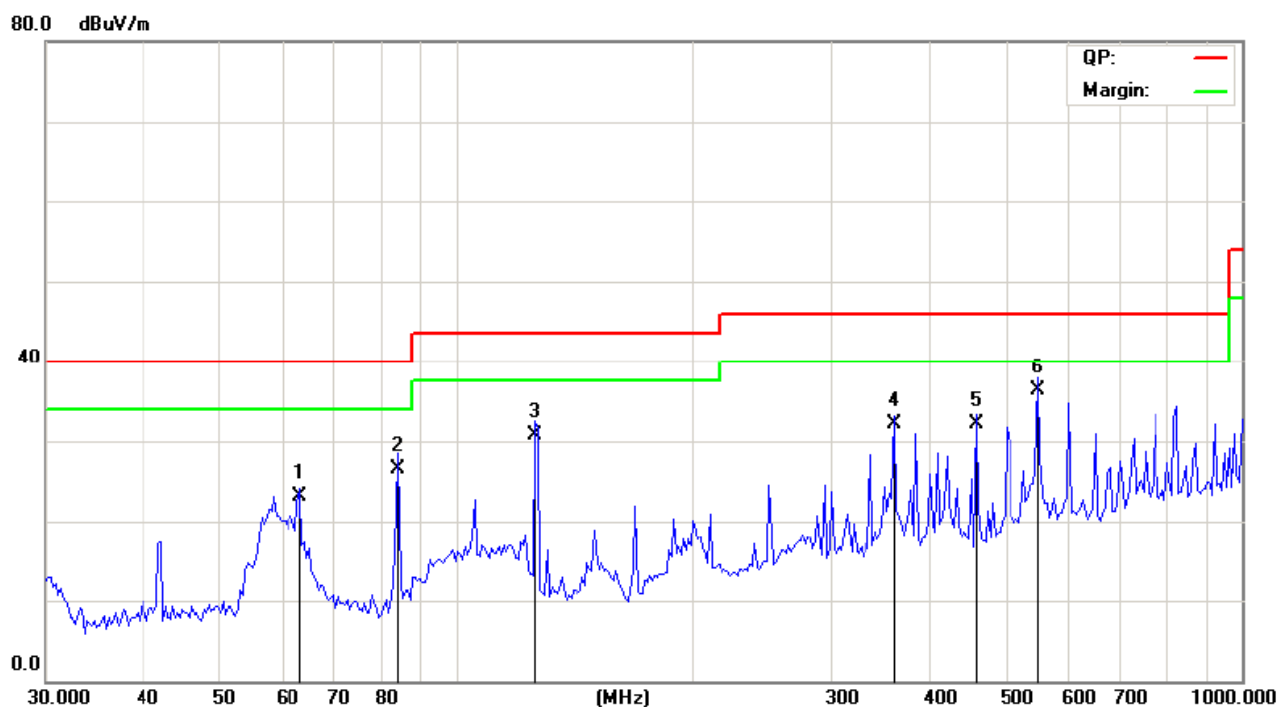

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
63.1857	23.08	H	40.00
84.2840	26.50	H	40.00
125.8060	30.73	H	43.50
360.9775	32.02	H	46.00
458.3987	32.07	H	46.00
550.2902	36.40	H	46.00

Radiated Emission In Vertical (30MHz----1000MHz)

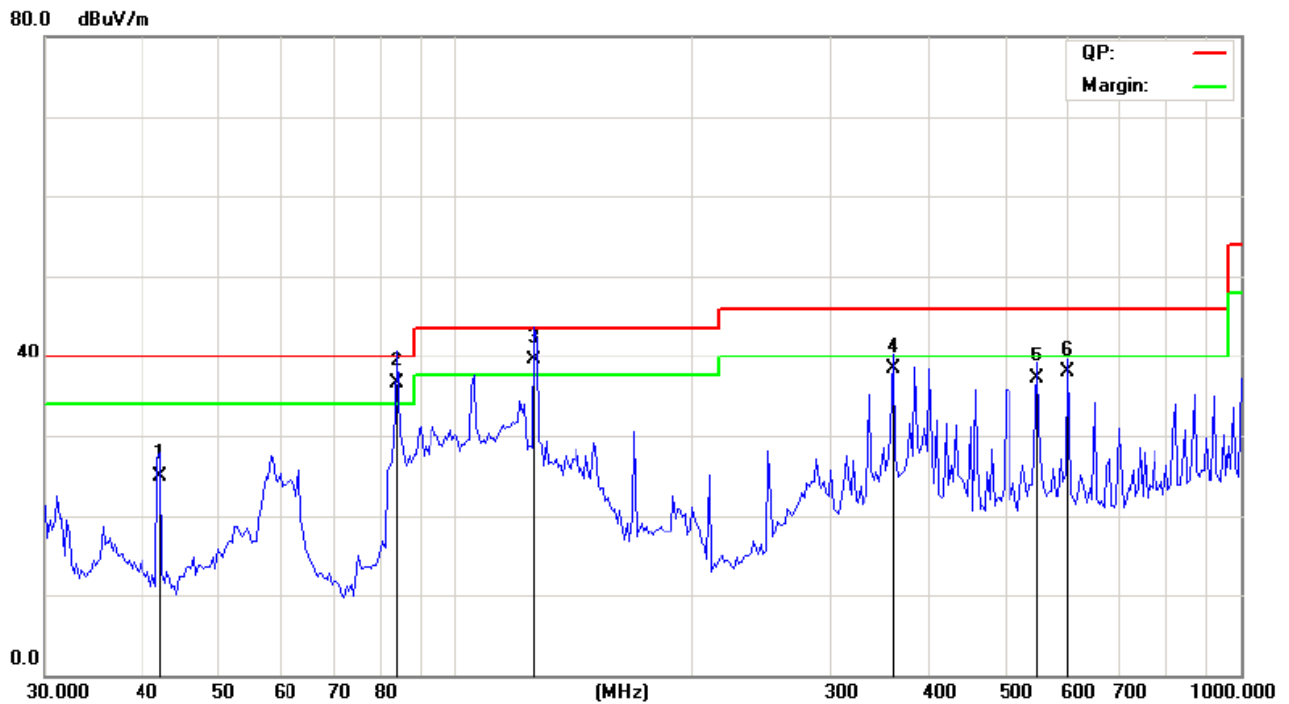

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
42.0349	24.81	V	40.00
84.2839	36.60	V	40.00
125.8058	39.53	V	43.50
360.9775	38.22	V	46.00
550.2902	37.10	V	46.00
602.9287	37.82	V	46.00

Note: Measurements were conducted in all three channels (high, middle, low) with IEEE 802.11b mode, IEEE 802.11g mode, IEEE 802.11n(HT20), IEEE 802.11n(HT40), and the worst case (high channel in IEEE 802.11b mode) was submitted only.

C Fundamental & Harmonics Radiated Emission Data (1000MHz-25000MHz)

IEEE 802.11b mode: Low channel: 2412 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.03	---	-4.20	46.83	---	74.00	54.00	-7.17
4824.00	H	52.76	---	-3.94	48.82	---	74.00	54.00	-5.18
5600.00	H	51.39	---	-2.83	48.56	---	74.00	54.00	-5.44
7236.00	H	48.61	---	0.52	49.13	---	74.00	54.00	-4.87
16884.00	H	43.01	---	6.73	49.74	---	74.00	54.00	-4.26
24120.00	H	40.91	---	8.11	49.02	---	74.00	54.00	-4.98
1310.01	V	51.63	---	-4.25	47.38	---	74.00	54.00	-6.62
4824.00	V	52.59	---	-3.94	48.65	---	74.00	54.00	-5.35
5600.00	V	52.74	---	-2.87	49.87	---	74.00	54.00	-4.13
7236.00	V	49.2	---	0.52	49.72	---	74.00	54.00	-4.28
16884.00	V	41.01	---	6.73	47.74	---	74.00	54.00	-6.26
24120.00	V	41.38	---	8.11	49.49	---	74.00	54.00	-4.51

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11b mode: Middle channel: 2437 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.99	---	-4.20	47.79	---	74.00	54.00	-6.21
4874.00	H	52.98	---	-3.98	49.00	---	74.00	54.00	-5.00
5600.00	H	52.19	---	-2.83	49.36	---	74.00	54.00	-4.64
7311.00	H	48.47	---	0.57	49.04	---	74.00	54.00	-4.96
17059.00	H	42.20	---	6.79	48.99	---	74.00	54.00	-5.01
24370.00	H	41.47	---	8.16	49.63	---	74.00	54.00	-4.37
1310.01	V	51.73	---	-4.25	47.48	---	74.00	54.00	-6.52
4874.00	V	51.73	---	-3.98	47.75	---	74.00	54.00	-6.25
5600.00	V	51.75	---	-2.87	48.88	---	74.00	54.00	-5.12
7311.00	V	48.16	---	0.57	48.73	---	74.00	54.00	-5.27
17059.00	V	41.18	---	6.79	47.97	---	74.00	54.00	-6.03
24370.00	V	41.34	---	8.16	49.50	---	74.00	54.00	-4.50

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11b mode: High channel: 2462 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	50.70	---	-4.20	46.50	---	74.00	54.00	-7.50
4924.00	H	52.54	---	-3.98	48.56	---	74.00	54.00	-5.44
5600.00	H	51.85	---	-2.83	49.02	---	74.00	54.00	-4.98
7386.00	H	48.33	---	0.57	48.90	---	74.00	54.00	-5.10
17234.00	H	43.24	---	6.79	50.03	---	74.00	54.00	-3.97
24620.00	H	41.46	---	8.16	49.62	---	74.00	54.00	-4.38
1310.01	V	52.35	---	-4.25	48.10	---	74.00	54.00	-5.90
4924.00	V	53.05	---	-3.98	49.07	---	74.00	54.00	-4.93
5600.00	V	51.90	---	-2.87	49.03	---	74.00	54.00	-4.97
7386.00	V	48.15	---	0.57	48.72	---	74.00	54.00	-5.28
17234.00	V	41.05	---	6.79	47.84	---	74.00	54.00	-6.16
24620.00	V	41.43	---	8.16	49.59	---	74.00	54.00	-4.41

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11g mode: Low channel: 2412 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.63	---	-4.20	47.43	---	74.00	54.00	-6.57
4824.00	H	51.02	---	-3.94	47.08	---	74.00	54.00	-6.92
5600.00	H	51.88	---	-2.83	49.05	---	74.00	54.00	-4.95
7236.00	H	46.56	---	0.52	47.08	---	74.00	54.00	-6.92
16884.00	H	42.15	---	6.73	48.88	---	74.00	54.00	-5.12
24120.00	H	41.15	---	8.11	49.26	---	74.00	54.00	-4.74
1310.01	V	49.92	---	-4.25	45.67	---	74.00	54.00	-8.33
4824.00	V	50.39	---	-3.94	46.45	---	74.00	54.00	-7.55
5600.00	V	50.07	---	-2.87	47.20	---	74.00	54.00	-6.80
7236.00	V	44.39	---	0.52	44.91	---	74.00	54.00	-9.09
16884.00	V	38.59	---	6.73	45.32	---	74.00	54.00	-8.68
24120.00	V	39.74	---	8.11	47.85	---	74.00	54.00	-6.15

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11g mode: Middle channel: 2437 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	50.58	---	-4.20	46.38	---	74.00	54.00	-7.62
4874.00	H	50.69	---	-3.98	46.71	---	74.00	54.00	-7.29
5600.00	H	50.51	---	-2.83	47.68	---	74.00	54.00	-6.32
7311.00	H	47.21	---	0.57	47.78	---	74.00	54.00	-6.22
17059.00	H	41.34	---	6.79	48.13	---	74.00	54.00	-5.87
24370.00	H	40.59	---	8.16	48.75	---	74.00	54.00	-5.25
1310.01	V	49.82	---	-4.25	45.57	---	74.00	54.00	-8.43
4874.00	V	50.97	---	-3.98	46.99	---	74.00	54.00	-7.01
5600.00	V	50.05	---	-2.87	47.18	---	74.00	54.00	-6.82
7311.00	V	47.74	---	0.57	48.31	---	74.00	54.00	-5.69
17059.00	V	40.49	---	6.79	47.28	---	74.00	54.00	-6.72
24370.00	V	38.75	---	8.16	46.91	---	74.00	54.00	-7.09

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11g mode: High channel: 2462 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.07	---	-4.20	46.87	---	74.00	54.00	-7.13
4924.00	H	50.50	---	-3.98	46.52	---	74.00	54.00	-7.48
5600.00	H	50.04	---	-2.83	47.21	---	74.00	54.00	-6.79
7386.00	H	46.65	---	0.57	47.22	---	74.00	54.00	-6.78
17234.00	H	40.95	---	6.79	47.74	---	74.00	54.00	-6.26
24620.00	H	40.70	---	8.16	48.86	---	74.00	54.00	-5.14
1310.01	V	50.71	---	-4.25	46.46	---	74.00	54.00	-7.54
4924.00	V	50.19	---	-3.98	46.21	---	74.00	54.00	-7.79
5600.00	V	49.73	---	-2.87	46.86	---	74.00	54.00	-7.14
7386.00	V	47.94	---	0.57	48.51	---	74.00	54.00	-5.49
17234.00	V	40.99	---	6.79	47.78	---	74.00	54.00	-6.22
24620.00	V	38.49	---	8.16	46.65	---	74.00	54.00	-7.35

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT20) mode: Low channel: 2412 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	50.40	---	-4.20	46.20	---	74.00	54.00	-7.80
4824.00	H	52.24	---	-3.94	48.30	---	74.00	54.00	-5.70
5600.00	H	50.75	---	-2.83	47.92	---	74.00	54.00	-6.08
7236.00	H	48.68	---	0.52	49.20	---	74.00	54.00	-4.80
16884.00	H	43.62	---	6.73	50.35	---	74.00	54.00	-3.65
24120.00	H	40.87	---	8.11	48.98	---	74.00	54.00	-5.02
1310.01	V	50.91	---	-4.25	46.66	---	74.00	54.00	-7.34
4824.00	V	51.92	---	-3.94	47.98	---	74.00	54.00	-6.02
5600.00	V	51.93	---	-2.87	49.06	---	74.00	54.00	-4.94
7236.00	V	48.71	---	0.52	49.23	---	74.00	54.00	-4.77
16884.00	V	40.17	---	6.73	46.90	---	74.00	54.00	-7.10
24120.00	V	41.02	---	8.11	49.13	---	74.00	54.00	-4.87

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT20) mode: Middle channel: 2437 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.50	---	-4.20	47.30	---	74.00	54.00	-6.70
4874.00	H	52.65	---	-3.98	48.67	---	74.00	54.00	-5.33
5600.00	H	51.77	---	-2.83	48.94	---	74.00	54.00	-5.06
7311.00	H	48.07	---	0.57	48.64	---	74.00	54.00	-5.36
17059.00	H	42.97	---	6.79	49.76	---	74.00	54.00	-4.24
24370.00	H	40.79	---	8.16	48.95	---	74.00	54.00	-5.05
1310.01	V	52.17	---	-4.25	47.92	---	74.00	54.00	-6.08
4874.00	V	51.56	---	-3.98	47.58	---	74.00	54.00	-6.42
5600.00	V	51.09	---	-2.87	48.22	---	74.00	54.00	-5.78
7311.00	V	48.37	---	0.57	48.94	---	74.00	54.00	-5.06
17059.00	V	40.88	---	6.79	47.67	---	74.00	54.00	-6.33
24370.00	V	42.04	---	8.16	50.20	---	74.00	54.00	-3.80

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT20) mode: High channel: 2462 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	50.58	---	-4.20	46.38	---	74.00	54.00	-7.62
4924.00	H	52.50	---	-3.98	48.52	---	74.00	54.00	-5.48
5600.00	H	52.06	---	-2.83	49.23	---	74.00	54.00	-4.77
7386.00	H	48.79	---	0.57	49.36	---	74.00	54.00	-4.64
17234.00	H	43.29	---	6.79	50.08	---	74.00	54.00	-3.92
24620.00	H	40.88	---	8.16	49.04	---	74.00	54.00	-4.96
1310.01	V	52.50	---	-4.25	48.25	---	74.00	54.00	-5.75
4924.00	V	54.97	---	-3.98	50.99	---	74.00	54.00	-3.01
5600.00	V	52.01	---	-2.87	49.14	---	74.00	54.00	-4.86
7386.00	V	48.02	---	0.57	48.59	---	74.00	54.00	-5.41
17234.00	V	40.56	---	6.79	47.35	---	74.00	54.00	-6.65
24620.00	V	41.63	---	8.16	49.79	---	74.00	54.00	-4.21

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT40) mode: Low channel: 2422 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.45	---	-4.20	47.25	---	74.00	54.00	-6.75
4844.00	H	52.86	---	-3.94	48.92	---	74.00	54.00	-5.08
5600.00	H	51.32	---	-2.83	48.49	---	74.00	54.00	-5.51
7266.00	H	48.38	---	0.52	48.90	---	74.00	54.00	-5.10
16954.00	H	43.39	---	6.73	50.12	---	74.00	54.00	-3.88
24220.00	H	40.52	---	8.11	48.63	---	74.00	54.00	-5.37
1310.01	V	51.00	---	-4.25	46.75	---	74.00	54.00	-7.25
4844.00	V	52.08	---	-3.94	48.14	---	74.00	54.00	-5.86
5600.00	V	52.04	---	-2.87	49.17	---	74.00	54.00	-4.83
7266.00	V	48.20	---	0.52	48.72	---	74.00	54.00	-5.28
16954.00	V	40.18	---	6.73	46.91	---	74.00	54.00	-7.09
24220.00	V	40.72	---	8.11	48.83	---	74.00	54.00	-5.17

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(HT40) mode: Middle channel: 2437 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.87	---	-4.20	47.67	---	74.00	54.00	-6.33
4874.00	H	52.71	---	-3.98	48.73	---	74.00	54.00	-5.27
5600.00	H	51.79	---	-2.83	48.96	---	74.00	54.00	-5.04
7311.00	H	48.61	---	0.57	49.18	---	74.00	54.00	-4.82
17059.00	H	43.68	---	6.79	50.47	---	74.00	54.00	-3.53
24370.00	H	41.15	---	8.16	49.31	---	74.00	54.00	-4.69
1310.01	V	52.54	---	-4.25	48.29	---	74.00	54.00	-5.71
4874.00	V	52.75	---	-3.98	48.77	---	74.00	54.00	-5.23
5600.00	V	51.98	---	-2.87	49.11	---	74.00	54.00	-4.89
7311.00	V	48.16	---	0.57	48.73	---	74.00	54.00	-5.27
17059.00	V	40.50	---	6.79	47.29	---	74.00	54.00	-6.71
24370.00	V	41.71	---	8.16	49.87	---	74.00	54.00	-4.13

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

IEEE 802.11n(H40) mode: High channel: 2452 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1299.89	H	51.69	---	-4.20	47.49	---	74.00	54.00	-6.51
4904.00	H	52.71	---	-3.98	48.73	---	74.00	54.00	-5.27
5600.00	H	51.97	---	-2.83	49.14	---	74.00	54.00	-4.86
7356.00	H	48.59	---	0.57	49.16	---	74.00	54.00	-4.84
17164.00	H	41.86	---	6.79	48.65	---	74.00	54.00	-5.35
24520.00	H	40.69	---	8.16	48.85	---	74.00	54.00	-5.15
1310.01	V	52.31	---	-4.25	48.06	---	74.00	54.00	-5.94
4904.00	V	52.57	---	-3.98	48.59	---	74.00	54.00	-5.41
5600.00	V	51.69	---	-2.87	48.82	---	74.00	54.00	-5.18
7356.00	V	48.48	---	0.57	49.05	---	74.00	54.00	-4.95
17164.00	V	40.47	---	6.79	47.26	---	74.00	54.00	-6.74
24520.00	V	41.14	---	8.16	49.30	---	74.00	54.00	-4.70

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made with peak detector and Average (AV) detector.

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

12.0 Antenna Requirement

12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Specification

According to the manufacturer declared, the EUT has a reverse-polarity SMA; the directional gain of antenna is 2 dBi, and A reverse SMA connector is considered unique. Therefore the EUT is considered sufficient to comply with the provision.



Antenna

****END OF REPORT****