

FCC TEST REPORT

Product Name : Bluetooth Mouse
Trade mark : N/A
Model No. : BM-130
Extension Model : BM-786,BM-106,BM-786C,BM-782, BM-660,BM-700,BM-698,BM-693, BM-697,BM-105,BM-127,BM-783, BM-695S
FCC ID : 2AB75-BM-130
Report Number : BLA-EMC-202006-A8004
Date of sample receipt : 2020/6/30
Date of Test : 2020/8/3 to 2020/8/7
Date of Issue : 2020/8/7
Test Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.249
Test result : PASS

Prepared for:

ShenZhen Wintop Electronics Co., Ltd
No 46 XinHe RoadShangMuGu Community,PingHu Street,LongGang District,ShenZhen City,GuangDong Province,China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

TEL: +86-755-28682673

FAX: +86-755-28682673

Tested by:

Jason

Reviewed by:

Sweet. Liang

Approved by:

Jamen Li

Date:

2020/8/7



2 Version

Version No.	Date	Description
<i>00</i>	<i>2020/8/7</i>	<i>Original</i>

BlueAsia

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15 Subpart C Section 15.249 (a)	ANSI C63.10-2013	PASS
Spurious Emissions	47 CFR Part 15 Subpart C Section 15.249 (a)/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.249(a)/15.205	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.215 (c)	ANSI C63.10-2013	PASS

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not Applicable

4 Contents

	Page
.....	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
5.4 TEST ENVIRONMENT AND MODE	7
5.5 DESCRIPTION OF SUPPORT UNITS	7
5.6 TEST LOCATION	7
5.7 TEST FACILITY	7
5.8 DEVIATION FROM STANDARDS	8
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.11 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
6 EQUIPMENT LIST	10
7 TEST RESULTS AND MEASUREMENT DATA	12
7.1 ANTENNA REQUIREMENT	12
7.2 CONDUCTED EMISSIONS	12
7.3 RADIATED EMISSION	16
7.4 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	23
7.5 20DB BANDWIDTH	26
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	28
APPENDIX 2 PHOTOGRAPHS OF EUT	29

5 General Information

5.1 Client Information

Applicant:	ShenZhen Wintop Electronics Co.,Ltd
Address of Applicant:	No 46 XinHe RoadShangMuGu Community,PingHu Street,LongGang District,ShenZhen City,GuangDong Province,China
Manufacturer:	ShenZhen Wintop Electronics Co.,Ltd
Address of Manufacturer:	Room 402 Building 1 No.34 XinHe Road, No 46 XinHe Road, Floor 4 No.50 XinHe Road ShangMuGu Community,PingHu Street,LongGang District,ShenZhen City,GuangDong Province,China
Factory:	N/A
Address of Factory:	N/A

5.2 General Description of EUT

Product Name:	Bluetooth Mouse
Mode No.(EUT):	BM-130
Add Mode No.:	BM-786,BM-106,BM-786C,BM-782, BM-660,BM-700,BM-698,BM-693, BM-697,BM-105,BM-127,BM-783, BM-695S
Trade Mark:	N/A
EUT Supports Radios application:	2.4GHz Wireless
Power Supply:	DC3.7V

5.3 Product Specification subjective to this standard

Frequency Range:	2405 MHz ~ 2474MHz
Frequency Band:	2.4GHz ISM band
Hardware:	BM-130 V1.0
Software:	V1.0
Channel Spacing:	≥2MHz
Modulation Type:	GFSK
Number of Channels:	12 (declared by the client)
Sample Type:	Portable production(mobile production ;fixed production)
Antenna Type:	PCB ANT
Antenna Gain:	0dBi(declared by the client)

Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1CH	2405 MHz	5CH	2430 MHz	9CH	2458 MHz
2CH	2407 MHz	6CH	2437 MHz	10CH	2469 MHz
3CH	2418 MHz	7CH	2442 MHz	11CH	2471 MHz
4CH	2426 MHz	8CH	2447 MHz	12CH	2474 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	2405MHz
The Middle channel(CH20)	2442MHz
The Highest channel(CH39)	2474MHz

5.4 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.(new battery is used)

5.5 Description of Support Units

The EUT has been tested independently and or

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook computer	Lenovo	E470C	PF-10FB5C	/
/	/	/	/	/

2) cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

5.6 Test Location

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC — Designation No.: CN1252

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

ISED — CAB identifier No.: CN0028

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

BlueAsia

5.11 Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

6 Equipment List

Test Equipment Of Radiated Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2020	7/3/2021
Receiver	R&S	ESR7	101199	4/20/2020	4/19/2021
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2019	7/13/2021
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2019	7/13/2021
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2020	7/3/2021
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2022
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
 Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
 Email: marketing@cblueasia.com

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	6/10/2018	6/9/2021
Receiver	R&S	ESPI3	101082	4/20/2020	4/19/2021
LISN	R&S	ENV216	3560.6550.15	7/4/2020	7/3/2021
LISN	AT	AT166-2	AKK1806000003	12/17/2019	12/16/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

7 Test results and Measurement Data

7.1 Antenna Requirement

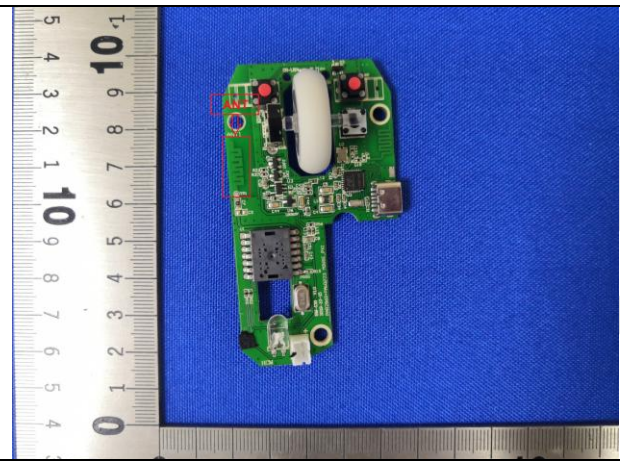Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.0dBi.	

7.2 Conducted Emissions

Test Requirement: 47 CFR Part 15C Section 15.207
Test Method: ANSI C63.10
Test Frequency Range: 150KHz to 30MHz

Limit:	Frequency range (MHz)	Limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

* Decreases with the logarithm of the frequency.

- Test Procedure:**
- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
 - 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
 - 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
 - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
 Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
 Email: marketing@cblueasia.com

top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Test Setup:

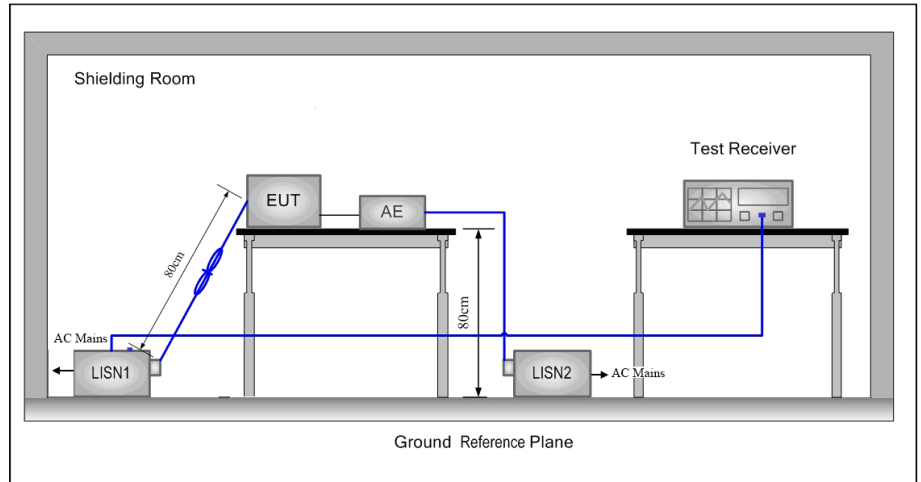

Test Mode:


Keep the EUT in transmitting mode

Instruments Used:

Refer to section 5.11 for details

Test Results:

Pass

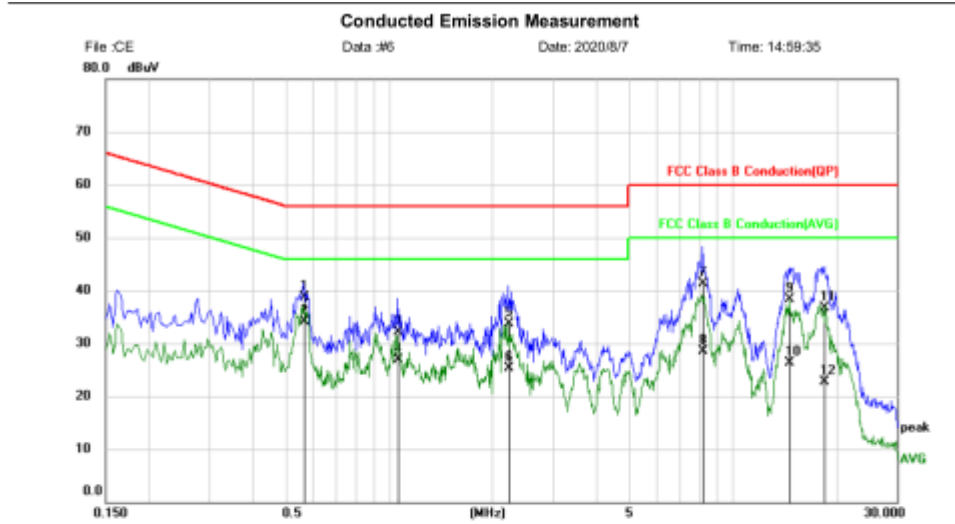TEST Data:
LINE: NEUTRAL AC120V60Hz


File :CE Data :#6 Date: 2020/8/7 Time: 14:59:35
 Site: Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: DC3.3V Humidity: 60 %
 EUT: Bluetooth Mouse
 M/N: BM-130
 Mode: 2.4G TX mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.5660	28.96	9.73	38.69	56.00	-17.31	QP	
2	*	0.5660	24.30	9.73	34.03	46.00	-11.97	AVG	
3		1.0620	22.29	9.80	32.09	56.00	-23.91	QP	
4		1.0620	17.12	9.80	26.92	46.00	-19.08	AVG	
5		2.2340	23.79	9.86	33.65	56.00	-22.35	QP	
6		2.2340	15.47	9.86	25.33	46.00	-20.67	AVG	
7		8.1700	31.46	9.88	41.34	60.00	-18.66	QP	
8		8.1700	18.58	9.88	28.46	50.00	-21.54	AVG	
9		14.6340	28.26	10.01	38.27	60.00	-21.73	QP	
10		14.6340	16.28	10.01	26.29	50.00	-23.71	AVG	
11		18.5060	26.69	10.07	36.76	60.00	-23.24	QP	
12		18.5060	12.63	10.07	22.70	50.00	-27.30	AVG	

TEST RESULT: PASS


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

LINE: LINE AC120V60Hz

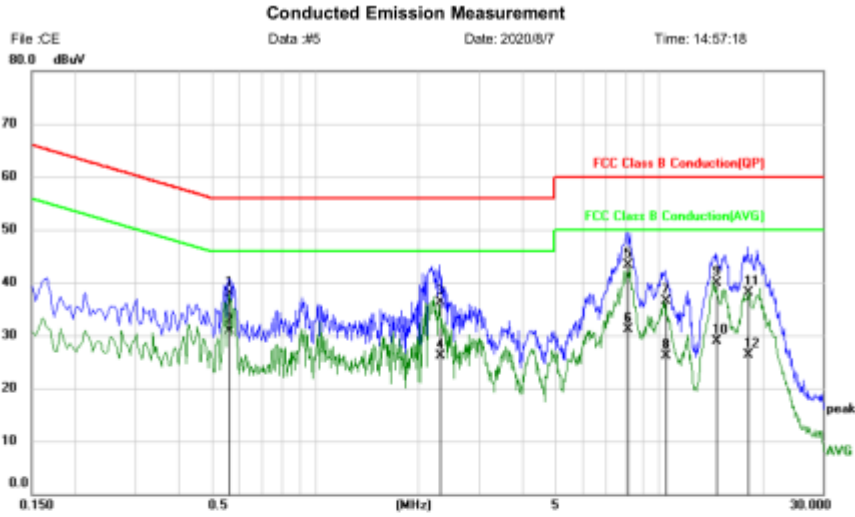

Site: _____ Phase: **L1** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: DC3.3V Humidity: 60 %
 EUT: Bluetooth Mouse
 M/N: BM-130
 Mode: 2.4G TX mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.5620	28.19	9.74	37.93	56.00	-18.07	QP	
2	*	0.5620	21.24	9.74	30.98	46.00	-15.02	AVG	
3		2.2980	26.57	9.81	36.38	56.00	-19.62	QP	
4		2.2980	16.35	9.81	26.16	46.00	-19.84	AVG	
5		8.1100	33.35	9.88	43.23	60.00	-16.77	QP	
6		8.1100	21.31	9.88	31.19	50.00	-18.81	AVG	
7		10.4700	26.57	9.95	36.52	60.00	-23.48	QP	
8		10.4700	16.21	9.95	26.16	50.00	-23.84	AVG	
9		14.7300	29.99	9.97	39.96	60.00	-20.04	QP	
10		14.7300	18.86	9.97	28.83	50.00	-21.17	AVG	
11		18.1540	28.05	10.01	38.06	60.00	-21.94	QP	
12		18.1540	16.23	10.01	26.24	50.00	-23.76	AVG	

TEST RESULT: PASS

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

7.3 Radiated Emission

Test Requirement: 47 CFR Part 15C Section 15.249 and 15.209

Test Method: ANSI C63.10

Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Setup:

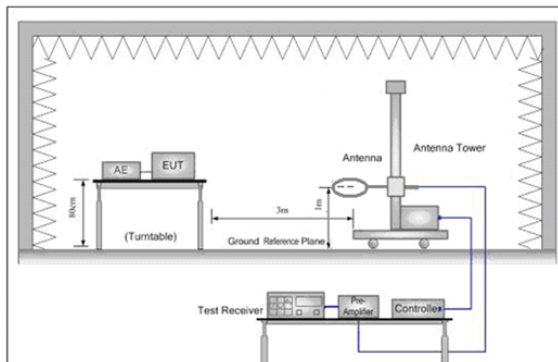


Figure 1. Below 30MHz

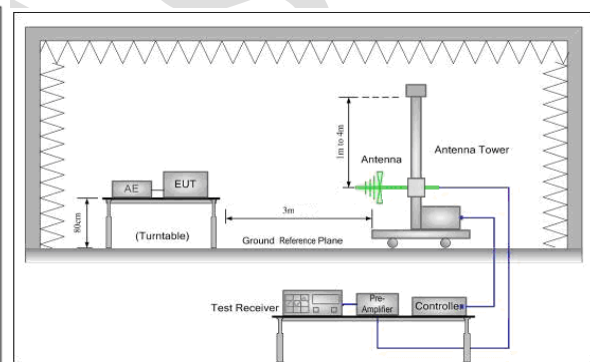


Figure 2. 30MHz to 1GHz

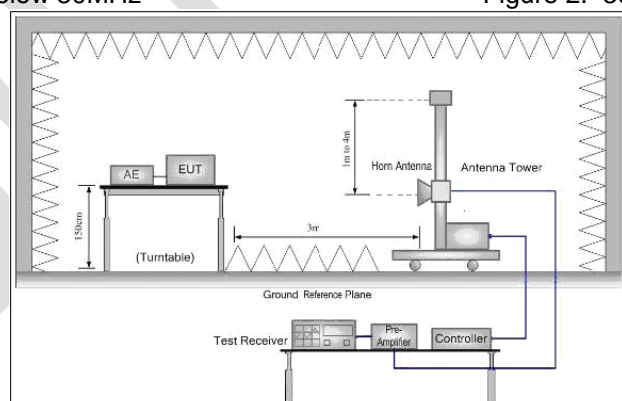


Figure 3. Above 1GHz

Test Procedure:

Below 1GHz test procedure as below:

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

Test the EUT in the lowest channel ,middle channel, the Highest channel

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

Repeat above procedures until all frequencies measured was complete.

Limit:
(Spurious Emissions)

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Limit:
(Field strength of the fundamental signal)

Frequency	Limit (dB μ V/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

Instruments Used: Refer to section 5.11 for details

Exploratory Test Mode: Transmitting mode

Final Test Mode: Pretest the EUT at Transmitting mode

Test Results: Pass

Measurement Data
Field Strength Of The Fundamental Signal

Peak value:

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Antenna Polaxis
2405	102.84	-3.83	99.01	114.00	-14.99	H
2405	95.03	-4.17	90.86	114.00	-23.14	V
2442	101.52	-3.62	97.90	114.00	-16.10	H
2442	94.62	-3.98	90.64	114.00	-23.36	V
2474	99.86	-3.40	96.46	114.00	-17.54	H
2474	92.01	-3.79	88.22	114.00	-25.78	V

Average value:


Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Antenna Polaxis
2405	81.45	-3.83	77.62	94.00	-16.38	H
2405	79.61	-4.17	75.44	94.00	-18.56	V
2442	81.02	-3.62	77.40	94.00	-16.60	H
2442	75.23	-3.98	71.25	94.00	-22.75	V
2474	78.74	-3.40	75.34	94.00	-18.66	H
2474	73.88	-3.79	70.09	94.00	-23.91	V

NOTE: RBW 3MHz VBW 10MHz , PK detector is for PK value ,RMS detector is for AV value.

Spurious Emissions
30MHz~1GHz (QP)
Test mode: Transmitting

Horizontal:

72.0 dBuV/m

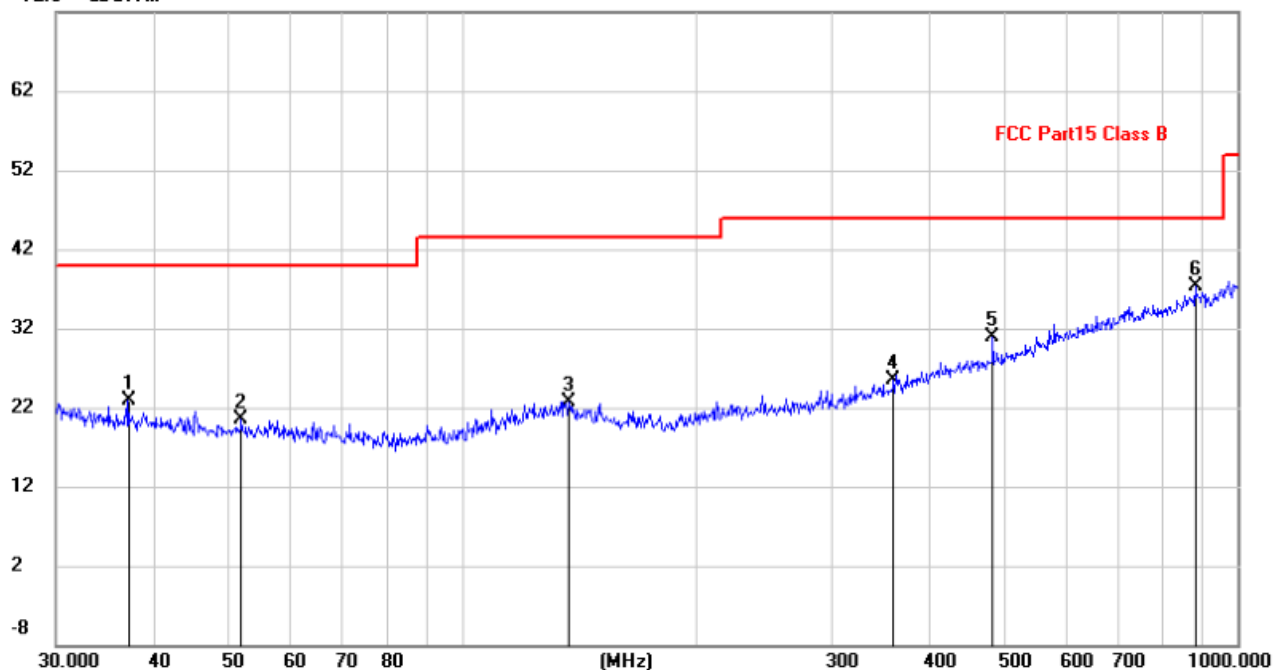


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		37.1550	-0.70	23.66	22.96	40.00	-17.04	QP
2		52.0251	-3.69	24.27	20.58	40.00	-19.42	QP
3		137.4202	-0.46	23.22	22.76	43.50	-20.74	QP
4		360.4476	-0.27	25.77	25.50	46.00	-20.50	QP
5		483.9094	2.18	28.68	30.86	46.00	-15.14	QP
6	*	881.4067	2.25	35.08	37.33	46.00	-8.67	QP

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

 IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
 Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
 Email: marketing@cblueasia.com

Vertical:

72.0 dBuV/m

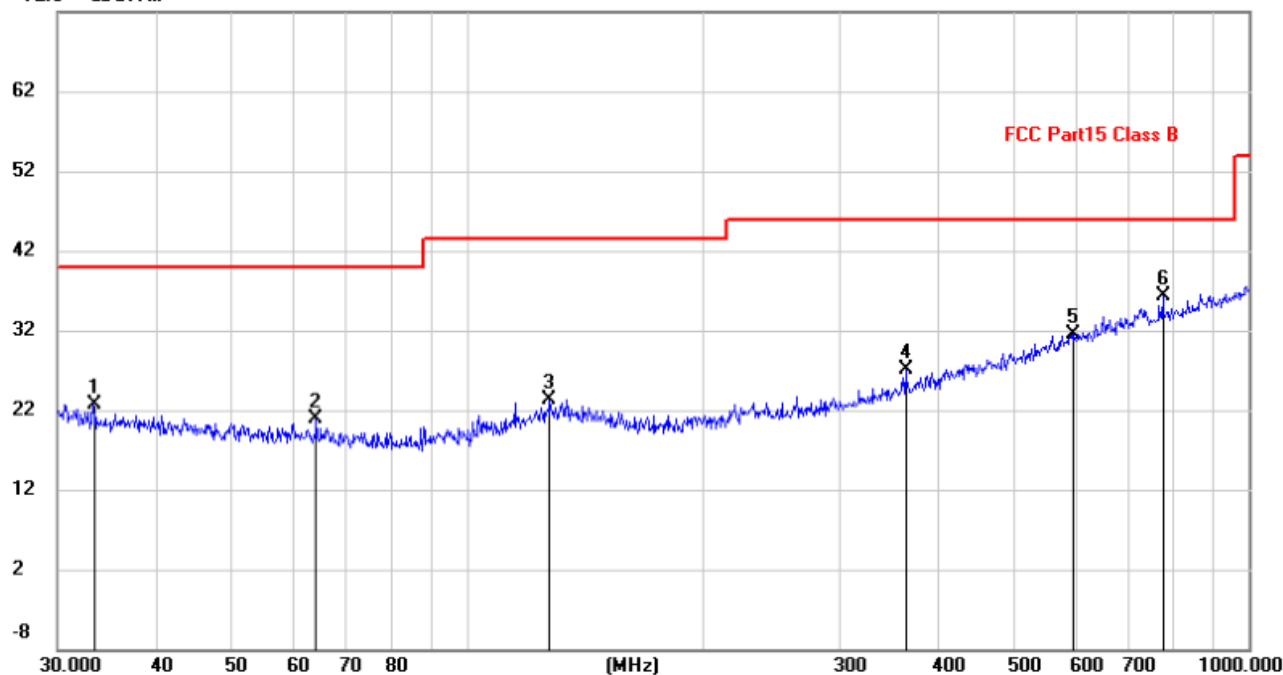

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		33.3279	-0.34	22.96	22.62	40.00	-17.38	QP
2		64.2074	-1.57	22.45	20.88	40.00	-19.12	QP
3		127.6645	0.36	22.92	23.28	43.50	-20.22	QP
4		364.2595	1.17	25.89	27.06	46.00	-18.94	QP
5		597.2234	0.32	31.15	31.47	46.00	-14.53	QP
6	*	776.8778	2.39	33.93	36.32	46.00	-9.68	QP

Above 1GHz						
Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Antenna Polaxis
4810.00	46.36	2.38	48.74	74.00	-25.26	H
7215.00	45.21	7.58	52.79	74.00	-21.21	H
9620.00	46.09	7.62	53.71	74.00	-20.29	H
4810.00	47.26	2.38	49.64	74.00	-24.36	V
7215.00	45.89	7.58	53.47	74.00	-20.53	V
9620.00	45.23	7.62	52.85	74.00	-21.15	V

Test mode:	Transmitting	Test channel:	Middle	Remark:	Peak	
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Antenna Polaxis
4884.00	48.56	0.17	48.73	74.00	-25.27	H
7326.00	46.07	7.60	53.67	74.00	-20.33	H
9768.00	45.78	7.62	53.40	74.00	-20.60	H
4884.00	48.84	0.17	49.01	74.00	-24.99	V
7326.00	46.15	7.60	53.75	74.00	-20.25	V
9768.00	45.53	7.62	53.15	74.00	-20.85	V

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

 IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
 Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
 Email: marketing@cblueasia.com

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Antenna Polaxis
4950.00	49.26	1.04	50.30	74.00	-23.70	H
7425.00	46.03	7.55	53.58	74.00	-20.42	H
9900.00	45.26	7.63	52.89	74.00	-21.11	H
4950.00	48.15	1.04	49.19	74.00	-24.81	V
7425.00	45.57	7.55	53.12	74.00	-20.88	V
9900.00	46.28	7.63	53.91	74.00	-20.09	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Correct Factor
Correct Factor = Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

7.4 Restricted bands around fundamental frequency

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205
Test Method: ANSI C63.10
Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)
Test Setup:

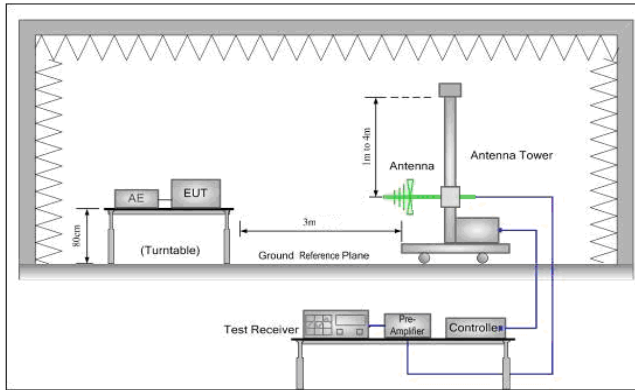


Figure 1. 30MHz to 1GHz

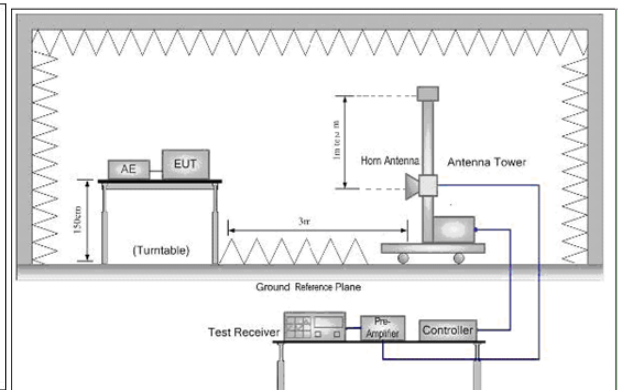


Figure 2. Above 1 GHz

Test Procedure:

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel,,the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Limit(band edge): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

Instruments Used: Refer to section 5.11 for details
Exploratory Test Mode: Transmitting mode
 Pretest the EUT at Transmitting mode
Final Test Mode:
Test Results: Pass

Band edge test data (Radiated Emission)

Test channel:	Lowest			Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	52.36	-4.20	48.16	74.00	-25.84	Horizontal
2390.00	69.87	-3.88	65.99	74.00	-8.01	Horizontal
2400.00	73.48	-3.83	69.65	74.00	-4.35	Horizontal
2310.00	47.71	-4.49	43.22	74.00	-30.78	Vertical
2390.00	68.53	-4.21	64.32	74.00	-9.68	Vertical
2400.00	70.04	-4.17	65.87	74.00	-8.13	Vertical

Test channel:	Lowest			Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	40.22	-4.20	36.02	54.00	-17.98	Horizontal
2390.00	38.45	-3.88	34.57	54.00	-19.43	Horizontal
2400.00	51.36	-3.83	47.53	54.00	-6.47	Horizontal
2310.00	38.88	-4.49	34.39	54.00	-19.61	Vertical
2390.00	39.32	-4.21	35.11	54.00	-18.89	Vertical
2400.00	50.19	-4.17	46.02	54.00	-7.98	Vertical

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
 Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
 Email: marketing@cblueasia.com

Test channel:	Highest			Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	60.02	-3.38	56.64	74.00	-17.36	Horizontal
2500.00	58.48	-3.30	55.18	74.00	-18.82	Horizontal
2483.50	68.81	-3.77	65.04	74.00	-8.96	Vertical
2500.00	52.03	-3.70	48.33	74.00	-25.67	Vertical

Test channel:	Highest			Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.53	-3.38	40.15	54.00	-13.85	Horizontal
2500.00	40.09	-3.30	36.79	54.00	-17.21	Horizontal
2483.50	48.62	-3.77	44.85	54.00	-9.15	Vertical
2500.00	37.41	-3.70	33.71	54.00	-20.29	Vertical

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Correct Factor


Correct Factor = Antenna Factor + Cable Factor - Pre-amplifier Factor

7.5 20dB Bandwidth

Test Requirement: 47 CFR Part 15C Section 15.215

Test Method: ANSI C63.10

Test Setup:

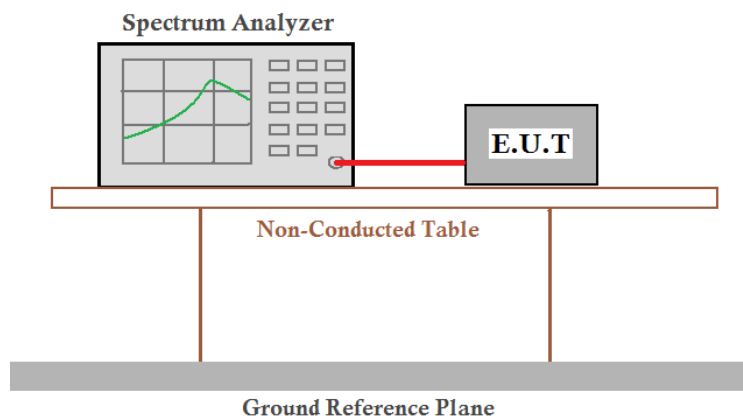

Instruments Used: Refer to section 5.11 for details

Exploratory Test Mode: Transmitting mode
Pretest the EUT at Transmitting mode




Final Test Mode:

Limit: N/A
Test Results: Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	1.860	Pass
Middle	1.992	Pass
Highest	2.136	Pass

Test plot as follows:

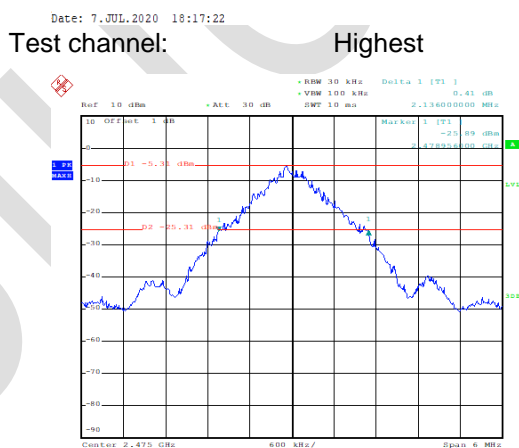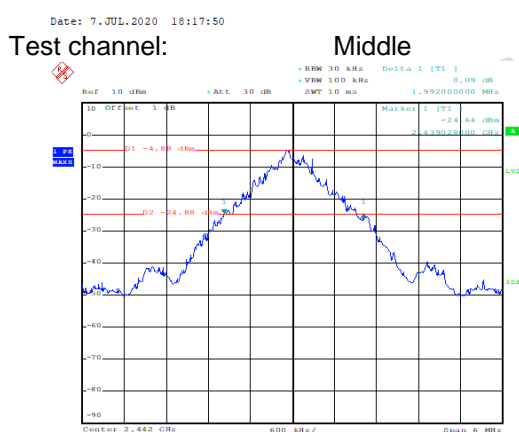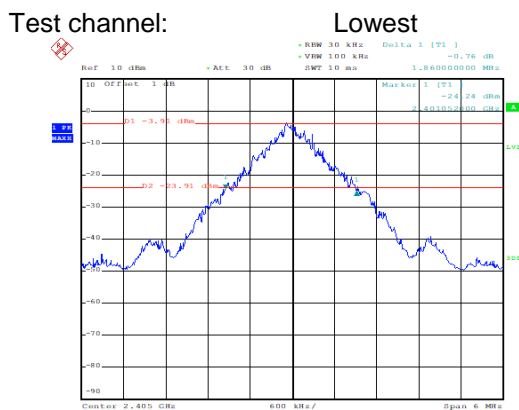

Date: 7, JUL, 2020 18:17:03

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
 Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
 Email: marketing@cblueasia.com

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP



Radiated emission Test Setup-2 (30MHz~1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

APPENDIX 2 PHOTOGRAPHS OF EUT





BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

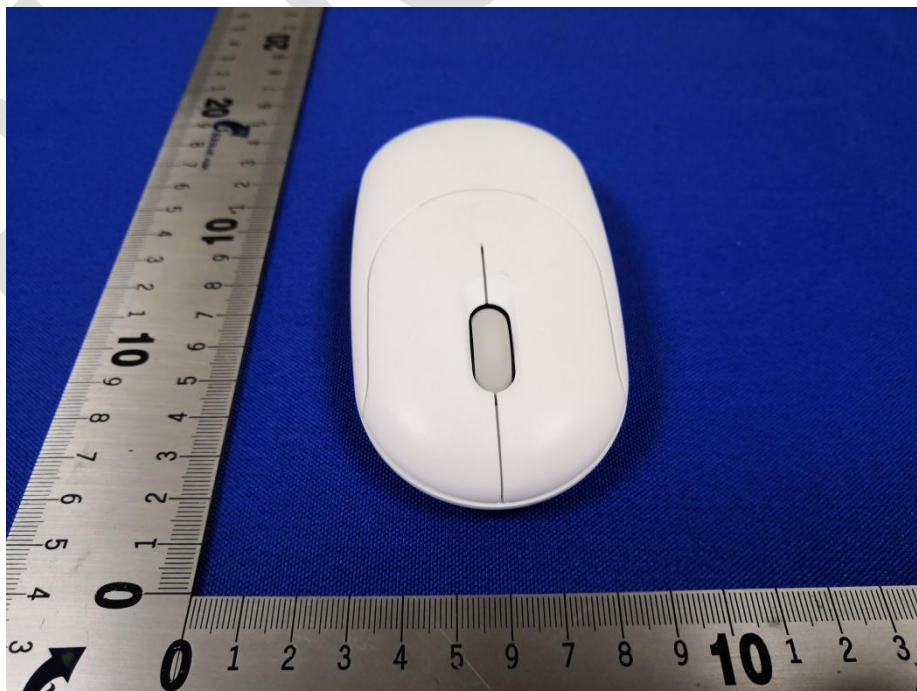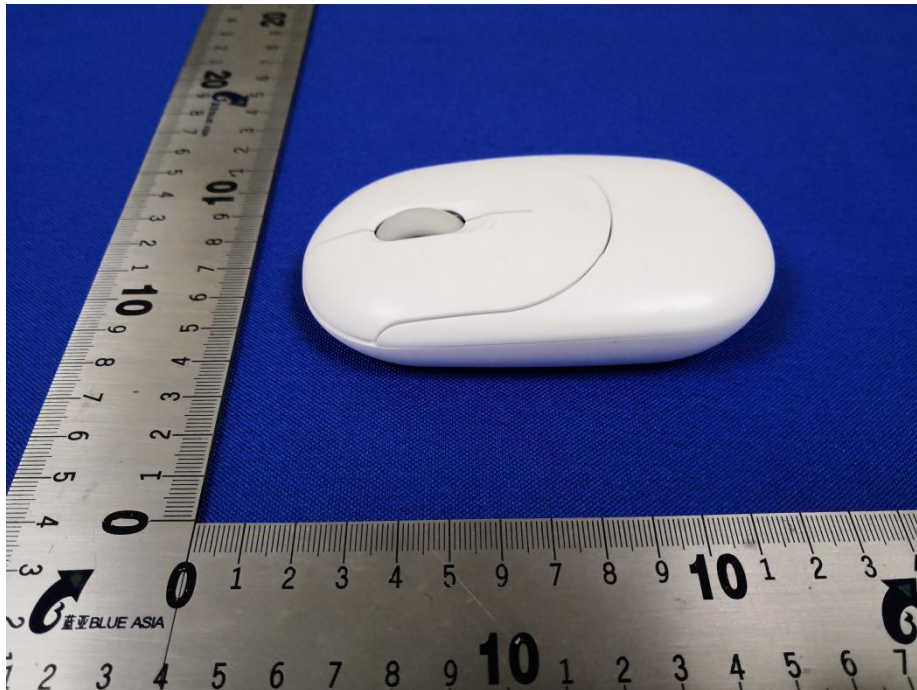

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com





BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

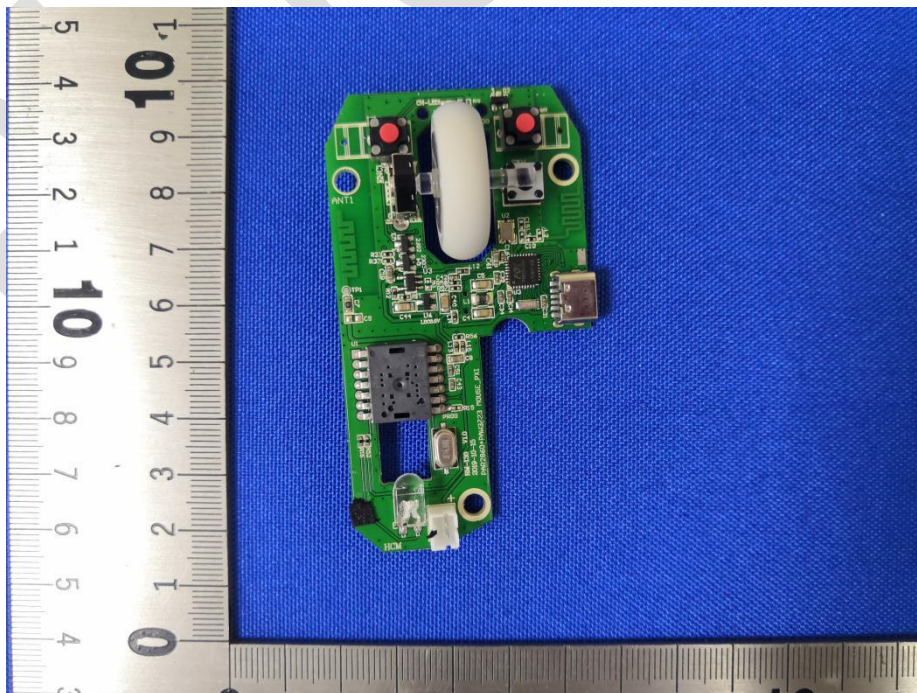
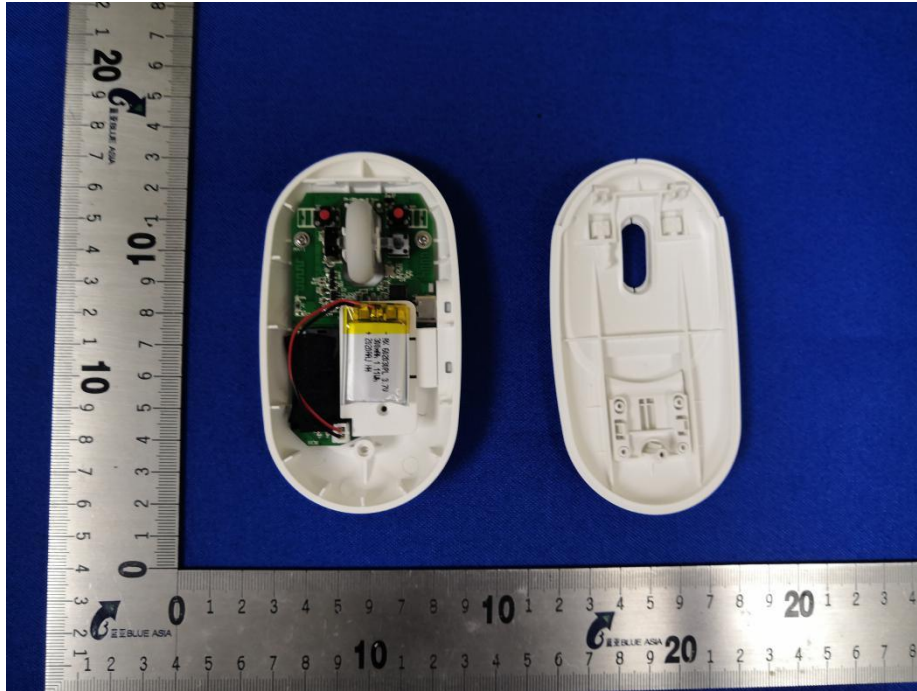


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

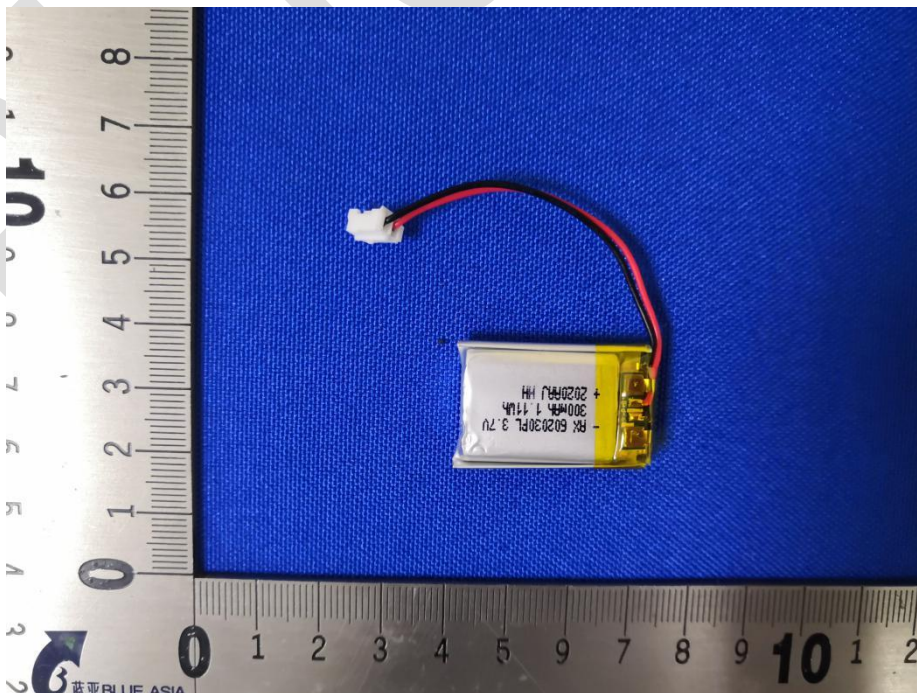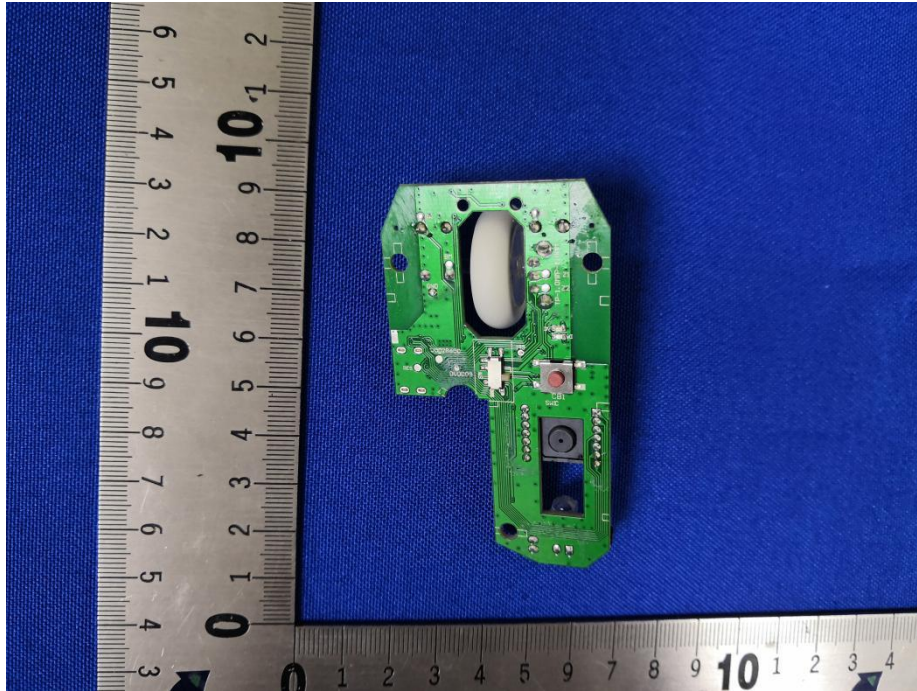


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Email: marketing@cblueasia.com

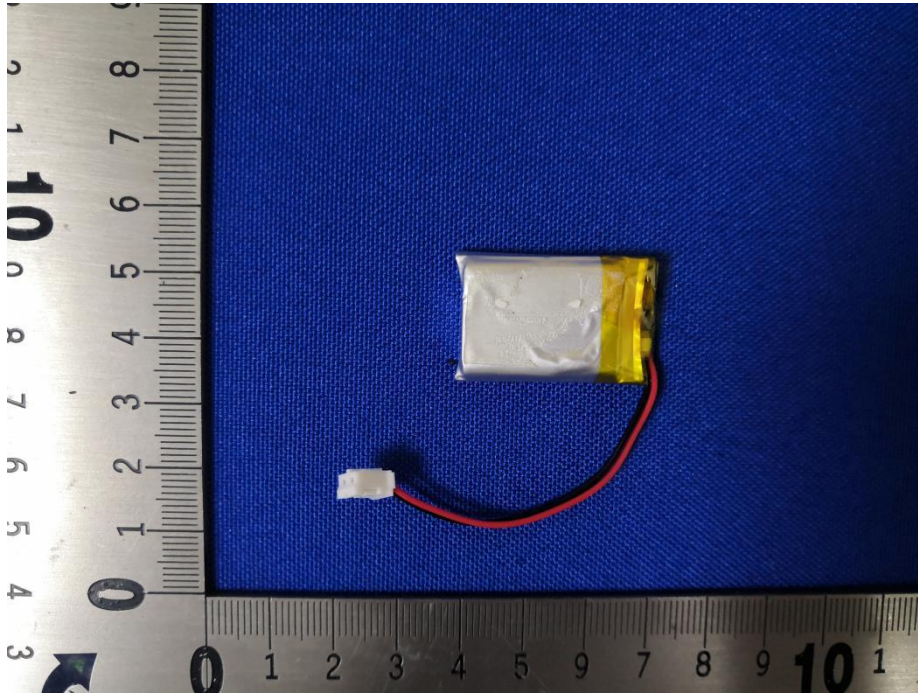

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
Email: marketing@cblueasia.com