

FCC TEST REPORT

Product Name : Wireless Mouse
Trade mark : N/A
Model No. : WM-779B, WM-779, PC079B, PC079A,
PC079C, PC079D
Report Number : BLA-EMC-202001-A24
FCCID : 2AB75-PC079B
Date of sample receipt : January 08, 2020
Date of Test : January 09, 2020—January 20, 2020
Date of Issue : February 25, 2020
Test Standards : FCC CFR Title 47 Part 15 Subpart C
Section 15.249
Test result : PASS

Prepared for:

Wintop Electronics Co.,Ltd

**Flat 2, 8/F Workingport Com'L Bldg, 3 Hau Fook ST, Tsim Sha Tsui, Kln
Hong Kong**

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

**No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,
China**

TEL: +86-755-28682673

FAX: +86-755-28682673

Tested by:

Jozu.

Reviewed by:

Sweet. Wang

Approved by:

Emen-li

Date:

February 25, 2020



2 Version

| Version No. | Date | Description |
|--------------------|--------------------------|--------------------|
| <i>00</i> | <i>February 25, 2020</i> | <i>Original</i> |
| | | |
| | | |

BlueAsia

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|--|---|------------------|--------|
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203 | ANSI C63.10-2013 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | N/A |
| Field Strength of the Fundamental Signal | 47 CFR Part 15 Subpart C Section 15.249 (a) | ANSI C63.10-2013 | PASS |
| Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.249 (a)/15.209 | ANSI C63.10-2013 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15 Subpart C Section 15.249(a)/15.205 | ANSI C63.10-2013 | PASS |
| 20dB Occupied Bandwidth | 47 CFR Part 15 Subpart C Section 15.215 (c) | ANSI C63.10-2013 | PASS |

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not Applicable

4 Contents

| | Page |
|--|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENTS | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION..... | 5 |
| 5.2 GENERAL DESCRIPTION OF EUT | 5 |
| 5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD..... | 5 |
| 5.4 TEST ENVIRONMENT AND MODE | 7 |
| 5.5 DESCRIPTION OF SUPPORT UNITS | 7 |
| 5.6 TEST LOCATION..... | 7 |
| 5.7 TEST FACILITY | 7 |
| 5.8 DEVIATION FROM STANDARDS | 8 |
| 5.9 ABNORMALITIES FROM STANDARD CONDITIONS..... | 8 |
| 5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 8 |
| 5.11 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)..... | 9 |
| 6 EQUIPMENT LIST | 10 |
| 7 TEST RESULTS AND MEASUREMENT DATA | 12 |
| 7.1 ANTENNA REQUIREMENT..... | 12 |
| 7.2 CONDUCTED EMISSIONS | 12 |
| 7.3 RADIATED EMISSION | 14 |
| 7.4 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY | 21 |
| 7.5 20DB BANDWIDTH | 24 |
| APPENDIX 1 PHOTOGRAPHS OF TEST SETUP | 26 |
| APPENDIX 2 PHOTOGRAPHS OF EUT | 27 |

5 General Information

5.1 Client Information

| | |
|--------------------------|---|
| Applicant: | Wintop Electronics Co.,Ltd |
| Address of Applicant: | Flat 2,8/F Workingport Com'L Bldg,3 Hau Fook ST,Tsim Sha Tsui, Kln Hong Kong |
| Manufacturer: | ShenZhen Wintop Electronics Co.,Ltd |
| Address of Manufacturer: | Room 402 Building 1 No.34 XinHe Road,No 46 XinHe Road,Floor 4 No.50 XinHe Road ShangMuGu Community,PingHu Street,LongGang District,ShenZhen City,GuangDong Province,China |
| Factory: | ShenZhen Wintop Electronics Co.,Ltd |
| Address of Factory: | Room 402 Building 1 No.34 XinHe Road,No 46 XinHe Road,Floor 4 No.50 XinHe Road ShangMuGu Community,PingHu Street,LongGang District,ShenZhen City,GuangDong Province,China |

5.2 General Description of EUT

| | |
|----------------------------------|--|
| Product Name: | Wireless Mouse |
| Mode No.(EUT): | WM-779B |
| Add Mode No.: | , WM-779, PC079B, PC079A, PC079C, PC079D |
| Trade Mark: | N/A |
| EUT Supports Radios application: | 2.4GHz Wireless |
| Power Supply: | DC3V |

5.3 Product Specification subjective to this standard

| | |
|---------------------|--|
| Frequency Range: | 2408 MHz ~ 2474MHz |
| Frequency Band: | 2.4GHz ISM band |
| Hardware: | WM779_MA385N-3_2019-09-11 |
| Software: | N/A |
| Channel Spacing: | 2MHz |
| Modulation Type: | GFSK |
| Number of Channels: | 34 (declared by the client) |
| Sample Type: | Portable production(mobile production ;fixed production) |
| Antenna Type: | PCB ANT |
| Antenna Gain: | 0.0dBi(declared by the client) |
| Power Supply: | DC3V |

| Operation Frequency each of channel | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2408MHz | 14 | 2434MHz | 27 | 2460MHz |
| 2 | 2410MHz | 15 | 2436MHz | 28 | 2462MHz |
| 3 | 2412MHz | 16 | 2438MHz | 29 | 2464MHz |
| 4 | 2414MHz | 17 | 2440MHz | 30 | 2466MHz |
| 5 | 2416MHz | 18 | 2442MHz | 31 | 2468MHz |
| 6 | 2418MHz | 19 | 2444MHz | 32 | 2470MHz |
| 7 | 2420MHz | 20 | 2446MHz | 33 | 2472MHz |
| 8 | 2422MHz | 21 | 2448MHz | 34 | 2474MHz |
| 9 | 2424MHz | 22 | 2450MHz | | |
| 10 | 2426MHz | 23 | 2452MHz | | |
| 11 | 2428MHz | 24 | 2454MHz | | |
| 12 | 2430MHz | 25 | 2456MHz | | |
| 13 | 2432MHz | 26 | 2458MHz | | |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel | Frequency |
|---------------------------|-----------|
| The Lowest channel(CH1) | 2408MHz |
| The Middle channel(CH17) | 2440MHz |
| The Highest channel(CH39) | 2474MHz |

5.4 Test Environment and Mode

| | |
|-------------------------------|---|
| Operating Environment: | |
| Temperature: | 24.0 °C |
| Humidity: | 52 % RH |
| Atmospheric Pressure: | 1008 mbar |
| Test mode: | |
| Transmitting mode: | Keep the EUT in transmitting mode with modulation. (new battery is used) |

5.5 Description of Support Units

The EUT has been tested independently and or

The EUT has been tested with associated equipment below.

1) support equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------------|--------------|-----------|---------------|-------------|
| Notebook computer | Lenovo | E470C | PF-10FB5C | / |
| / | / | / | / | / |

2) cable

| Cable No. | Description | Manufacturer | Cable Type/Length | Supplied by |
|-----------|-------------|--------------|-------------------|-------------|
| / | / | / | / | / |

5.6 Test Location

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC — Designation No.: CN1252

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

ISED — CAB identifier No.: CN0028

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

BlueAsia

5.11 Measurement Uncertainty (95% confidence levels, k=2)

| Test Item | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission | 9kHz ~ 30MHz | $\pm 4.34\text{dB}$ | (1) |
| Radiated Emission | 30MHz ~ 1000MHz | $\pm 4.24\text{dB}$ | (1) |
| Radiated Emission | 1GHz ~ 26.5GHz | $\pm 4.68\text{dB}$ | (1) |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | $\pm 3.45\text{dB}$ | (1) |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.


6 Equipment List

| Radiated Emission: | | | | | | |
|---------------------------|-------------------------|---------------------|------------------|-------------------|--------------------------------|------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m SAC | SKET | 9m*6 m*6m | 966 | 06-10-2018 | 06-09-2023 |
| 2 | Broadband Antenna | SCHWARZBECK | VULB9168 | 00836 P:00227 | 07-14-2019 | 07-13-2020 |
| 3 | Horn Antenna | SCHWARZBECK | 9120D | 01892 P:00331 | 07-14-2019 | 07-13-2020 |
| 4 | EMI Test Software | EZ | EZ | N/A | N/A | N/A |
| 5 | Pre-amplifier | SKET | N/A | N/A | 07-19-2019 | 07-18-2020 |
| 6 | Spectrum analyzer | Rohde & Schwarz | FSP40 | 100817 | 05-24-2019 | 05-23-2020 |
| 7 | EMI Test Receiver | Rohde & Schwarz | ESR7 | 101199 | 03-21-2019 | 03-20-2020 |
| 8 | Controller | SKET | N/A | N/A | N/A | N/A |
| 9 | Vector Signal Generator | Agilent | E4438C | MY45092582 | 05-24-2019 | 05-23-2020 |
| 10 | Signal Generator | Agilent | E8257D | MY44320250 | 05-24-2019 | 05-23-2020 |
| 11 | Coaxial Cable | BlueAsia | BLA-XC-02 | N/A | N/A | N/A |
| 12 | Coaxial Cable | BlueAsia | BLA-XC-03 | N/A | N/A | N/A |
| 13 | Coaxial Cable | BlueAsia | BLA-XC-01 | N/A | N/A | N/A |

| Conducted Emission | | | | | | |
|---------------------------|------------------------------|---------------------|------------------|-------------------|--------------------------------|------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | EMI Test Receiver | Rohde & Schwarz | ESPI3 | 101082 | 06-10-2019 | 06-09-2020 |
| 2 | LISN | CHASE | MN2050D | 1447 | 12-18-2019 | 12-17-2020 |
| 3 | LISN | Rohde & Schwarz | ENV216 | 3560.6550.15 | 07-19-2019 | 07-18-2020 |
| 4 | EMI Test Software | EZ | EZ | N/A | N/A | N/A |
| 5 | Temperature Humidity Chamber | Mingle | TH101B | N/A | 07-19-2019 | 07-18-2020 |
| 6 | Coaxial Cable | BlueAsia | BLA-XC-05 | N/A | N/A | N/A |

7 Test results and Measurement Data

7.1 Antenna Requirement
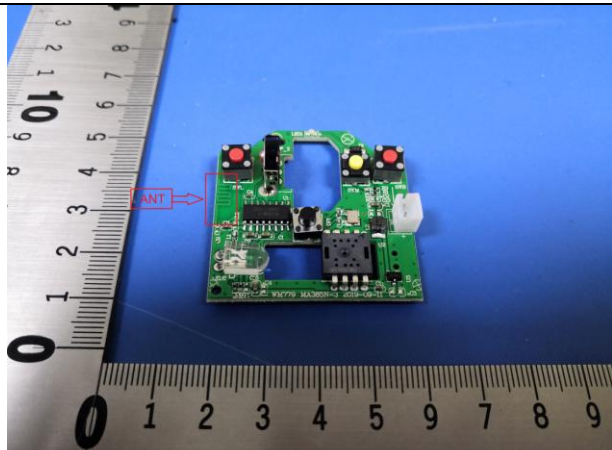
| | |
|---|--|
| Standard requirement: | 47 CFR Part 15C Section 15.203 |
| 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. | |
| EUT Antenna: |  |
| The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.00dBi. | |

7.2 Conducted Emissions

Test Requirement: 47 CFR Part 15C Section 15.207
Test Method: ANSI C63.10
Test Frequency Range: 150KHz to 30MHz

Limit:

| Frequency range (MHz) | Limit (dB μ V) | |
|-----------------------|--------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |


* Decreases with the logarithm of the frequency.

Test Procedure:

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of

equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Test Setup:

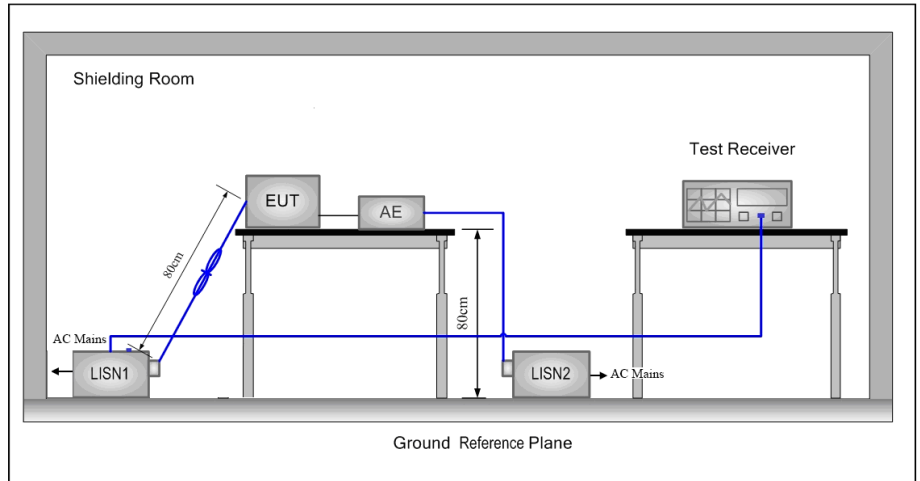

Test Mode:

Keep the EUT in transmitting mode

Instruments Used:

Refer to section 5.11 for details

Test Results:

N/A

BlueAsia

7.3 Radiated Emission

Test Requirement: 47 CFR Part 15C Section 15.249 and 15.209

Test Method: ANSI C63.10

Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver Setup:

| Frequency | Detector | RBW | VBW | Remark |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak | 10kHz | 30KHz | Peak |
| 0.009MHz-0.090MHz | Average | 10kHz | 30KHz | Average |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30KHz | Quasi-peak |
| 0.110MHz-0.490MHz | Peak | 10kHz | 30KHz | Peak |
| 0.110MHz-0.490MHz | Average | 10kHz | 30KHz | Average |
| 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| 30MHz-1GHz | Quasi-peak | 100 kHz | 300KHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | Peak | 1MHz | 10Hz | Average |

Test Setup:

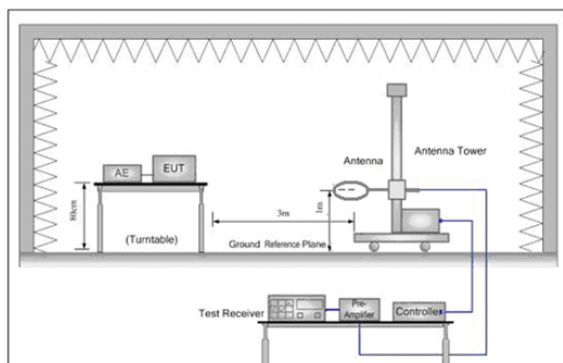


Figure 1. Below 30MHz

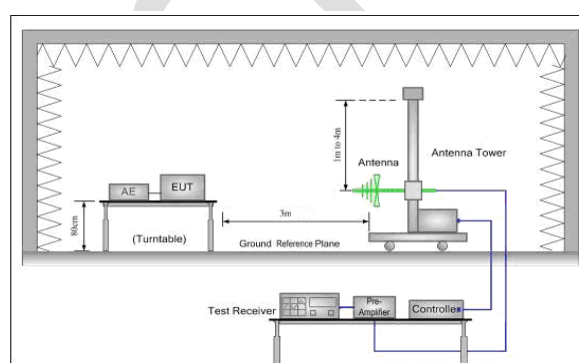


Figure 2. 30MHz to 1GHz

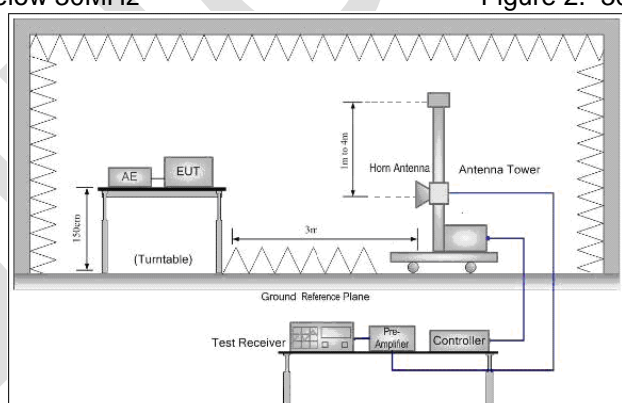


Figure 3. Above 1GHz

Test Procedure:

Below 1GHz test procedure as below:

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

Test the EUT in the lowest channel ,middle channel, the Highest channel

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

Repeat above procedures until all frequencies measured was complete.

Limit:
(Spurious Emissions)

| Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
|-------------------|----------------------------------|-----------------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F (kHz) | - | - | 300 |
| 0.490MHz-1.705MHz | 24000/F (kHz) | - | - | 30 |
| 1.705MHz-30MHz | 30 | - | - | 30 |
| 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1GHz | 500 | 54.0 | Average | 3 |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Limit:
(Field strength of the fundamental signal)

| Frequency | Limit (dB μ V/m @3m) | Remark |
|-------------------|--------------------------|---------------|
| 2400MHz-2483.5MHz | 94.0 | Average Value |
| | 114.0 | Peak Value |

Instruments Used: Refer to section 5.11 for details

Exploratory Test Mode: Transmitting mode

Final Test Mode: Pretest the EUT at Transmitting mode

Test Results: Pass

Measurement Data
Field Strength Of The Fundamental Signal

Peak value:

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Level (dB μ V/m) | Limit (dB μ V/m) | Over Limit (dB) | Antenna Polaxis |
|-----------------|----------------------|---------------------|----------------------|----------------------|-----------------|-----------------|
| 2408 | 93.65 | 4.93 | 98.58 | 114.00 | -15.42 | H |
| 2408 | 81.79 | 4.58 | 86.37 | 114.00 | -27.63 | V |
| 2440 | 93.75 | 5.23 | 98.98 | 114.00 | -15.02 | H |
| 2440 | 82.70 | 4.86 | 87.56 | 114.00 | -26.44 | V |
| 2474 | 96.59 | 5.53 | 102.12 | 114.00 | -11.88 | H |
| 2474 | 86.37 | 5.14 | 91.51 | 114.00 | -22.49 | V |


Average value:

| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Level (dB μ V/m) | Limit (dB μ V/m) | Over Limit (dB) | Antenna Polaxis |
|-----------------|----------------------|---------------------|----------------------|----------------------|-----------------|-----------------|
| 2408 | 80.06 | 4.93 | 84.99 | 94.00 | -9.01 | H |
| 2408 | 69.58 | 4.58 | 74.16 | 94.00 | -19.84 | V |
| 2440 | 81.43 | 5.23 | 86.66 | 94.00 | -7.34 | H |
| 2440 | 70.64 | 4.86 | 75.50 | 94.00 | -18.50 | V |
| 2474 | 82.72 | 5.53 | 88.25 | 94.00 | -5.75 | H |
| 2474 | 73.09 | 5.14 | 78.23 | 94.00 | -15.77 | V |


NOTE: RBW 3MHz VBW 10MHz, PK detector is for PK value, RMS detector is for AV value

Spurious Emissions
30MHz~1GHz (QP)
Test mode: Transmitting

Horizontal:

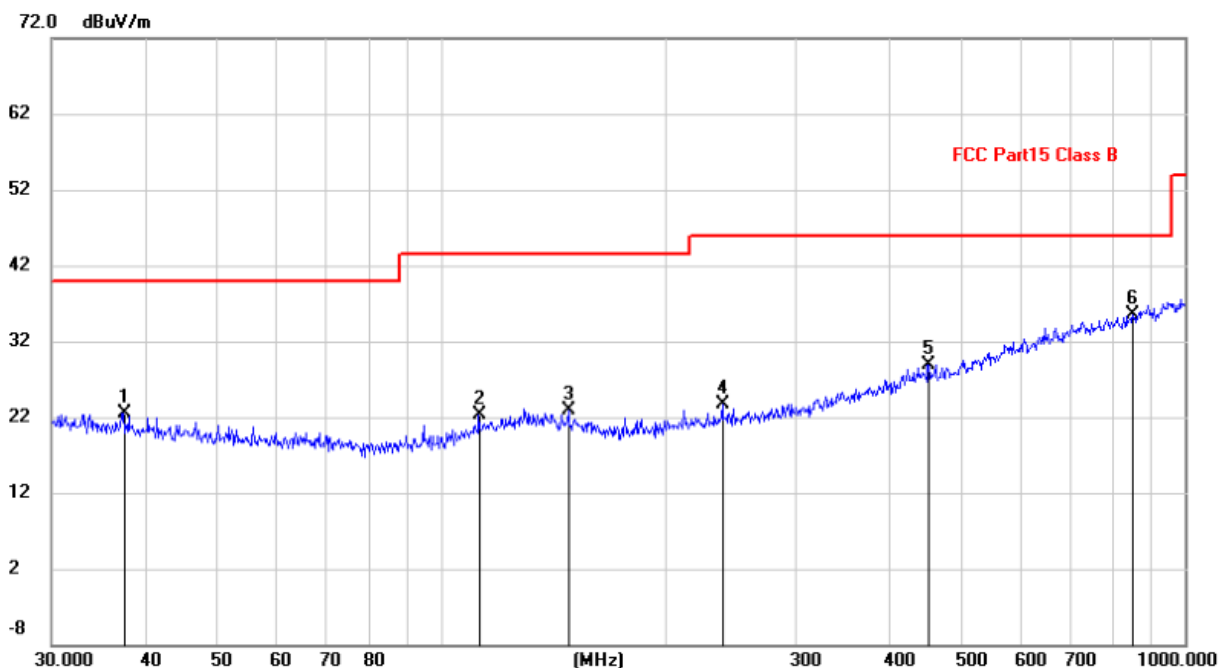

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 37.4165 | -1.26 | 23.72 | 22.46 | 40.00 | -17.54 | QP |
| 2 | | 112.5244 | 0.30 | 21.94 | 22.24 | 43.50 | -21.26 | QP |
| 3 | | 148.4410 | -0.29 | 23.27 | 22.98 | 43.50 | -20.52 | QP |
| 4 | | 239.1473 | 0.68 | 22.96 | 23.64 | 46.00 | -22.36 | QP |
| 5 | | 452.7197 | 0.81 | 28.09 | 28.90 | 46.00 | -17.10 | QP |
| 6 | * | 851.0353 | 0.67 | 34.75 | 35.42 | 46.00 | -10.58 | QP |

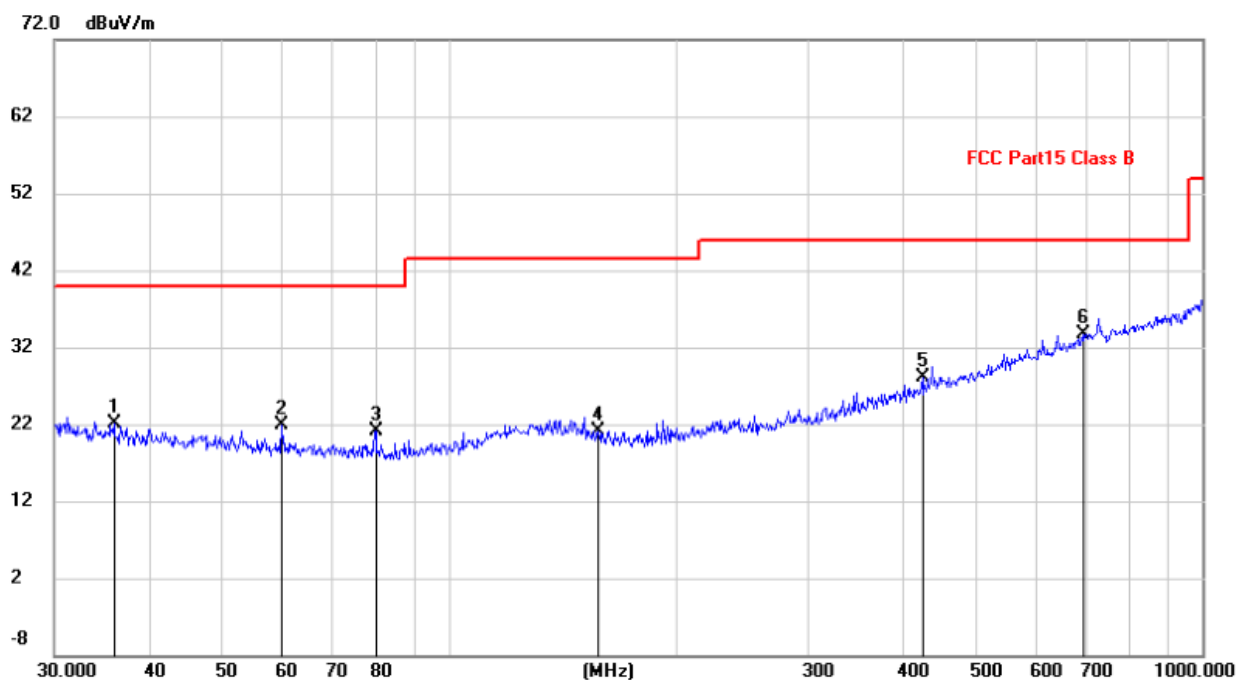Vertical:


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | | 36.0007 | -1.37 | 23.41 | 22.04 | 40.00 | -17.96 | QP |
| 2 | | 60.0691 | -1.43 | 23.36 | 21.93 | 40.00 | -18.07 | QP |
| 3 | | 79.8003 | 2.02 | 19.12 | 21.14 | 40.00 | -18.86 | QP |
| 4 | | 158.1123 | -2.08 | 23.23 | 21.15 | 43.50 | -22.35 | QP |
| 5 | | 425.0280 | 0.48 | 27.57 | 28.05 | 46.00 | -17.95 | QP |
| 6 | * | 694.4174 | 1.14 | 32.60 | 33.74 | 46.00 | -12.26 | QP |

| Above 1GHz | | | | | | |
|-----------------|----------------------|---------------------|----------------------|----------------------|-----------------|-----------------|
| Test mode: | Transmitting | Test channel: | Lowest | Remark: | Peak | |
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Level (dB μ V/m) | Limit (dB μ V/m) | Over Limit (dB) | Antenna Polaxis |
| 4816.00 | 42.68 | 2.38 | 45.06 | 74.00 | -28.94 | H |
| 7224.00 | 43.54 | 7.58 | 51.12 | 74.00 | -22.88 | H |
| 9632.00 | 41.06 | 7.62 | 48.68 | 74.00 | -25.32 | H |
| 4816.00 | 41.84 | 2.38 | 44.22 | 74.00 | -29.78 | V |
| 7224.00 | 43.36 | 7.58 | 50.94 | 74.00 | -23.06 | V |
| 9632.00 | 42.74 | 7.62 | 50.36 | 74.00 | -23.64 | V |

| Test mode: | Transmitting | Test channel: | Middle | Remark: | Peak | |
|-----------------|----------------------|---------------------|----------------------|----------------------|-----------------|-----------------|
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Level (dB μ V/m) | Limit (dB μ V/m) | Over Limit (dB) | Antenna Polaxis |
| 4880.00 | 41.42 | 0.17 | 41.59 | 74.00 | -32.41 | H |
| 7320.00 | 42.69 | 7.60 | 50.29 | 74.00 | -23.71 | H |
| 9760.00 | 40.08 | 7.62 | 47.70 | 74.00 | -26.30 | H |
| 4880.00 | 41.76 | 0.17 | 41.93 | 74.00 | -32.07 | V |
| 7320.00 | 41.09 | 7.60 | 48.69 | 74.00 | -25.31 | V |
| 9760.00 | 39.85 | 7.62 | 47.47 | 74.00 | -26.53 | V |

| Test mode: | Transmitting | Test channel: | Highest | Remark: | Peak | |
|-----------------|----------------------|---------------------|----------------------|----------------------|-----------------|-----------------|
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Level (dB μ V/m) | Limit (dB μ V/m) | Over Limit (dB) | Antenna Polaxis |
| 4948.00 | 41.44 | 1.04 | 42.48 | 74.00 | -31.52 | H |
| 7422.00 | 40.68 | 7.55 | 48.23 | 74.00 | -25.77 | H |
| 9896.00 | 42.03 | 7.63 | 49.66 | 74.00 | -24.34 | H |
| 4948.00 | 41.70 | 1.04 | 42.74 | 74.00 | -31.26 | V |
| 7422.00 | 42.32 | 7.55 | 49.87 | 74.00 | -24.13 | V |
| 9896.00 | 40.29 | 7.63 | 47.92 | 74.00 | -26.08 | V |

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Correct Factor}$$

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

BlueAsia

7.4 Restricted bands around fundamental frequency

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205
Test Method: ANSI C63.10
Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)
Test Setup:

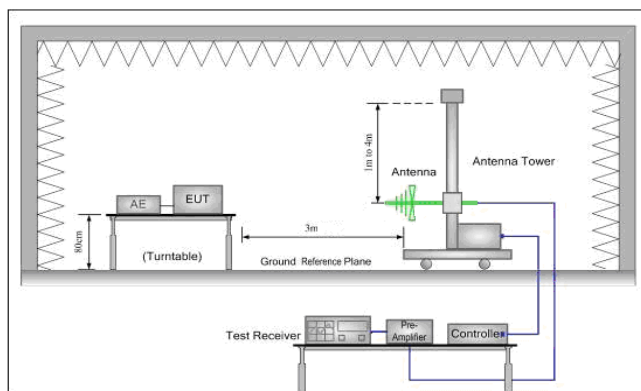


Figure 1. 30MHz to 1GHz

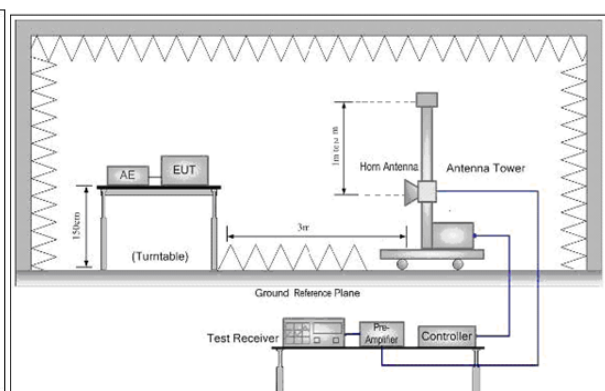


Figure 2. Above 1 GHz

Test Procedure:

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel,,the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Limit(band edge):

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

| Frequency | Limit (dBuV/m @3m) | Remark |
|---------------|--------------------|------------------|
| 30MHz-88MHz | 40.0 | Quasi-peak Value |
| 88MHz-216MHz | 43.5 | Quasi-peak Value |
| 216MHz-960MHz | 46.0 | Quasi-peak Value |
| 960MHz-1GHz | 54.0 | Quasi-peak Value |
| Above 1GHz | 54.0 | Average Value |
| | 74.0 | Peak Value |

Instruments Used: Refer to section 5.11 for details

Exploratory Test Mode: Transmitting mode

Pretest the EUT at Transmitting mode

Final Test Mode:

Test Results: Pass

Band edge test data (Radiated Emission)

| Test channel: | Lowest | | | Remark: | | Peak |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 45.17 | -4.20 | 40.97 | 74.00 | -33.03 | Horizontal |
| 2390.00 | 50.73 | -3.88 | 46.85 | 74.00 | -27.15 | Horizontal |
| 2400.00 | 75.26 | -3.82 | 71.44 | 74.00 | -2.56 | Horizontal |
| 2310.00 | 45.18 | -4.49 | 40.69 | 74.00 | -33.31 | Vertical |
| 2390.00 | 45.21 | -4.21 | 41.00 | 74.00 | -33.00 | Vertical |
| 2400.00 | 73.07 | -4.17 | 68.90 | 74.00 | -5.10 | Vertical |

| Test channel: | Lowest | | | Remark: | | Average |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2310.00 | 32.70 | -4.20 | 28.50 | 54.00 | -25.50 | Horizontal |
| 2390.00 | 36.77 | -3.88 | 32.89 | 54.00 | -21.11 | Horizontal |
| 2400.00 | 56.54 | -3.82 | 52.72 | 54.00 | -1.28 | Horizontal |
| 2310.00 | 32.13 | -4.49 | 27.64 | 54.00 | -26.36 | Vertical |
| 2390.00 | 31.74 | -4.21 | 27.53 | 54.00 | -26.47 | Vertical |
| 2400.00 | 54.62 | -4.17 | 50.45 | 54.00 | -3.55 | Vertical |

| Test channel: | Highest | | | Remark: | | Peak |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 62.03 | -3.38 | 58.65 | 74.00 | -15.35 | Horizontal |
| 2500.00 | 56.22 | -3.30 | 52.92 | 74.00 | -21.08 | Horizontal |
| 2483.50 | 55.52 | -3.77 | 51.75 | 74.00 | -22.25 | Vertical |
| 2500.00 | 45.78 | -3.70 | 42.08 | 74.00 | -31.92 | Vertical |

| Test channel: | Highest | | | Remark: | | Average |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 2483.50 | 40.55 | -3.38 | 37.17 | 54.00 | -16.83 | Horizontal |
| 2500.00 | 34.20 | -3.30 | 30.90 | 54.00 | -23.10 | Horizontal |
| 2483.50 | 34.28 | -3.77 | 30.51 | 54.00 | -23.49 | Vertical |
| 2500.00 | 31.95 | -3.70 | 28.25 | 54.00 | -25.75 | Vertical |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Correct Factor


Correct Factor = Antenna Factor + Cable Factor - Pre-amplifier Factor

7.5 20dB Bandwidth

Test Requirement: 47 CFR Part 15C Section 15.215

Test Method: ANSI C63.10

Test Setup:

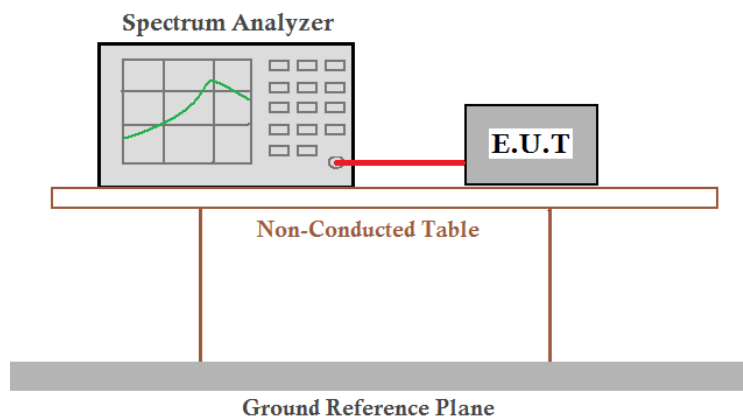

Instruments Used: Refer to section 5.11 for details

Exploratory Test Mode: Transmitting mode
Pretest the EUT at Transmitting mode

Final Test Mode:

Limit: N/A


Test Results: Pass

Measurement Data


| Test channel | 20dB bandwidth (MHz) | Results |
|--------------|----------------------|---------|
| Lowest | 2.268 | Pass |
| Middle | 2.124 | Pass |
| Highest | 2.208 | Pass |

Test plot as follows:


Test channel: Lowest

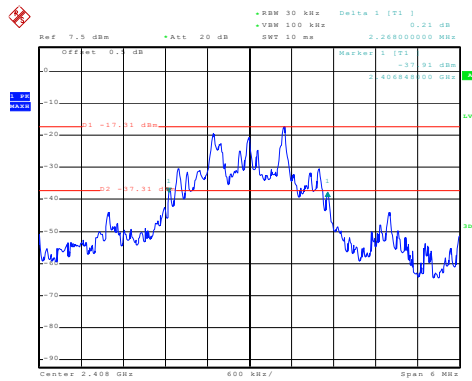

Date: 20.JAN.2020 12:29:22
Test channel: Middle

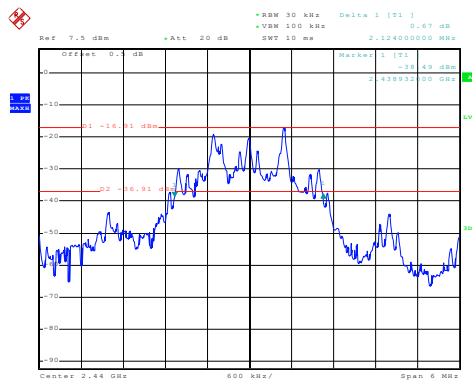


Date: 20.JAN.2020 12:32:17
Test channel: Highest

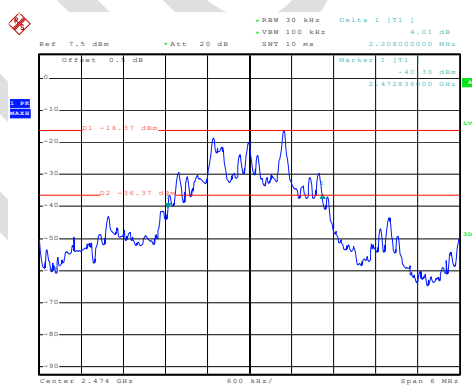


Date: 20.JAN.2020 12:34:01

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

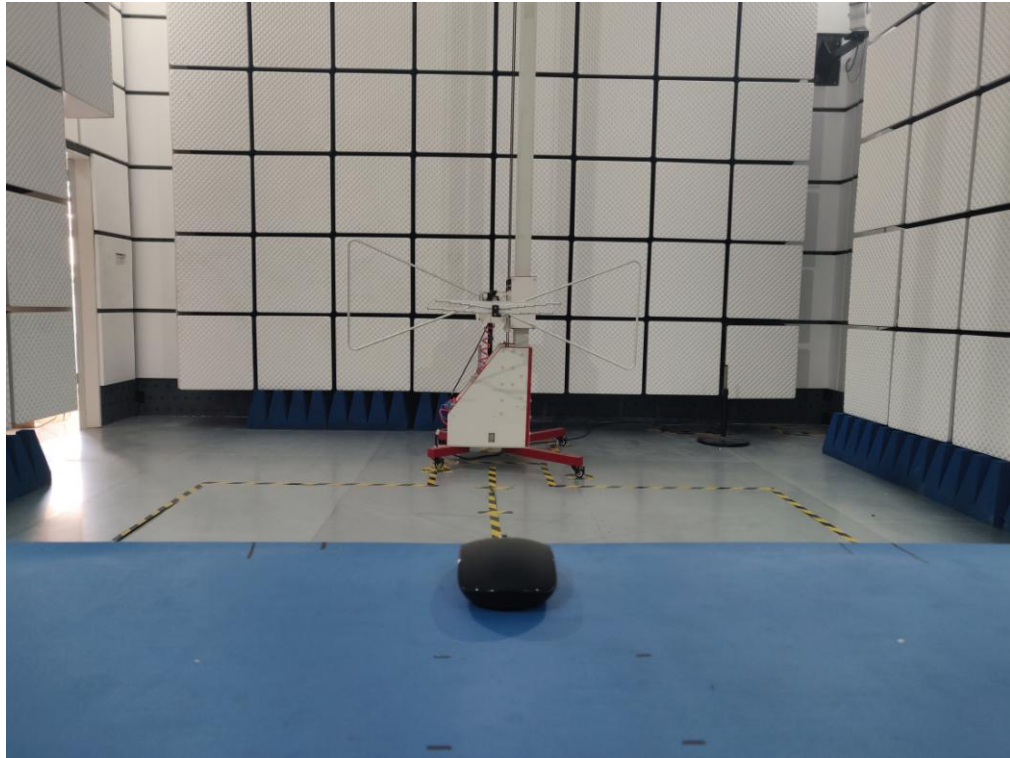

Radiated emission Test Setup-2 (30MHz~1GHz)

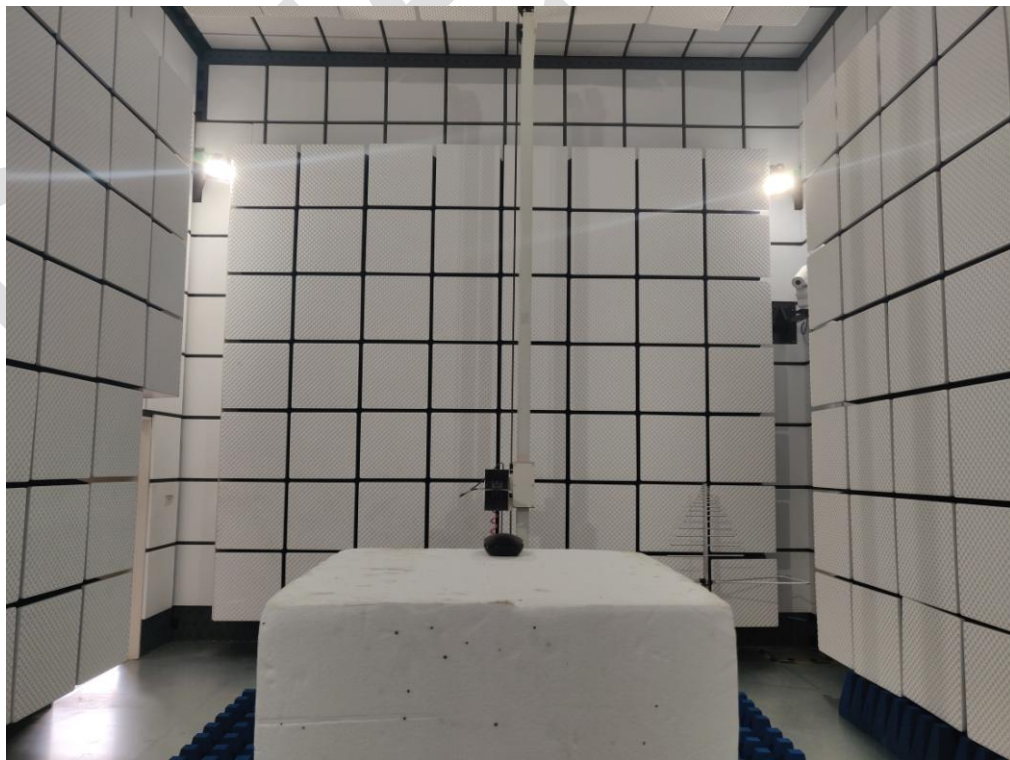

Radiated spurious emission Test Setup-3(Above 1GHz)

APPENDIX 2 PHOTOGRAPHS OF EUT

Test model No.: WM-779B



View of Product-1(mode : WM-779B)



View of Product-2(mode : WM-779B)



View of Product-3(mode : WM-779B)



View of Product-4(mode : WM-779B)




View of Product-5(mode : WM-779B)




View of Product-6(mode : WM-779B)




View of Product-7(mode : WM-779B)

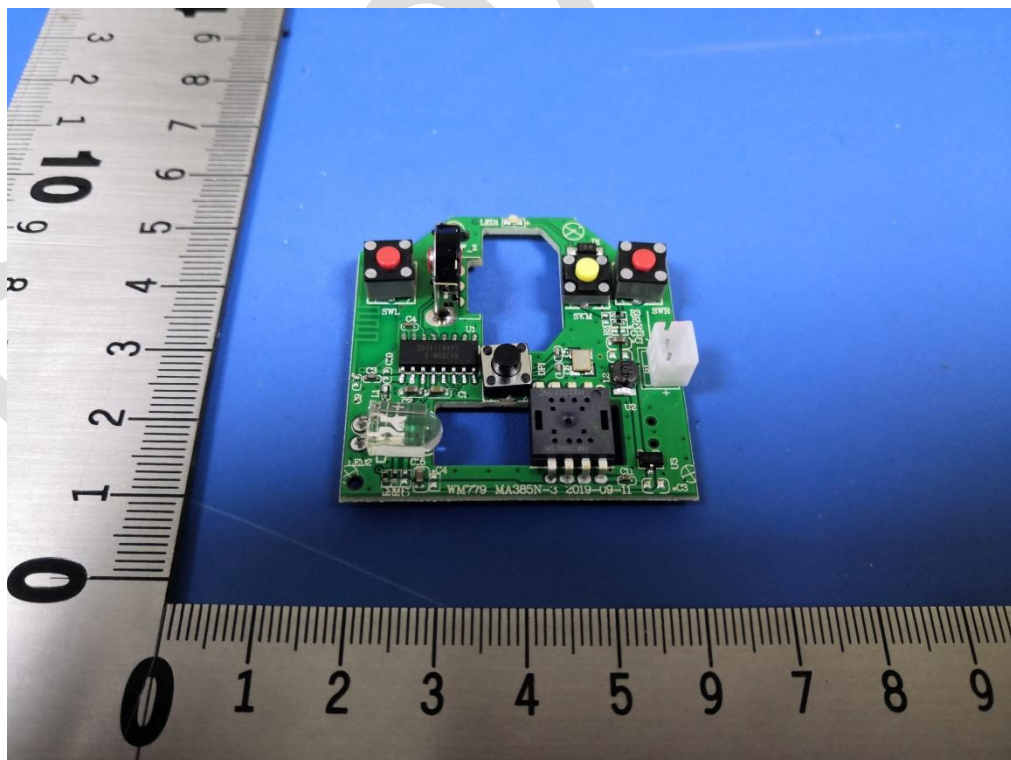

View of Product-8(mode : WM-779B)

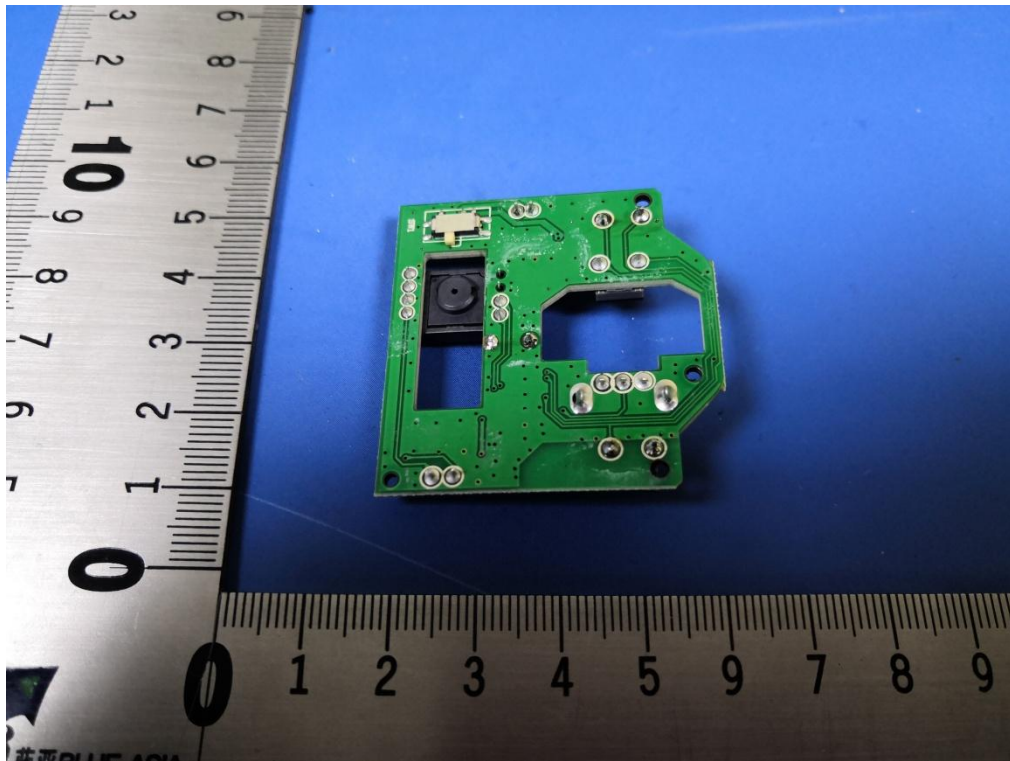

View of Product-9(mode : WM-779B)

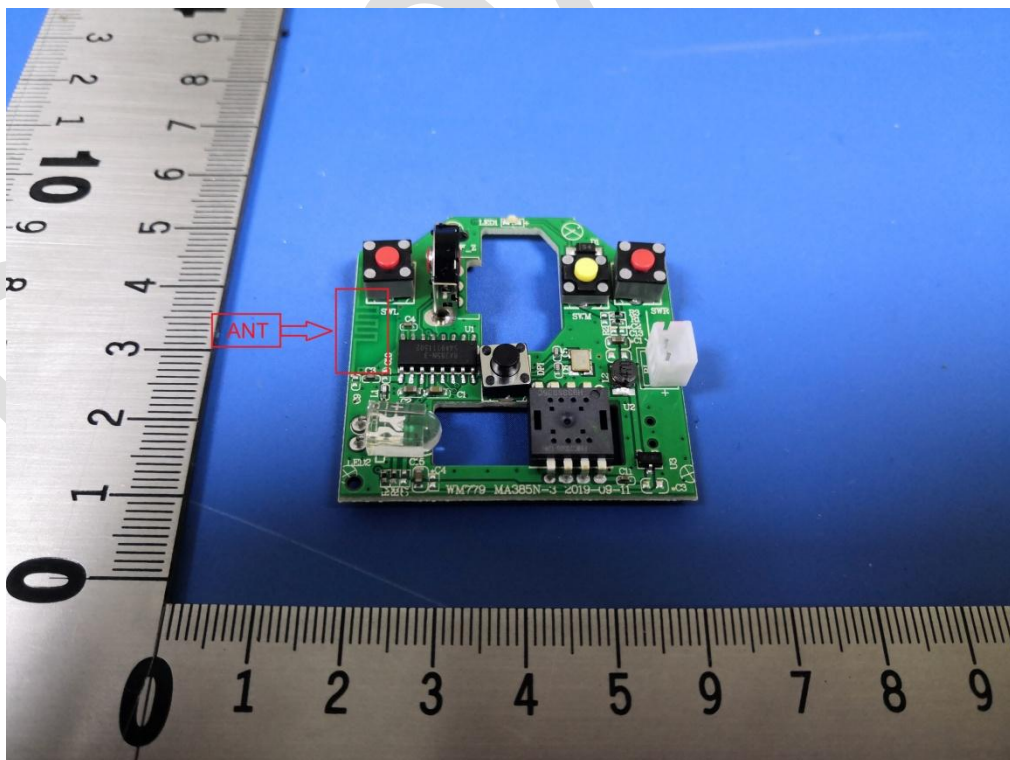

View of Product-10(mode : WM-779B)

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia