

FCC PART 15.249

TEST REPORT

For

Wintop Electronics Co., Limited

Unit 04 7/F, Bright Way Tower 33, Mong Kok RD KL, HONGKONG

FCC ID: 2AB75WM-117

Report Type: Original Report		Product Type: 2.4GHz Wireless Optical Mouse	
Test Engineer:	Allen Qiao	<i>Allen Qiao</i>	
Report Number:	RDG151116008-00		
Report Date:	2015-11-30		
Reviewed By:	Sula Huang RF Leader	<i>Sula Huang</i>	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
TEST METHODOLOGY.....	3
TEST FACILITY.....	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION.....	4
EUT EXERCISE SOFTWARE.....	4
EQUIPMENT MODIFICATIONS.....	4
SUPPORT EQUIPMENT LIST AND DETAILS.....	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP.....	5
SUMMARY OF TEST RESULTS.....	6
FCC§15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD.....	7
ANTENNA CONNECTOR CONSTRUCTION.....	7
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS.....	8
APPLICABLE STANDARD.....	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP.....	9
TEST EQUIPMENT SETUP.....	10
TEST PROCEDURE.....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY.....	11
TEST DATA.....	11
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	13
APPLICABLE STANDARD.....	13
TEST PROCEDURE.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA.....	13
FCC§15.249(D) - OUT OF BAND EMISSION (50 DB ATTENUATION).....	16
APPLICABLE STANDARD.....	16
TEST PROCEDURE.....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA.....	16
DECLARATION LETTER.....	19

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Wintop Electronics Co., Limited*'s product, model number: *WM-117(FCC ID: 2AB75WM-117)* (the "EUT") in this report was a *2.4GHz Wireless Optical Mouse*, was measured approximately: 8.6 cm (L) x 4.6 cm (W) x 3.2 cm(H), rated input voltage: DC3.0V from 2*AAA batteries.

Note: the series product, model WM-117, MP1950BLK are electrically identical, the differences between them are model name, we selected WM-117 for fully testing, the details was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 151116008 (Assigned by BACL.Dongguan). The EUT was received on 2015-11-20.*

Objective

This type approval report is prepared on behalf of *Wintop Electronics Co., Limited*. in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in engineering mode with maximum power output and switched the channels by key.

Channels list as follows:

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2405	5	2440
2	2413	6	2450
3	2422	7	2460
4	2430	8	2470

Channel 1, 4, 8 were selected to test.

EUT Exercise Software

No software was used in test.

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
/	/	/	/	/	/

Block Diagram of Test Setup

Below 1GHz:

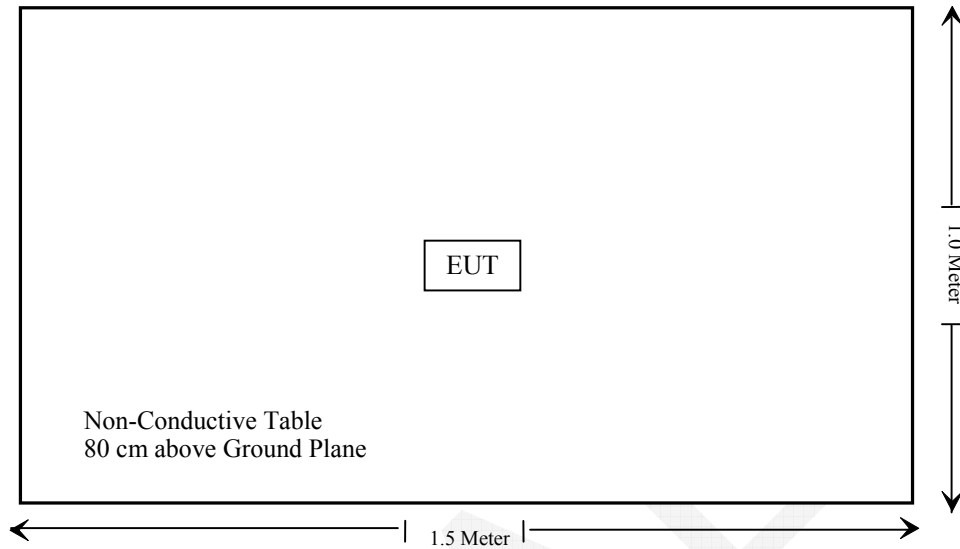

Above 1GHz:

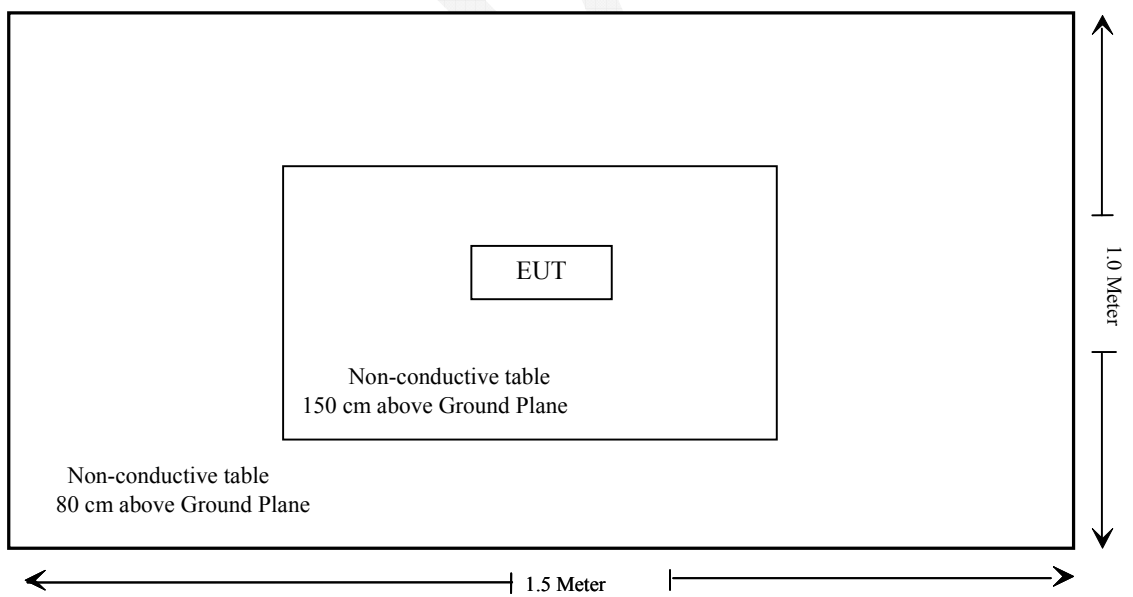

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance
§15.249(d)	Outside of Band Emission (50dB attenuation)	Compliance

Not Applicable: The EUT is battery operated equipment.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is -1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FEMVA

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty


Compliance or non-compliance with a disturbance limit shall be determined in the following manner

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

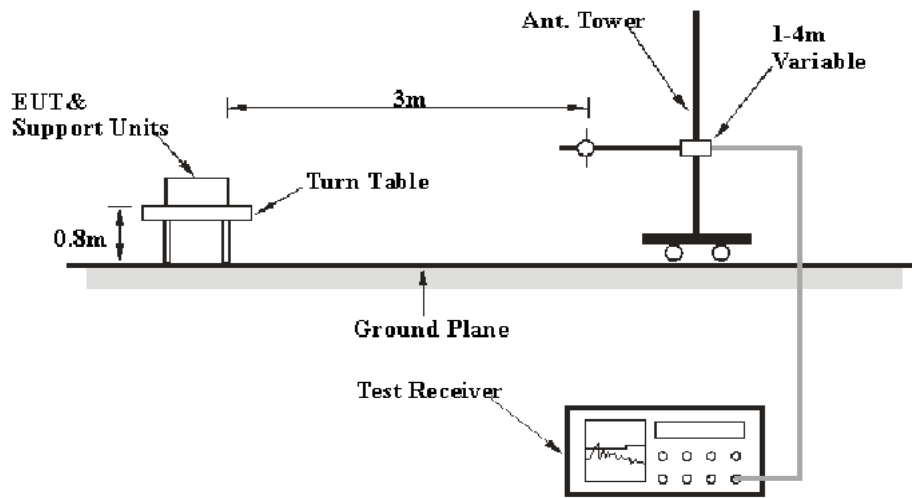

Above 1 GHz:

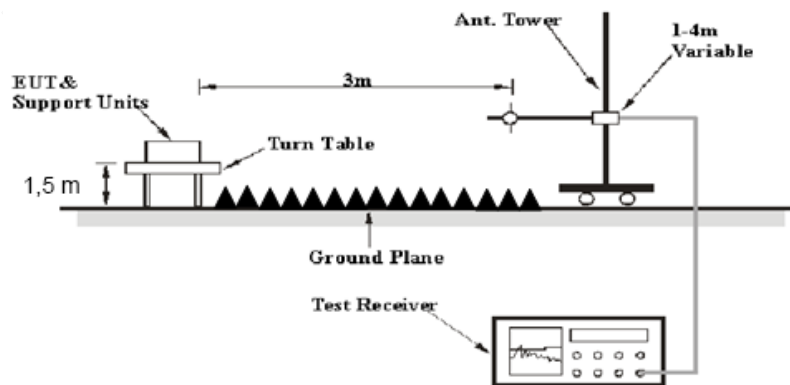

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013 The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249, with the worst margin reading of:

0.57 dB at 9880 MHz in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	24.8 °C
Relative Humidity:	42%
ATM Pressure:	101.2 kPa

The testing was performed by Allen Qiao on 2015-11-24.

Test Mode: Transmitting

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB(1/m))					
Low Channel: 2405 MHz									
2405	57.25	PK	H	25.65	3.66	0.00	86.56	114.00	27.44
2405	55.11	AV	H	25.65	3.66	0.00	84.42	94.00	9.58
2405	52.95	PK	V	25.65	3.66	0.00	82.26	114.00	31.74
2405	50.78	AV	V	25.65	3.66	0.00	80.09	94.00	13.91
2400	37.34	PK	H	25.64	3.65	0.00	66.63	74.00	7.37
2400	23.45	AV	H	25.64	3.65	0.00	52.74	54.00	1.26*
2390	26.57	PK	H	25.61	3.63	0.00	55.81	74.00	18.19
2390	12.16	AV	H	25.61	3.63	0.00	41.40	54.00	12.60
4810	46.75	PK	H	30.61	5.05	27.41	55.00	74.00	19.00
4810	39.18	AV	H	30.61	5.05	27.41	47.43	54.00	6.57
7215	32.15	PK	H	34.12	6.62	25.91	46.98	74.00	27.02
7215	19.22	AV	H	34.12	6.62	25.91	34.05	54.00	19.95
9620	38.47	PK	H	35.99	8.54	27.53	55.47	74.00	18.53
9620	30.69	AV	H	35.99	8.54	27.53	47.69	54.00	6.31
3131	33.69	PK	H	27.62	6.93	27.43	40.81	74.00	33.19
3131	21.02	AV	H	27.62	6.93	27.43	28.14	54.00	25.86
265.2	31.2	QP	H	13.39	1.96	21.50	25.05	46.00	20.95
Middle Channel: 2430 MHz									
2430	57.63	PK	H	25.72	3.73	0.00	87.08	114.00	26.92
2430	55.52	AV	H	25.72	3.73	0.00	84.97	94.00	9.03
2430	53.26	PK	V	25.72	3.73	0.00	82.71	114.00	31.29
2430	51.03	AV	V	25.72	3.73	0.00	80.48	94.00	13.52
4860	49.12	PK	H	30.74	5.05	27.42	57.49	74.00	16.51
4860	42.85	AV	H	30.74	5.05	27.42	51.22	54.00	2.78*
7290	32.09	PK	H	34.30	6.71	25.89	47.21	74.00	26.79
7290	19.17	AV	H	34.30	6.71	25.89	34.29	54.00	19.71
9720	40.14	PK	H	36.23	8.59	27.30	57.66	74.00	16.34
9720	33.04	AV	H	36.23	8.59	27.30	50.56	54.00	3.44*
3131	34.05	PK	H	27.62	6.93	27.43	41.17	74.00	32.83
3131	21.45	AV	H	27.62	6.93	27.43	28.57	54.00	25.43
3190	33.57	PK	H	27.81	6.26	27.38	40.26	74.00	33.74
3190	20.93	AV	H	27.81	6.26	27.38	27.62	54.00	26.38
265.2	31.4	QP	H	13.39	1.96	21.50	25.25	46.00	20.75
High Channel: 2470 MHz									
2470	57.14	PK	H	25.82	3.72	0.00	86.68	114.00	27.32
2470	55.01	AV	H	25.82	3.72	0.00	84.55	94.00	9.45
2470	52.78	PK	V	25.82	3.72	0.00	82.32	114.00	31.68
2470	50.62	AV	V	25.82	3.72	0.00	80.16	94.00	13.84
2483.5	27.57	PK	H	25.86	3.67	0.00	57.10	74.00	16.90
2483.5	12.9	AV	H	25.86	3.67	0.00	42.43	54.00	11.57
4940	46.75	PK	H	30.94	5.36	27.43	55.62	74.00	18.38
4940	40.27	AV	H	30.94	5.36	27.43	49.14	54.00	4.86
7410	32.03	PK	H	34.58	6.85	25.89	47.57	74.00	26.43
7410	19.18	AV	H	34.58	6.85	25.89	34.72	54.00	19.28
9880	42.51	PK	H	36.61	8.68	26.82	60.98	74.00	13.02
9880	34.96	AV	H	36.61	8.68	26.82	53.43	54.00	0.57*
3131	33.42	PK	H	27.62	6.93	27.43	40.54	74.00	33.46
3131	20.86	AV	H	27.62	6.93	27.43	27.98	54.00	26.02
265.2	31.5	QP	H	13.39	1.96	21.50	25.35	46.00	20.65

Within uncertainty measurement!

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	831259/019	2015-07-28	2016-07-27
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	41 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-11-27.


Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2405	2.544
Middle	2430	2.560
High	2470	2.560

Low Channel

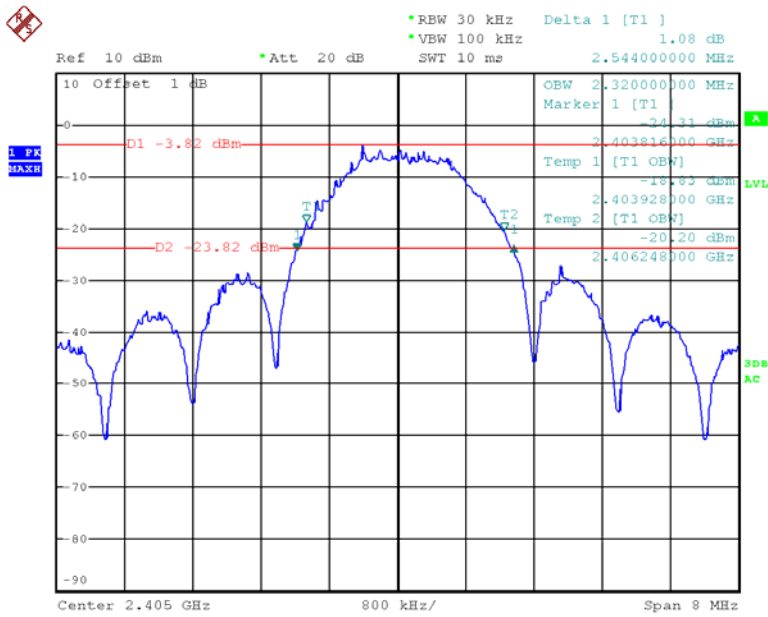


Date: 27.NOV.2015 13:54:27

Middle Channel

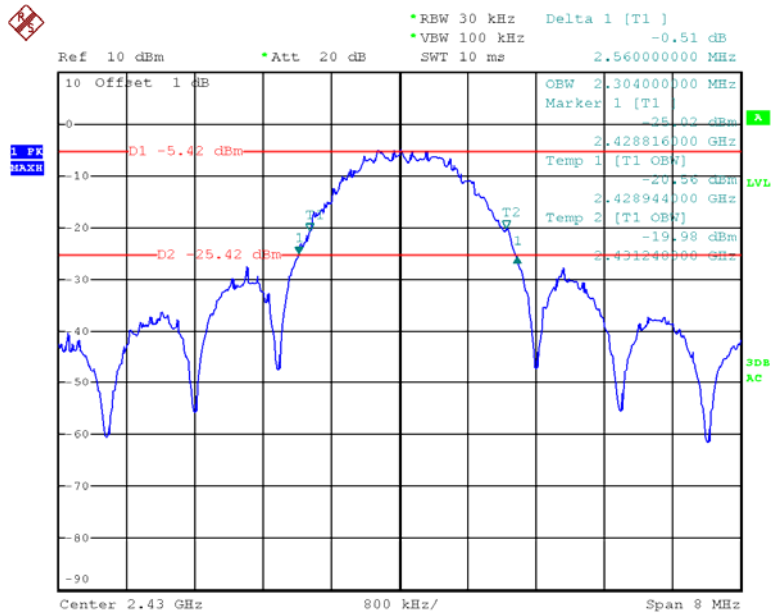

Date: 27.NOV.2015 13:55:14

High Channel

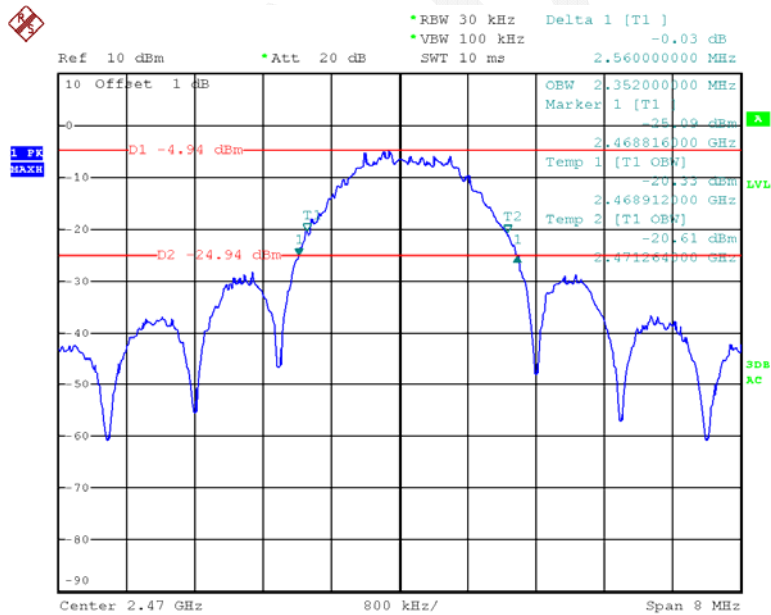

Date: 27.NOV.2015 13:53:11

FCC§15.249(d) - OUT OF BAND EMISSION (50 dB ATTENUATION)

Applicable Standard

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	831259/019	2015-07-28	2016-07-27
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	41 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-11-27.

Test Result: Compliant.


Please refer to the following table and plots:

Band Edge	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)
Left	42.43	50
Right	54.70	50

Note


FEMVA

Band Edge, Left Side

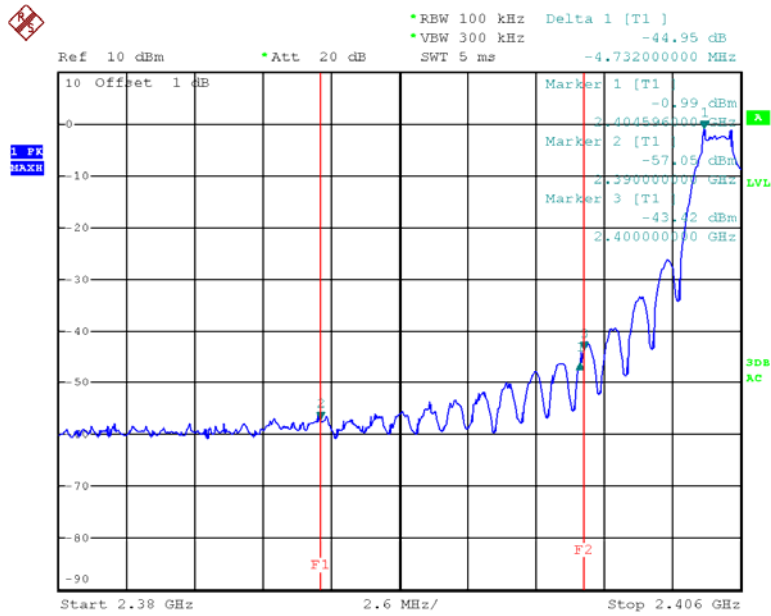

Date: 27.NOV.2015 13:59:50

Band Edge, Right Side

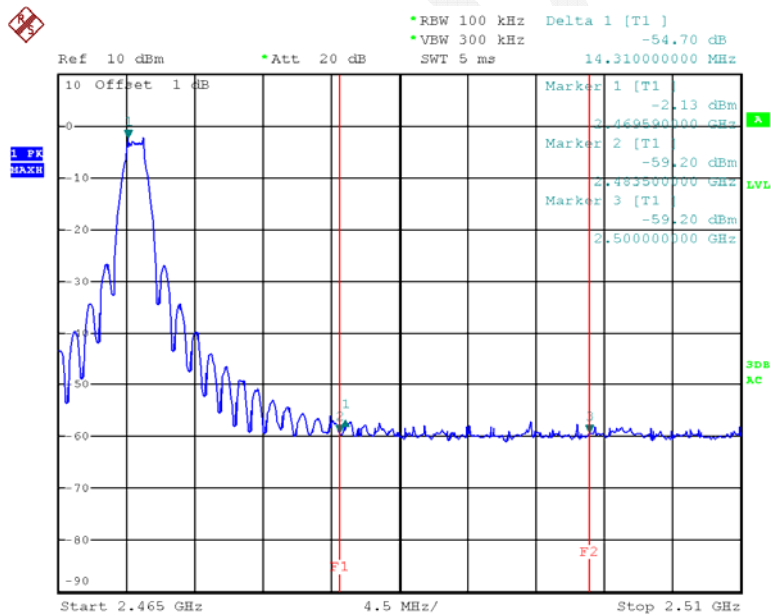

Date: 27.NOV.2015 13:57:29

DECLARATION LETTER

Wintop Electronics Co., Limited
Add: Unit 04 7/F, Bright Way Tower 33, Mong Kok RD KL Hong Kong
Tel: 86-755-84255795 Fax: 86-755-84255950

DECLARATION OF SIMILARITY

2015-11-17

To

Bay Area Compliance Laboratories Corp.(Dongguan)
No.69 Pulong Village, Puxinhu Industry Zone, Tangxia, Dongguan, China
Tel: +86 769 86858888 Fax: +86 769 86858892
<http://www.baclcorp.com>

Dear Sir or Madam:

We, Wintop Electronics Co., Limited, hereby declare that testing model product: 2.4GHz Wireless Optical Mouse, Model number: WM-117. Multiple Model: MP1950BLK. Multiple Model have the same appearance, structure, PCB, Material and function to the testing product's model, and only are different for model name. Besides the differences in the above, we declare the products are identical. We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing. Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature



***** END OF REPORT *****