

# FCC TEST REPORT

For

Wintop Electronics Co., Limited

Wireless Mouse

Model No.: WM-717

Prepared For : Wintop Electronics Co., Limited  
Address : Unit 04 7/F, Bright Way Tower 33, Mong Kok RD KL, Hong Kong

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217050057W  
Date of Test : May 15~26, 2017  
Date of Report : May 26, 2017

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	6
1.6. Description of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	9
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiated Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	18
5. 20dB Bandwidth Test.....	32
5.1. Test Standard and Limit.....	32
5.2. Test Setup.....	32
5.3. Test Procedure.....	32
5.4. Test Data.....	32
6. Antenna Requirement.....	35
6.1. Test Standard and Requirement.....	35
6.2. Antenna Connected Construction.....	35
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	36
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	38
APPENDIX III -- INTERNAL PHOTOGRAPH.....	41

# TEST REPORT

Applicant : Wintop Electronics Co., Limited  
Manufacturer : Shenzhen Wintop Electronics Co., Limited  
Product Name : Wireless Mouse  
Model No. : WM-717  
Trade Mark : N.A.  
Rating(s) : Mouse: Input DC 5V, 15mA (Battery: DC 3.7V, 300mAh)  
: Dongle: DC 5V By USB Port

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : May 15~26, 2017

Prepared by :



*Winkey Wang*

(Tested Engineer / Winkey Wang)

Reviewer :

*Dolny mo*

(Project Manager / Brown Lu)

Approved & Authorized Signer :

*Tom Chen*

(Manager / Tom Chen)

# 1. General Information

## 1.1. Client Information

Applicant	:	Wintop Electronics Co., Limited
Address	:	Unit 04 7/F, Bright Way Tower 33, Mong Kok RD KL, Hong Kong
Manufacturer	:	Shenzhen Wintop Electronics Co., Limited
Address	:	2, 3, 4/F, Building 46, Xinhe Road, Shangmugu, Pinghu Town, Longgang District, Shenzhen, China

## 1.2. Description of Device (EUT)

Product Name	:	Wireless Mouse	
Model No.	:	WM-717	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 120V, 60Hz / AC 240V, 60Hz DC 3.7V Battery inside	
Product Description	:	Operation Frequency:	2405-2472MHz
	:	Number of Channel:	68 Channels
	:	Modulation Type:	FSK
	:	Antenna Type:	PCB Antenna
	:	Antenna Gain(Peak):	1.76 dBi

**Remark:** 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE M/N: STC-A2050I1000USBA-C S/N: 201202102100876 Input: 100-240V~50/60Hz 0.3A Output: DC 5V, 1000mA
---------	---	---

#### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charge Mode
Mode 2	CH01
Mode 3	CH44
Mode 4	CH68

For Conducted Emission	
Final Test Mode	Description
Mode 1	Charge Mode


For Radiated Emission	
Final Test Mode	Description
Mode 2	CH01
Mode 3	CH44
Mode 4	CH68

**1.5. List of Channels**


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2405	18	2422	35	2439	52	2456
2	2406	19	2423	36	2440	53	2457
3	2407	20	2424	37	2441	54	2458
4	2408	21	2425	38	2442	55	2459
5	2409	22	2426	39	2443	56	2460
6	2410	23	2427	40	2444	57	2461
7	2411	24	2428	41	2445	58	2462
8	2412	25	2429	42	2446	59	2463
9	2413	26	2430	43	2447	60	2464
10	2414	27	2431	44	2448	61	2465
11	2415	28	2432	45	2449	62	2466
12	2416	29	2433	46	2450	63	2467
13	2417	30	2434	47	2451	64	2468
14	2418	31	2435	48	2452	65	2469
15	2419	32	2436	49	2453	66	2470
16	2420	33	2437	50	2454	67	2471
17	2421	34	2438	51	2455	68	2472

### 1.6. Description of Test Setup

CE

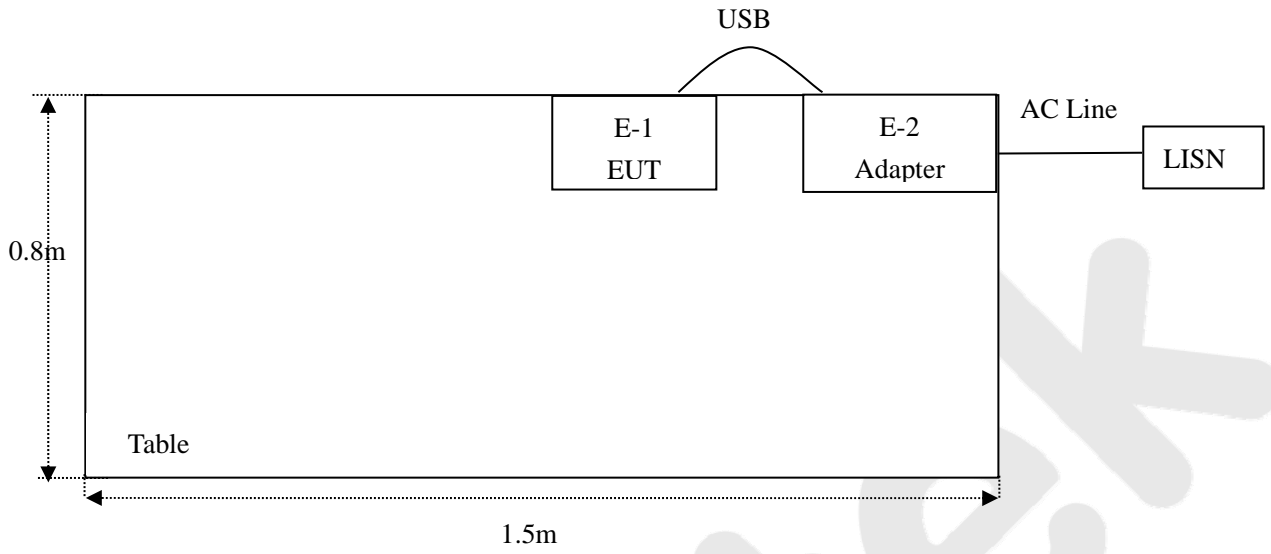

RE

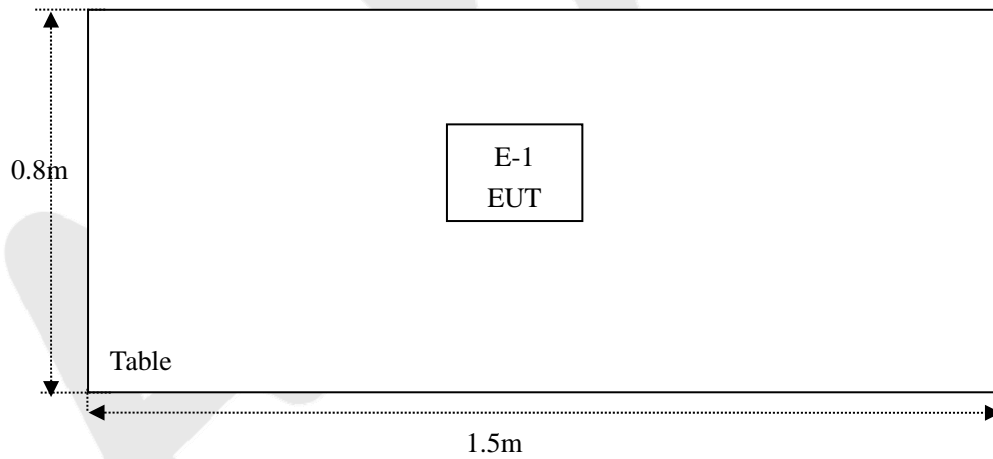

### 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Jul. 19, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jun. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Jun. 17, 2016	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Jul. 12, 2016	1 Year
5	Preamplifier	Instruments corporation	EMC011830	980100	Jun. 17, 2016	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Jun. 17, 2016	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 06, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 06, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519	012	May 11, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Jun. 17, 2016	1 Year
11	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	Agilent	KFSW150502	15I00041SN045	Jun. 17, 2016	1 Year
13.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun. 17, 2016	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun. 17, 2016	1 Year
15	Signal Generator	Agilent	E4421B	MY41000743	Jun. 17, 2016	1 Year
16.	DC Power supply	IV	IV-8080	YQSB0096	Jun. 17, 2016	1 Year
17.	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150 M8	SE-0137	Jun. 17, 2016	1 Year

### 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB



## 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 752021**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

### **IC-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

### **Test Location**

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS

**Remark:** "N/A" is an abbreviation for Not Applicable.


### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

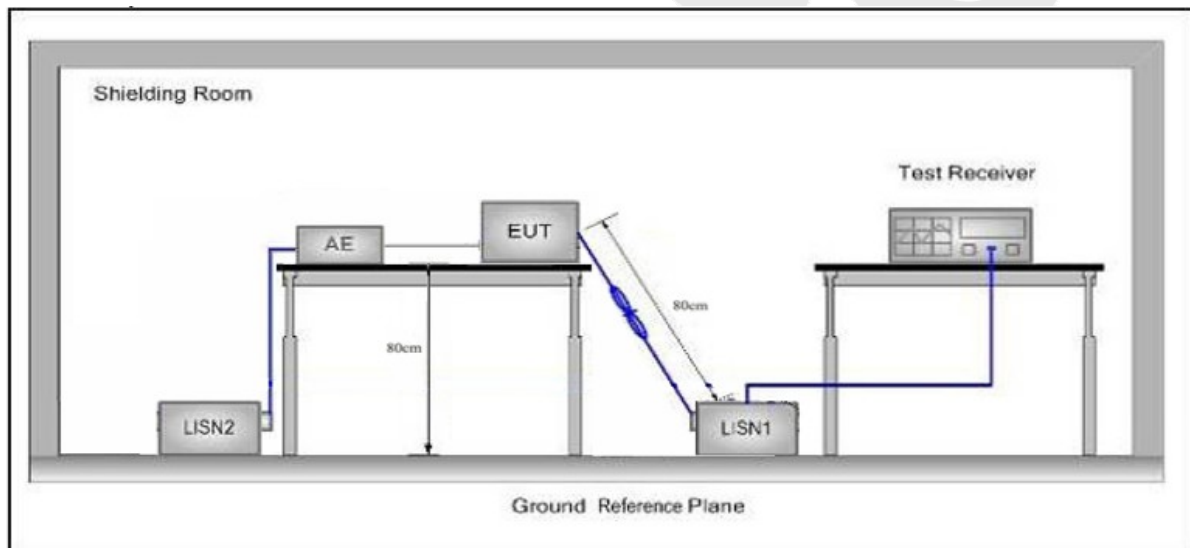

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.:25°C Hum.:50%

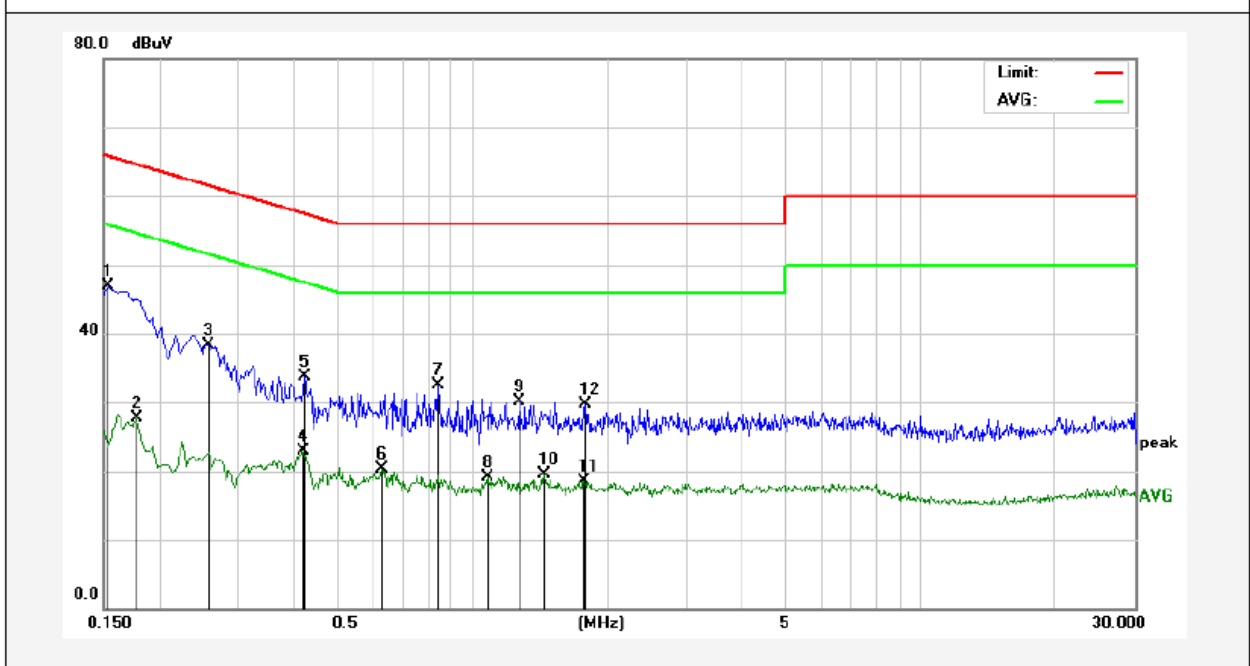


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	27.07	19.90	46.97	65.78	-18.81	QP	
2	0.1780	7.88	19.90	27.78	54.57	-26.79	AVG	
3	0.2580	18.47	19.89	38.36	61.49	-23.13	QP	
4	0.4180	3.06	19.94	23.00	47.49	-24.49	AVG	
5	0.4220	13.72	19.94	33.66	57.41	-23.75	QP	
6	0.6300	0.31	20.02	20.33	46.00	-25.67	AVG	
7	0.8420	12.47	20.08	32.55	56.00	-23.45	QP	
8	1.0780	-0.95	20.12	19.17	46.00	-26.83	AVG	
9	1.2740	9.95	20.13	30.08	56.00	-25.92	QP	
10	1.4460	-0.66	20.13	19.47	46.00	-26.53	AVG	
11	1.7740	-1.55	20.14	18.59	46.00	-27.41	AVG	
12	1.7900	9.51	20.14	29.65	56.00	-26.35	QP	

Note: Factor= Insertion Loss+ Cable Loss + Attenuator Factor

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.:25°C Hum.:50%

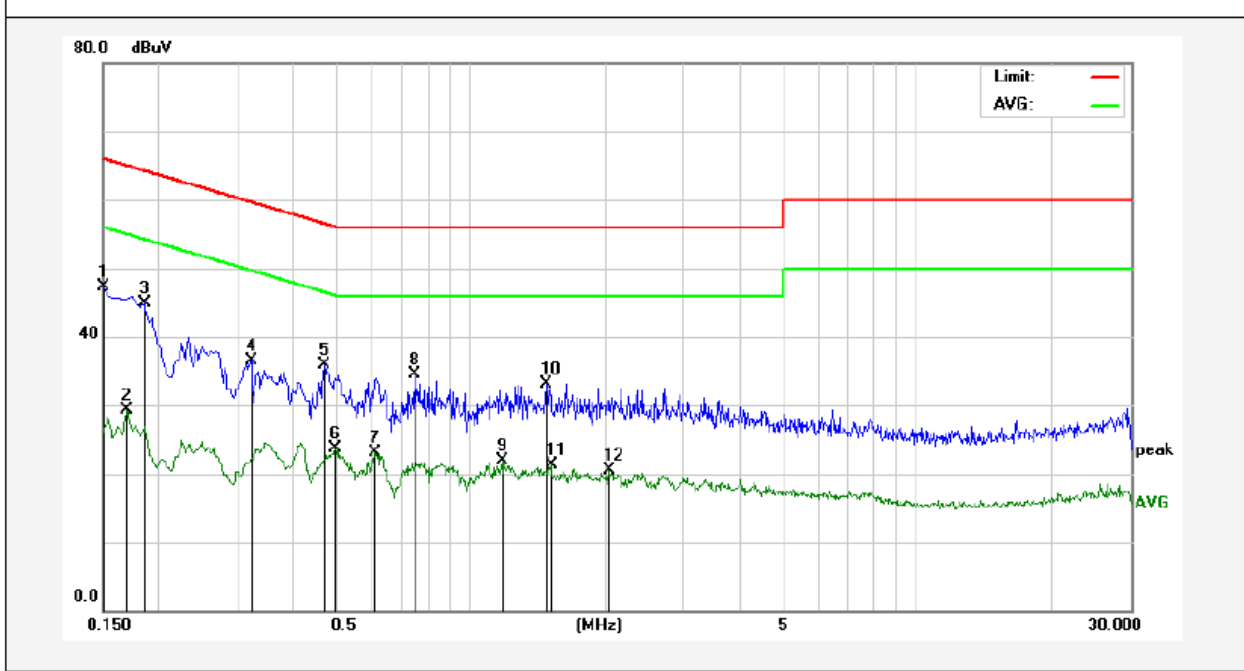


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	27.43	19.90	47.33	65.99	-18.66	QP	
2	0.1700	9.41	19.90	29.31	54.96	-25.65	AVG	
3	0.1860	24.99	19.90	44.89	64.21	-19.32	QP	
4	0.3220	16.70	19.90	36.60	59.65	-23.05	QP	
5	0.4700	15.84	19.97	35.81	56.51	-20.70	QP	
6	0.4980	3.64	19.98	23.62	46.03	-22.41	AVG	
7	0.6100	3.10	20.01	23.11	46.00	-22.89	AVG	
8	0.7500	14.37	20.05	34.42	56.00	-21.58	QP	
9	1.1740	1.75	20.12	21.87	46.00	-24.13	AVG	
10	1.4780	13.00	20.13	33.13	56.00	-22.87	QP	
11	1.5140	1.09	20.13	21.22	46.00	-24.78	AVG	
12	2.0540	0.34	20.14	20.48	46.00	-25.52	AVG	

Note: Factor= Insertion Loss+ Cable Loss + Attenuator Factor

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.:25°C Hum.:50%

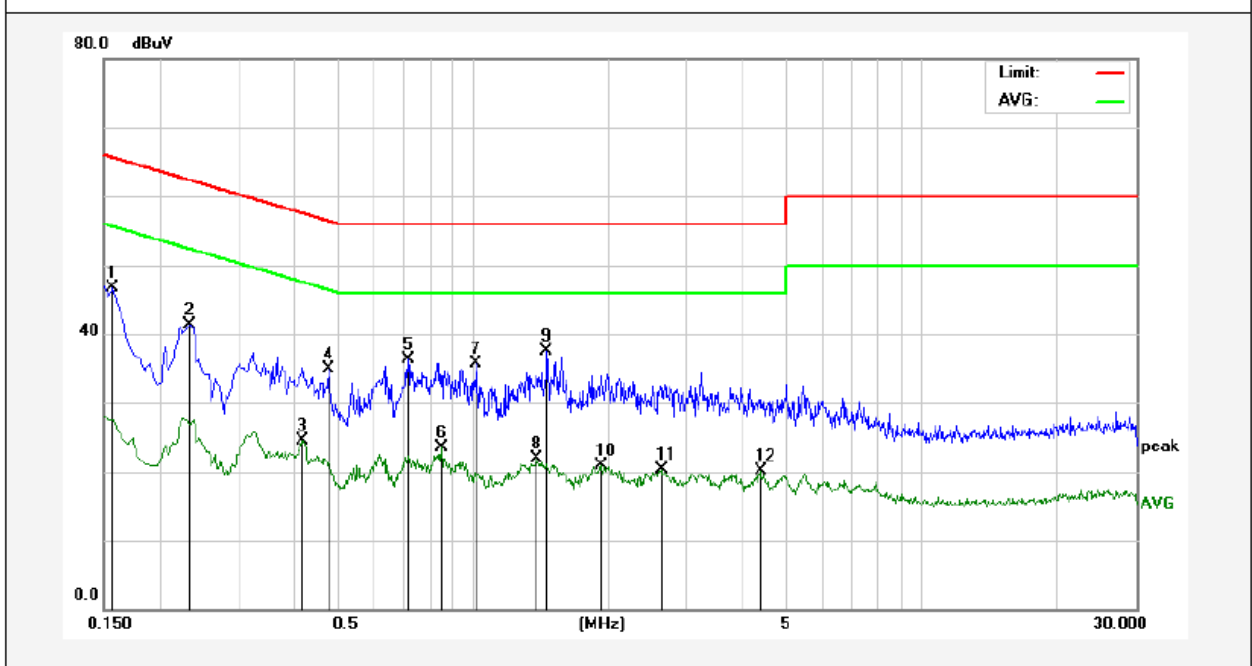


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1580	26.73	19.90	46.63	65.56	-18.93	QP	
2	0.2340	21.44	19.89	41.33	62.30	-20.97	QP	
3	0.4180	4.62	19.94	24.56	47.49	-22.93	AVG	
4	0.4780	14.91	19.97	34.88	56.37	-21.49	QP	
5	0.7180	16.29	20.04	36.33	56.00	-19.67	QP	
6	0.8500	3.38	20.08	23.46	46.00	-22.54	AVG	
7	1.0180	15.51	20.12	35.63	56.00	-20.37	QP	
8	1.3860	1.68	20.13	21.81	46.00	-24.19	AVG	
9	1.4620	17.36	20.13	37.49	56.00	-18.51	QP	
10	1.9340	0.70	20.14	20.84	46.00	-25.16	AVG	
11	2.6340	0.15	20.15	20.30	46.00	-25.70	AVG	
12	4.3740	-0.09	20.19	20.10	46.00	-25.90	AVG	

Note: Factor= Insertion Loss+ Cable Loss + Attenuator Factor

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.:25°C Hum.:50%

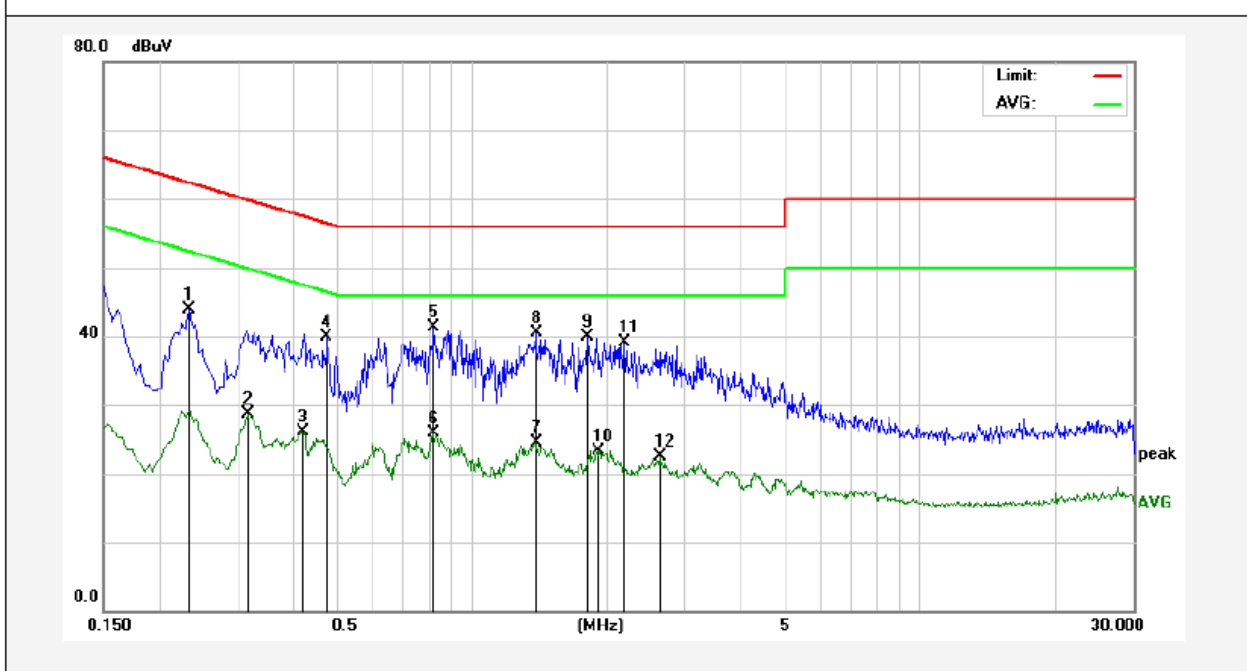

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2340	24.11	19.89	44.00	62.30	-18.30	QP	
2	0.3180	8.74	19.90	28.64	49.76	-21.12	AVG	
3	0.4180	6.26	19.94	26.20	47.49	-21.29	AVG	
4	0.4740	20.00	19.97	39.97	56.44	-16.47	QP	
5	0.8260	21.16	20.07	41.23	56.00	-14.77	QP	
6	0.8260	5.92	20.07	25.99	46.00	-20.01	AVG	
7	1.3860	4.41	20.13	24.54	46.00	-21.46	AVG	
8	1.3940	20.28	20.13	40.41	56.00	-15.59	QP	
9	1.8100	19.77	20.14	39.91	56.00	-16.09	QP	
10	1.9180	3.14	20.14	23.28	46.00	-22.72	AVG	
11	2.1980	18.93	20.14	39.07	56.00	-16.93	QP	
12	2.6340	2.30	20.15	22.45	46.00	-23.55	AVG	

Note: Factor= Insertion Loss+ Cable Loss + Attenuator Factor

## 4. Radiated Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

**Remark:**

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



### 4.2. Test Setup

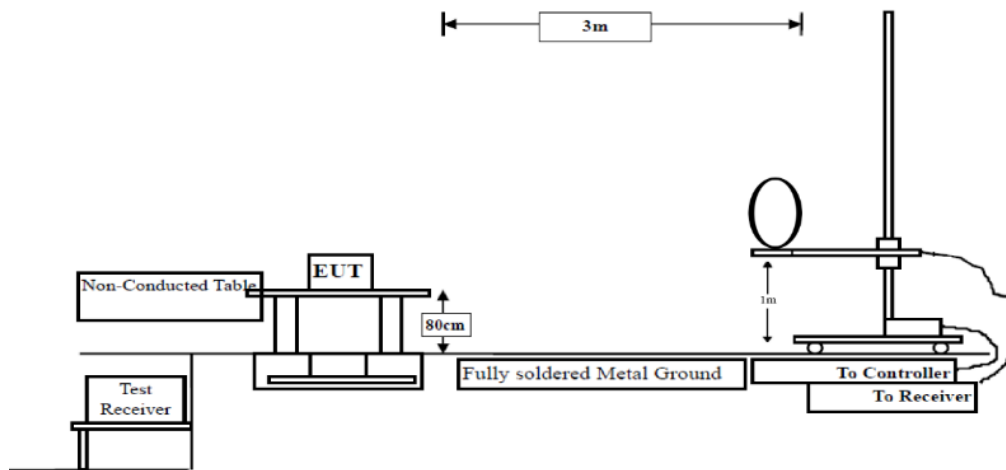


Figure 1. Below 30MHz

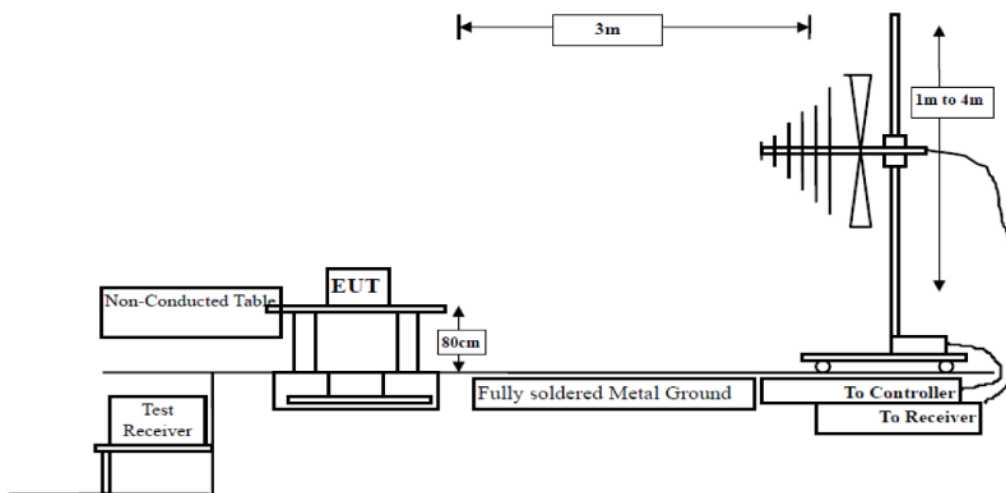


Figure 2. 30MHz to 1GHz

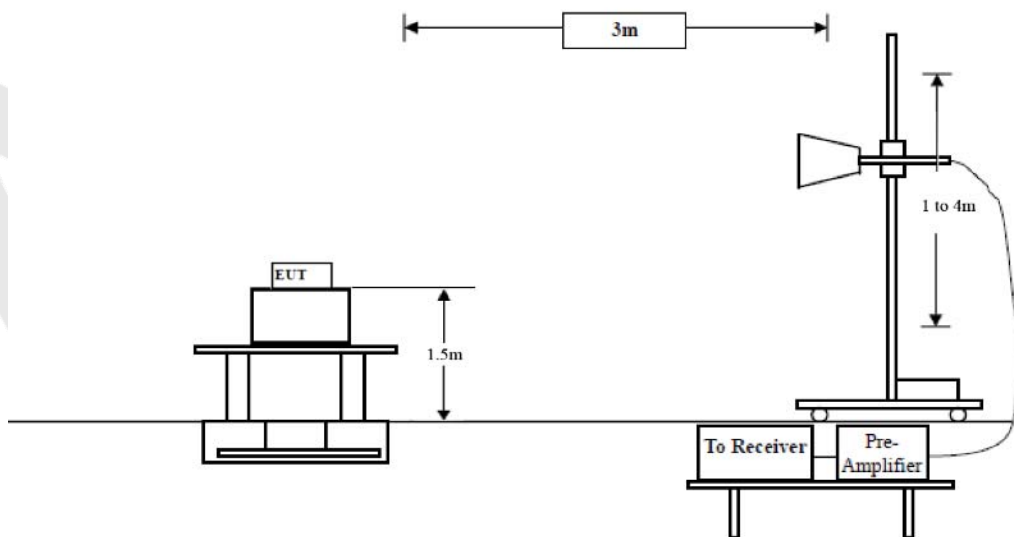


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data


#### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Test Results (30~1000MHz)**

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: AC120V/60Hz  
 Test Mode: TX Mode Polarization: Horizontal

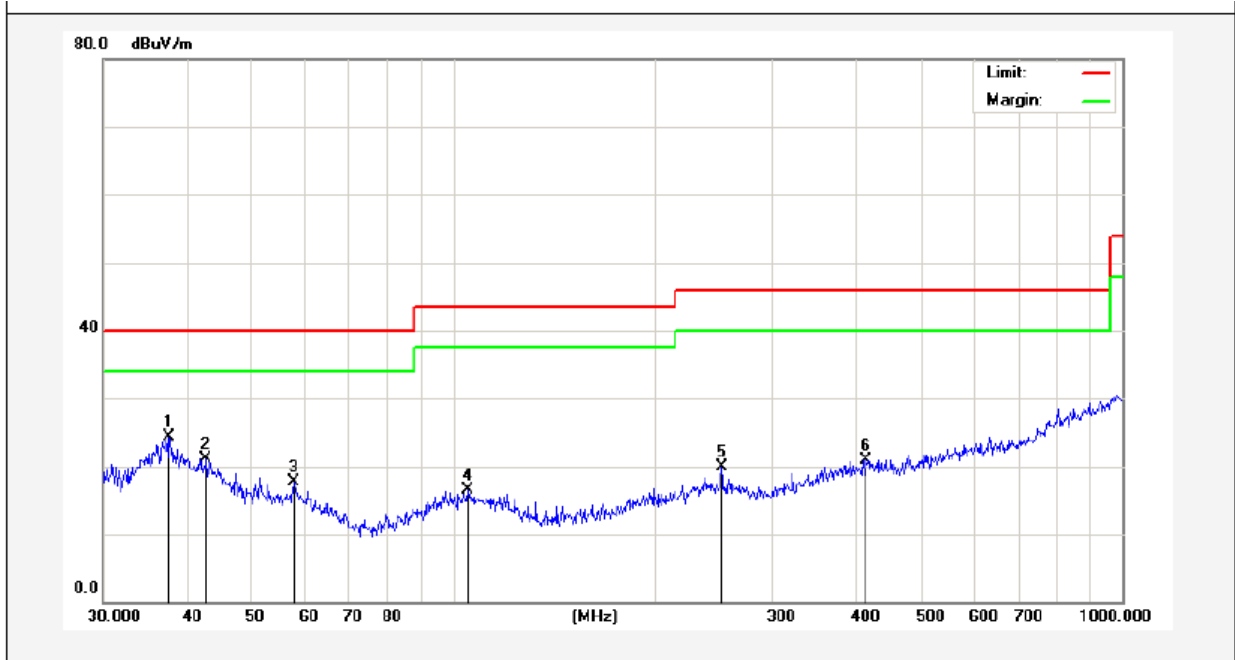


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.5479	36.68	-12.30	24.38	40.00	-15.62	peak			
2	42.7496	32.63	-11.45	21.18	40.00	-18.82	peak			
3	57.7962	32.97	-15.19	17.78	40.00	-22.22	peak			
4	105.2718	37.22	-20.70	16.52	43.50	-26.98	peak			
5	252.0627	38.52	-18.64	19.88	46.00	-26.12	peak			
6	413.2706	33.55	-12.55	21.00	46.00	-25.00	peak			

Note: 1) Factor = Antenna Factor + Cable Loss – Preamplifier Factor  
 2) Result = Reading + Factor


**Test Results (30~1000MHz)**

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: AC120V/60HZ  
 Test Mode: TX Mode Polarization: Vertical

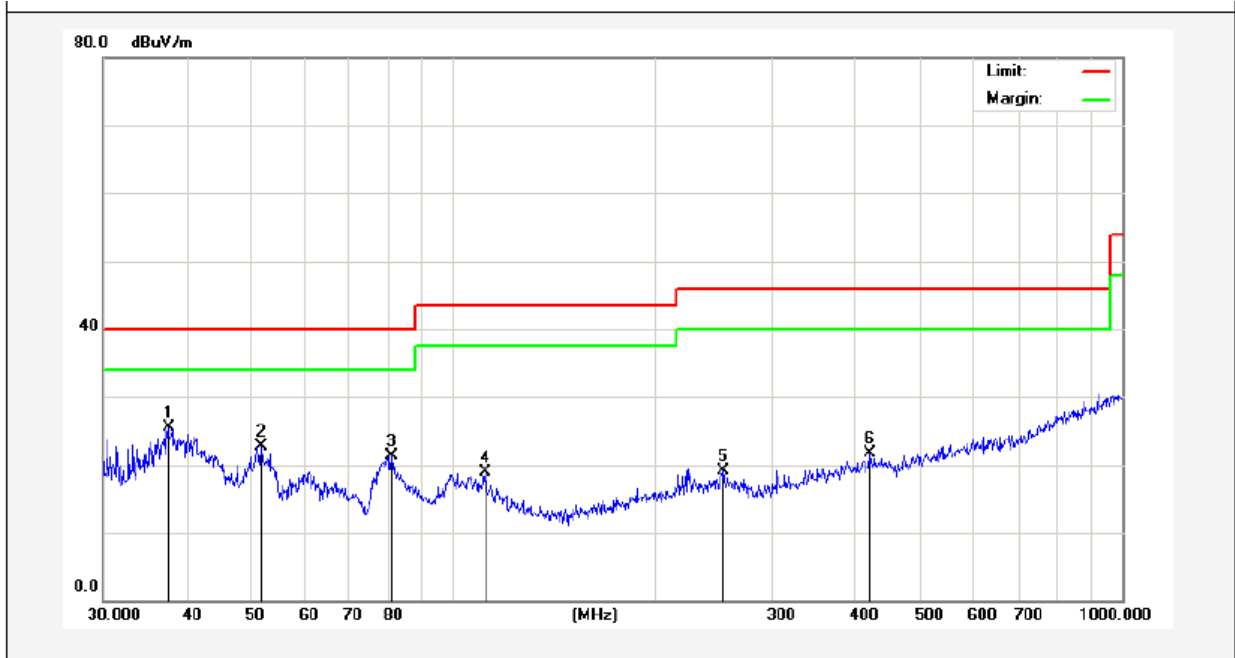

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.5479	37.75	-12.30	25.45	40.00	-14.55	peak			
2	51.6616	37.45	-14.69	22.76	40.00	-17.24	peak			
3	80.9275	41.02	-19.68	21.34	40.00	-18.66	peak			
4	111.7380	34.58	-15.74	18.84	43.50	-24.66	peak			
5	253.8367	33.23	-14.03	19.20	46.00	-26.80	peak			
6	419.1081	33.03	-11.30	21.73	46.00	-24.27	peak			

Note: 1) Factor = Antenna Factor + Cable Loss – Preamplifier Factor  
 2) Result = Reading + Factor

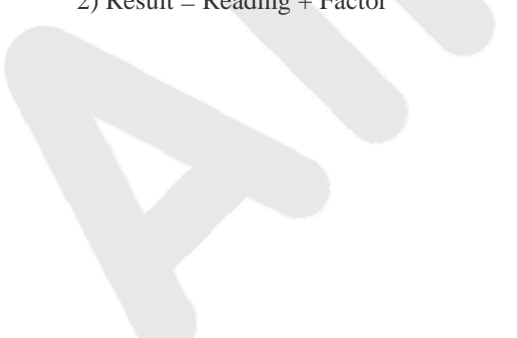

**Test Results (Above 1000MHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2405.0000	92.65	31.21	2.17	35.30	90.73	114.00	-23.27	V	Peak
2405.0000	85.44	31.21	2.17	35.30	83.52	94.00	-10.48	V	AVG
4810.0000	47.35	34.01	2.56	34.71	49.21	74.00	-24.79	V	Peak
4810.0000	41.16	34.01	2.56	34.71	43.02	54.00	-10.98	V	AVG
7215.0000	40.68	36.16	2.98	35.15	44.67	74.00	-29.33	V	Peak
7215.0000	33.59	36.16	2.98	35.15	37.58	54.00	-16.42	V	AVG
9620.0000	*								
12025.0000	*								
14430.0000	*								
16835.0000	*								
2405.0000	90.95	31.21	2.17	35.30	89.03	114.00	-24.97	H	Peak
2405.0000	81.64	31.21	2.17	35.30	79.72	94.00	-14.28	H	AVG
4810.0000	42.17	34.01	2.56	34.71	44.03	74.00	-29.97	H	Peak
4810.0000	39.05	34.01	2.56	34.71	40.91	54.00	-13.09	H	AVG
7215.0000	39.12	36.16	2.98	35.15	43.11	74.00	-30.89	H	Peak
7215.0000	32.46	36.16	2.98	35.15	36.45	54.00	-17.55	H	AVG
9620.0000	*								
12025.0000	*								
14430.0000	*								
16835.0000	*								

Test Mode: CH17 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2448.0000	91.35	31.22	2.21	24.62	100.16	114.00	-13.84	V	Peak
2448.0000	74.29	31.22	2.21	24.62	83.10	94.00	-10.90	V	AVG
4896.0000	48.05	35.02	2.59	34.60	51.06	74.00	-22.94	V	Peak
4896.0000	40.39	35.02	2.59	34.60	43.40	54.00	-10.60	V	AVG
7344.0000	39.17	36.19	3.02	35.16	43.22	74.00	-30.78	V	Peak
7344.0000	32.86	36.19	3.02	35.16	36.91	54.00	-17.09	V	AVG
9792.0000	*								
12240.0000	*								
14688.0000	*								
17136.0000	*								
2430.0000	90.86	31.21	2.21	24.62	99.66	114.00	-14.34	H	Peak
2430.0000	74.08	31.21	2.21	24.62	82.88	94.00	-11.12	H	AVG
4860.0000	41.08	35.00	2.59	34.60	44.07	74.00	-29.93	H	Peak
4860.0000	37.45	35.00	2.59	34.60	40.44	54.00	-13.56	H	AVG
7290.0000	39.11	36.17	3.02	35.16	43.14	74.00	-30.86	H	Peak
7290.0000	31.94	36.17	3.02	35.16	35.97	54.00	-18.03	H	AVG
9720.0000	*								
12150.0000	*								
14580.0000	*								
17010.0000	*								


Test Mode: CH34 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2472.0000	92.69	31.65	2.20	36.00	90.54	114.00	-23.46	V	Peak
2472.0000	84.46	31.65	2.20	36.00	82.31	94.00	-11.69	V	AVG
4944.0000	50.11	35.06	2.58	34.79	52.96	74.00	-21.04	V	Peak
4944.0000	39.01	35.06	2.58	34.79	41.86	54.00	-12.14	V	AVG
7416.0000	37.18	36.19	3.02	34.90	41.49	74.00	-32.51	V	Peak
7416.0000	30.85	36.19	3.02	34.90	35.16	54.00	-18.84	V	AVG
9888.0000	*								
12360.0000	*								
14832.0000	*								
17304.0000	*								
2470.0000	92.12	31.65	2.20	36.00	89.97	114.00	-24.03	H	Peak
2470.0000	74.02	31.65	2.20	36.00	71.87	94.00	-22.13	H	AVG
4940.0000	46.13	35.06	2.58	34.79	48.98	74.00	-25.02	H	Peak
4940.0000	39.07	35.06	2.58	34.79	41.92	54.00	-12.08	H	AVG
7410.0000	40.19	36.19	3.02	34.90	44.50	74.00	-29.50	H	Peak
7410.0000	35.28	36.19	3.02	34.90	39.59	54.00	-14.41	H	AVG
9880.0000	*								
12350.0000	*								
14820.0000	*								
17290.0000	*								

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Band Edge:**

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH01 Polarization: Horizontal  
 Detector Peak

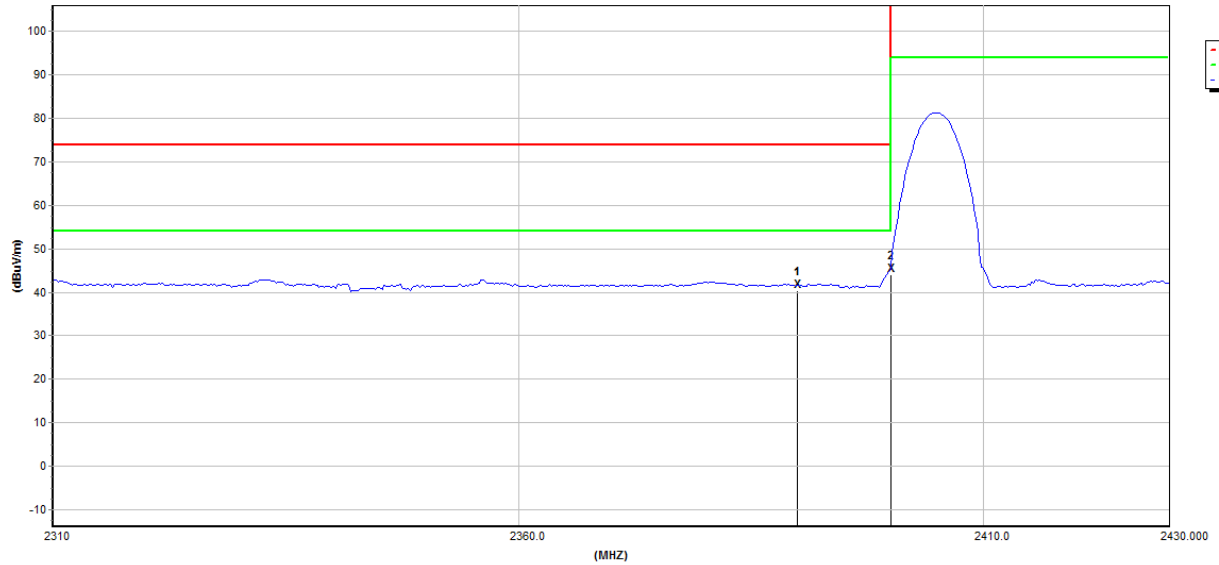


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2390.00	43.14	29.15	3.41	34.01	41.69	74.00	-32.31
2400.00	46.77	29.16	3.43	34.01	45.35	74.00	-28.65

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor



Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH01 Polarization: Vertical  
 Detector Peak

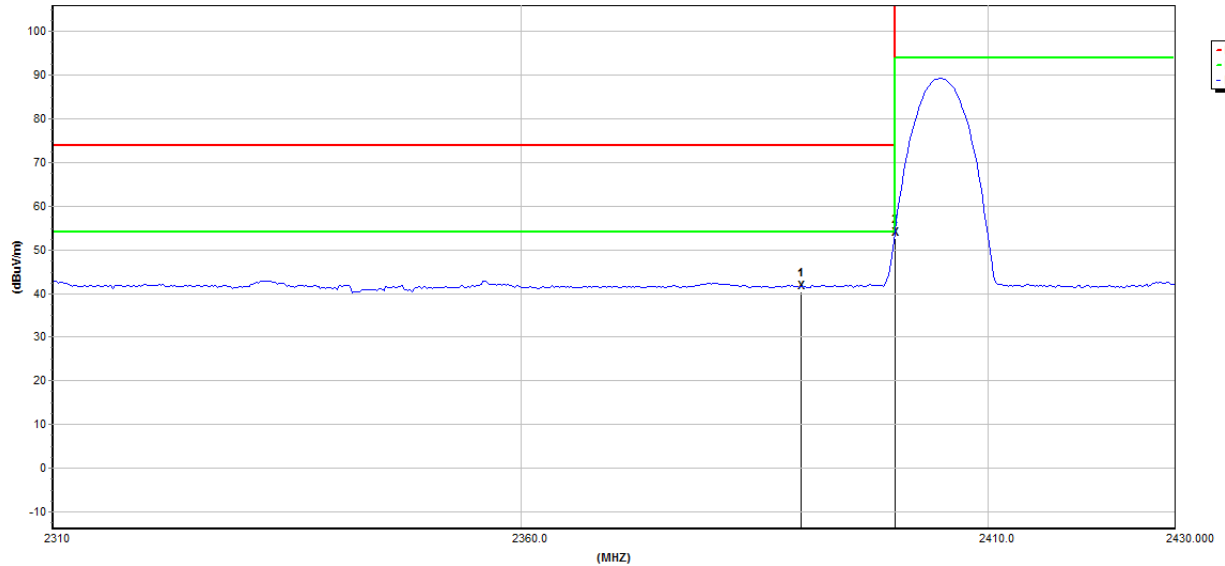


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2390.00	43.09	29.15	3.41	34.01	41.64	74.00	-32.36
2400.00	55.3	29.16	3.43	34.01	53.88	74.00	-20.12

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH01 Polarization: Horizontal  
 Detector AVG

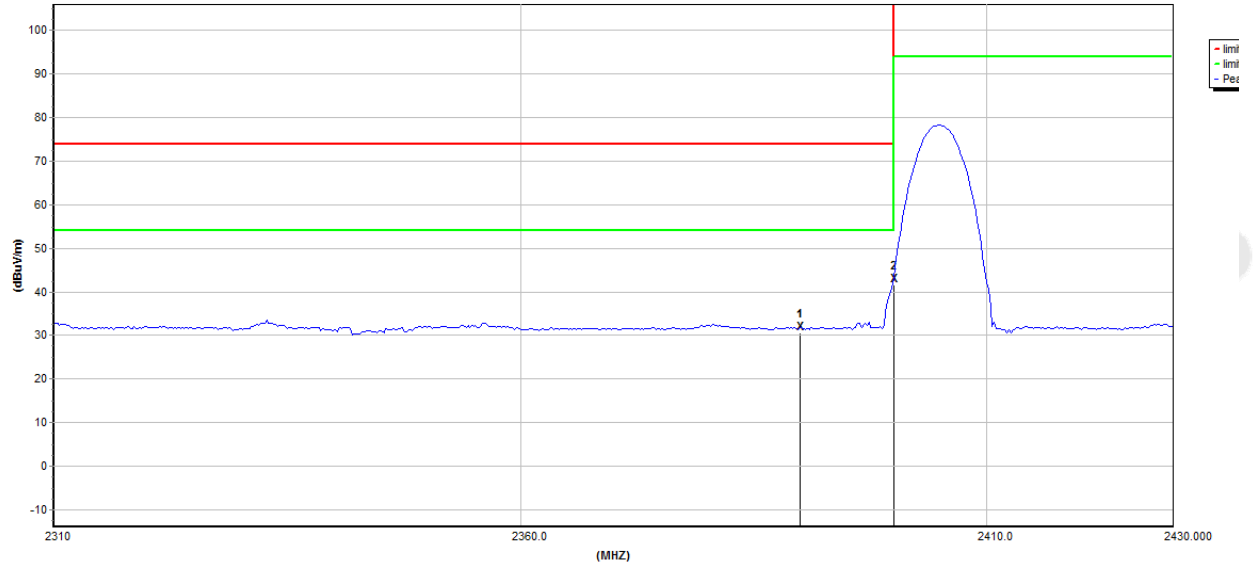


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2390.00	33.14	29.15	3.41	34.01	31.69	54.00	-22.31
2400.00	44.27	29.16	3.43	34.01	42.85	54.00	-11.15

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH01 Polarization: Vertical  
 Detector AVG

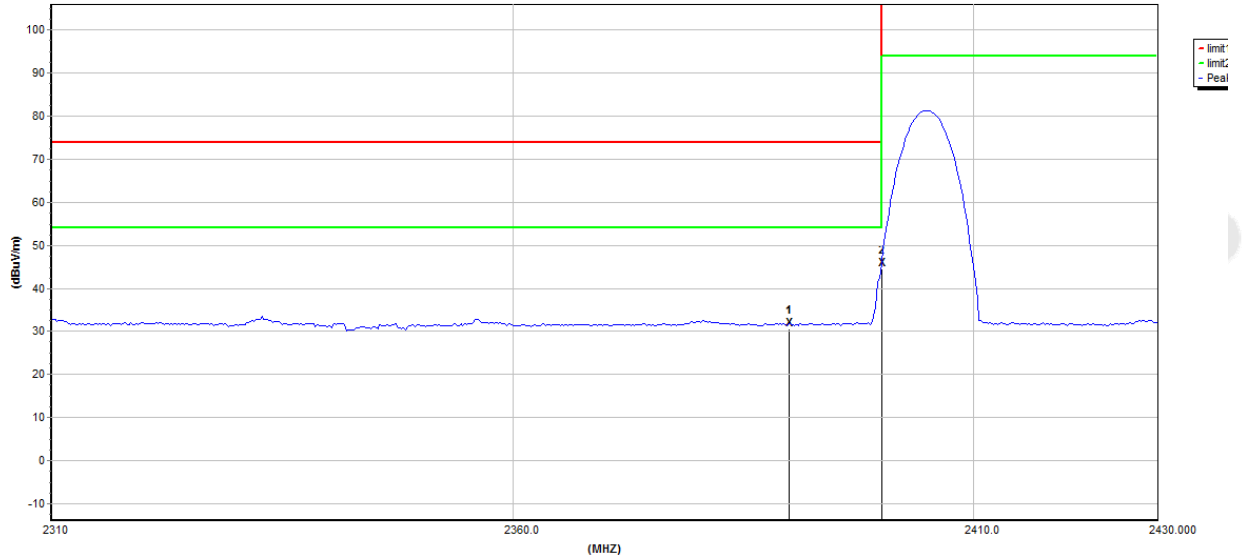


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2390.00	33.18	29.15	3.41	34.01	31.73	54.00	-22.27
2400.00	47.24	29.16	3.43	34.01	45.82	54.00	-8.18

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH68 Polarization: Horizontal  
 Detector Peak

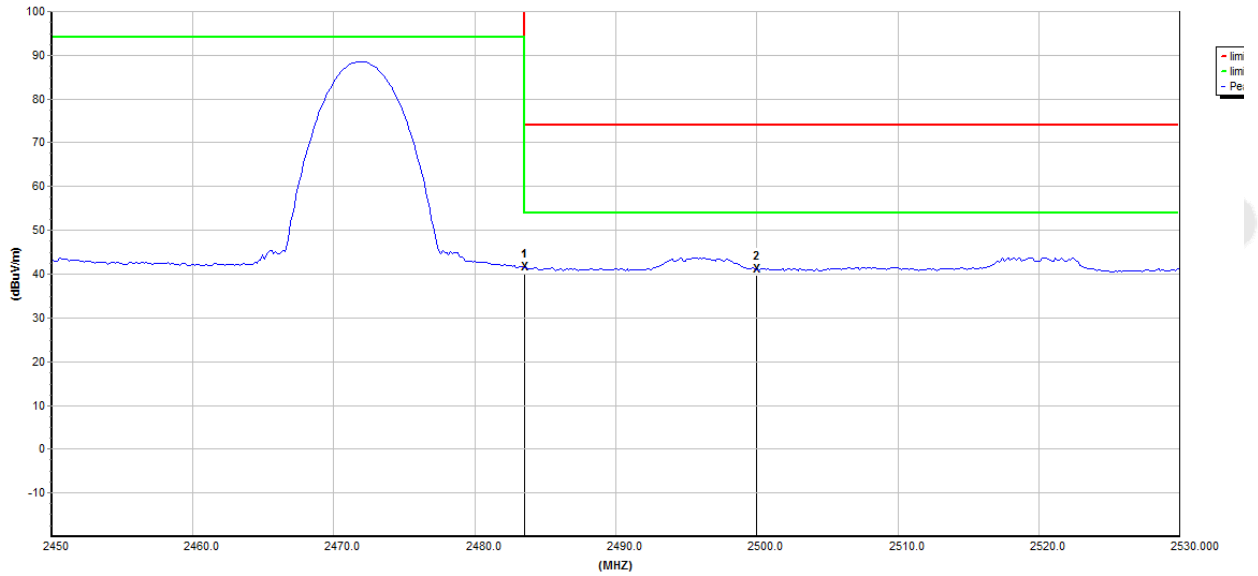


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2483.50	42.64	29.28	3.53	34.03	41.42	74.00	-32.58
2500.00	42.2	29.30	3.56	34.03	41.03	74.00	-32.97

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH68 Polarization: Vertical  
 Detector Peak

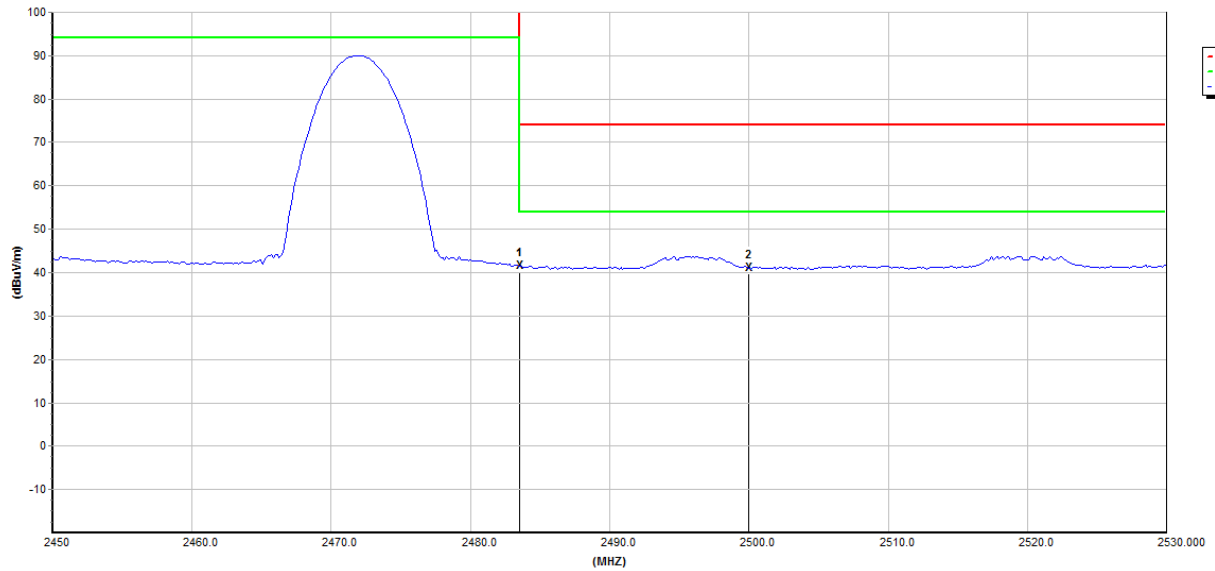


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2483.50	42.61	29.28	3.53	34.03	41.39	74.00	-32.61
2500.00	42.16	29.30	3.56	34.03	40.99	74.00	-33.01

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor



Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH68 Polarization: Horizontal  
 Detector AVG

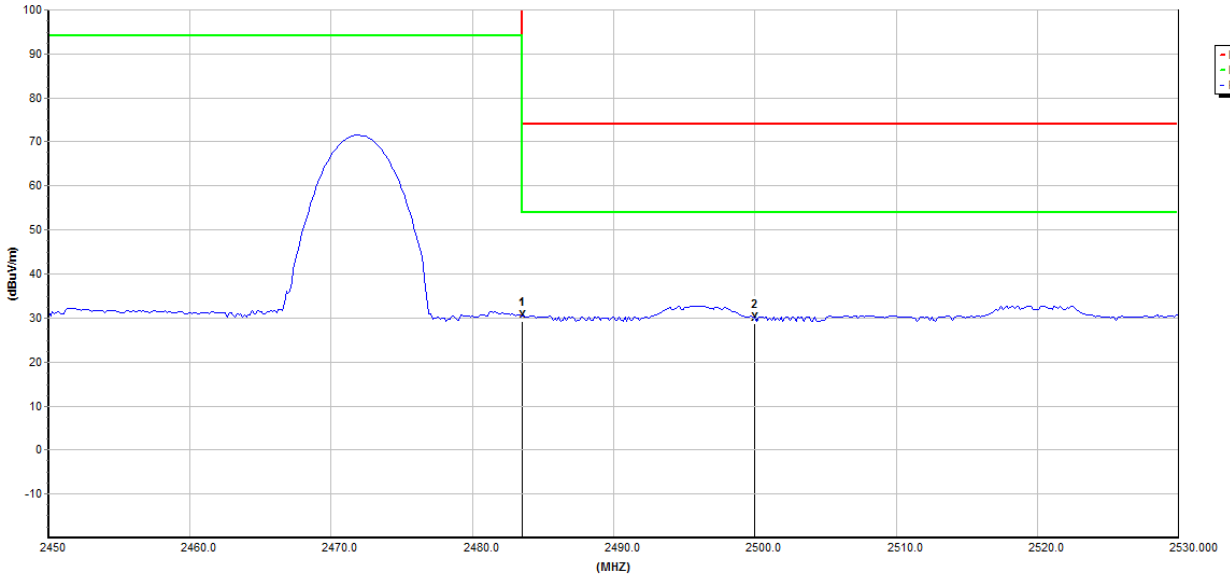


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2483.50	31.64	29.28	3.53	34.03	30.42	54.00	-23.58
2500.00	31.2	29.30	3.56	34.03	30.03	54.00	-23.97

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor



Job No.: 0217050057W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
 Standard: FCC PART 15C Power Source: DC 3V Battery inside  
 Test Mode: TX Mode CH68 Polarization: Vertical  
 Detector AVG

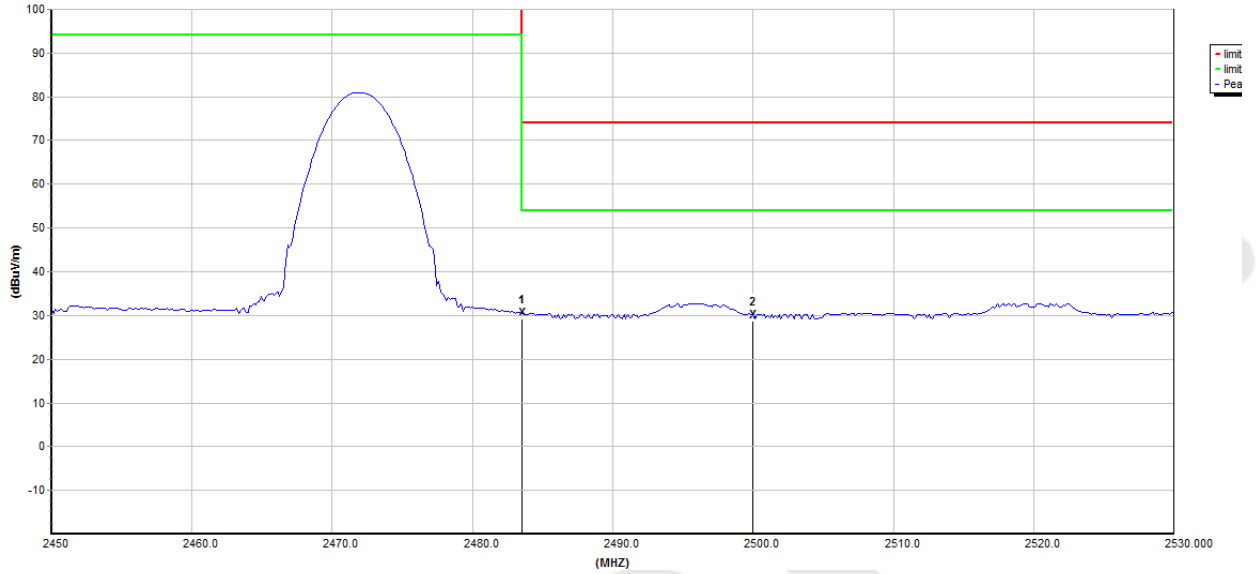

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
2483.50	31.61	29.28	3.53	34.03	30.39	54.00	-23.61
2500.00	31.15	29.30	3.56	34.03	29.98	54.00	-24.02

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

## 5. 20dB Bandwidth Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 5.2. Test Setup



### 5.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
  - RBW = 30kHz, VBW  $\geq$  3\*RBW = 100kHz,
  - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
  - Detector= Peak
  - Trace mode= Max hold.
  - Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 5.4. Test Data


Test Item	: 20dB Bandwidth	Test Mode	: TX Mode
Test Voltage	: DC 3.7V By battery	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Frequency (MHz)	Bandwidth (kHz)	Result
2405MHZ	929.9	PASS
2448MHZ	927.2	PASS
2472MHZ	929.1	PASS




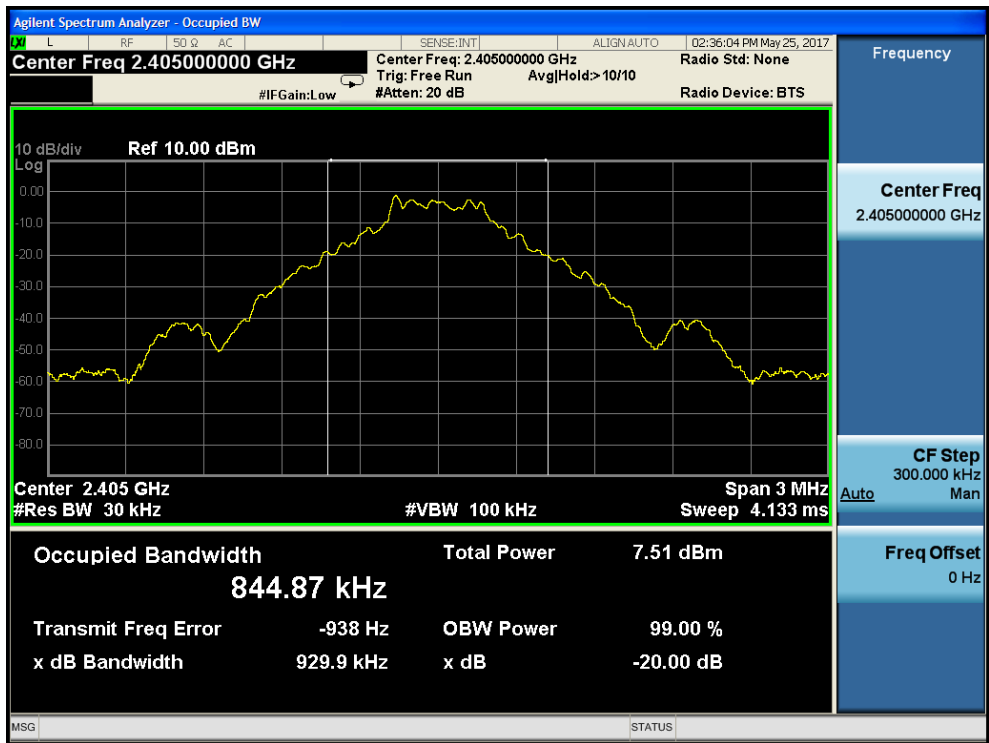

Test Mode: Low

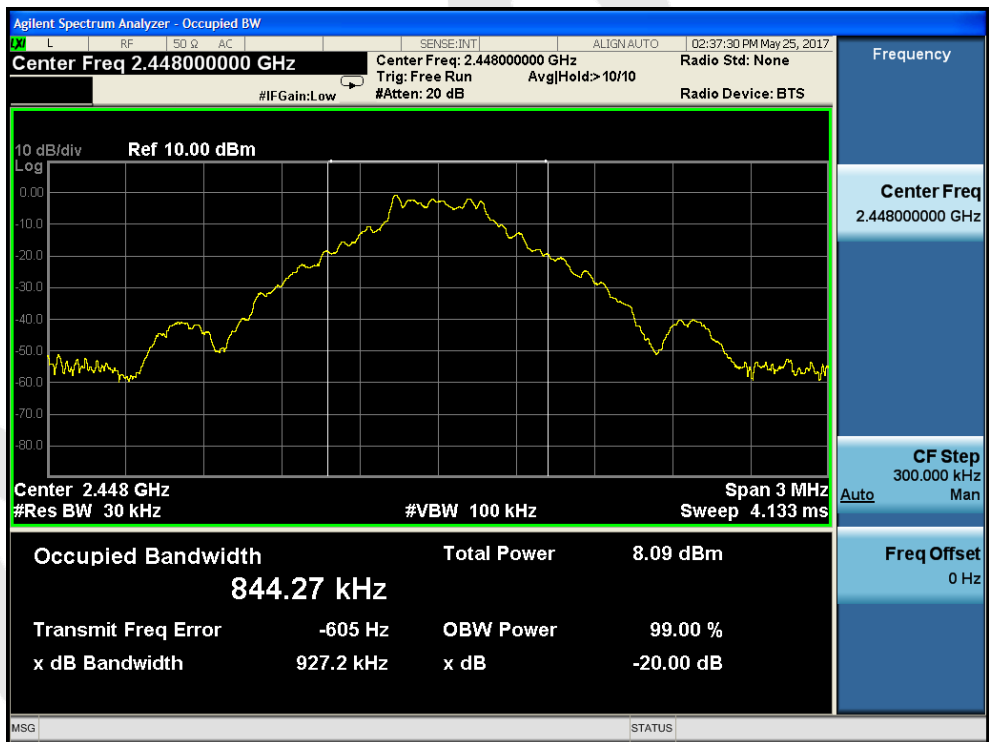

Test Mode: Middle

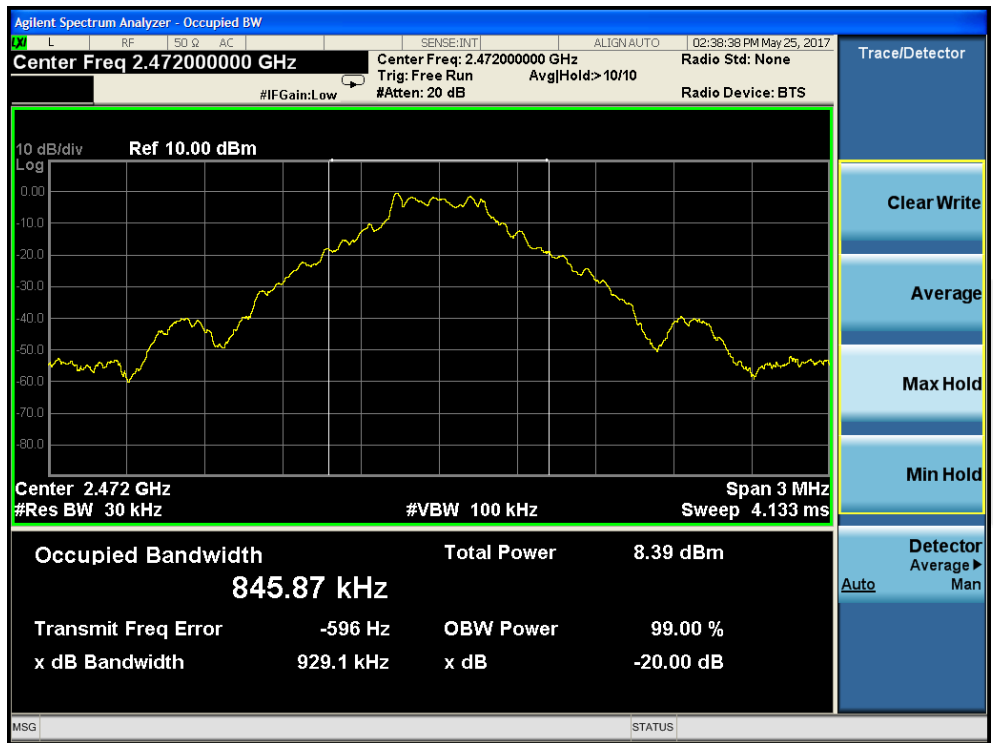

Test Mode: High


## 6. Antenna Requirement

### 6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 1.76 dBi. It complies with the standard requirement.

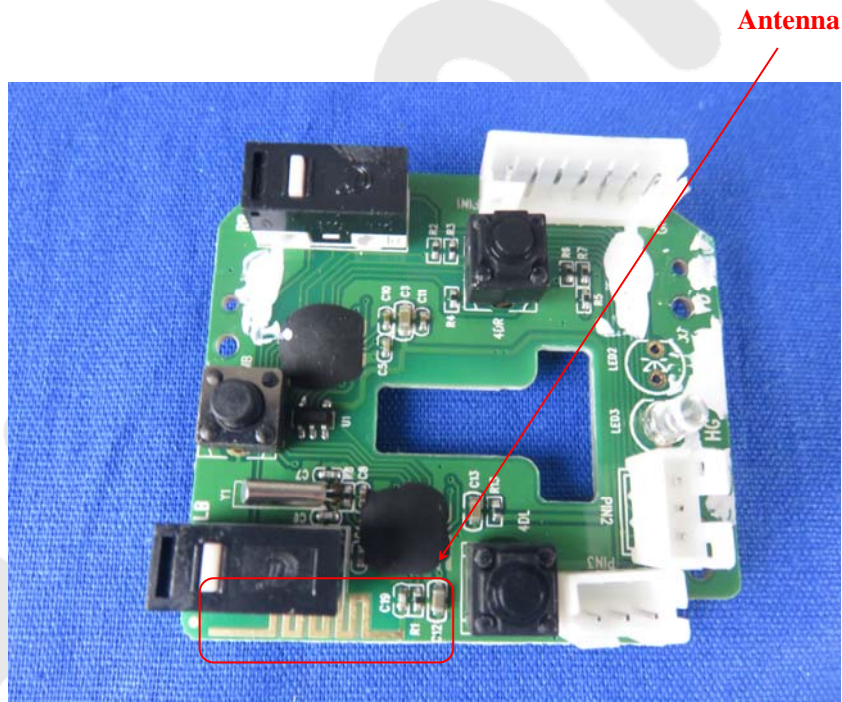



## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

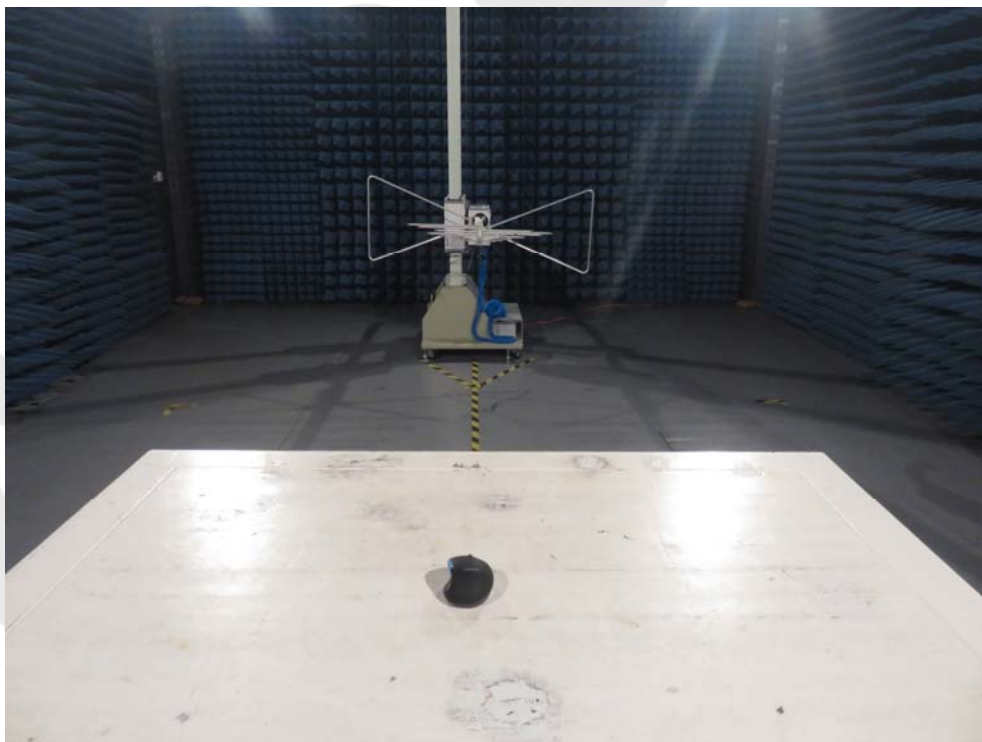

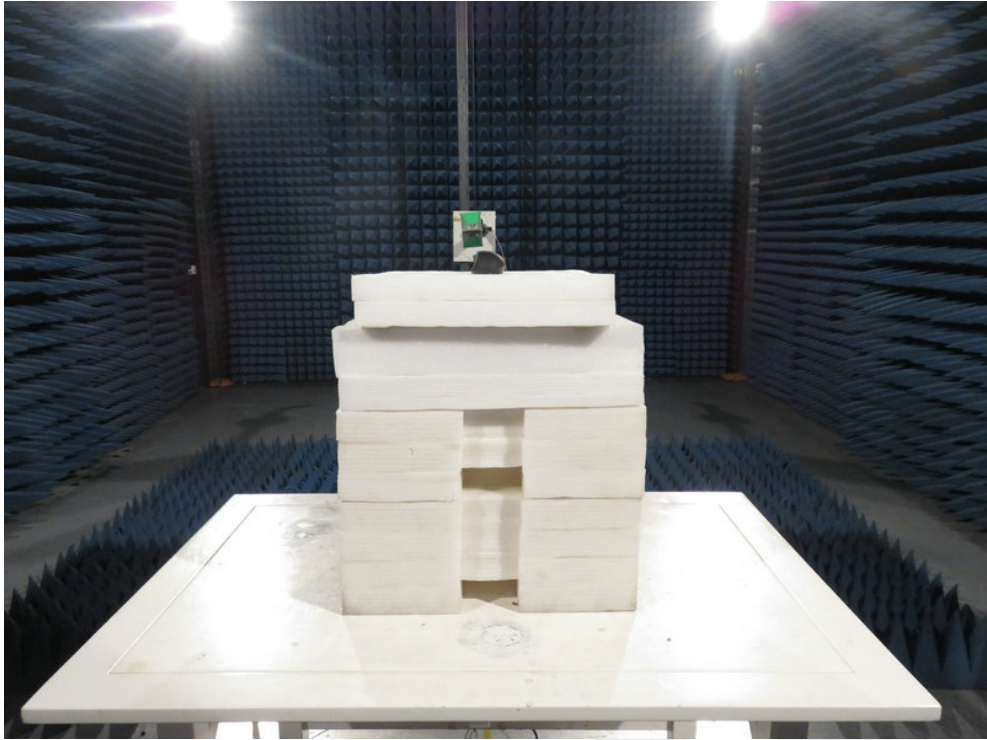

Anbotek

## APPENDIX II -- EXTERNAL PHOTOGRAPH



















### APPENDIX III -- INTERNAL PHOTOGRAPH

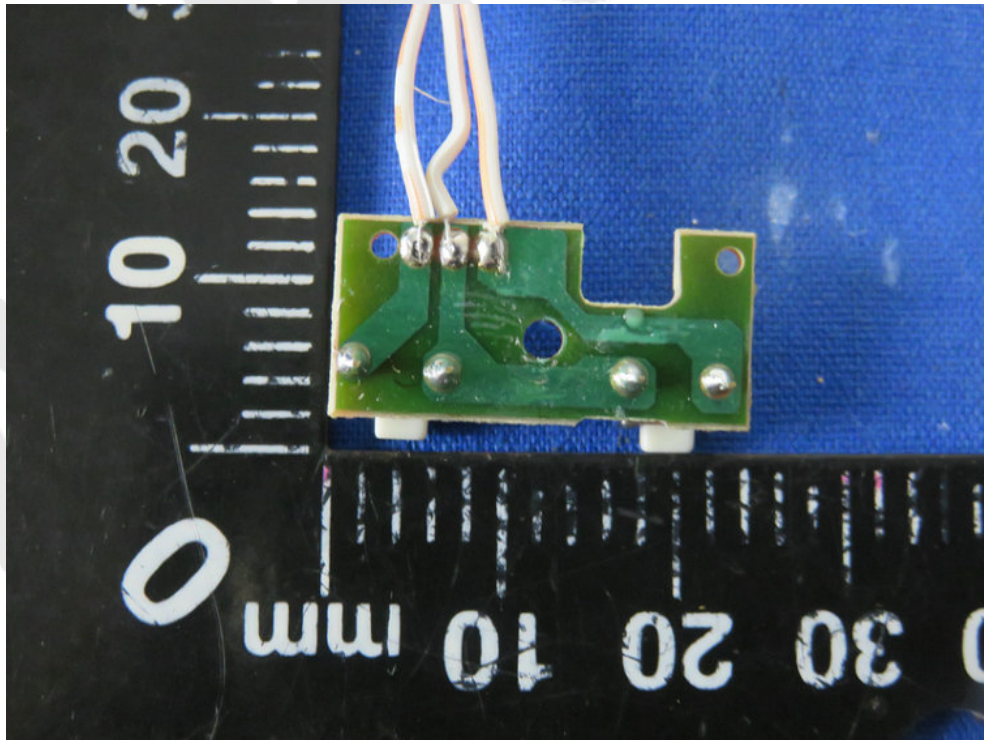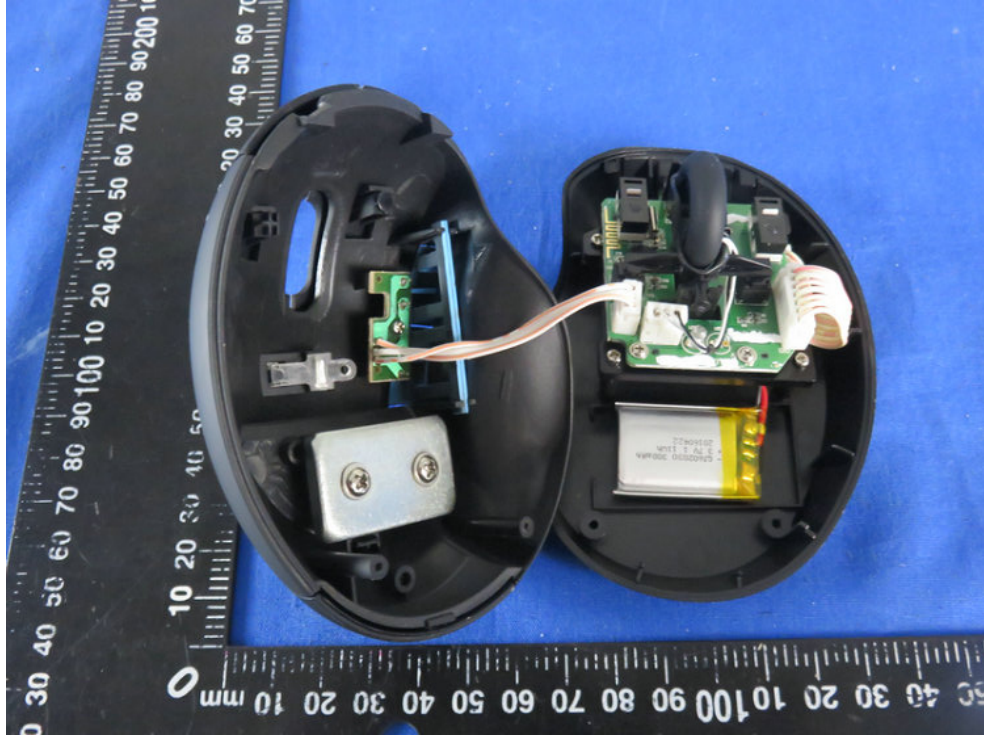

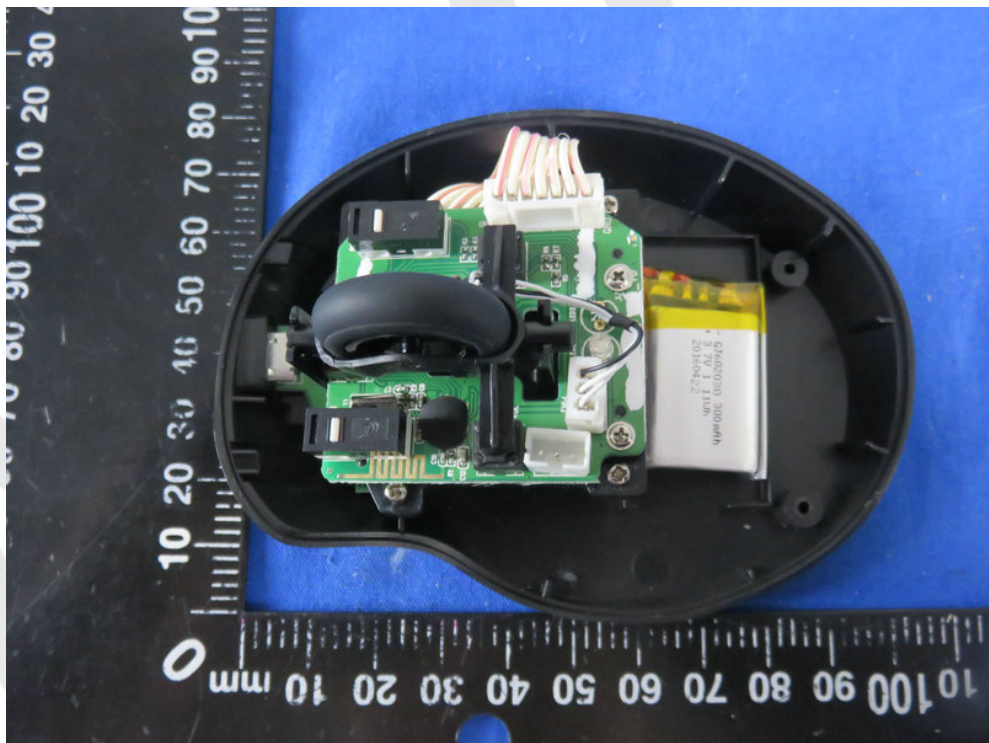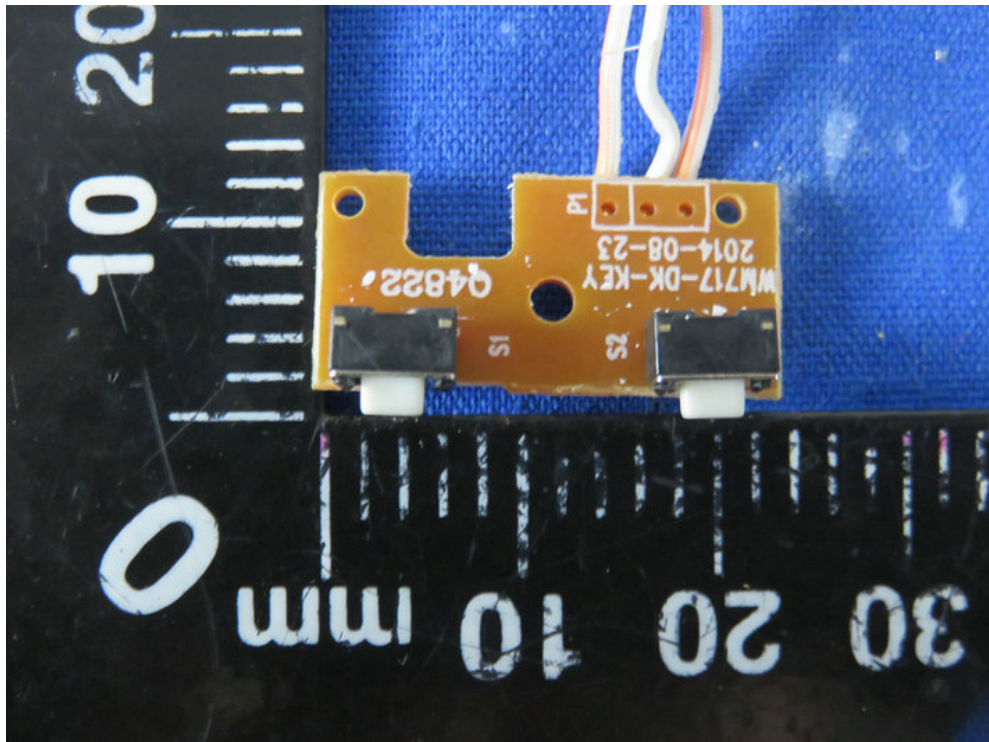

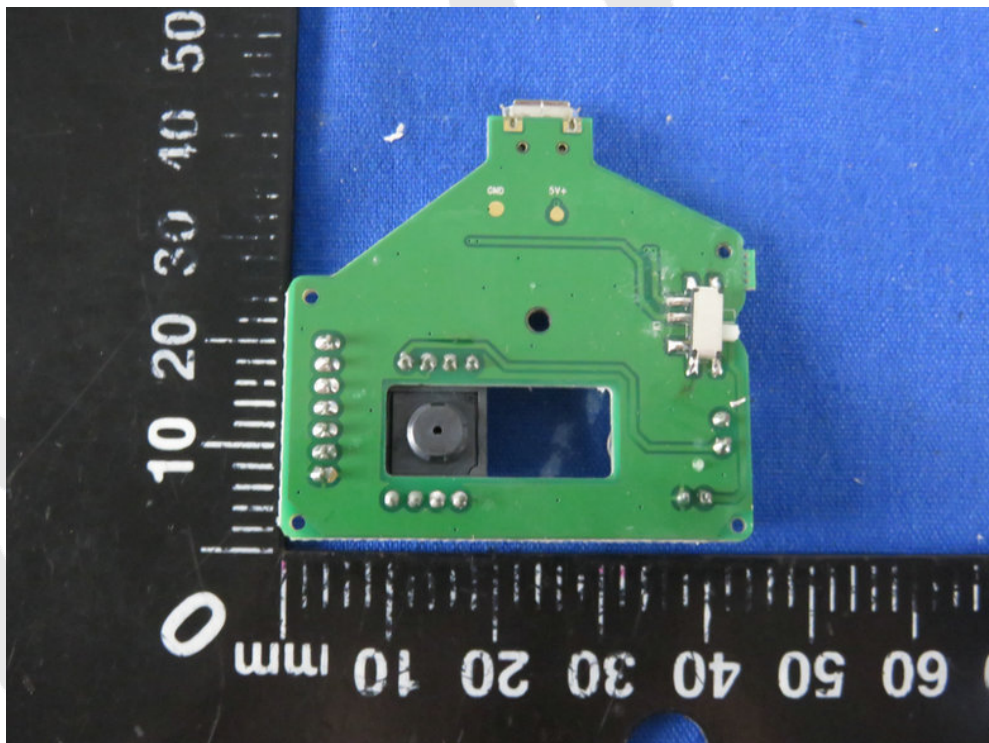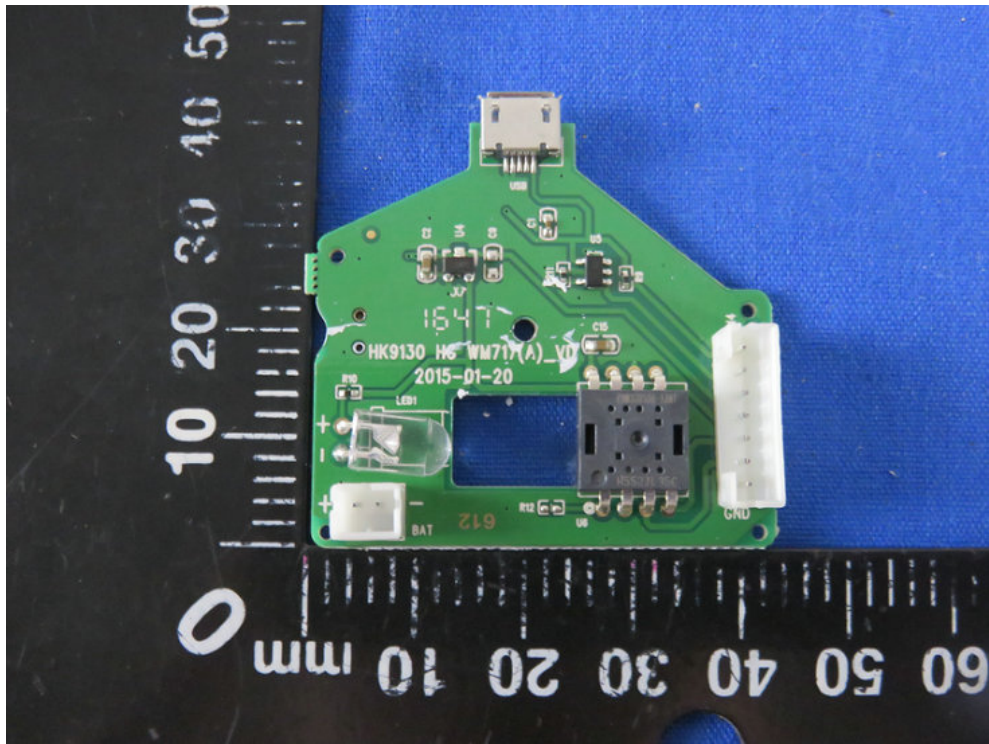

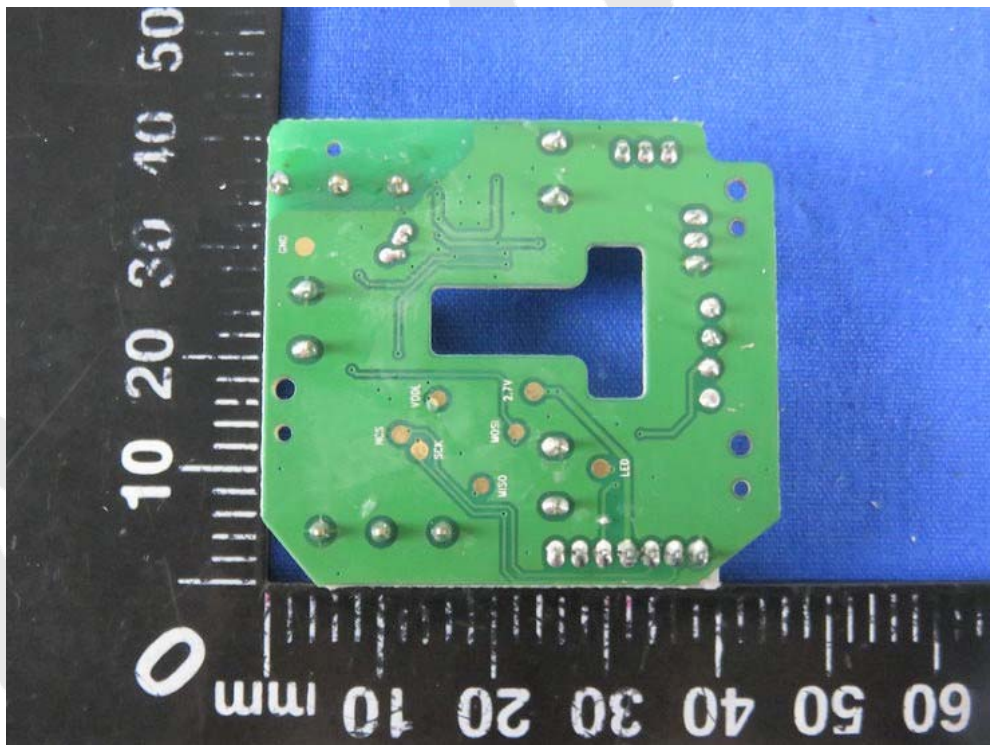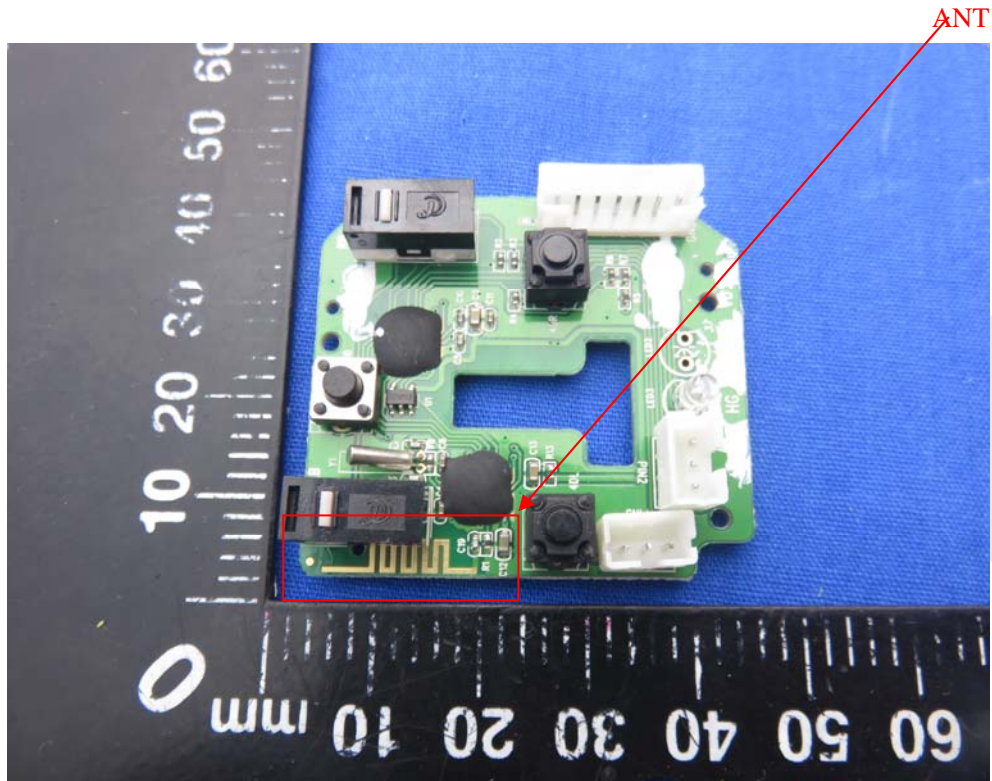

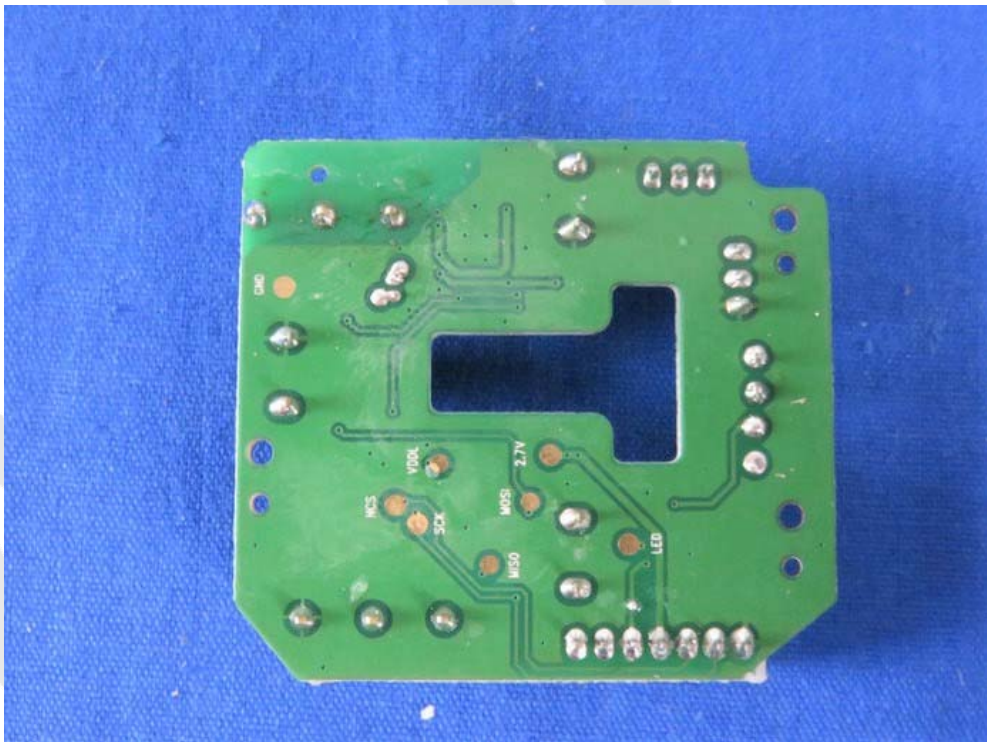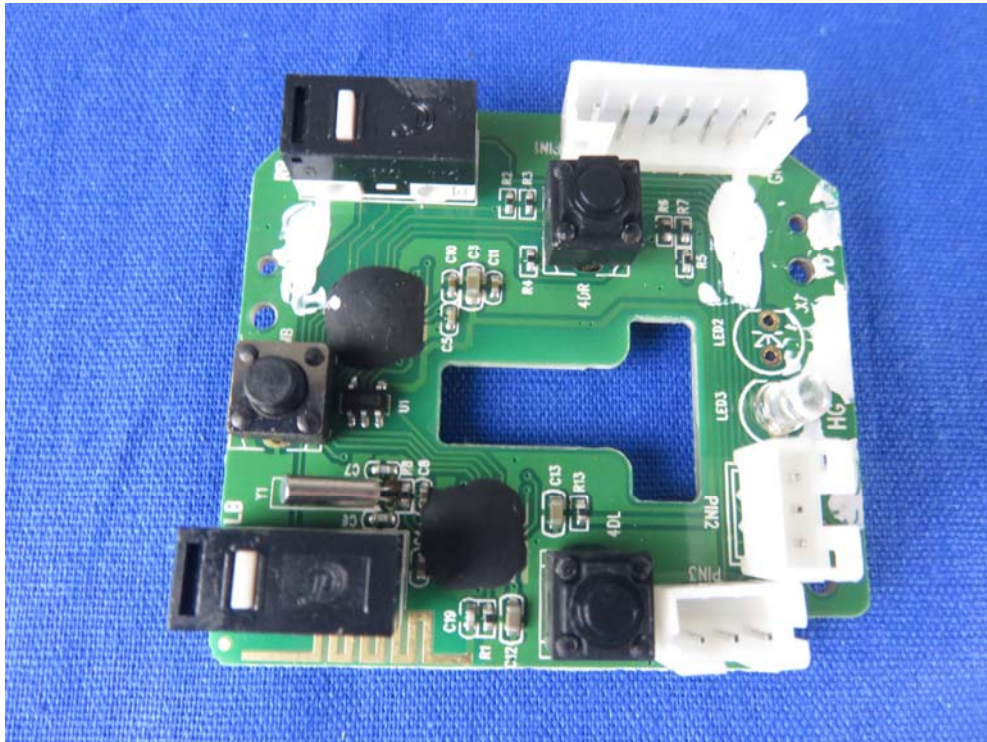



Anbotek