

FCC TEST REPORT

For

Anker Technology Co., Limited

Zolo Liberty

Model No.: Z2000, Z2000011, Z2000021

Prepared For : Anker Technology Co., Limited
Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,
Hong Kong


Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217080097W
Date of Test : Aug. 28~Sept. 12, 2017
Date of Report : Sept. 12, 2017

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	8
1.7. Test Equipment List.....	9
1.8. Measurement Uncertainty.....	10
1.9. Description of Test Facility.....	10
2. Summary of Test Results.....	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup.....	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission and Band Edge.....	17
4.1. Test Standard and Limit.....	17
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Peak Output Power Test.....	28
5.1. Test Standard and Limit.....	28
5.2. Test Setup.....	28
5.3. Test Procedure.....	28
5.4. Test Data.....	28
6. 20DB Occupy Bandwidth Test.....	32
6.1. Test Standard.....	32
6.2. Test Setup.....	32
6.3. Test Procedure.....	32
6.4. Test Data.....	32
7. Carrier Frequency Separation Test.....	36
7.1. Test Standard and Limit.....	36
7.2. Test Setup.....	36
7.3. Test Procedure.....	36
7.4. Test Data.....	36
8. Number of Hopping Channel Test.....	40
8.1. Test Standard and Limit.....	40
8.2. Test Setup.....	40
8.3. Test Procedure.....	40
8.4. Test Data.....	40
9. Dwell Time Test.....	42

9.1. Test Standard and Limit.....42
9.2. Test Setup.....42
9.3. Test Procedure.....42
9.4. Test Data..... 42
10. 100kHz Bandwidth of Frequency Band Edge Requirement..... 46
10.1. Test Standard and Limit.....46
10.2. Test Setup.....46
10.3. Test Procedure.....46
10.4. Test Data..... 46
11. Antenna Requirement.....51
11.1. Test Standard and Requirement..... 51
11.2. Antenna Connected Construction..... 51
APPENDIX I -- TEST SETUP PHOTOGRAPH.....52
APPENDIX II -- EXTERNAL PHOTOGRAPH..... 54
APPENDIX III -- INTERNAL PHOTOGRAPH..... 64

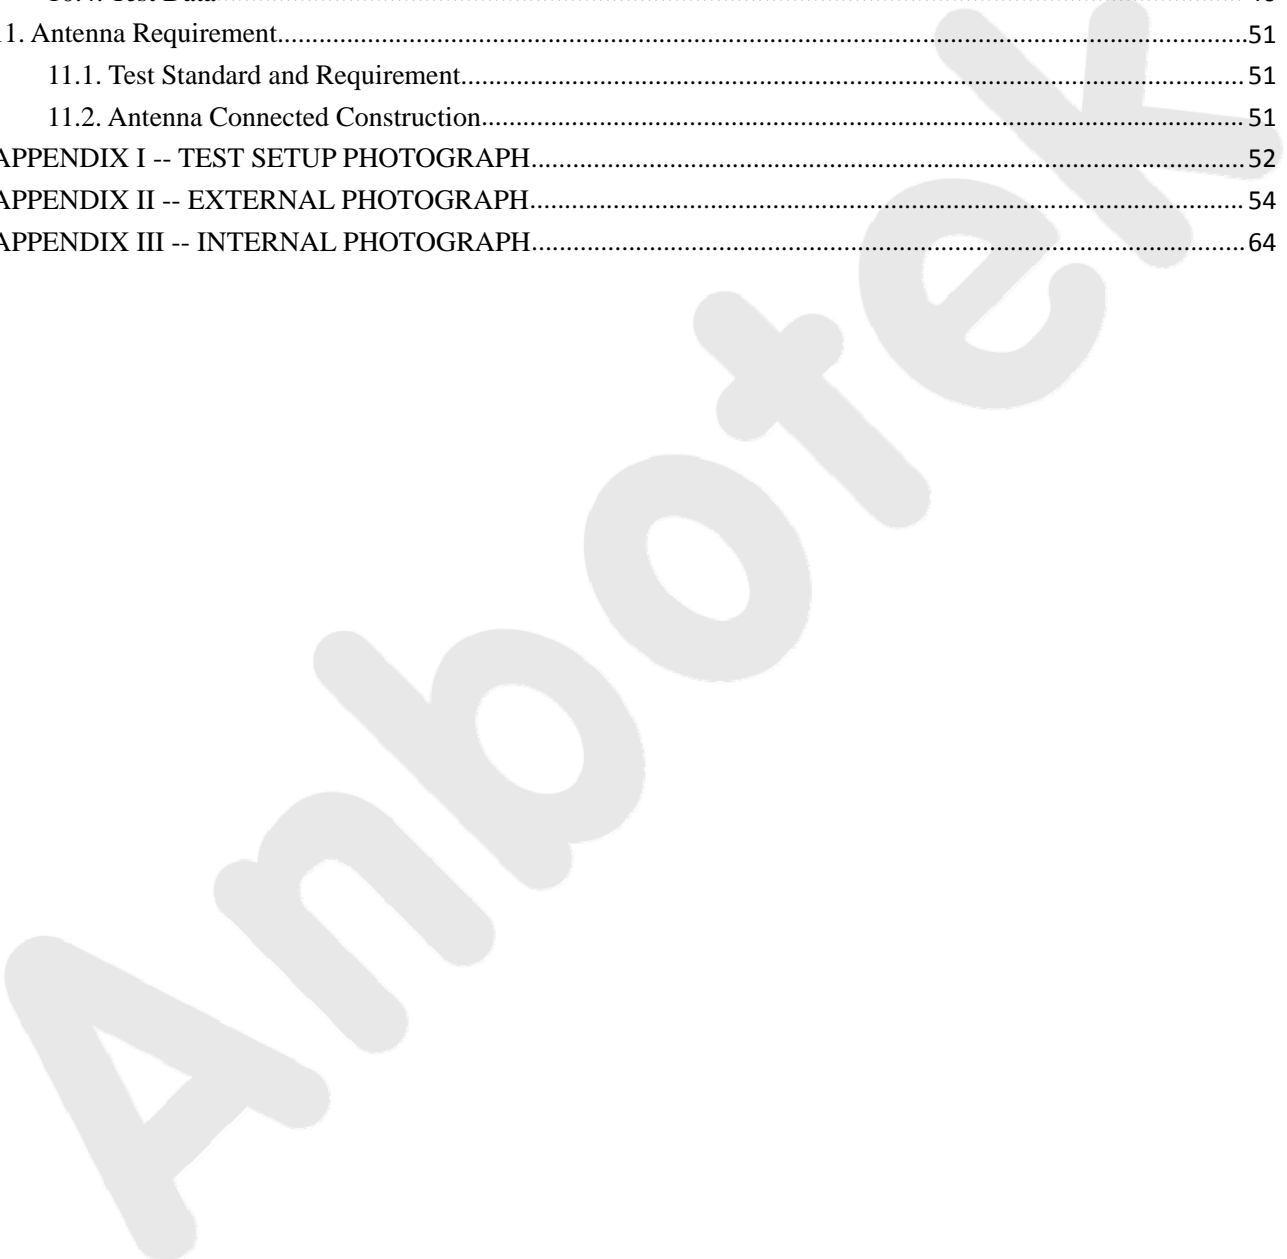

TEST REPORT

Applicant : Anker Technology Co., Limited
Manufacturer : Shenzhen Horn Audio Co., Ltd.
Product Name : Zolo Liberty
Model No. : Z2000, Z2000011, Z2000021
Trade Mark : ZOLO
Rating(s) : Input: DC 5V, 1.5A (with DC 3.7V, 75 mAh Battery inside, Charge box with DC 3.6V, 2600mAh--Model C279-1S1P)
Input: DC 5V, 1.5A (with DC 3.7V, 75 mAh Battery inside, Charge box with DC 3.6V, 3250mAh--Model C279-1S1P-B)
Test Standard(s) : FCC Part15 Subpart C 2016, Section 15.247
Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Aug. 28~Sept. 12, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Anker Technology Co., Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer	:	Shenzhen Horn Audio Co., Ltd.
Address	:	No.6, 4th Guihua Road, Pingshan New District, Shenzhen City, Guangdong Province, P. R. China

1.2. Description of Device (EUT)

Product Name	:	Zolo Liberty	
Model No.	:	Z2000, Z2000011, Z2000021 (Note: All samples are the same except the color, so we prepare "Z2000" for test only. Model "Z2000" consists of two parts, the left and right earphone, the two earphones are the same except the right one has an MIC.)	
Trade Mark	:	ZOLO	
Test Power Supply	:	AC 120V, 50Hz for adapter / AC 240V, 50Hz for adapter DC 3.7V Battery inside	
Product Description	:	Operation Frequency:	2402MHz~2480MHz
	:	Transfer Rate:	1/2/3 Mbits/s
	:	Number of Channel:	79 Channels
	:	Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
	:	Antenna Type:	PIFA Antenna
	:	Antenna Gain(Peak):	-0.72 dBi
<p>Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</p>			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE M/N: STC-A2050I1000USBA-C S/N: 201202102100876 Input: 100-240V~50/60Hz 0.3A Output: DC 5V, 1000mA
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Keeping TX mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

1.5. List of channels


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	17	2419	34	2436	51	2453	68	2470
01	2403	18	2420	35	2437	52	2454	69	2471
02	2404	19	2421	36	2438	53	2455	70	2472
03	2405	20	2422	37	2439	54	2456	71	2473
04	2406	21	2423	38	2440	55	2457	72	2474
05	2407	22	2424	39	2441	56	2458	73	2475
05	2408	23	2425	40	2442	57	2459	74	2476
07	2409	24	2426	41	2443	58	2460	75	2477
08	2410	25	2427	42	2444	59	2461	76	2478
09	2411	26	2428	43	2445	60	2462	77	2479
10	2412	27	2429	44	2446	61	2463	78	2480
11	2413	28	2430	45	2447	62	2464		
12	2414	29	2431	46	2448	63	2465		
13	2415	30	2432	47	2449	64	2466		
14	2416	31	2433	48	2450	65	2467		
15	2417	32	2434	49	2451	66	2468		
16	2418	33	2435	50	2452	67	2469		

1.6. Description Of Test Setup

CE

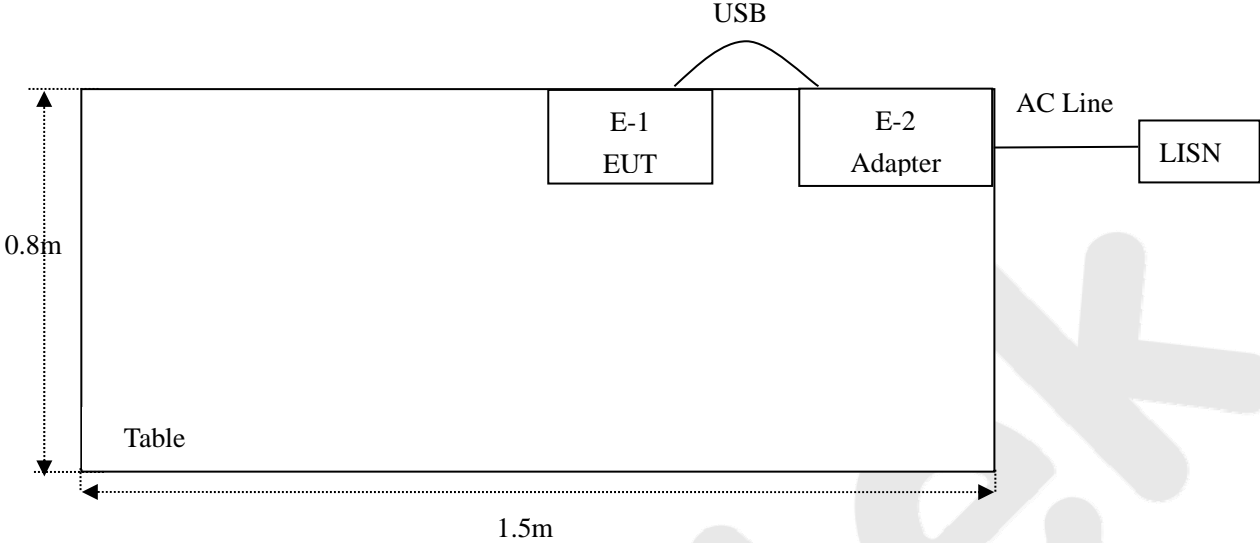

RE

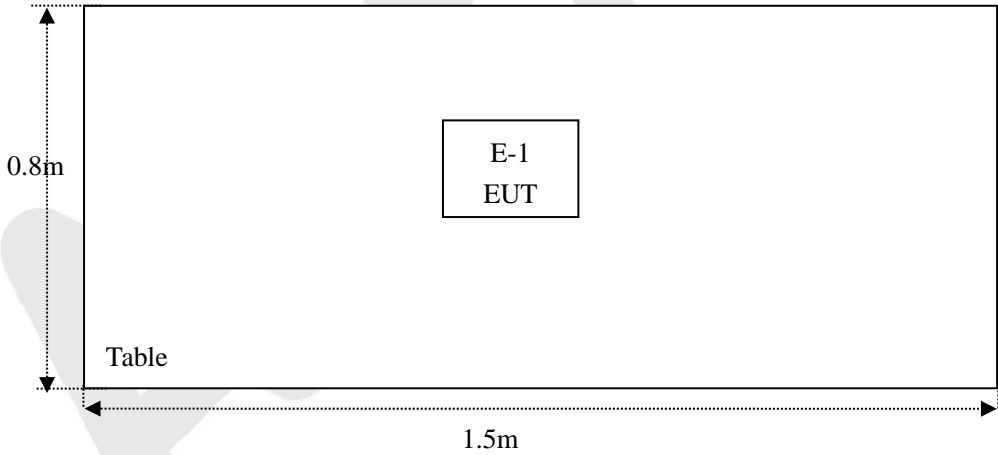

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
14.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
17.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
18.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Designation No.: CN5023

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation CN5023, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited.
at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

All Emissions tests (Above 18GHz) were performed at
MRT Technology (Suzhou) Co., Ltd.
D8 Building, Youxin Industrial Park, No. 2 Tina'ed Wuzhong Economic Development Zone, Suzhou, Jiangsu, China

Designation Number: CN1166

Test Firm Registration Number: 893164

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

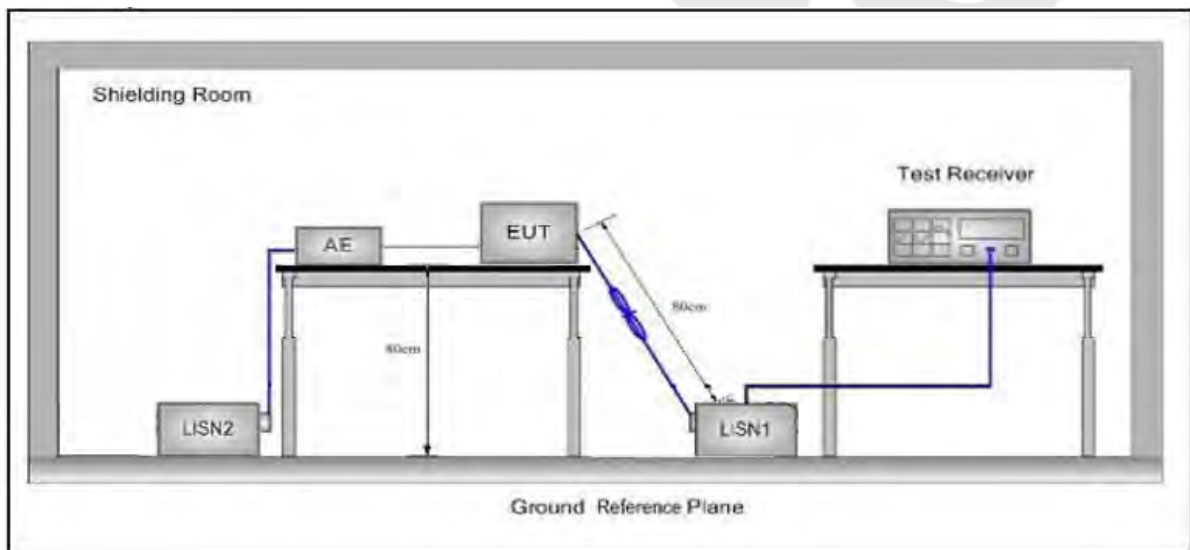

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.:25°C Hum.:50%

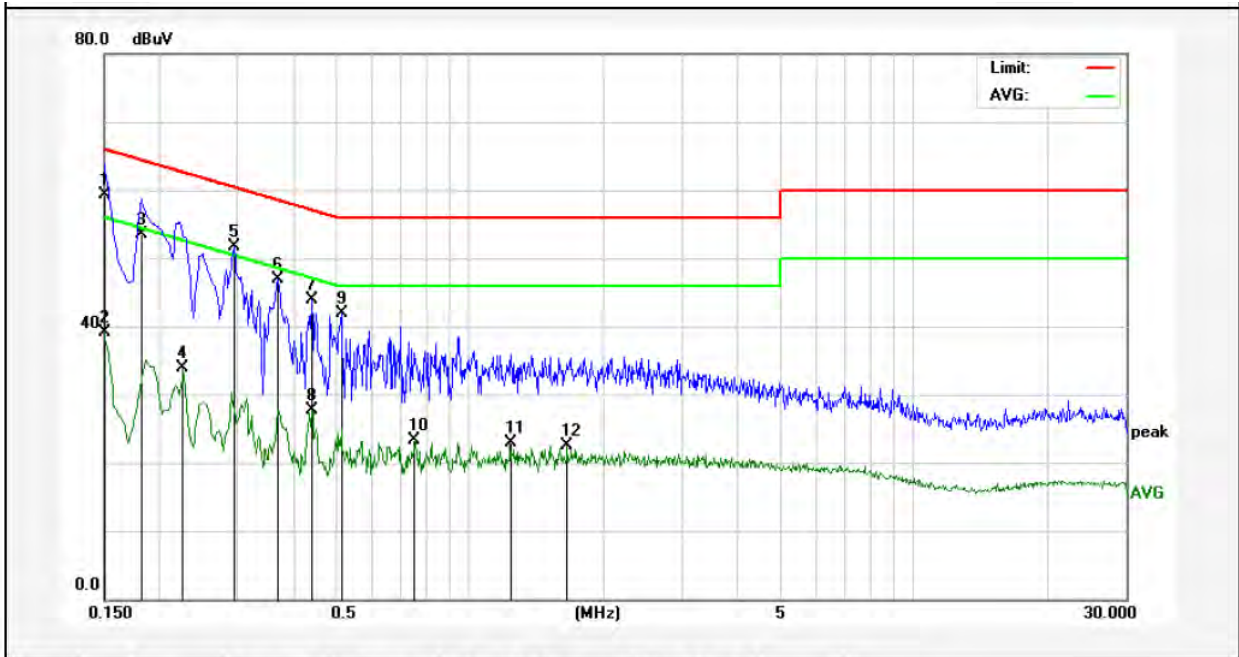

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	39.31	19.90	59.21	65.99	-6.78	QP	
2	0.1500	19.18	19.90	39.08	55.99	-16.91	AVG	
3	0.1819	33.53	19.90	53.43	64.39	-10.96	QP	
4	0.2260	13.93	19.89	33.82	52.59	-18.77	AVG	
5	0.2940	31.80	19.89	51.69	60.41	-8.72	QP	
6	0.3700	26.89	19.92	46.81	58.50	-11.69	QP	
7	0.4420	23.89	19.95	43.84	57.02	-13.18	QP	
8	0.4420	7.72	19.95	27.67	47.02	-19.35	AVG	
9	0.5140	22.01	19.98	41.99	56.00	-14.01	QP	
10	0.7539	3.24	20.05	23.29	46.00	-22.71	AVG	
11	1.2300	2.77	20.12	22.89	46.00	-23.11	AVG	
12	1.6620	2.36	20.13	22.49	46.00	-23.51	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:25°C Hum.:50%

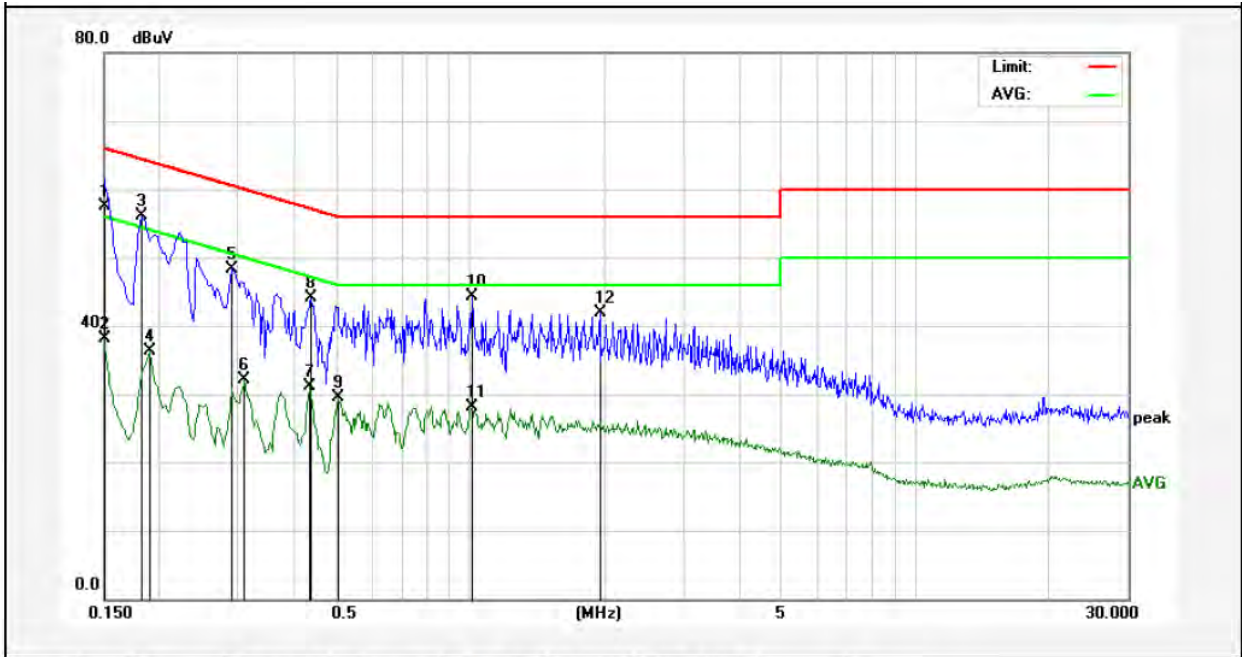

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	37.65	19.90	57.55	65.99	-8.44	QP	
2	0.1500	18.26	19.90	38.16	55.99	-17.83	AVG	
3	0.1819	36.13	19.90	56.03	64.39	-8.36	QP	
4	0.1900	16.50	19.90	36.40	54.03	-17.63	AVG	
5	0.2900	28.46	19.89	48.35	60.52	-12.17	QP	
6	0.3100	12.19	19.89	32.08	49.97	-17.89	AVG	
7	0.4340	11.06	19.95	31.01	47.18	-16.17	AVG	
8	0.4380	24.12	19.95	44.07	57.10	-13.03	QP	
9	0.5060	9.53	19.98	29.51	46.00	-16.49	AVG	
10	1.0060	24.16	20.12	44.28	56.00	-11.72	QP	
11	1.0060	7.99	20.12	28.11	46.00	-17.89	AVG	
12	1.9500	21.79	20.14	41.93	56.00	-14.07	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.:25°C Hum.:50%

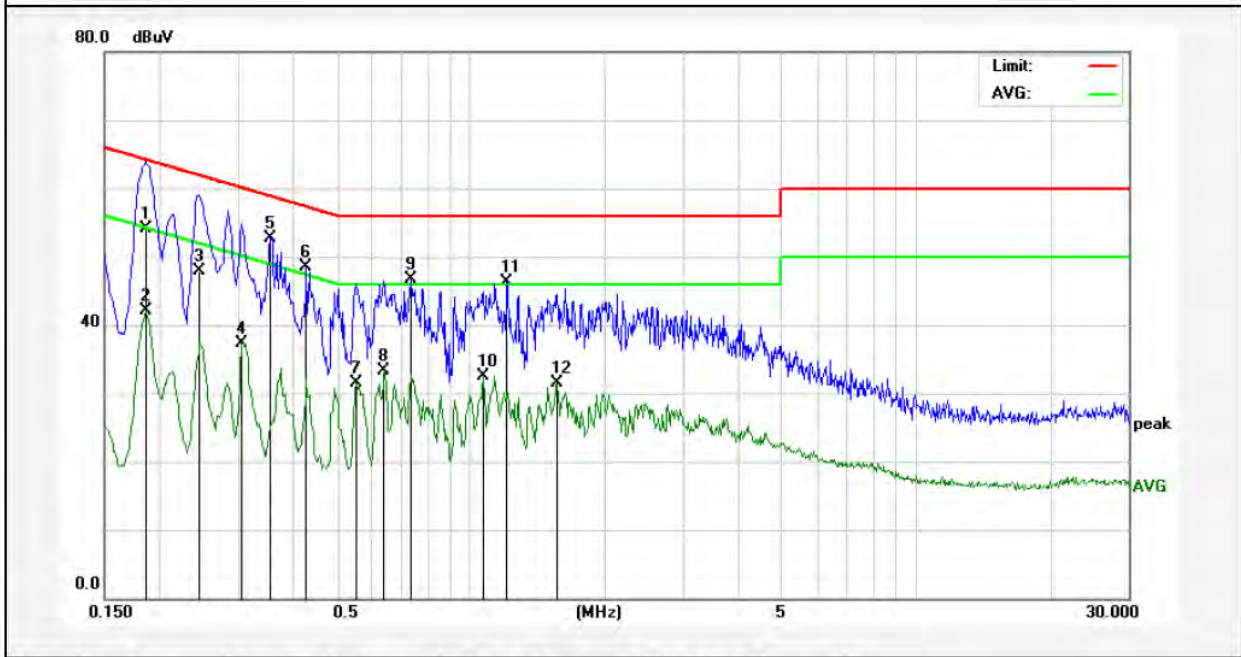

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1860	34.11	19.90	54.01	64.21	-10.20	QP	
2	0.1860	22.24	19.90	42.14	54.21	-12.07	AVG	
3	0.2460	27.92	19.89	47.81	61.89	-14.08	QP	
4	0.3060	17.48	19.89	37.37	50.08	-12.71	AVG	
5	0.3540	32.80	19.91	52.71	58.87	-6.16	QP	
6	0.4260	28.60	19.95	48.55	57.33	-8.78	QP	
7	0.5540	11.58	20.00	31.58	46.00	-14.42	AVG	
8	0.6419	13.20	20.02	33.22	46.00	-12.78	AVG	
9	0.7340	26.67	20.05	46.72	56.00	-9.28	QP	
10	1.0660	12.41	20.12	32.53	46.00	-13.47	AVG	
11	1.2059	26.09	20.12	46.21	56.00	-9.79	QP	
12	1.5620	11.46	20.13	31.59	46.00	-14.41	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:25°C Hum.:50%

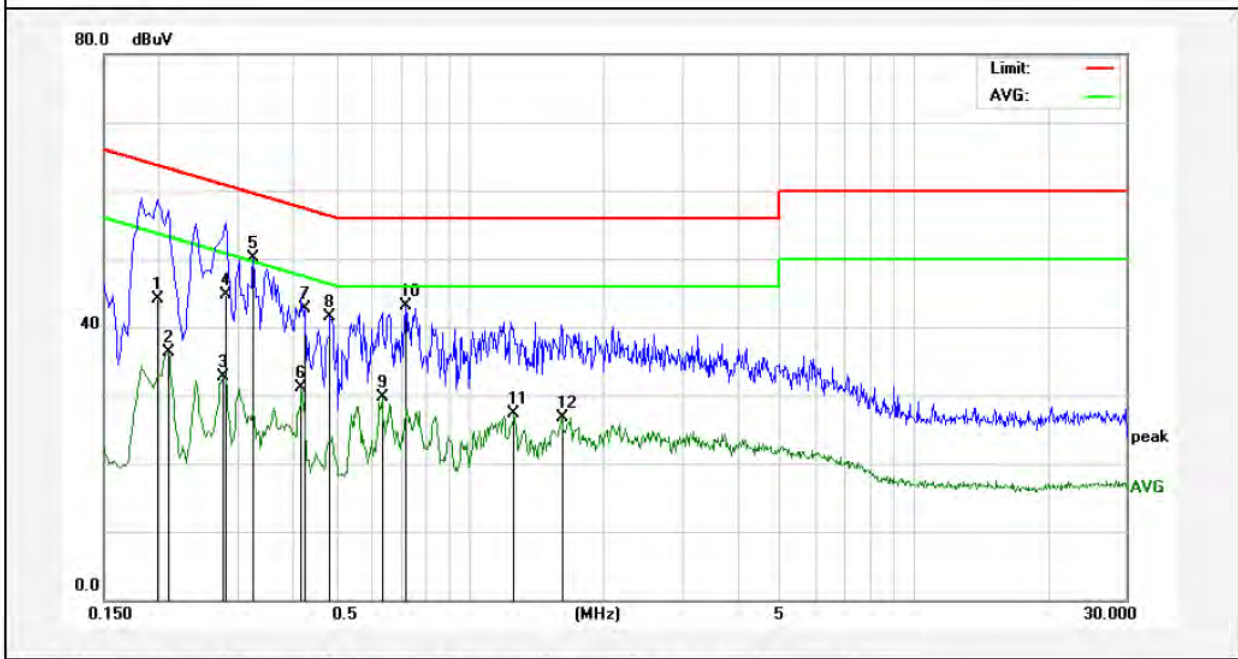

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1980	24.11	19.90	44.01	63.69	-19.68	QP	
2	0.2100	16.33	19.90	36.23	53.20	-16.97	AVG	
3	0.2779	12.73	19.89	32.62	50.88	-18.26	AVG	
4	0.2819	24.76	19.89	44.65	60.76	-16.11	QP	
5	0.3260	30.19	19.90	50.09	59.55	-9.46	QP	
6	0.4180	11.24	19.94	31.18	47.49	-16.31	AVG	
7	0.4260	22.76	19.95	42.71	57.33	-14.62	QP	
8	0.4860	21.53	19.97	41.50	56.24	-14.74	QP	
9	0.6340	9.71	20.02	29.73	46.00	-16.27	AVG	
10	0.7180	23.12	20.04	43.16	56.00	-12.84	QP	
11	1.2620	7.13	20.13	27.26	46.00	-18.74	AVG	
12	1.6180	6.65	20.13	26.78	46.00	-19.22	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

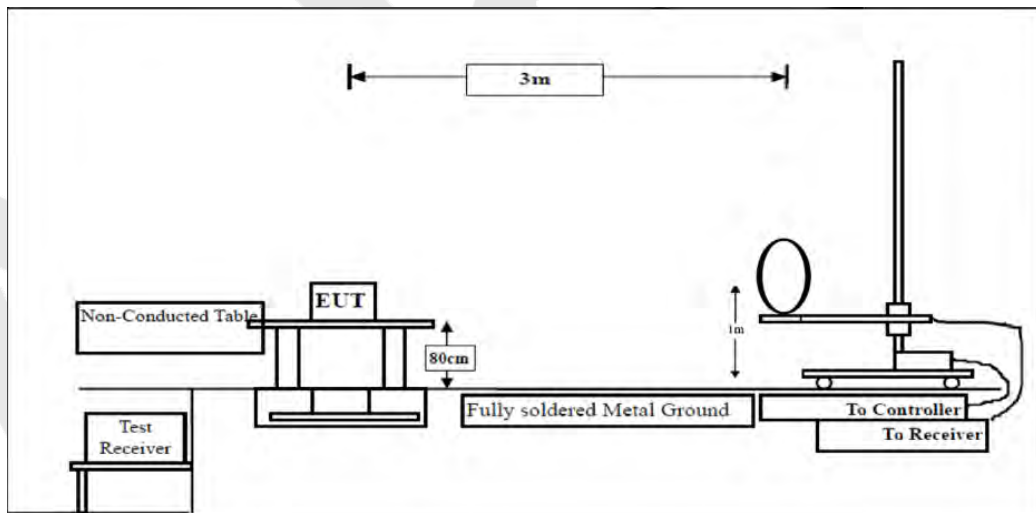


Figure 1. Below 30MHz

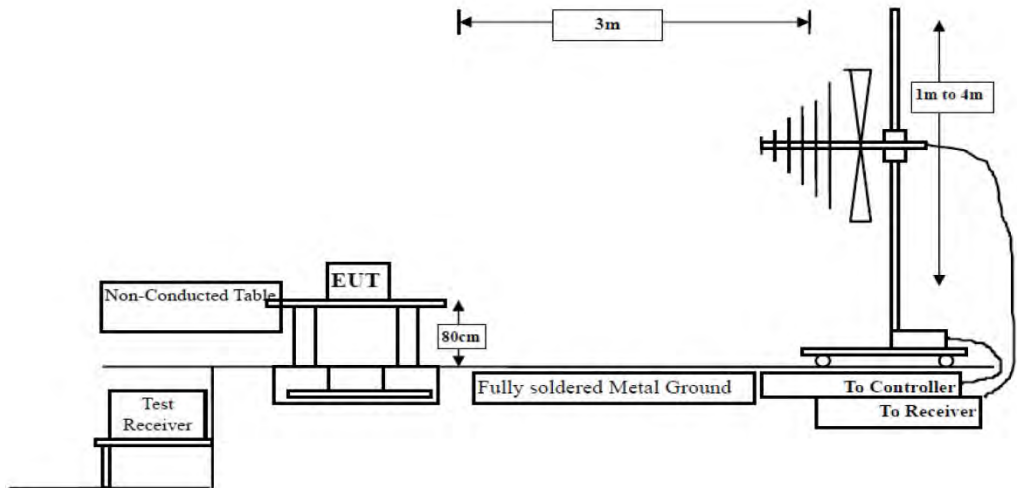


Figure 2. 30MHz to 1GHz

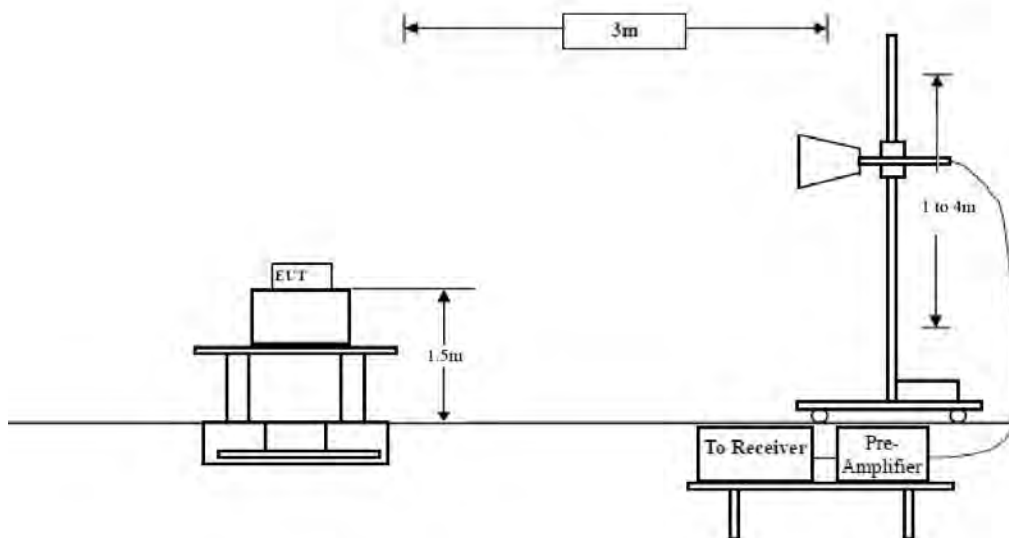


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS


During the test, pre-scan the GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation which is worse case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)

Job No.: 0217080097W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: DC 3.7V Battery inside
 Test Mode: TX Mode Polarization: Horizontal

Remark This is for Battery C279-1S1P

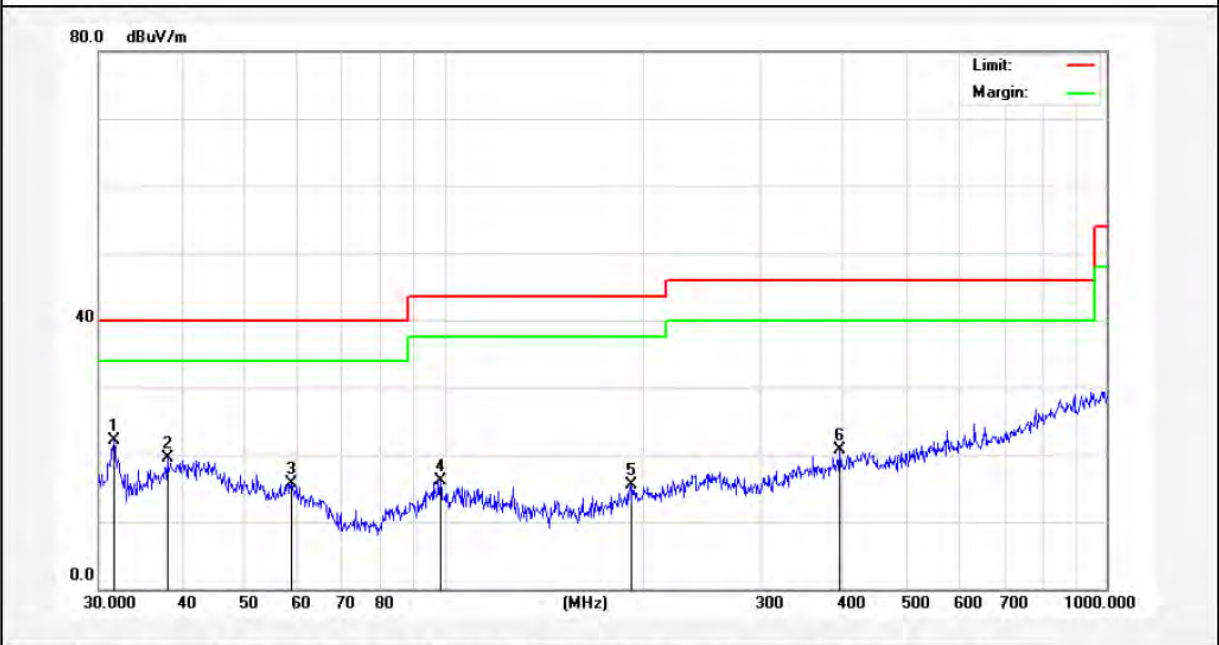

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.6202	38.29	-16.17	22.12	40.00	-17.88	QP	300	16	
2	38.0783	31.70	-12.28	19.42	40.00	-20.58	QP	300	46	
3	58.6126	30.90	-15.27	15.63	40.00	-24.37	QP	300	124	
4	98.4866	37.03	-20.85	16.18	43.50	-27.32	QP	300	137	
5	191.0738	36.47	-20.92	15.55	43.50	-27.95	QP	300	201	
6	394.8545	33.63	-12.97	20.66	46.00	-25.34	QP	300	237	



Test Results (30~1000MHz)

Job No.: 0217080097W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: DC 3.7V Battery inside
 Test Mode: TX Mode Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.3462	33.40	-12.08	21.32	40.00	-18.68	QP	300	13	
2	56.9911	32.37	-15.11	17.26	40.00	-22.74	QP	300	24	
3	98.1419	33.25	-15.86	17.39	43.50	-26.11	QP	300	120	
4	232.5318	32.10	-14.47	17.63	46.00	-28.37	QP	300	134	
5	429.5228	32.91	-11.24	21.67	46.00	-24.33	QP	300	241	
6	642.8613	31.95	-8.91	23.04	46.00	-22.96	QP	300	267	



Test Results (30~1000MHz)

Job No.: 0217080097W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: DC 3.7V Battery inside
 Test Mode: TX Mode Polarization: Horizontal

Remark This is for Battery C279-1S1P-B



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9450	34.06	-12.39	21.67	40.00	-18.33	QP	300	57	
2	59.0251	29.64	-15.31	14.33	40.00	-25.67	QP	300	94	
3	85.2980	41.67	-20.48	21.19	40.00	-18.81	QP	300	145	
4	245.0900	40.45	-18.31	22.14	46.00	-23.86	QP	300	197	
5	290.0172	46.42	-17.95	28.47	46.00	-17.53	QP	300	244	
6	374.6225	39.19	-13.38	25.81	46.00	-20.19	QP	300	360	



Test Results (30~1000MHz)

Job No.: 0217080097W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: DC 3.7V Battery inside
 Test Mode: TX Mode Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.4809	36.14	-11.98	24.16	40.00	-15.84	QP	300	45	
2	45.2166	36.83	-12.67	24.16	40.00	-15.84	QP	300	67	
3	59.4405	38.41	-15.34	23.07	40.00	-16.93	QP	300	122	
4	85.2980	46.92	-18.30	28.62	40.00	-11.38	QP	300	176	
5	216.0240	38.62	-15.27	23.35	46.00	-22.65	QP	300	254	
6	318.8170	45.12	-14.28	30.84	46.00	-15.16	QP	300	360	



Test Results (Above 1000MHz)

Test Mode: GFSK					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	38.85	34.04	6.58	34.09	45.38	74.00	-28.62	V
7206.00	32.85	37.11	7.73	34.50	43.19	74.00	-30.81	V
9608.00	32.38	39.31	9.23	34.79	46.13	74.00	-27.87	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	43.45	34.04	6.58	34.09	49.98	74.00	-24.02	H
7206.00	34.74	37.11	7.73	34.50	45.08	74.00	-28.92	H
9608.00	31.95	39.31	9.23	34.79	45.70	74.00	-28.30	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	27.37	34.04	6.58	34.09	33.90	54.00	-20.10	V
7206.00	21.36	37.11	7.73	34.50	31.70	54.00	-22.30	V
9608.00	20.35	39.31	9.23	34.79	34.10	54.00	-19.90	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	31.77	34.04	6.58	34.09	38.30	54.00	-15.70	H
7206.00	23.64	37.11	7.73	34.50	33.98	54.00	-20.02	H
9608.00	20.20	39.31	9.23	34.79	33.95	54.00	-20.05	H
12010.00	*					54.00		H
14412.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: GFSK					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882.00	37.40	34.38	6.69	34.09	44.38	74.00	-29.62	V
7323.00	31.90	37.22	7.78	34.53	42.37	74.00	-31.63	V
9764.00	31.53	39.46	9.35	34.80	45.54	74.00	-28.46	V
12205.00	*					74.00		V
14646.00	*					74.00		V
4882.00	41.71	34.38	6.69	34.09	48.69	74.00	-25.31	H
7323.00	33.66	37.22	7.78	34.53	44.13	74.00	-29.87	H
9764.00	30.96	39.46	9.35	34.80	44.97	74.00	-29.03	H
12205.00	*					74.00		H
14646.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882.00	26.21	34.38	6.69	34.09	33.19	54.00	-20.81	V
7323.00	20.58	37.22	7.78	34.53	31.05	54.00	-22.95	V
9764.00	19.65	39.46	9.35	34.80	33.66	54.00	-20.34	V
12205.00	*					54.00		V
14646.00	*					54.00		V
4882.00	30.45	34.38	6.69	34.09	37.43	54.00	-16.57	H
7323.00	22.76	37.22	7.78	34.53	33.23	54.00	-20.77	H
9764.00	19.39	39.46	9.35	34.80	33.40	54.00	-20.60	H
12205.00	*					54.00		H
14646.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: GFSK					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	36.23	34.72	6.79	34.09	43.65	74.00	-30.35	V
7440.00	31.12	37.34	7.82	34.57	41.71	74.00	-32.29	V
9920.00	30.83	39.62	9.46	34.81	45.10	74.00	-28.90	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	40.30	34.72	6.79	34.09	47.72	74.00	-26.28	H
7440.00	32.78	37.34	7.82	34.57	43.37	74.00	-30.63	H
9920.00	30.15	39.62	9.46	34.81	44.42	74.00	-29.58	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.30	34.72	6.79	34.09	32.72	54.00	-21.28	V
7440.00	19.96	37.34	7.82	34.57	30.55	54.00	-23.45	V
9920.00	19.10	39.62	9.46	34.81	33.37	54.00	-20.63	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	29.42	34.72	6.79	34.09	36.84	54.00	-17.16	H
7440.00	22.07	37.34	7.82	34.57	32.66	54.00	-21.34	H
9920.00	18.75	39.62	9.46	34.81	33.02	54.00	-20.98	H
12400.00	*					54.00		H
14880.00	*					54.00		H

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is worse case, the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

The Project in above 18000MHz was tested in MRT Technology (Suzhou) Co., Ltd.

Radiated Band Edge:

Test Mode: GFSK					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	45.41	29.15	3.41	34.01	43.96	74.00	-30.04	H
2400.00	62.56	29.16	3.43	34.01	61.14	74.00	-12.86	H
2390.00	46.20	29.15	3.41	34.01	44.75	74.00	-29.25	V
2400.00	64.87	29.16	3.43	34.01	63.45	74.00	-10.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	35.39	29.15	3.41	34.01	33.94	54.00	-20.06	H
2400.00	46.78	29.16	3.43	34.01	45.36	54.00	-8.65	H
2390.00	35.51	29.15	3.41	34.01	34.06	54.00	-19.94	V
2400.00	48.67	29.16	3.43	34.01	47.25	54.00	-6.76	V

Test Mode: GFSK					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	47.82	29.28	3.53	34.03	46.60	74.00	-27.41	H
2500.00	46.51	29.30	3.56	34.03	45.34	74.00	-28.67	H
2483.50	49.08	29.28	3.53	34.03	47.86	74.00	-26.14	V
2500.00	47.75	29.30	3.56	34.03	46.58	74.00	-27.43	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.25	29.28	3.53	34.03	37.03	54.00	-16.98	H
2500.00	35.89	29.30	3.56	34.03	34.72	54.00	-19.29	H
2483.50	39.67	29.28	3.53	34.03	38.45	54.00	-15.55	V
2500.00	36.02	29.30	3.56	34.03	34.85	54.00	-19.15	V

Remark:


1. During the test, pre-scan the GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is worse case, the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	1W or 125 mW

5.2. Test Setup



5.3. Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
- Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

5.4. Test Data


Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results	Modulation
2402	2.667	20.96	PASS	BDR
2441	2.792	20.96	PASS	BDR
2480	2.438	20.96	PASS	BDR
2402	0.653	20.96	PASS	EDR
2441	0.958	20.96	PASS	EDR
2480	0.421	20.96	PASS	EDR

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.




Test Mode: BDR---Low

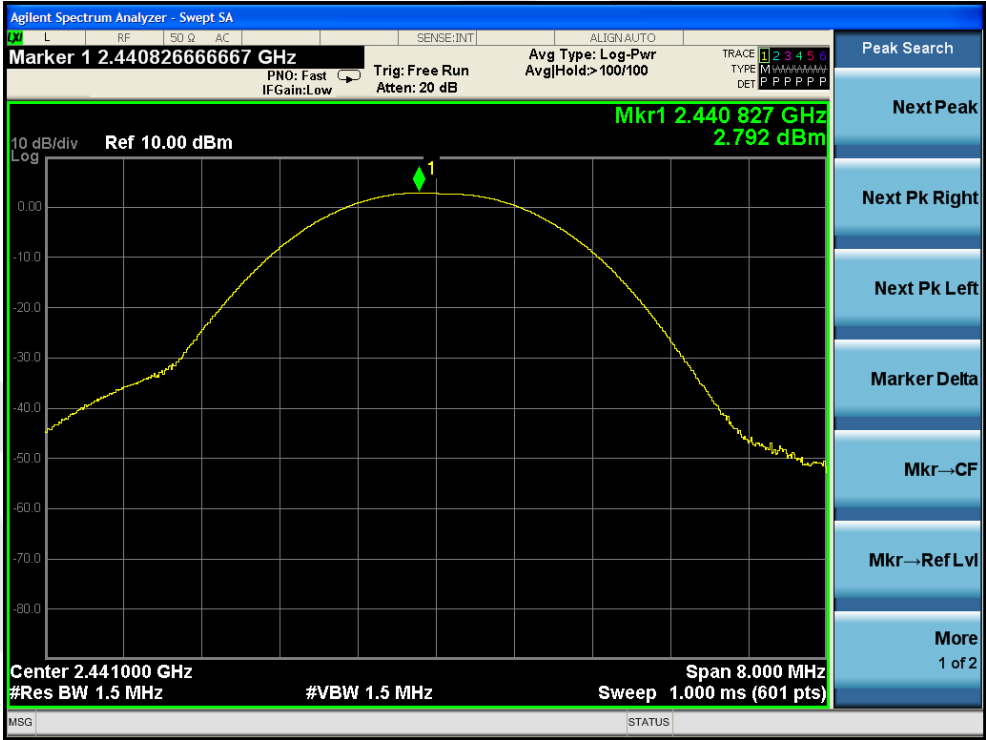


Test Mode: BDR---Middle



Test Mode: BDR---High

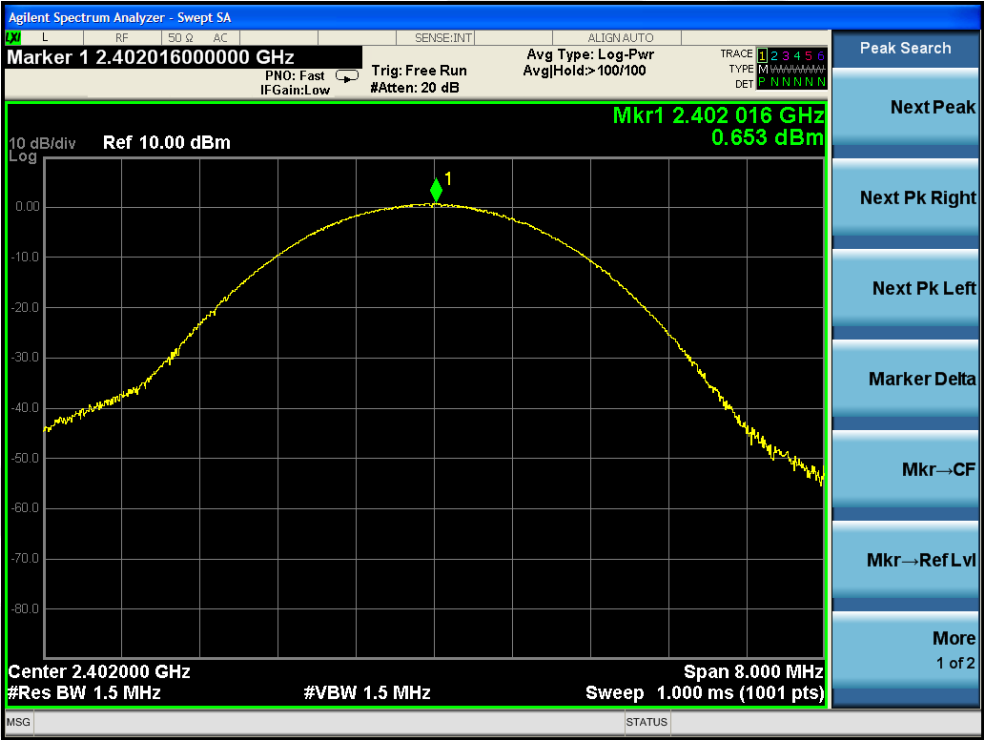

Test Mode: EDR---Low

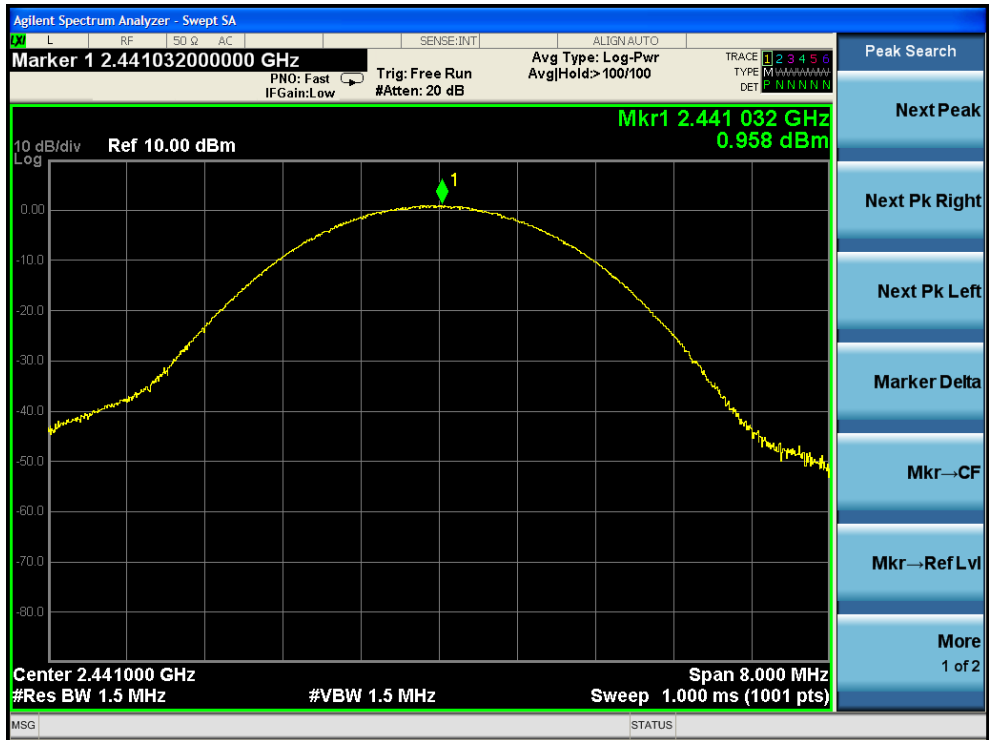

Test Mode: EDR---Middle




Test Mode: EDR---High

6. 20DB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data


Test Item	: 20dB BW	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Channel	Frequency(MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2402	1094.0	BDR
Middle	2441	1091.0	BDR
High	2480	1095.0	BDR
Low	2402	1344.0	EDR
Middle	2441	1340.0	EDR
High	2480	1336.0	EDR


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

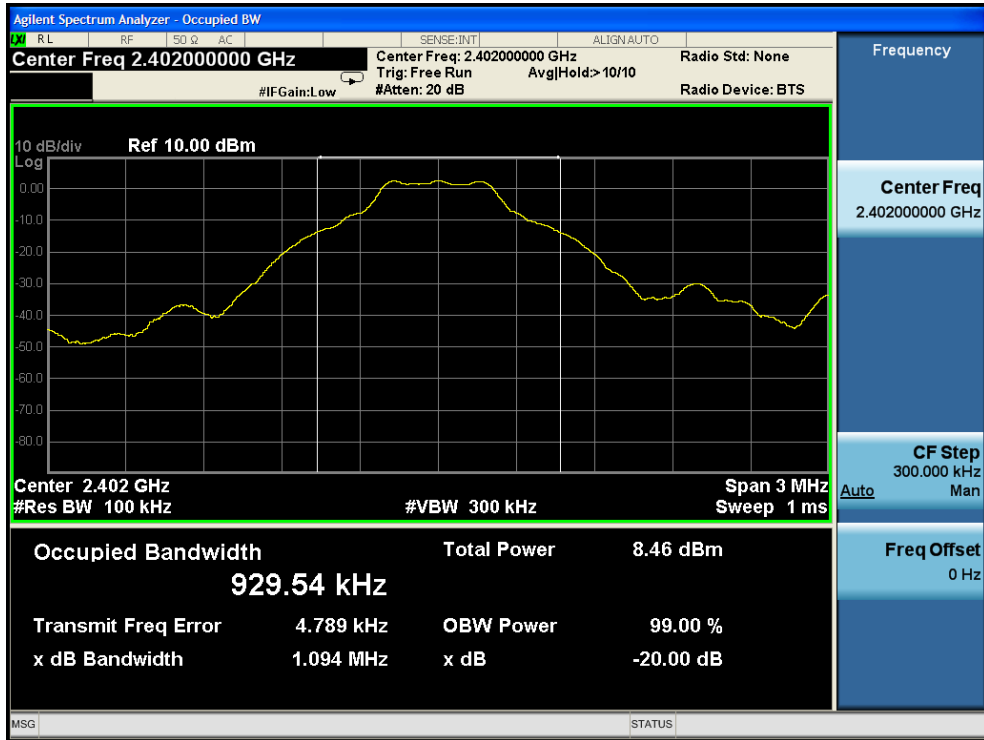


Test Mode: BDR---Low

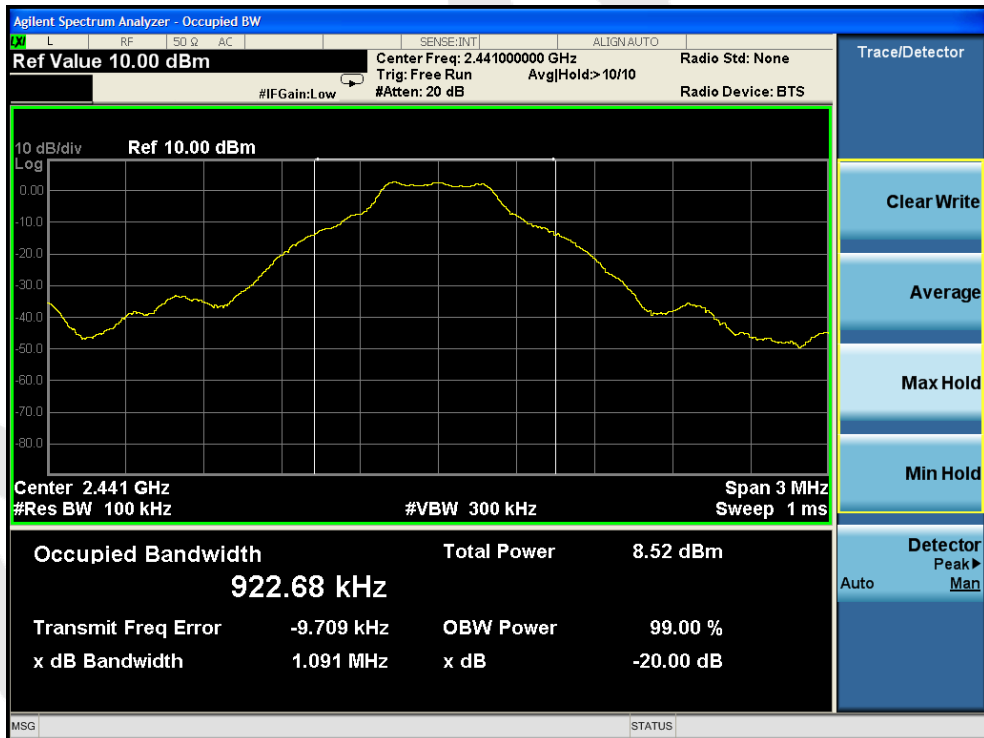


Test Mode: BDR---Middle

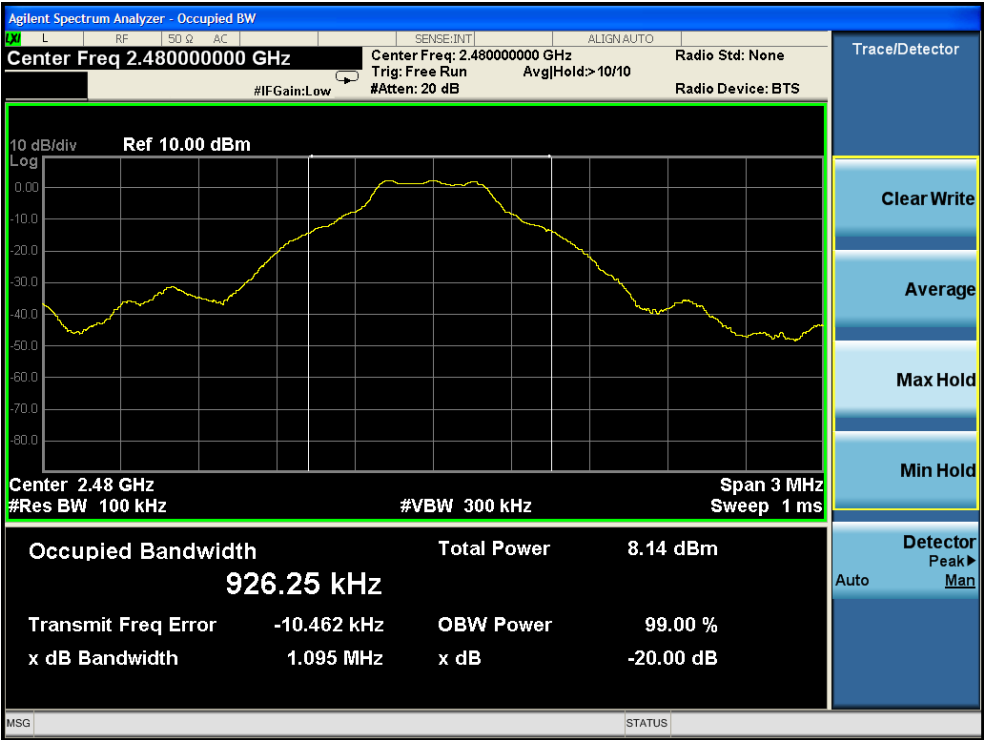


Test Mode: BDR---High

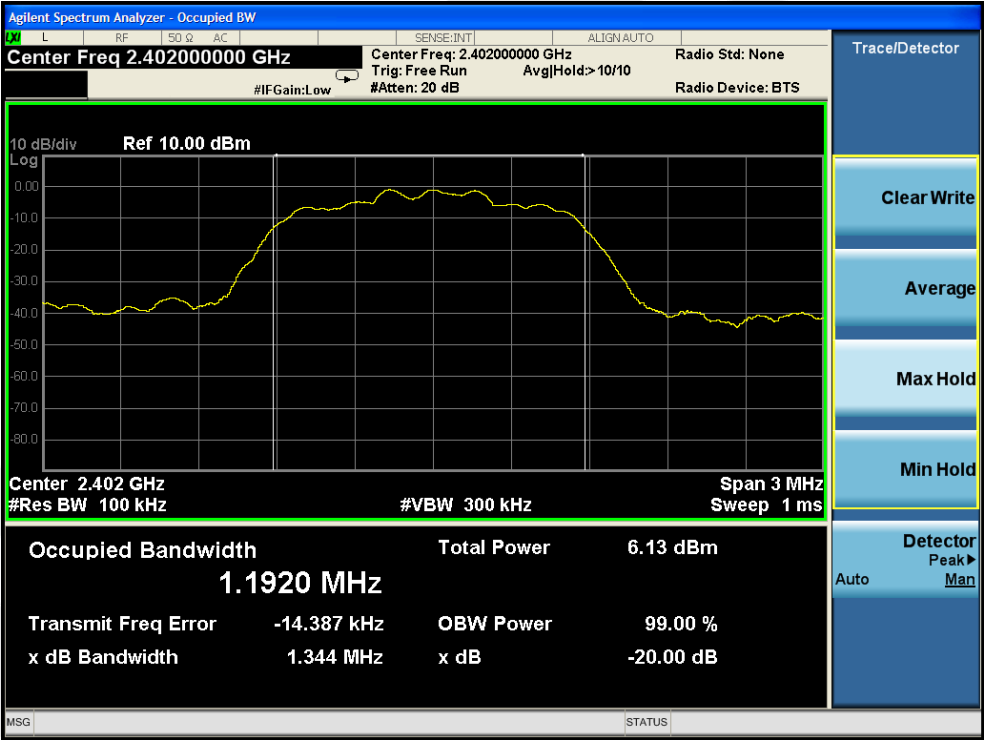

Test Mode: EDR---Low

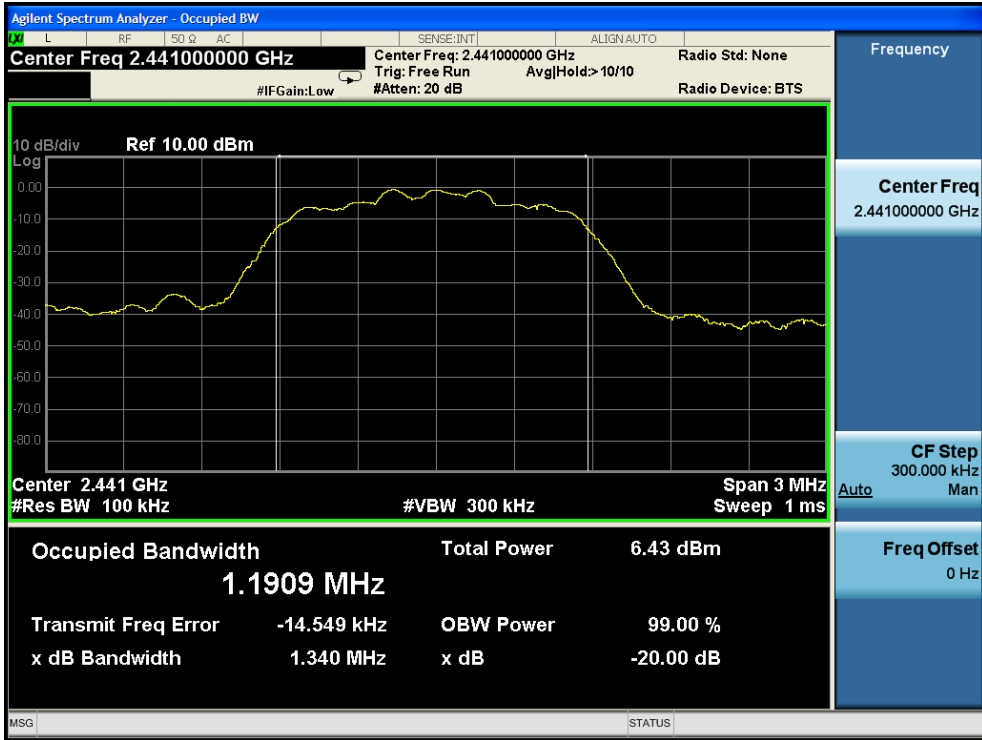

Test Mode: EDR---Middle

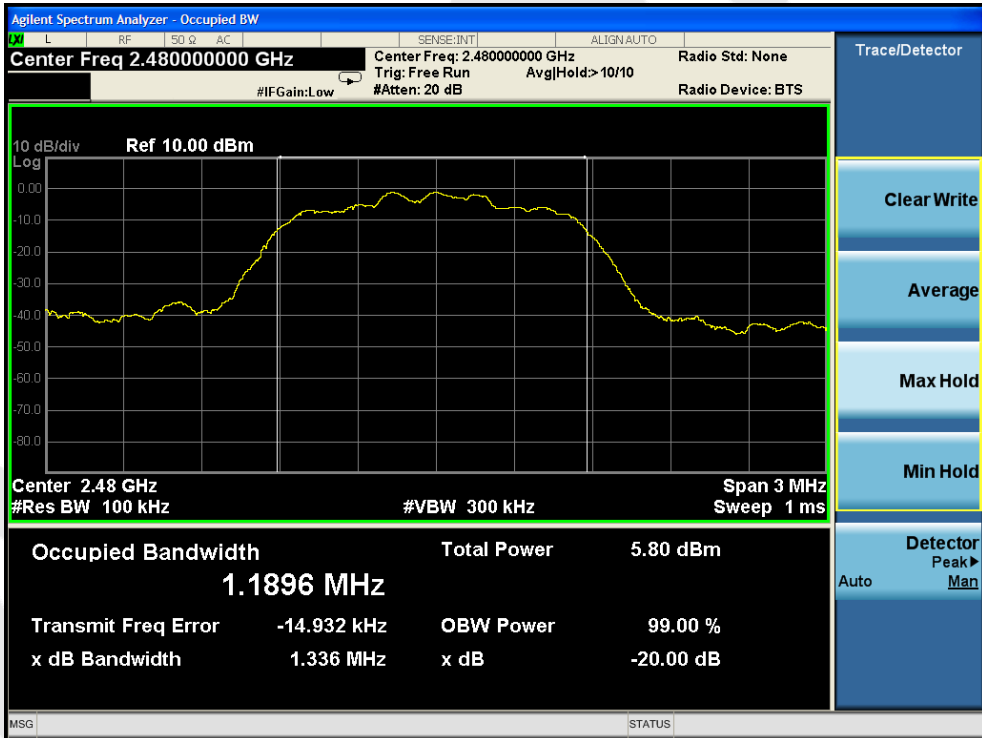


Test Mode: EDR---High

7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Test Item	: Frequency Separation	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2402	1000	729.3	BDR
Middle	2441	1000	727.3	BDR
High	2480	1000	730.0	BDR
Low	2402	1000	896.0	EDR
Middle	2441	1000	893.3	EDR
High	2480	1000	890.7	EDR

Remark:

1. The limit of mode (BDR/EDR) is 2/3 of 20dB BW;
2. The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.



Test Mode: BDR---Low



Test Mode: BDR---Middle



Test Mode: BDR---High



Test Mode: EDR---Low



Test Mode: EDR---Middle



Test Mode: EDR---High

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data


Test Item : Number of Hopping Frequency
 Test Voltage : DC 3.7V Battery inside
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24°C
 Humidity : 55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480MHz	79	> 15

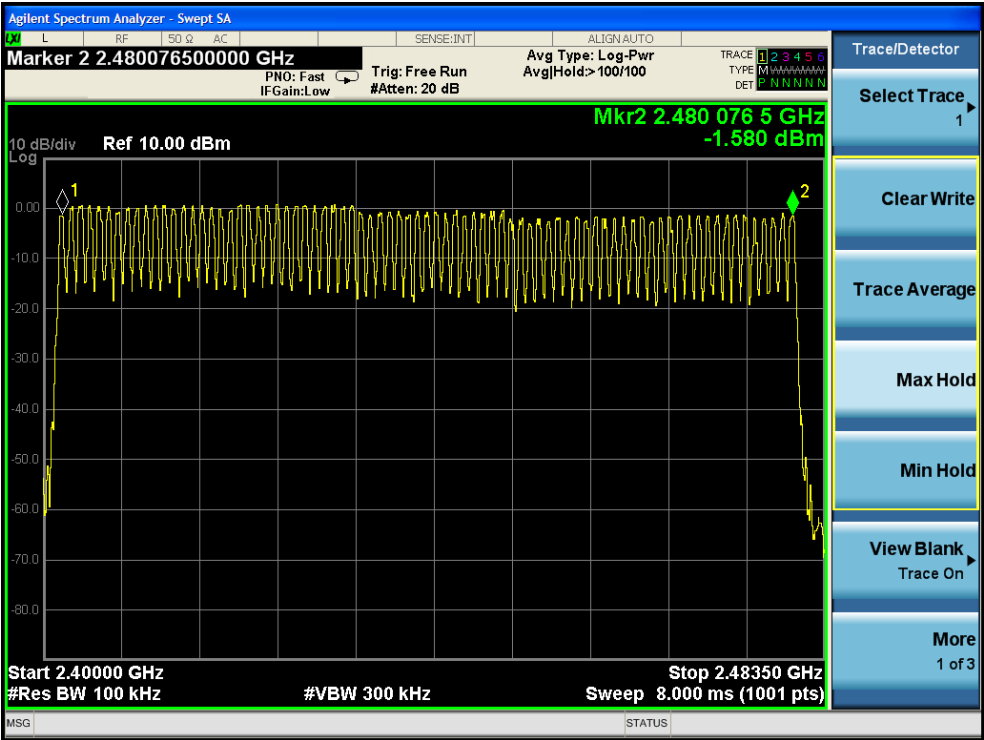

BDR Mode

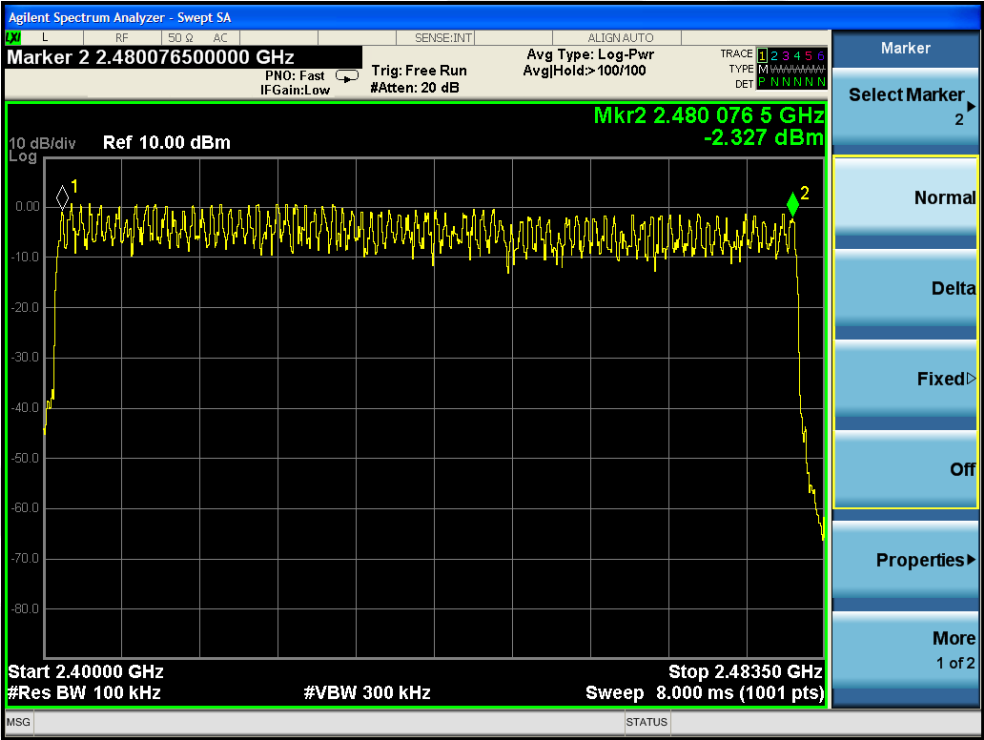


EDR Mode

9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:


1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Data


Test Item	: Time of Occupancy	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Package Type	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (s)	Modulation
DH1	0.378	time slot length *1600/2 /79 * 31.6	120.96	0.4	BDR
DH3	1.630	time slot length *1600/4 /79 * 31.6	260.80	0.4	BDR
DH5	2.887	time slot length *1600/6 /79 * 31.6	307.95	0.4	BDR
3DH1	0.398	time slot length *1600/2 /79 * 31.6	127.36	0.4	EDR
3DH3	1.648	time slot length *1600/4 /79 * 31.6	263.68	0.4	EDR
3DH5	2.887	time slot length *1600/6 /79 * 31.6	307.95	0.4	EDR


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

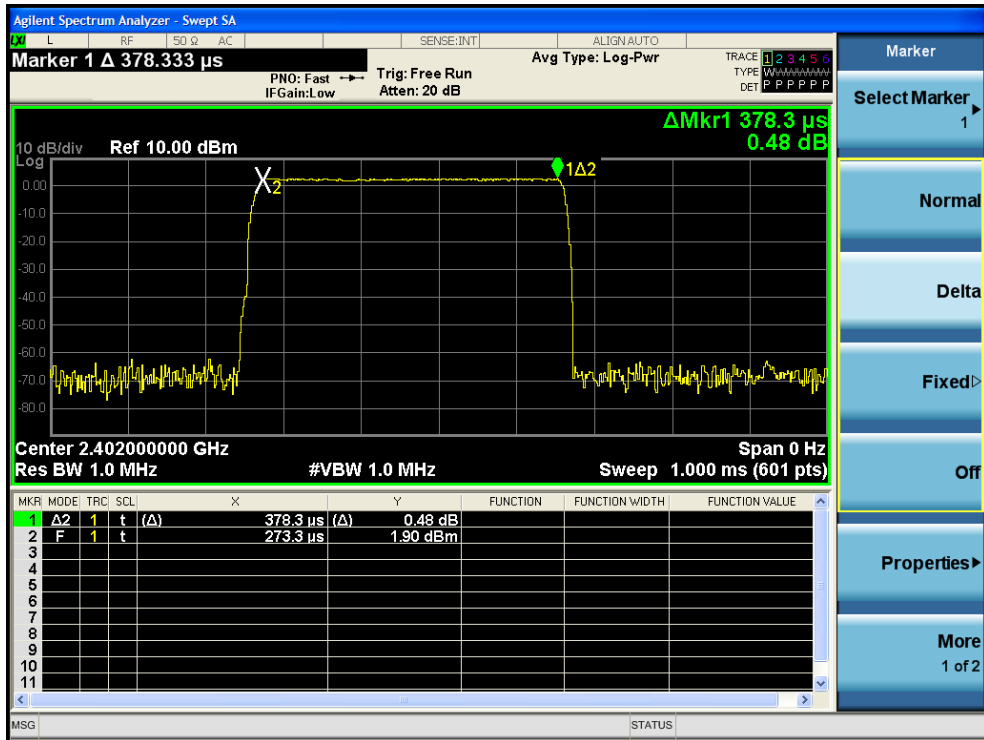


Test Mode: BDR---DH1

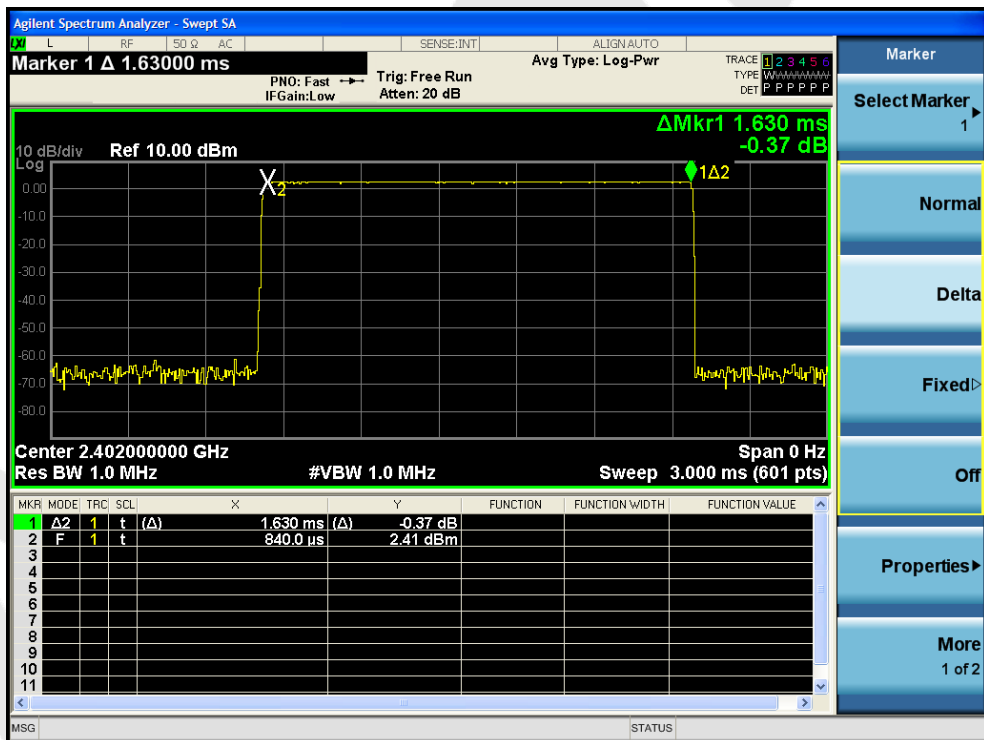


Test Mode: BDR---DH3

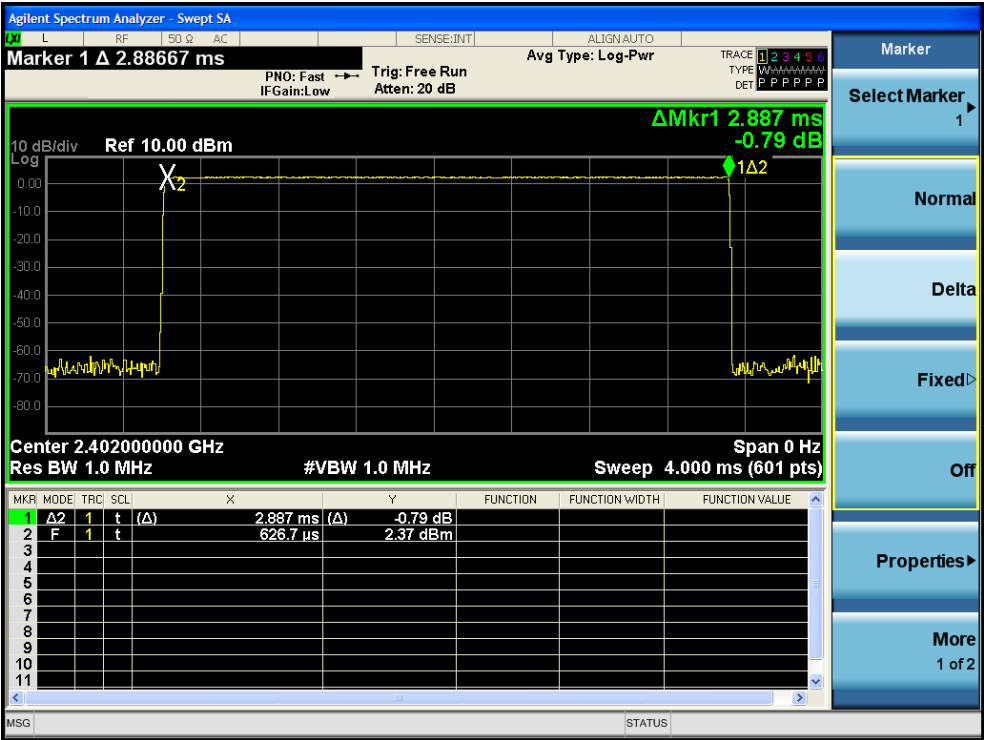


Test Mode: BDR—DH5

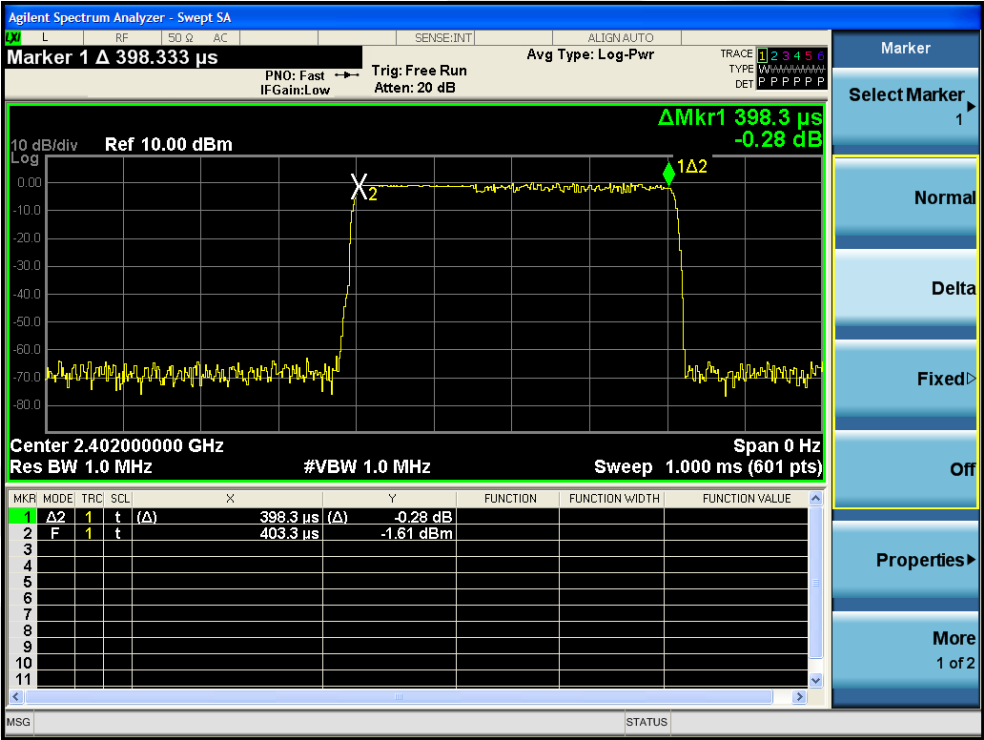

Test Mode: EDR---3DH1

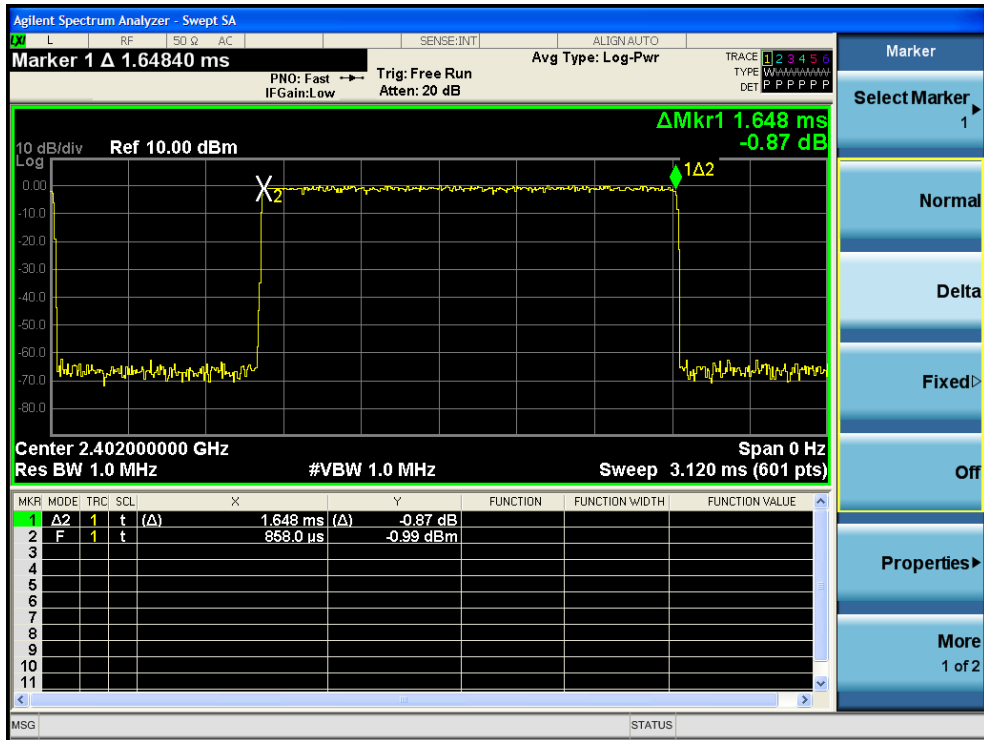

Test Mode: EDR---3DH3

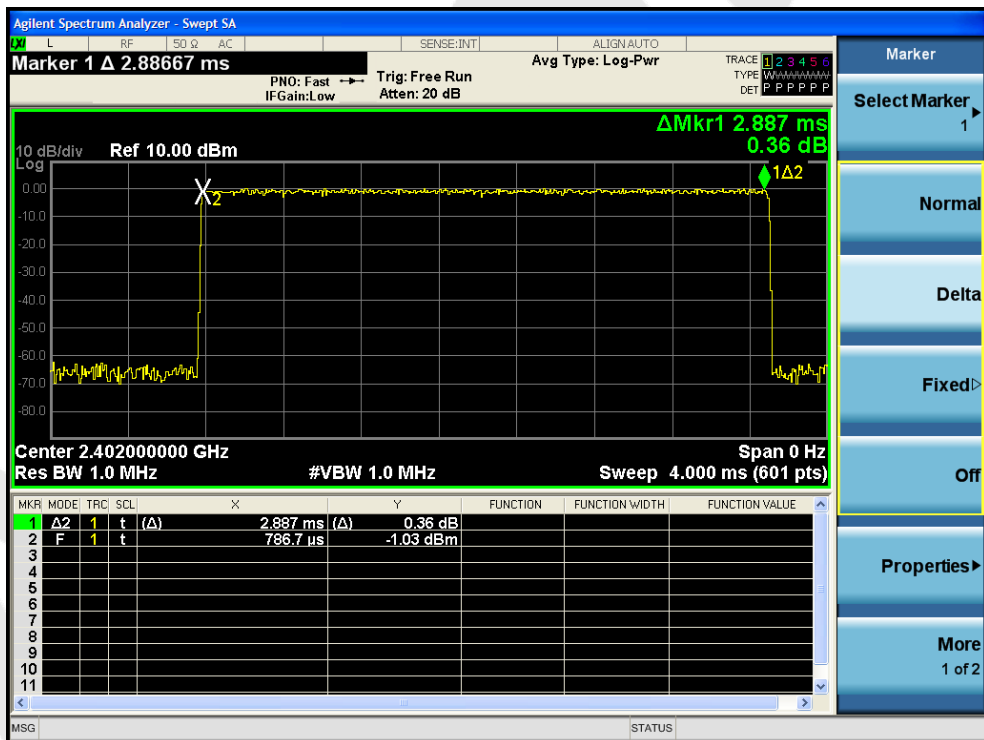


Test Mode: EDR—3DH5

10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup

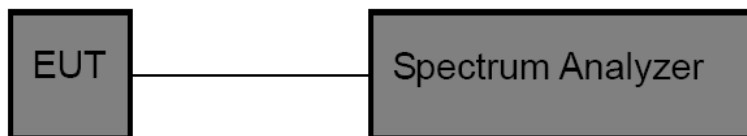

10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data


Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.

For Hopping Mode

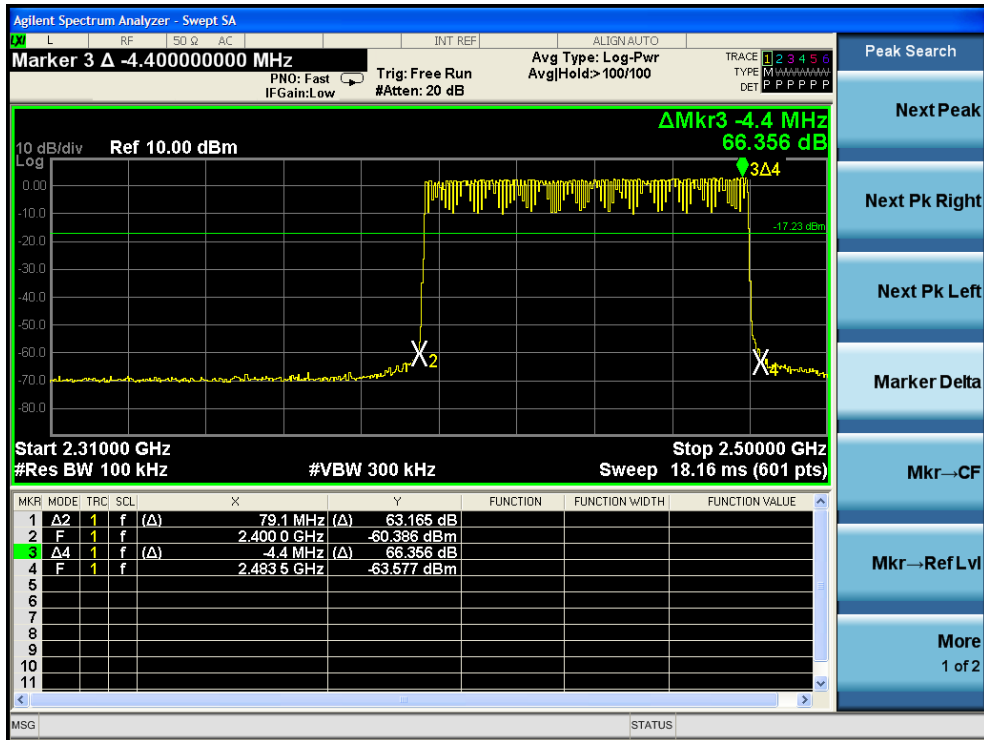


BDR mode

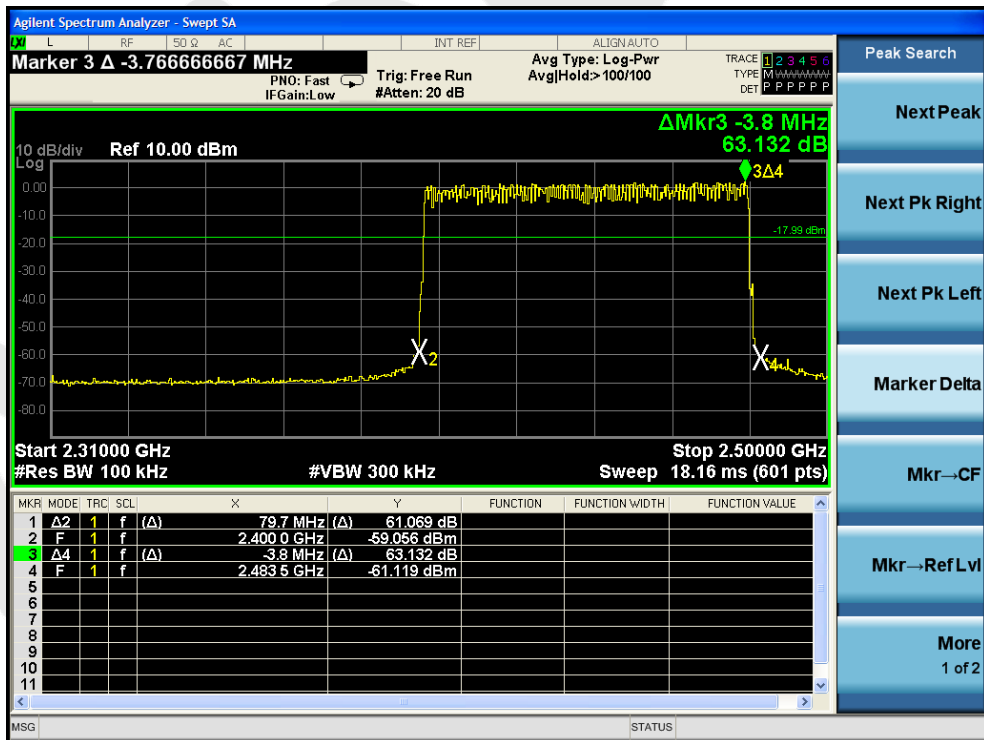


EDR mode

For Non-Hopping Mode

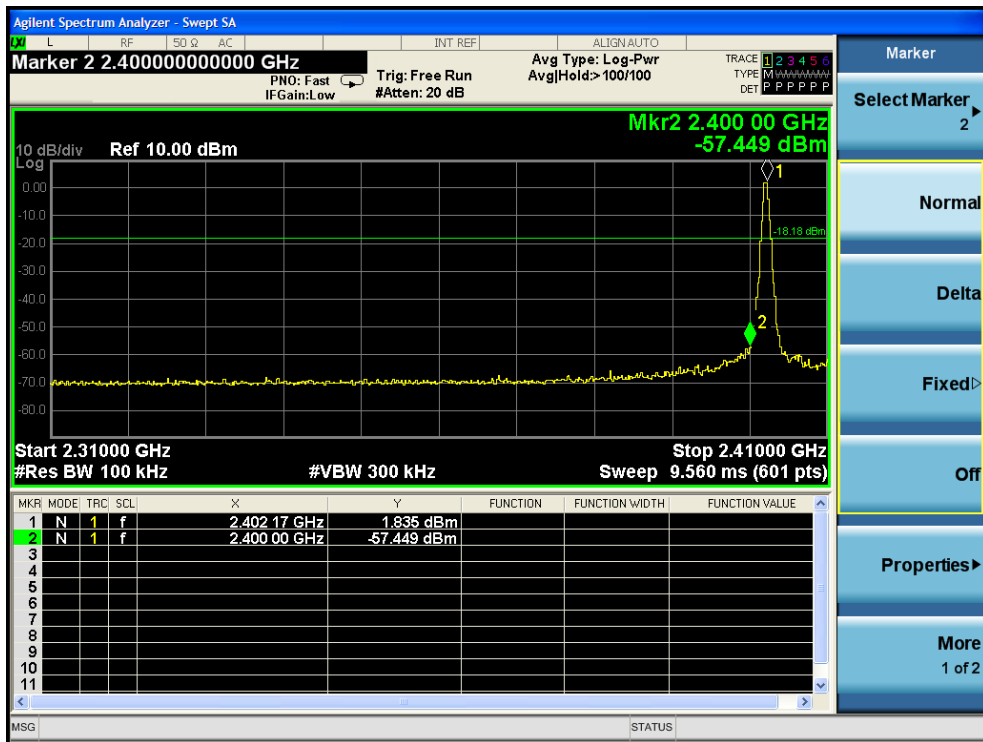


BDR mode -- Lowest

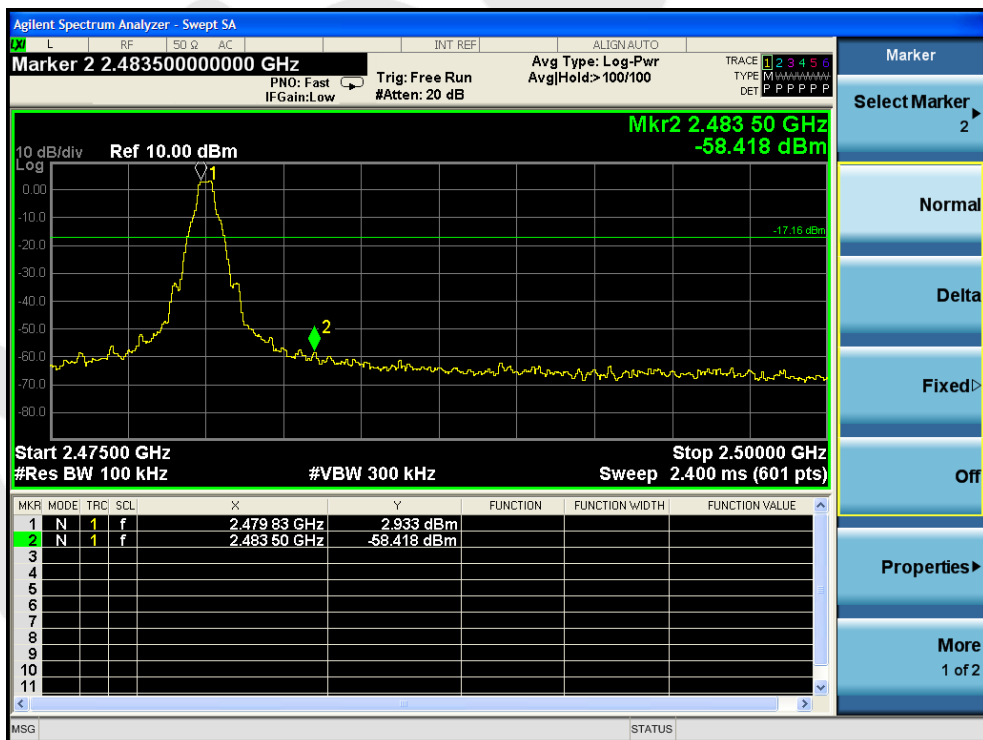

BDR mode -- Highest

For Non-Hopping Mode

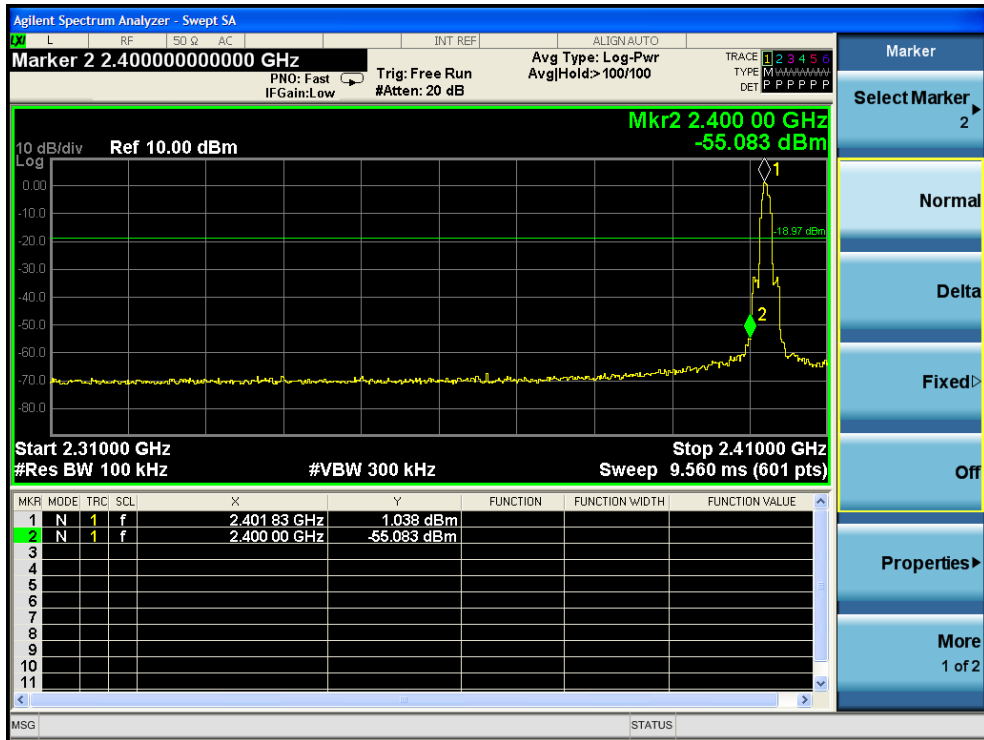

EDR mode -- Lowest



EDR mode -- Highest

Conducted Emission Method



Test Mode: BDR---Low



Test Mode: BDR---Mid



Test Mode: BDR---High



Test Mode: EDR---Low



Test Mode: EDR---Mid



Test Mode: EDR---High

11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

11.2. Antenna Connected Construction

The bluetooth antenna is PIFA antenna which permanently attached, and the best case gain of the antenna is -0.72 dBi. It complies with the standard requirement.





APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

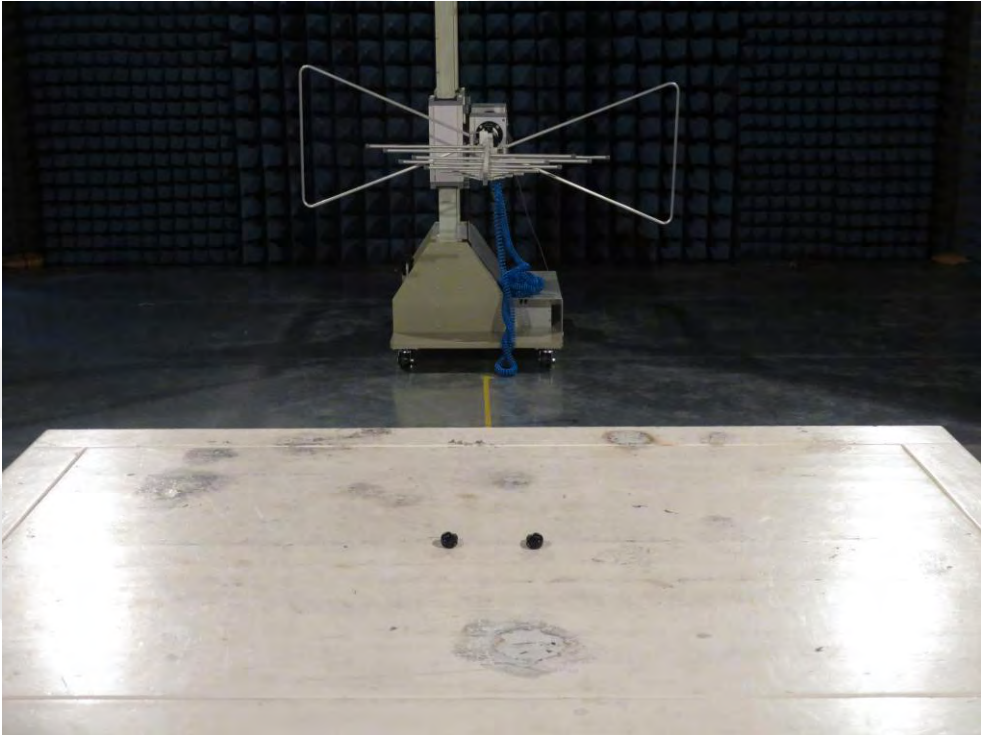

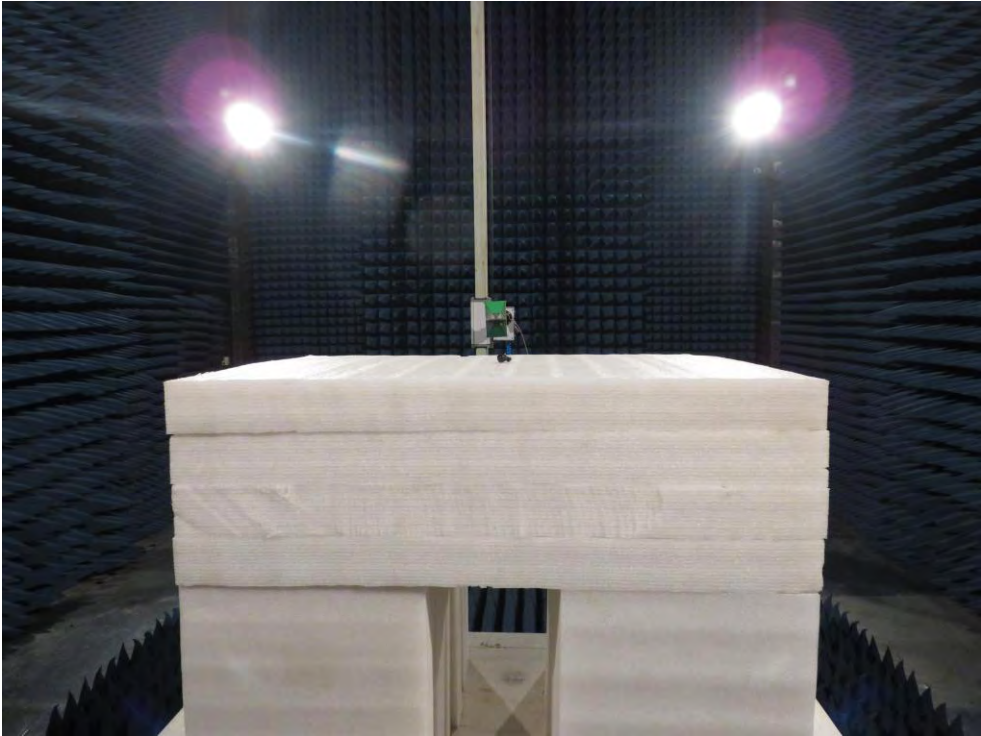

Anbotek

APPENDIX II -- EXTERNAL PHOTOGRAPH













Left

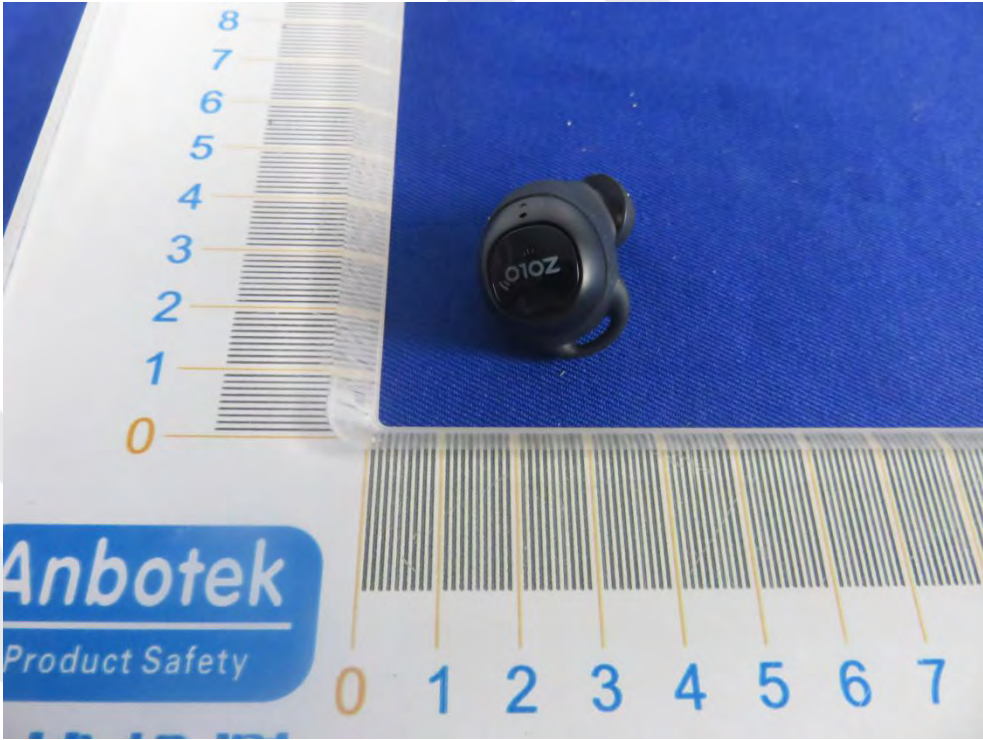


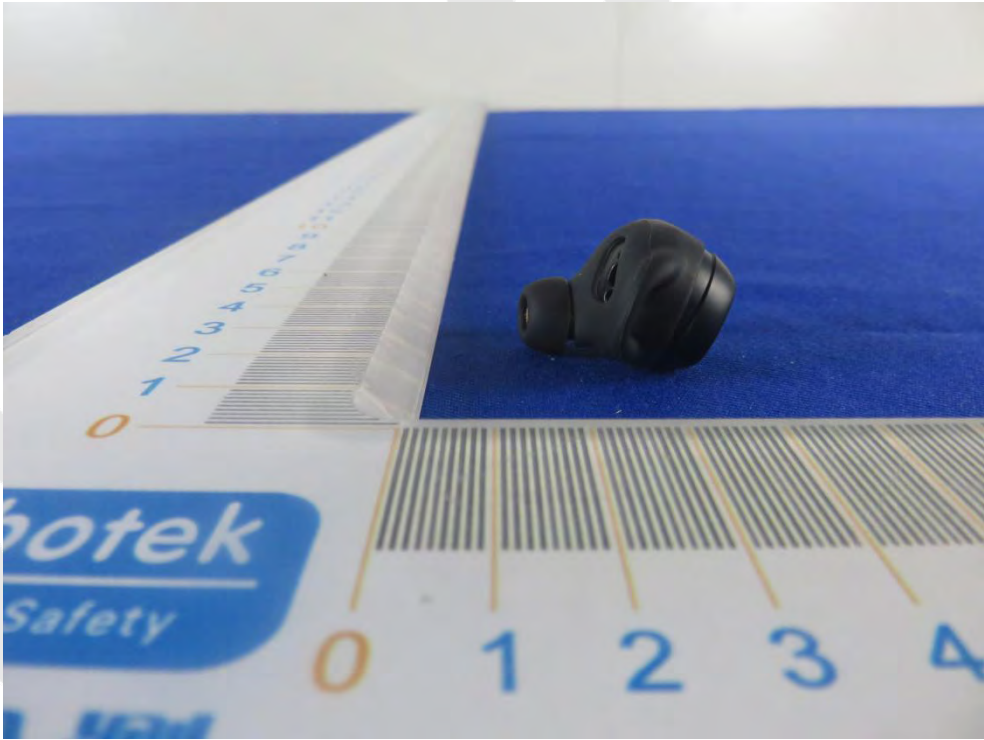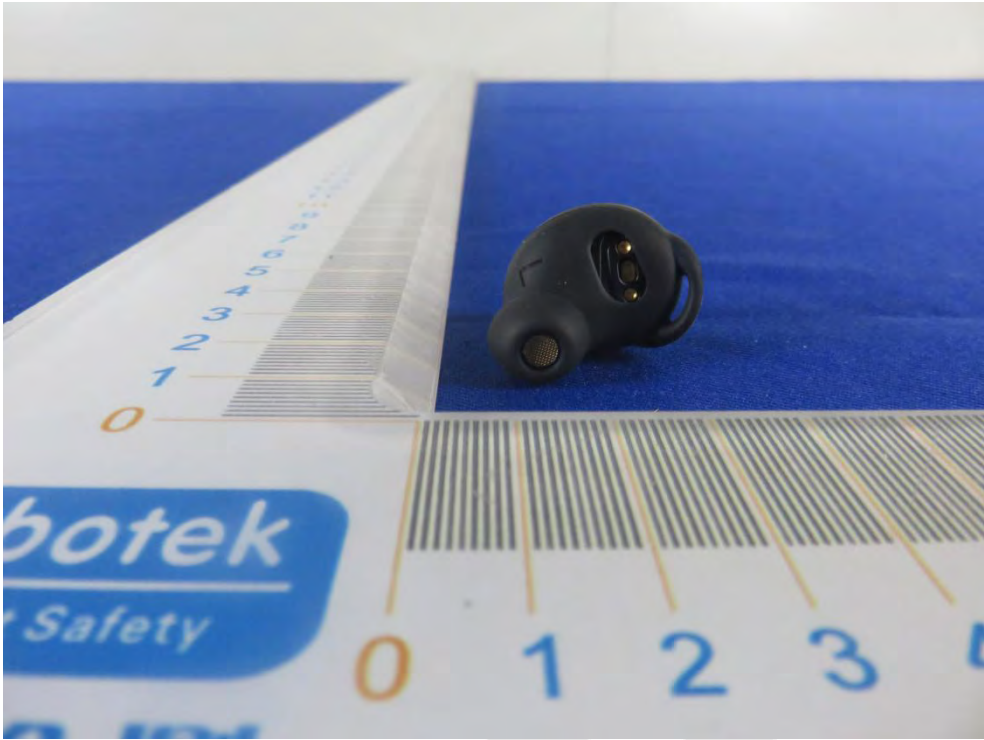


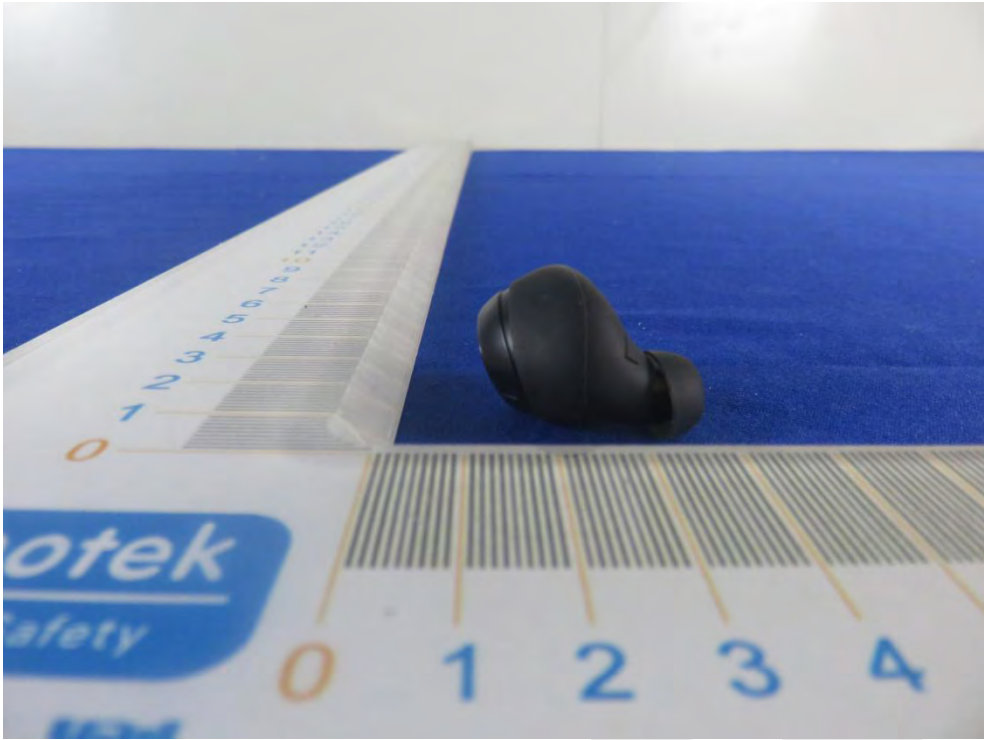




Right

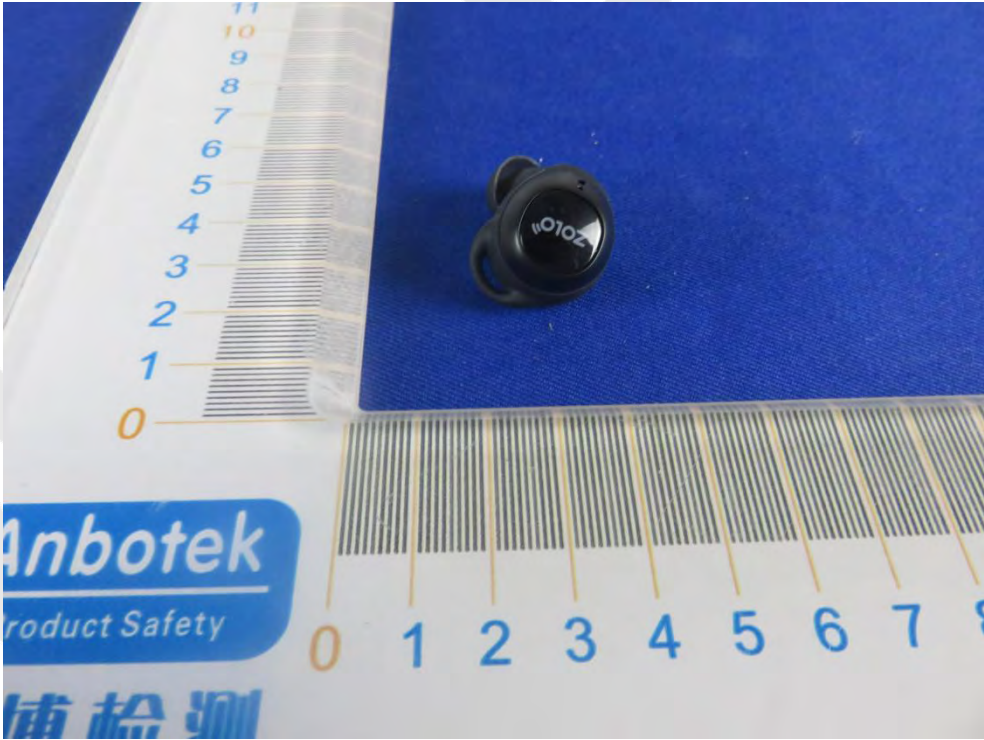

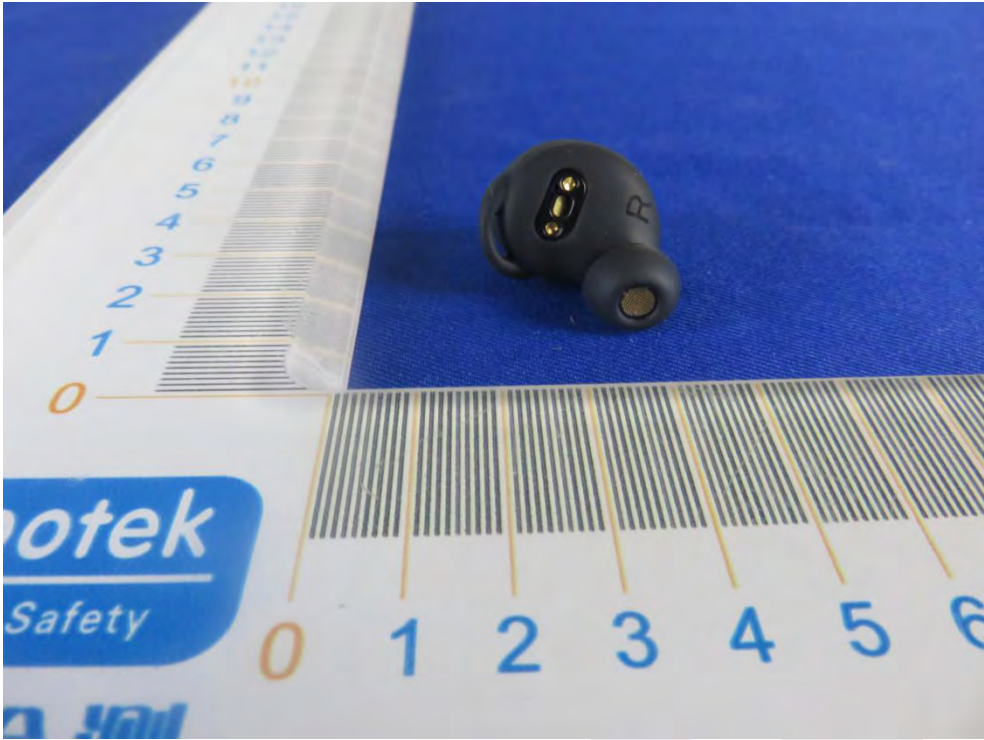


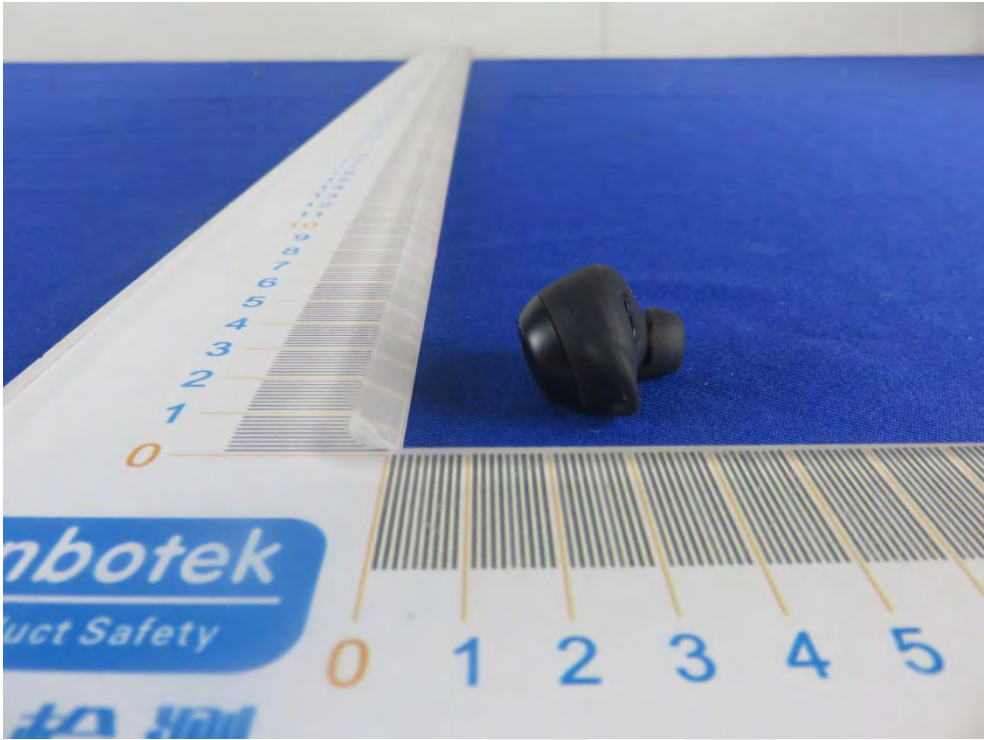





APPENDIX III -- INTERNAL PHOTOGRAPH





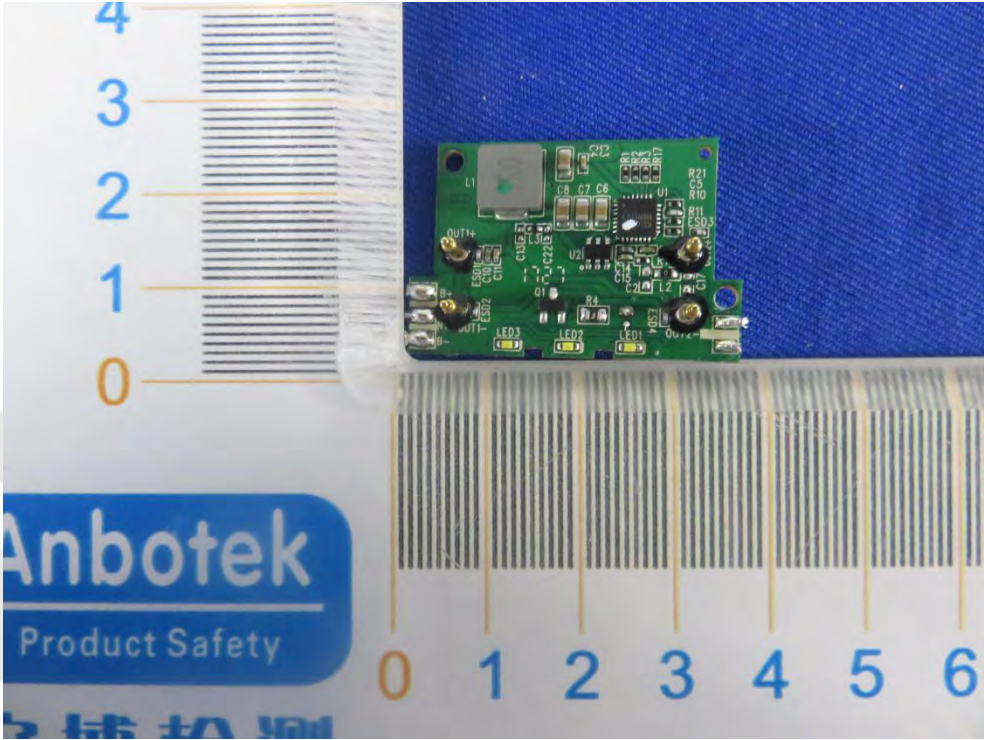



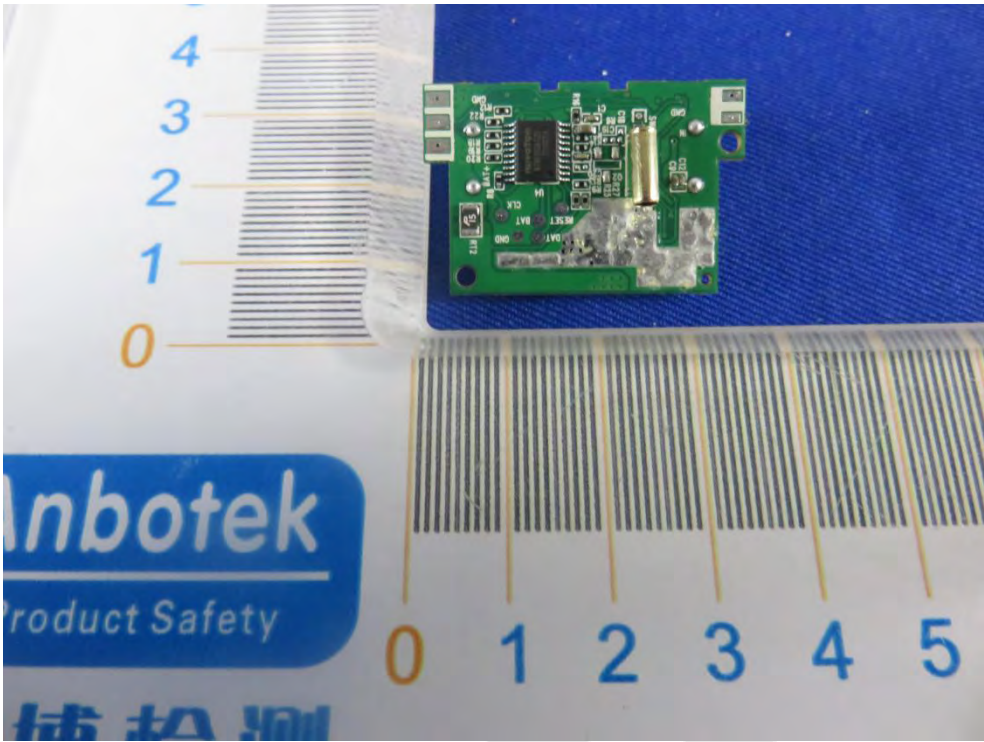



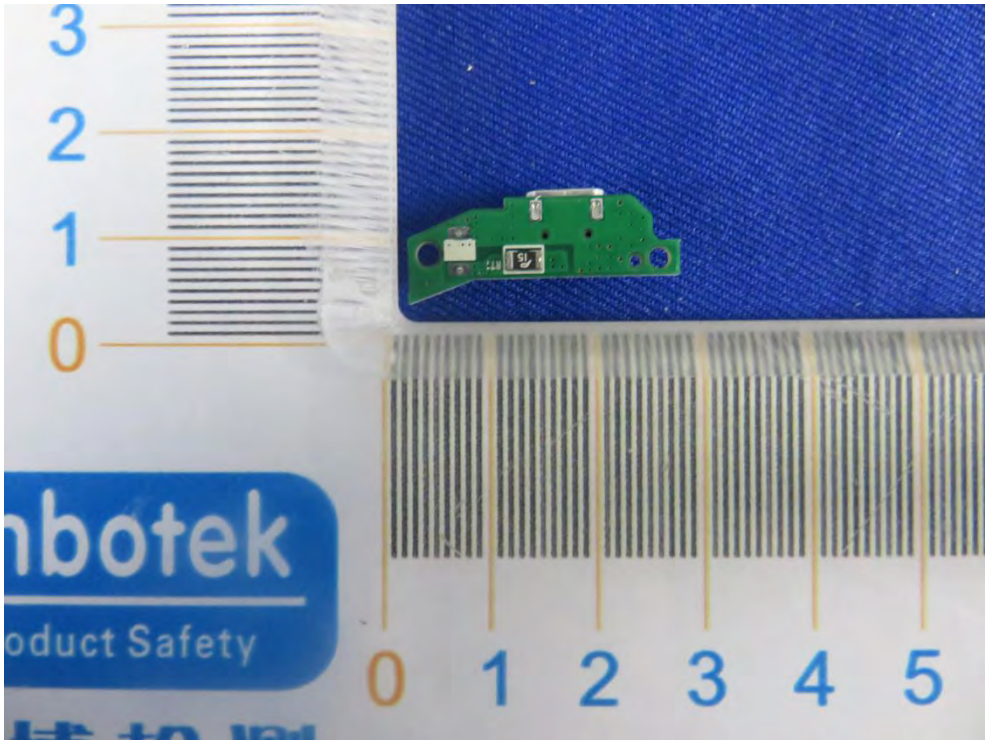



Left

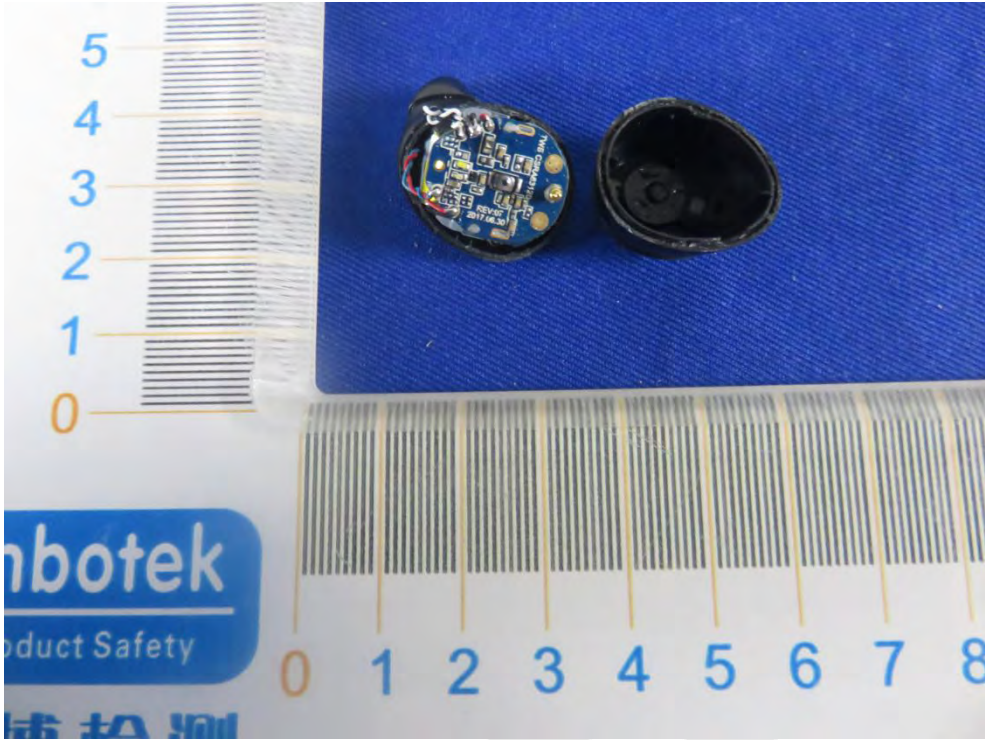

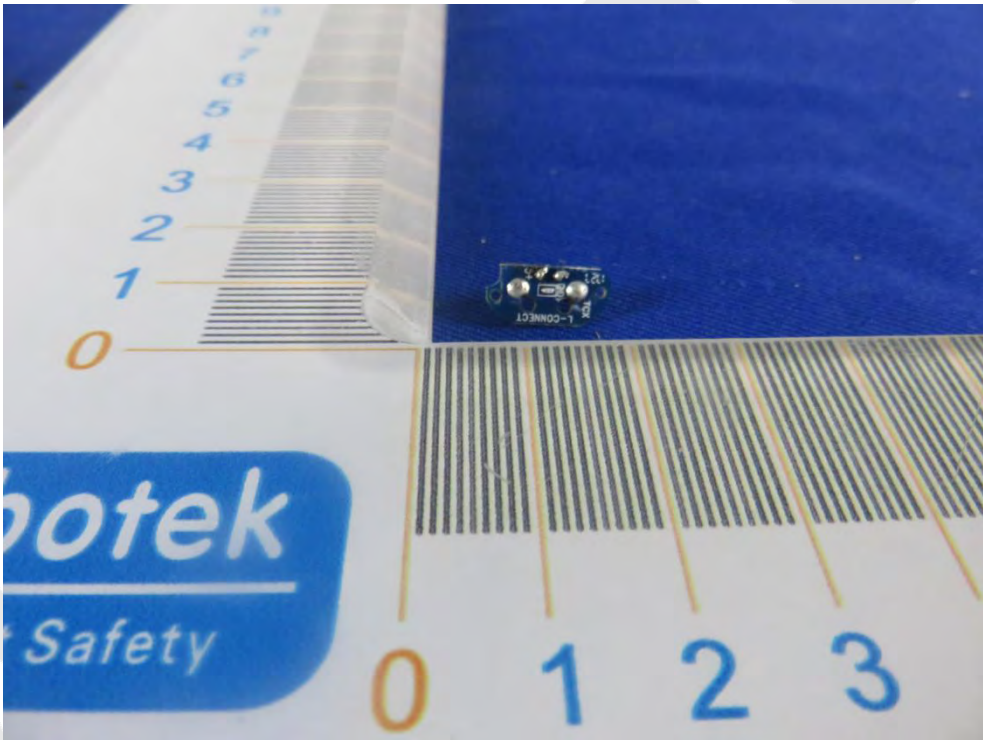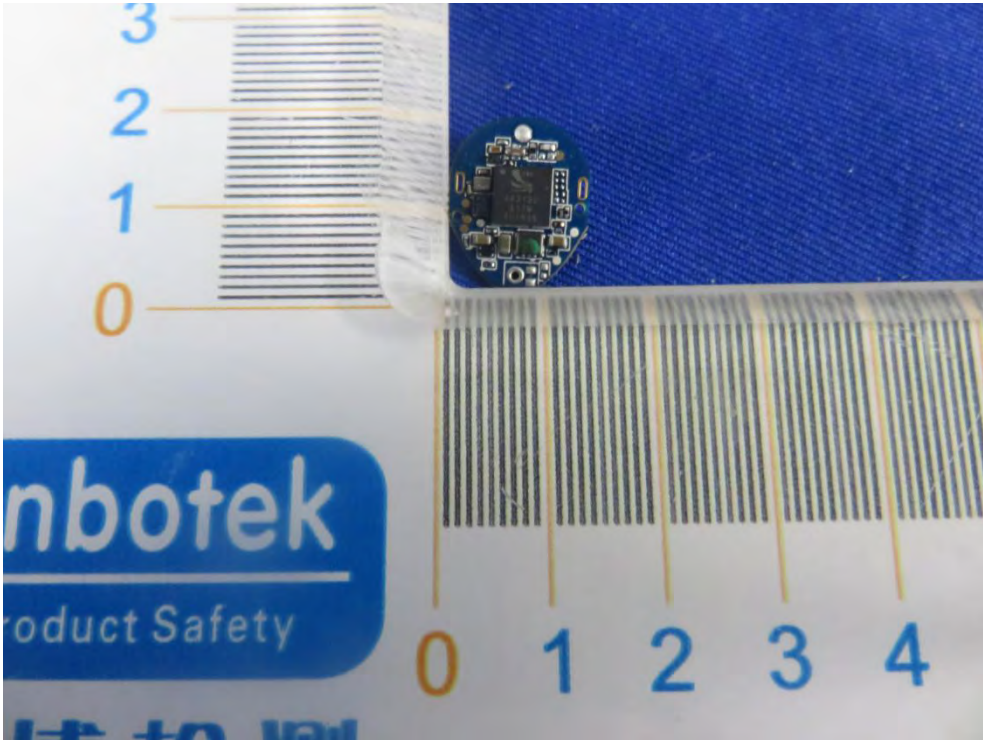

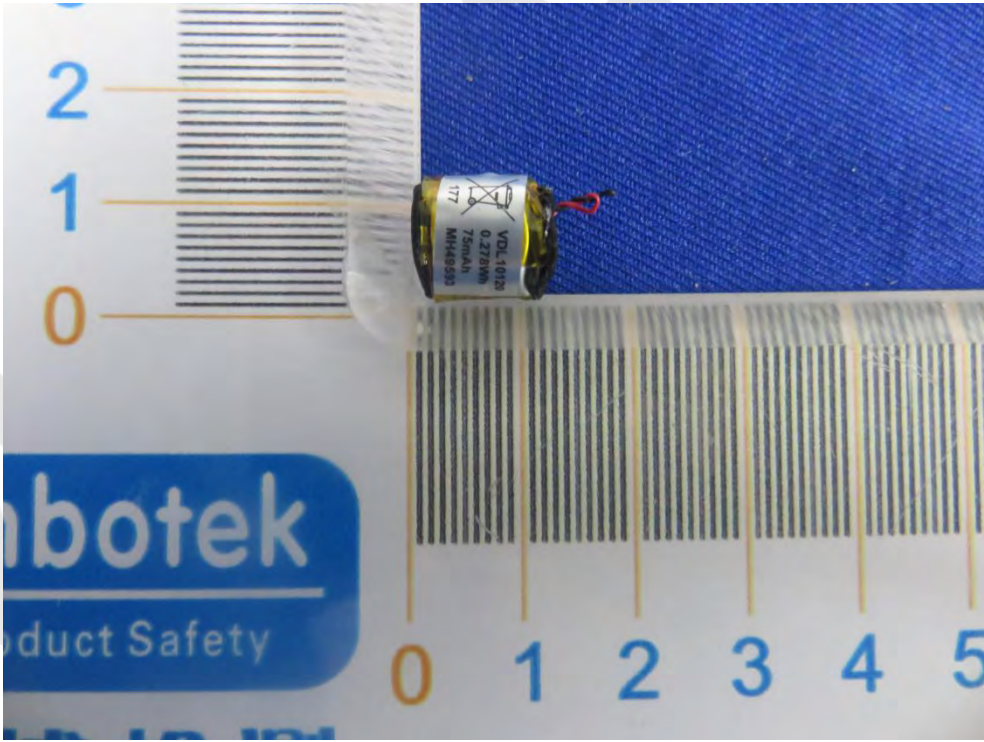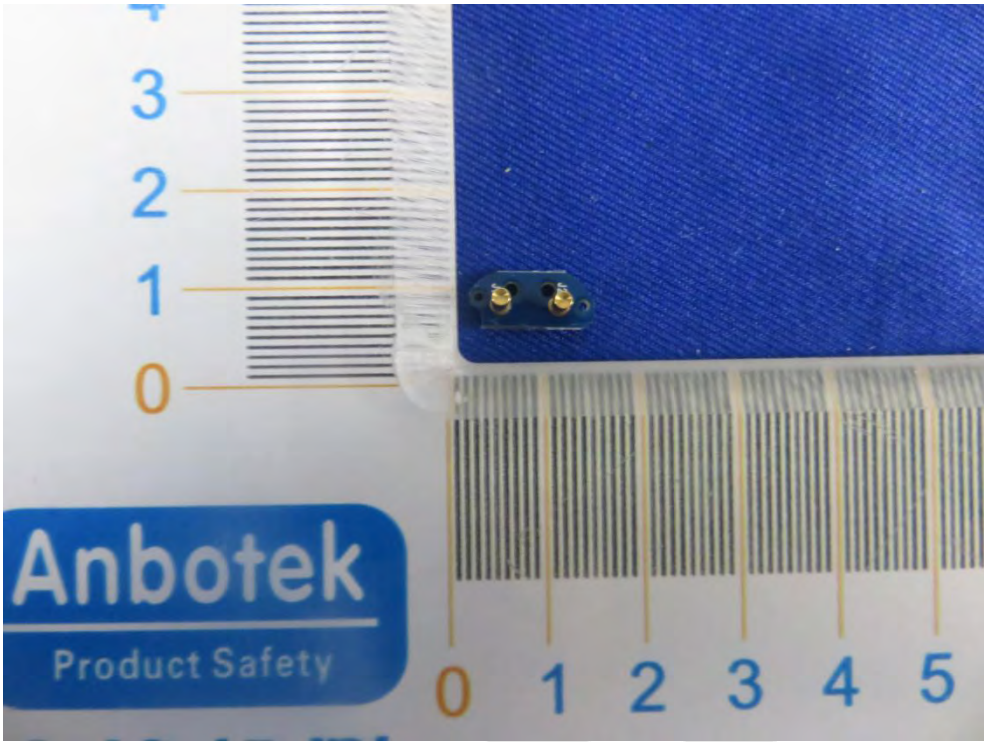

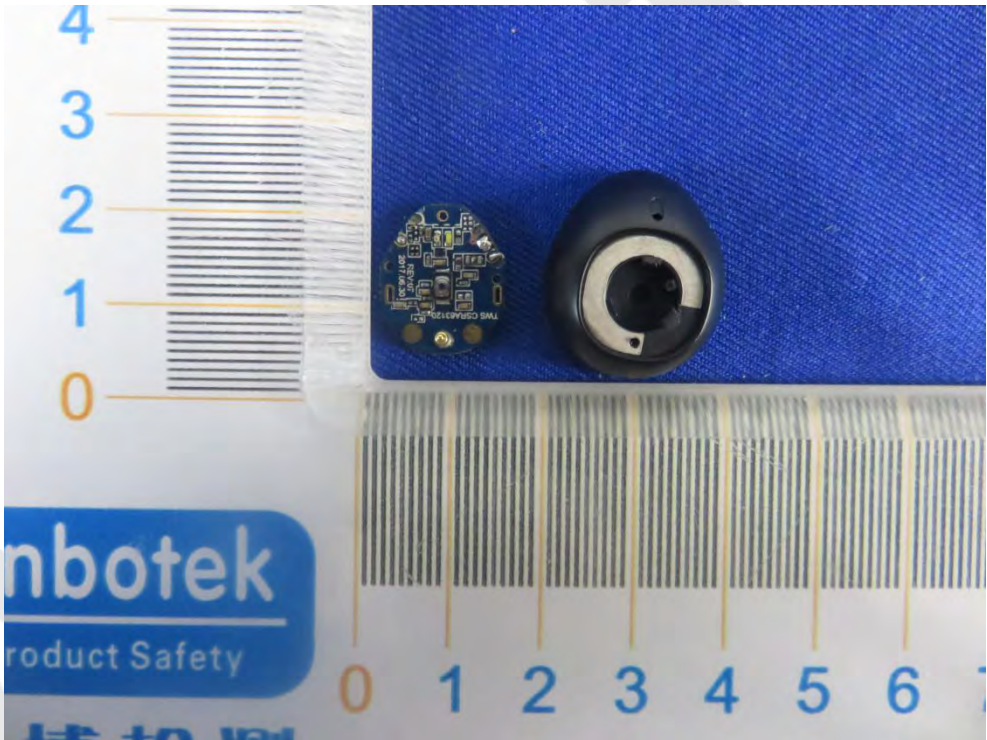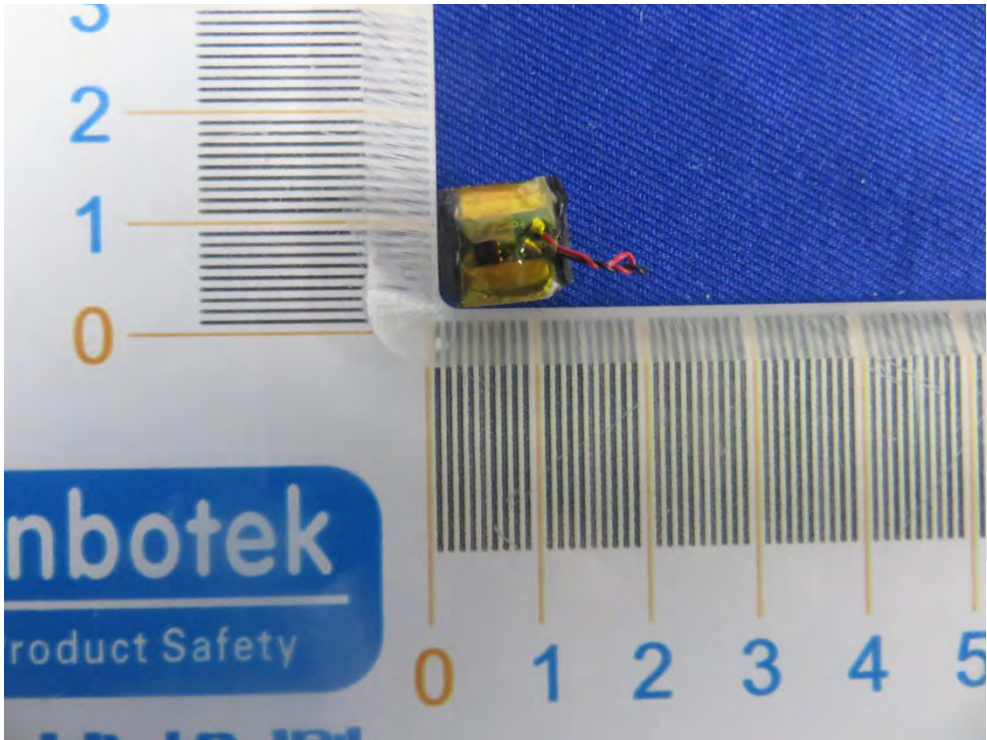

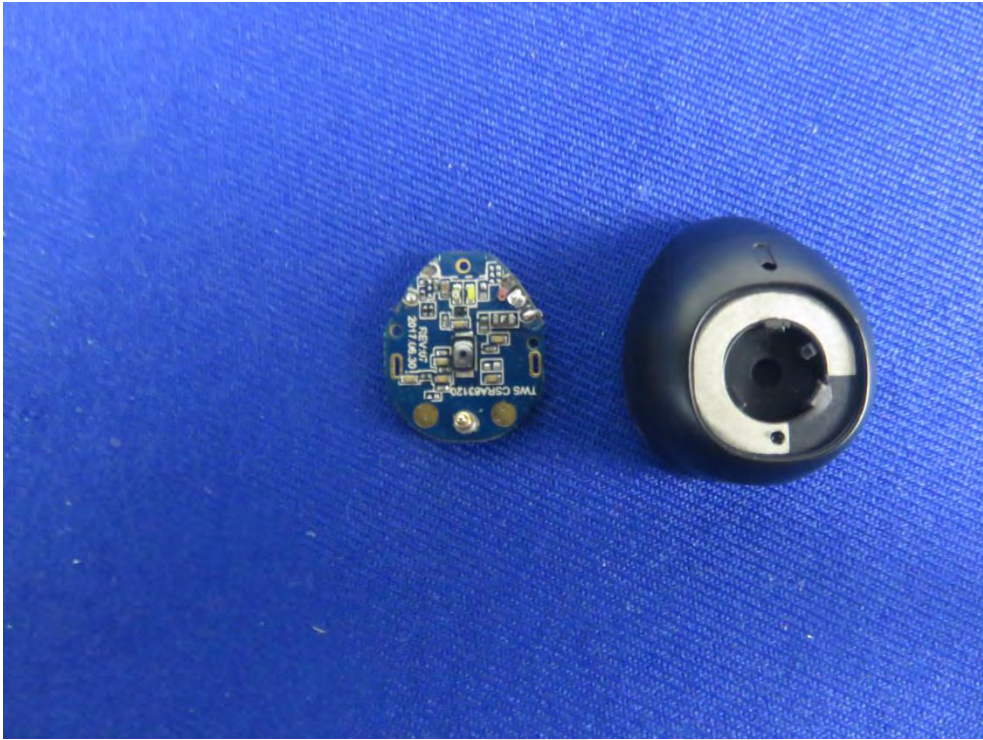

Right

