



# MEASUREMENT REPORT

## FCC PART 15.247 WLAN 802.11b/g/n

---

**FCC ID:** 2AB7TOX7

**APPLICANT:** Benton Technology Company Limited

**Application Type:** Certification

**Product:** Tablet PC

**Model No.:** BT-M716W, Ox7, SU-T1008

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247

**Test Procedure(s):** ANSI C63.10-2009, KDB 558074 D01v03r01

**Test Date:** April 08 ~ 13, 2014

Reviewed By : Robin Wu  
( Robin Wu )

Approved By : Marlin Chen  
( Marlin Chen )

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

### Revision History

Report No.	Version	Description	Issue Date
1404RSU00901	Rev. 01	Initial report	04-14-2014

# CONTENTS

Description	Page
<b>§2.1033 General Information .....</b>	<b>5</b>
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Equipment Description.....	7
2.2. Device Capabilities .....	8
2.3. Test Configuration .....	8
2.4. EMI Suppression Device(s)/Modifications.....	8
2.5. Labeling Requirements.....	8
2.6. Test Software .....	8
<b>3. DESCRIPTION OF TEST .....</b>	<b>9</b>
3.1. Evaluation Procedure .....	9
3.2. AC Line Conducted Emissions .....	9
3.3. Radiated Emissions.....	10
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>11</b>
<b>5. TEST EQUIPMENT CALIBRATION DATA .....</b>	<b>12</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>13</b>
<b>7. TEST RESULT .....</b>	<b>14</b>
7.1. Summary .....	14
7.2. 6dB Bandwidth Measurement.....	15
7.2.1. Test Limit .....	15
7.2.2. Test Procedure used.....	15
7.2.3. Test Setting.....	15
7.2.4. Test Setup.....	15
7.2.5. Test Result.....	16
7.3. Output Power Measurement.....	20
7.3.1. Test Limit .....	20
7.3.2. Test Procedure Used .....	20
7.3.3. Test Setting.....	20
7.3.4. Test Setup.....	20
7.3.5. Test Result of Output Power .....	21
7.4. Power Spectral Density Measurement .....	23

---

7.4.1.	Test Limit .....	23
7.4.2.	Test Procedure Used .....	23
7.4.3.	Test Setting.....	23
7.4.4.	Test Setup.....	23
7.4.5.	Test Result.....	24
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	28
7.5.1.	Test Limit .....	28
7.5.2.	Test Procedure Used .....	28
7.5.3.	Test Setting.....	28
7.5.4.	Test Setup.....	28
7.5.5.	Test Result.....	29
7.6.	Radiated Spurious Emission Measurement .....	38
7.6.1.	Test Limit .....	38
7.6.2.	Test Procedure Used .....	38
7.6.3.	Test Setting.....	38
7.6.4.	Test Setup.....	39
7.6.5.	Test Result.....	41
7.7.	Radiated Restricted Band Edge Measurement .....	48
7.7.1.	Test Result.....	48
7.8.	AC Conducted Emissions Measurement.....	56
7.8.1.	Test Limit .....	56
7.8.2.	Test Procedure.....	56
7.8.3.	Test Setup.....	57
7.8.4.	Test Result.....	58
<b>8.</b>	<b>CONCLUSION.....</b>	<b>60</b>

## §2.1033 General Information

<b>Applicant:</b>	Benton Technology Company Limited
<b>Applicant Address:</b>	5F, Building #5, Longbi Industrial Zone, Bantian, Longgang District, Shenzhen, China
<b>Manufacturer:</b>	Benton Technology Company Limited
<b>Manufacturer Address:</b>	5F, Building #5, Longbi Industrial Zone, Bantian, Longgang District, Shenzhen, China
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part 15.247
<b>Model No.:</b>	BT-M716W, Ox7, SU-T1008
<b>FCC ID:</b>	2AB7TOX7
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Digital Transmission System (DTS)
<b>Date(s) of Test:</b>	April 08 ~ 13, 2014
<b>Test Report S/N:</b>	1404RSU00901

## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name	Tablet PC
Model No.	BT-M716W, Ox7, SU-T1008
<b>Wi-Fi</b>	
Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz 802.11n-HT40: 2422 ~ 2452 MHz
Maximum Output Power	802.11b: 11.64dBm; 802.11g: 15.86dBm; 802.11n-HT20: 16.10dBm ; 802.11n-HT40: 16.71dBm
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11 Mbps 802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 150 Mbps
Antenna Gain	1.18dBi

#### Channel List for 802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	N/A	N/A

#### Channel List for 802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	N/A	N/A	N/A	N/A

## 2.2. Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN (DTS)

**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01v03r01. The RBW and VBW were both greater than  $50/T$ , where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11b - 100.0%
- 802.11g/n-HT20 -100.0%
- 802.11n-HT40 -100.0%

## 2.3. Test Configuration

The **Tablet PC FCC ID: 2AB7TOX7** was tested per the guidance of KDB 558074 D01v03r01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.4. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.5. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

## 2.6. Test Software

The test utility software used during testing was engineering order by Tablet PC.



### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 D01v03r01 were used in the measurement of the **Tablet PC FCC ID: 2AB7TOX7**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB BeamWidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

#### 4. ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the Tablet PC is **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The **Tablet PC FCC ID: 2AB7TOX7** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATA

### Conducted Emissions

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101683	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101684	1 year	2014/11/08
Temperature/ Meter Humidity	Anymetre	TH101B	SR2-01	1 year	2014/11/15

### Radiated Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Date
Spectrum Analyzer	Agilent	E4447A	MY45300136	1 year	2014/11/08
Preamplifier	MRT	AP01G18	1310002	1 year	2014/12/14
Preamplifier	MRT	AP18G40	1310003	1 year	2014/10/07
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2014/11/24
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2014/11/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2014/11/24
Broadband Horn Antenna	Schwarzbeck	BBHA9170	9170-549	1 year	2014/12/11
Temperature/Humidity Meter	Anymetre	TH101B	AC1-01	1 year	2014/11/15

### Conducted Test Equipment

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2015/01/04
Power Sensor	Agilent	U2021XA	MY52450003	1 year	2014/12/14
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/11/15

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$ 1GHz ~ 40GHz: $\pm 4.76\text{dB}$

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** Benton Technology Company Limited  
**FCC ID:** 2AB7TOX7  
**FCC Classification:** Digital Transmission System (DTS)  
**Data Rate(s) Tested:** 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);  
6.5/7.2Mbps ~ 65/72.2Mbps (n - HT20);  
13.5/15Mbps ~ 135/150Mbps (n - HT40)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 1\text{Watt}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz Band}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC 15.207 limits}$	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v03r01 – Section 8.2 Option 2

### 7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 7.2.4. Test Setup

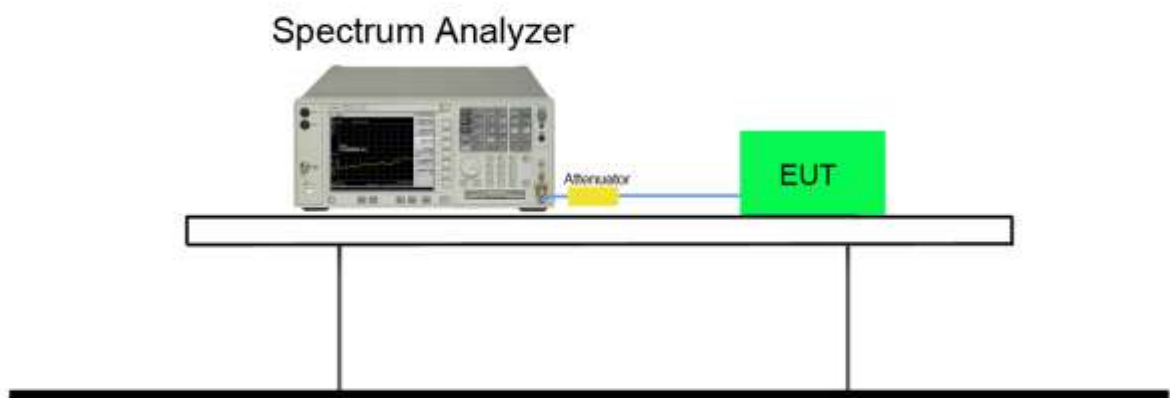


**7.2.5. Test Result**

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1	01	2412	9.95	≥0.5	Pass
802.11b	1	06	2437	9.96	≥0.5	Pass
802.11b	1	11	2462	9.59	≥0.5	Pass
802.11g	6	01	2412	16.61	≥0.5	Pass
802.11g	6	06	2437	16.62	≥0.5	Pass
802.11g	6	11	2462	16.61	≥0.5	Pass
802.11n-HT20	6.5/7.2	01	2412	17.84	≥0.5	Pass
802.11n-HT20	6.5/7.2	06	2437	17.85	≥0.5	Pass
802.11n-HT20	6.5/7.2	11	2462	17.83	≥0.5	Pass
802.11n-HT40	13.5/15	03	2422	36.51	≥0.5	Pass
802.11n-HT40	13.5/15	06	2437	36.51	≥0.5	Pass
802.11n-HT40	13.5/15	09	2452	36.52	≥0.5	Pass

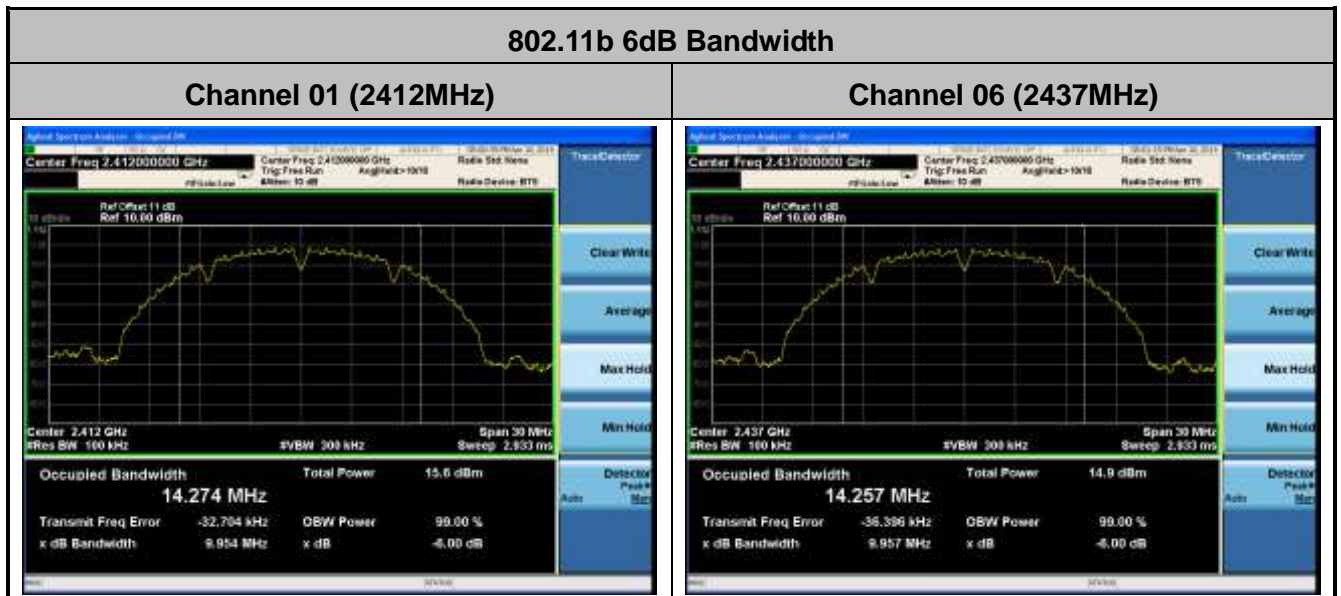



**Channel 11 (2462MHz)**

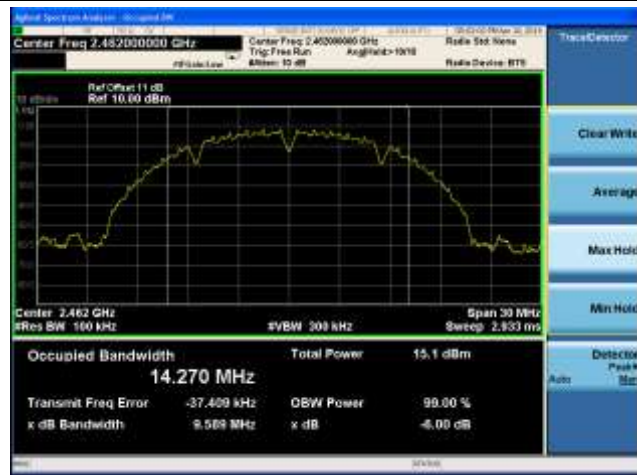


**802.11g 6dB Bandwidth**

**Channel 01 (2412MHz)**



**Channel 06 (2437MHz)**

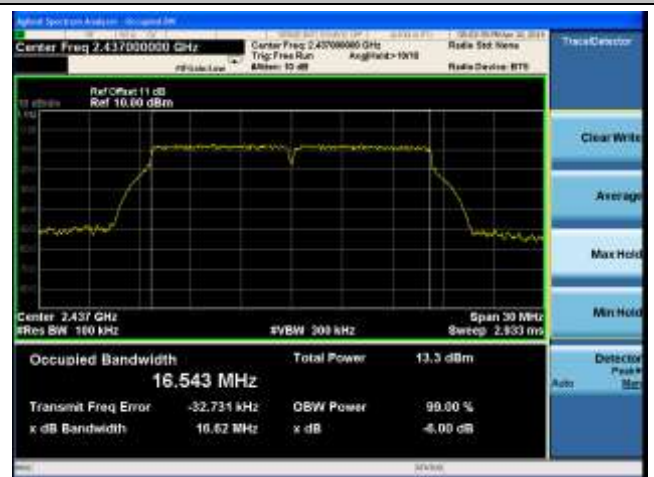


**Channel 11 (2462MHz)**




### 802.11n-HT20 6dB Bandwidth

**Channel 01 (2412MHz)**

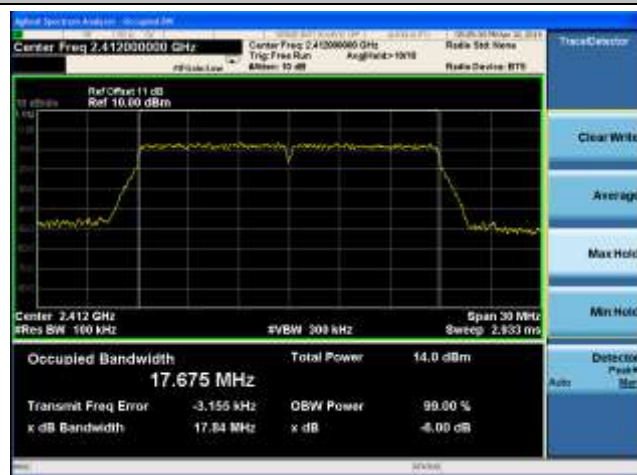

**Channel 06 (2437MHz)**

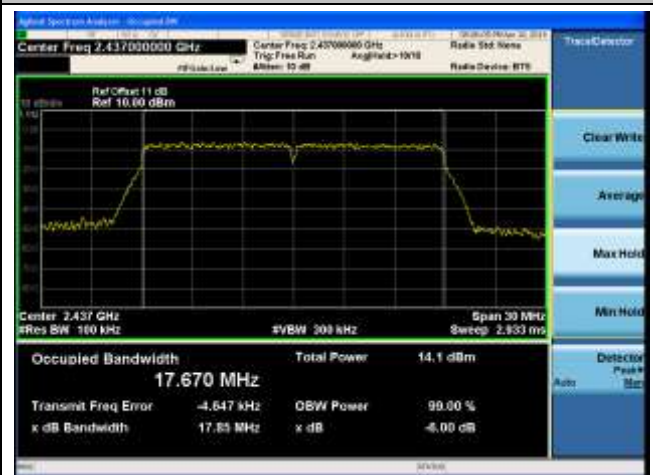


**Channel 11 (2462MHz)**





### 802.11n-HT40 6dB Bandwidth

**Channel 03 (2422MHz)**

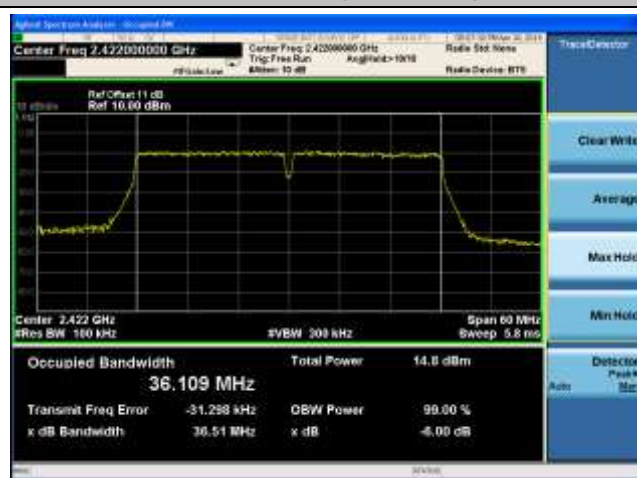

**Channel 06 (2437MHz)**

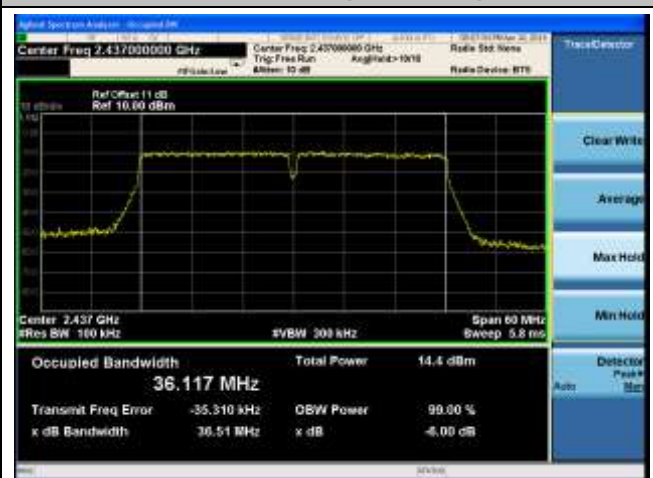

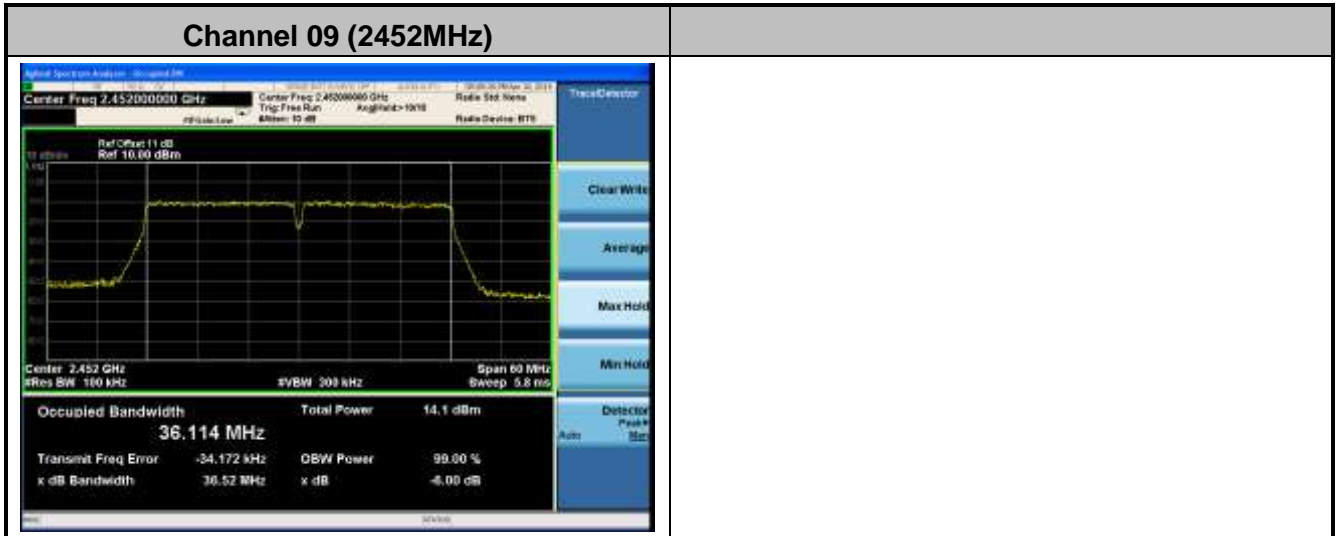

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

#### 7.3.2. Test Procedure Used


KDB 558074 D01v03r01 - Section 9.1.3 PKPM1 Peak Power Method (for signals with BW  $\leq$  50MHz)

#### 7.3.3. Test Setting

##### **Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### 7.3.4. Test Setup

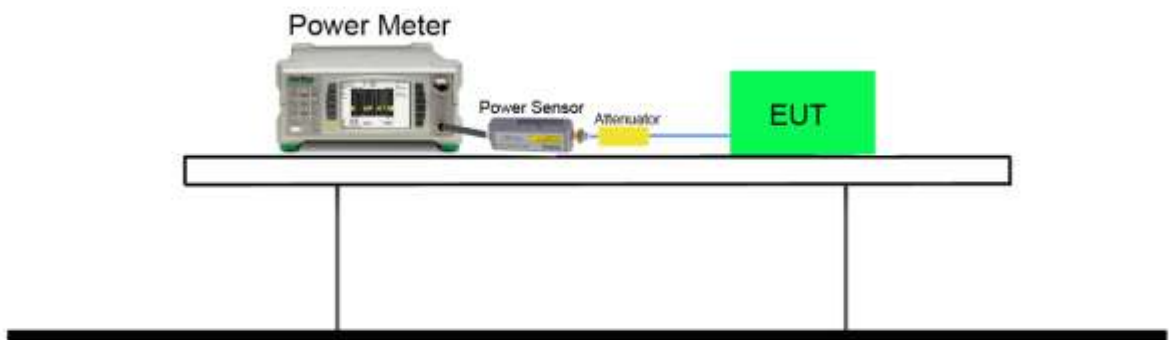

### 7.3.5. Test Result of Output Power

Output power at various data rates:

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak Power (dBm)
802.11b	20	6	2437	1	10.82
				5.5	10.66
				11	10.29
802.11g	20	6	2437	6	15.86
				24	15.65
				54	15.28
802.11n	20	6	2437	6.5/7.2(MCS0)	15.91
				39/43.3(MCS4)	15.74
				65/72.2(MCS7)	15.35
802.11n	40	6	2437	13.5/15(MCS0)	16.71
				81/90(MCS4)	16.48
				135/150(MCS7)	16.20

### Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
11b	1	1	2412	11.64	≤30	Pass
11b	1	6	2437	10.82	≤30	Pass
11b	1	11	2462	11.58	≤30	Pass
11g	6	1	2412	15.35	≤30	Pass
11g	6	6	2437	15.86	≤30	Pass
11g	6	11	2462	15.39	≤30	Pass
11n-HT20	6.5/7.2	1	2412	16.10	≤30	Pass
11n-HT20	6.5/7.2	6	2437	15.91	≤30	Pass
11n-HT20	6.5/7.2	11	2462	15.70	≤30	Pass
11n-HT40	13.5/15	3	2422	16.62	≤30	Pass
11n-HT40	13.5/15	6	2437	16.71	≤30	Pass
11n-HT40	13.5/15	9	2452	15.82	≤30	Pass

**Test Result of Average Output Power (Reporting Only)**

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	1	1	2412	9.66	≤30	Pass
11b	1	6	2437	8.57	≤30	Pass
11b	1	11	2462	9.23	≤30	Pass
11g	6	1	2412	8.45	≤30	Pass
11g	6	6	2437	9.16	≤30	Pass
11g	6	11	2462	8.85	≤30	Pass
11n-HT20	6.5/7.2	1	2412	9.36	≤30	Pass
11n-HT20	6.5/7.2	6	2437	8.93	≤30	Pass
11n-HT20	6.5/7.2	11	2462	8.87	≤30	Pass
11n-HT40	13.5/15	3	2422	9.13	≤30	Pass
11n-HT40	13.5/15	6	2437	9.26	≤30	Pass
11n-HT40	13.5/15	9	2452	8.56	≤30	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.


### 7.4.2. Test Procedure Used

KDB 558074 D01v03r01 - Section 10.2 Method PKPSD

### 7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


### 7.4.4. Test Setup

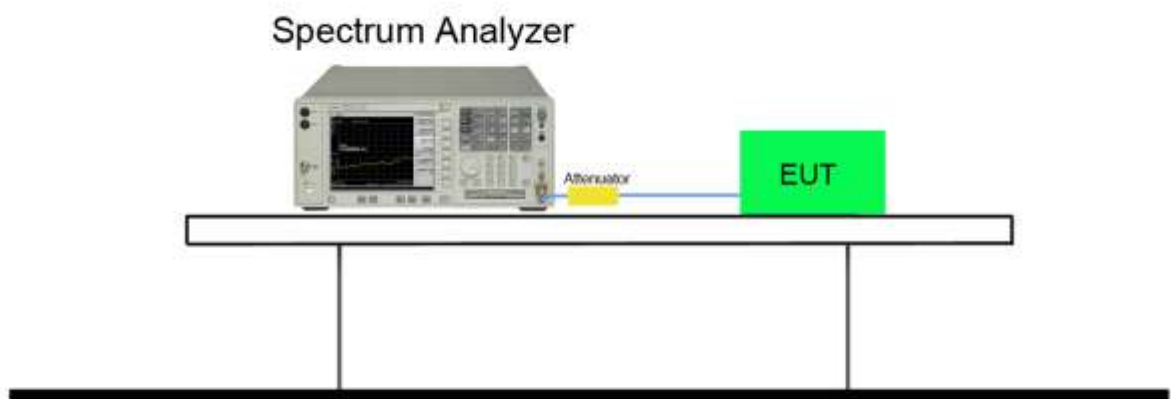




### 7.4.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm)	Limit (dBm / 3kHz)	Result
11b	1	1	2412	-18.55	≤8	Pass
11b	1	6	2437	-19.14	≤8	Pass
11b	1	11	2462	-18.82	≤8	Pass
11g	6	1	2412	-20.63	≤8	Pass
11g	6	6	2437	-21.38	≤8	Pass
11g	6	11	2462	-21.42	≤8	Pass
11n-HT20	6.5/7.2	1	2412	-19.98	≤8	Pass
11n-HT20	6.5/7.2	6	2437	-19.60	≤8	Pass
11n-HT20	6.5/7.2	11	2462	-20.81	≤8	Pass
11n-HT40	13.5/15	3	2422	-21.02	≤8	Pass
11n-HT40	13.5/15	6	2437	-21.06	≤8	Pass
11n-HT40	13.5/15	9	2452	-22.86	≤8	Pass

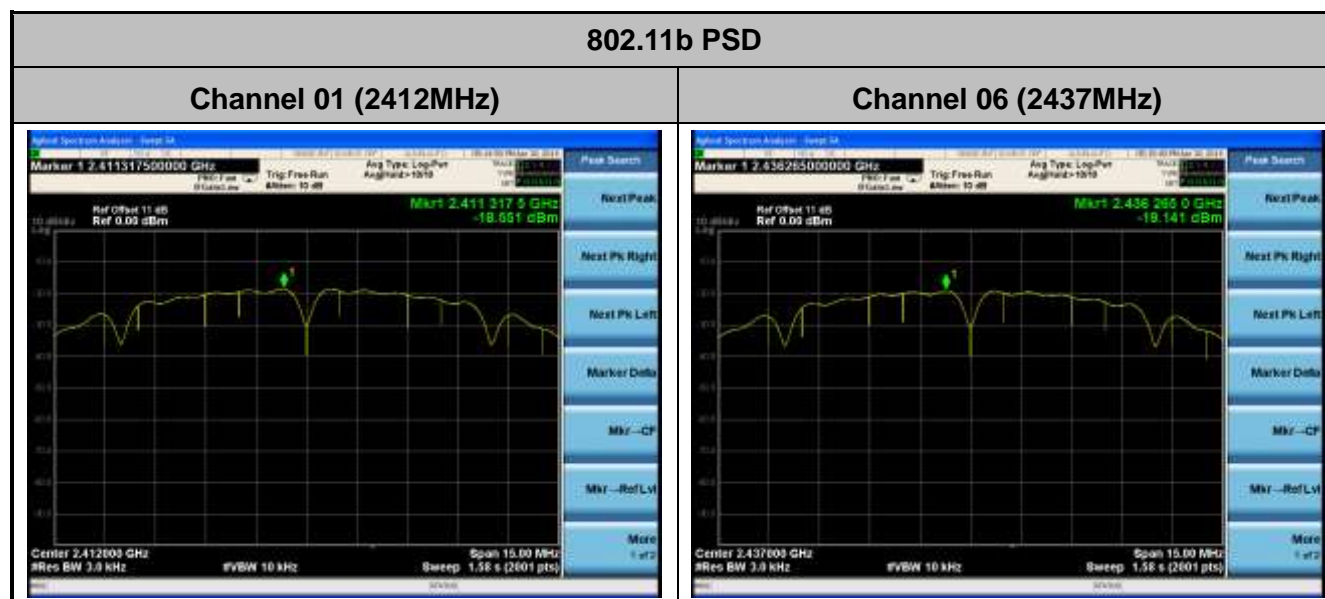



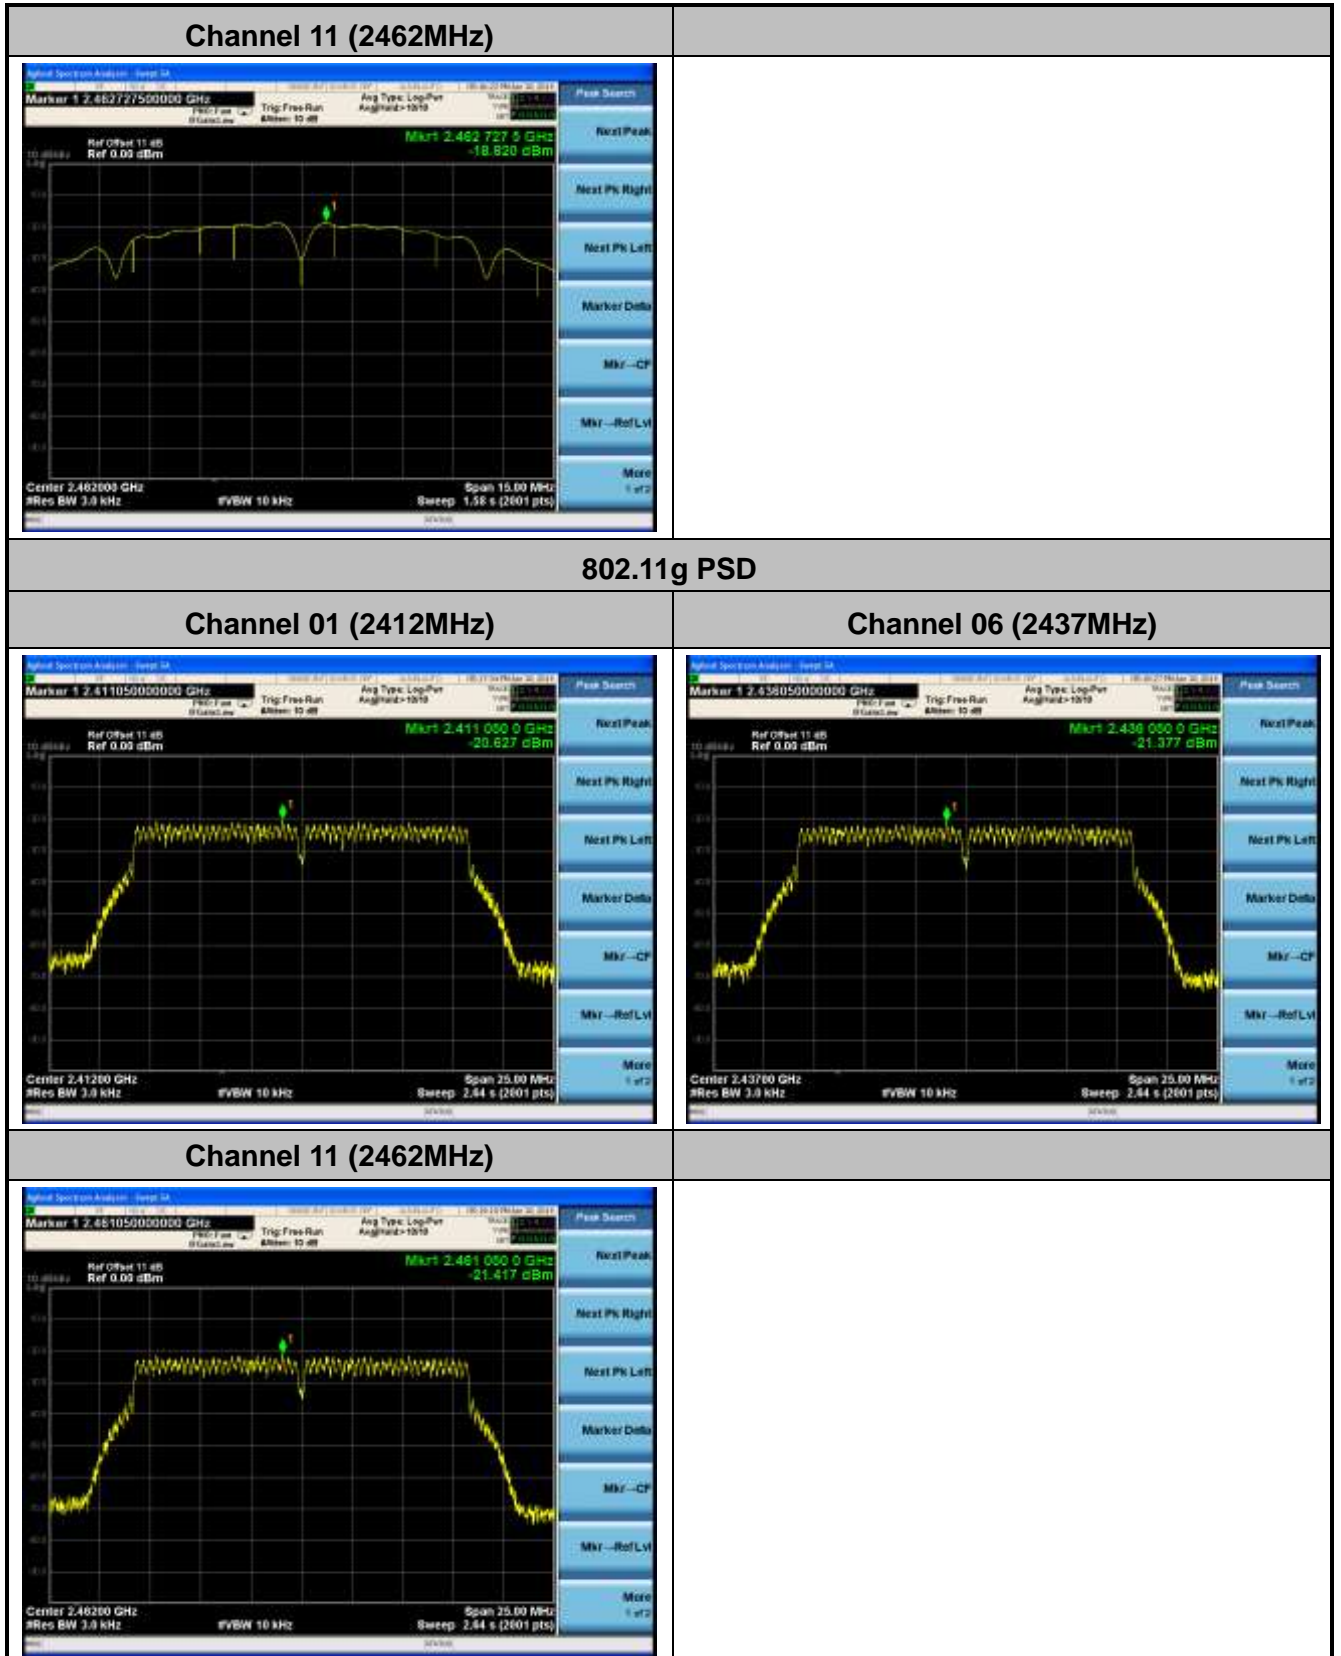


### 802.11n-HT20 PSD


Channel 01 (2412MHz)



Channel 06 (2437MHz)

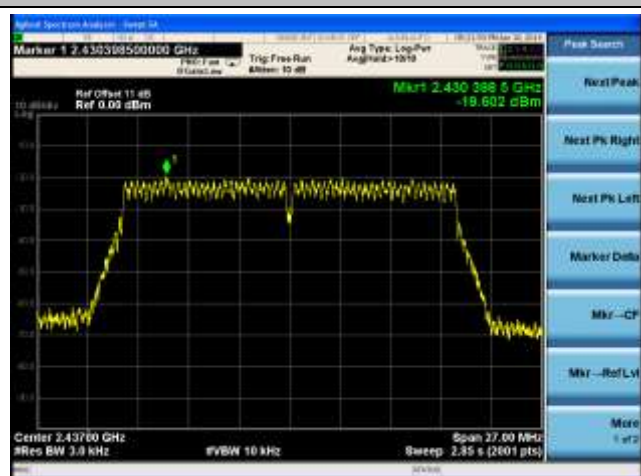


Channel 11 (2462MHz)

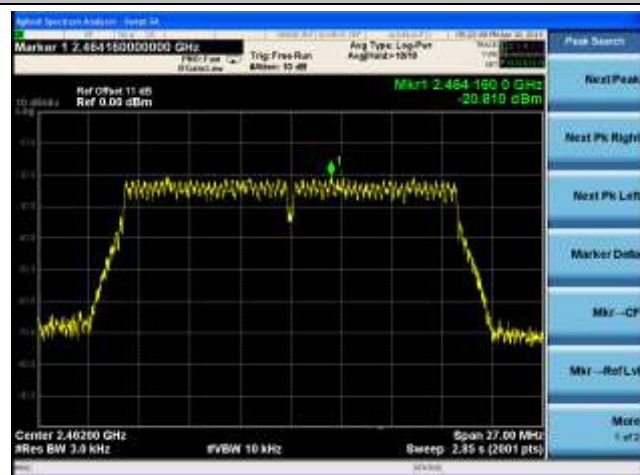



### 802.11n-HT40 PSD

Channel 03 (2422MHz)

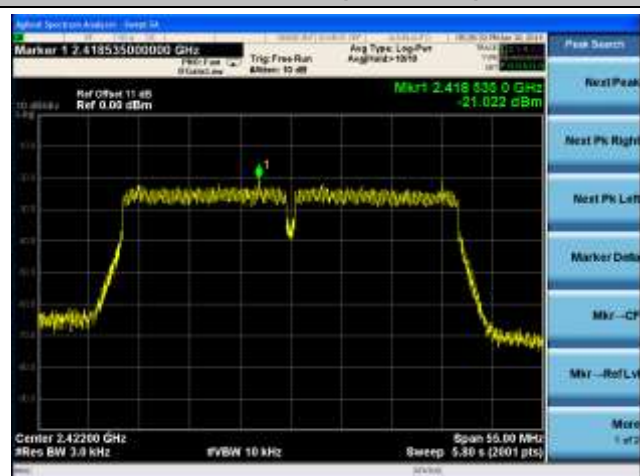

Channel 06 (2437MHz)

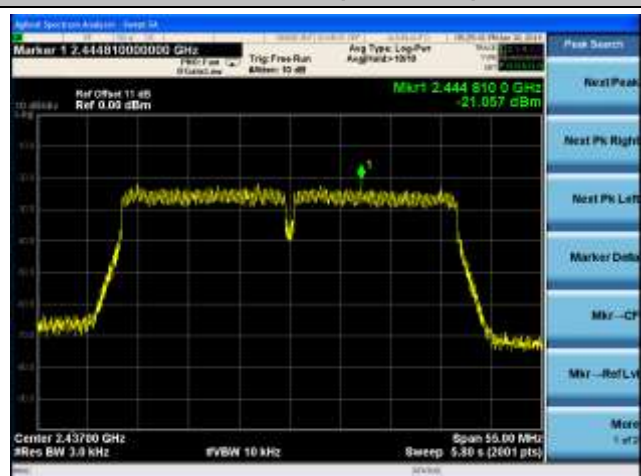

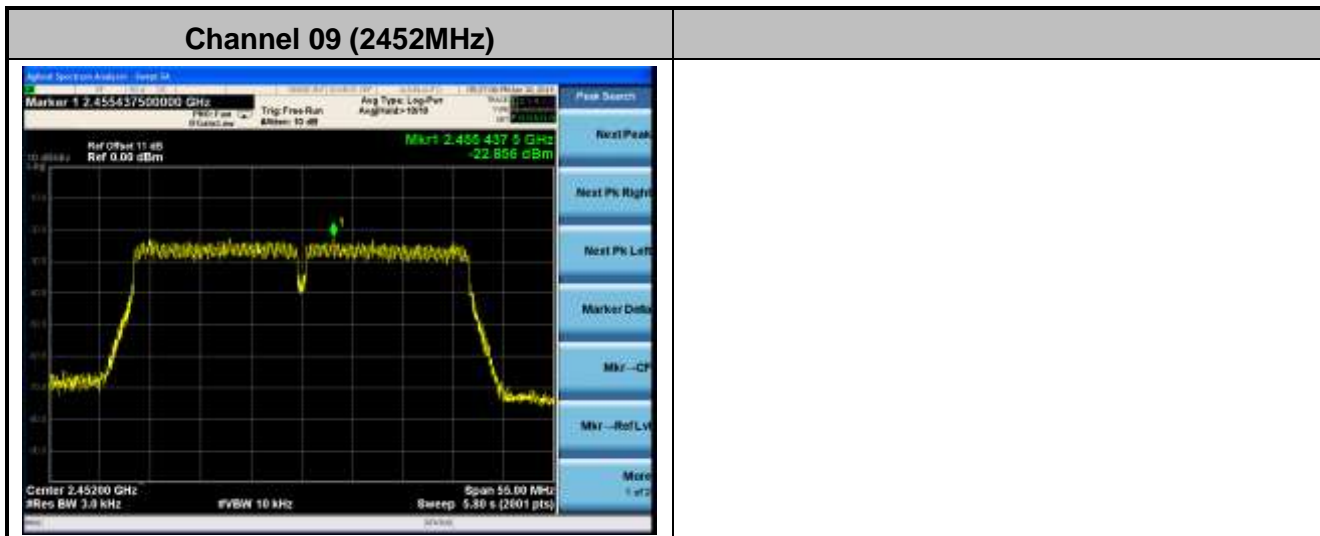

## 7.5. Conducted Band Edge and Out-of-Band Emissions

### 7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).


### 7.5.2. Test Procedure Used

KDB 558074 D01v03r01 – Section 11.3

### 7.5.3. Test Setting


1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
6. Trace mode = max hold
7. Sweep time = auto couple
8. The trace was allowed to stabilize

### 7.5.4. Test Setup

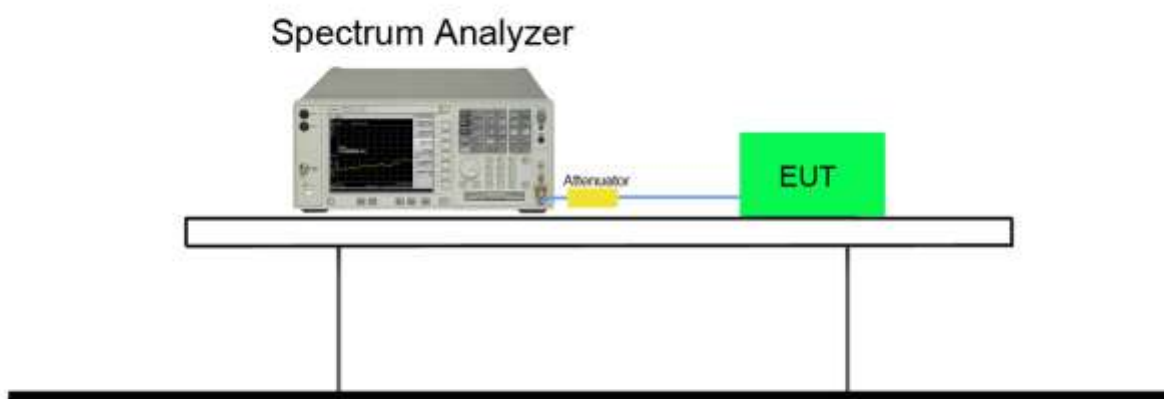


### 7.5.5. Test Result

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1Mbps	01	2412	20dBc	Pass
802.11b	1Mbps	06	2437	20dBc	Pass
802.11b	1Mbps	11	2462	20dBc	Pass
802.11g	6Mbps	01	2412	20dBc	Pass
802.11g	6Mbps	06	2437	20dBc	Pass
802.11g	6Mbps	11	2462	20dBc	Pass
802.11n-HT20	6.5/7.2Mbps	01	2412	20dBc	Pass
802.11n-HT20	6.5/7.2Mbps	06	2437	20dBc	Pass
802.11n-HT20	6.5/7.2Mbps	11	2462	20dBc	Pass
802.11n-HT40	13.5/15Mbps	03	2422	20dBc	Pass
802.11n-HT40	13.5/15Mbps	06	2437	20dBc	Pass
802.11n-HT40	13.5/15Mbps	09	2452	20dBc	Pass

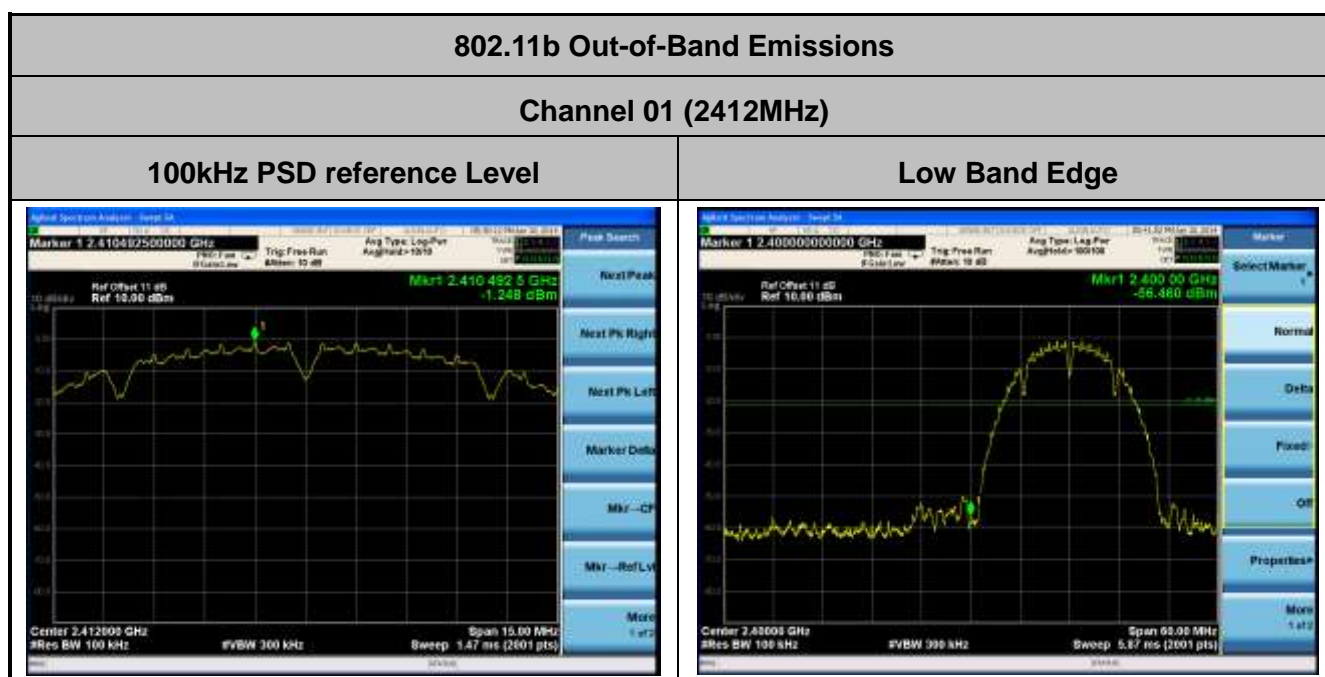



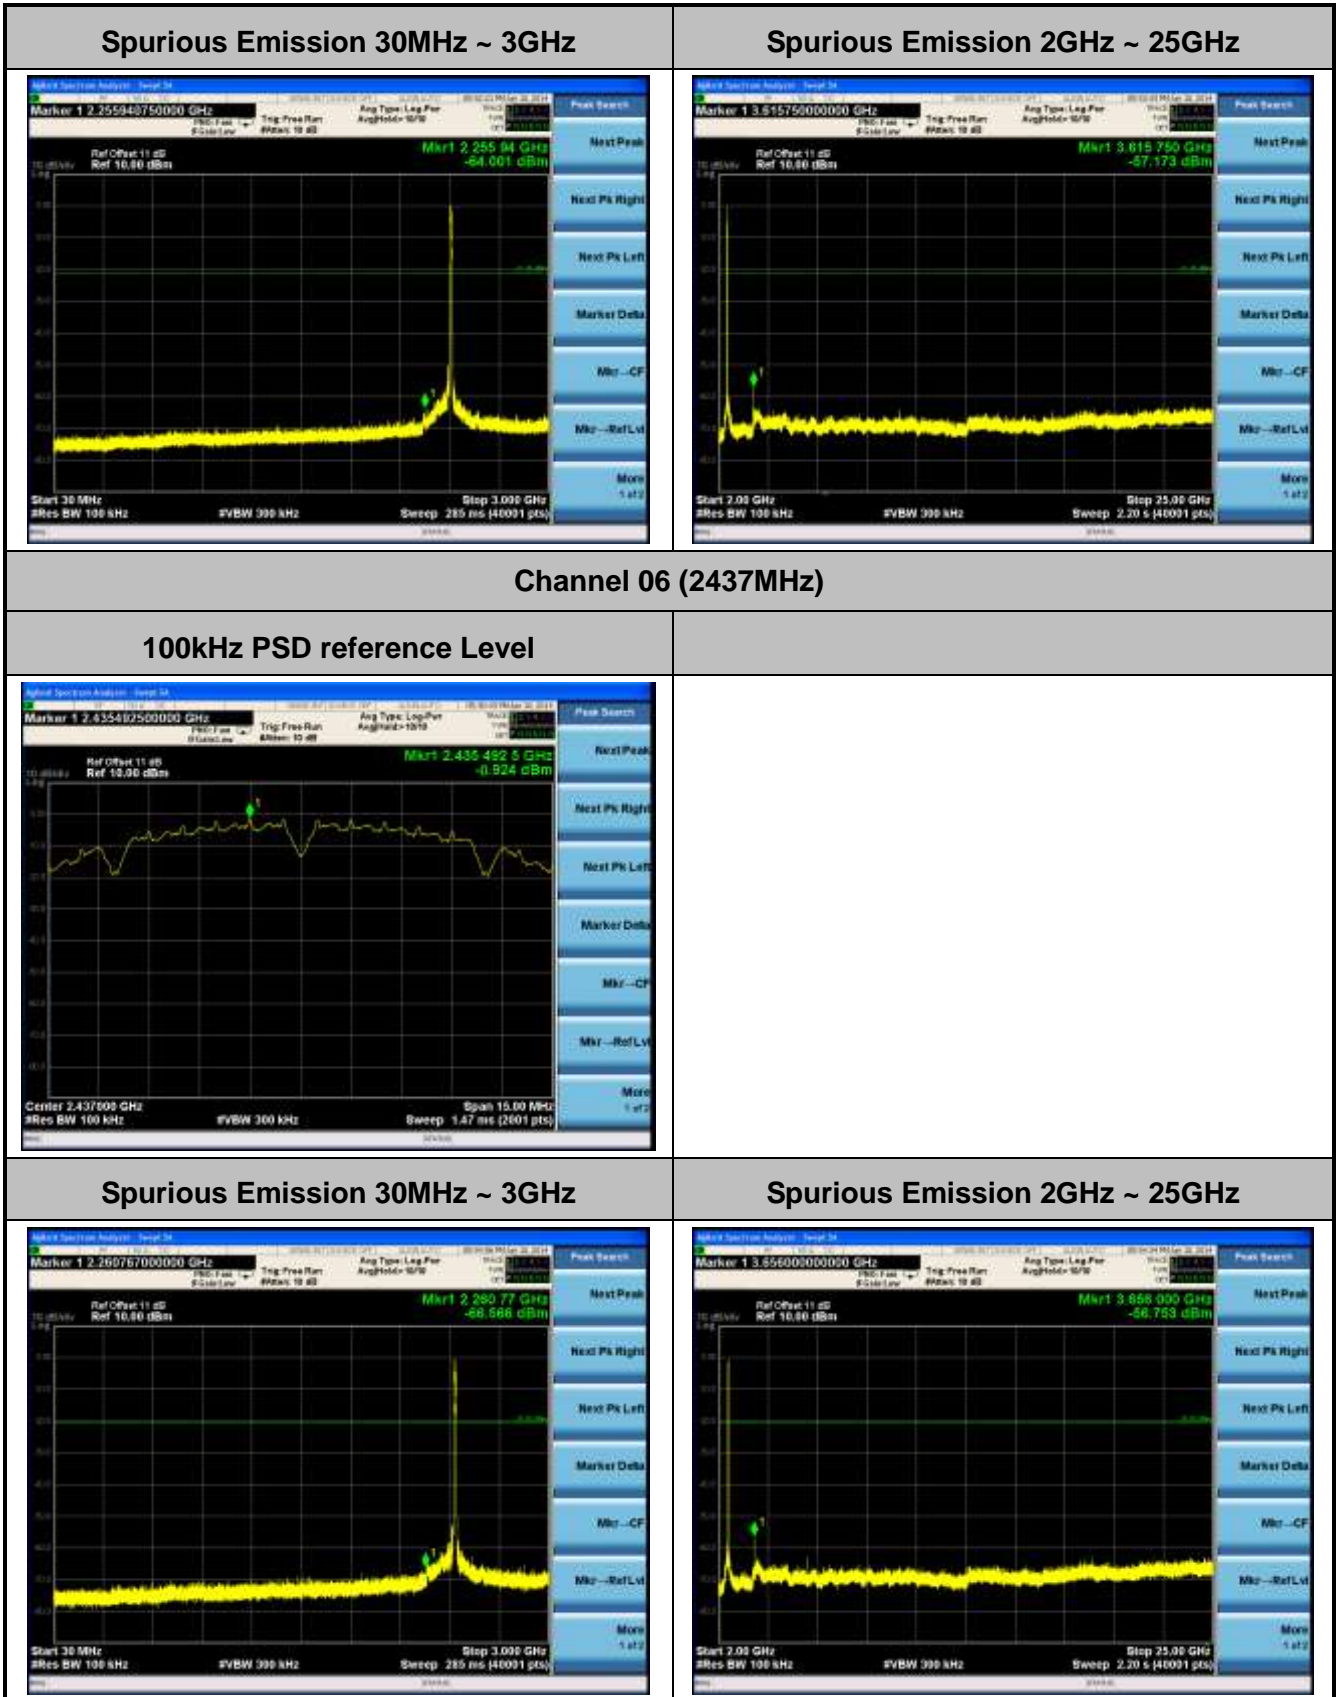


Channel 11 (2462MHz)


100kHz PSD reference Level




High Band Edge

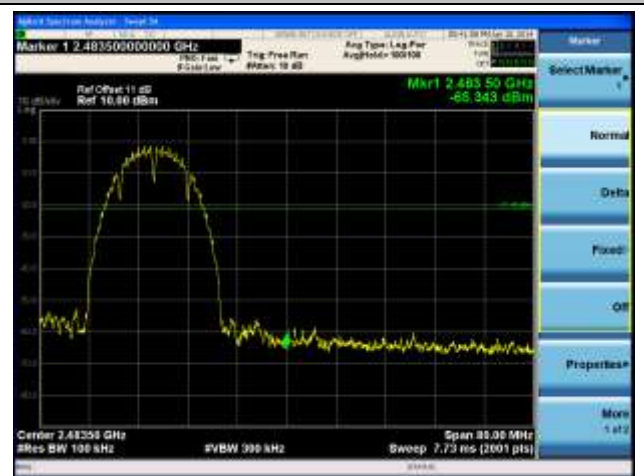

Spurious Emission 30MHz ~ 3GHz

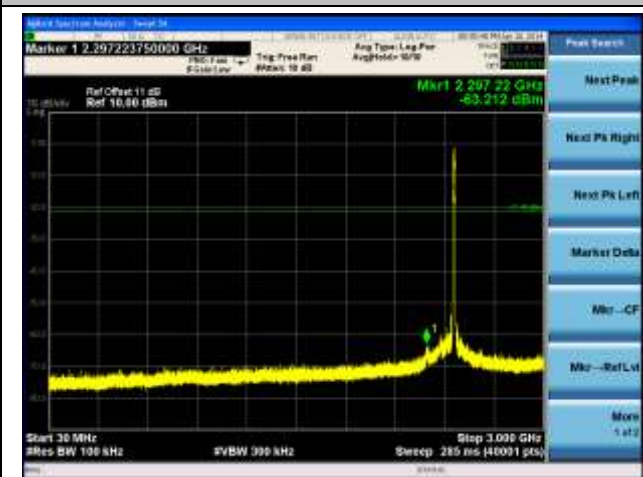

Spurious Emission 2GHz ~ 25GHz

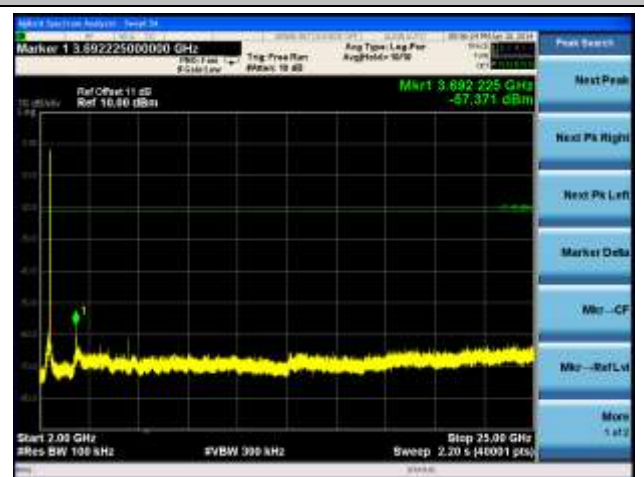


### 802.11g Out-of-Band Emissions

#### Channel 01 (2412MHz)


##### 100kHz PSD reference Level



##### Low Band Edge

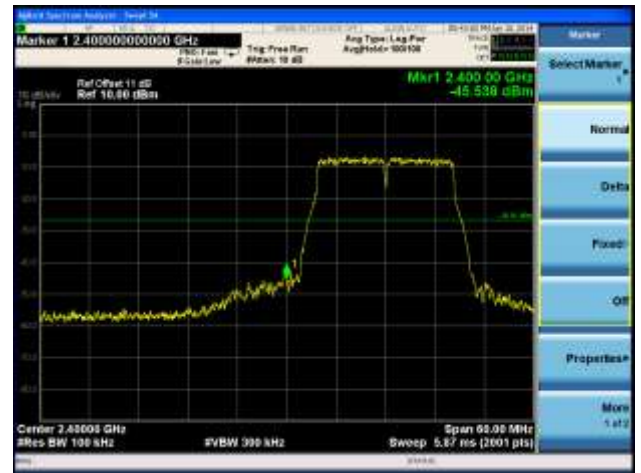

##### Spurious Emission 30MHz ~ 3GHz

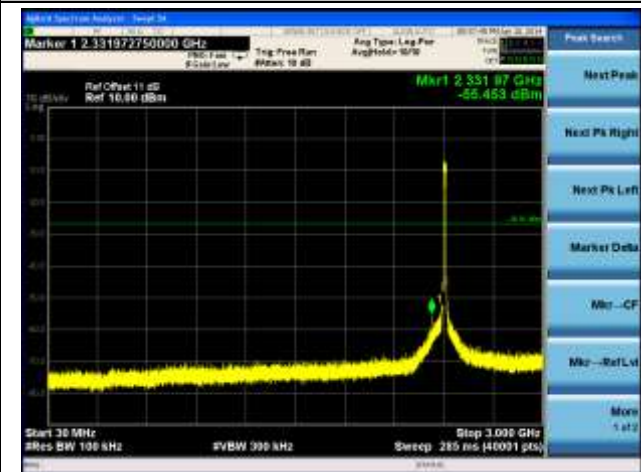

##### Spurious Emission 2GHz ~ 25GHz




#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level





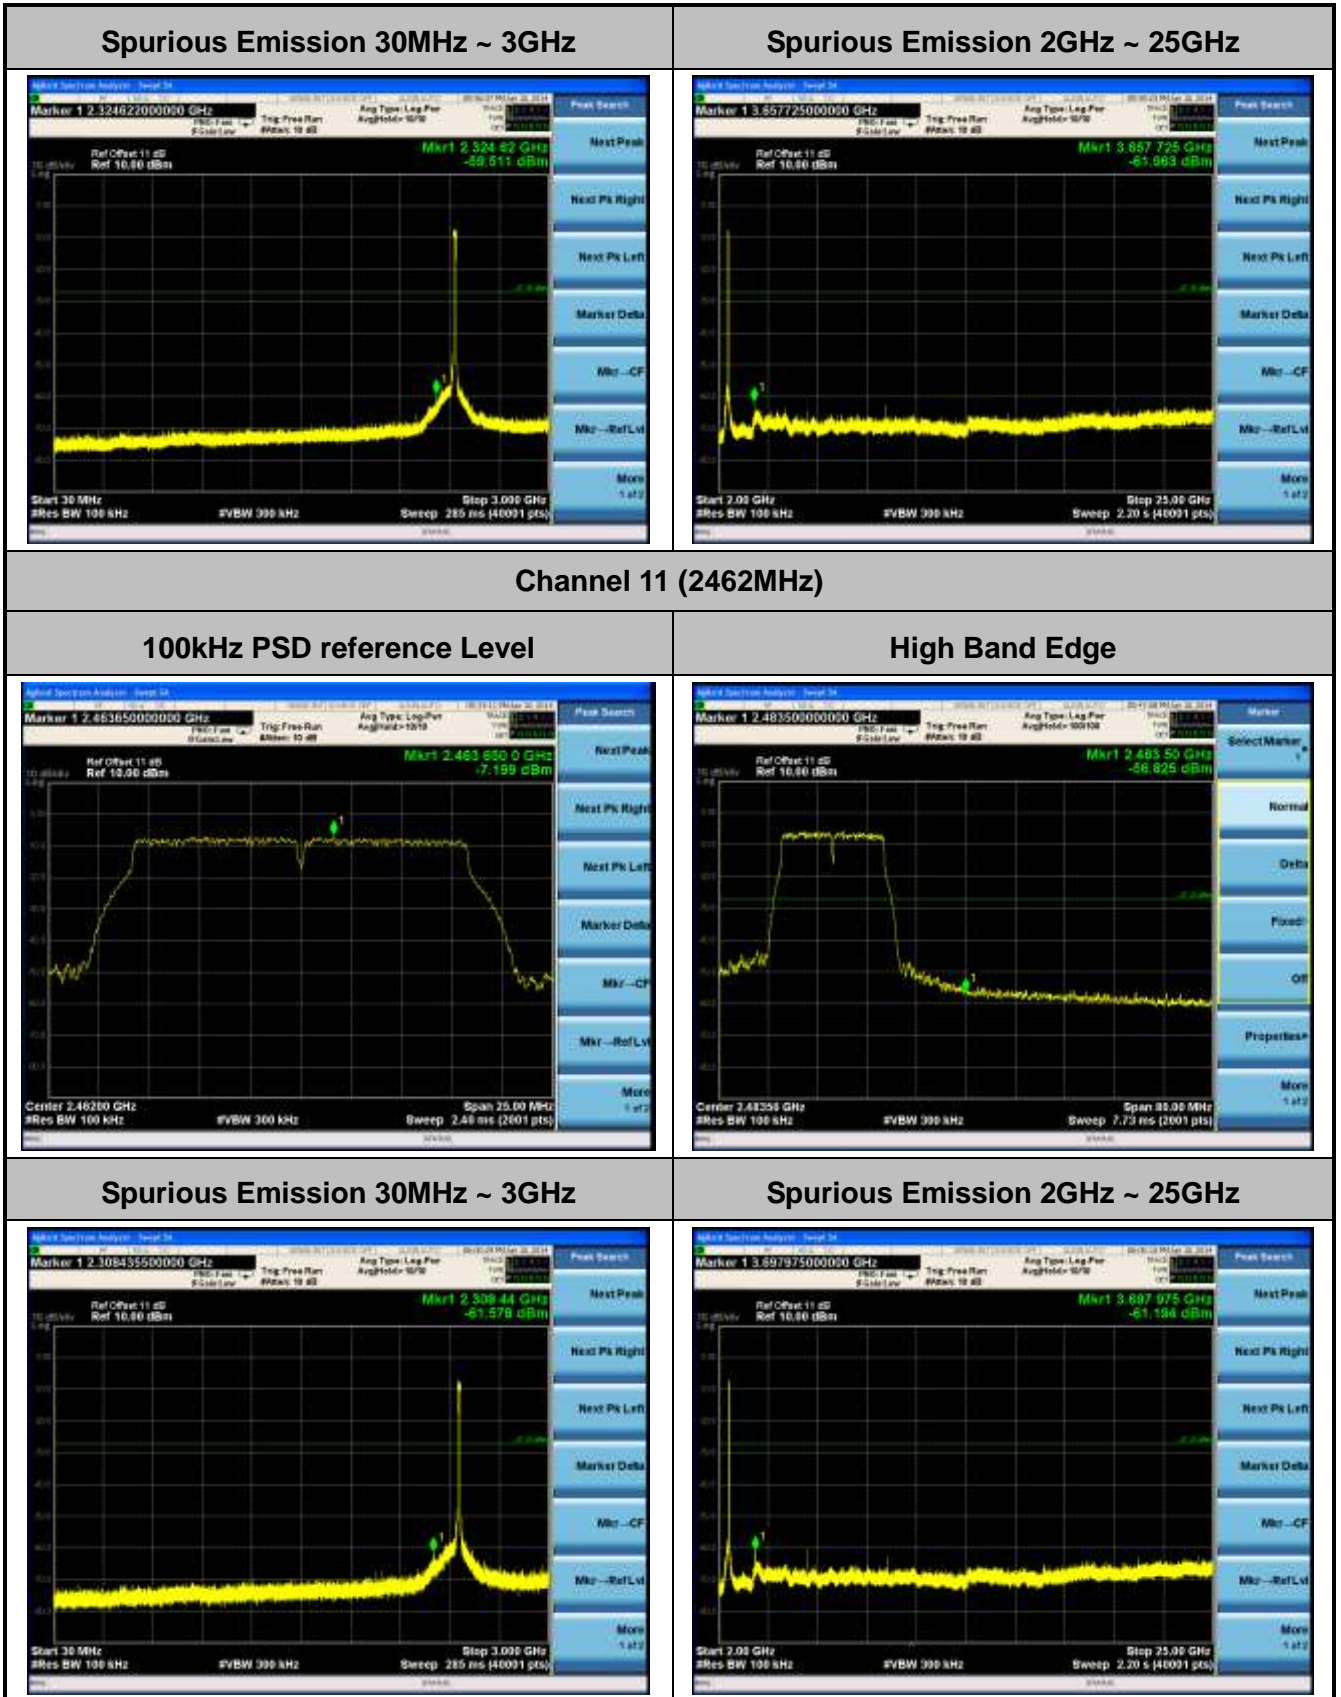


### 802.11n-HT20 Out-of-Band Emissions

#### Channel 01 (2412MHz)


##### 100kHz PSD reference Level




##### Low Band Edge

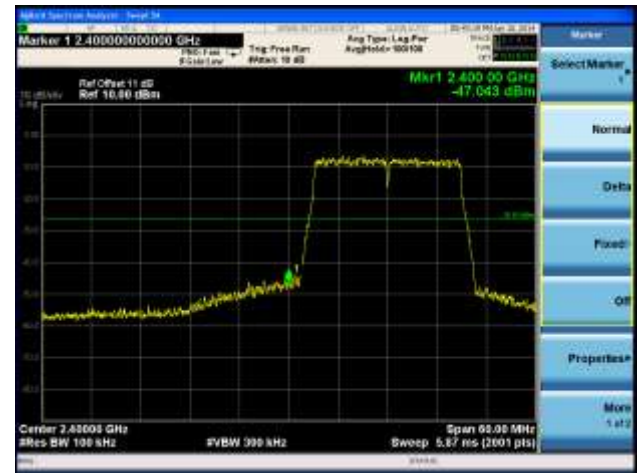

##### Spurious Emission 30MHz ~ 3GHz

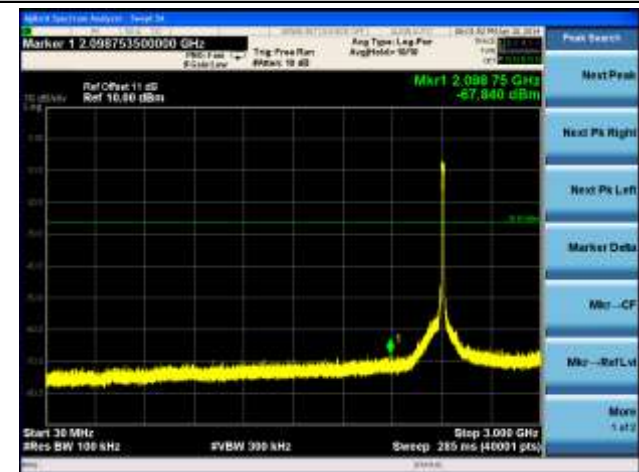


##### Spurious Emission 2GHz ~ 25GHz

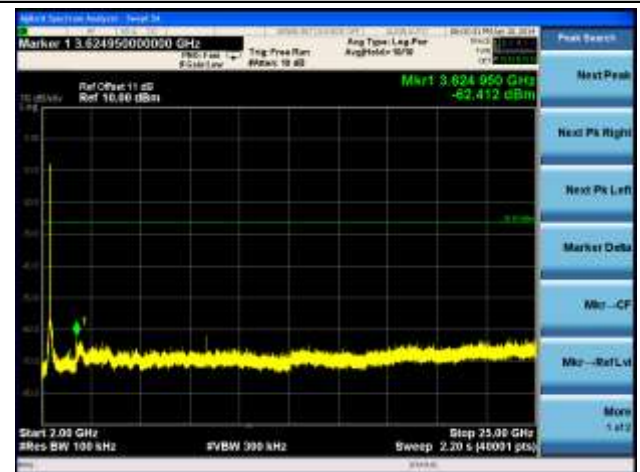

#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level



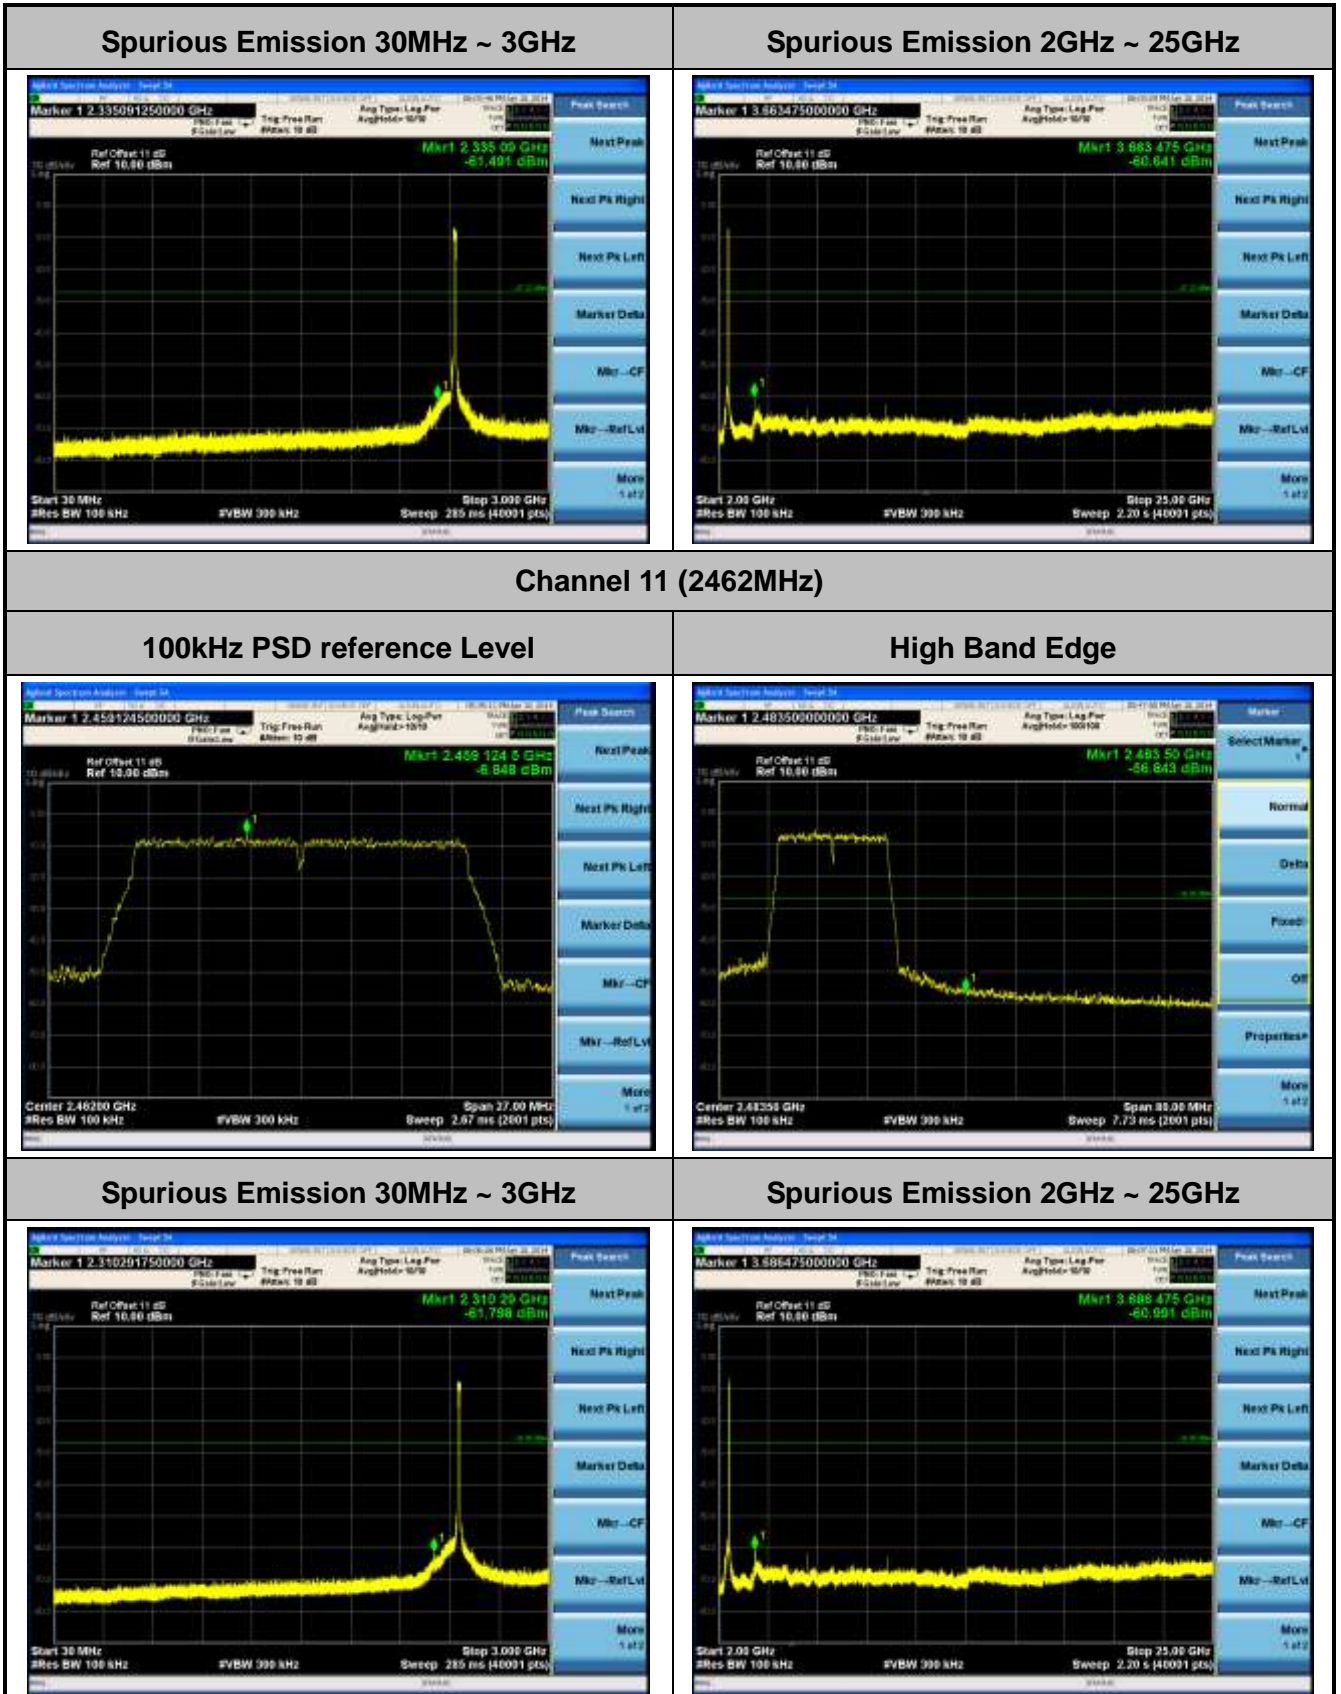





### 802.11n-HT40 Out-of-Band Emissions

#### Channel 03 (2422MHz)


##### 100kHz PSD reference Level

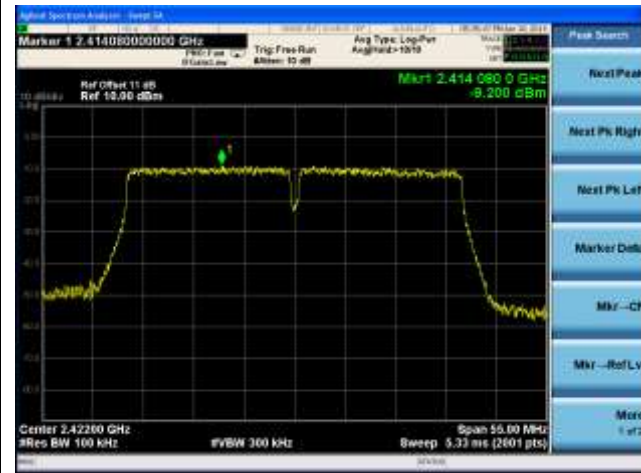

##### Low Band Edge

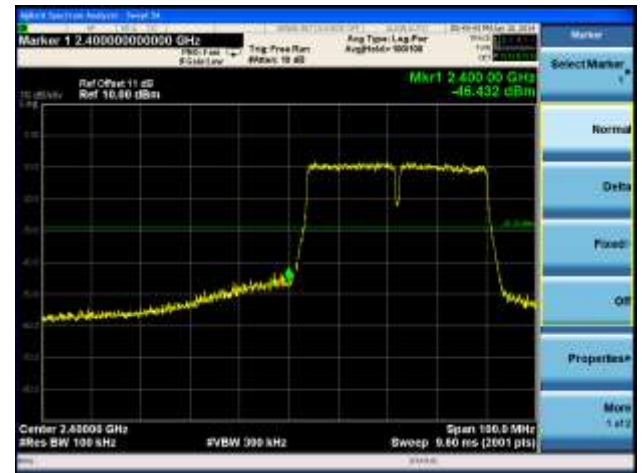

##### Spurious Emission 30MHz ~ 3GHz

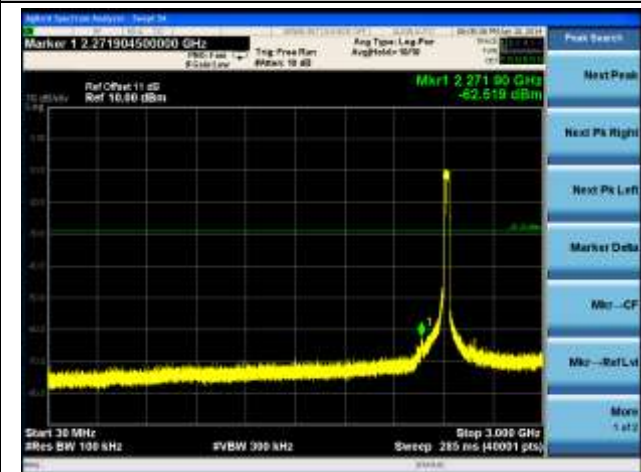



##### Spurious Emission 2GHz ~ 25GHz



#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level

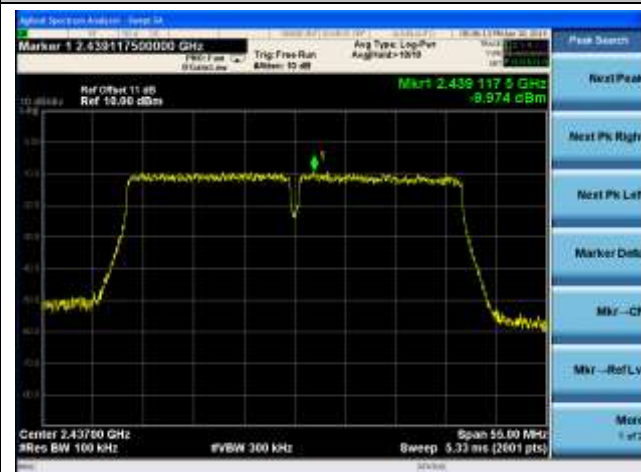

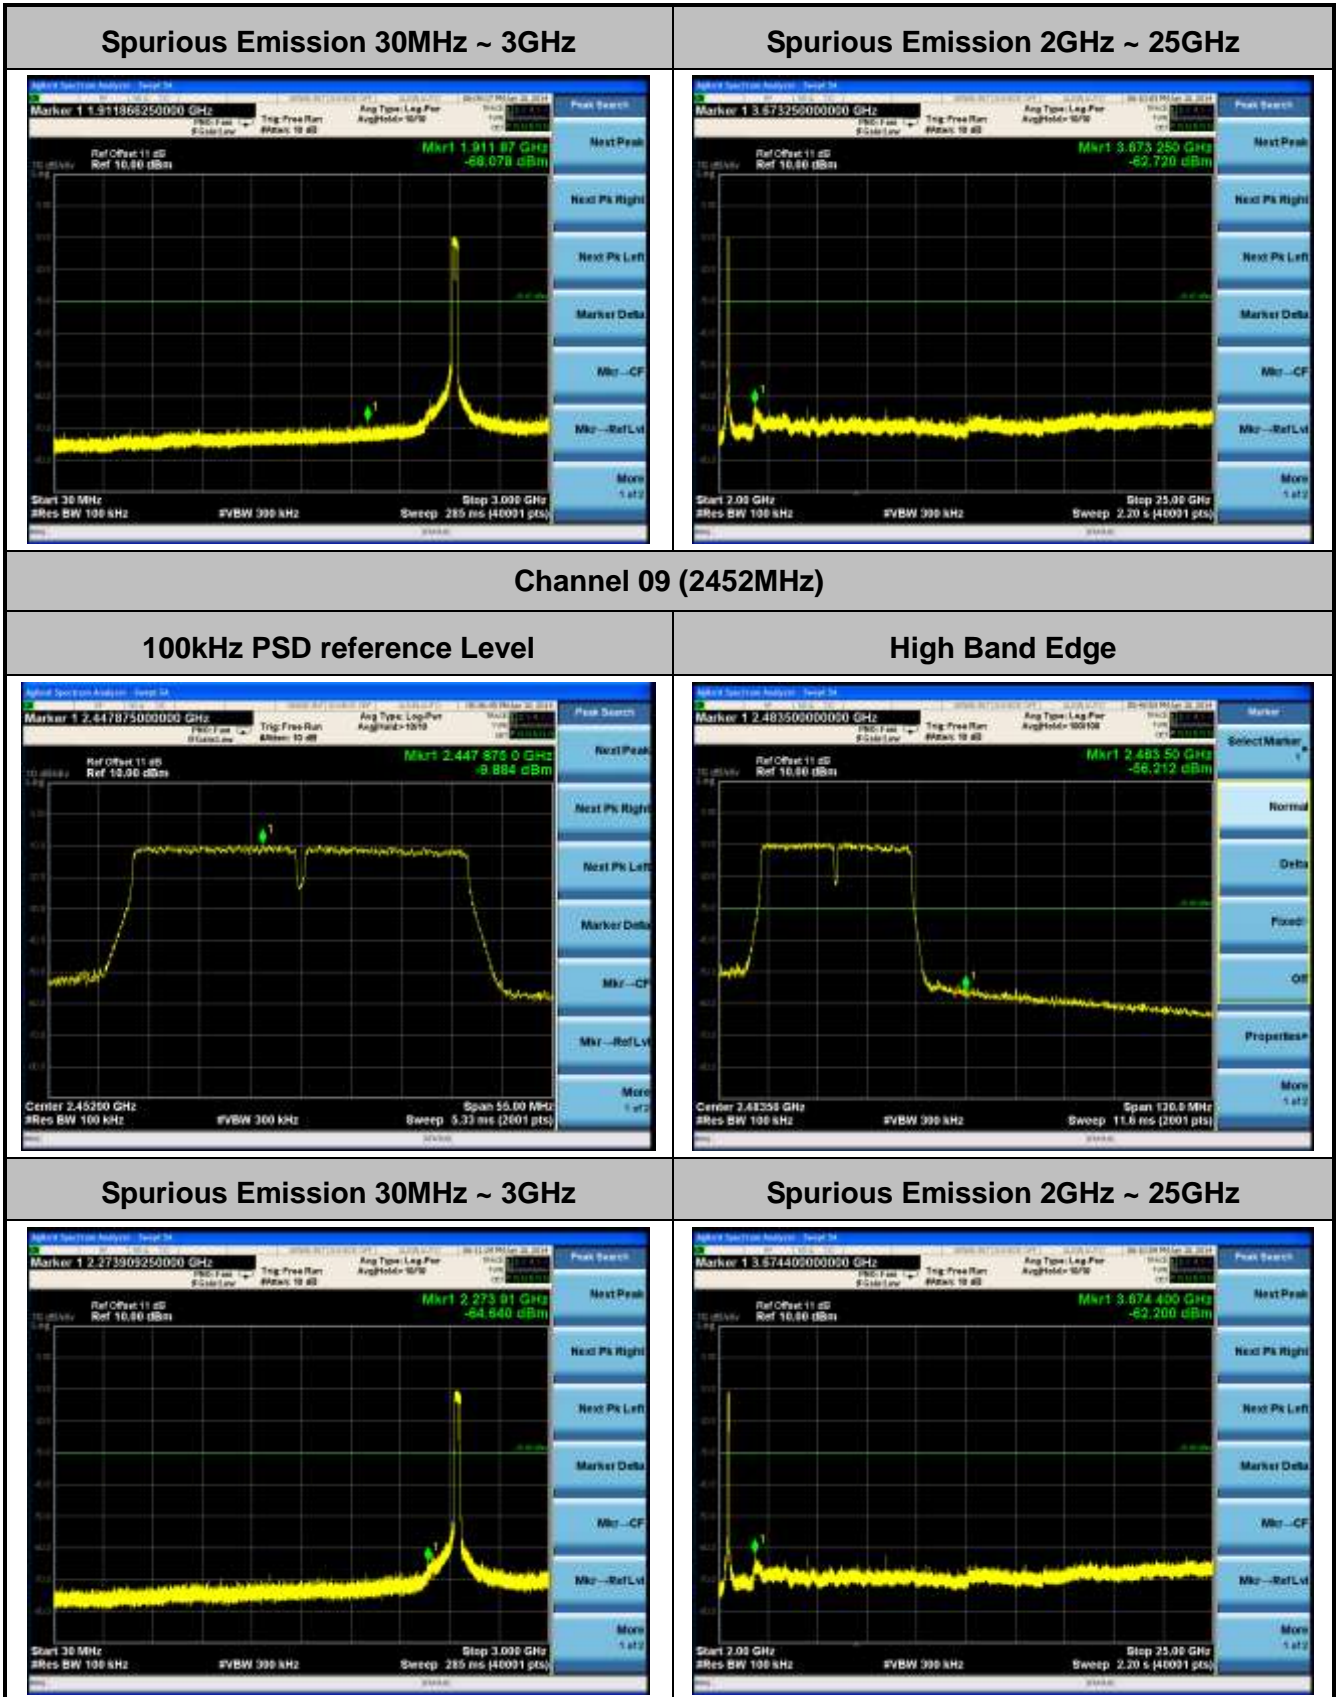

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

KDB 558074 D01v03r01 – Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r01 – Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r01 – Section 12.2.5 (average power measurements)



### 7.6.3. Test Setting

#### Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r01


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 D01v03r01**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $> 2 \times \text{span}/\text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

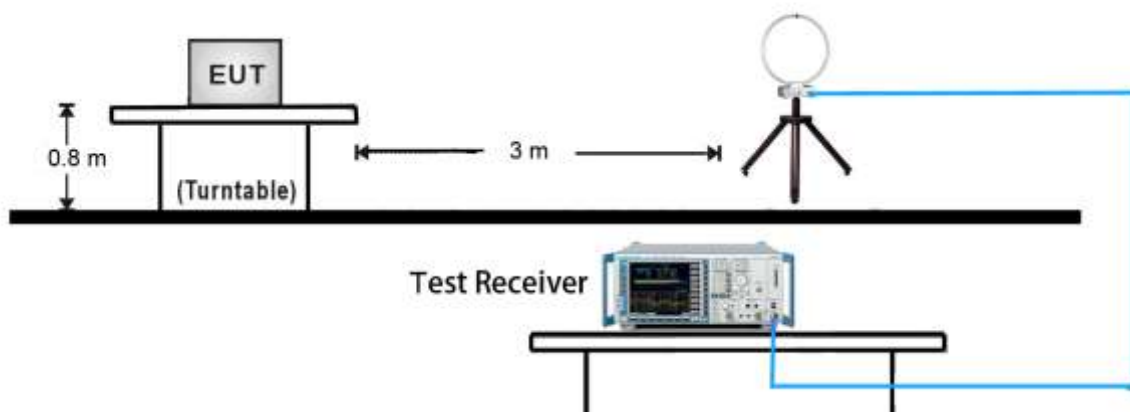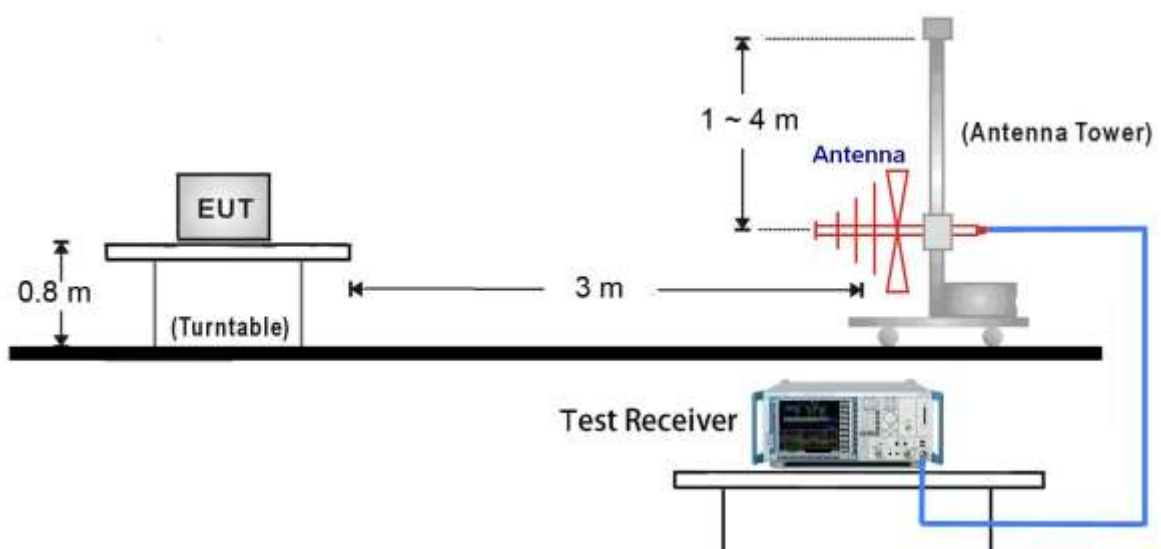**7.6.4. Test Setup****9kHz ~ 30MHz Test Setup:****30MHz ~ 1GHz Test Setup:**

1GHz ~ 25GHz Test Setup:

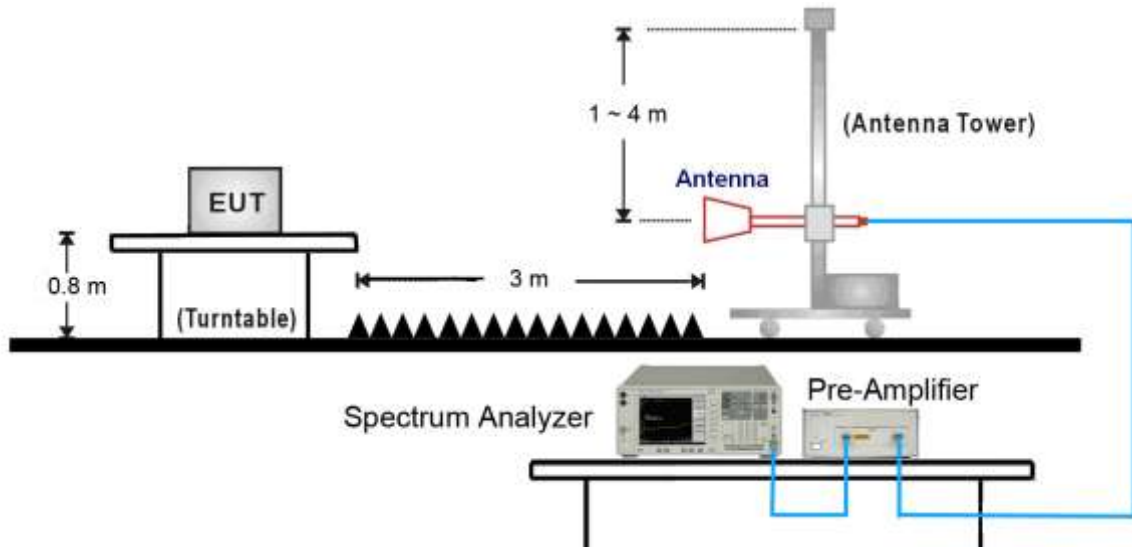



### 7.6.5. Test Result


Test Mode:	802.11g	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. <b>The worst case of Radiated Spurious Emission.</b> 3. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V/m)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
*	3281.4	36.32	3.27	39.59	74.5	-34.91	Peak	Horizontal
*	4409.7	35.53	5.51	41.04	74.5	-33.46	Peak	Horizontal
	4824.0	36.37	6.41	42.78	74.0	-31.22	Peak	Horizontal
	7742.4	34.30	14.69	48.99	74.0	-25.01	Peak	Horizontal
*	3288.7	34.98	3.24	38.22	74.5	-36.28	Peak	Vertical
*	4411.0	35.48	5.51	40.99	74.5	-33.51	Peak	Vertical
	4824.0	36.00	6.41	42.41	74.0	-31.59	Peak	Vertical
	7303.7	34.61	13.98	48.59	74.0	-25.41	Peak	Vertical

Note: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.5dB $\mu$ V/m).


**The worst case of Radiated Emission below 1GHz:**

Engineer: Milo Li	
Site: AC1	Time: 2014/04/11 - 10:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11g Channel 2462MHz</b>	

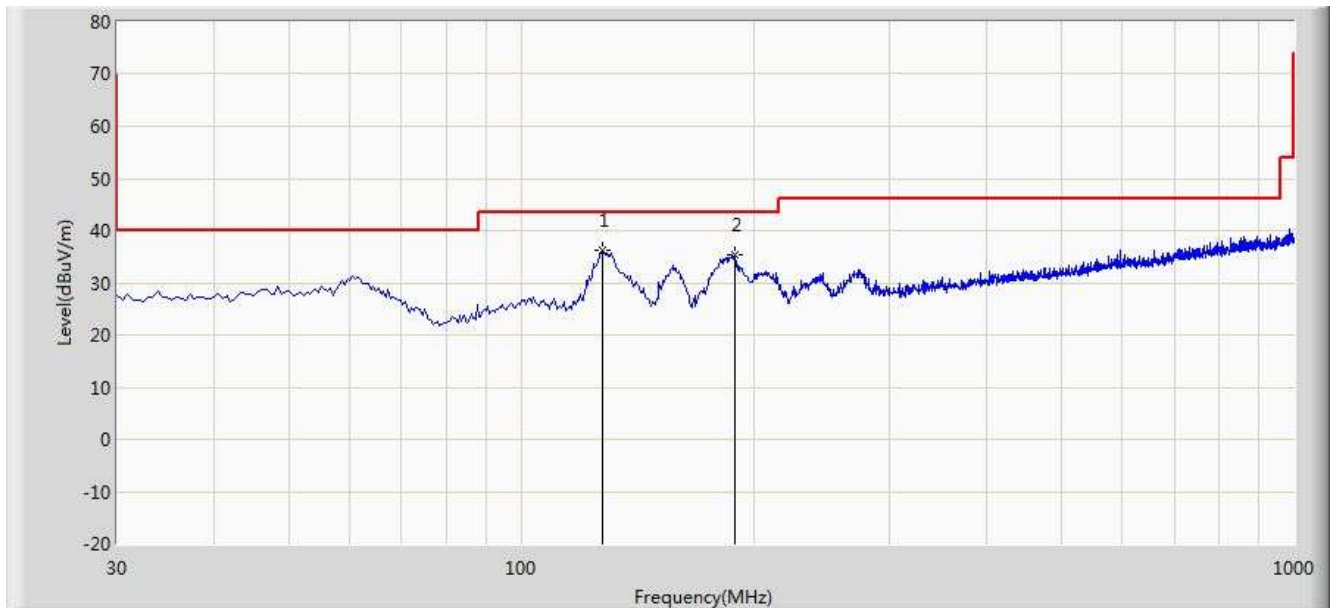


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	127.485	36.284	26.273	-7.216	43.500	10.011	PK
2			189.080	35.261	23.871	-8.239	43.500	11.390	PK

Engineer: Milo Li	
Site: AC1	Time: 2014/04/11 - 10:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11g Channel 2462MHz</b>	

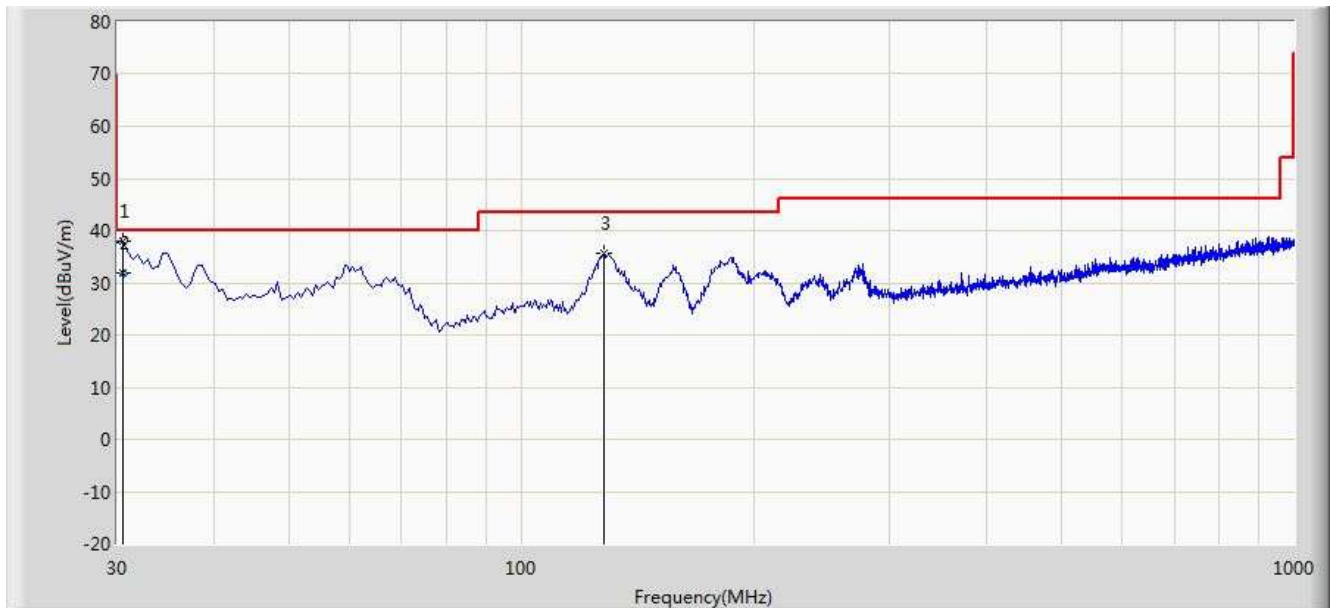


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	30.485	37.881	25.892	-2.119	40.000	11.989	PK
2			30.501	31.802	19.810	-8.198	40.000	11.992	QP
3			127.970	35.786	25.817	-7.714	43.500	9.969	PK

Engineer: Roy Cheng	
Site: AC1	Time: 2014/04/11 - 16:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

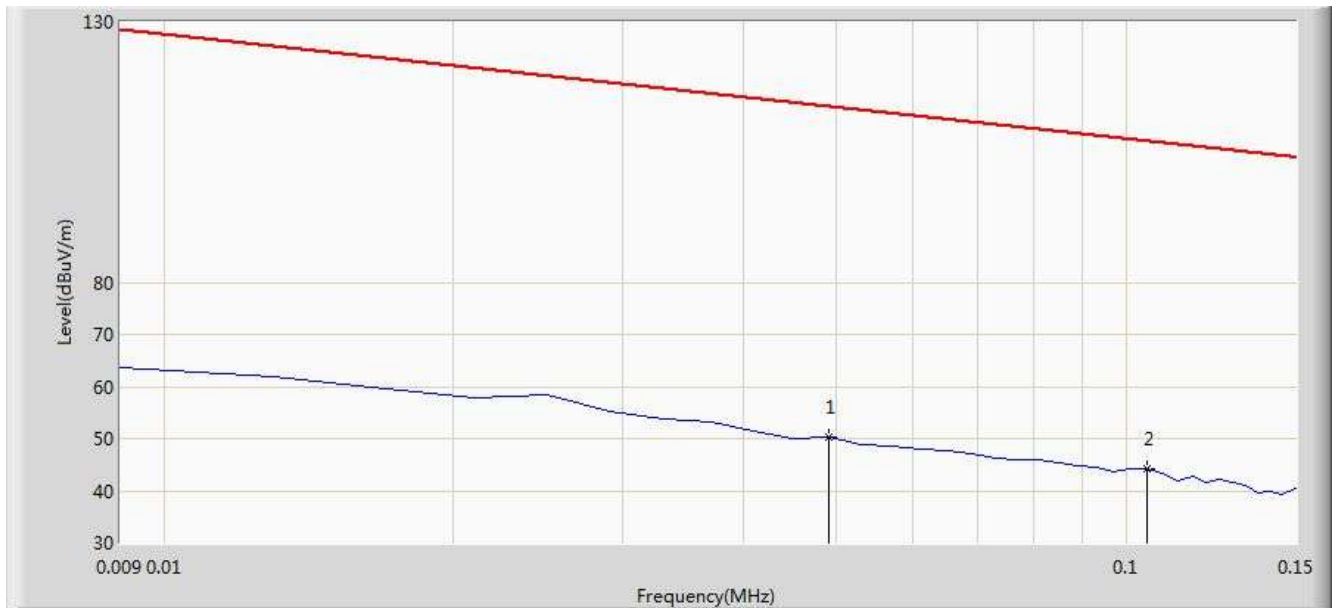


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			0.049	50.367	29.861	-63.422	113.789	20.505	PK
2		*	0.105	44.143	23.996	-63.029	107.173	20.147	PK

Engineer: Roy Cheng	
Site: AC1	Time: 2014/04/11 - 16:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 9kHz~30MHz.</b>	

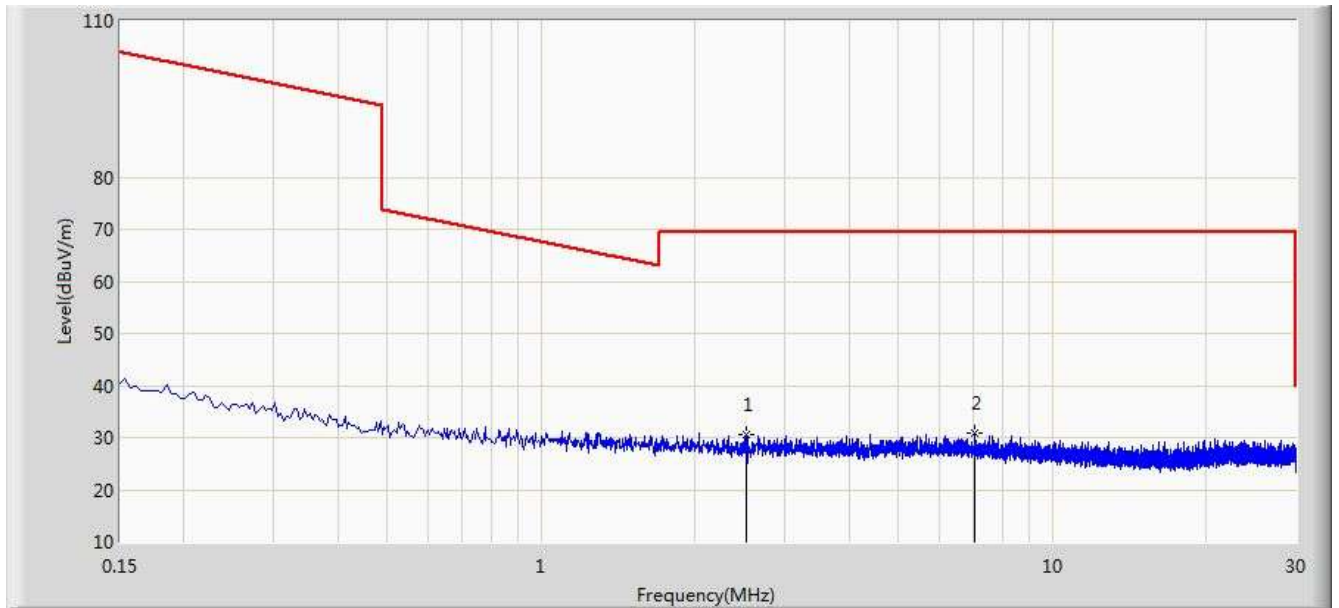


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2.513	30.495	10.336	-39.005	69.500	20.159	PK
2		*	7.041	30.974	10.579	-38.526	69.500	20.395	PK

Engineer: Roy Cheng	
Site: AC1	Time: 2014/04/11 - 17:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 18 ~ 25GHz.</b>	

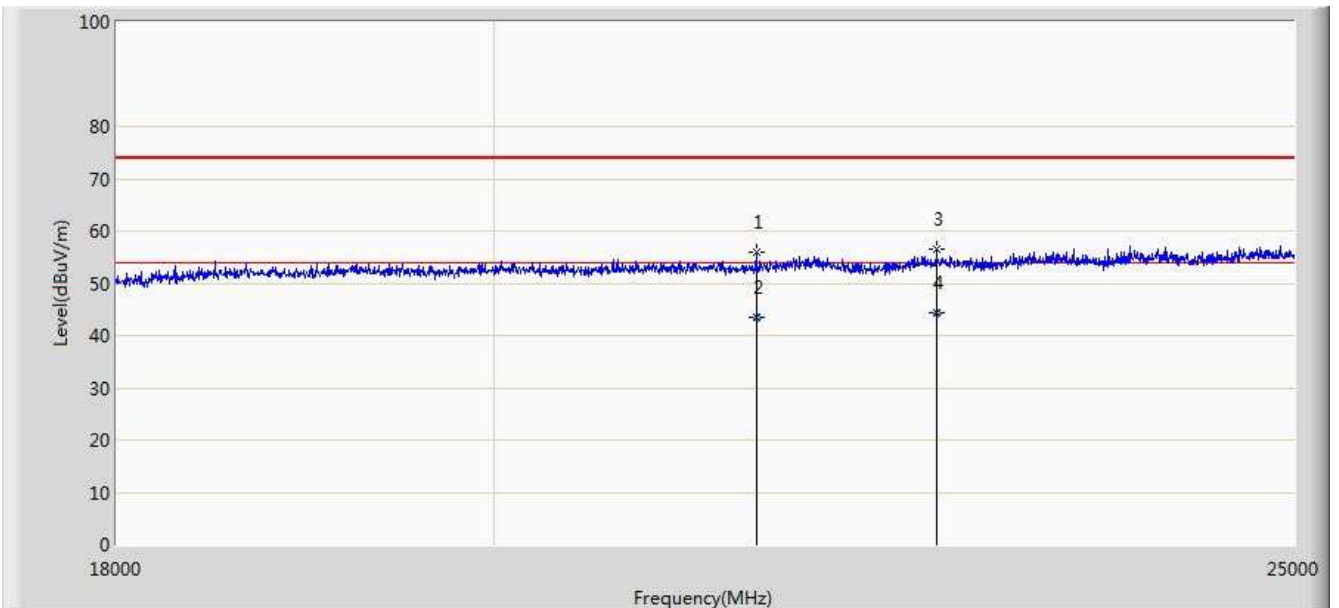

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			21517.500	55.869	17.883	-18.131	74.000	37.986	PK
2			21517.650	43.351	5.365	-10.649	54.000	37.986	AV
3			22630.500	56.509	18.223	-17.491	74.000	38.286	PK
4		*	22630.540	44.310	6.024	-9.690	54.000	38.286	AV

Engineer: Roy Cheng	
Site: AC1	Time: 2014/04/11 - 17:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Note: There is the ambient noise within frequency range 18 ~ 25GHz.</b>	

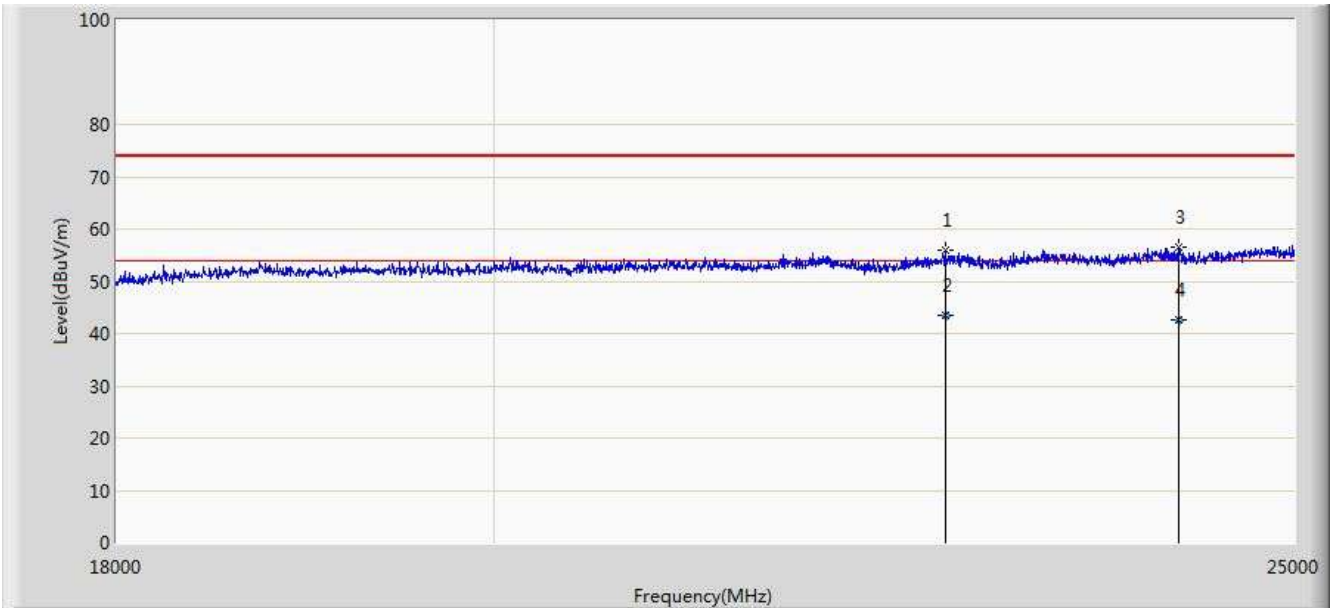

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			22686.500	55.811	17.457	-18.189	74.000	38.354	PK
2		*	22686.540	43.598	5.244	-10.402	54.000	38.354	AV
3			24205.500	56.430	17.607	-17.570	74.000	38.823	PK
4			24205.658	42.518	3.695	-11.482	54.000	38.823	AV

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result


Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 Channel 2412MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	64.341	33.657	-9.659	74.000	30.684	PK
2		*	2405.368	91.282	60.626	N/A	N/A	30.655	PK




Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 Channel 2412MHz	

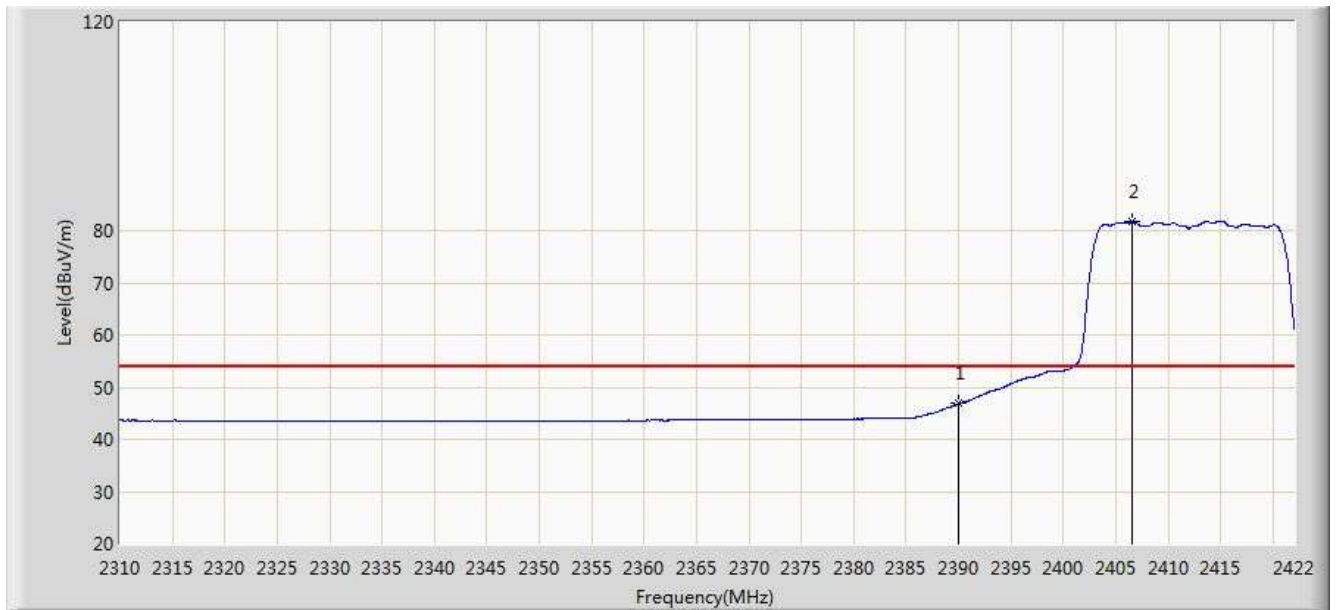


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	46.850	16.166	-7.150	54.000	30.684	AV
2		*	2406.544	81.651	50.997	N/A	N/A	30.653	AV

Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11n-HT20 Channel 2412MHz</b>	

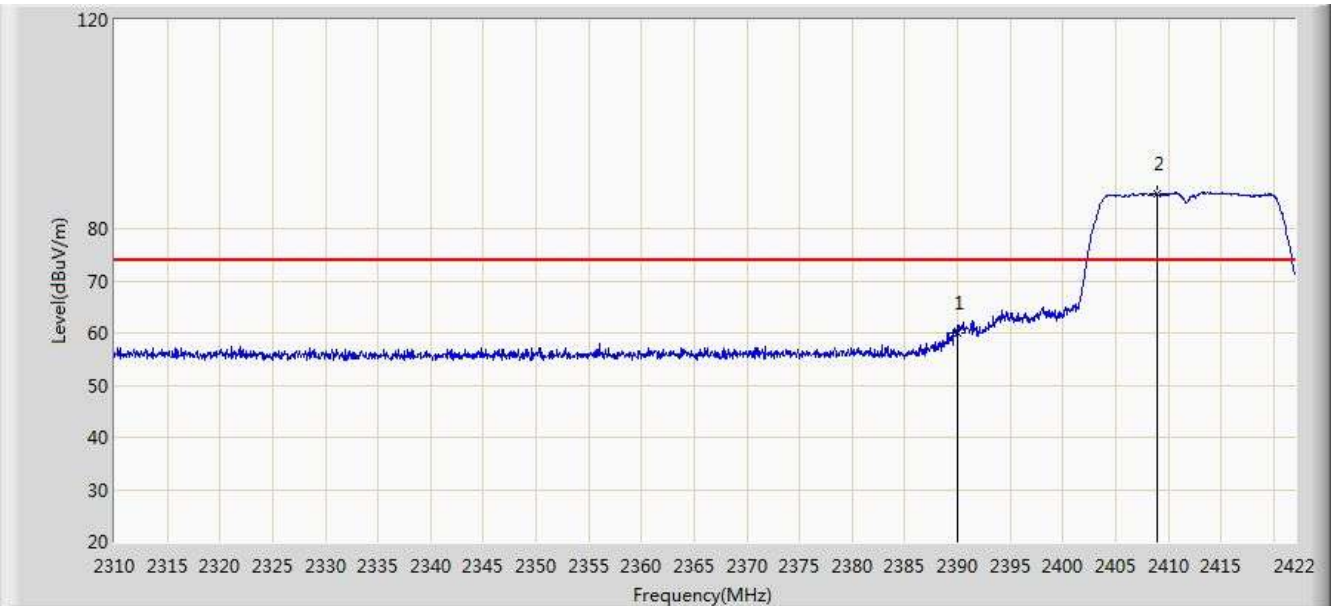


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	60.020	29.336	-13.980	74.000	30.684	PK
2		*	2408.952	86.639	55.989	N/A	N/A	30.649	PK

Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> 802.11n-HT20 Channel 2412MHz	

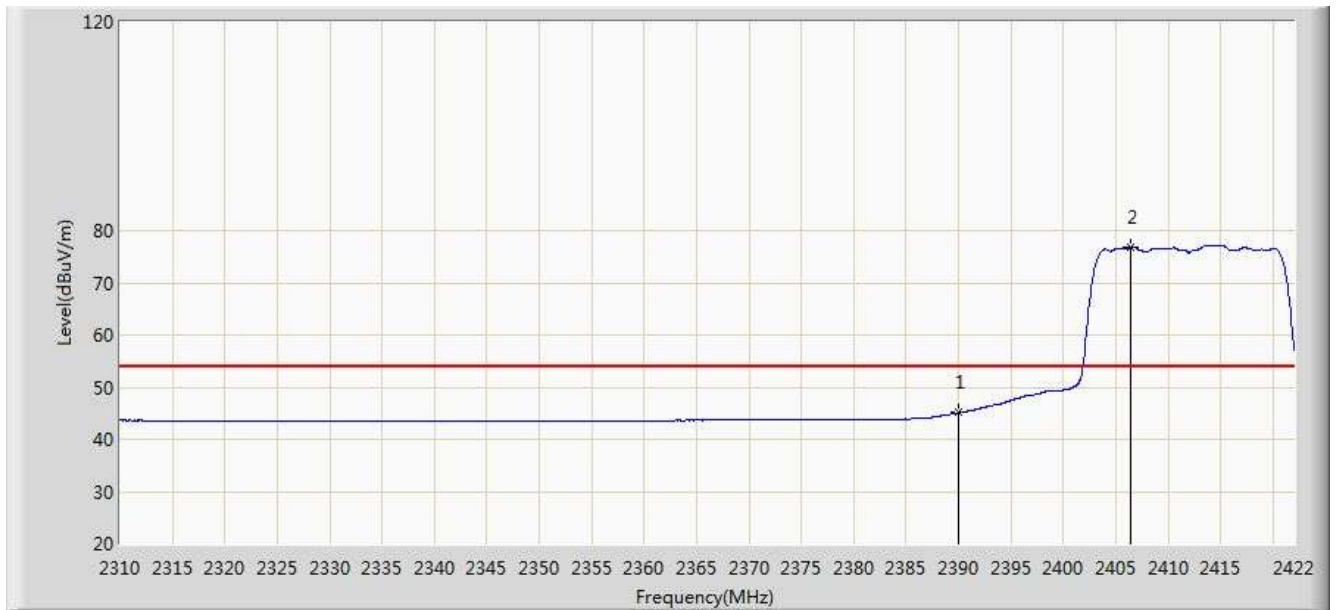


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	45.083	14.399	-8.917	54.000	30.684	AV
2		*	2406.432	76.757	46.103	N/A	N/A	30.654	AV

Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11n-HT20 Channel 2462MHz</b>	

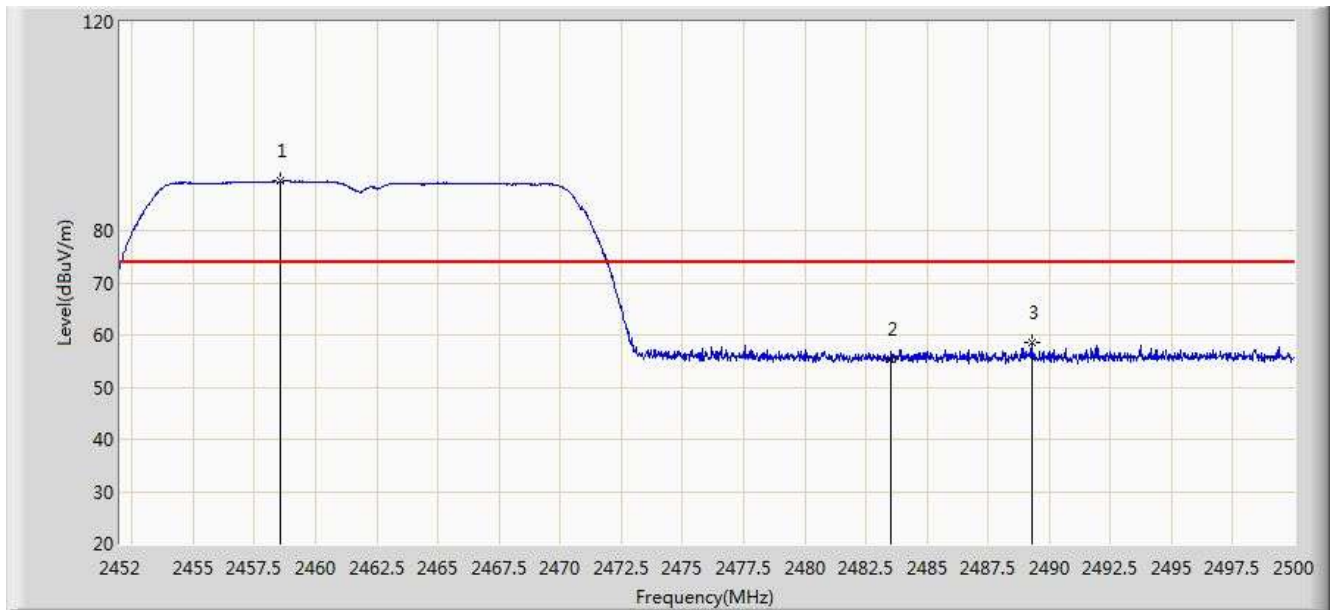


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2458.528	89.454	58.848	N/A	N/A	30.606	PK
2			2483.500	55.376	24.703	-18.624	74.000	30.673	PK
3			2489.272	58.558	27.868	-15.442	74.000	30.689	PK

Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11n-HT20 Channel 2462MHz</b>	

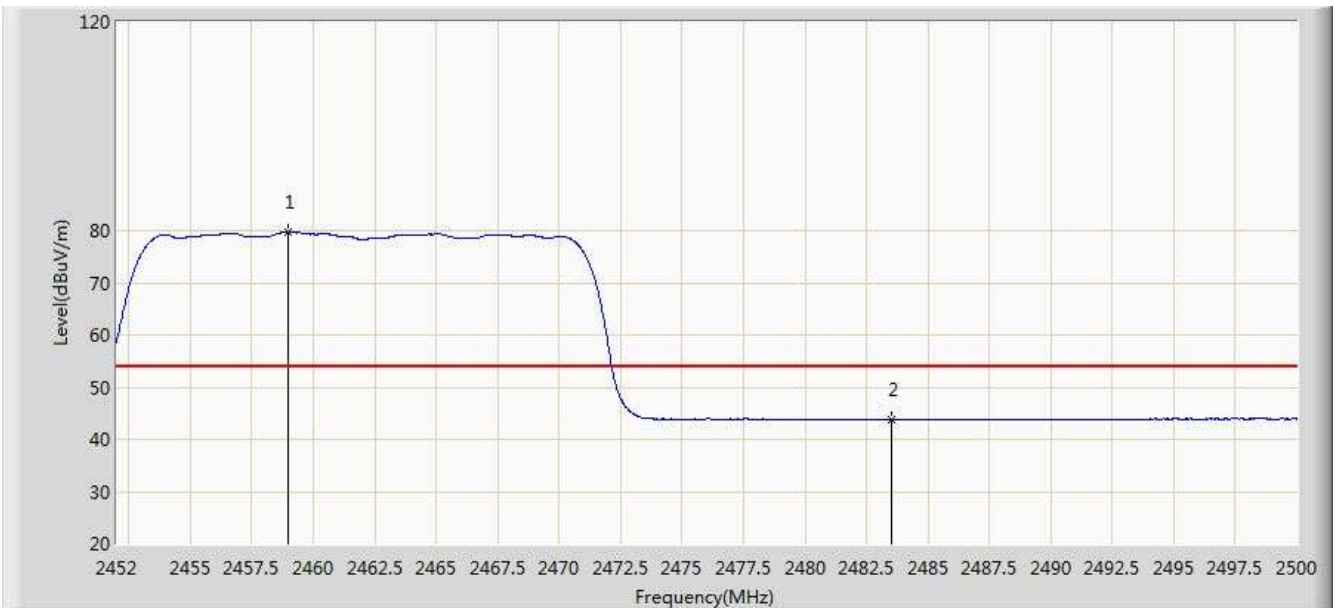


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2458.984	79.667	49.060	N/A	N/A	30.607	AV
2			2483.500	43.754	13.081	-10.246	54.000	30.673	AV

Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11n-HT20 Channel 2462MHz</b>	

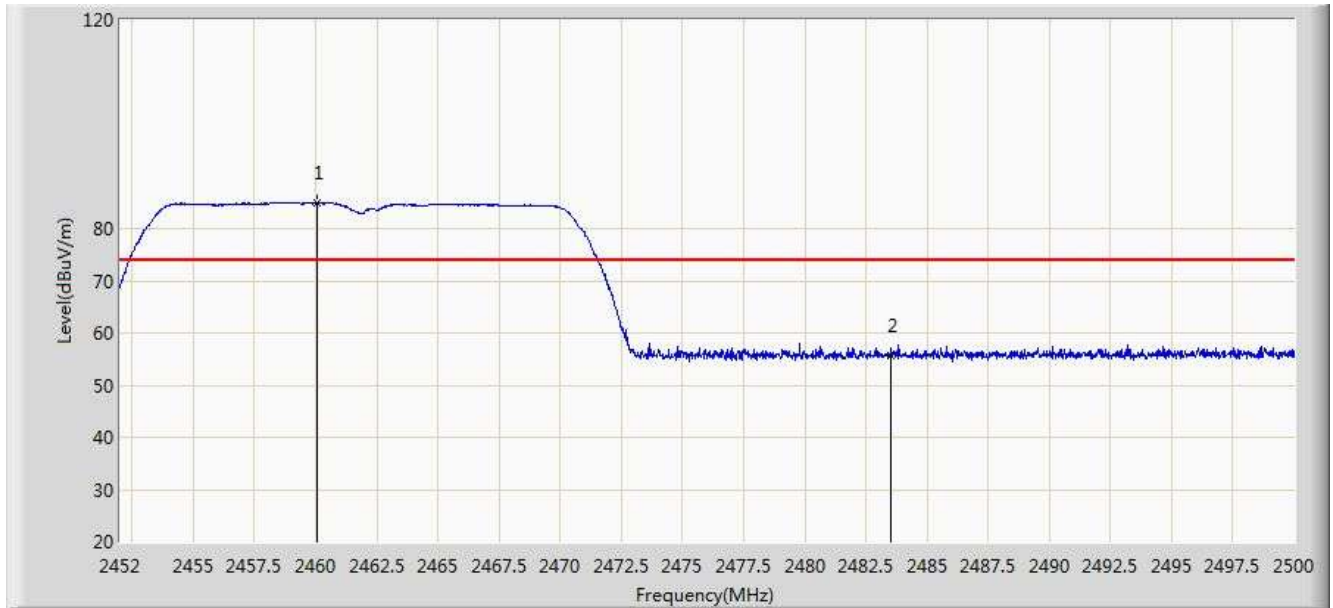

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2460.040	84.832	54.224	N/A	N/A	30.609	PK
2			2483.500	55.569	24.896	-18.431	74.000	30.673	PK

Engineer: Milo Li	
Site: AC1	Time: 2014/04/12 - 13:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
<b>Worst Case Mode: 802.11n-HT20 Channel 2462MHz</b>	

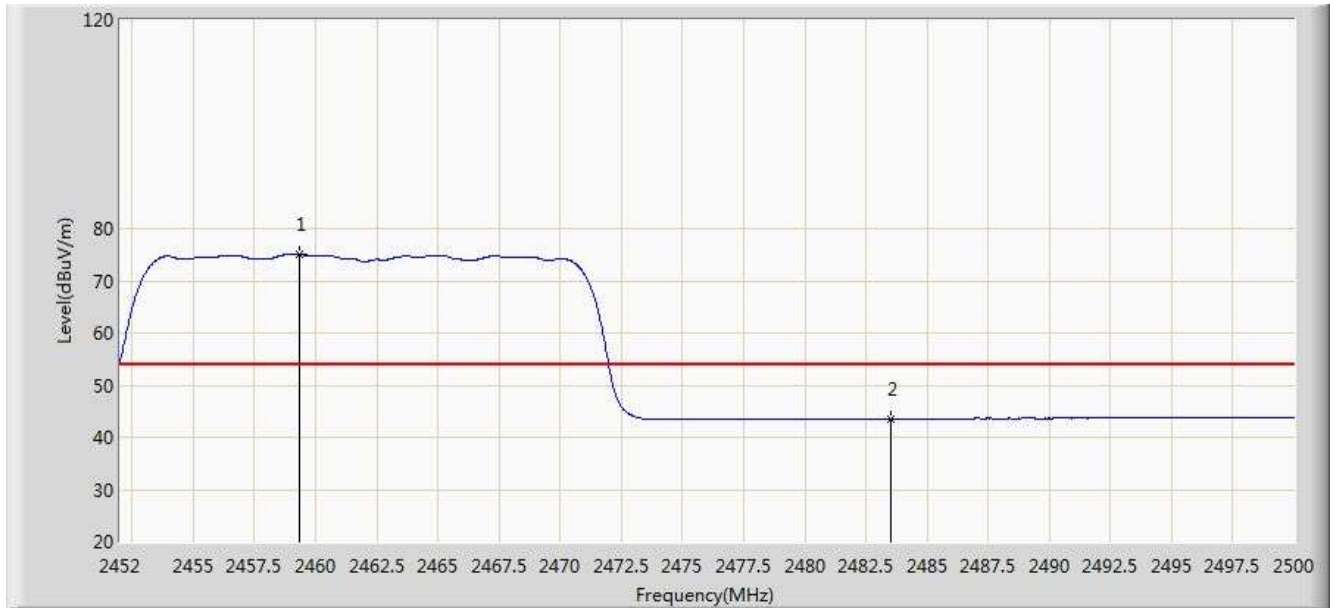

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2459.368	74.956	44.349	N/A	N/A	30.607	AV
2			2483.500	43.556	12.883	-10.444	54.000	30.673	AV

## 7.8. AC Conducted Emissions Measurement

### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Procedure


The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.




### 7.8.3. Test Setup

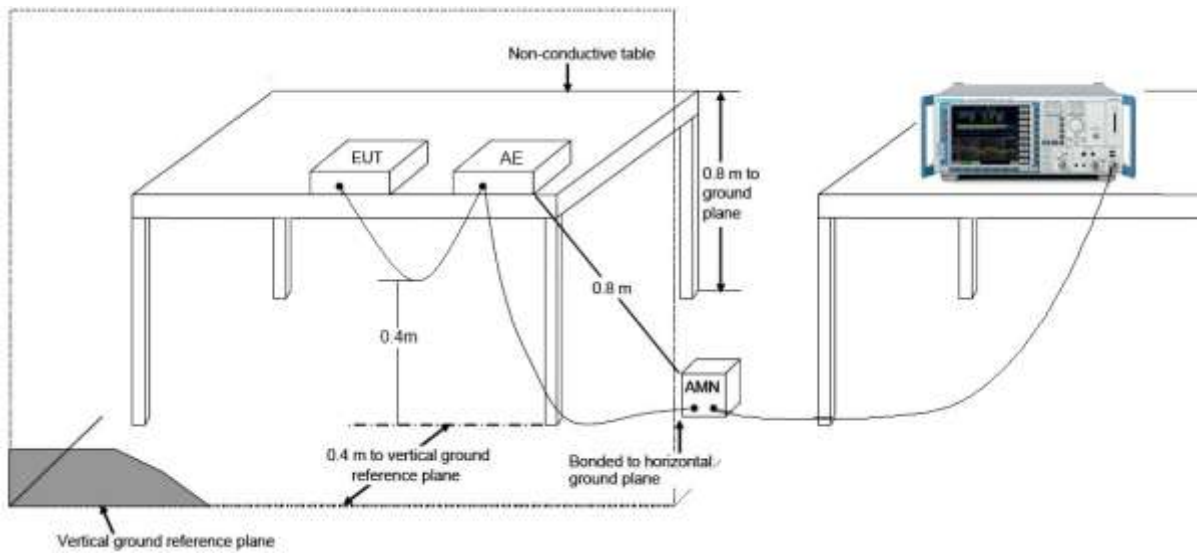


### 7.8.4. Test Result

Engineer: Milo Li	
Site: SR2	Time: 2014/04/10 - 18:16
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Normal Operation	

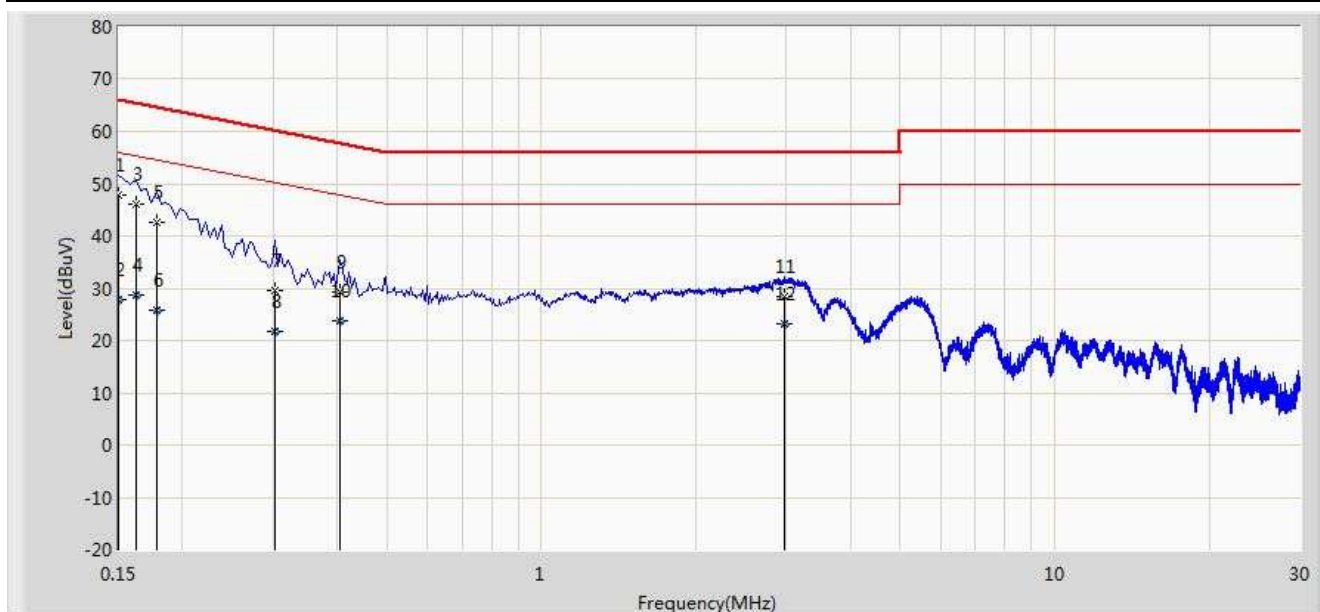

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1		*	0.150	47.914	36.746	-18.086	66.000	11.168	QP
2			0.150	27.793	16.625	-28.207	56.000	11.168	AV
3			0.162	46.199	36.102	-19.162	65.361	10.097	QP
4			0.162	28.722	18.625	-26.638	55.361	10.097	AV
5			0.178	42.590	32.531	-21.989	64.578	10.058	QP
6			0.178	25.750	15.692	-28.828	54.578	10.058	AV
7			0.302	29.511	19.505	-30.677	60.188	10.006	QP
8			0.302	21.708	11.702	-28.480	50.188	10.006	AV
9			0.406	29.142	19.052	-28.588	57.730	10.090	QP
10			0.406	23.700	13.610	-24.030	47.730	10.090	AV
11			2.974	28.337	18.478	-27.663	56.000	9.859	QP
12			2.974	23.132	13.273	-22.868	46.000	9.859	AV

Engineer: Milo Li	
Site: SR2	Time: 2014/04/10 - 18:20
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Normal Operation	

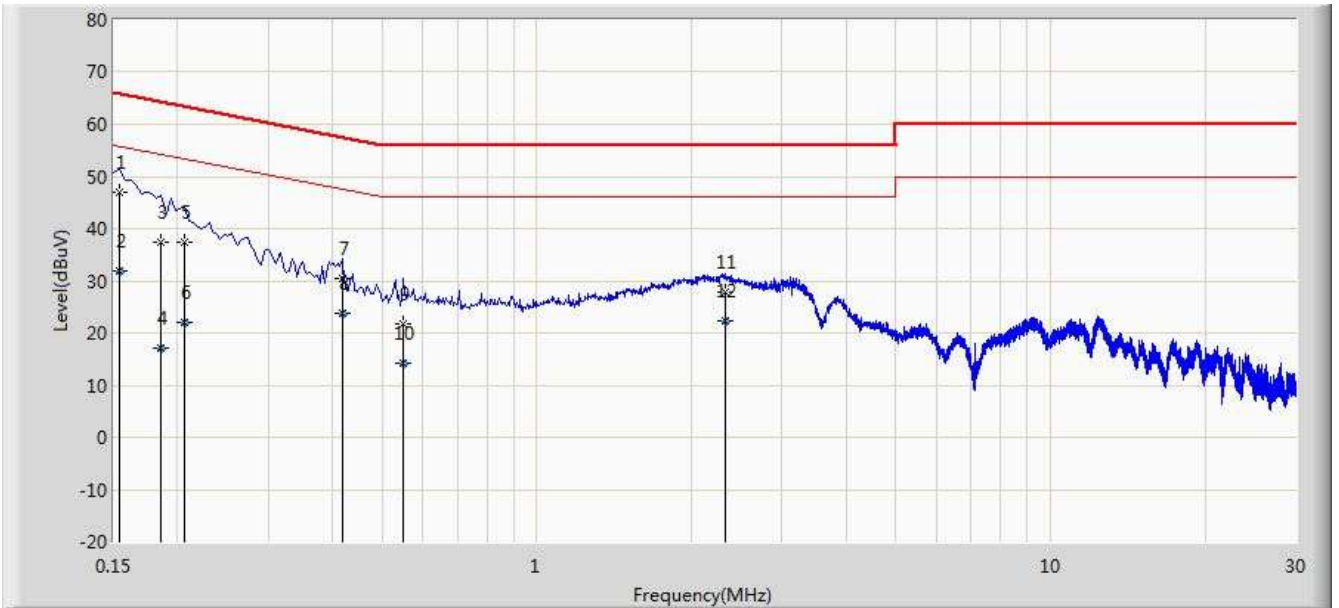

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1		*	0.154	47.097	36.381	-18.685	65.781	10.716	QP
2			0.154	31.752	21.036	-24.030	55.781	10.716	AV
3			0.186	37.268	27.233	-26.945	64.213	10.035	QP
4			0.186	17.215	7.179	-36.999	54.213	10.035	AV
5			0.206	37.383	27.382	-25.982	63.365	10.001	QP
6			0.206	22.146	12.145	-31.219	53.365	10.001	AV
7			0.418	30.329	20.203	-27.159	57.488	10.126	QP
8			0.418	23.875	13.749	-23.613	47.488	10.126	AV
9			0.550	21.799	11.640	-34.201	56.000	10.159	QP
10			0.550	14.076	3.917	-31.924	46.000	10.159	AV
11			2.334	27.905	18.039	-28.095	56.000	9.866	QP
12			2.334	22.189	12.323	-23.811	46.000	9.866	AV

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Tablet PC FCC ID: 2AB7TOX7** is in compliance with Part 15C of the FCC Rules.