



**FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 10**

CERTIFICATION TEST REPORT

For

Shopify Tap & Chip Reader

MODEL NUMBER: S1801B

FCC ID: 2AB7X-S1801B

IC: 24244-S1801B

REPORT NUMBER: 4790295303-7

ISSUE DATE: April 21, 2022

Prepared for

BBPOS Limited (FCC)

**Suite 1902-04, 19/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road, Tsuen Wan, N.T.
HK**

Shopify Inc (ISED)

150 Elgin Street Ottawa ON K2P1L4 Canada

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	4/21/2022	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter 99% Emission Bandwidth / 20dB Bandwidth	RSS-Gen 6.7/ Part 15.215 (c)	PASS
2	Transmitter Frequency Stability (Temperature & Voltage Variation)	CFR 47 FCC §15.225(e) ISED RSS-Gen Clause 6.11 ISED RSS-210 Annex B.6	PASS
3	Fundamental Field Strength	CFR 47 FCC §15.225(a)(b)(c)(d) ISED RSS-Gen Clause 6.12 ISED RSS-210 Annex B.6	PASS
4	Radiated Emissions	CFR 47 FCC§15.209(a) CFR 47 FCC§15.225(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
5	Band Edge Radiated Emissions	CFR 47 FCC §15.209(a) CFR 47 FCC §15.225(c)(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
6	Conducted Emission Test for AC Power Port	CFR 47 FCC §15.207 ISED RSS-Gen Clause 8.8	PASS
7	Antenna Requirement	CFR 47 FCC §15.203 ISED RSS-Gen Clause 6.3	Pass
Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China. Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C, ISED RSS-210 Issue 9 and ISED RSS-GEN Issue 5 > when <Accuracy Method> decision rule is applied.			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM FIELD STRENGTH.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. TEST ENVIRONMENT	10
5.5. DESCRIPTION OF TEST SETUP.....	11
5.6. MEASURING INSTRUMENT AND SOFTWARE USED.....	12
6. ANTENNA PORT TEST RESULTS	13
6.1. 99% & 20dB BANDWIDTH	13
6.2. TRANSMITTER FREQUENCY STABILITY.....	15
7. RADIATED EMISSION TEST RESULTS.....	18
7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS	25
7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz.....	26
7.3. SPURIOUS EMISSIONS BELOW 30MHz	28
8. AC POWER LINE CONDUCTED EMISSIONS	31
9. ANTENNA REQUIREMENTS.....	37



1. ATTESTATION OF TEST RESULTS

FCC

Applicant Information

Company Name: BBPOS Limited
Address: Suite 1902-04, 19/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road,
Tsuen Wan, N.T. HK

ISED

Applicant Information

Company Name: Shopify Inc
Address: 150 Elgin Street Ottawa ON K2P1L4 Canada

FCC

Manufacturer Information

Company Name: BBPOS Limited
Address: Suite 1902-04, 19/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road,
Tsuen Wan, N.T. HK

ISED

Manufacturer Information

Company Name: BBPOS Limited
Address: Suite 1902-04, 19/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road,
Tsuen Wan, N.T. HK

EUT Information

EUT Name: Shopify Tap & Chip Reader
Model: S1801B
Brand: Shopify
Sample Received Date: February 22, 2022
Sample Status: Normal
Sample ID: 4690007
Date of Tested: February 22, 2022 ~ April 21, 2022



APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-210 Issue 10	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Checked By:

Kebo Zhang
Project Engineer
Approved By:

Shawn Wen
Laboratory Leader

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, ISED RSS-210 Issue 10 and RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	2.2 dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.00 dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.78 dB (1 GHz-18 GHz)
	5.23 dB (18 GHz-26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Shopify Tap & Chip Reader
Model	S1801B
Operation Frequency	13.56MHz
Modulation	ASK
Battery	DC 3.7 V, 500 mAh

5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max Peak field strength (dB μ V/m)
13.56	19.17

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
13.56	Coil	0



5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	20 ~ 28°C
Voltage:	VL	DC 3.33 V
	VN	DC 3.70 V
	VH	DC 4.07 V

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E14	/
2	Adapter	SAMSUNG	ETA-U90CBC	Input: 120Vac, 60Hz Output: 5Vdc, 2A
3	Card (Tap)	/	/	/
4	Mobile Phone	HUAWEI	ALP-AL00	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	USB	Unshielded	1	N/A

ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

TEST SETUP


The EUT can transmit the NFC signal by Swiping card (Tap).

The EUT can work in continuous transmit mode with an APP through a Mobile Phone.

New battery has been used during measurement.

Note: The device was tested with and without a tag and found the worst-case configuration is in continuous transmit mode.

SETUP DIAGRAM FOR TESTS

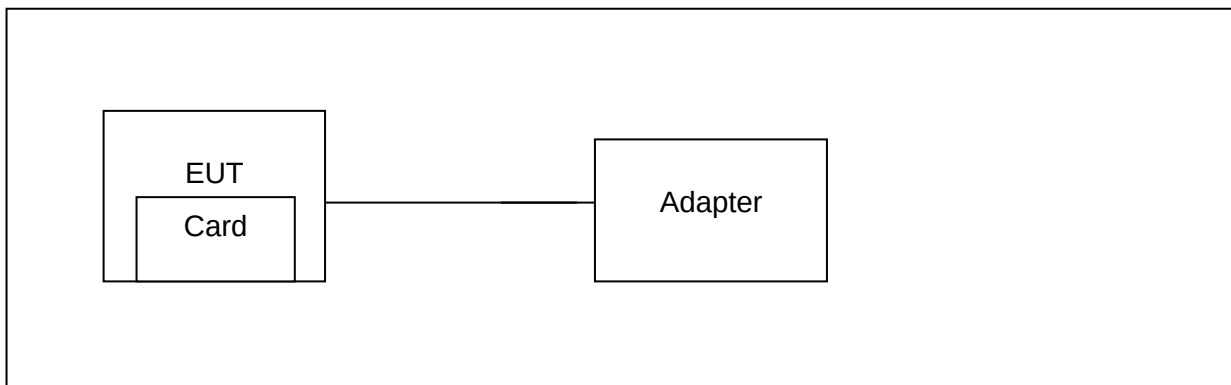



5.6. MEASURING INSTRUMENT AND SOFTWARE USED

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions						
Equipment		Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver		KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna		TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier		HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
Loop antenna		Schwarzbeck	1519B	00008	Dec.14, 2022	Dec.13, 2024
Preamplifier		TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier		Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
Software						
Description			Manufacturer		Name	Version
Test Software for Radiated Emissions			Farad		EZ-EMC	Ver. UL-3A1
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.10, 2021	Nov.09, 2022

6. ANTENNA PORT TEST RESULTS

6.1. 99% & 20dB BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2		
Section	Test Item	Limit
ANSI C63.10 Section 6.9.2	20dB% Bandwidth	For reporting purposes only.
ISED RSS-Gen Clause 6.7 Issue 5	99 % Occupied Bandwidth	For reporting purposes only.


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20dB Occupied Bandwidth: 1% to 5% of the 20 dB bandwidth For 99% Occupied Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 20dB Occupied Bandwidth: approximately 3×RBW For 99% Occupied Bandwidth: ≥ 3×RBW
Span	Between 2 times and 5 times the 20dB OBW. Between 1.5 times and 5.0 times the 99% OBW.
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 99%/20dB relative to the maximum level measured in the fundamental emission.

TEST SETUP




**TEST ENVIRONMENT**

Temperature	21.5 °C	Relative Humidity	60 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.7 V

RESULTS

Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB bandwidth (kHz)
13.56	2.134	2.540

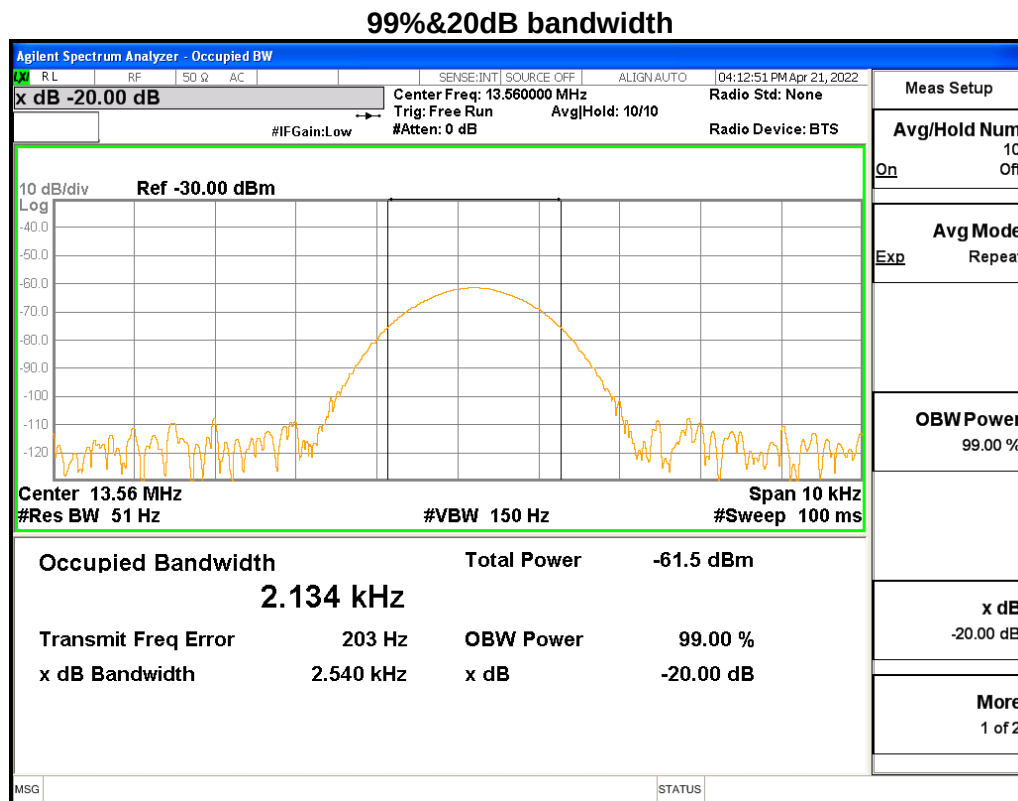

6.2. TRANSMITTER FREQUENCY STABILITY

LIMITS

CFR 47 FCC §15.225(e)
ISED RSS-210 Annex B B.6

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


TEST SETUP AND PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	10KHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST SETUP

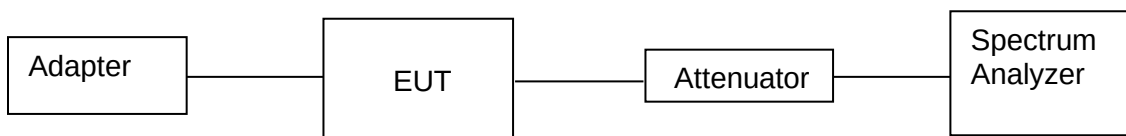

Note: The manufacturer claims that the normal operating voltage range of the battery is 3.4 ~ 4.2 Vdc, beyond this range, the sample will not work properly.



TEST RESULTS

Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
-20	13.5604	13.5612	13.5602	13.5597
-10	13.5590	13.5610	13.5599	13.5598
0	13.5611	13.5593	13.5595	13.5591
10	13.5591	13.5590	13.5588	13.5594
20	13.5601	13.5599	13.5604	13.5596
30	13.5591	13.5610	13.5604	13.5604
40	13.5610	13.5588	13.5597	13.5602
50	13.5588	13.5590	13.5592	13.5610
Maximum frequency error	0.0088%	0.0088%	0.0081%	0.0074%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass



Maximum frequency error of the EUT with declared battery operation voltage at a temperature of 20 degrees C.

Supply Voltage by Battery	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
4.2 Vdc	13.5598	13.5597	13.5594	13.5609
3.7 Vdc	13.5594	13.5598	13.5605	13.5611
3.4 Vdc	13.5589	13.5610	13.5608	13.5596
Maximum frequency error	0.0081%	0.0074%	0.0059%	0.0081%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass

Maximum frequency error of the EUT with 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Supply Voltage by adapter	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
138 Vac, 60Hz	13.5601	13.5607	13.5604	13.5604
120 Vac, 60Hz	13.5603	13.5604	13.5607	13.5606
102 Vac, 60Hz	13.5602	13.5602	13.5605	13.5607
Maximum frequency error	0.0022%	0.0052%	0.0052%	0.0052%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass



7. RADIATED EMISSION TEST RESULTS

LIMITS

Fundamental field strength

FCC Reference:	Part 15.225(a)(b)(c)(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 & RSS-210 B.6 & RSS-GEN Clause 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4 and 6.5

Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measured Distance (Meters)
13.553-13.567	15848	84	30
13.410-13.553/13.567-13.710	334	50.47	30
13.110-13.410/13.710-14.010	106	40.51	30

Note(s):

1. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

2. The limit is specified at a test distance of 30 meters. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).



Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30MHz.

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

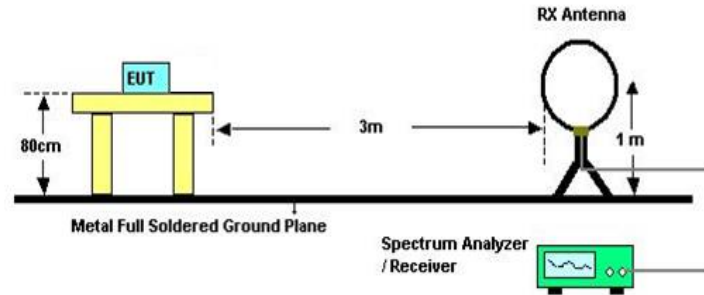


Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

TEST SETUP AND PROCEDURE

Below 30 MHz




The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

- The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
- The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
- The EUT was placed on a turntable with 80 cm above ground.
- The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
- The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
- Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
- The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1G

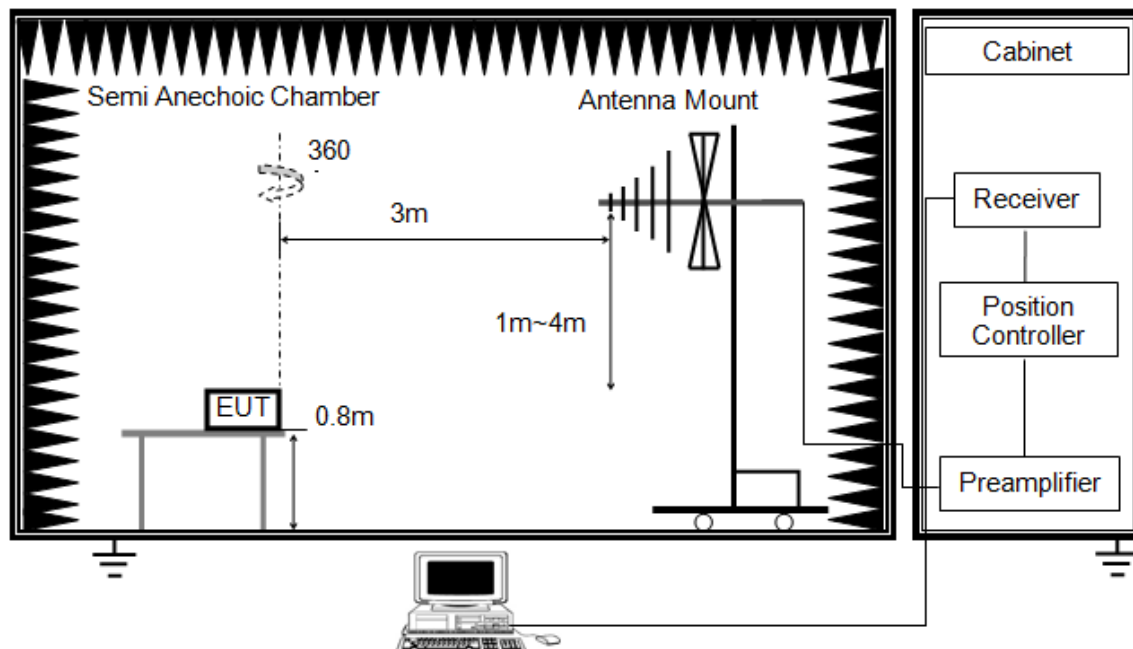


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

X axis, Y axis, Z axis positions:

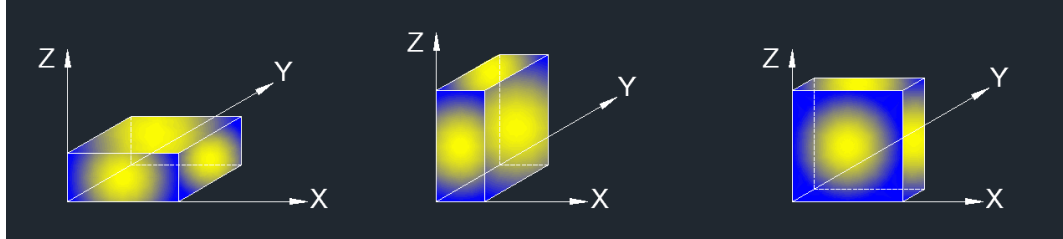

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


TEST ENVIRONMENT

Temperature	23.2 °C	Relative Humidity	64 %
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7 V

RESULTS

7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

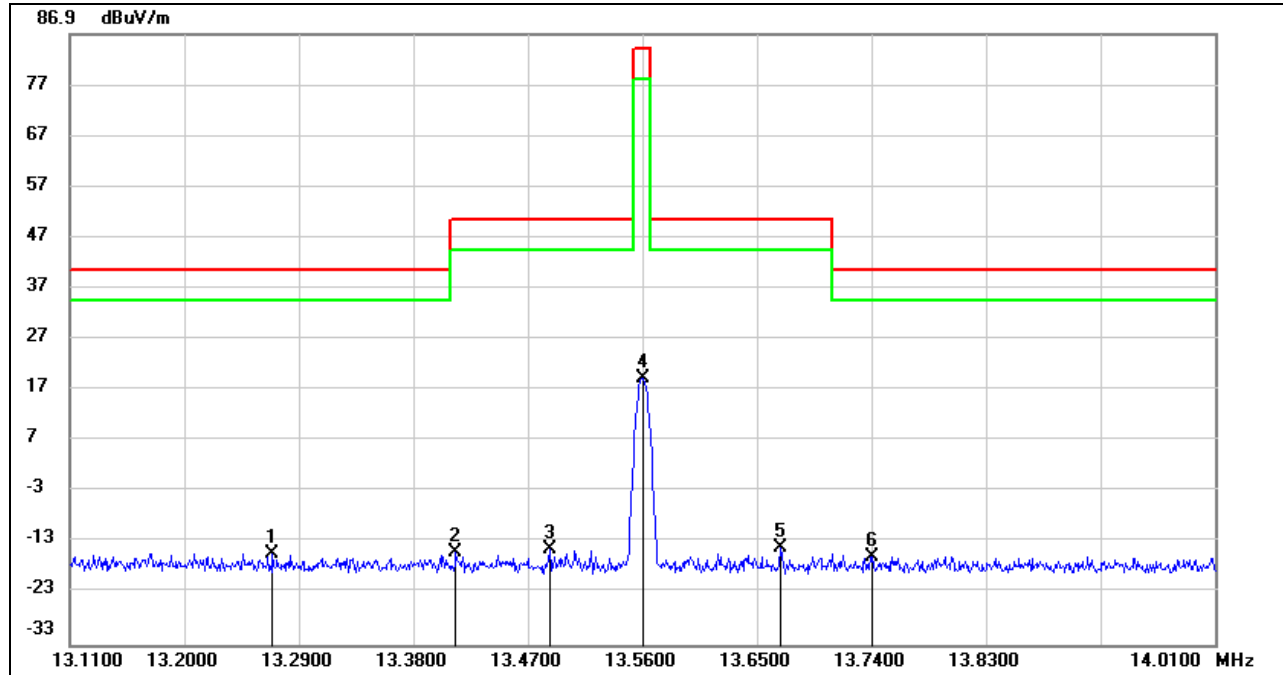


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.2693	46.19	-61.40	-15.21	40.51	-55.72	peak
2	13.4133	46.39	-61.40	-15.01	50.47	-65.48	peak
3	13.4871	47.19	-61.41	-14.22	50.47	-64.69	peak
4	13.5600	80.58	-61.41	19.17	84.00	-64.83	peak
5	13.6689	47.40	-61.41	-14.01	50.47	-64.48	peak
6	13.7409	45.72	-61.42	-15.70	40.51	-56.21	peak

Note: 1. Result Level = Read Level + Correct Factor.

2. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz


SPURIOUS EMISSIONS (HORIZONTAL)

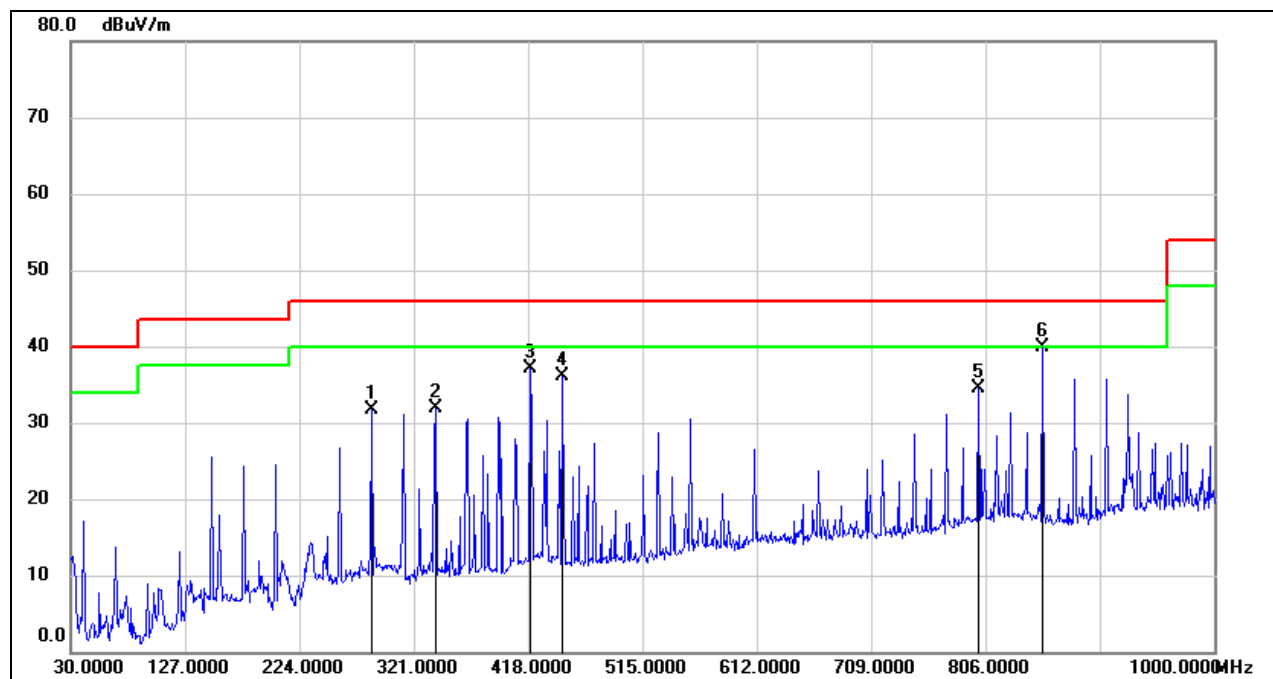

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	285.1099	47.95	-16.29	31.66	46.00	-14.34	peak
2	339.4300	46.37	-14.45	31.92	46.00	-14.08	peak
3	419.9400	50.12	-12.99	37.13	46.00	-8.87	peak
4	447.1000	48.52	-12.51	36.01	46.00	-9.99	peak
5	800.1800	41.86	-7.33	34.53	46.00	-11.47	peak
6	854.5000	46.06	-6.14	39.92	46.00	-6.08	peak

Note: 1. Result Level = Read Level + Correct Factor.

HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

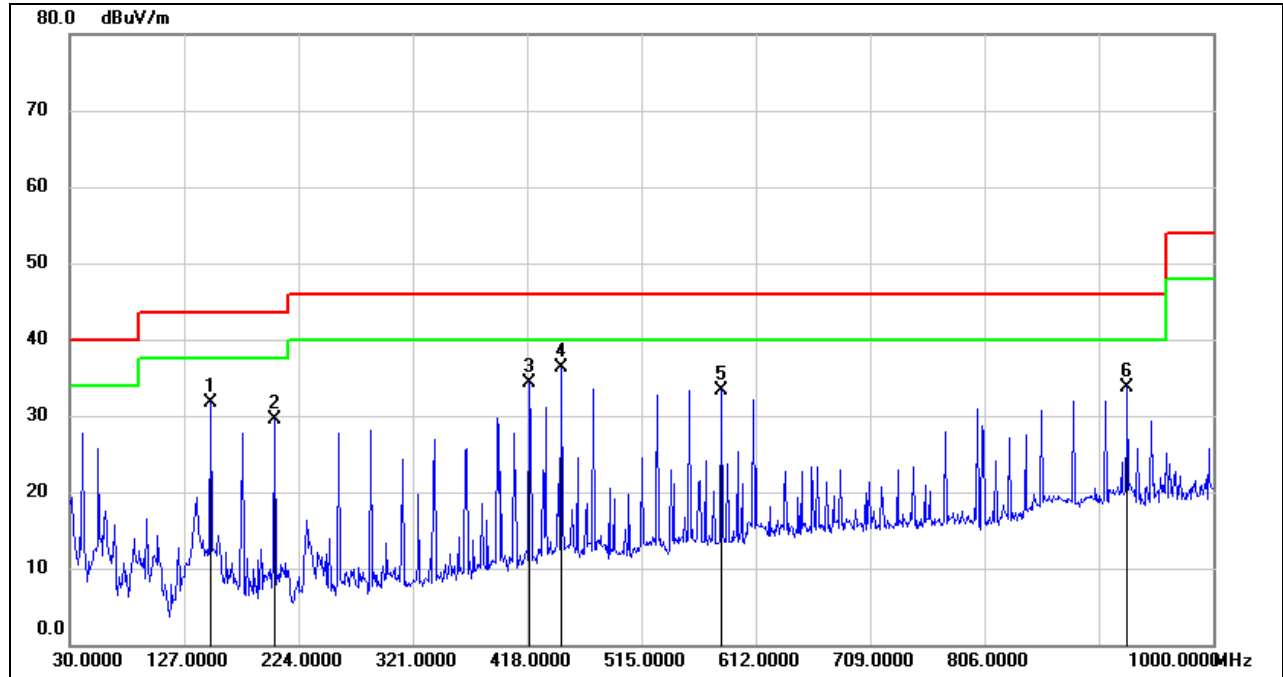


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	149.3100	50.06	-18.30	31.76	43.50	-11.74	peak
2	203.6300	46.14	-16.70	29.44	43.50	-14.06	peak
3	419.9400	47.29	-12.99	34.30	46.00	-11.70	peak
4	447.1000	48.77	-12.51	36.26	46.00	-9.74	peak
5	582.9000	43.29	-9.94	33.35	46.00	-12.65	peak
6	927.2500	38.46	-4.78	33.68	46.00	-12.32	peak

Note: 1. Result Level = Read Level + Correct Factor.

7.3. SPURIOUS EMISSIONS BELOW 30MHz

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

9 kHz~ 150 kHz

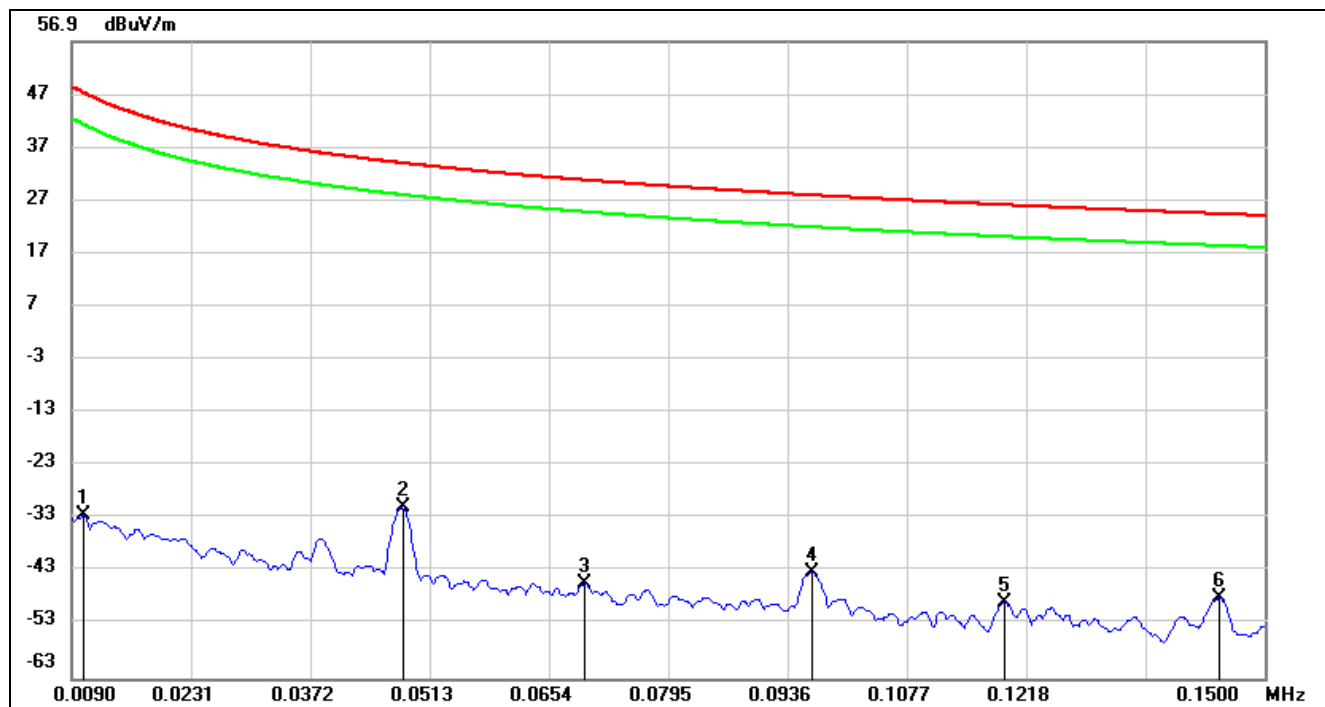


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0104	69.07	-101.56	-32.49	47.26	-83.99	-4.24	-79.75	peak
2	0.0481	70.35	-101.35	-31	33.96	-82.50	-17.54	-64.96	peak
3	0.0696	55.67	-100.99	-45.32	30.75	-96.82	-20.75	-76.07	peak
4	0.0964	58.08	-101.22	-43.14	27.92	-94.64	-23.58	-71.06	peak
5	0.1193	52.80	-101.52	-48.72	26.07	-100.22	-25.43	-74.79	peak
6	0.1446	53.88	-101.83	-47.95	24.4	-99.45	-27.10	-72.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

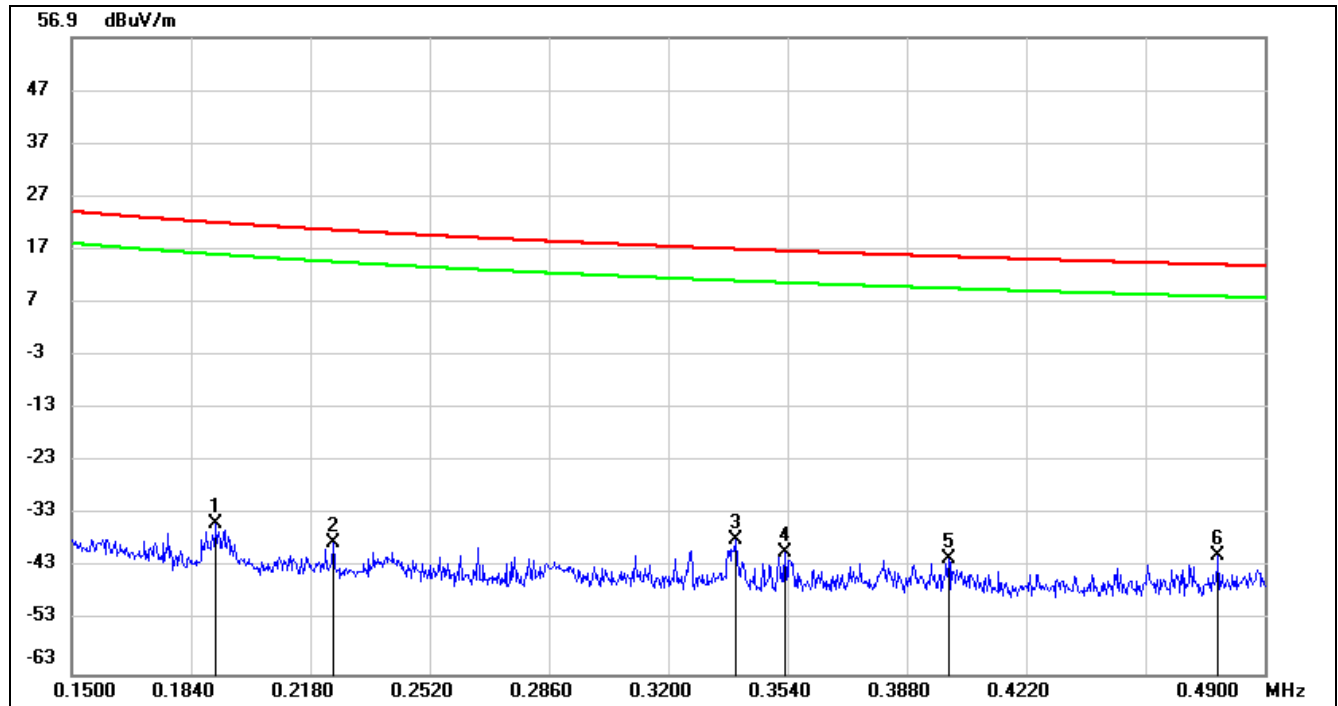


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1911	67.08	-101.85	-34.77	21.98	-86.27	-29.52	-56.75	peak
2	0.2245	63.32	-101.82	-38.5	20.58	-90.00	-30.92	-59.08	peak
3	0.3390	64.11	-101.76	-37.65	17	-89.15	-34.50	-54.65	peak
4	0.3533	61.53	-101.76	-40.23	16.64	-91.73	-34.86	-56.87	peak
5	0.3998	60.46	-101.74	-41.28	15.56	-92.78	-35.94	-56.84	peak
6	0.4767	60.87	-101.71	-40.84	14.04	-92.34	-37.46	-54.88	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490kHz ~ 30MHz

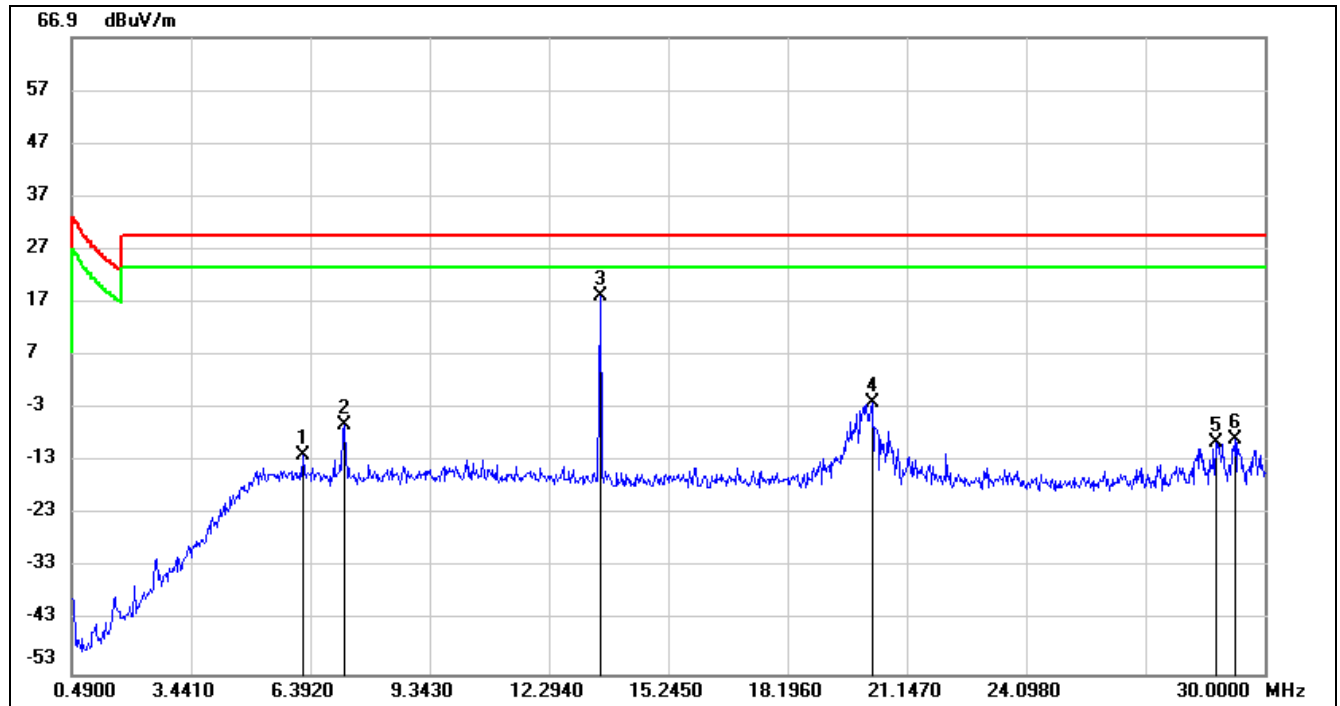

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	6.2149	49.76	-61.75	-11.99	29.54	-63.49	-21.96	-41.53	peak
2	7.2183	55.57	-61.60	-6.03	29.54	-57.53	-21.96	-35.57	peak
3	13.5629	79.63	-61.41	18.22	29.54	-33.28	-21.96	-11.32	peak
4	20.2912	59.20	-61.08	-1.88	29.54	-53.38	-21.96	-31.42	peak
5	28.7901	51.27	-60.73	-9.46	29.54	-60.96	-21.96	-39.00	peak
6	29.2623	51.89	-60.70	-8.81	29.54	-60.31	-21.96	-38.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. About the Fundamental emission test result please refer to section 7.1.



8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS


Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


TEST SETUP AND PROCEDURE

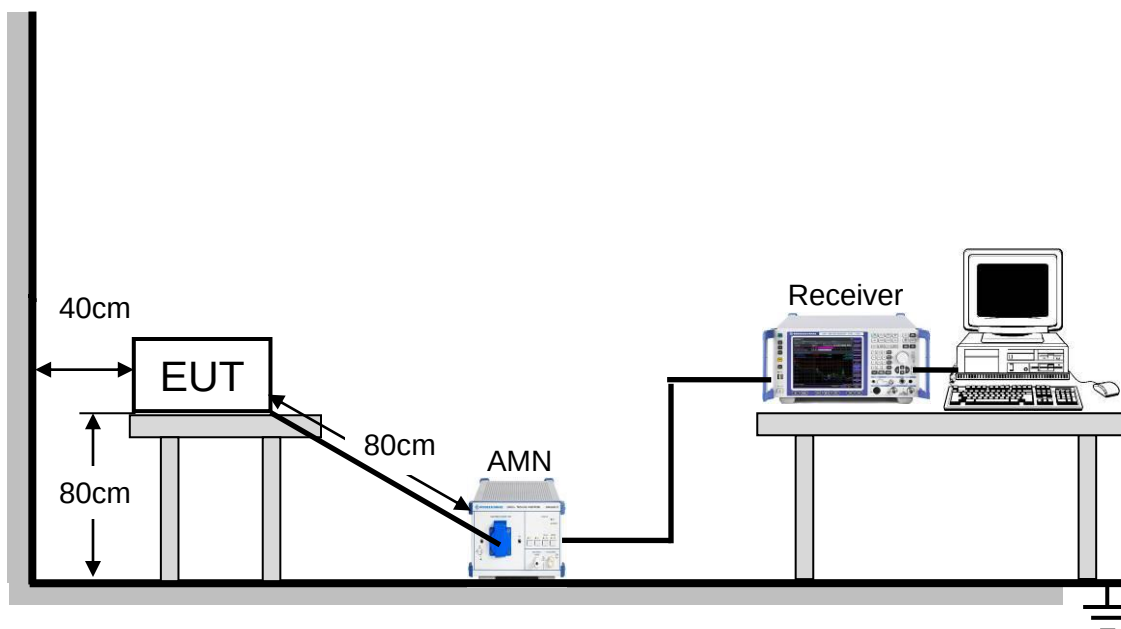

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. LISN at least 80 cm from nearest part of EUT chassis.
6. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.
7. The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.




Temperature	20.6 °C	Relative Humidity	62.1 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V_60Hz

The spectrum plot displays the frequency spectrum of a transmitter signal. The y-axis represents the signal level in dBuV, ranging from 0.0 to 80.0. The x-axis represents the frequency in MHz, ranging from 0.150 to 30.000. The plot shows a series of peaks corresponding to the transmitter's fundamental frequency and its harmonics. The fundamental frequency is marked at 0.5 MHz with a level of approximately 42 dBuV. Subsequent harmonics are marked at 1.0, 1.5, 2.0, 2.5, 3.0, 4.0, and 5.0 MHz. The signal level decreases as the frequency increases. A red line indicates the 'Transmitter Fundamental' level, which is approximately 65 dBuV at 0.150 MHz and decreases to about 55 dBuV at 0.5 MHz, then remains constant until 5.0 MHz, where it drops to approximately 48 dBuV. A green line indicates the 'AVG' (average) level, which is approximately 55 dBuV at 0.150 MHz and decreases to about 45 dBuV at 0.5 MHz, then remains constant until 5.0 MHz, where it drops to approximately 48 dBuV. The 'peak' level is indicated by a red line at the top of the plot, around 75 dBuV.

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.2069	21.90	9.58	31.48	63.33	-31.85	QP
2	0.2069	10.92	9.58	20.50	53.33	-32.83	AVG
3	0.5004	30.91	9.30	40.21	56.00	-15.79	QP
4	0.5004	24.29	9.30	33.59	46.00	-12.41	AVG
5	0.7455	22.60	9.60	32.20	56.00	-23.80	QP
6	0.7455	14.98	9.60	24.58	46.00	-21.42	AVG
7	1.2164	21.56	9.61	31.17	56.00	-24.83	QP
8	1.2164	11.37	9.61	20.98	46.00	-25.02	AVG
9	1.6964	23.09	9.62	32.71	56.00	-23.29	QP
10	1.6964	13.20	9.62	22.82	46.00	-23.18	AVG
11	4.0468	19.44	9.60	29.04	56.00	-26.96	QP
12	4.0468	8.44	9.60	18.04	46.00	-27.96	AVG

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with modified sample (transmitter terminated into a dummy load)

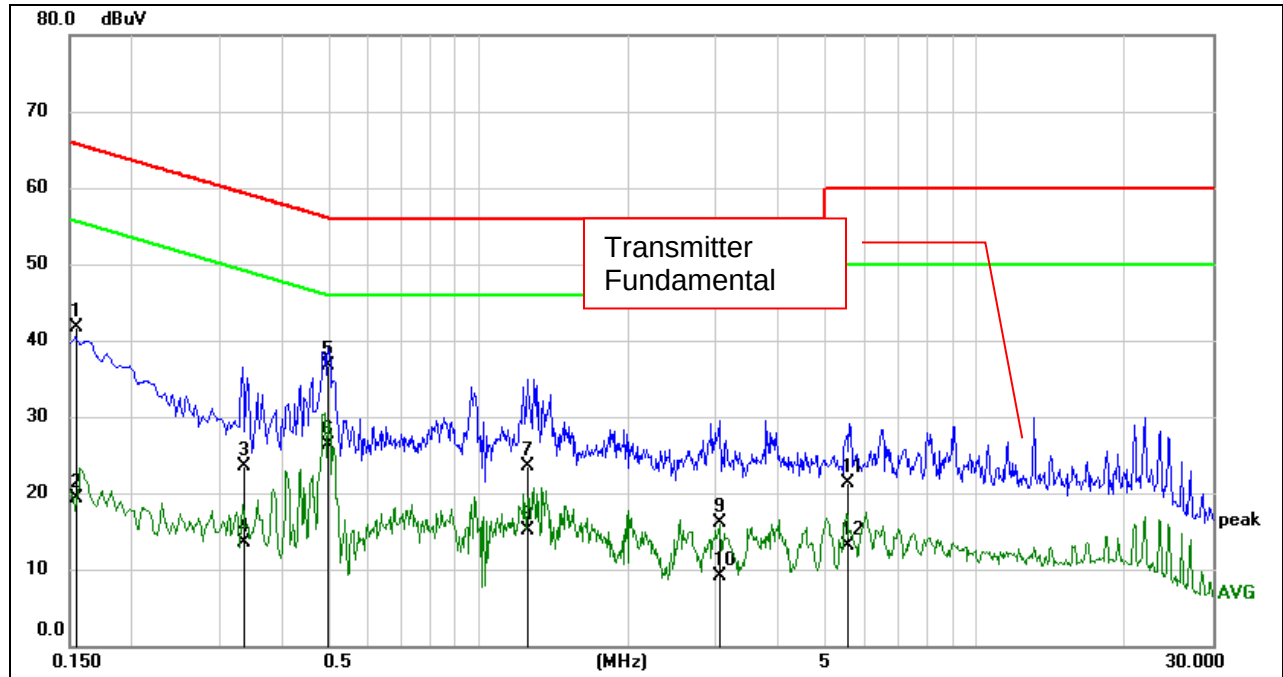


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1547	32.21	9.59	41.80	65.74	-23.94	QP
2	0.1547	9.76	9.59	19.35	55.74	-36.39	AVG
3	0.3371	14.06	9.45	23.51	59.27	-35.76	QP
4	0.3371	4.01	9.45	13.46	49.27	-35.81	AVG
5	0.4992	27.50	9.30	36.80	56.01	-19.21	QP
6	0.4992	16.98	9.30	26.28	46.01	-19.73	AVG
7	1.2522	13.93	9.61	23.54	56.00	-32.46	QP
8	1.2522	5.47	9.61	15.08	46.00	-30.92	AVG
9	3.0419	6.48	9.62	16.10	56.00	-39.90	QP
10	3.0419	-0.52	9.62	9.10	46.00	-36.90	AVG
11	5.5252	11.61	9.63	21.24	60.00	-38.76	QP
12	5.5252	3.48	9.63	13.11	50.00	-36.89	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with unmodified sample (antenna present)

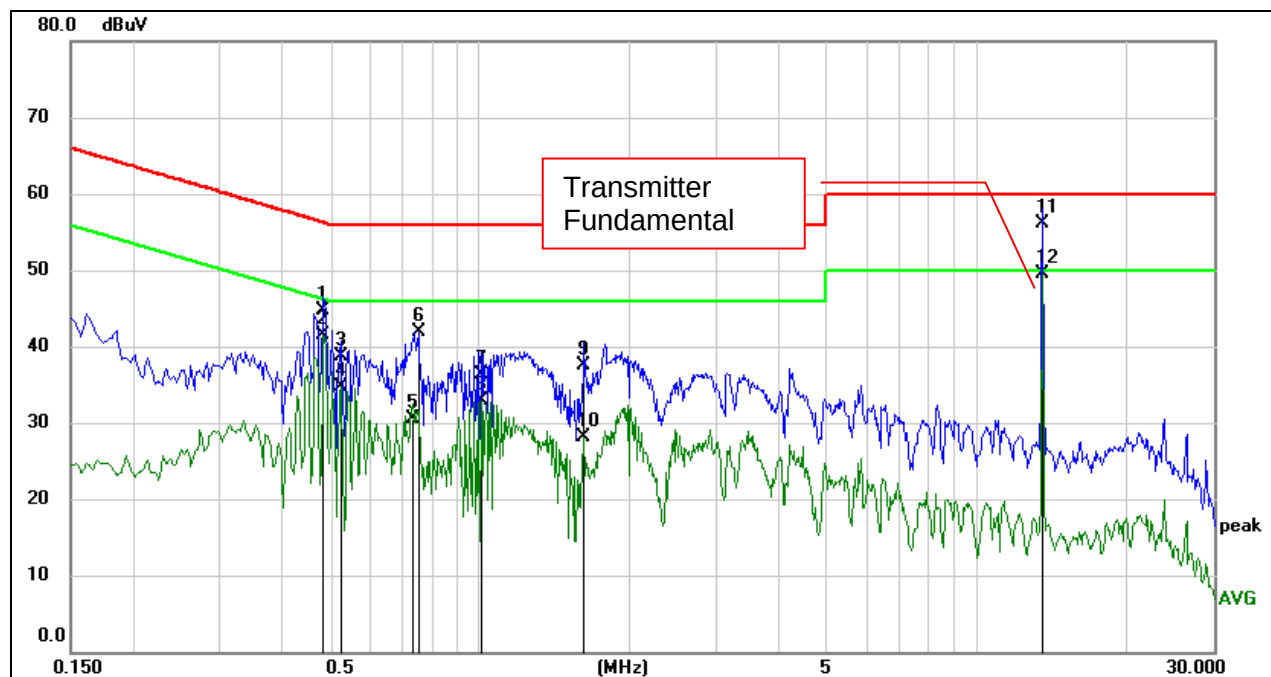


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4859	35.34	9.31	44.65	56.24	-11.59	QP
2	0.4859	32.10	9.31	41.41	46.24	-4.83	AVG
3	0.5260	29.29	9.34	38.63	56.00	-17.37	QP
4	0.5260	25.40	9.34	34.74	46.00	-11.26	AVG
5	0.7339	20.83	9.60	30.43	46.00	-15.57	AVG
6	0.7539	32.34	9.60	41.94	56.00	-14.06	QP
7	1.0100	26.71	9.61	36.32	56.00	-19.68	QP
8	1.0100	23.31	9.61	32.92	46.00	-13.08	AVG
9	1.6220	27.88	9.62	37.50	56.00	-18.50	QP
10	1.6220	18.41	9.62	28.03	46.00	-17.97	AVG
11	13.5579	46.36	9.76	56.12	60.00	-3.88	QP
12	13.5579	39.84	9.76	49.60	50.00	-0.40	AVG

Note: 1. Result = Reading + Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with unmodified sample (antenna present)

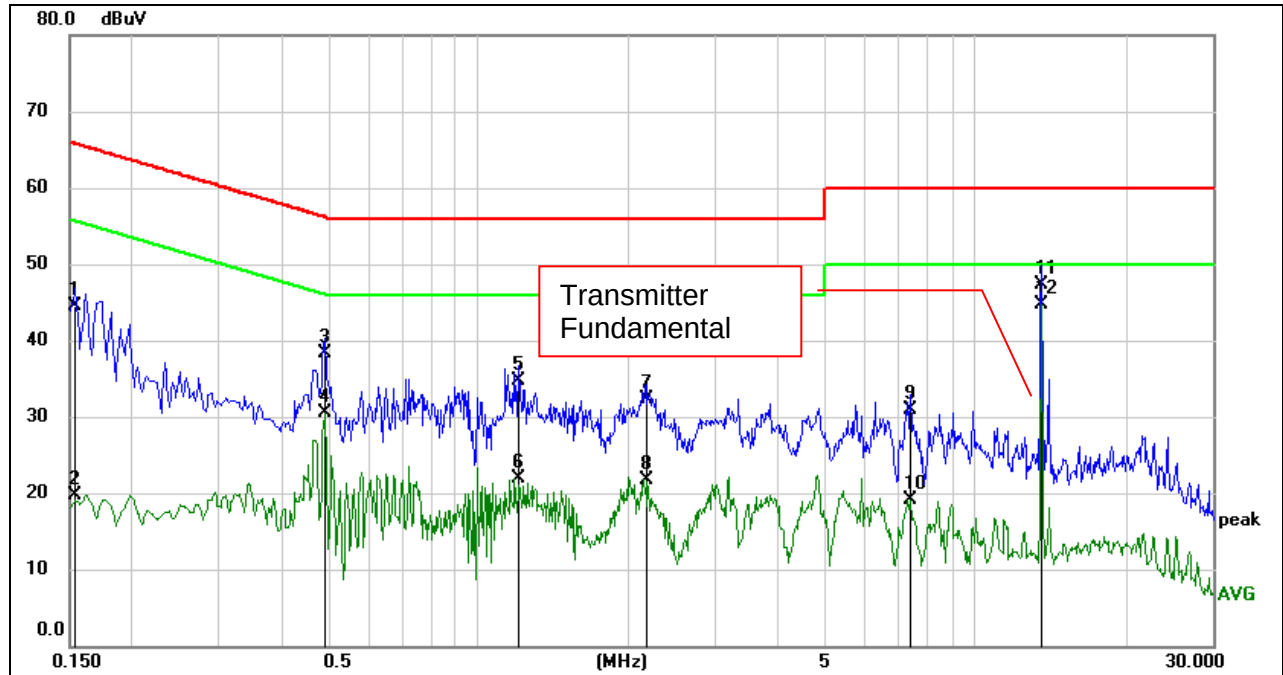

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	35.01	9.59	44.60	65.79	-21.19	QP
2	0.1539	10.14	9.59	19.73	55.79	-36.06	AVG
3	0.4900	29.03	9.31	38.34	56.17	-17.83	QP
4	0.4900	21.10	9.31	30.41	46.17	-15.76	AVG
5	1.2019	25.13	9.61	34.74	56.00	-21.26	QP
6	1.2019	12.28	9.61	21.89	46.00	-24.11	AVG
7	2.1700	22.59	9.63	32.22	56.00	-23.78	QP
8	2.1700	12.13	9.63	21.76	46.00	-24.24	AVG
9	7.3818	21.33	9.63	30.96	60.00	-29.04	QP
10	7.3818	9.48	9.63	19.11	50.00	-30.89	AVG
11	13.5579	37.63	9.76	47.39	60.00	-12.61	QP
12	13.5579	34.94	9.76	44.70	50.00	-5.30	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT