

TEST REPORT

Product : WisePad 2
Trade mark : BBPOS
Model/Type reference : WPC23
Serial Number : N/A
Report Number : EED32J00095404
FCC ID : 2AB7X-WISEPAD2-3G
Date of Issue : Jun. 21, 2017
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

BBPOS International Limited
Suite 1602, 16/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road,
Tsuen Wan, NT, Hong Kong

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom chen

Tom chen (Test Project)

Compiled by:

Mill chen

Kevin yang (Project Engineer)

Reviewed by:

Kevin Yang

Sheek Luo (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Jun. 21, 2017

Check No.:2402681052



2 Version

Version No.	Date	Description
00	Jun. 21, 2017	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION.....	8
6.2 GENERAL DESCRIPTION OF EUT.....	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 TEST FACILITY.....	9
6.7 DEVIATION FROM STANDARDS.....	10
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): Conducted Peak Output Power.....	14
Appendix B): 6dB Occupied Bandwidth.....	18
Appendix C): Band-edge for RF Conducted Emissions.....	22
Appendix D): RF Conducted Spurious Emissions.....	25
Appendix E): Power Spectral Density.....	32
Appendix F): Antenna Requirement.....	36
Appendix G): AC Power Line Conducted Emission.....	37
Appendix H): Restricted bands around fundamental frequency (Radiated).....	40
Appendix I): Radiated Spurious Emissions.....	52
PHOTOGRAPHS OF TEST SETUP	60
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	62

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

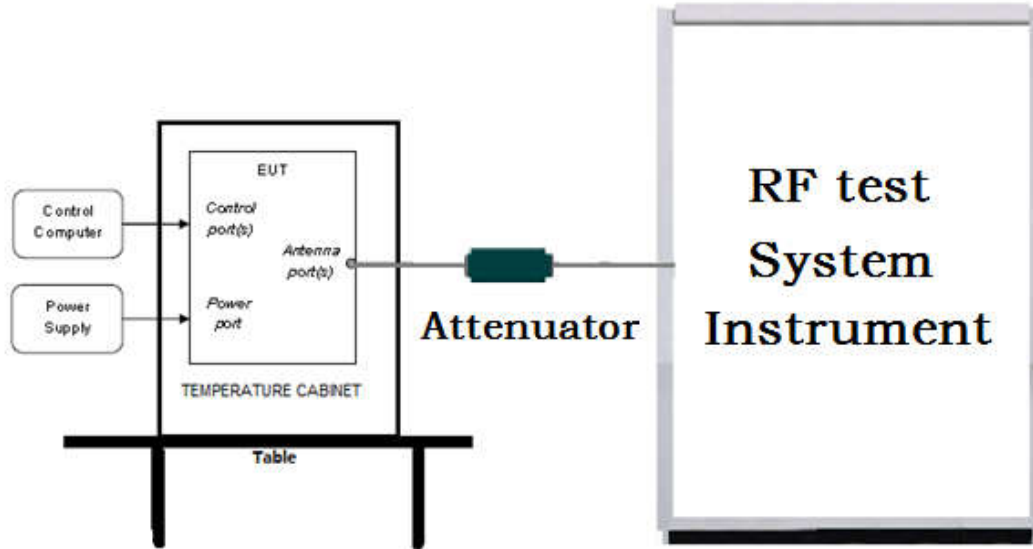

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

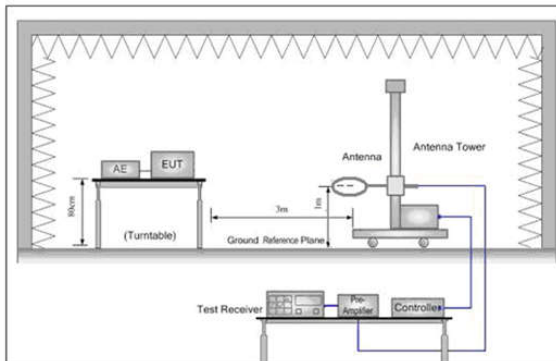


Figure 1. Below 30MHz

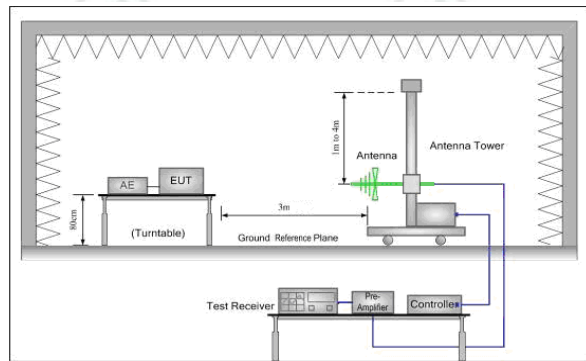


Figure 2. 30MHz to 1GHz


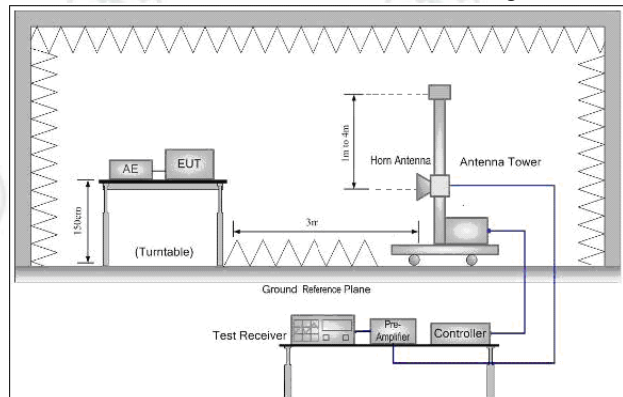


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

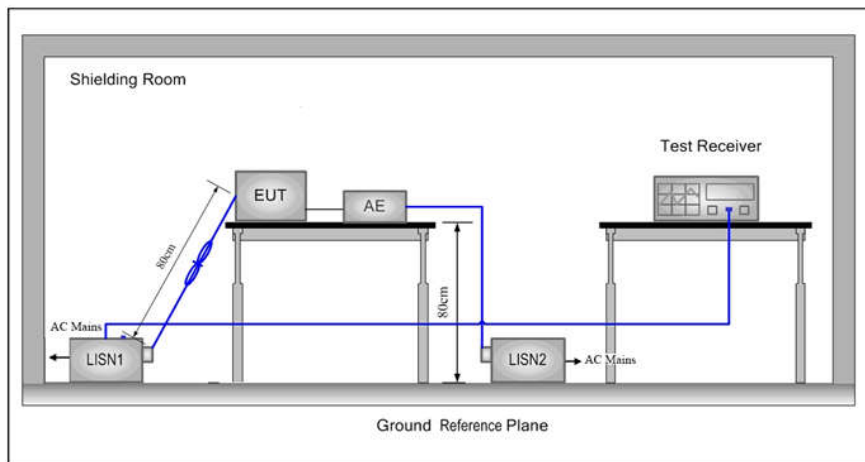

5.2 Test Environment

Operating Environment:	
Temperature:	21°C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar

5.3 Test Condition

Test channel:

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
Transmitting mode:	Keep the EUT transmitted the continuous modulation test signal at the specific channel(s).			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b				X				
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power(dBm)	19.80	19.87	19.98	20.02					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power(dBm)	19.03	18.99	18.87	18.80	18.75	18.70	18.61	18.59	
Mode	802.11n (HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power(dBm)	16.71	16.66	16.59	16.48	16.40	16.31	16.27	16.21	

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20);

6 General Information

6.1 Client Information

Applicant:	BBPOS International Limited
Address of Applicant:	Suite 1602, 16/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road, Tsuen Wan, NT, Hong Kong
Manufacturer:	BBPOS International Limited
Address of Manufacturer:	Suite 1602, 16/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road, Tsuen Wan, NT, Hong Kong

6.2 General Description of EUT

Product Name:	WisePad 2
Mode No.(EUT):	WPC23
Trade Mark:	BBPOS
EUT Supports Radios application:	Wlan 2.4GHz 802.11b/g/n(HT20)
Power Supply:	DC 3.7V by Battery DC 5V by USB port
Battery	Li-polymer 3.7V, 750mAh
Sample Received Date:	May 18, 2017
Sample tested Date:	May 18, 2017 to Jun. 21, 2017

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Sample Type:	Portable
Test Power Grade:	802.11b: 16, 802.11g: 15, 802.11n(HT20): 14
Test Software of EUT:	wifi: BBPOS_Transaction
Antenna Type:	Monopole
Antenna Gain:	1dBi
Test Voltage:	DC 3.7V by Battery DC 5V by USB port

Operation Frequency each of channel(802.11b/g/n HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
laptop	LENOVO	E46L	FCC DOC	CTI
Keyboard	IBM	89P8300	FCC DOC	CTI
Mouse	L.Selectron	OP-200	FCC DOC	CTI

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China518101

Telephone: +86 (0) 755 3368 3668 Fax:+86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of

Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-13-2018
Communication test set test set	Agilent	N4010A	MY51400230	04-01-2016	03-13-2018
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-13-2018
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2018
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2018
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2018
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-13-2018
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-13-2018
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2018

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	05-07-2018
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-13-2018
Communication test set	R&S	CMW500	152394	04-01-2016	03-13-2018
LISN	R&S	ENV216	100098	06-16-2016	06-12-2018
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-12-2018
Voltage Probe	R&S	ESH2-Z3	--	06-13-2017	06-12-2018
Current Probe	R&S	EZ17	100106	06-16-2016	06-12-2018
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	02-22-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-12-2018
Receiver	R&S	ESCI	100435	06-16-2016	06-13-2018
Multi device Controller	maturio	NCD/070/1071 1112	---	01-12-2016	01-11-2018
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	05-07-2018
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-13-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2018
Communication test set	R&S	CMW500	152394	04-01-2016	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398- 002	---	01-12-2016	01-11-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029- 4	---	01-12-2016	01-11-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395- 001	---	01-12-2016	01-11-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393- 001	---	01-12-2016	01-11-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396- 002	---	01-12-2016	01-11-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394- 001	---	01-12-2016	01-11-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10/ KDB 558074	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10/ KDB 558074	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10/ KDB 558074	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)




Appendix A): Conducted Peak Output Power

Result Table


Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	20.02	PASS
11B	MCH	19.31	PASS
11B	HCH	18.65	PASS
11G	LCH	19.03	PASS
11G	MCH	18.22	PASS
11G	HCH	17.7	PASS
11N20SISO	LCH	16.71	PASS
11N20SISO	MCH	15.96	PASS
11N20SISO	HCH	15.36	PASS

Test Graph

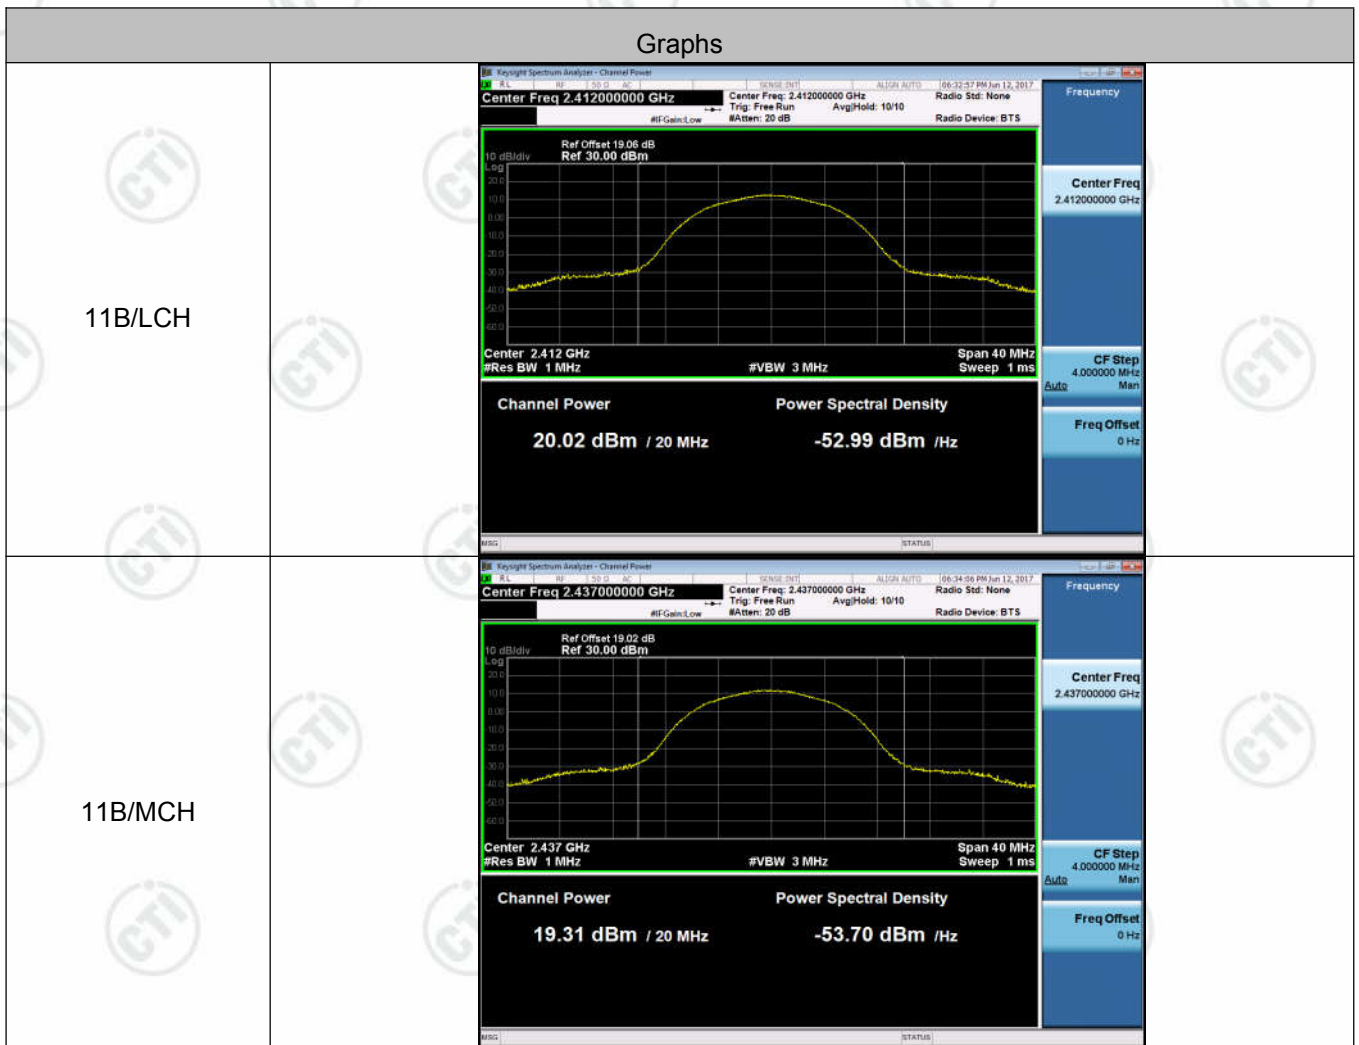
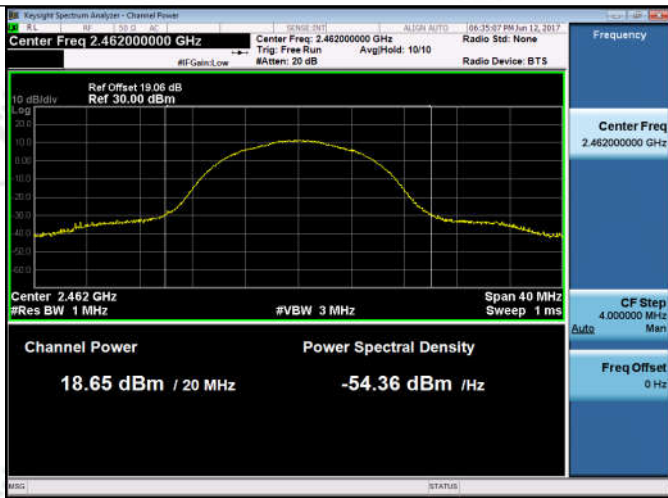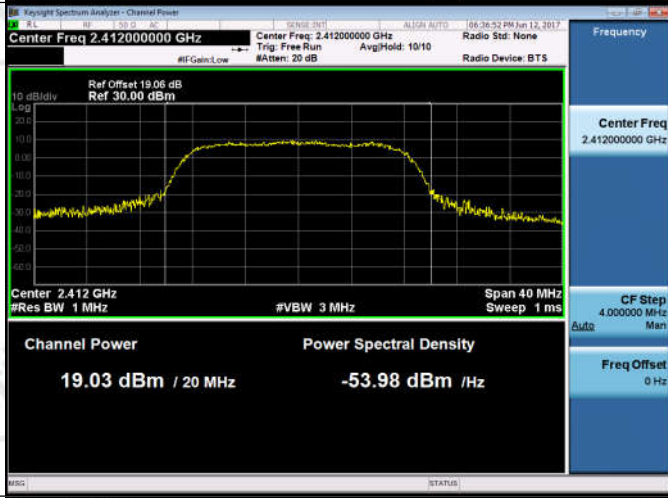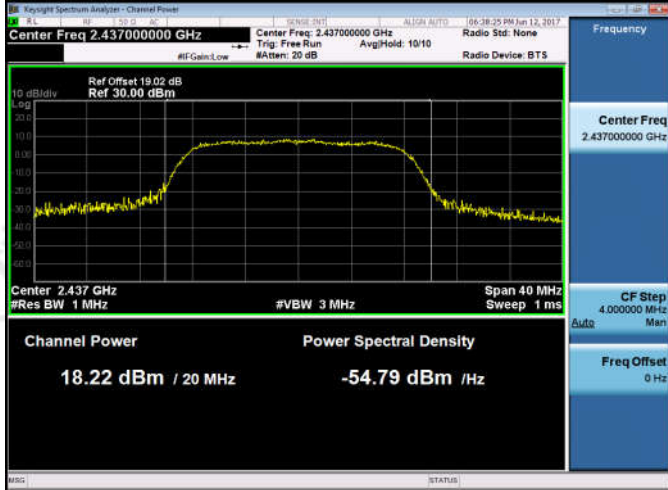
<p>11B/HCH</p>	 <p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.46200000 GHz</p> <p>Channel Power: 18.65 dBm / 20 MHz</p> <p>Power Spectral Density: -54.36 dBm / Hz</p>
<p>11G/LCH</p>	 <p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.41200000 GHz</p> <p>Channel Power: 19.03 dBm / 20 MHz</p> <p>Power Spectral Density: -53.98 dBm / Hz</p>
<p>11G/MCH</p>	 <p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.43700000 GHz</p> <p>Channel Power: 18.22 dBm / 20 MHz</p> <p>Power Spectral Density: -54.79 dBm / Hz</p>

<p>11G/HCH</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Channel Power: 17.70 dBm / 20 MHz</p> <p>Power Spectral Density: -55.31 dBm / Hz</p>
<p>11N20SISO/LCH</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Radio Std: None</p> <p>Ref Offset 19.06 dB Ref 20.00 dBm</p> <p>Channel Power: 16.71 dBm / 20 MHz</p> <p>Power Spectral Density: -56.30 dBm / Hz</p>
<p>11N20SISO/MCH</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None</p> <p>Ref Offset 19.02 dB Ref 20.00 dBm</p> <p>Channel Power: 15.96 dBm / 20 MHz</p> <p>Power Spectral Density: -57.05 dBm / Hz</p>

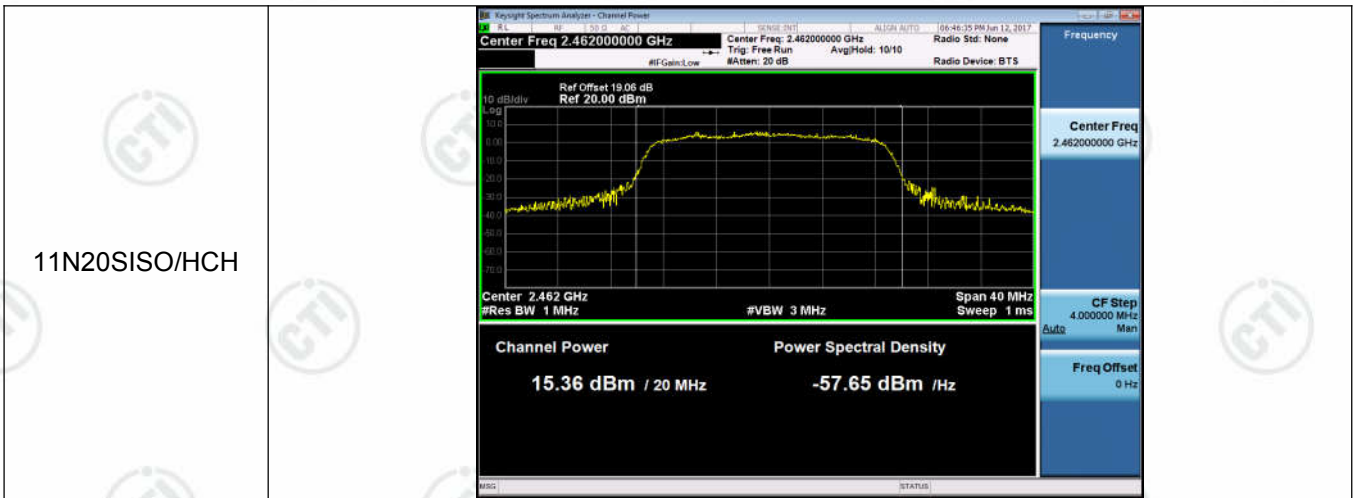




Appendix B): 6dB Occupied Bandwidth

Result Table


Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
11B	LCH	8.068	12.286	PASS	Peak detector
11B	MCH	7.376	12.206	PASS	
11B	HCH	7.502	12.182	PASS	
11G	LCH	15.63	16.314	PASS	
11G	MCH	15.68	16.312	PASS	
11G	HCH	15.62	16.309	PASS	
11N20SISO	LCH	16.08	17.475	PASS	
11N20SISO	MCH	16.09	17.491	PASS	
11N20SISO	HCH	16.28	17.491	PASS	

Test Graph

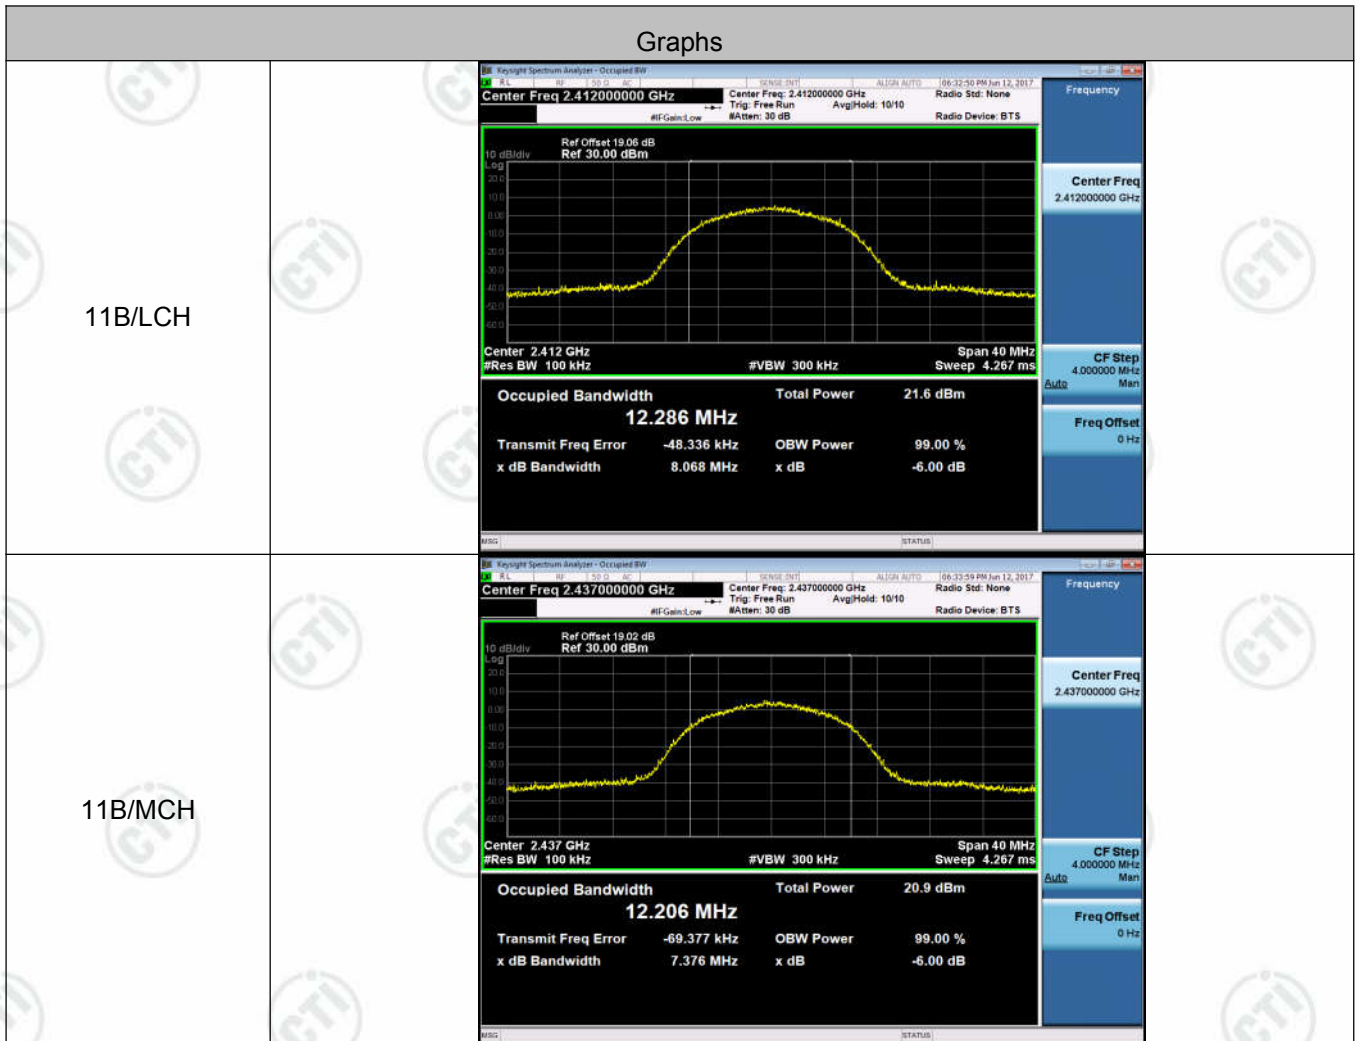
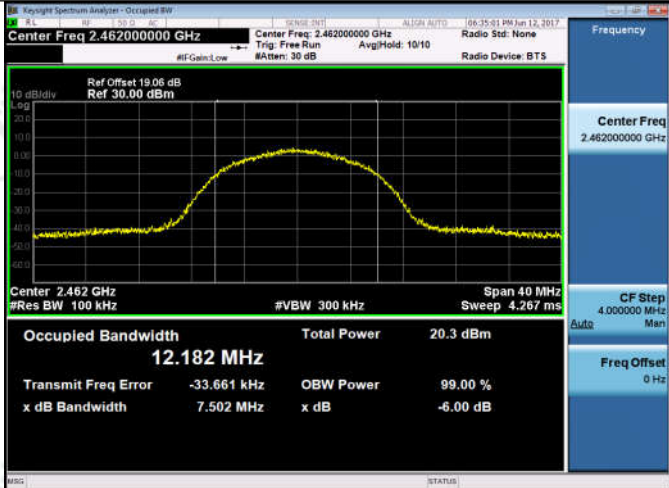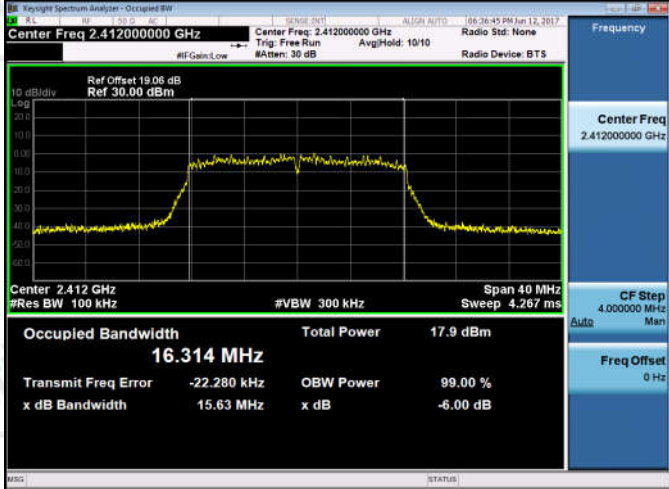
<p>11B/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center: 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 12.182 MHz</p> <p>Total Power: 20.3 dBm</p> <p>Transmit Freq Error: -33.661 kHz</p> <p>x dB Bandwidth: 7.502 MHz</p>
<p>11G/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center: 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 16.314 MHz</p> <p>Total Power: 17.9 dBm</p> <p>Transmit Freq Error: -22.280 kHz</p> <p>x dB Bandwidth: 15.63 MHz</p>
<p>11G/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 30.00 dBm</p> <p>Center: 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 16.312 MHz</p> <p>Total Power: 17.1 dBm</p> <p>Transmit Freq Error: -24.238 kHz</p> <p>x dB Bandwidth: 15.68 MHz</p>

<p>11G/HCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center: 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 16.309 MHz</p> <p>Total Power: 16.5 dBm</p> <p>Transmit Freq Error: -10.668 kHz</p> <p>x dB Bandwidth: 15.62 MHz</p>	<p>Frequency</p> <p>Center Freq 2.46200000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>11N20SISO/LCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center: 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 17.475 MHz</p> <p>Total Power: 15.8 dBm</p> <p>Transmit Freq Error: -14.537 kHz</p> <p>x dB Bandwidth: 16.08 MHz</p>	<p>Frequency</p> <p>Center Freq 2.41200000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>11N20SISO/MCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset 19.02 dB Ref 30.00 dBm</p> <p>Center: 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 17.491 MHz</p> <p>Total Power: 14.9 dBm</p> <p>Transmit Freq Error: -26.330 kHz</p> <p>x dB Bandwidth: 16.09 MHz</p>	<p>Frequency</p> <p>Center Freq 2.43700000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p>

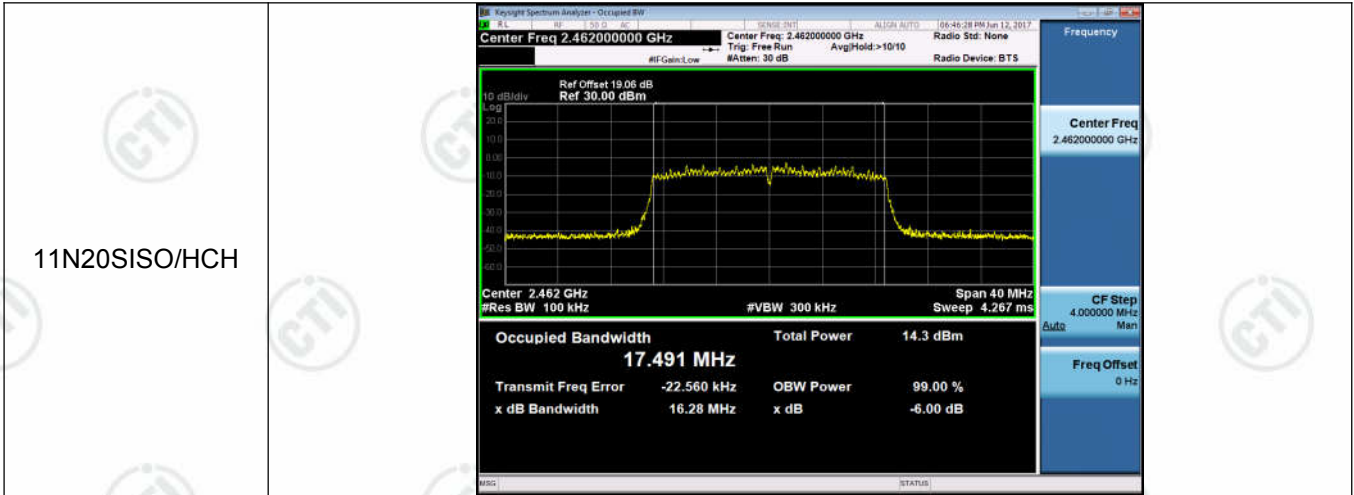

Appendix C): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	6.581	-47.909	-23.420	PASS
11B	HCH	3.708	-49.696	-26.29	PASS
11G	LCH	0.399	-45.020	-29.600	PASS
11G	HCH	-0.943	-47.563	-30.940	PASS
11N20SISO	LCH	-1.534	-46.685	-31.530	PASS
11N20SISO	HCH	-2.682	-48.818	-32.680	PASS

Test Graph



<p>11G/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>F</th> <th>F</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.413240 GHz</td> <td></td> <td></td> <td>0.399 dBm</td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.400000 GHz</td> <td></td> <td></td> <td>-41.500 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.390000 GHz</td> <td></td> <td></td> <td>-46.310 dBm</td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.387955 GHz</td> <td></td> <td></td> <td>-45.020 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SCN	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.413240 GHz			0.399 dBm		2	N	1	f		2.400000 GHz			-41.500 dBm		3	N	1	f		2.390000 GHz			-46.310 dBm		4	N	1	f		2.387955 GHz			-45.020 dBm		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.387500000 GHz</p> <p>Start Freq 2.355000000 GHz</p> <p>Stop Freq 2.420000000 GHz</p> <p>CF Step 5.5000000 MHz</p> <p>Freq Offset 0 Hz</p>
MNR	MODE	TRIG	SCN	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f		2.413240 GHz			0.399 dBm																																												
2	N	1	f		2.400000 GHz			-41.500 dBm																																												
3	N	1	f		2.390000 GHz			-46.310 dBm																																												
4	N	1	f		2.387955 GHz			-45.020 dBm																																												
<p>11G/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>F</th> <th>F</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.46325 GHz</td> <td></td> <td></td> <td>0.943 dBm</td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.48350 GHz</td> <td></td> <td></td> <td>-49.080 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.50000 GHz</td> <td></td> <td></td> <td>-52.435 dBm</td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.48460 GHz</td> <td></td> <td></td> <td>-47.563 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SCN	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.46325 GHz			0.943 dBm		2	N	1	f		2.48350 GHz			-49.080 dBm		3	N	1	f		2.50000 GHz			-52.435 dBm		4	N	1	f		2.48460 GHz			-47.563 dBm		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.475000000 GHz</p> <p>Start Freq 2.450000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 5.0000000 MHz</p> <p>Freq Offset 0 Hz</p>
MNR	MODE	TRIG	SCN	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f		2.46325 GHz			0.943 dBm																																												
2	N	1	f		2.48350 GHz			-49.080 dBm																																												
3	N	1	f		2.50000 GHz			-52.435 dBm																																												
4	N	1	f		2.48460 GHz			-47.563 dBm																																												
<p>11N20SISO/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>F</th> <th>F</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.413240 GHz</td> <td></td> <td></td> <td>-1.534 dBm</td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.400000 GHz</td> <td></td> <td></td> <td>-45.551 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.390000 GHz</td> <td></td> <td></td> <td>-48.885 dBm</td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.389970 GHz</td> <td></td> <td></td> <td>-46.685 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SCN	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.413240 GHz			-1.534 dBm		2	N	1	f		2.400000 GHz			-45.551 dBm		3	N	1	f		2.390000 GHz			-48.885 dBm		4	N	1	f		2.389970 GHz			-46.685 dBm		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.387500000 GHz</p> <p>Start Freq 2.355000000 GHz</p> <p>Stop Freq 2.420000000 GHz</p> <p>CF Step 5.5000000 MHz</p> <p>Freq Offset 0 Hz</p>
MNR	MODE	TRIG	SCN	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f		2.413240 GHz			-1.534 dBm																																												
2	N	1	f		2.400000 GHz			-45.551 dBm																																												
3	N	1	f		2.390000 GHz			-48.885 dBm																																												
4	N	1	f		2.389970 GHz			-46.685 dBm																																												

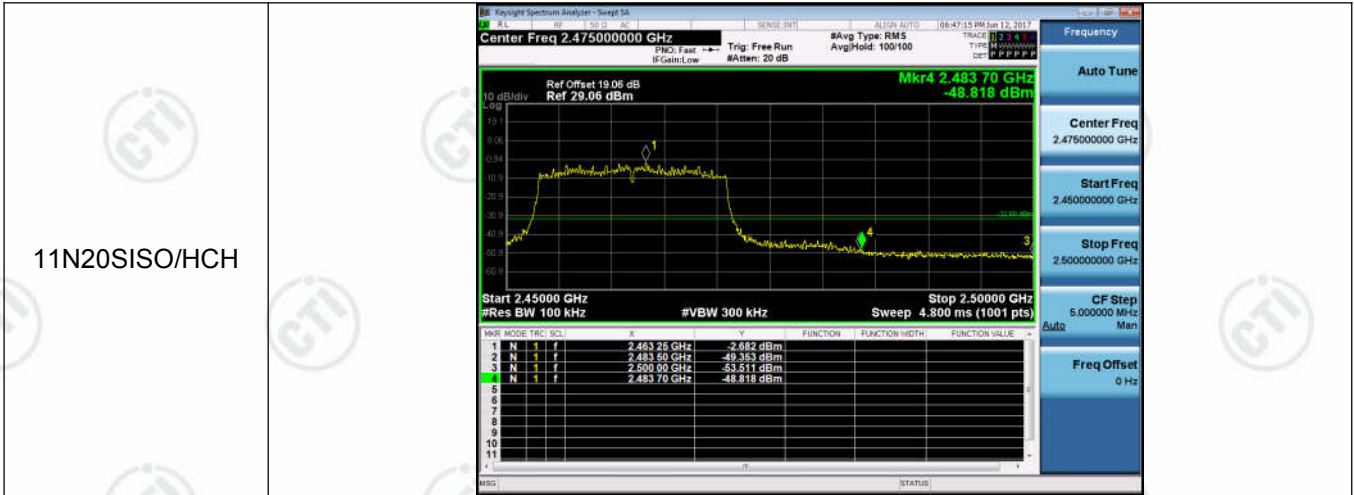


Appendix D): RF Conducted Spurious Emissions

Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	6.437	<Limit	PASS
11B	MCH	5.534	<Limit	PASS
11B	HCH	4.654	<Limit	PASS
11G	LCH	0.459	<Limit	PASS
11G	MCH	-0.278	<Limit	PASS
11G	HCH	-0.769	<Limit	PASS
11N20SISO	LCH	-1.593	<Limit	PASS
11N20SISO	MCH	-2.047	<Limit	PASS
11N20SISO	HCH	-2.607	<Limit	PASS

Test Graph

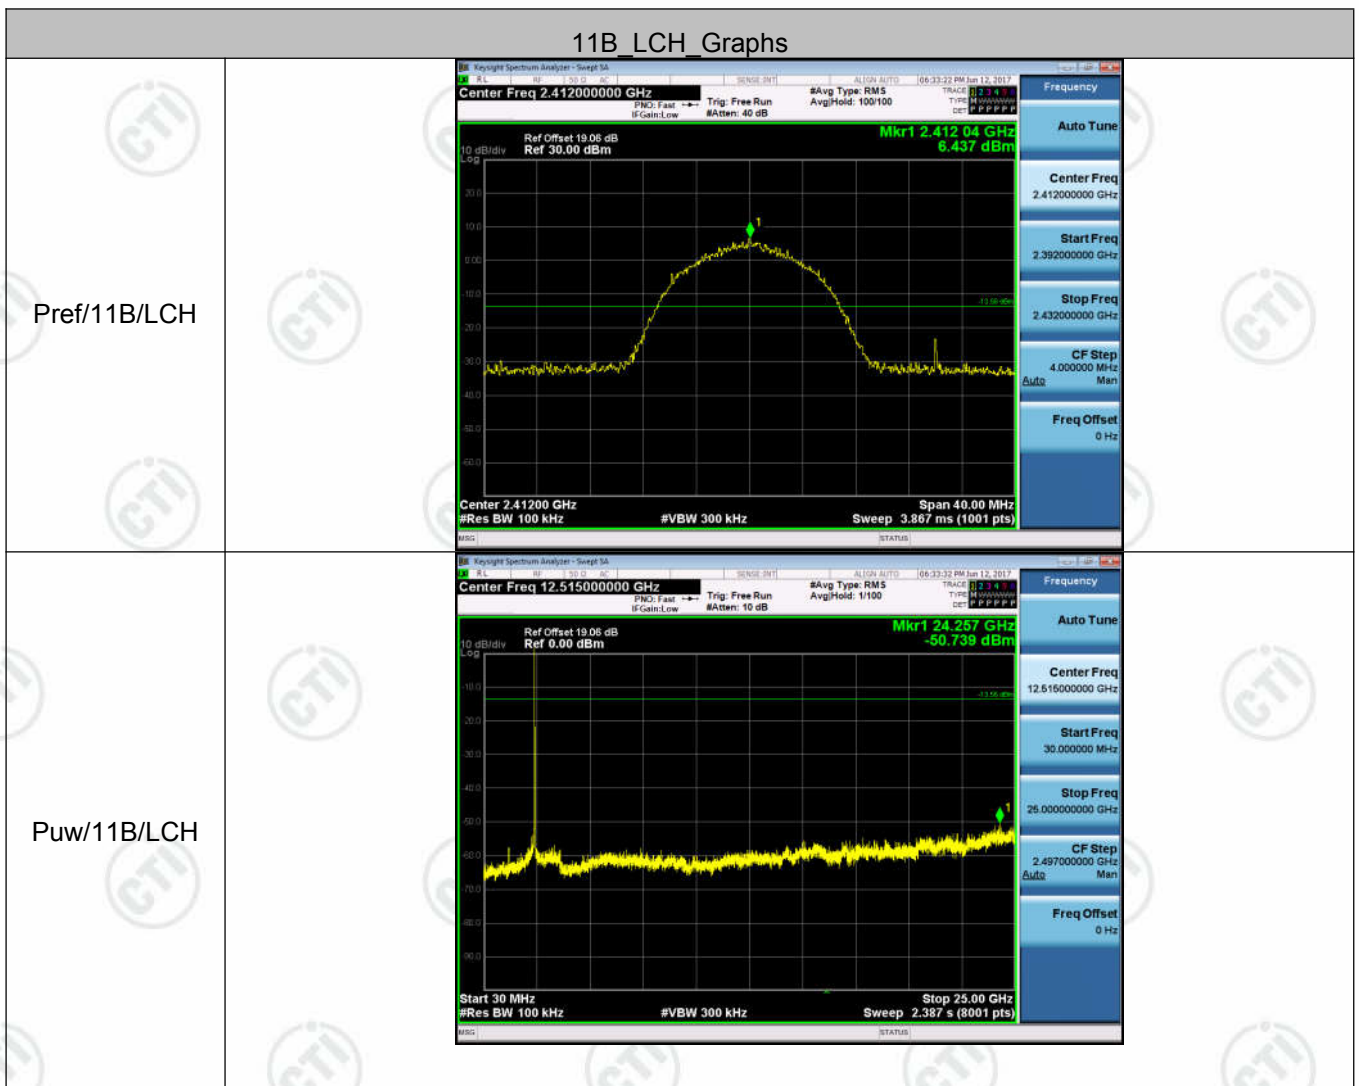


11B_MCH_Graphs



<p>Pref/11B/MCH</p>	
<p>Puw/11B/MCH</p>	

11B_HCH_Graphs



<p>Pref/11B/HCH</p>	
---------------------	--

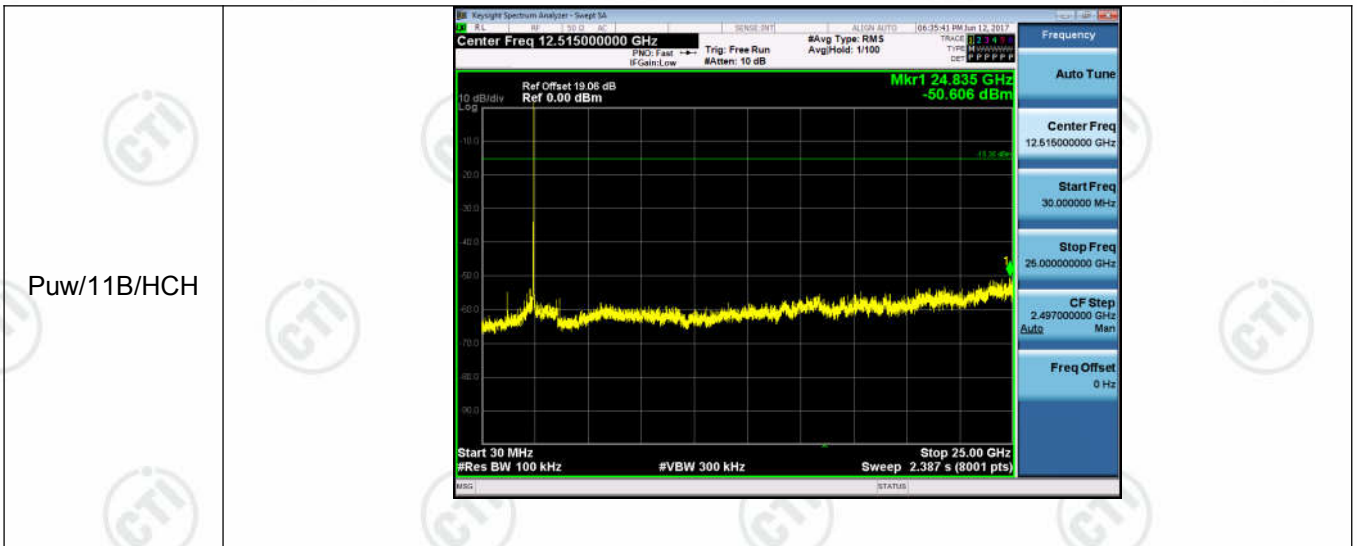


11G LCH_Graphs

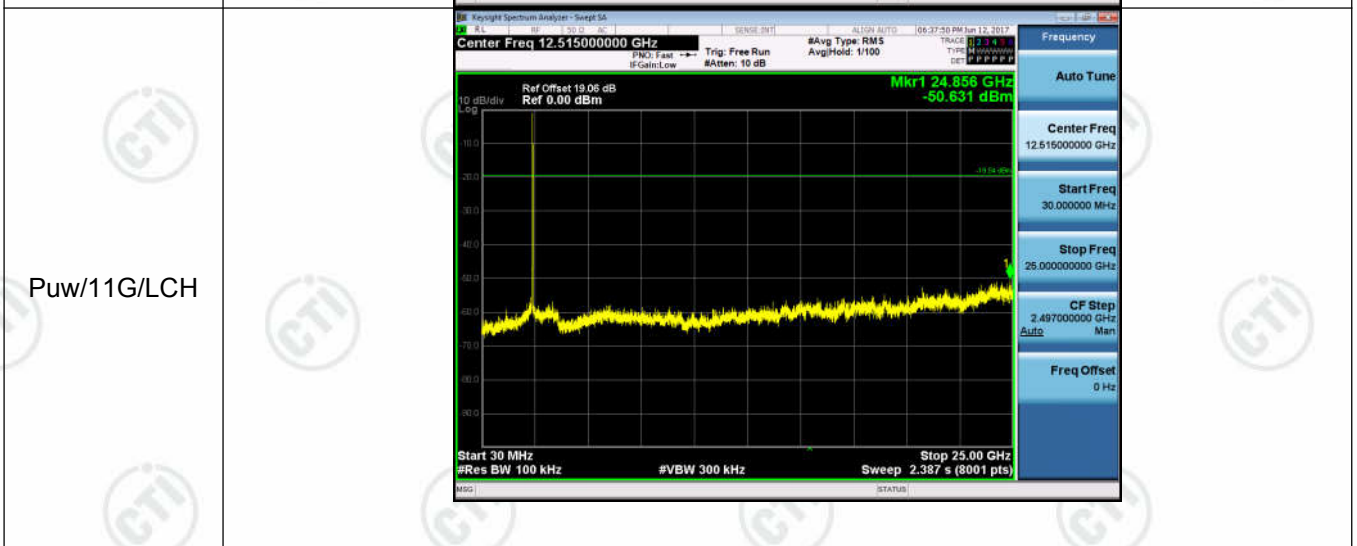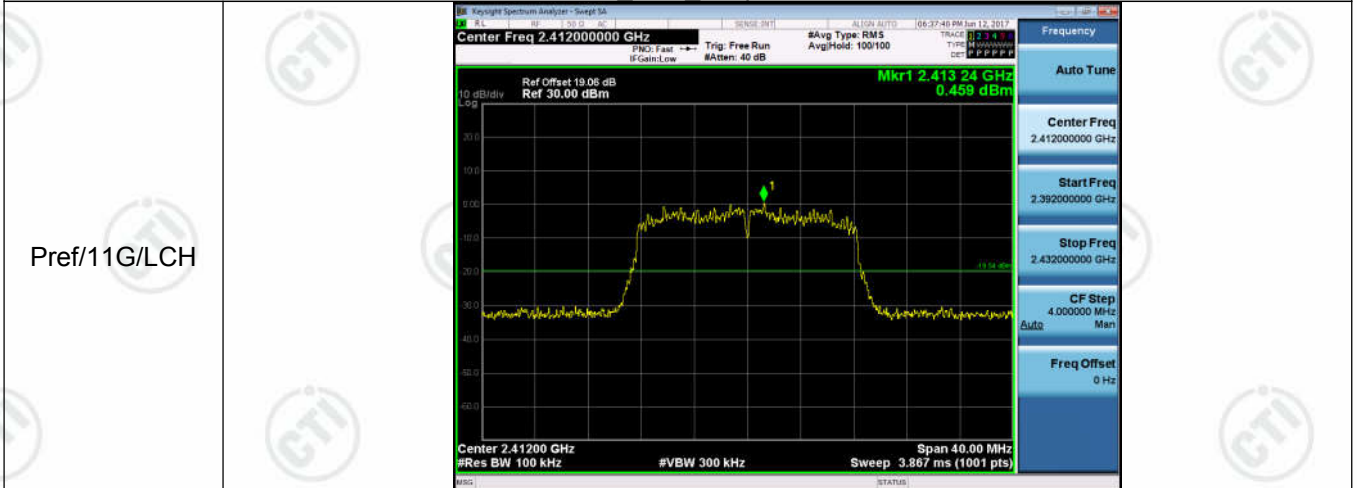


11G_MCH_Graphs


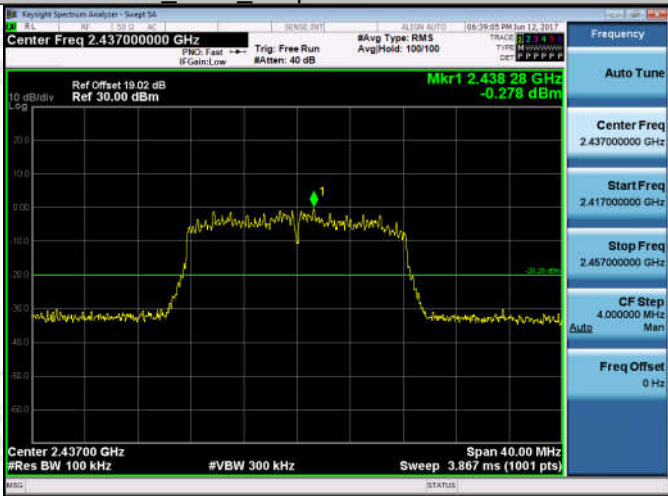
<p>Pref/11G/MCH</p>	
<p>Puw/11G/MCH</p>	

11G_HCH_Graphs
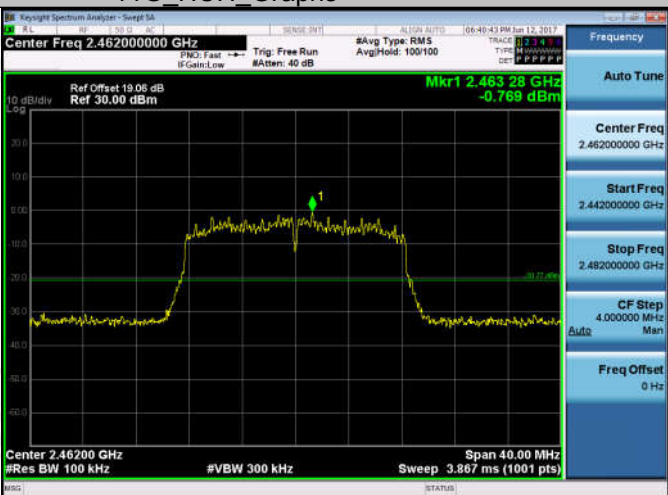
<p>Pref/11G/HCH</p>	
---------------------	--

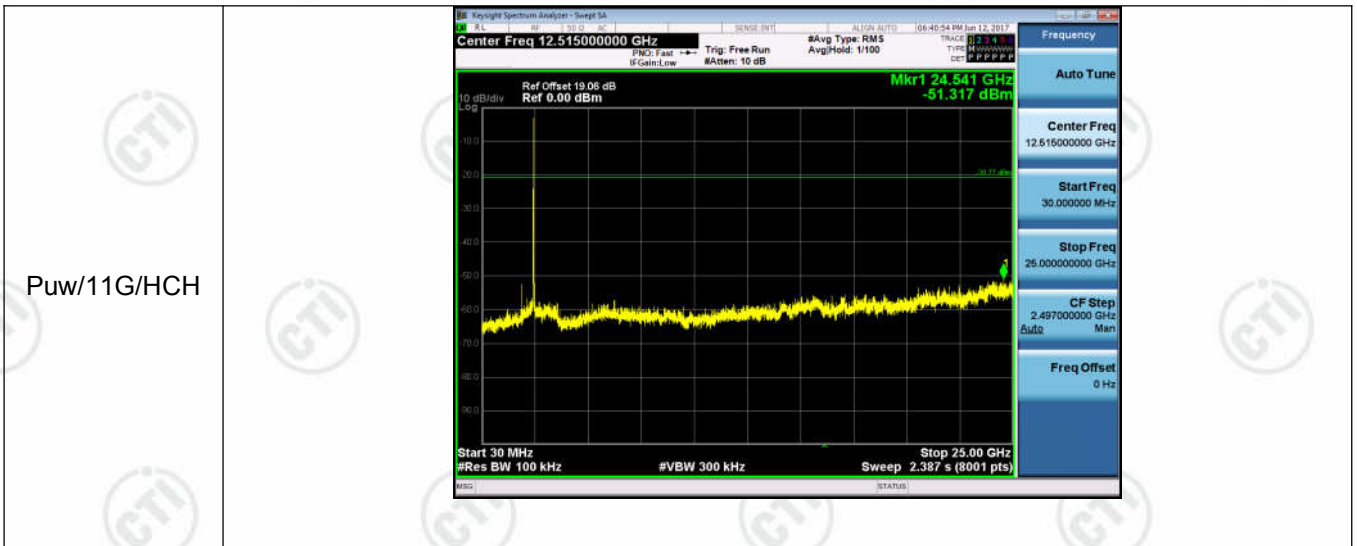


11N20SISO LCH_Graphs

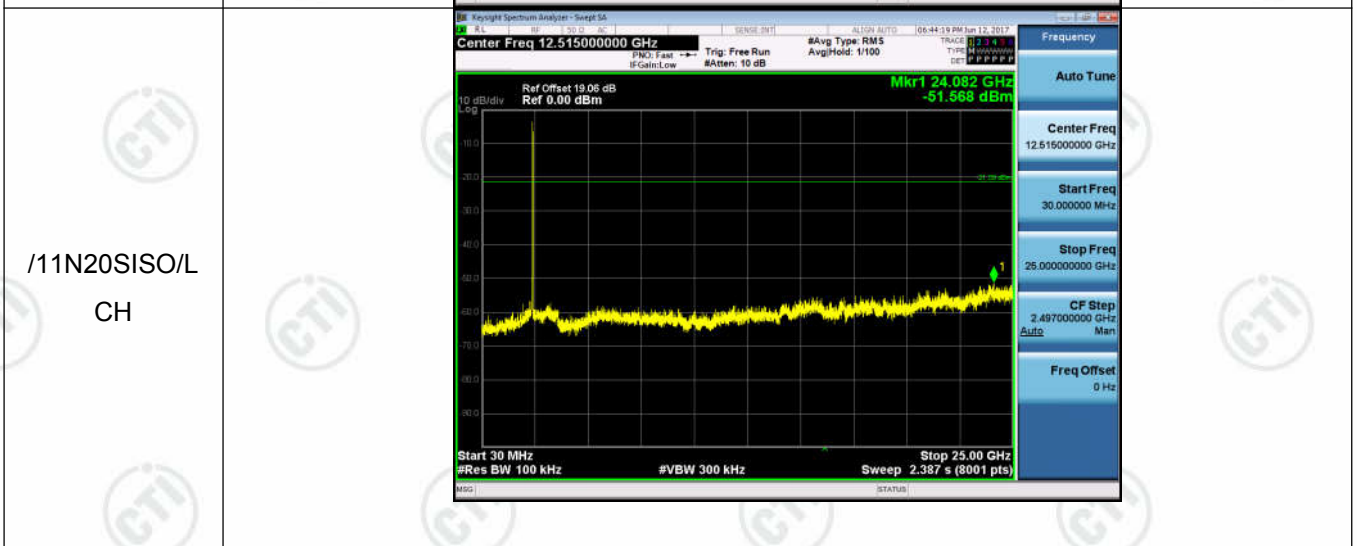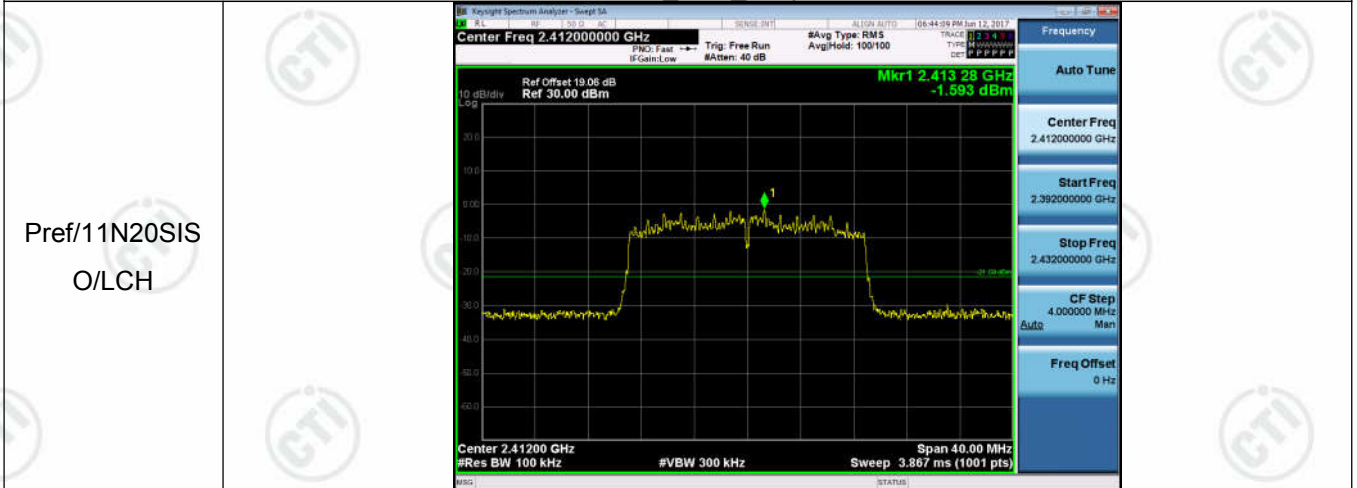


11N20SISO_MCH_Graphs

Pref/11N20SIS
O/MCH

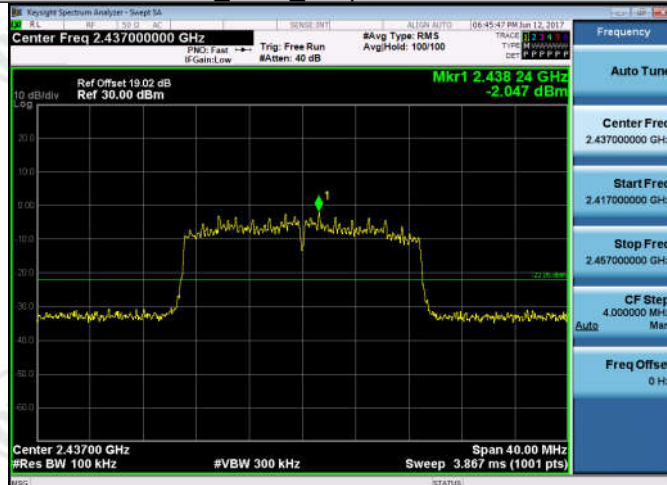



Puw/11N20SIS
O/MCH

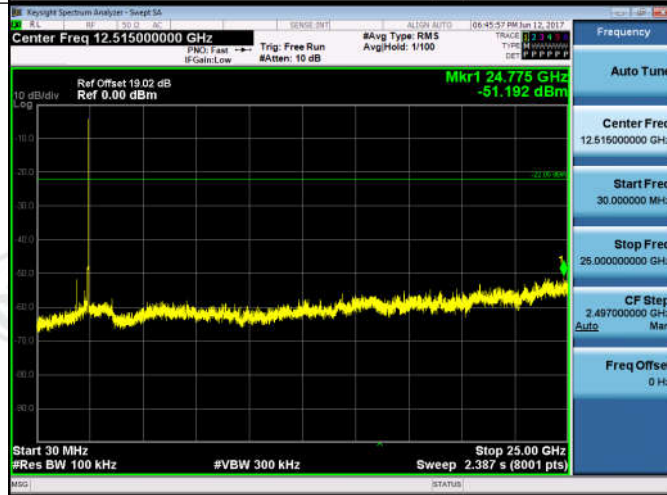

11N20SISO_HCH_Graphs

Pref/11N20SIS
O/HCH

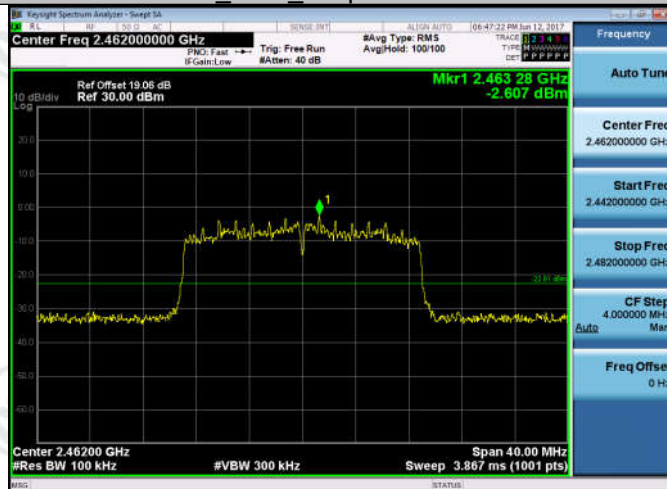


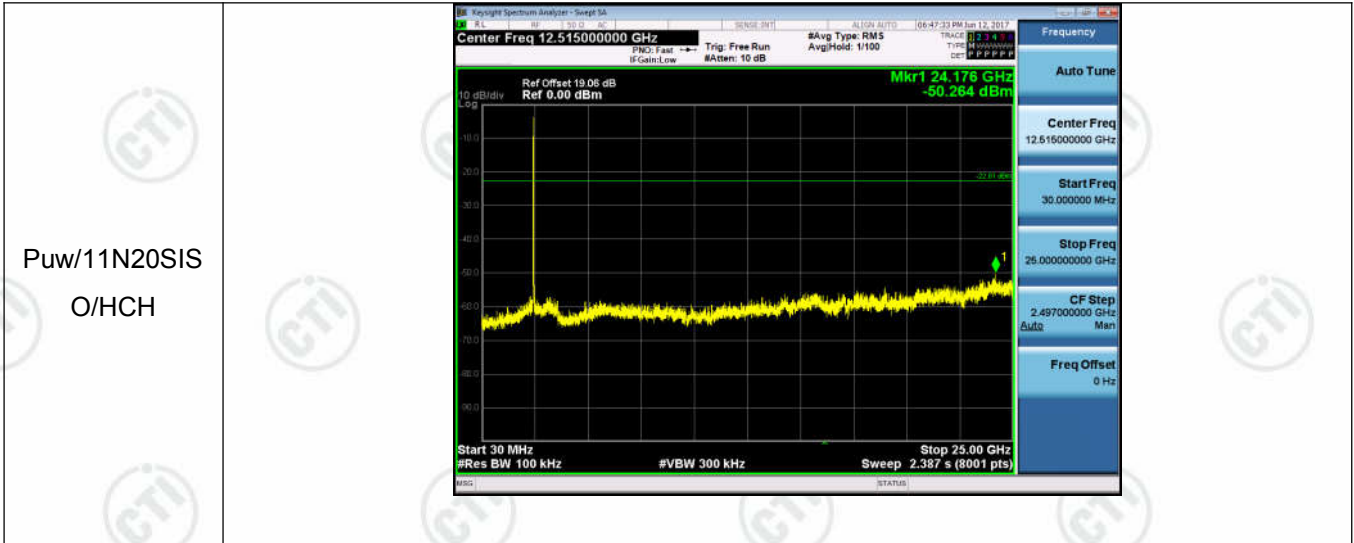

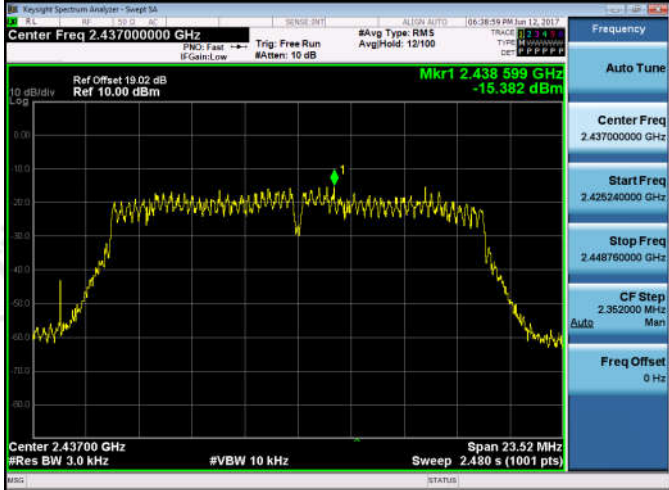





Appendix E): Power Spectral Density


Result Table

Mode	Channel	Power Spectral Density [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	LCH	-9.432	8	PASS
11B	MCH	-9.495	8	PASS
11B	HCH	-10.790	8	PASS
11G	LCH	-14.745	8	PASS
11G	MCH	-15.382	8	PASS
11G	HCH	-15.243	8	PASS
11N20SISO	LCH	-16.380	8	PASS
11N20SISO	MCH	-17.476	8	PASS
11N20SISO	HCH	-17.398	8	PASS

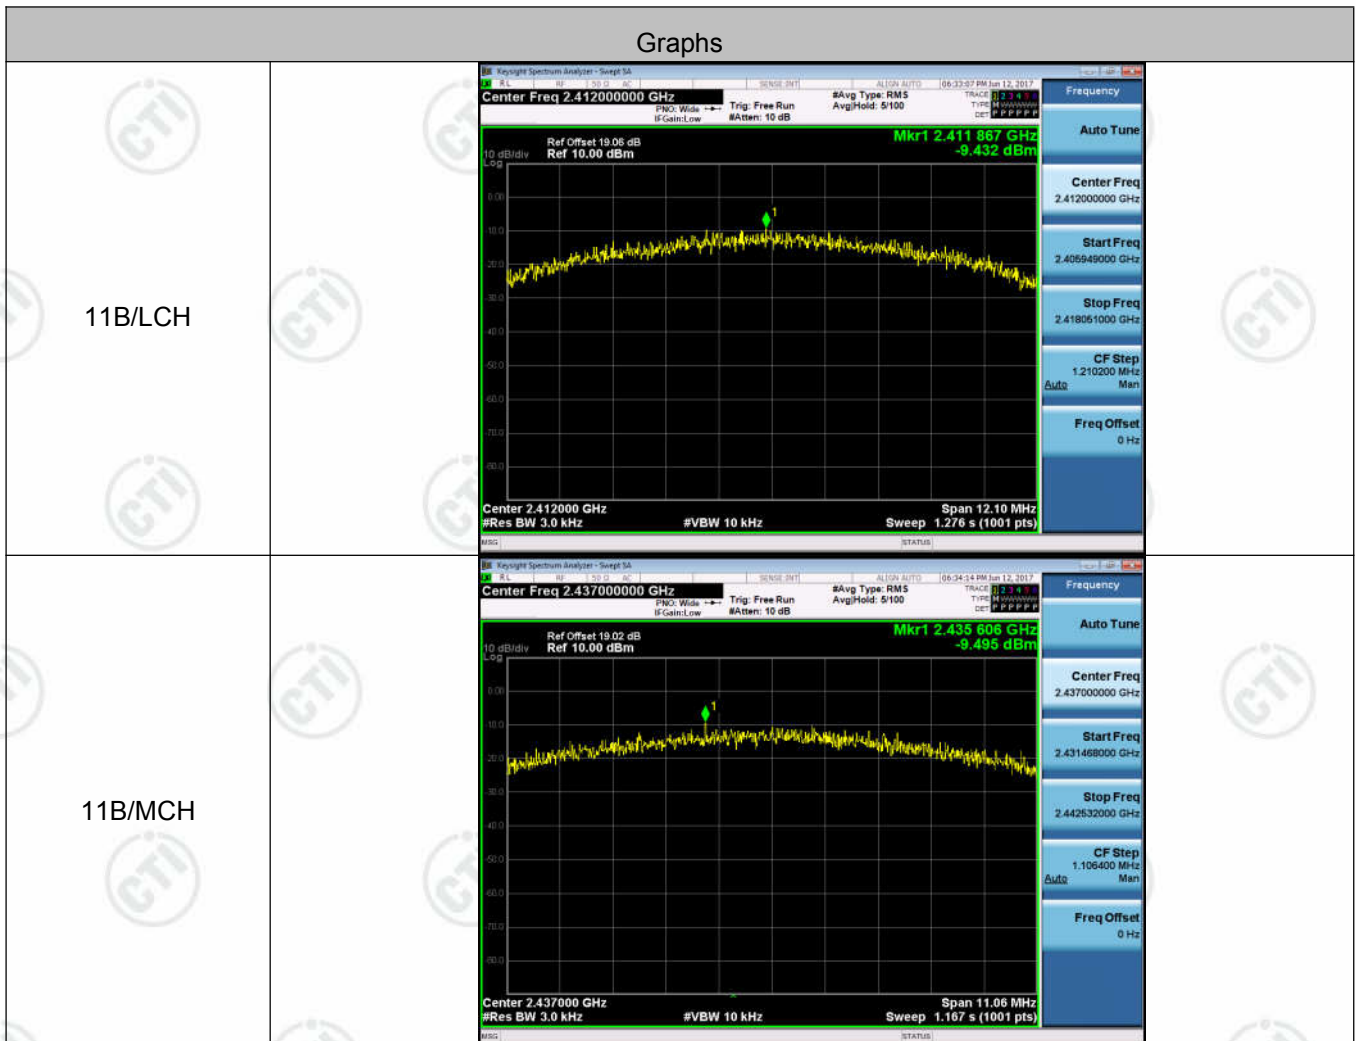
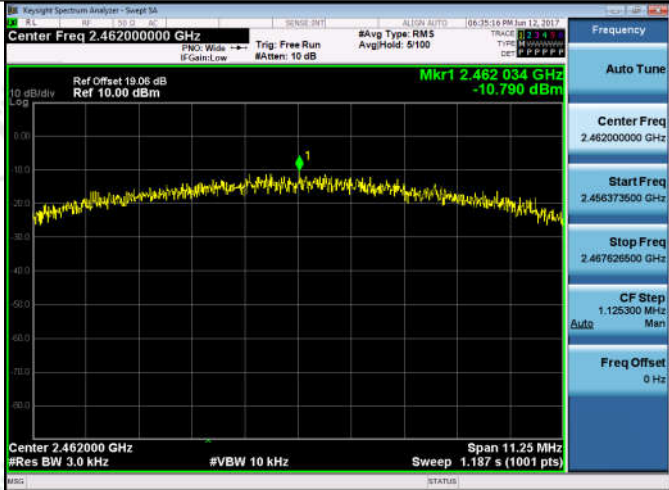
<p>11B/HCH</p>		
<p>11G/LCH</p>		
<p>11G/MCH</p>		
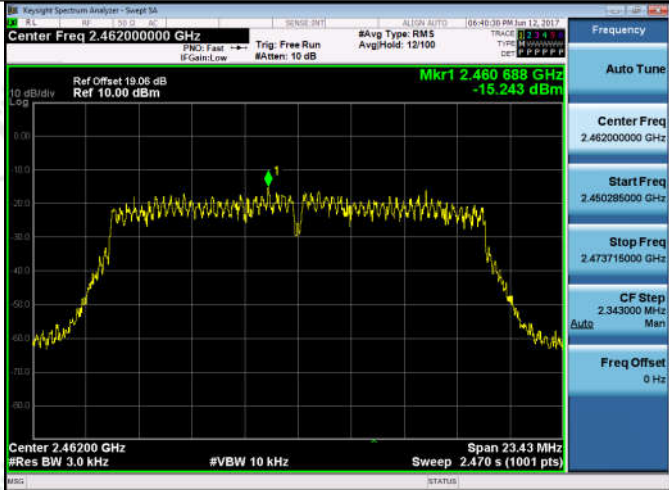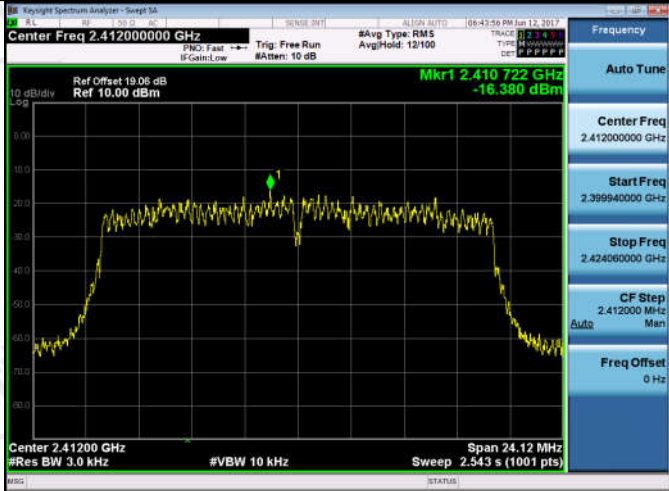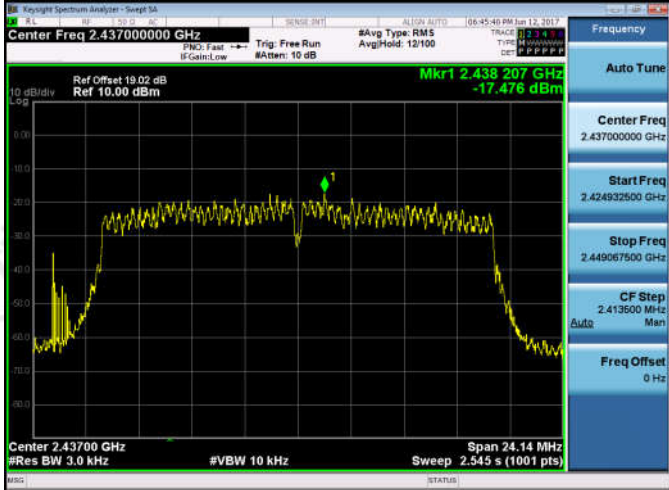
<p>11G/HCH</p>		
<p>11N20SISO/LCH</p>		
<p>11N20SISO/MCH</p>		

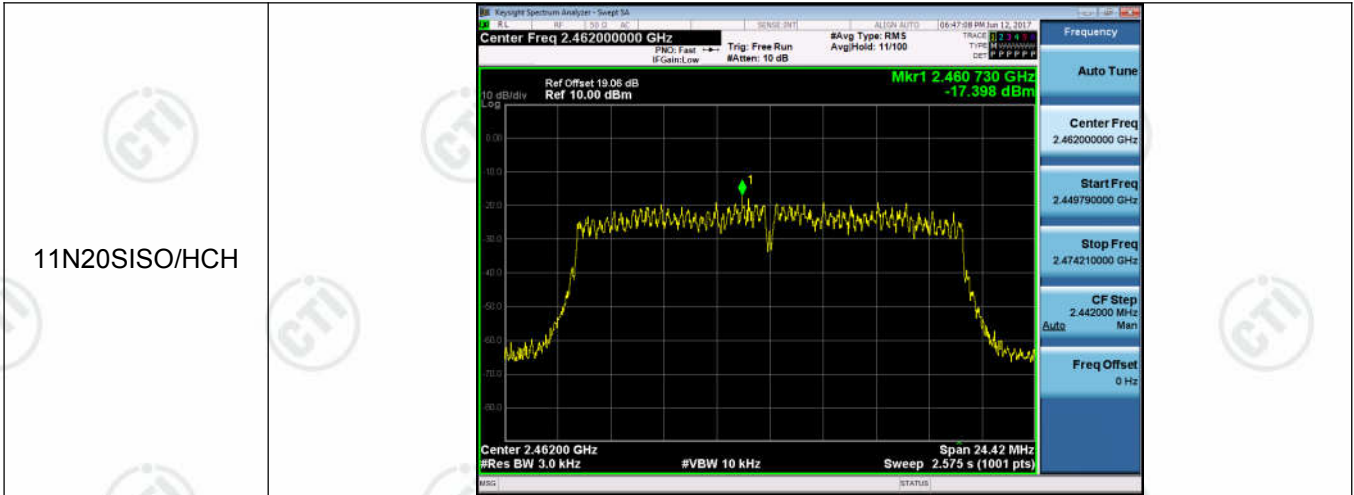

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1dBi.

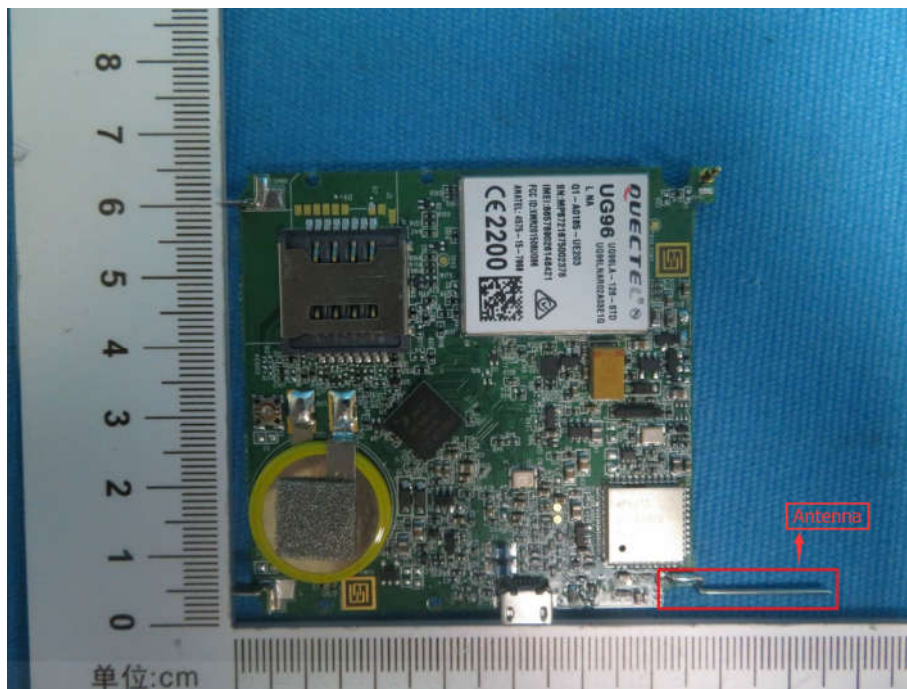

Appendix G): AC Power Line Conducted Emission

<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="464 1088 1331 1308"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


90.0 dBpW

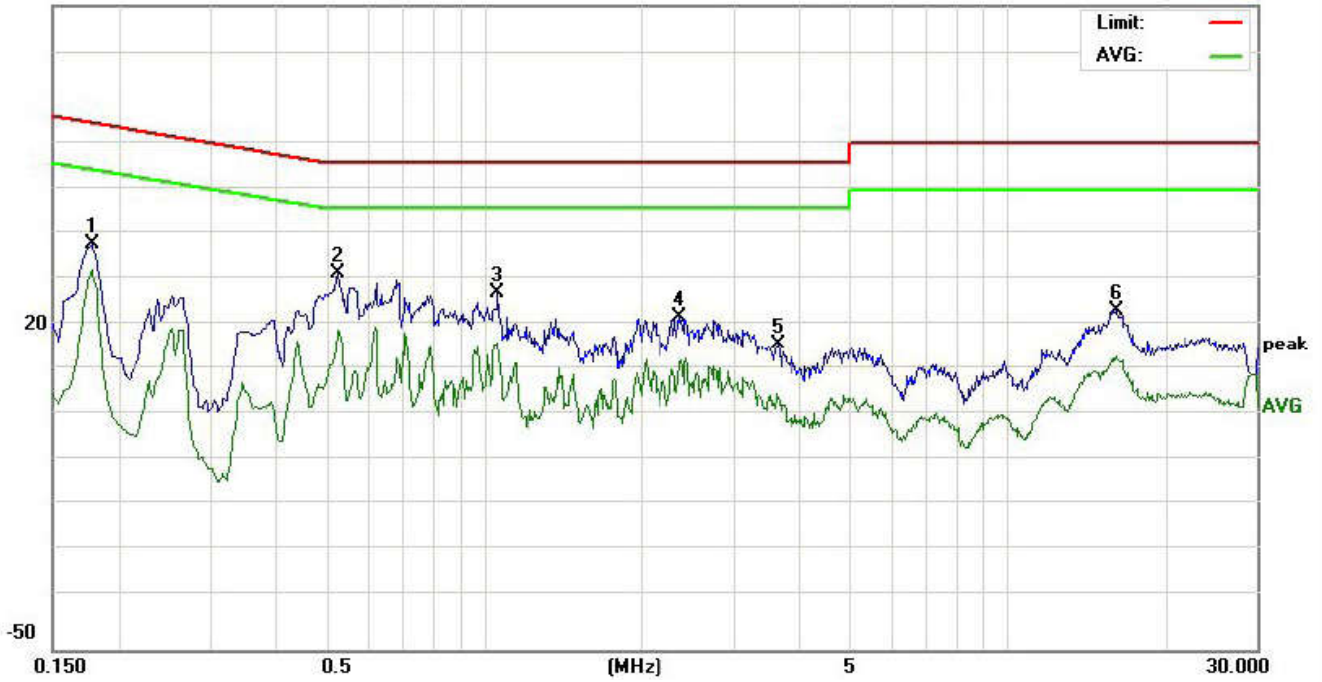

No.	Freq. MHz	Reading_Level (dBpW)			Correct Factor dB	Measurement (dBpW)			Limit (dBpW)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1779	28.12	25.31	22.80	9.76	37.88	35.07	32.56	64.58	54.58	-29.51	-22.02	P	
2	0.5260	22.17	18.74	9.86	9.57	31.74	28.31	19.43	56.00	46.00	-27.69	-26.57	P	
3	1.0620	17.91	13.24	6.90	9.51	27.42	22.75	16.41	56.00	46.00	-33.25	-29.59	P	
4	2.3660	12.45	9.33	2.36	9.70	22.15	19.03	12.06	56.00	46.00	-36.97	-33.94	P	
5	3.6539	6.59	3.65	-5.00	9.73	16.32	13.38	4.73	56.00	46.00	-42.62	-41.27	P	
6	16.1579	14.49	10.24	4.06	9.35	23.84	19.59	13.41	60.00	50.00	-40.41	-36.59	P	

Neutral line:

90.0 dBpW

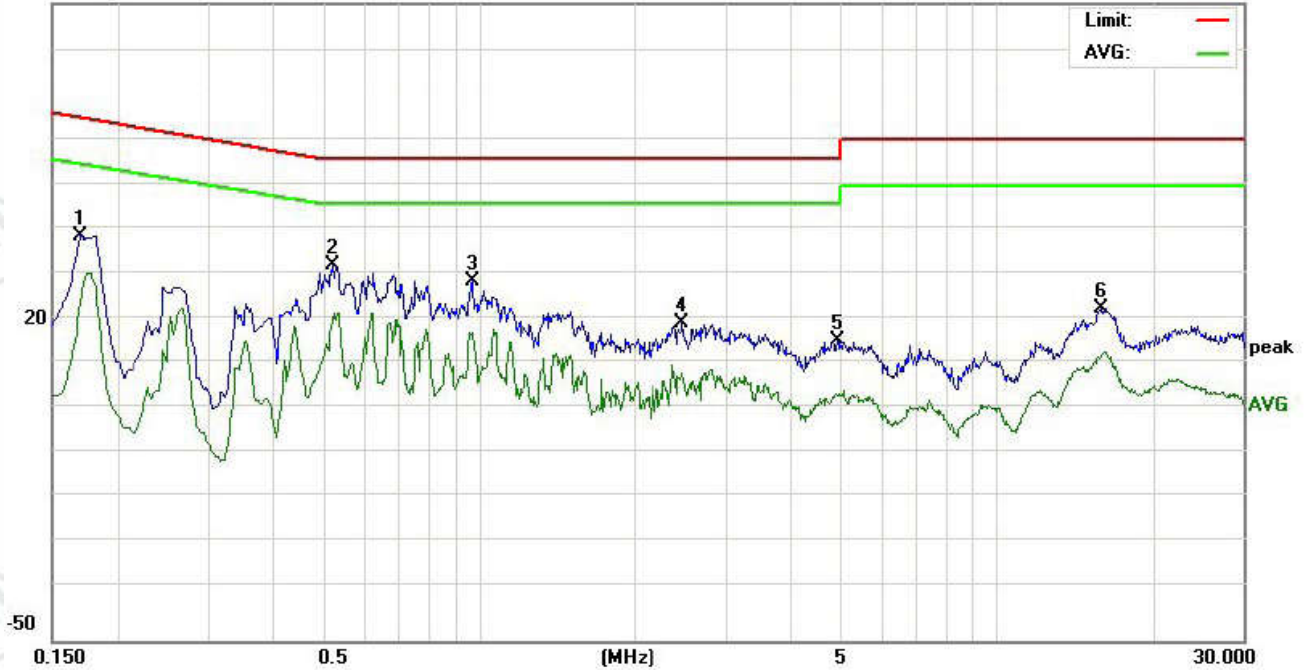

No.	Freq. MHz	Reading_Level (dBpW)			Correct Factor dB	Measurement (dBpW)			Limit (dBpW)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	29.06	24.51	14.97	9.77	38.83	34.28	24.74	64.96	54.96	-30.68	-30.22	P	
2	0.5220	22.75	19.14	10.82	9.57	32.32	28.71	20.39	56.00	46.00	-27.29	-25.61	P	
3	0.9700	19.39	15.32	8.22	9.50	28.89	24.82	17.72	56.00	46.00	-31.18	-28.28	P	
4	2.4820	10.02	8.51	-0.98	9.72	19.74	18.23	8.74	56.00	46.00	-37.77	-37.26	P	
5	4.9499	6.23	4.75	-5.96	9.60	15.83	14.35	3.64	56.00	46.00	-41.65	-42.36	P	
6	15.9859	13.69	10.36	2.83	9.34	23.03	19.70	12.17	60.00	50.00	-40.30	-37.83	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. AC120V and 240V are tested and found the worst case is 120V, So only the 120V data were shown in the above.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			


Test plot as follows:

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

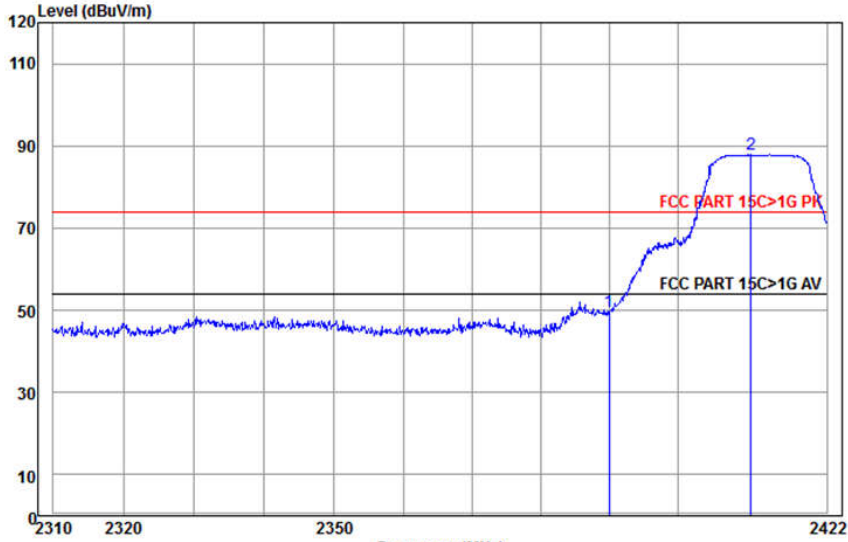


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	57.95	49.60	74.00	-24.40	Horizontal
2 pp	2410.788	32.58	3.17	44.05	96.16	87.86	74.00	13.86	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

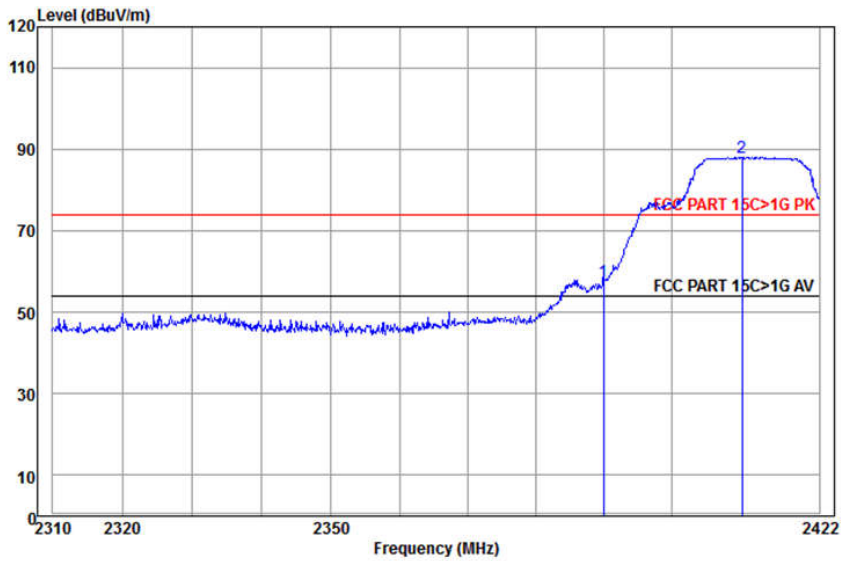


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	66.03	57.68	74.00	-16.32	Vertical
2 pp	2410.568	32.57	3.17	44.05	96.20	87.89	74.00	13.89	Vertical

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Average

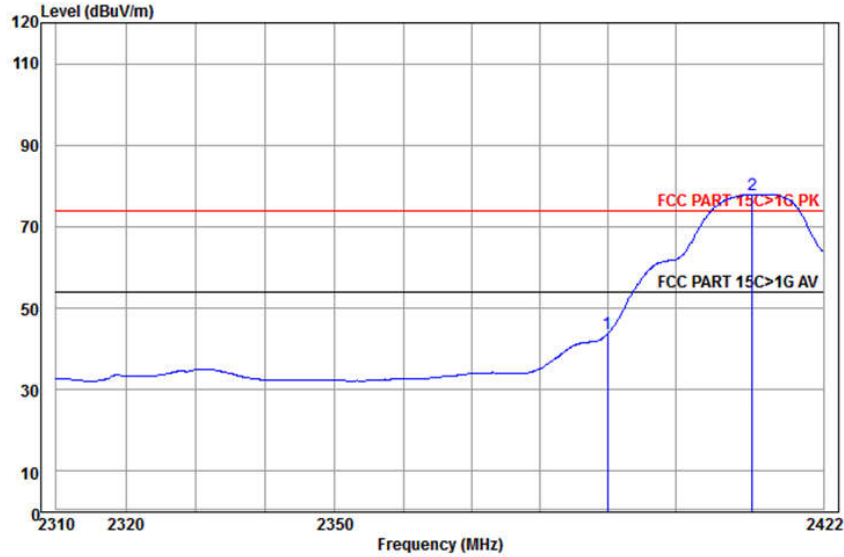


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	52.24	43.89	74.00	-30.11	Vertical
2 pp	2411.359	32.58	3.17	44.05	86.23	77.93	74.00	3.93	Vertical

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

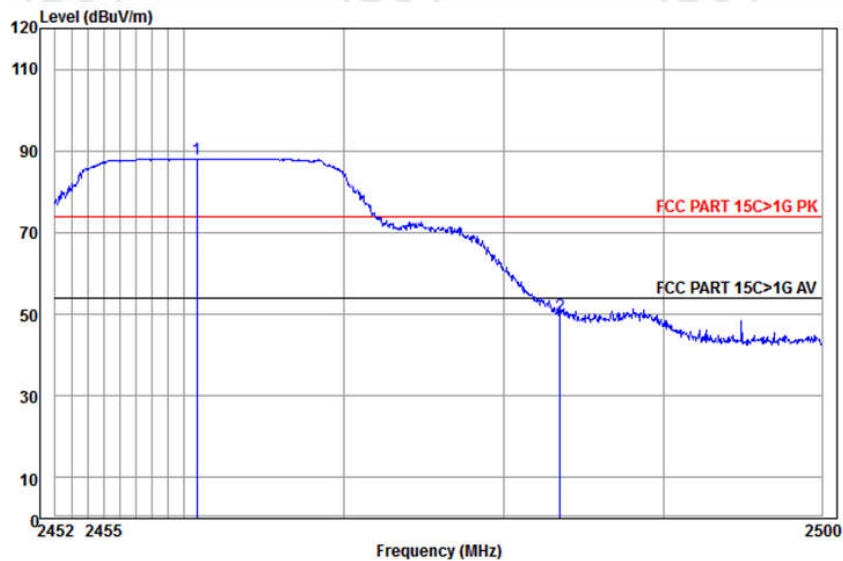


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.810	32.67	3.20	44.11	96.26	88.02	74.00	14.02	Horizontal
2	2483.500	32.71	3.22	44.14	58.03	49.82	74.00	-24.18	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

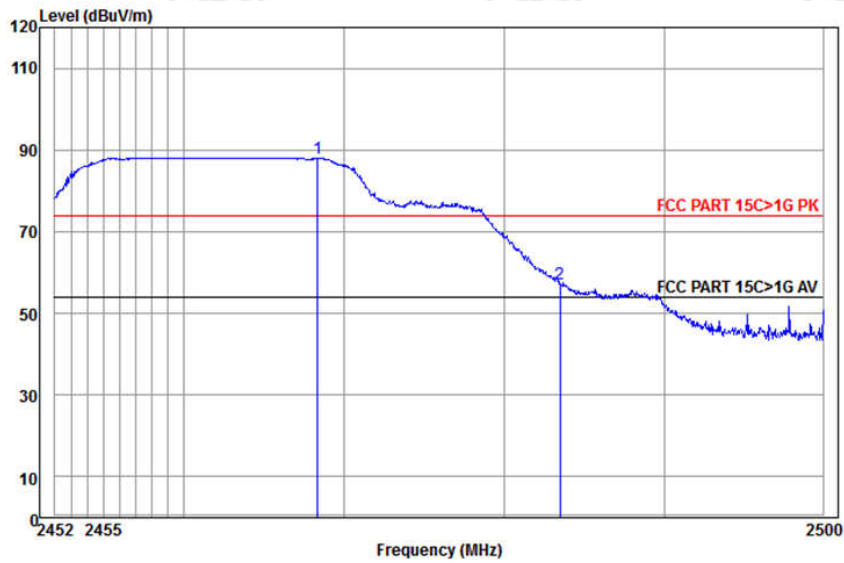


	Ant Freq	Cable Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2468.312	32.69	3.21	44.12	96.27	88.05	74.00	14.05 Vertical
2	2483.479	32.71	3.22	44.14	65.40	57.19	74.00	-16.81 Vertical

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

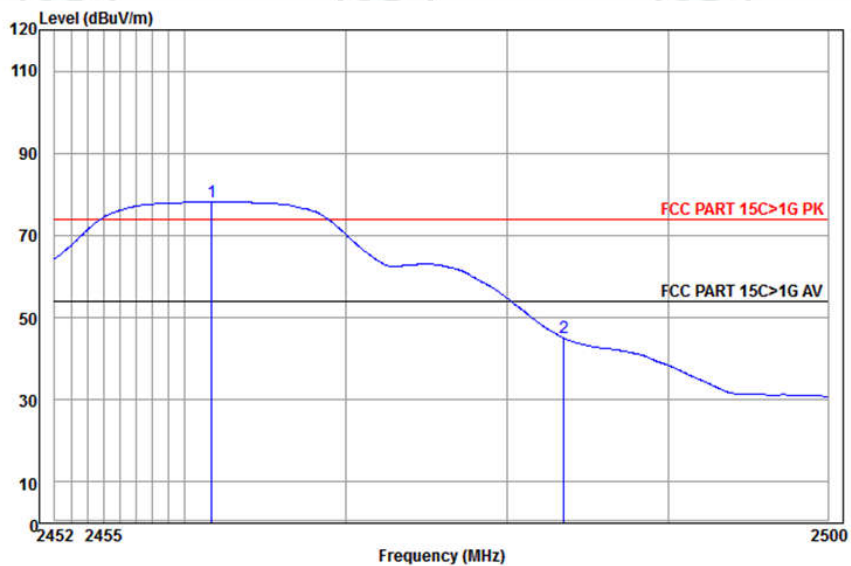


	Ant Freq	Cable Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2461.669	32.67	3.20	44.11	86.52	78.28	74.00	4.28 Vertical
2	2483.500	32.71	3.22	44.14	53.18	44.97	74.00	-29.03 Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

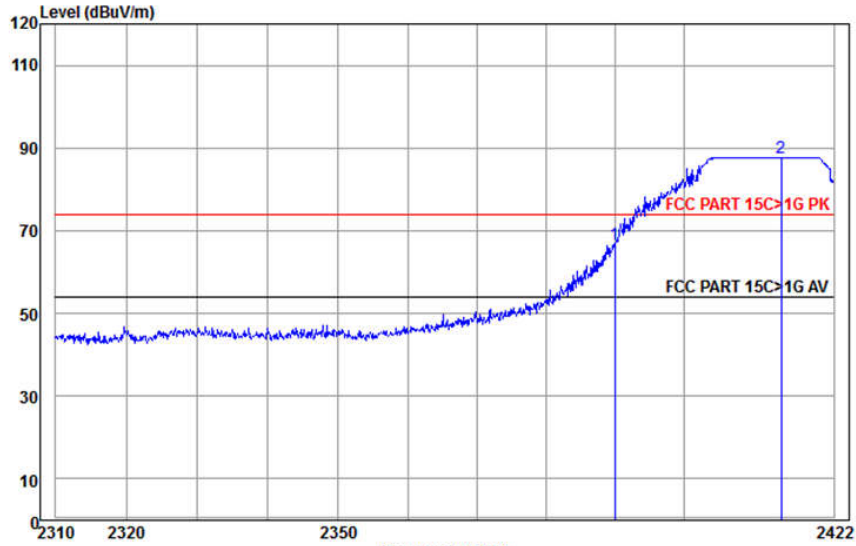


Frequency (MHz)									
	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	75.13	66.78	74.00	-7.22	Horizontal
2 pp	2414.329	32.58	3.17	44.06	96.08	87.77	74.00	13.77	Horizontal

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Average

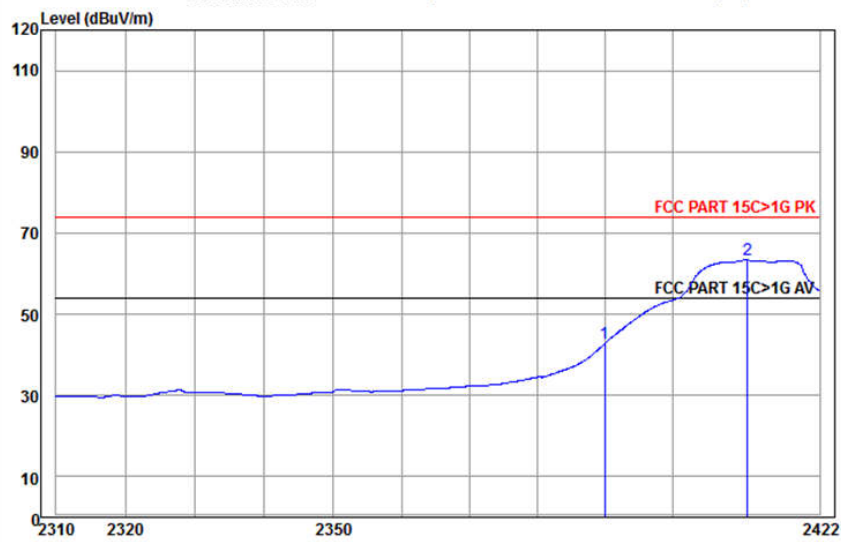


Frequency (MHz)									
	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	51.34	42.99	74.00	-31.01	Horizontal
2 pp	2411.245	32.58	3.17	44.05	71.72	63.42	74.00	-10.58	Horizontal

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

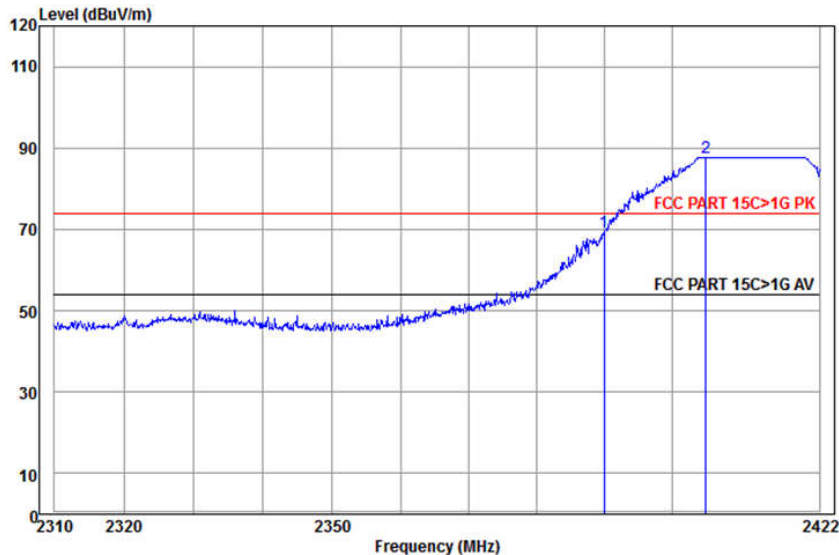


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	77.78	69.43	74.00	-4.57	Vertical
2 pp	2405.088	32.56	3.16	44.05	96.09	87.76	74.00	13.76	Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Average

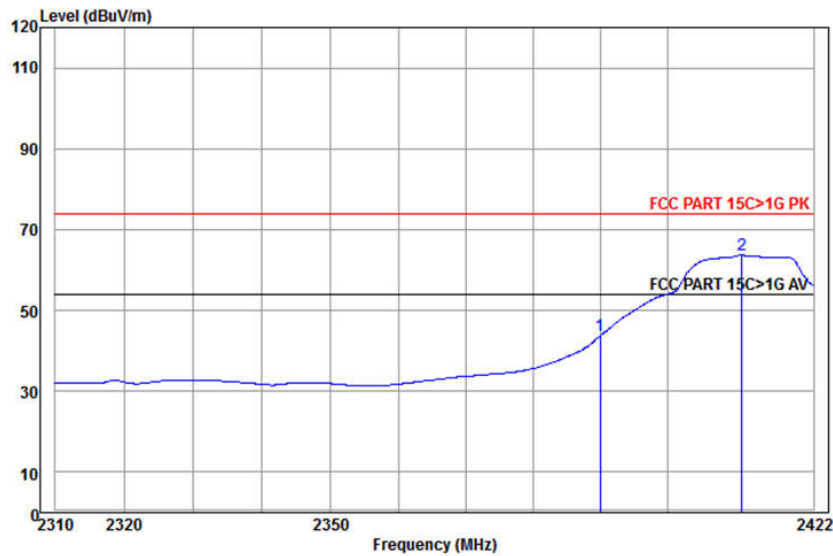


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	52.27	43.92	74.00	-30.08	Vertical
2 pp	2411.245	32.58	3.17	44.05	71.96	63.66	74.00	-10.34	Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

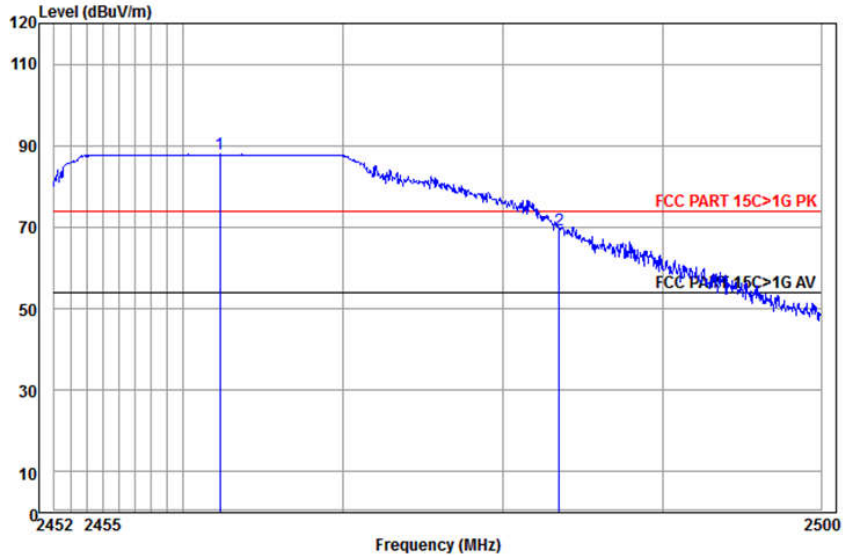


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2462.289	32.67	3.20	44.12	96.11	87.86	74.00	13.86 Horizontal
2	2483.500	32.71	3.22	44.14	77.69	69.48	74.00	-4.52 Horizontal

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

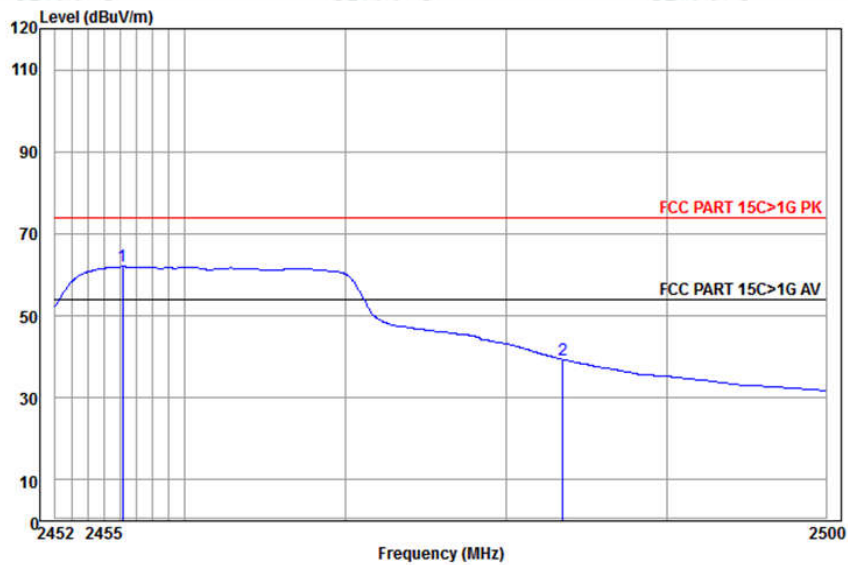


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2456.139	32.66	3.20	44.11	70.22	61.97	74.00	-12.03 Horizontal
2	2483.500	32.71	3.22	44.14	47.50	39.29	74.00	-34.71 Horizontal

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

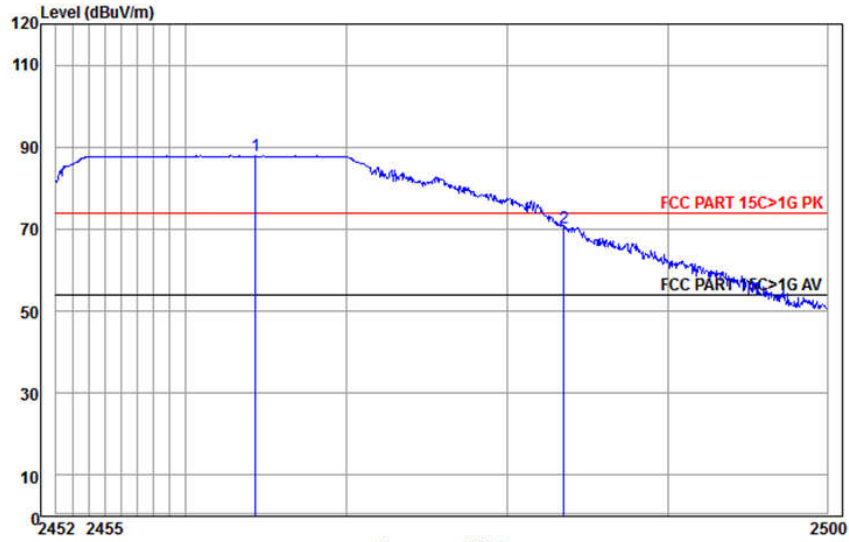


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2464.343	32.68	3.20	44.12	96.09	87.85	74.00	13.85	Vertical
2	2483.500	32.71	3.22	44.14	78.63	70.42	74.00	-3.58	Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

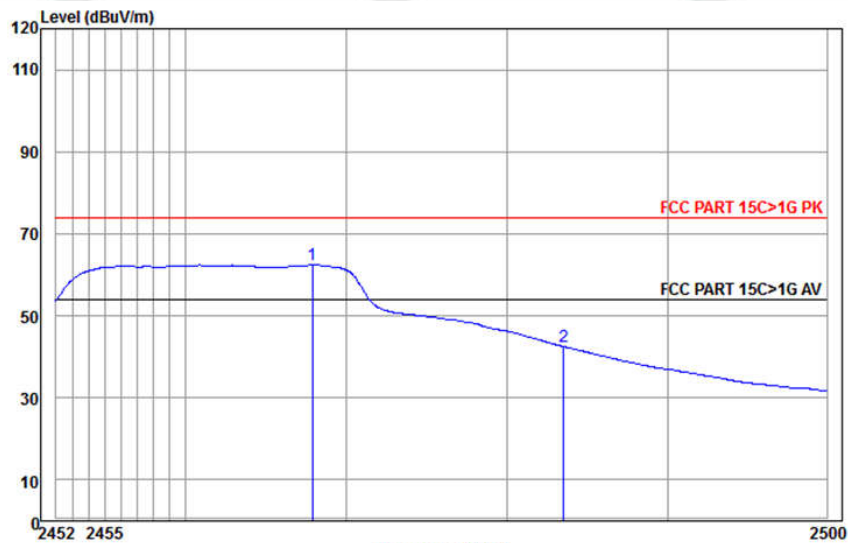


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2467.881	32.69	3.21	44.12	70.80	62.58	74.00	-11.42	Vertical
2	2483.500	32.71	3.22	44.14	50.66	42.45	74.00	-31.55	Vertical

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

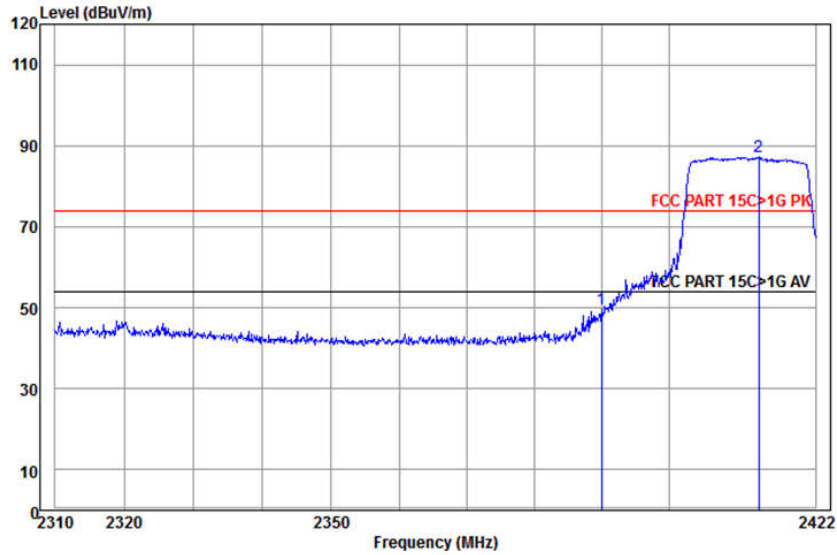


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	58.16	49.81	74.00	-24.19	Horizontal
2 pp	2413.529	32.58	3.17	44.06	95.52	87.21	74.00	13.21	Horizontal

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

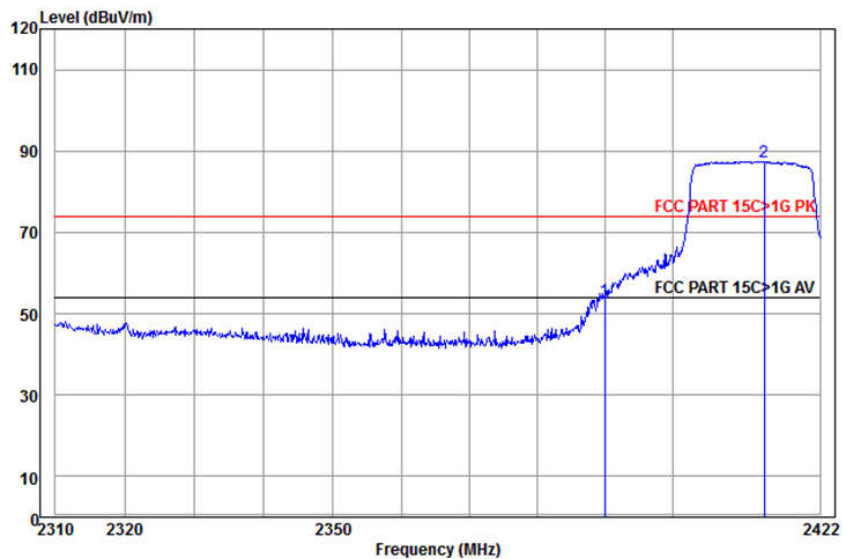


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	61.78	53.43	74.00	-20.57	Vertical
2 pp	2413.643	32.58	3.17	44.06	95.76	87.45	74.00	13.45	Vertical

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Average

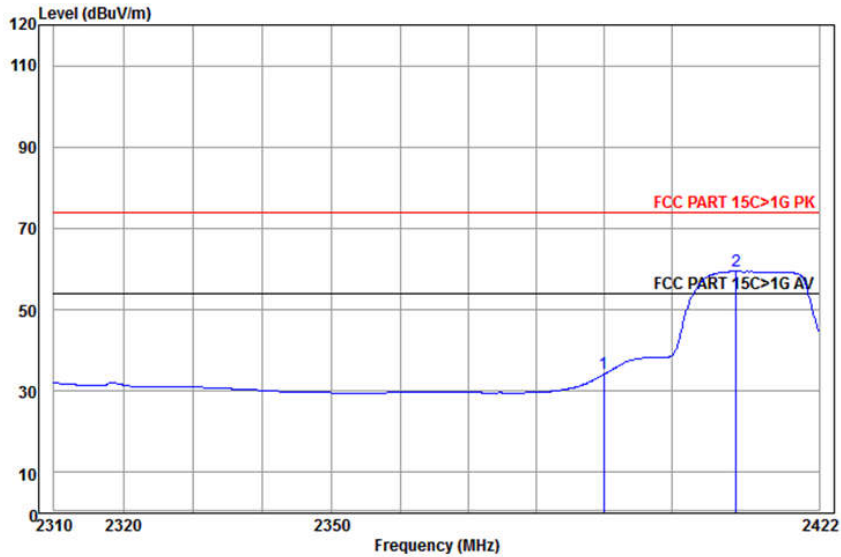


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.15	44.03	42.62	34.27	74.00	-39.73	Vertical
2	pp 2409.647	32.57	3.17	44.05	67.86	59.55	74.00	-14.45	Vertical

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

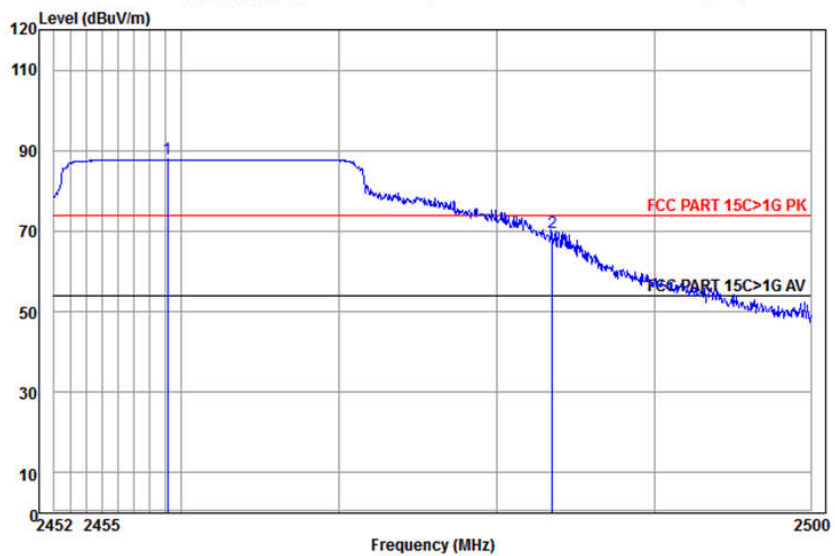


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2459.141	32.67	3.20	44.11	96.05	87.81	74.00	13.81	Horizontal
2	2483.500	32.71	3.22	44.14	77.92	69.71	74.00	-4.29	Horizontal

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

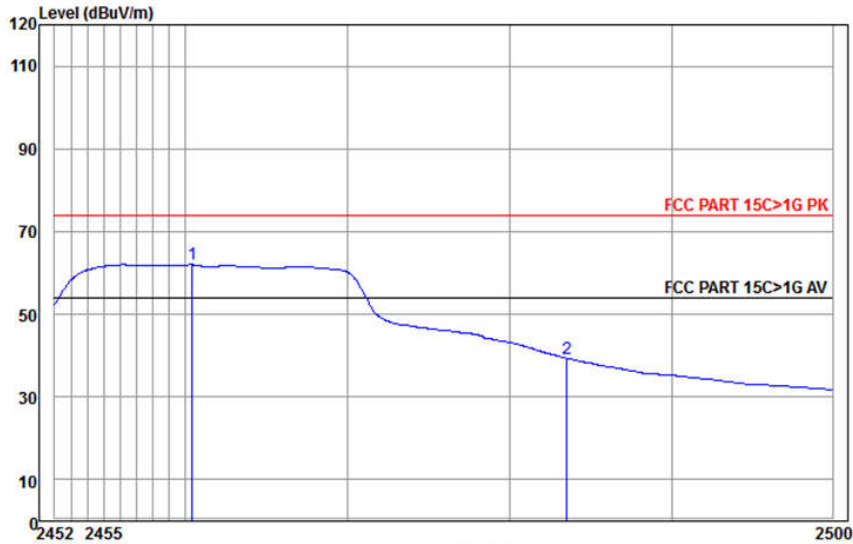


Frequency (MHz)	Ant Freq	Cable Factor	Preamp Loss	Read Level		Limit Line	Over Limit	Pol/Phase	Remark
				Level	Level				
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp 2460.428	32.67	3.20	44.11	70.24	62.00	74.00	-12.00	Horizontal	
2 2483.500	32.71	3.22	44.14	47.55	39.34	74.00	-34.66	Horizontal	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

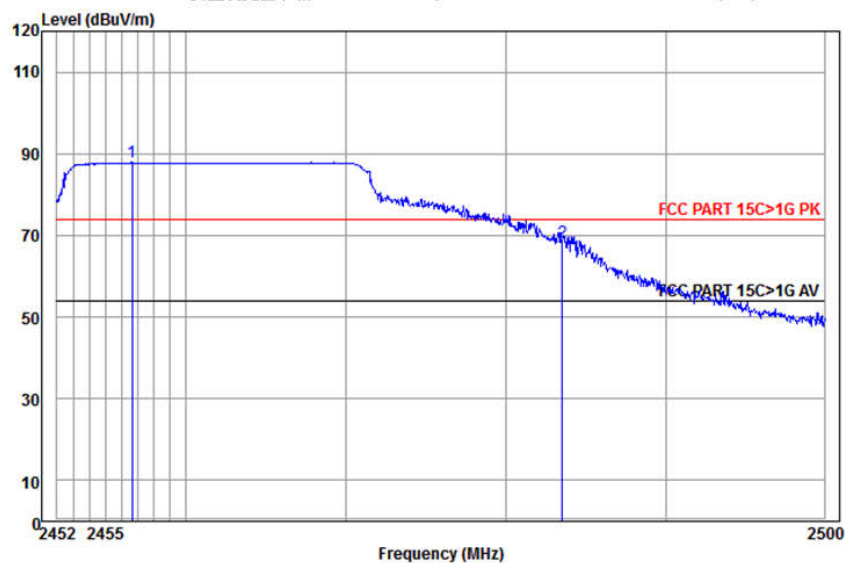

Frequency (MHz)	Ant Freq	Cable Factor	Preamp Loss	Read Level		Limit Line	Over Limit	Pol/Phase	Remark
				Level	Level				
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp 2456.663	32.66	3.20	44.11	96.08	87.83	74.00	13.83	Vertical	
2 2483.500	32.71	3.22	44.14	76.64	68.43	74.00	-5.57	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

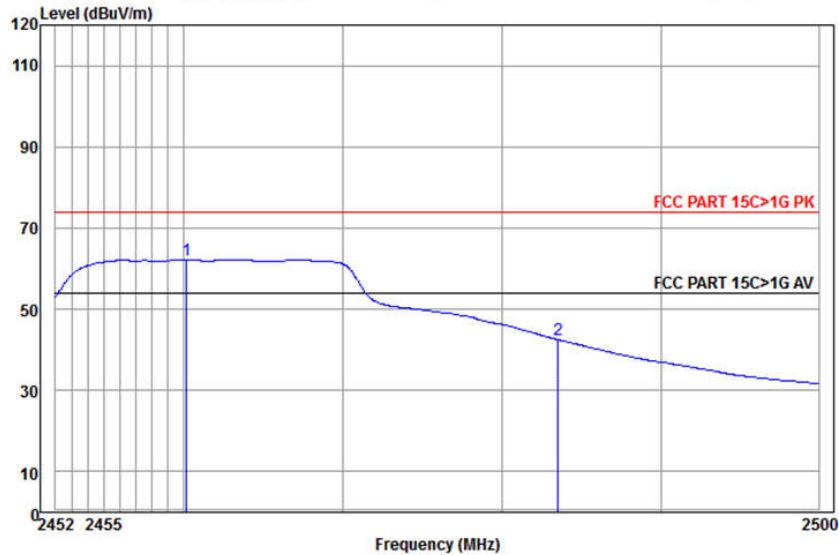

	Ant Freq	Cable Factor	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.190	32.67	3.20	44.11	70.48	62.24	74.00	-11.76	Vertical
2	2483.500	32.71	3.22	44.14	50.66	42.45	74.00	-31.55	Vertical

1) Through Pre-scan transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) , and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor


Correct Factor = Pre-amplifier Factor– Antenna Factor–Cable Factor

Appendix I): Radiated Spurious Emissions


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

30MHz~1GHz (QP)

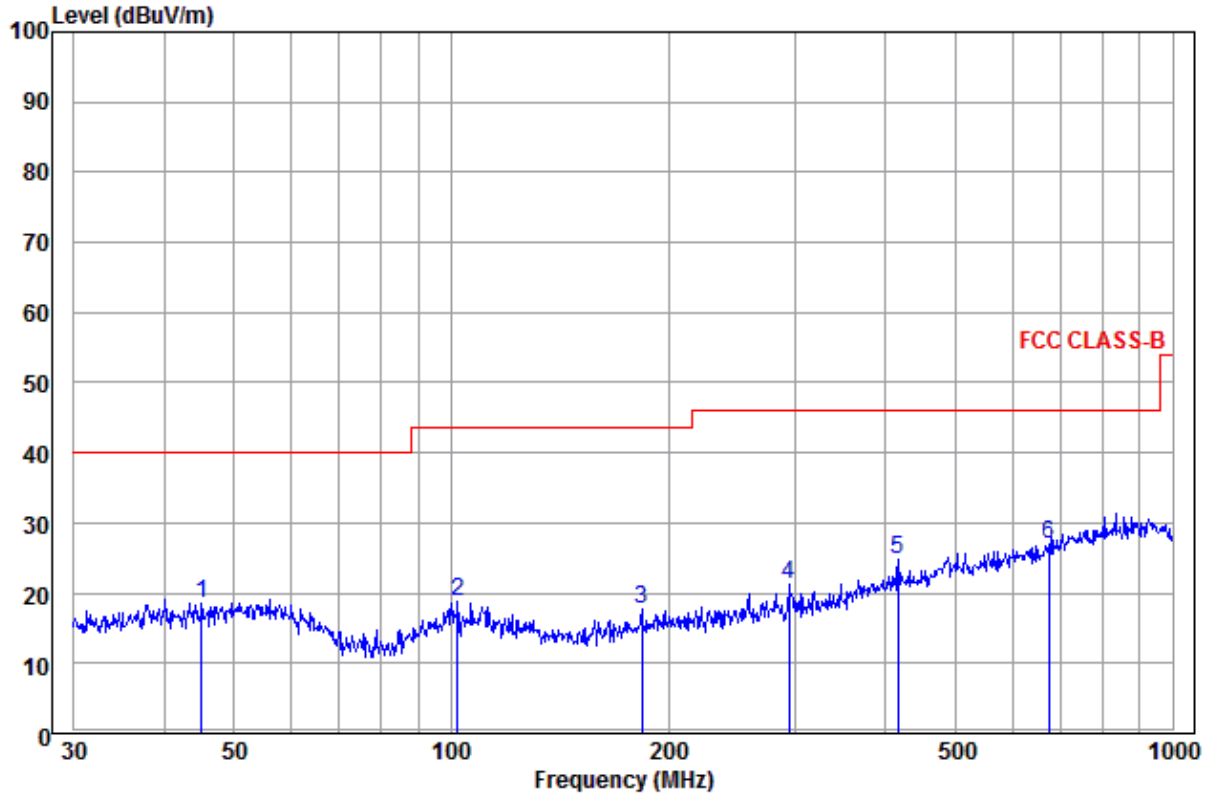

	Ant Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	45.058	14.68	0.08	3.86	18.62	40.00	-21.38	Horizontal	
2	102.001	13.03	0.59	5.15	18.77	43.50	-24.73	Horizontal	
3	183.844	11.04	0.96	5.63	17.63	43.50	-25.87	Horizontal	
4	294.114	13.38	1.10	6.79	21.27	46.00	-24.73	Horizontal	
5	416.179	16.57	1.37	6.90	24.84	46.00	-21.16	Horizontal	
6 pp	672.845	20.11	1.92	4.93	26.96	46.00	-19.04	Horizontal	

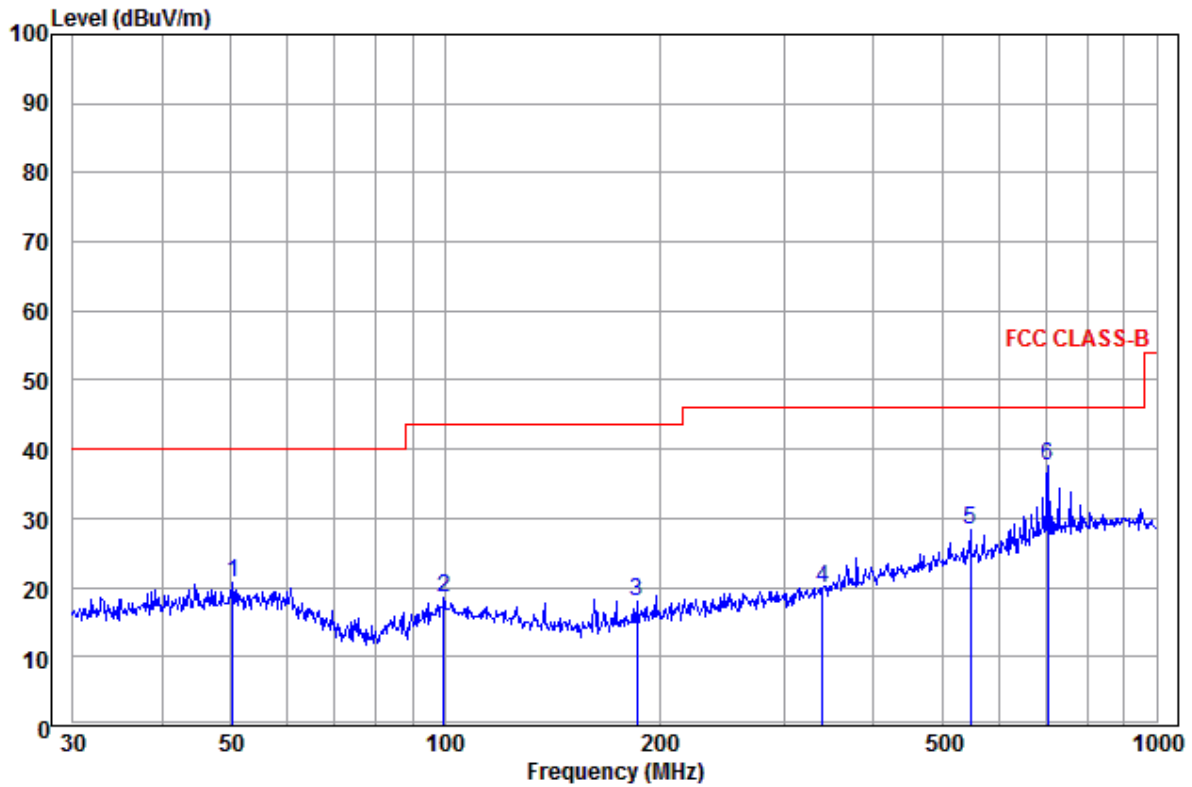

	Ant Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	50.232	15.07	0.11	5.49	20.67	40.00	-19.33	Vertical
2	99.528	13.11	0.58	4.97	18.66	43.50	-24.84	Vertical
3	185.788	11.11	0.97	5.89	17.97	43.50	-25.53	Vertical
4	339.589	14.55	1.27	4.20	20.02	46.00	-25.98	Vertical
5	547.098	18.59	1.54	8.26	28.39	46.00	-17.61	Vertical
6 pp	704.226	20.73	2.06	14.85	37.64	46.00	-8.36	Vertical

Transmitter Emission above 1GHz

Test mode: 802.11b(11Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1998.475	31.70	2.86	43.50	47.73	38.79	74.00	-35.21	Pass	Horizontal
3216.838	33.41	4.26	44.68	50.84	43.83	74.00	-30.17	Pass	Horizontal
3844.279	32.91	6.12	44.61	51.02	45.44	74.00	-28.56	Pass	Horizontal
4824.000	34.73	6.72	44.60	48.21	45.06	74.00	-28.94	Pass	Horizontal
7236.000	36.42	8.38	44.80	45.35	45.35	74.00	-28.65	Pass	Horizontal
9648.000	37.93	7.63	45.57	46.02	46.01	74.00	-27.99	Pass	Horizontal
2092.175	31.91	2.93	43.63	49.26	40.47	74.00	-33.53	Pass	Vertical
3112.129	33.50	3.91	44.69	51.06	43.78	74.00	-30.22	Pass	Vertical
3776.385	32.96	5.94	44.62	52.08	46.36	74.00	-27.64	Pass	Vertical
4824.000	34.73	6.72	44.60	48.16	45.01	74.00	-28.99	Pass	Vertical
7236.000	36.42	8.38	44.80	50.38	50.38	74.00	-23.62	Pass	Vertical
9648.000	37.93	7.63	45.57	47.38	47.37	74.00	-26.63	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1846.834	31.47	2.79	43.64	48.66	39.28	74.00	-34.72	Pass	Horizontal
3653.463	33.05	5.59	44.63	51.56	45.57	74.00	-28.43	Pass	Horizontal
4288.958	33.52	6.61	44.60	48.18	43.71	74.00	-30.29	Pass	Horizontal
4874.000	34.84	6.73	44.60	47.53	44.50	74.00	-29.50	Pass	Horizontal
7311.000	36.43	8.44	44.86	46.99	47.00	74.00	-27.00	Pass	Horizontal
9748.000	38.03	7.55	45.55	47.32	47.35	74.00	-26.65	Pass	Horizontal
2124.374	31.98	2.96	43.68	49.16	40.42	74.00	-33.58	Pass	Vertical
3653.463	33.05	5.59	44.63	52.92	46.93	74.00	-27.07	Pass	Vertical
4223.950	33.36	6.59	44.60	49.66	45.01	74.00	-28.99	Pass	Vertical
4874.000	34.84	6.73	44.60	48.92	45.89	74.00	-28.11	Pass	Vertical
7311.000	36.43	8.44	44.86	49.88	49.89	74.00	-24.11	Pass	Vertical
9748.000	38.03	7.55	45.55	45.49	45.52	74.00	-28.48	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2275.515	32.30	3.07	43.88	53.10	44.59	74.00	-29.41	Pass	Horizontal
3690.853	33.02	5.70	44.63	54.85	48.94	74.00	-25.06	Pass	Horizontal
4343.896	33.65	6.62	44.60	49.40	45.07	74.00	-28.93	Pass	Horizontal
4924.000	34.94	6.74	44.60	50.96	48.04	74.00	-25.96	Pass	Horizontal
7386.000	36.44	8.50	44.92	49.70	49.72	74.00	-24.28	Pass	Horizontal
9848.000	38.14	7.47	45.53	45.40	45.48	74.00	-28.52	Pass	Horizontal
2281.315	32.32	3.08	43.89	53.39	44.90	74.00	-29.10	Pass	Vertical
3018.502	33.58	3.59	44.70	54.30	46.77	74.00	-27.23	Pass	Vertical
3700.260	33.02	5.73	44.63	52.70	46.82	74.00	-27.18	Pass	Vertical
4924.000	34.94	6.74	44.60	53.29	50.37	74.00	-23.63	Pass	Vertical
7386.000	36.44	8.50	44.92	49.06	49.08	74.00	-24.92	Pass	Vertical
9848.000	38.14	7.47	45.53	45.36	45.44	74.00	-28.56	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1791.273	31.38	2.76	43.69	48.52	38.97	74.00	-35.03	Pass	Horizontal
3200.502	33.42	4.21	44.68	50.05	43.00	74.00	-31.00	Pass	Horizontal
4223.950	33.36	6.59	44.60	49.37	44.72	74.00	-29.28	Pass	Horizontal
4824.000	34.73	6.72	44.60	47.69	44.54	74.00	-29.46	Pass	Horizontal
7236.000	36.42	8.38	44.80	47.29	47.29	74.00	-26.71	Pass	Horizontal
9648.000	37.93	7.63	45.57	47.31	47.30	74.00	-26.70	Pass	Horizontal
2050.000	31.82	2.90	43.57	49.35	40.50	74.00	-33.50	Pass	Vertical
3176.155	33.44	4.13	44.68	49.86	42.75	74.00	-31.25	Pass	Vertical
3903.444	32.87	6.28	44.61	50.44	44.98	74.00	-29.02	Pass	Vertical
4824.000	34.73	6.72	44.60	47.28	44.13	74.00	-29.87	Pass	Vertical
7236.000	36.42	8.38	44.80	46.40	46.40	74.00	-27.60	Pass	Vertical
9648.000	37.93	7.63	45.57	45.42	45.41	74.00	-28.59	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1795.839	31.39	2.76	43.69	48.73	39.19	74.00	-34.81	Pass	Horizontal
3192.366	33.43	4.18	44.68	50.93	43.86	74.00	-30.14	Pass	Horizontal
3863.900	32.90	6.18	44.61	50.22	44.69	74.00	-29.31	Pass	Horizontal
4874.000	34.84	6.73	44.60	48.06	45.03	74.00	-28.97	Pass	Horizontal
7311.000	36.43	8.44	44.86	47.32	47.33	74.00	-26.67	Pass	Horizontal
9748.000	38.03	7.55	45.55	46.66	46.69	74.00	-27.31	Pass	Horizontal
2081.550	31.89	2.93	43.62	47.46	38.66	74.00	-35.34	Pass	Vertical
3463.291	33.20	5.03	44.65	48.54	42.12	74.00	-31.88	Pass	Vertical
4065.707	32.97	6.56	44.60	49.44	44.37	74.00	-29.63	Pass	Vertical
4874.000	34.84	6.73	44.60	46.68	43.65	74.00	-30.35	Pass	Vertical
7311.000	36.43	8.44	44.86	46.42	46.43	74.00	-27.57	Pass	Vertical
9748.000	38.03	7.55	45.55	45.14	45.17	74.00	-28.83	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2097.507	31.92	2.94	43.64	49.03	40.25	74.00	-33.75	Pass	Horizontal
3274.672	33.36	4.45	44.67	49.73	42.87	74.00	-31.13	Pass	Horizontal
4076.070	32.99	6.56	44.60	48.13	43.08	74.00	-30.92	Pass	Horizontal
4924.000	34.94	6.74	44.60	48.31	45.39	74.00	-28.61	Pass	Horizontal
7386.000	36.44	8.50	44.92	46.67	46.69	74.00	-27.31	Pass	Horizontal
9848.000	38.14	7.47	45.53	47.46	47.54	74.00	-26.46	Pass	Horizontal
1809.605	31.41	2.77	43.67	47.84	38.35	74.00	-35.65	Pass	Vertical
2740.198	33.18	3.38	44.43	46.75	38.88	74.00	-35.12	Pass	Vertical
3359.099	33.29	4.71	44.66	49.33	42.67	74.00	-31.33	Pass	Vertical
4924.000	34.94	6.74	44.60	47.45	44.53	74.00	-29.47	Pass	Vertical
7386.000	36.44	8.50	44.92	46.37	46.39	74.00	-27.61	Pass	Vertical
9848.000	38.14	7.47	45.53	48.20	48.28	74.00	-25.72	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1894.450	31.54	2.81	43.59	48.76	39.52	74.00	-34.48	Pass	Horizontal
3200.502	33.42	4.21	44.68	50.11	43.06	74.00	-30.94	Pass	Horizontal
4388.352	33.76	6.63	44.60	50.39	46.18	74.00	-27.82	Pass	Horizontal
4824.000	34.73	6.72	44.60	47.12	43.97	74.00	-30.03	Pass	Horizontal
7236.000	36.42	8.38	44.80	46.80	46.80	74.00	-27.20	Pass	Horizontal
9648.000	37.93	7.63	45.57	48.06	48.05	74.00	-25.95	Pass	Horizontal
2076.259	31.88	2.92	43.61	49.39	40.58	74.00	-33.42	Pass	Vertical
3690.853	33.02	5.70	44.63	50.53	44.62	74.00	-29.38	Pass	Vertical
4388.352	33.76	6.63	44.60	48.63	44.42	74.00	-29.58	Pass	Vertical
4824.000	34.73	6.72	44.60	47.10	43.95	74.00	-30.05	Pass	Vertical
7236.000	36.42	8.38	44.80	47.12	47.12	74.00	-26.88	Pass	Vertical
9648.000	37.93	7.63	45.57	46.72	46.71	74.00	-27.29	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1948.245	31.62	2.84	43.55	46.78	37.69	74.00	-36.31	Pass	Horizontal
3342.042	33.30	4.66	44.66	49.28	42.58	74.00	-31.42	Pass	Horizontal
4096.875	33.05	6.56	44.60	49.30	44.31	74.00	-29.69	Pass	Horizontal
4874.000	34.84	6.73	44.60	47.16	44.13	74.00	-29.87	Pass	Horizontal
7311.000	36.43	8.44	44.86	46.92	46.93	74.00	-27.07	Pass	Horizontal
9748.000	38.03	7.55	45.55	46.66	46.69	74.00	-27.31	Pass	Horizontal
2055.225	31.83	2.91	43.58	48.14	39.30	74.00	-34.70	Pass	Vertical
3570.714	33.12	5.35	44.64	48.24	42.07	74.00	-31.93	Pass	Vertical
4117.785	33.10	6.57	44.60	47.86	42.93	74.00	-31.07	Pass	Vertical
4874.000	34.84	6.73	44.60	49.31	46.28	74.00	-27.72	Pass	Vertical
7311.000	36.43	8.44	44.86	48.33	48.34	74.00	-25.66	Pass	Vertical
9748.000	38.03	7.55	45.55	47.46	47.49	74.00	-26.51	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1755.164	31.32	2.74	43.73	47.19	37.52	74.00	-36.48	Pass	Horizontal
3200.502	33.42	4.21	44.68	50.39	43.34	74.00	-30.66	Pass	Horizontal
3815.033	32.93	6.04	44.62	50.49	44.84	74.00	-29.16	Pass	Horizontal
4924.000	34.94	6.74	44.60	48.42	45.50	74.00	-28.50	Pass	Horizontal
7386.000	36.44	8.50	44.92	47.65	47.67	74.00	-26.33	Pass	Horizontal
9848.000	38.14	7.47	45.53	45.74	45.82	74.00	-28.18	Pass	Horizontal
1791.273	31.38	2.76	43.69	48.25	38.70	74.00	-35.30	Pass	Vertical
3143.979	33.47	4.02	44.68	49.18	41.99	74.00	-32.01	Pass	Vertical
3943.392	32.84	6.39	44.60	47.87	42.50	74.00	-31.50	Pass	Vertical
4924.000	34.94	6.74	44.60	47.75	44.83	74.00	-29.17	Pass	Vertical
7386.000	36.44	8.50	44.92	47.77	47.79	74.00	-26.21	Pass	Vertical
9848.000	38.14	7.47	45.53	46.93	47.01	74.00	-26.99	Pass	Vertical

Remark:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP


Test mode No.: WPC23

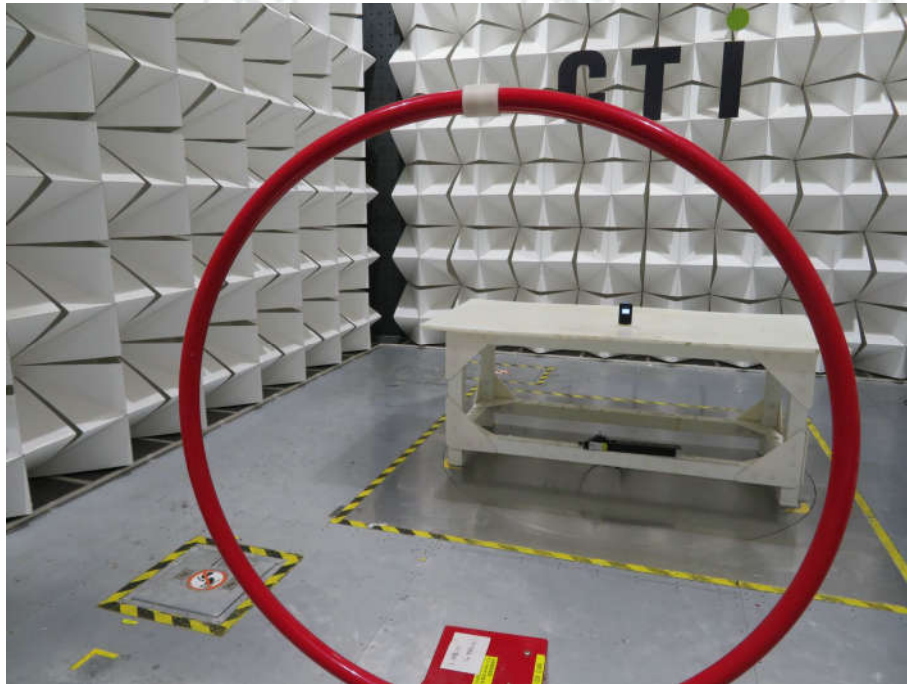

Radiated emission Test Setup-1 (9kHz~30MHz)



Radiated spurious emission Test Setup-2(30MHz-1GHz)

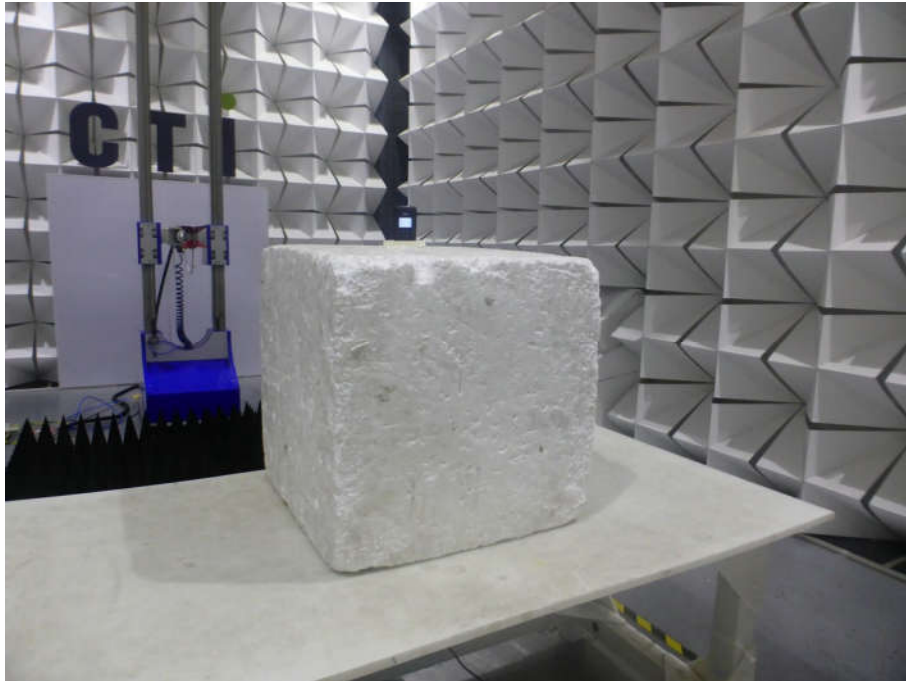

Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32J00095402 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.