

Test Laboratory: BTL Inc.      Date: 2019/8/21

## T19\_UMTS B2\_RMC12.2K\_CH9262\_Rear Face\_0cm

### DUT: WisePOS Pro;

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.338$  S/m;  $\epsilon_r = 39.764$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(7.21, 7.21, 7.21) @ 1852.4 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x9x1):** Interpolated grid:  $dx=15$  mm,  $dy=15$  mm

Maximum value of SAR (interpolated) = 0.391 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.729 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.591 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.401 W/kg

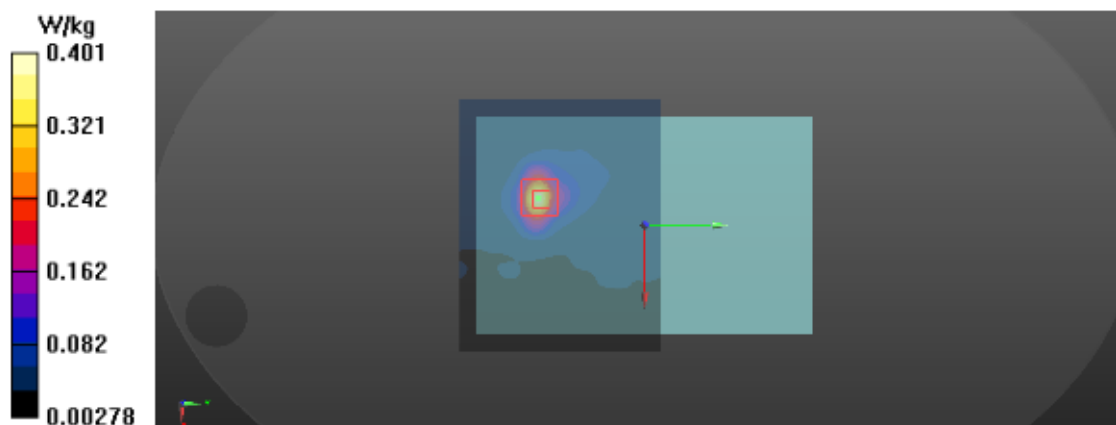

Test Laboratory: BTL Inc.      Date: 2019/8/21

## T22\_UMTS B4\_RMC12.2K\_CH1413\_Rear Face\_0cm

**DUT: WisePOS Pro;**

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 39.393$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(7.5, 7.5, 7.5) @ 1732.6 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x11x1):** Interpolated grid:  $dx=15$  mm,  $dy=15$  mm

Maximum value of SAR (interpolated) = 0.739 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.610 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.337 W/kg**

Maximum value of SAR (measured) = 0.758 W/kg

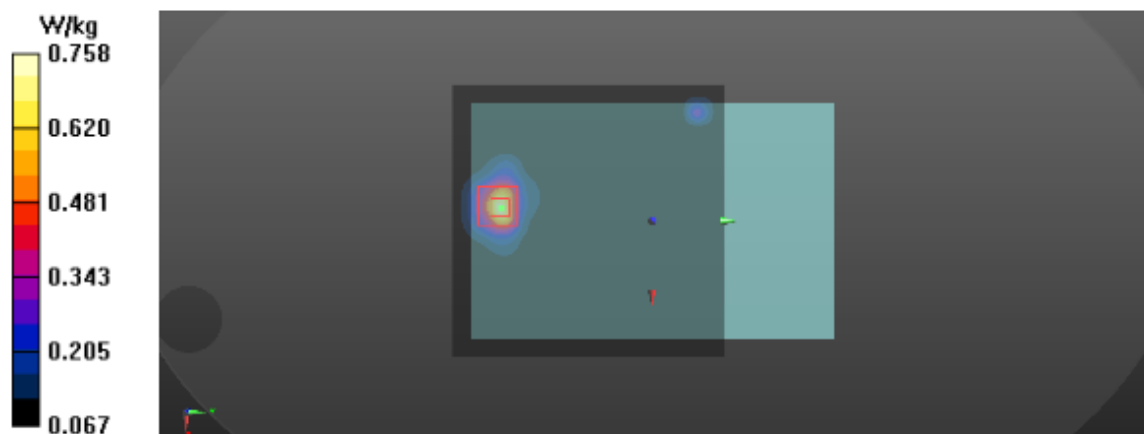

Test Laboratory: BTL Inc.      Date: 2019/8/20

### T32\_UMTS B5\_RMC12.2K\_CH4182\_Bottom Side\_0cm

#### DUT: WisePOS Pro;

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 42.889$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(8.57, 8.57, 8.57) @ 836.4 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (7x12x1):** Interpolated grid:  $dx=15$  mm,  $dy=15$  mm

Maximum value of SAR (interpolated) = 0.180 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 11.57 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.696 W/kg

**SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.440 W/kg

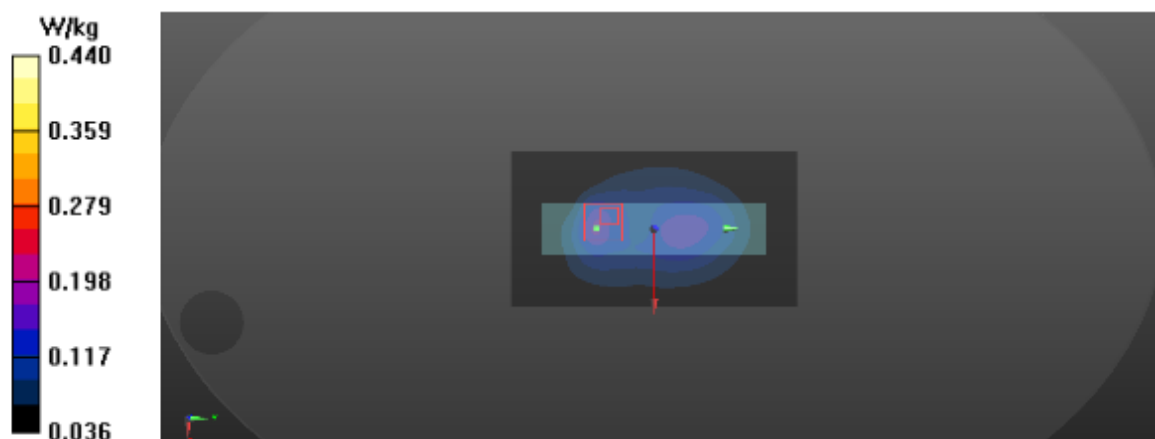

Test Laboratory: BTL Inc.      Date: 2019/8/21

### T43\_LTE B2\_QPSK20M\_CH18700\_1RB\_Rear Face\_0cm

**DUT: WisePOS Pro;**

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.345$  S/m;  $\epsilon_r = 39.745$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(7.21, 7.21, 7.21) @ 1860 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x9x1):** Interpolated grid:  $dx=15$  mm,  $dy=15$  mm

Maximum value of SAR (interpolated) = 0.507 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 23.82 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.895 W/kg

**SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 0.458 W/kg

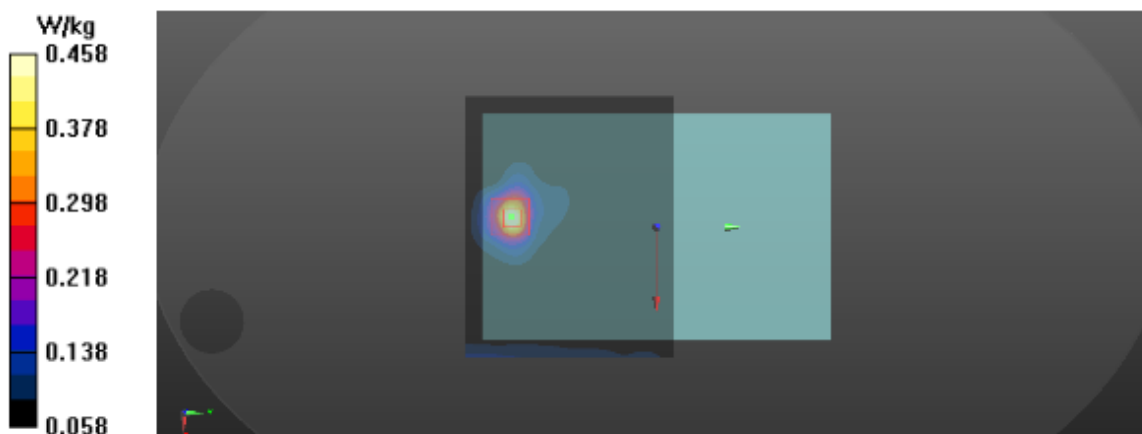

Test Laboratory: BTL Inc.      Date: 2019/8/21

## T46\_LTE B4\_QPSK20M\_CH20300\_1RB\_Rear Face\_0cm

### DUT: WisePOS Pro;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.392$  S/m;  $\epsilon_r = 39.331$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(7.5, 7.5, 7.5) @ 1745 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x11x1):** Interpolated grid:  $dx=15$  mm,  $dy=15$  mm

Maximum value of SAR (interpolated) = 0.691 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.525 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.324 W/kg**

Maximum value of SAR (measured) = 0.715 W/kg

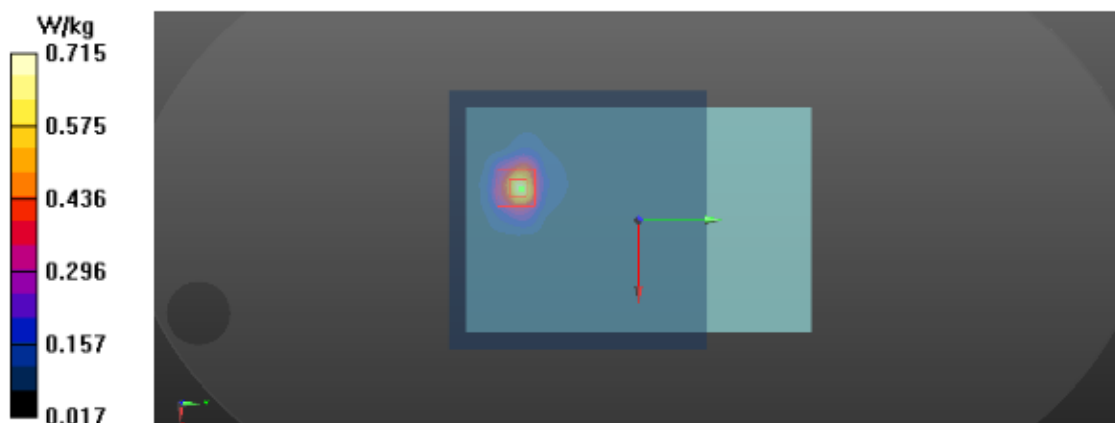

Test Laboratory: BTL Inc.      Date: 2019/8/20

### T57\_LTE B5\_QPSK10M\_CH20600\_1RB\_Rear Face\_0cm

**DUT: WisePOS Pro;**

Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 0.944 \text{ S/m}$ ;  $\epsilon_r = 42.788$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(8.57, 8.57, 8.57) @ 844 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x11x1):** Interpolated grid:  $dx=15 \text{ mm}$ ,  $dy=15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.189 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.952 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.129 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

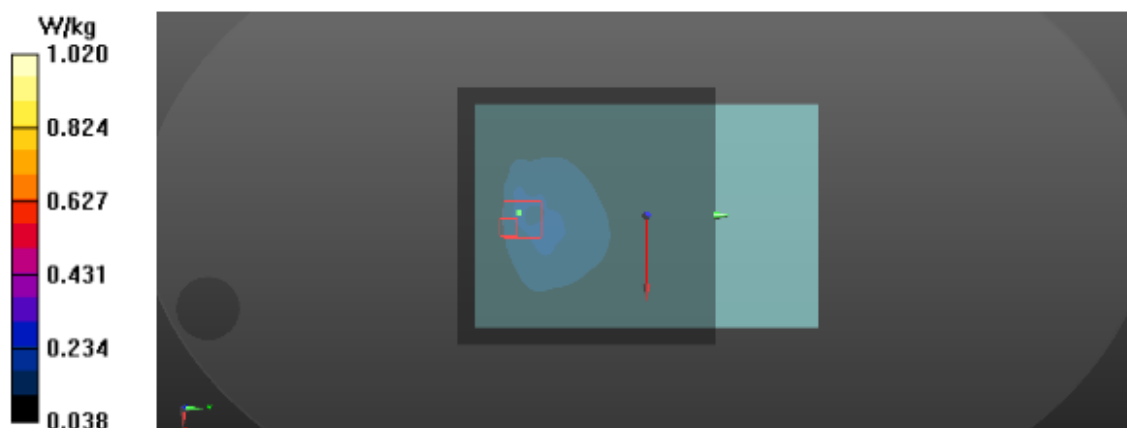

Test Laboratory: BTL Inc.      Date: 2019/8/21

## T68\_LTE B7\_QPSK20M\_CH21350\_1RB\_Rear Face\_0cm

**DUT: WisePOS Pro;**

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.002$  S/m;  $\epsilon_r = 37.869$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(6.47, 6.47, 6.47) @ 2560 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (13x13x1):** Interpolated grid:  $dx=12$  mm,  $dy=12$  mm

Maximum value of SAR (interpolated) = 0.195 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 7.232 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.582 W/kg

**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

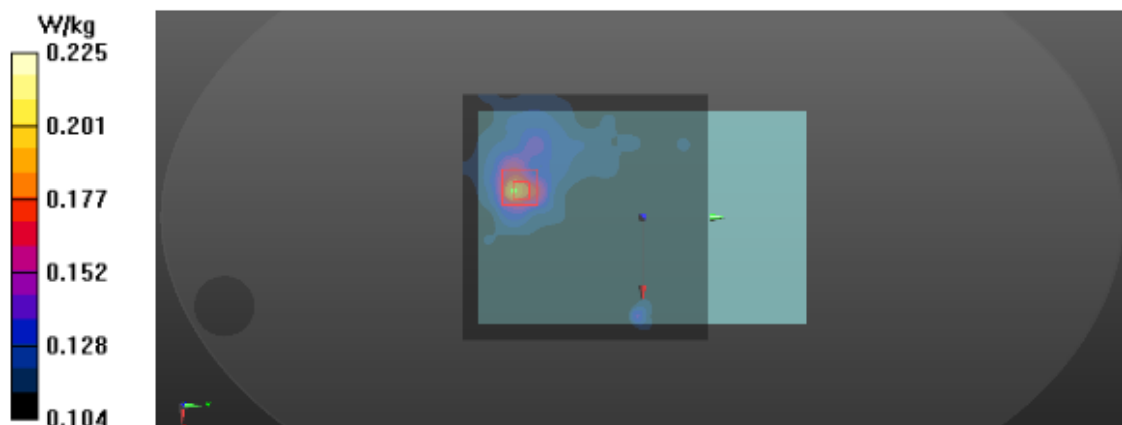

Test Laboratory: BTL Inc.      Date: 2019/8/20

### T87\_LTE B12\_QPSK10M\_CH23060\_1RB\_Rear Face\_0cm

**DUT: WisePOS Pro;**

Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.849$  S/m;  $\epsilon_r = 42.198$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(8.74, 8.74, 8.74) @ 704 MHz; Calibrated: 2019/1/24
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x11x1):** Interpolated grid:  $dx=15$  mm,  $dy=15$  mm

Maximum value of SAR (interpolated) = 0.386 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.894 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.243 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

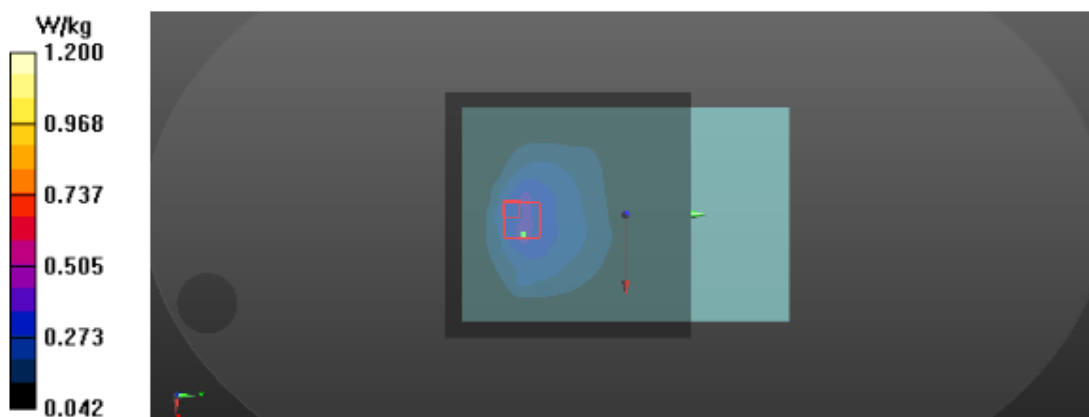



Test Laboratory: BTL Inc.      Date: 2019/8/20

### T90\_LTE B13\_QPSK10M\_CH23230\_1RB\_Rear Face\_0cm

**DUT: WisePOS Pro;**

Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.926 \text{ S/m}$ ;  $\epsilon_r = 41.078$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(8.57, 8.57, 8.57) @ 782 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (11x9x1):** Interpolated grid:  $dx=15 \text{ mm}$ ,  $dy=15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.259 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.369 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.429 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.174 W/kg**

Maximum value of SAR (measured) = 0.269 W/kg

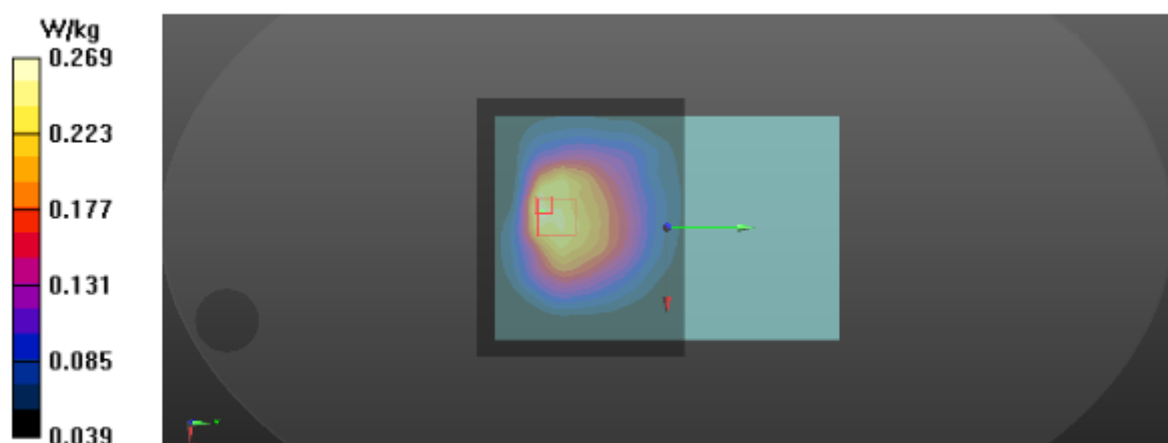

Test Laboratory: BTL Inc.      Date: 2019/8/22

### T101\_802.11b\_CH11\_Left Side\_0cm

#### DUT: WisePOS Pro;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS,1Mbps) (0); Frequency: 2462 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 38.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(6.63, 6.63, 6.63) @ 2462 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (8x13x1):** Interpolated grid:  $dx=12$  mm,  $dy=12$  mm

Maximum value of SAR (interpolated) = 0.0986 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.335 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 7.59 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.115 W/kg**

Maximum value of SAR (measured) = 3.11 W/kg

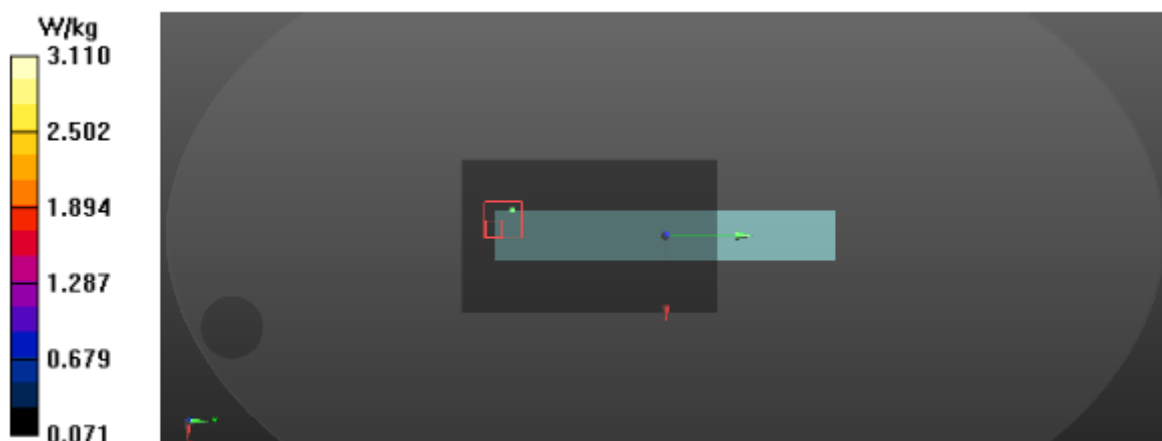

Test Laboratory: BTL Inc.      Date: 2019/8/22

### T107\_802.11a\_CH60\_Left Side\_0cm

#### DUT: WisePOS Pro;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5300 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.968$  S/m;  $\epsilon_r = 36.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(4.77, 4.77, 4.77) @ 5300 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (10x16x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.443 W/kg


**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.256 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.655 W/kg

**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.383 W/kg**

Maximum value of SAR (measured) = 0.510 W/kg

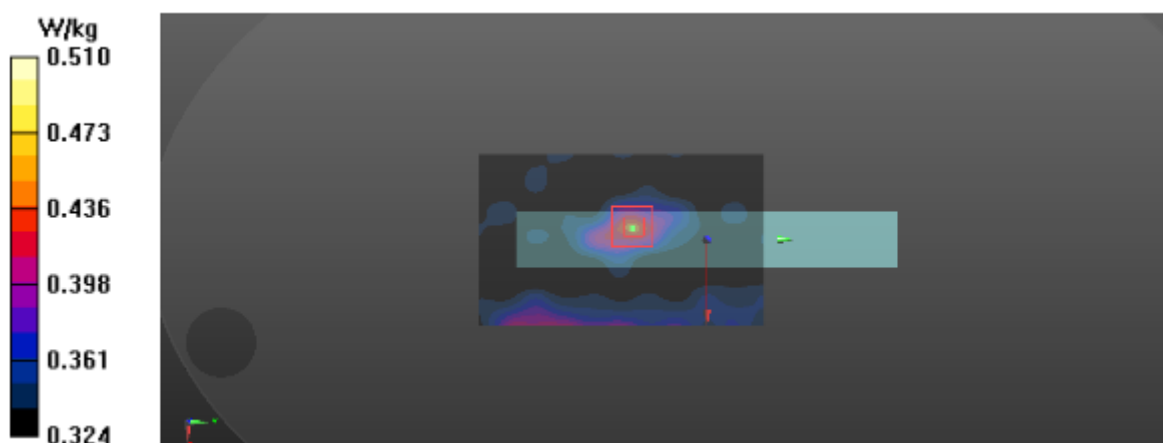

Test Laboratory: BTL Inc.      Date: 2019/8/22

### T113\_802.11a\_CH140\_Left Side\_0cm

#### DUT: WisePOS Pro;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5700 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.409$  S/m;  $\epsilon_r = 35.391$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(4.29, 4.29, 4.29) @ 5700 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (10x16x1):** Interpolated grid:  $dx=10$  mm,  $dy=10$  mm

Maximum value of SAR (interpolated) = 0.735 W/kg


**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 8.380 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.522 W/kg**

Maximum value of SAR (measured) = 0.851 W/kg

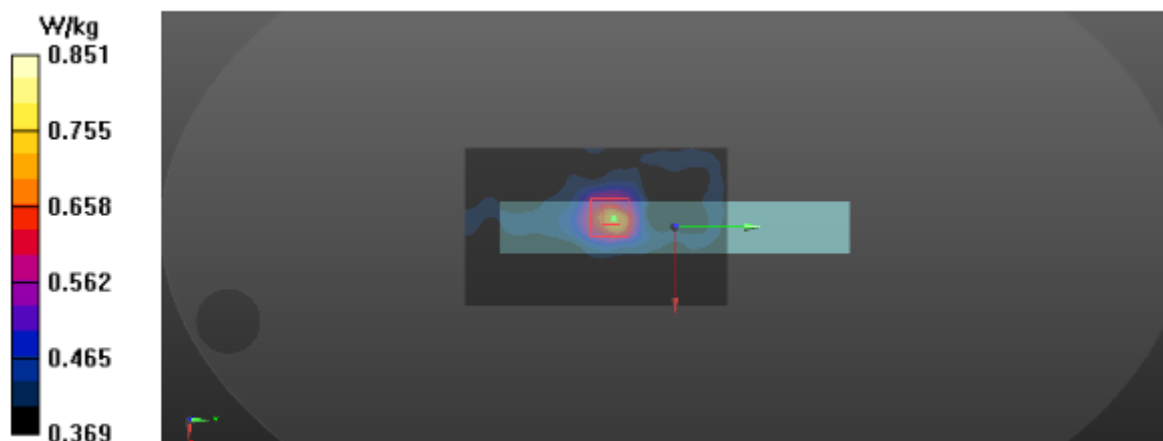

Test Laboratory: BTL Inc.      Date: 2019/8/22

### T122\_802.11a\_CH153\_Left Side\_0cm

#### DUT: WisePOS Pro;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5765 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 5765$  MHz;  $\sigma = 5.477$  S/m;  $\epsilon_r = 35.284$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN3685; ConvF(4.29, 4.29, 4.29) @ 5765 MHz; Calibrated: 2019/3/25
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/5/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (10x16x1):** Interpolated grid:  $dx=10$  mm,  $dy=10$  mm

Maximum value of SAR (interpolated) = 0.748 W/kg


**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 8.298 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.534 W/kg**

Maximum value of SAR (measured) = 0.834 W/kg

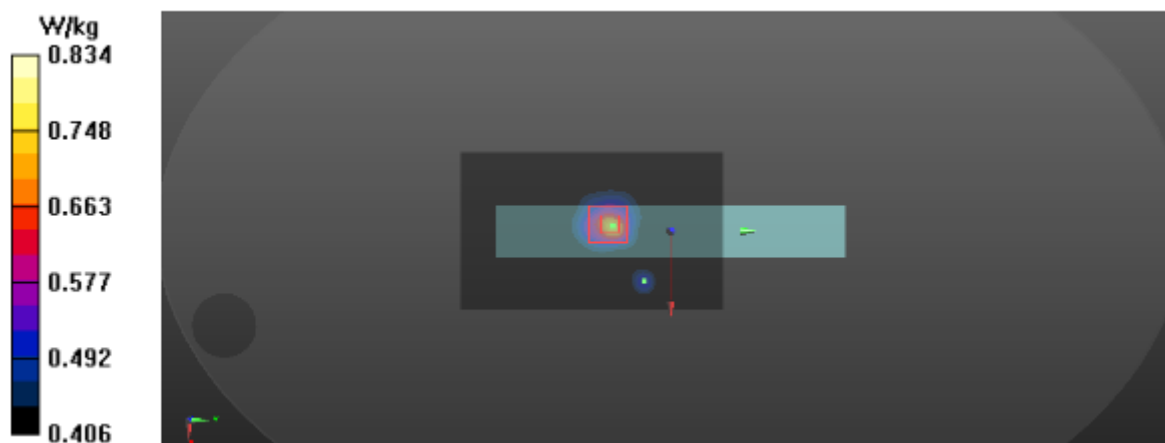

Test Laboratory: BTL Inc.      Date: 2019/8/23

### T125\_BT DH5\_CH78\_Left Side\_0cm

**DUT: Tablet;**

Communication System: UID 0, IEEE802.15.1 BluetoothGFSK,DH5 (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.89$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: ES3DV3 - SN3162; ConvF(4.5, 4.5, 4.5) @ 2480 MHz; Calibrated: 2019/4/12
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- Electronics: DAE3 Sn420; Calibrated: 2019/6/21
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (8x13x1):** Interpolated grid:  $dx=12$  mm,  $dy=12$  mm

Maximum value of SAR (interpolated) = 0.00555 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.328 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.00961 W/kg

**SAR(1 g) = 0.00416 W/kg; SAR(10 g) = 0.00196 W/kg**

Maximum value of SAR (measured) = 0.00556 W/kg

